



(51) International Patent Classification:

H04L 12/24 (2006.01)

(21) International Application Number:

PCT/CN2019/086428

(22) International Filing Date:

10 May 2019 (10.05.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/670,629 11 May 2018 (11.05.2018) US

16/407,449 09 May 2019 (09.05.2019) US

(71) Applicant: **MEDIATEK INC.** [CN/CN]; No. 1, Dusing Rd. 1st, Science-Based Industrial Park, Hsin-Chu, Taiwan 300 (CN).

(72) Inventors: **HUANG-FU, Chien-Chun**; No. 1, Dusing Rd. 1st, Science-Based Industrial Park, Hsin-Chu, Taiwan 300 (CN). **CHEN, Chi-Hsien**; No. 1, Dusing Rd. 1st, Science-Based Industrial Park, Hsin-Chu, Taiwan 300 (CN).

(74) Agent: **BEIJING SANYOU INTELLECTUAL PROP-**

**ERTY AGENCY LTD.**; 16th Fl., Block A, Corporate Square, No. 35 Jinrong Street, Beijing 100033 (CN).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ABORT UE-REQUESTED PDU SESSION RELEASE PROCEDURE ON COLLISION

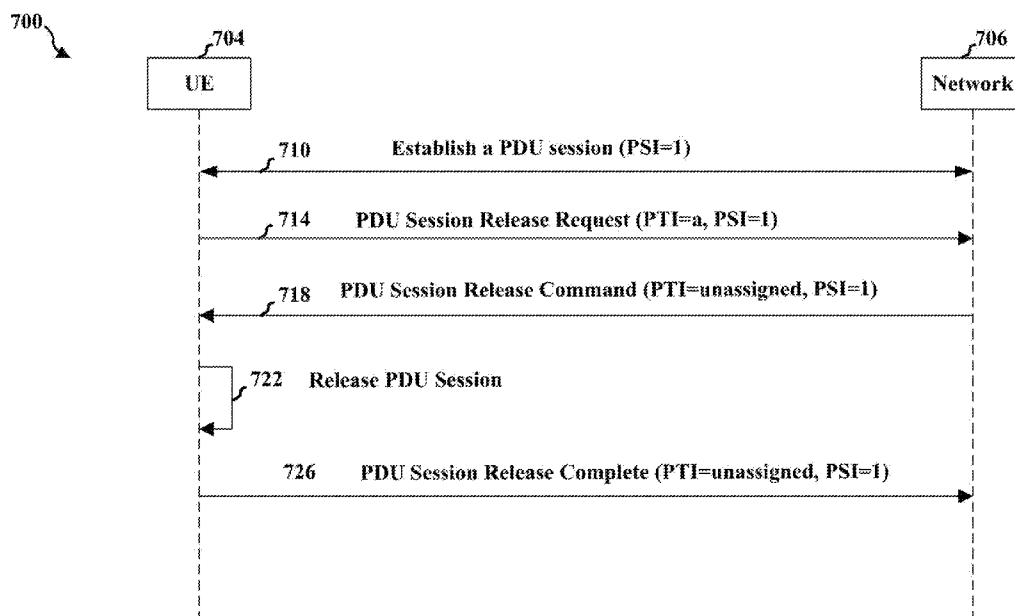


FIG. 7

(57) Abstract: In an aspect of the disclosure, a method, a computer-readable medium, and an apparatus are provided. The apparatus may be a UE. The UE sends, in a first transaction, a request to a network for releasing a protocol data unit (PDU) session established between the UE and the network. The UE receives, while waiting for a first command sent from the network for releasing the PDU session in the first transaction, a second command from the network for releasing the PDU session in a second transaction. The UE aborts the first transaction.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

ABORT UE-REQUESTED PDU SESSION RELEASE  
PROCEDURE ON COLLISION

CROSS-REFERENCE TO RELATED APPLICATION(S)

5       **[0001]** This application claims the benefits of U.S. Provisional Application Serial No. 62/670,629, entitled “Performance Enhancement on 5GSM” and filed on May 11, 2018, and U.S. Application No. 16/407,449, filed on May 9, 2019, which are expressly incorporated by reference herein in their entirety.

FIELD

10       **[0002]** The present disclosure relates generally to communication systems, and more particularly, to techniques of releasing a protocol data unit (PDU) session by a user equipment (UE).

BACKGROUND

15       **[0003]** The statements in this section merely provide background information related to the present disclosure and may not constitute prior art.

20       **[0004]** Wireless communication systems are widely deployed to provide various telecommunication services such as telephony, video, data, messaging, and broadcasts. Typical wireless communication systems may employ multiple-access technologies capable of supporting communication with multiple users by sharing available system resources. Examples of such multiple-access technologies include code division multiple access (CDMA) systems, time division multiple access (TDMA) systems, frequency division multiple access (FDMA) systems, orthogonal frequency division multiple access (OFDMA) systems, single-carrier frequency division multiple access (SC-FDMA) systems, and time division synchronous code division multiple access (TD-SCDMA) systems.

25       **[0005]** These multiple access technologies have been adopted in various telecommunication standards to provide a common protocol that enables different wireless devices to communicate on a municipal, national, regional, and even global level. An example telecommunication standard is 5G New Radio (NR). 5G NR is part of a continuous mobile broadband evolution promulgated by Third Generation Partnership Project (3GPP) to meet new requirements associated with latency, reliability, security, scalability (e.g., with Internet of Things (IoT)), and other requirements. Some aspects of 5G NR may be based on the 4G Long Term Evolution (LTE) standard. There exists a need for further improvements in 5G NR technology. These improvements may also be applicable to other multi-access technologies and the telecommunication standards that employ these technologies.

SUMMARY

35       **[0006]** The following presents a simplified summary of one or more aspects in order to provide a basic understanding of such aspects. This summary is not an extensive overview of all contemplated aspects, and is intended to neither identify key or critical elements of all aspects nor delineate the scope of any or all aspects. Its sole purpose is to present some concepts of one or more aspects in a simplified form as a prelude to the more detailed description that is presented later.

40       **[0007]** In an aspect of the disclosure, a method, a computer-readable medium, and an apparatus are

provided. The apparatus may be a UE. The UE sends, in a first transaction, a request to a network for releasing a protocol data unit (PDU) session established between the UE and the network. The UE receives, while waiting for a first command sent from the network for releasing the PDU session in the first transaction, a second command from the network for releasing the PDU session in a second transaction. The UE aborts the first transaction.

[0008] To the accomplishment of the foregoing and related ends, the one or more aspects comprise the features hereinafter fully described and particularly pointed out in the claims. The following description and the annexed drawings set forth in detail certain illustrative features of the one or more aspects. These features are indicative, however, of but a few of the various ways in which the principles of various aspects may be employed, and this description is intended to include all such aspects and their equivalents.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a diagram illustrating an example of a wireless communications system and an access network.

[0010] FIG. 2 is a diagram illustrating a base station in communication with a UE in an access network.

[0011] FIG. 3 illustrates an example logical architecture of a distributed access network.

[0012] FIG. 4 illustrates an example physical architecture of a distributed access network.

[0013] FIG. 5 is a diagram showing an example of a DL-centric subframe.

[0014] FIG. 6 is a diagram showing an example of an UL-centric subframe.

[0015] FIG. 7 is a diagram illustrating communications between a network and UE.

[0016] FIG. 8 is a flow chart of a method (process) for releasing a PDU session.

[0017] FIG. 9 is a conceptual data flow diagram illustrating the data flow between different components/means in an exemplary apparatus.

[0018] FIG. 10 is a diagram illustrating an example of a hardware implementation for an apparatus employing a processing system.

### DETAILED DESCRIPTION

[0019] The detailed description set forth below in connection with the appended drawings is intended as a description of various configurations and is not intended to represent the only configurations in which the concepts described herein may be practiced. The detailed description includes specific details for the purpose of providing a thorough understanding of various concepts. However, it will be apparent to those skilled in the art that these concepts may be practiced without these specific details. In some instances, well known structures and components are shown in block diagram form in order to avoid obscuring such concepts.

[0020] Several aspects of telecommunication systems will now be presented with reference to various apparatus and methods. These apparatus and methods will be described in the following detailed description and illustrated in the accompanying drawings by various blocks, components, circuits, processes, algorithms, etc. (collectively referred to as “elements”). These elements may be implemented using electronic hardware, computer software, or any combination thereof. Whether such elements are implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system.

[0021] By way of example, an element, or any portion of an element, or any combination of elements

may be implemented as a “processing system” that includes one or more processors. Examples of processors include microprocessors, microcontrollers, graphics processing units (GPUs), central processing units (CPUs), application processors, digital signal processors (DSPs), reduced instruction set computing (RISC) processors, systems on a chip (SoC), baseband processors, field programmable gate arrays (FPGAs), programmable logic devices (PLDs), state machines, gated logic, discrete hardware circuits, and other suitable hardware configured to perform the various functionality described throughout this disclosure. One or more processors in the processing system may execute software. Software shall be construed broadly to mean instructions, instruction sets, code, code segments, program code, programs, subprograms, software components, applications, software applications, software packages, routines, subroutines, objects, executables, threads of execution, procedures, functions, etc., whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise.

[0022] Accordingly, in one or more example embodiments, the functions described may be implemented in hardware, software, or any combination thereof. If implemented in software, the functions may be stored on or encoded as one or more instructions or code on a computer-readable medium. Computer-readable media includes computer storage media. Storage media may be any available media that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can comprise a random-access memory (RAM), a read-only memory (ROM), an electrically erasable programmable ROM (EEPROM), optical disk storage, magnetic disk storage, other magnetic storage devices, combinations of the aforementioned types of computer-readable media, or any other medium that can be used to store computer executable code in the form of instructions or data structures that can be accessed by a computer.

[0023] FIG. 1 is a diagram illustrating an example of a wireless communications system and an access network 100. The wireless communications system (also referred to as a wireless wide area network (WWAN)) includes base stations 102, UEs 104, and a core network 160. The base stations 102 may include macro cells (high power cellular base station) and/or small cells (low power cellular base station). The macro cells include base stations. The small cells include femtocells, picocells, and microcells.

[0024] The base stations 102 (collectively referred to as Evolved Universal Mobile Telecommunications System (UMTS) Terrestrial Radio Access Network (E-UTRAN)) interface with the core network 160 through backhaul links 132 (e.g., S1 interface). In addition to other functions, the base stations 102 may perform one or more of the following functions: transfer of user data, radio channel ciphering and deciphering, integrity protection, header compression, mobility control functions (e.g., handover, dual connectivity), inter-cell interference coordination, connection setup and release, load balancing, distribution for non-access stratum (NAS) messages, NAS node selection, synchronization, radio access network (RAN) sharing, multimedia broadcast multicast service (MBMS), subscriber and equipment trace, RAN information management (RIM), paging, positioning, and delivery of warning messages. The base stations 102 may communicate directly or indirectly (e.g., through the core network 160) with each other over backhaul links 134 (e.g., X2 interface). The backhaul links 134 may be wired or wireless.

[0025] The base stations 102 may wirelessly communicate with the UEs 104. Each of the base stations 102 may provide communication coverage for a respective geographic coverage area 110. There may be overlapping geographic coverage areas 110. For example, the small cell 102' may have a coverage area 110' that overlaps the coverage area 110 of one or more macro base stations 102. A network that includes both

small cell and macro cells may be known as a heterogeneous network. A heterogeneous network may also include Home Evolved Node Bs (eNBs) (HeNBs), which may provide service to a restricted group known as a closed subscriber group (CSG). The communication links 120 between the base stations 102 and the UEs 104 may include uplink (UL) (also referred to as reverse link) transmissions from a UE 104 to a base station 102 and/or downlink (DL) (also referred to as forward link) transmissions from a base station 102 to a UE 104. The communication links 120 may use multiple-input and multiple-output (MIMO) antenna technology, including spatial multiplexing, beamforming, and/or transmit diversity. The communication links may be through one or more carriers. The base stations 102 / UEs 104 may use spectrum up to Y MHz (e.g., 5, 10, 15, 20, 100 MHz) bandwidth per carrier allocated in a carrier aggregation of up to a total of Yx MHz (x component carriers) used for transmission in each direction. The carriers may or may not be adjacent to each other. Allocation of carriers may be asymmetric with respect to DL and UL (e.g., more or less carriers may be allocated for DL than for UL). The component carriers may include a primary component carrier and one or more secondary component carriers. A primary component carrier may be referred to as a primary cell (PCell) and a secondary component carrier may be referred to as a secondary cell (SCell).

[0026] The wireless communications system may further include a Wi-Fi access point (AP) 150 in communication with Wi-Fi stations (STAs) 152 via communication links 154 in a 5 GHz unlicensed frequency spectrum. When communicating in an unlicensed frequency spectrum, the STAs 152 / AP 150 may perform a clear channel assessment (CCA) prior to communicating in order to determine whether the channel is available.

[0027] The small cell 102' may operate in a licensed and/or an unlicensed frequency spectrum. When operating in an unlicensed frequency spectrum, the small cell 102' may employ NR and use the same 5 GHz unlicensed frequency spectrum as used by the Wi-Fi AP 150. The small cell 102', employing NR in an unlicensed frequency spectrum, may boost coverage to and/or increase capacity of the access network.

[0028] The gNodeB (gNB) 180 may operate in millimeter wave (mmW) frequencies and/or near mmW frequencies in communication with the UE 104. When the gNB 180 operates in mmW or near mmW frequencies, the gNB 180 may be referred to as an mmW base station. Extremely high frequency (EHF) is part of the RF in the electromagnetic spectrum. EHF has a range of 30 GHz to 300 GHz and a wavelength between 1 millimeter and 10 millimeters. Radio waves in the band may be referred to as a millimeter wave. Near mmW may extend down to a frequency of 3 GHz with a wavelength of 100 millimeters. The super high frequency (SHF) band extends between 3 GHz and 30 GHz, also referred to as centimeter wave. Communications using the mmW / near mmW radio frequency band has extremely high path loss and a short range. The mmW base station 180 may utilize beamforming 184 with the UE 104 to compensate for the extremely high path loss and short range.

[0029] The core network 160 may include a Mobility Management Entity (MME) 162, other MMEs 164, a Serving Gateway 166, a Multimedia Broadcast Multicast Service (MBMS) Gateway 168, a Broadcast Multicast Service Center (BM-SC) 170, and a Packet Data Network (PDN) Gateway 172. The MME 162 may be in communication with a Home Subscriber Server (HSS) 174. The MME 162 is the control node that processes the signaling between the UEs 104 and the core network 160. Generally, the MME 162 provides bearer and connection management. All user Internet protocol (IP) packets are transferred through the Serving Gateway 166, which itself is connected to the PDN Gateway 172. The PDN Gateway 172 provides UE IP address allocation as well as other functions. The PDN Gateway 172 and the BM-SC 170 are connected to the

IP Services 176. The IP Services 176 may include the Internet, an intranet, an IP Multimedia Subsystem (IMS), a PS Streaming Service (PSS), and/or other IP services. The BM-SC 170 may provide functions for MBMS user service provisioning and delivery. The BM-SC 170 may serve as an entry point for content provider MBMS transmission, may be used to authorize and initiate MBMS Bearer Services within a public land mobile network (PLMN), and may be used to schedule MBMS transmissions. The MBMS Gateway 168 may be used to distribute MBMS traffic to the base stations 102 belonging to a Multicast Broadcast Single Frequency Network (MBSFN) area broadcasting a particular service, and may be responsible for session management (start/stop) and for collecting eMBMS related charging information.

[0030] The base station may also be referred to as a gNB, Node B, evolved Node B (eNB), an access point, a base transceiver station, a radio base station, a radio transceiver, a transceiver function, a basic service set (BSS), an extended service set (ESS), or some other suitable terminology. The base station 102 provides an access point to the core network 160 for a UE 104. Examples of UEs 104 include a cellular phone, a smart phone, a session initiation protocol (SIP) phone, a laptop, a personal digital assistant (PDA), a satellite radio, a global positioning system, a multimedia device, a video device, a digital audio player (e.g., MP3 player), a camera, a game console, a tablet, a smart device, a wearable device, a vehicle, an electric meter, a gas pump, a toaster, or any other similar functioning device. Some of the UEs 104 may be referred to as IoT devices (e.g., parking meter, gas pump, toaster, vehicles, etc.). The UE 104 may also be referred to as a station, a mobile station, a subscriber station, a mobile unit, a subscriber unit, a wireless unit, a remote unit, a mobile device, a wireless device, a wireless communications device, a remote device, a mobile subscriber station, an access terminal, a mobile terminal, a wireless terminal, a remote terminal, a handset, a user agent, a mobile client, a client, or some other suitable terminology.

[0031] FIG. 2 is a block diagram of a base station 210 in communication with a UE 250 in an access network. In the DL, IP packets from the core network 160 may be provided to a controller/processor 275. The controller/processor 275 implements layer 3 and layer 2 functionality. Layer 3 includes a radio resource control (RRC) layer, and layer 2 includes a packet data convergence protocol (PDCP) layer, a radio link control (RLC) layer, and a medium access control (MAC) layer. The controller/processor 275 provides RRC layer functionality associated with broadcasting of system information (e.g., MIB, SIBs), RRC connection control (e.g., RRC connection paging, RRC connection establishment, RRC connection modification, and RRC connection release), inter radio access technology (RAT) mobility, and measurement configuration for UE measurement reporting; PDCP layer functionality associated with header compression / decompression, security (ciphering, deciphering, integrity protection, integrity verification), and handover support functions; RLC layer functionality associated with the transfer of upper layer packet data units (PDUs), error correction through ARQ, concatenation, segmentation, and reassembly of RLC service data units (SDUs), re-segmentation of RLC data PDUs, and reordering of RLC data PDUs; and MAC layer functionality associated with mapping between logical channels and transport channels, multiplexing of MAC SDUs onto transport blocks (TBs), demultiplexing of MAC SDUs from TBs, scheduling information reporting, error correction through HARQ, priority handling, and logical channel prioritization.

[0032] The transmit (TX) processor 216 and the receive (RX) processor 270 implement layer 1 functionality associated with various signal processing functions. Layer 1, which includes a physical (PHY) layer, may include error detection on the transport channels, forward error correction (FEC) coding/decoding

of the transport channels, interleaving, rate matching, mapping onto physical channels, modulation/demodulation of physical channels, and MIMO antenna processing. The TX processor 216 handles mapping to signal constellations based on various modulation schemes (e.g., binary phase-shift keying (BPSK), quadrature phase-shift keying (QPSK), M-phase-shift keying (M-PSK), M-quadrature amplitude modulation (M-QAM)). The coded and modulated symbols may then be split into parallel streams. Each stream may then be mapped to an OFDM subcarrier, multiplexed with a reference signal (e.g., pilot) in the time and/or frequency domain, and then combined together using an Inverse Fast Fourier Transform (IFFT) to produce a physical channel carrying a time domain OFDM symbol stream. The OFDM stream is spatially precoded to produce multiple spatial streams. Channel estimates from a channel estimator 274 may be used to determine the coding and modulation scheme, as well as for spatial processing. The channel estimate may be derived from a reference signal and/or channel condition feedback transmitted by the UE 250. Each spatial stream may then be provided to a different antenna 220 via a separate transmitter 218TX. Each transmitter 218TX may modulate an RF carrier with a respective spatial stream for transmission.

[0033] At the UE 250, each receiver 254RX receives a signal through its respective antenna 252. Each receiver 254RX recovers information modulated onto an RF carrier and provides the information to the receive (RX) processor 256. The TX processor 268 and the RX processor 256 implement layer 1 functionality associated with various signal processing functions. The RX processor 256 may perform spatial processing on the information to recover any spatial streams destined for the UE 250. If multiple spatial streams are destined for the UE 250, they may be combined by the RX processor 256 into a single OFDM symbol stream. The RX processor 256 then converts the OFDM symbol stream from the time-domain to the frequency domain using a Fast Fourier Transform (FFT). The frequency domain signal comprises a separate OFDM symbol stream for each subcarrier of the OFDM signal. The symbols on each subcarrier, and the reference signal, are recovered and demodulated by determining the most likely signal constellation points transmitted by the base station 210. These soft decisions may be based on channel estimates computed by the channel estimator 258. The soft decisions are then decoded and deinterleaved to recover the data and control signals that were originally transmitted by the base station 210 on the physical channel. The data and control signals are then provided to the controller/processor 259, which implements layer 3 and layer 2 functionality.

[0034] The controller/processor 259 can be associated with a memory 260 that stores program codes and data. The memory 260 may be referred to as a computer-readable medium. In the UL, the controller/processor 259 provides demultiplexing between transport and logical channels, packet reassembly, deciphering, header decompression, and control signal processing to recover IP packets from the core network 160. The controller/processor 259 is also responsible for error detection using an ACK and/or NACK protocol to support HARQ operations.

[0035] Similar to the functionality described in connection with the DL transmission by the base station 210, the controller/processor 259 provides RRC layer functionality associated with system information (e.g., MIB, SIBs) acquisition, RRC connections, and measurement reporting; PDCP layer functionality associated with header compression / decompression, and security (ciphering, deciphering, integrity protection, integrity verification); RLC layer functionality associated with the transfer of upper layer PDUs, error correction through ARQ, concatenation, segmentation, and reassembly of RLC SDUs, re-segmentation of RLC data PDUs, and reordering of RLC data PDUs; and MAC layer functionality associated with mapping between

logical channels and transport channels, multiplexing of MAC SDUs onto TBs, demultiplexing of MAC SDUs from TBs, scheduling information reporting, error correction through HARQ, priority handling, and logical channel prioritization.

[0036] Channel estimates derived by a channel estimator 258 from a reference signal or feedback transmitted by the base station 210 may be used by the TX processor 268 to select the appropriate coding and modulation schemes, and to facilitate spatial processing. The spatial streams generated by the TX processor 268 may be provided to different antenna 252 via separate transmitters 254TX. Each transmitter 254TX may modulate an RF carrier with a respective spatial stream for transmission. The UL transmission is processed at the base station 210 in a manner similar to that described in connection with the receiver function at the UE 250. Each receiver 218RX receives a signal through its respective antenna 220. Each receiver 218RX recovers information modulated onto an RF carrier and provides the information to a RX processor 270.

[0037] The controller/processor 275 can be associated with a memory 276 that stores program codes and data. The memory 276 may be referred to as a computer-readable medium. In the UL, the controller/processor 275 provides demultiplexing between transport and logical channels, packet reassembly, deciphering, header decompression, control signal processing to recover IP packets from the UE 250. IP packets from the controller/processor 275 may be provided to the core network 160. The controller/processor 275 is also responsible for error detection using an ACK and/or NACK protocol to support HARQ operations.

[0038] New radio (NR) may refer to radios configured to operate according to a new air interface (e.g., other than Orthogonal Frequency Divisional Multiple Access (OFDMA)-based air interfaces) or fixed transport layer (e.g., other than Internet Protocol (IP)). NR may utilize OFDM with a cyclic prefix (CP) on the uplink and downlink and may include support for half-duplex operation using time division duplexing (TDD). NR may include Enhanced Mobile Broadband (eMBB) service targeting wide bandwidth (e.g. 80 MHz beyond), millimeter wave (mmW) targeting high carrier frequency (e.g. 60 GHz), massive MTC (mMTC) targeting non-backward compatible MTC techniques, and/or mission critical targeting ultra-reliable low latency communications (URLLC) service.

[0039] A single component carrier bandwidth of 100 MHz may be supported. In one example, NR resource blocks (RBs) may span 12 sub-carriers with a sub-carrier bandwidth of 60 kHz over a 0.125 ms duration or a bandwidth of 15 kHz over a 0.5 ms duration. Each radio frame may consist of 20 or 80 subframes (or NR slots) with a length of 10 ms. Each subframe may indicate a link direction (i.e., DL or UL) for data transmission and the link direction for each subframe may be dynamically switched. Each subframe may include DL/UL data as well as DL/UL control data. UL and DL subframes for NR may be as described in more detail below with respect to FIGs. 5 and 6.

[0040] The NR RAN may include a central unit (CU) and distributed units (DUs). A NR BS (e.g., gNB, 5G Node B, Node B, transmission reception point (TRP), access point (AP)) may correspond to one or multiple BSs. NR cells can be configured as access cells (ACells) or data only cells (DCells). For example, the RAN (e.g., a central unit or distributed unit) can configure the cells. DCells may be cells used for carrier aggregation or dual connectivity and may not be used for initial access, cell selection/reselection, or handover. In some cases DCells may not transmit synchronization signals (SS) in some cases DCells may transmit SS. NR BSs may transmit downlink signals to UEs indicating the cell type. Based on the cell type indication, the UE may communicate with the NR BS. For example, the UE may determine NR BSs to consider for cell

selection, access, handover, and/or measurement based on the indicated cell type.

[0041] FIG. 3 illustrates an example logical architecture 300 of a distributed RAN, according to aspects of the present disclosure. A 5G access node 306 may include an access node controller (ANC) 302. The ANC may be a central unit (CU) of the distributed RAN 300. The backhaul interface to the next generation core network (NG-CN) 304 may terminate at the ANC. The backhaul interface to neighboring next generation access nodes (NG-ANs) may terminate at the ANC. The ANC may include one or more TRPs 308 (which may also be referred to as BSs, NR BSs, Node Bs, 5G NBs, APs, or some other term). As described above, a TRP may be used interchangeably with “cell.”

[0042] The TRPs 308 may be a distributed unit (DU). The TRPs may be connected to one ANC (ANC 302) or more than one ANC (not illustrated). For example, for RAN sharing, radio as a service (RaaS), and service specific AND deployments, the TRP may be connected to more than one ANC. A TRP may include one or more antenna ports. The TRPs may be configured to individually (e.g., dynamic selection) or jointly (e.g., joint transmission) serve traffic to a UE.

[0043] The local architecture of the distributed RAN 300 may be used to illustrate fronthaul definition. The architecture may be defined that support fronthauling solutions across different deployment types. For example, the architecture may be based on transmit network capabilities (e.g., bandwidth, latency, and/or jitter). The architecture may share features and/or components with LTE. According to aspects, the next generation AN (NG-AN) 310 may support dual connectivity with NR. The NG-AN may share a common fronthaul for LTE and NR.

[0044] The architecture may enable cooperation between and among TRPs 308. For example, cooperation may be preset within a TRP and/or across TRPs via the ANC 302. According to aspects, no inter-TRP interface may be needed/present.

[0045] According to aspects, a dynamic configuration of split logical functions may be present within the architecture of the distributed RAN 300. The PDCP, RLC, MAC protocol may be adaptably placed at the ANC or TRP.

[0046] FIG. 4 illustrates an example physical architecture of a distributed RAN 400, according to aspects of the present disclosure. A centralized core network unit (C-CU) 402 may host core network functions. The C-CU may be centrally deployed. C-CU functionality may be offloaded (e.g., to advanced wireless services (AWS)), in an effort to handle peak capacity. A centralized RAN unit (C-RU) 404 may host one or more ANC functions. Optionally, the C-RU may host core network functions locally. The C-RU may have distributed deployment. The C-RU may be closer to the network edge. A distributed unit (DU) 406 may host one or more TRPs. The DU may be located at edges of the network with radio frequency (RF) functionality.

[0047] FIG. 5 is a diagram 500 showing an example of a DL-centric subframe. The DL-centric subframe may include a control portion 502. The control portion 502 may exist in the initial or beginning portion of the DL-centric subframe. The control portion 502 may include various scheduling information and/or control information corresponding to various portions of the DL-centric subframe. In some configurations, the control portion 502 may be a physical DL control channel (PDCCH), as indicated in FIG. 5. The DL-centric subframe may also include a DL data portion 504. The DL data portion 504 may sometimes be referred to as the payload of the DL-centric subframe. The DL data portion 504 may include the communication resources utilized to communicate DL data from the scheduling entity (e.g., UE or BS) to the subordinate entity (e.g.,

UE). In some configurations, the DL data portion 504 may be a physical DL shared channel (PDSCH).

[0048] The DL-centric subframe may also include a common UL portion 506. The common UL portion 506 may sometimes be referred to as an UL burst, a common UL burst, and/or various other suitable terms. The common UL portion 506 may include feedback information corresponding to various other portions of the DL-centric subframe. For example, the common UL portion 506 may include feedback information corresponding to the control portion 502. Non-limiting examples of feedback information may include an ACK signal, a NACK signal, a HARQ indicator, and/or various other suitable types of information. The common UL portion 506 may include additional or alternative information, such as information pertaining to random access channel (RACH) procedures, scheduling requests (SRs), and various other suitable types of information.

[0049] As illustrated in FIG. 5, the end of the DL data portion 504 may be separated in time from the beginning of the common UL portion 506. This time separation may sometimes be referred to as a gap, a guard period, a guard interval, and/or various other suitable terms. This separation provides time for the switch-over from DL communication (e.g., reception operation by the subordinate entity (e.g., UE)) to UL communication (e.g., transmission by the subordinate entity (e.g., UE)). One of ordinary skill in the art will understand that the foregoing is merely one example of a DL-centric subframe and alternative structures having similar features may exist without necessarily deviating from the aspects described herein.

[0050] FIG. 6 is a diagram 600 showing an example of an UL-centric subframe. The UL-centric subframe may include a control portion 602. The control portion 602 may exist in the initial or beginning portion of the UL-centric subframe. The control portion 602 in FIG. 6 may be similar to the control portion 502 described above with reference to FIG. 5. The UL-centric subframe may also include an UL data portion 604. The UL data portion 604 may sometimes be referred to as the pay load of the UL-centric subframe. The UL portion may refer to the communication resources utilized to communicate UL data from the subordinate entity (e.g., UE) to the scheduling entity (e.g., UE or BS). In some configurations, the control portion 602 may be a physical DL control channel (PDCCH).

[0051] As illustrated in FIG. 6, the end of the control portion 602 may be separated in time from the beginning of the UL data portion 604. This time separation may sometimes be referred to as a gap, guard period, guard interval, and/or various other suitable terms. This separation provides time for the switch-over from DL communication (e.g., reception operation by the scheduling entity) to UL communication (e.g., transmission by the scheduling entity). The UL-centric subframe may also include a common UL portion 606. The common UL portion 606 in FIG. 6 may be similar to the common UL portion 606 described above with reference to FIG. 6. The common UL portion 606 may additionally or alternatively include information pertaining to channel quality indicator (CQI), sounding reference signals (SRSs), and various other suitable types of information. One of ordinary skill in the art will understand that the foregoing is merely one example of an UL-centric subframe and alternative structures having similar features may exist without necessarily deviating from the aspects described herein.

[0052] In some circumstances, two or more subordinate entities (e.g., UEs) may communicate with each other using sidelink signals. Real-world applications of such sidelink communications may include public safety, proximity services, UE-to-network relaying, vehicle-to-vehicle (V2V) communications, Internet of Everything (IoE) communications, IoT communications, mission-critical mesh, and/or various other suitable

applications. Generally, a sidelink signal may refer to a signal communicated from one subordinate entity (e.g., UE1) to another subordinate entity (e.g., UE2) without relaying that communication through the scheduling entity (e.g., UE or BS), even though the scheduling entity may be utilized for scheduling and/or control purposes. In some examples, the sidelink signals may be communicated using a licensed spectrum (unlike  
5 wireless local area networks, which typically use an unlicensed spectrum).

[0053] FIG. 7 is a diagram 700 illustrating communications between a network 706 and a UE 704. At procedure 710, at procedure 710, the UE 704 and the network 706 (e.g., a Session Management Function) establishes a protocol data unit (PDU) session in accordance with technical specification “3GPP TS 24.501  
10 Technical Specification; 3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Non-Access-Stratum (NAS) protocol for 5G System (5GS); Stage 3; (Release 15),” which is expressly incorporated by reference herein in their entirety. The UE 704 assigns a unique PDU session identity (PSI) to the PDU session to be established. In this example, the PSI assigned is “1.”

[0054] Subsequently, for certain reasons, the UE 704 may decide to release the PDU session. For example, the UE 704 may detect that the PDU session is not needed. Accordingly, at procedure 714, the UE 704 initiates  
15 a first transaction for releasing the PDU session. Further, the UE 704 may assign a particular procedure transaction identity (PTI) to the first transaction. In this example, the PTI assigned to this transaction is “a.” The UE 704 sends a PDU SESSION RELEASE REQUEST message to the network 706 as part of the first transaction. The PDU SESSION RELEASE REQUEST message includes the PSI with a value “1” to identify this particular PDU session to be released and includes the PTI with value “a” to identify the first transaction  
20 used to release the PDU session. The UE 704 then waits to receive from the network 706 a PDU SESSION RELEASE COMMAND message including a PTI with a value “a” and a PSI with a value “1.” Such a message indicates that the network 706 confirms the PDU SESSION RELEASE REQUEST message sent from the UE 704 and instructs the UE 704 to complete the procedures for releasing the PDU session. Upon releasing the PDU session, the UE 704 would send to the network 706 a PDU SESSION RELEASE COMPLETE message  
25 including a PTI with a value “a” and a PSI with a value “1.”

[0055] Similarly, for certain reasons, the network 706 may also decide to release the PDU session. For example, the UE 704 may also detect that the PDU session is not needed. Accordingly, at procedure 718, the network 706 initiates a second transaction for releasing the PDU session. Further, the network 706 may not assign a particular procedure transaction identity (PTI) to this transaction. The network 706 sends a PDU  
30 SESSION RELEASE COMMAND message to the UE 704 as part of the second transaction. The PDU SESSION RELEASE COMMAND message includes the PSI with a value “1” to identify this particular PDU session to be released and includes a PTI with an unassigned value.

[0056] When the UE 704 receives the PDU SESSION RELEASE COMMAND message including the PTI with an unassigned value, the UE 704, at procedure 722, accordingly releases the PDU session. At  
35 procedure 726, the UE 704 sends to the network 706 a PDU SESSION RELEASE COMPLETE message including the PSI with a value “1” and a PTI with an unassigned value to indicate that the UE 704 has completed releasing the PDU session.

[0057] In a first configuration, as the PDU SESSION RELEASE COMMAND message received from the network 706 does not include a PTI with a value “a,” the UE 704 deems that the first transaction has not been  
40 completed. Therefore, although the UE 704 has already released the PDU session, UE 704 still expects a PDU

SESSION RELEASE COMMAND message from the network 706 including a PTI with a value “a.” When the UE 704 does not receive such a PDU SESSION RELEASE COMMAND message within a predetermined time period, the UE 704 may send another PDU SESSION RELEASE REQUEST message to the network 706 in the first transaction.

5        [0058] In a second configuration, when the UE 704 receives the PDU SESSION RELEASE COMMAND message from the network 706 in a transaction other than the first transaction, the UE 704 may decide to abort the first transaction and not to wait for a PDU SESSION RELEASE COMMAND message in the first transaction.

10        [0059] FIG. 8 is a flow chart 800 of a method (process) for releasing a PDU session. The method may be performed by a UE (*e.g.*, the UE 704, the apparatus 902, and the apparatus 902'). At operation 802, the UE sends, in a first transaction, a request to a network for releasing a PDU session established between the UE and the network. In certain configurations, the request includes an indication indicating a first protocol transaction identity assigned to the first transaction.

15        [0060] At operation 804, the UE receives, while waiting for a first command sent from the network for releasing the PDU session in the first transaction, a second command from the network for releasing the PDU session in a second transaction. In certain configurations, the first command includes an indication indicating the first protocol transaction identity. The second command includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

20        [0061] At operation 806, the UE aborts the first transaction. In certain configurations, the UE stops sending additional requests for releasing the PDU session in the first transaction. At operation 808, the UE releases the PDU session. At operation 810, the UE sends, to the network, a completion message indicating that the PDU session has been released in the second transaction. In certain configurations, the completion message includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

25        [0062] FIG. 9 is a conceptual data flow diagram 900 illustrating the data flow between different components/means in an exemplary apparatus 902. The apparatus 902 may be a UE. The apparatus 902 includes a reception component 904, a PDU session component 906, a messaging component 908, and a transmission component 910.

30        [0063] The messaging component 908 sends, in a first transaction, a request to a network for releasing a PDU session established between the UE and the network. In certain configurations, the request includes an indication indicating a first protocol transaction identity assigned to the first transaction.

35        [0064] The messaging component 908 receives, while waiting for a first command sent from the network for releasing the PDU session in the first transaction, a second command from the network for releasing the PDU session in a second transaction. In certain configurations, the first command includes an indication indicating the first protocol transaction identity. The second command includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

40        [0065] The PDU session component 906 aborts the first transaction. In certain configurations, the UE stops sending additional requests for releasing the PDU session in the first transaction. The PDU session component 906 releases the PDU session. The messaging component 908 sends, to the network, a completion message indicating that the PDU session has been released in the second transaction. In certain configurations,

the completion message includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

[0066] FIG. 10 is a diagram 1000 illustrating an example of a hardware implementation for an apparatus 902' employing a processing system 1014. The apparatus 902' may be a UE. The processing system 1014 may be implemented with a bus architecture, represented generally by a bus 1024. The bus 1024 may include any number of interconnecting buses and bridges depending on the specific application of the processing system 1014 and the overall design constraints. The bus 1024 links together various circuits including one or more processors and/or hardware components, represented by one or more processors 1004, the reception component 904, the PDU session component 906, the messaging component 908, and the transmission component 910, and a computer-readable medium / memory 1006. The bus 1024 may also link various other circuits such as timing sources, peripherals, voltage regulators, and power management circuits, *etc.*

[0067] The processing system 1014 may be coupled to a transceiver 1010, which may be one or more of the transceivers 254. The transceiver 1010 is coupled to one or more antennas 1020, which may be the communication antennas 252.

[0068] The transceiver 1010 provides a means for communicating with various other apparatus over a transmission medium. The transceiver 1010 receives a signal from the one or more antennas 1020, extracts information from the received signal, and provides the extracted information to the processing system 1014, specifically the reception component 904. In addition, the transceiver 1010 receives information from the processing system 1014, specifically the transmission component 910, and based on the received information, generates a signal to be applied to the one or more antennas 1020.

[0069] The processing system 1014 includes one or more processors 1004 coupled to a computer-readable medium / memory 1006. The one or more processors 1004 are responsible for general processing, including the execution of software stored on the computer-readable medium / memory 1006. The software, when executed by the one or more processors 1004, causes the processing system 1014 to perform the various functions described *supra* for any particular apparatus. The computer-readable medium / memory 1006 may also be used for storing data that is manipulated by the one or more processors 1004 when executing software. The processing system 1014 further includes at least one of the reception component 904, the PDU session component 906, the messaging component 908, and the transmission component 910. The components may be software components running in the one or more processors 1004, resident/stored in the computer readable medium / memory 1006, one or more hardware components coupled to the one or more processors 1004, or some combination thereof. The processing system 1014 may be a component of the UE 250 and may include the memory 260 and/or at least one of the TX processor 268, the RX processor 256, and the communication processor 259.

[0070] In one configuration, the apparatus 902/apparatus 902' for wireless communication includes means for performing each of the operations of FIG. 8. The aforementioned means may be one or more of the aforementioned components of the apparatus 902 and/or the processing system 1014 of the apparatus 902' configured to perform the functions recited by the aforementioned means.

[0071] As described *supra*, the processing system 1014 may include the TX Processor 268, the RX Processor 256, and the communication processor 259. As such, in one configuration, the aforementioned means may be the TX Processor 268, the RX Processor 256, and the communication processor 259 configured

to perform the functions recited by the aforementioned means.

[0072] It is understood that the specific order or hierarchy of blocks in the processes / flowcharts disclosed is an illustration of exemplary approaches. Based upon design preferences, it is understood that the specific order or hierarchy of blocks in the processes / flowcharts may be rearranged. Further, some blocks may be combined or omitted. The accompanying method claims present elements of the various blocks in a sample order, and are not meant to be limited to the specific order or hierarchy presented.

[0073] The previous description is provided to enable any person skilled in the art to practice the various aspects described herein. Various modifications to these aspects will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other aspects. Thus, the claims are not intended to be limited to the aspects shown herein, but is to be accorded the full scope consistent with the language claims, wherein reference to an element in the singular is not intended to mean “one and only one” unless specifically so stated, but rather “one or more.” The word “exemplary” is used herein to mean “serving as an example, instance, or illustration.” Any aspect described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over other aspects. Unless specifically stated otherwise, the term “some” refers to one or more. Combinations such as “at least one of A, B, or C,” “one or more of A, B, or C,” “at least one of A, B, and C,” “one or more of A, B, and C,” and “A, B, C, or any combination thereof” include any combination of A, B, and/or C, and may include multiples of A, multiples of B, or multiples of C. Specifically, combinations such as “at least one of A, B, or C,” “one or more of A, B, or C,” “at least one of A, B, and C,” “one or more of A, B, and C,” and “A, B, C, or any combination thereof” may be A only, B only, C only, A and B, A and C, B and C, or A and B and C, where any such combinations may contain one or more member or members of A, B, or C. All structural and functional equivalents to the elements of the various aspects described throughout this disclosure that are known or later come to be known to those of ordinary skill in the art are expressly incorporated herein by reference and are intended to be encompassed by the claims. Moreover, nothing disclosed herein is intended to be dedicated to the public regardless of whether such disclosure is explicitly recited in the claims. The words “module,” “mechanism,” “element,” “device,” and the like may not be a substitute for the word “means.” As such, no claim element is to be construed as a means plus function unless the element is expressly recited using the phrase “means for.”

CLAIMS

1. A method of wireless communication of a user equipment (UE), comprising:  
sending, in a first transaction, a request to a network for releasing a protocol data unit (PDU) session  
5 established between the UE and the network;  
receiving, while waiting for a first command sent from the network for releasing the PDU session in the  
first transaction, a second command from the network for releasing the PDU session in a second transaction;  
and  
aborting the first transaction.

2. The method of claim 1, wherein the aborting the first transaction comprises:  
stopping sending additional requests for releasing the PDU session in the first transaction.

3. The method of claim 1, wherein the request includes an indication indicating a first protocol  
15 transaction identity assigned to the first transaction.

4. The method of claim 3, wherein the first command includes an indication indicating the first protocol  
transaction identity, wherein the second command includes an indication indicating that no protocol  
transaction identity has been assigned to the second transaction.

5. The method of claim 1, further comprising:  
releasing the PDU session; and  
25 sending, to the network, a completion message indicating that the PDU session has been released in the  
second transaction.

6. The method of claim 5, wherein the completion message includes an indication indicating that no  
protocol transaction identity has been assigned to the second transaction.

7. An apparatus for wireless communication, the apparatus being a user equipment (UE), comprising:  
30 a memory; and  
at least one processor coupled to the memory and configured to:  
send, in a first transaction, a request to a network for releasing a protocol data unit (PDU) session  
established between the UE and the network;  
receive, while waiting for a first command sent from the network for releasing the PDU session in the  
35 first transaction, a second command from the network for releasing the PDU session in a second transaction;  
and  
abort the first transaction.

8. The apparatus of claim 7, wherein to abort the first transaction, the at least one processor is further  
40 configured to:

stop sending additional requests for releasing the PDU session in the first transaction.

9. The apparatus of claim 7, wherein the request includes an indication indicating a first protocol transaction identity assigned to the first transaction.

5

10. The apparatus of claim 9, wherein the first command includes an indication indicating the first protocol transaction identity, wherein the second command includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

10 11. The apparatus of claim 7, wherein the at least one processor is further configured to:  
release the PDU session; and  
send, to the network, a completion message indicating that the PDU session has been released in the second transaction.

15 12. The apparatus of claim 11, wherein the completion message includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

13. A computer-readable medium storing computer executable code for wireless communication of a user equipment (UE), comprising code to:

20 send, in a first transaction, a request to a network for releasing a protocol data unit (PDU) session established between the UE and the network;

receive, while waiting for a first command sent from the network for releasing the PDU session in the first transaction, a second command from the network for releasing the PDU session in a second transaction; and

25 abort the first transaction.

14. The computer-readable medium of claim 13, wherein to abort the first transaction, the code is further configured to:

stop sending additional requests for releasing the PDU session in the first transaction.

30


15. The computer-readable medium of claim 13, wherein the request includes an indication indicating a first protocol transaction identity assigned to the first transaction.

35 16. The computer-readable medium of claim 15, wherein the first command includes an indication indicating the first protocol transaction identity, wherein the second command includes an indication indicating that no protocol transaction identity has been assigned to the second transaction.

17. The computer-readable medium of claim 13, wherein the code is further configured to:  
release the PDU session; and

send, to the network, a completion message indicating that the PDU session has been released in the second transaction.

- 18.** The computer-readable medium of claim 17, wherein the completion message includes an indication  
5 indicating that no protocol transaction identity has been assigned to the second transaction.

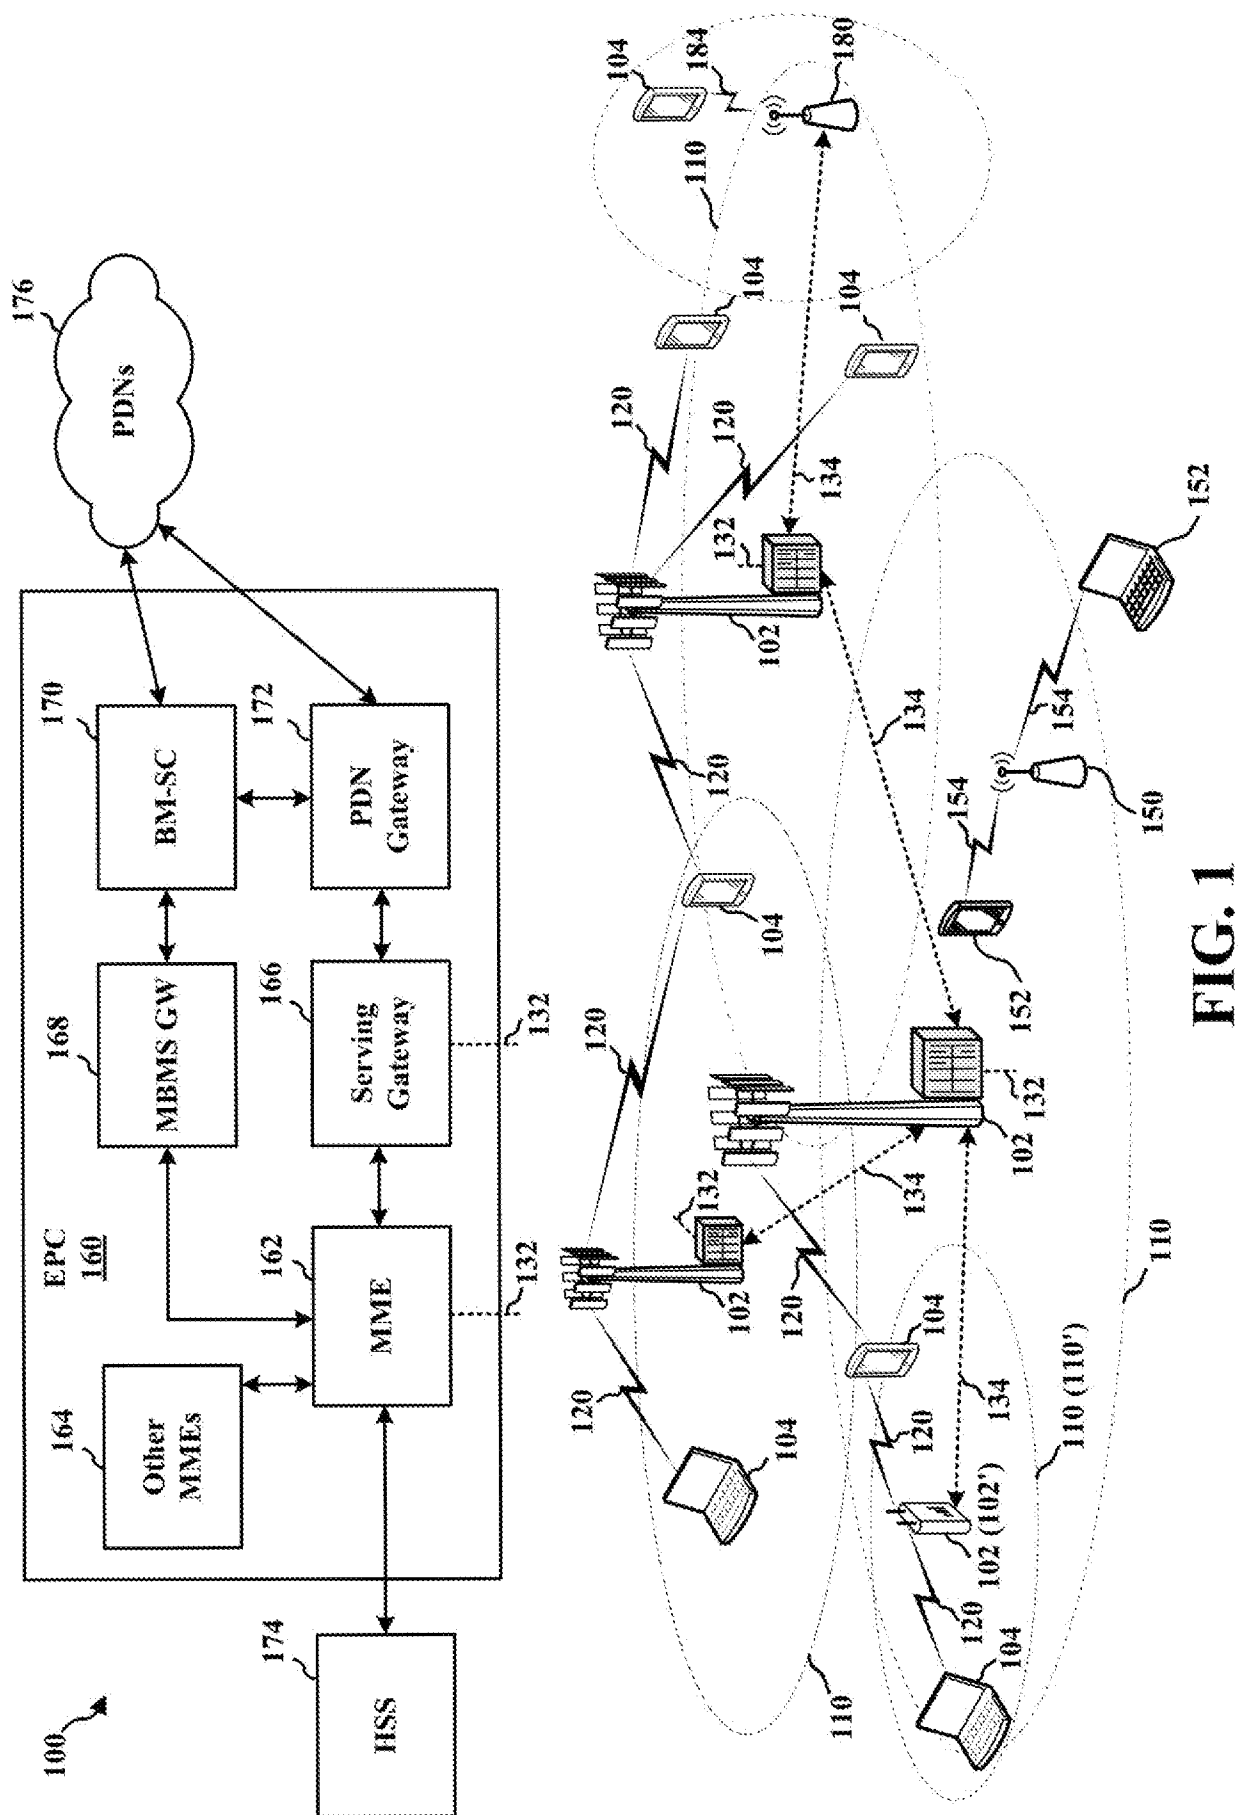

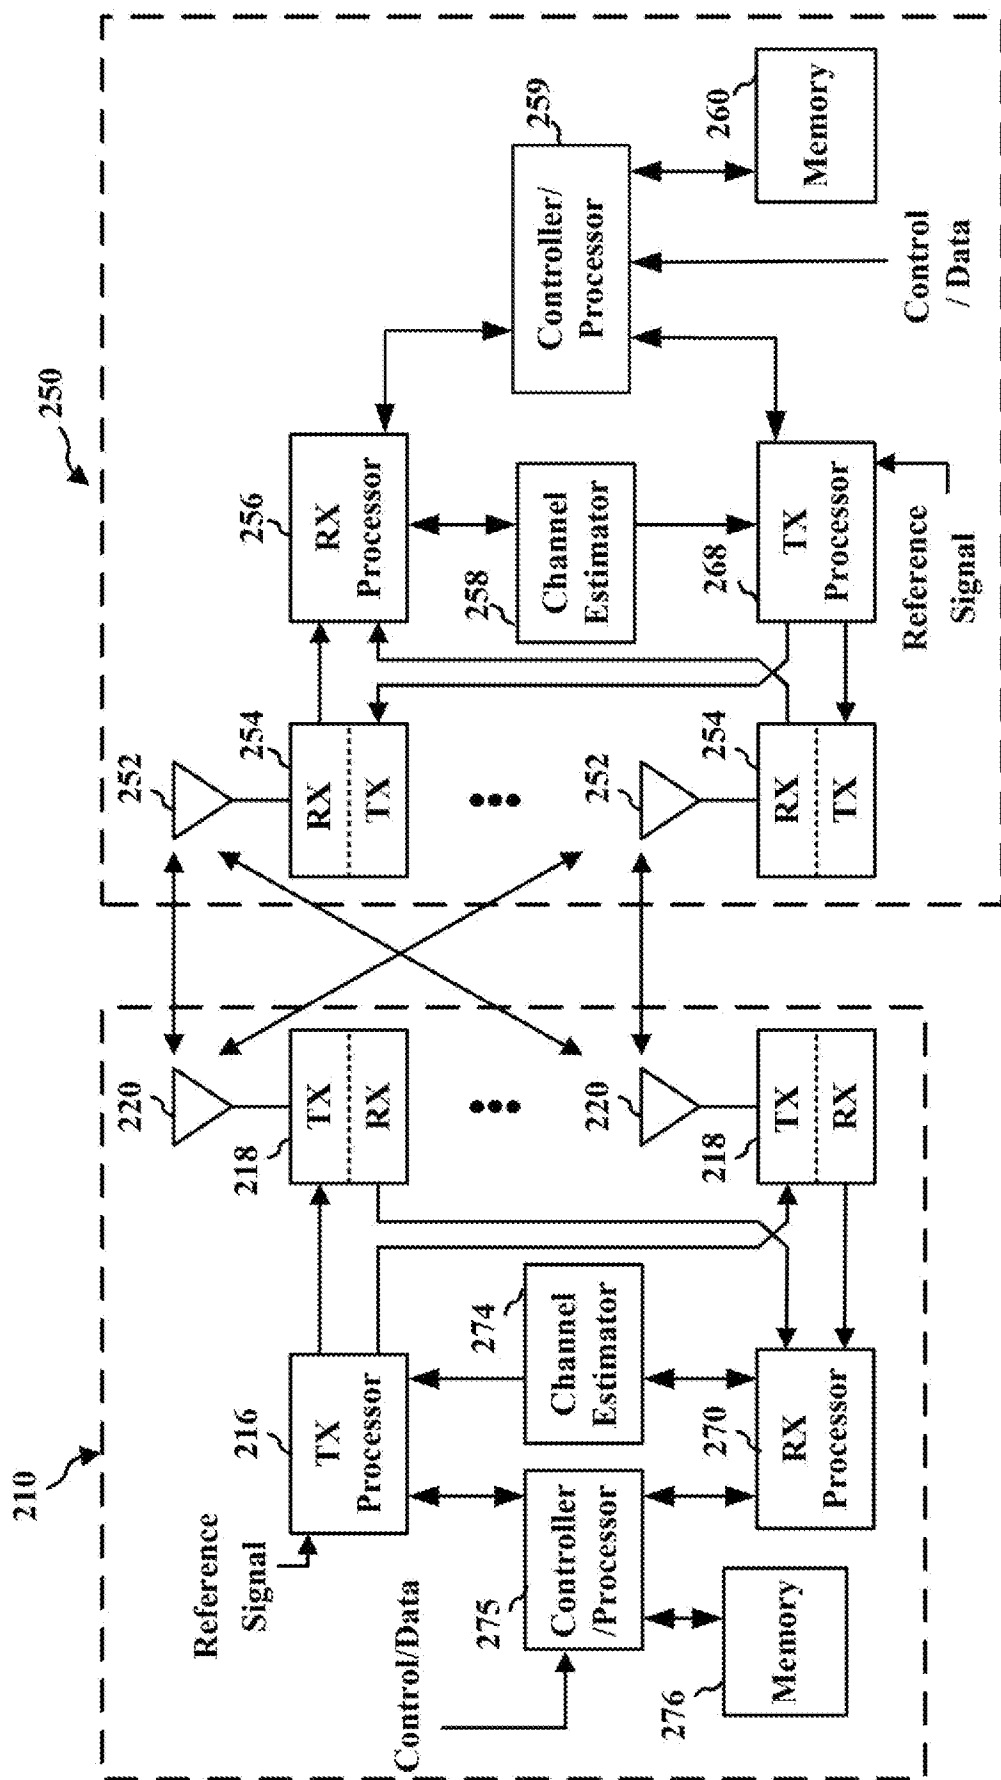
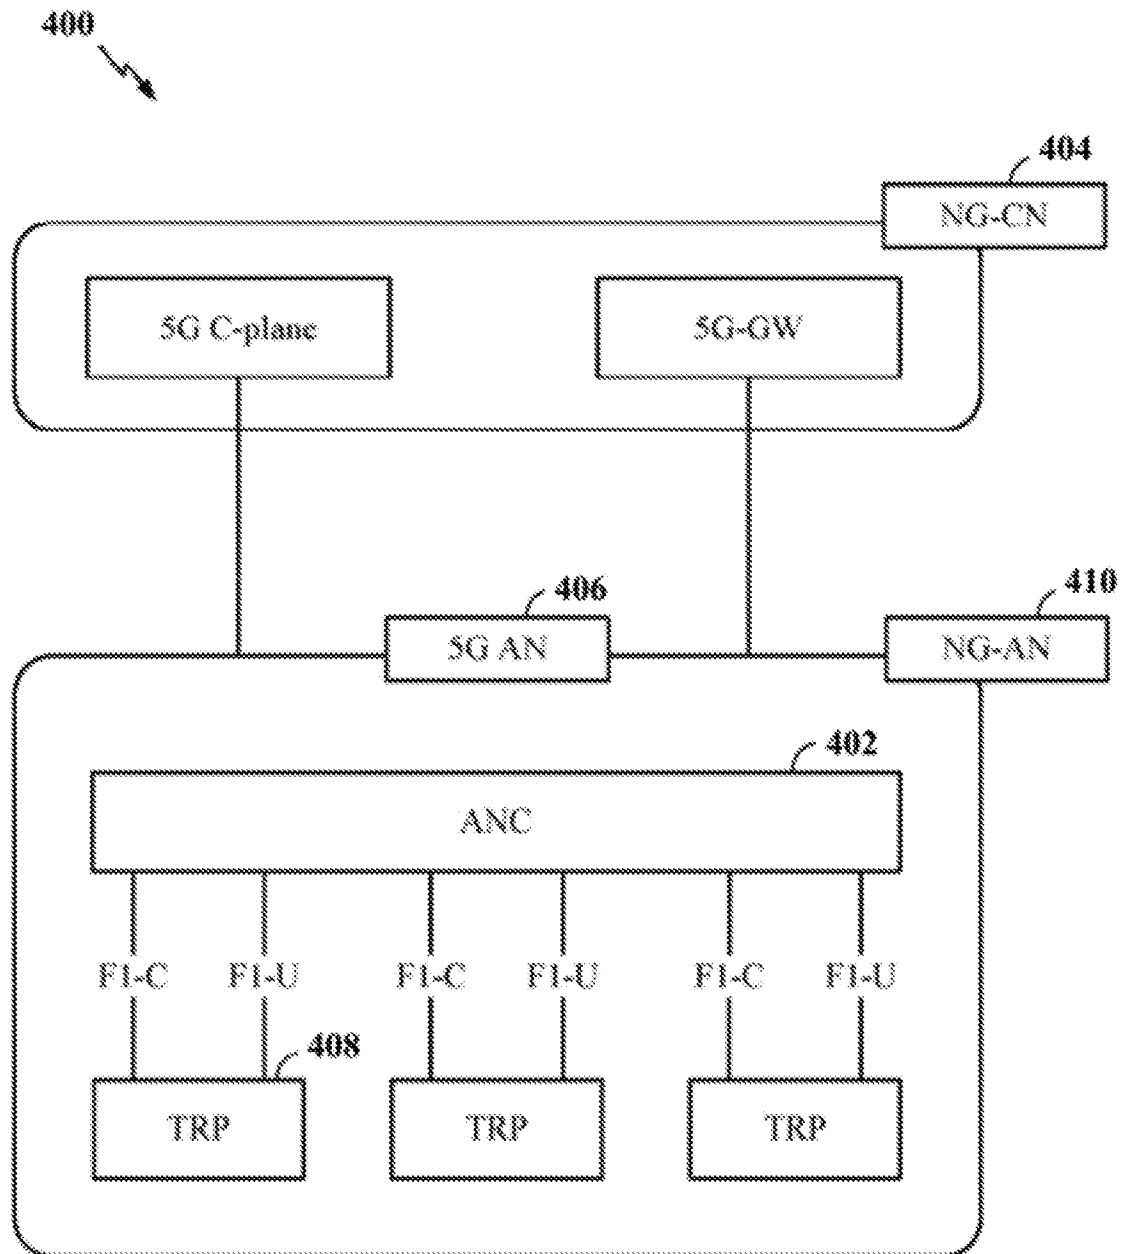
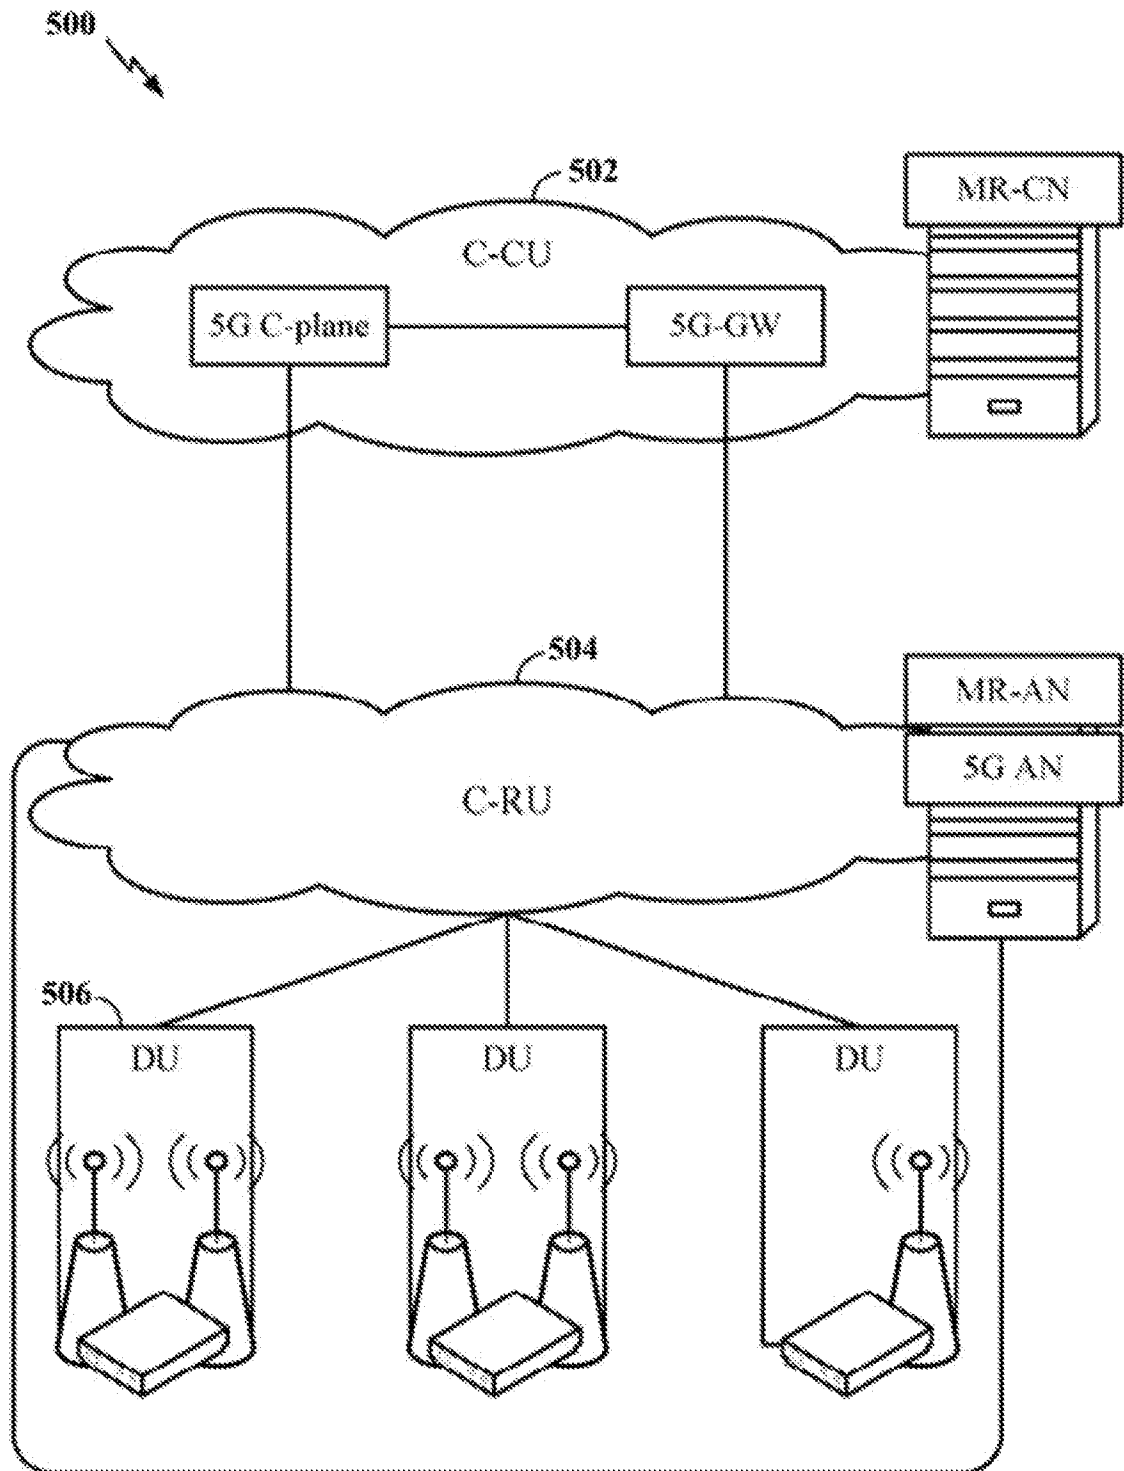


FIG. 2

**FIG. 3**

**FIG. 4**

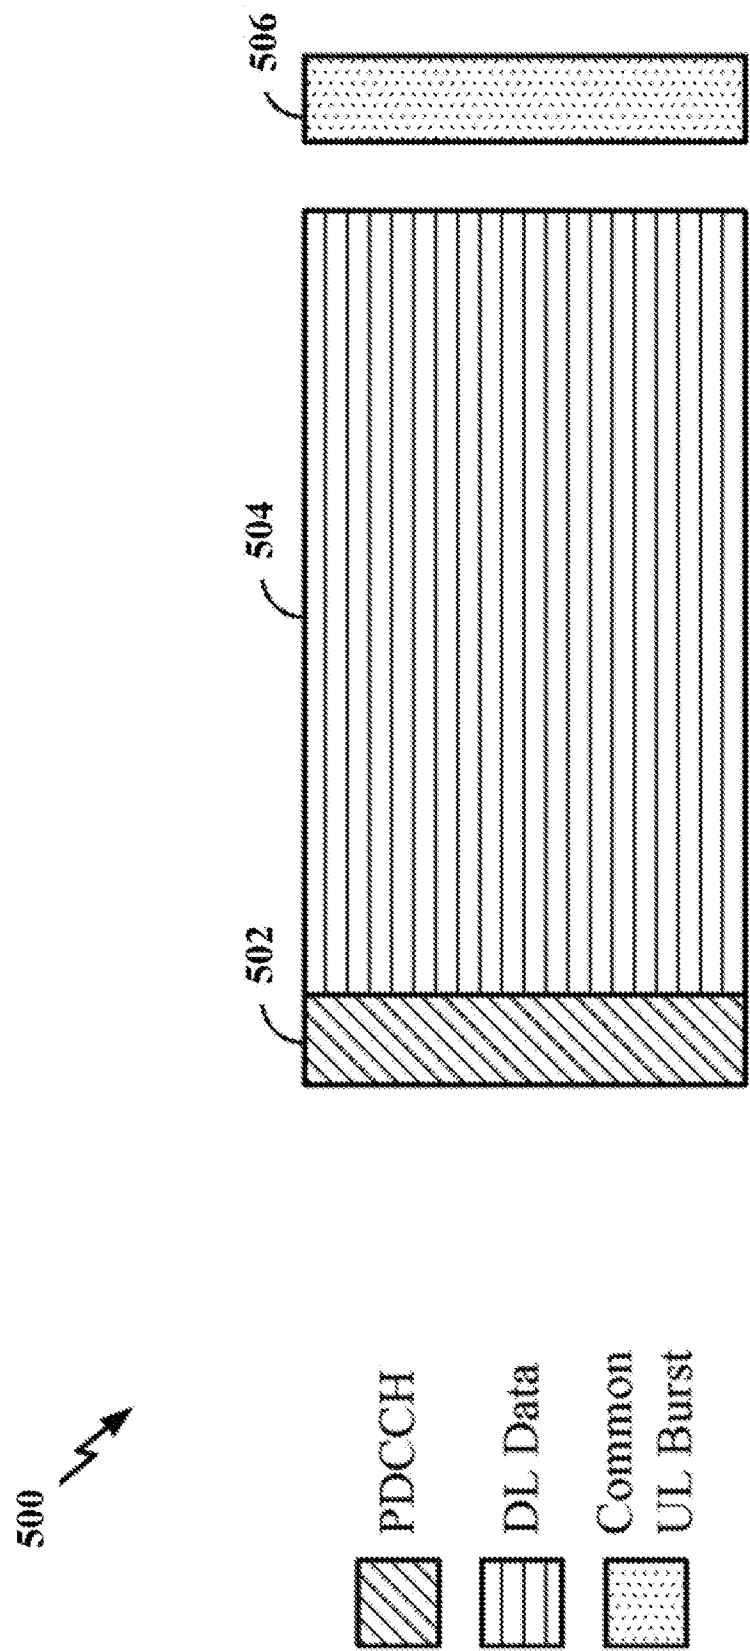


FIG. 5

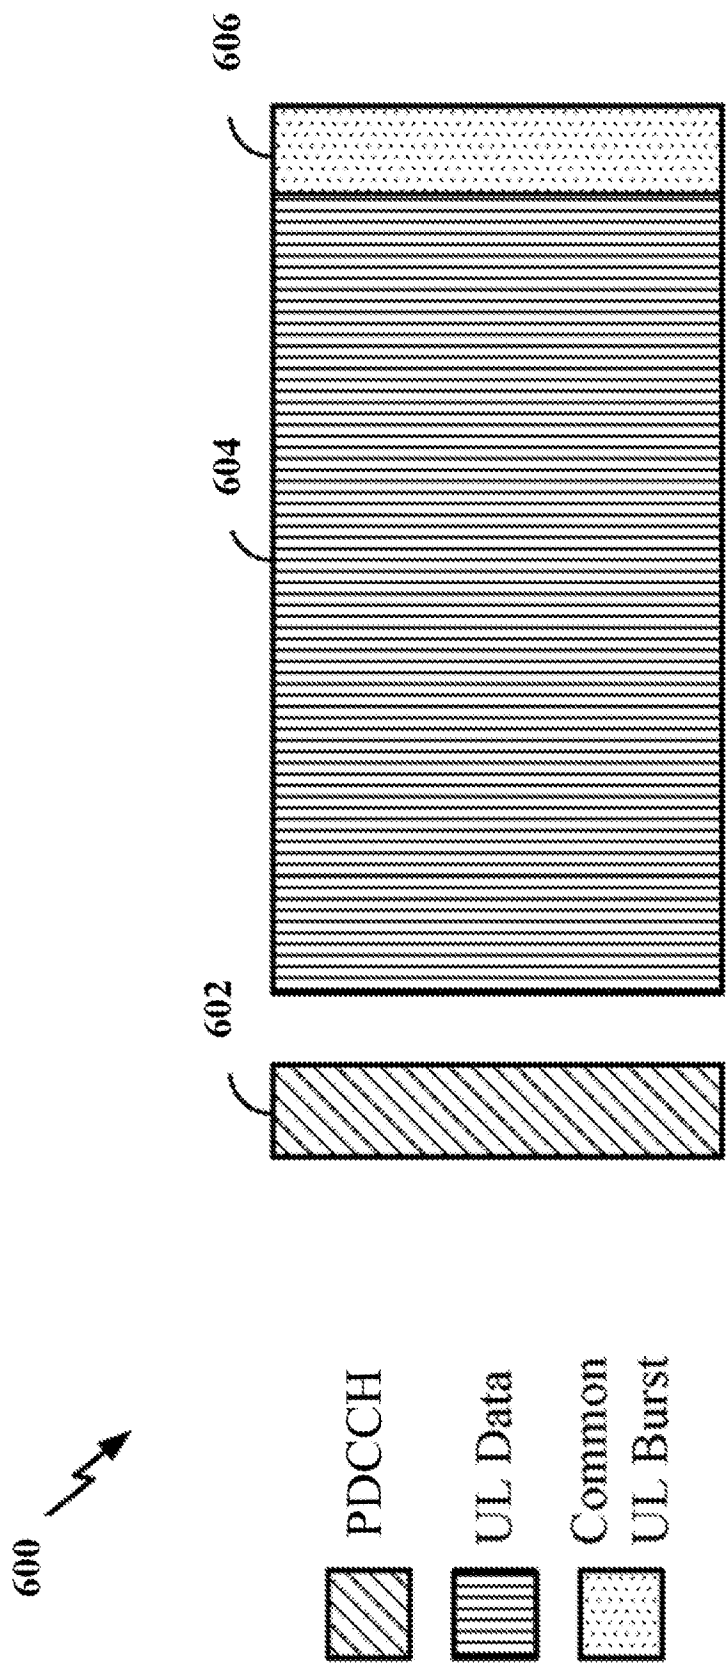


FIG. 6

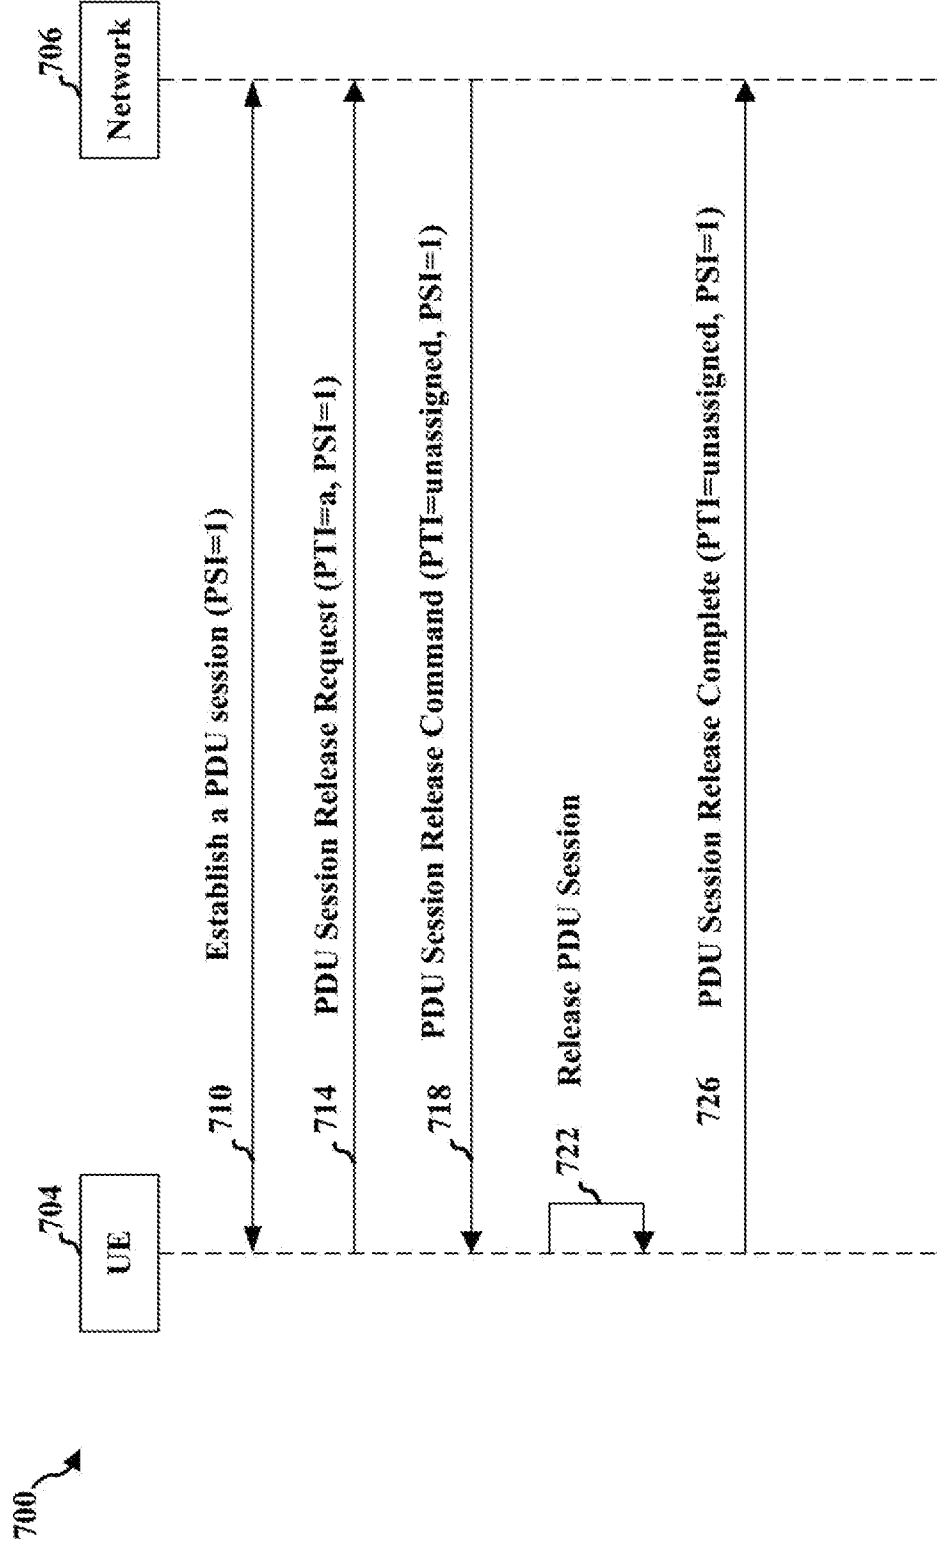
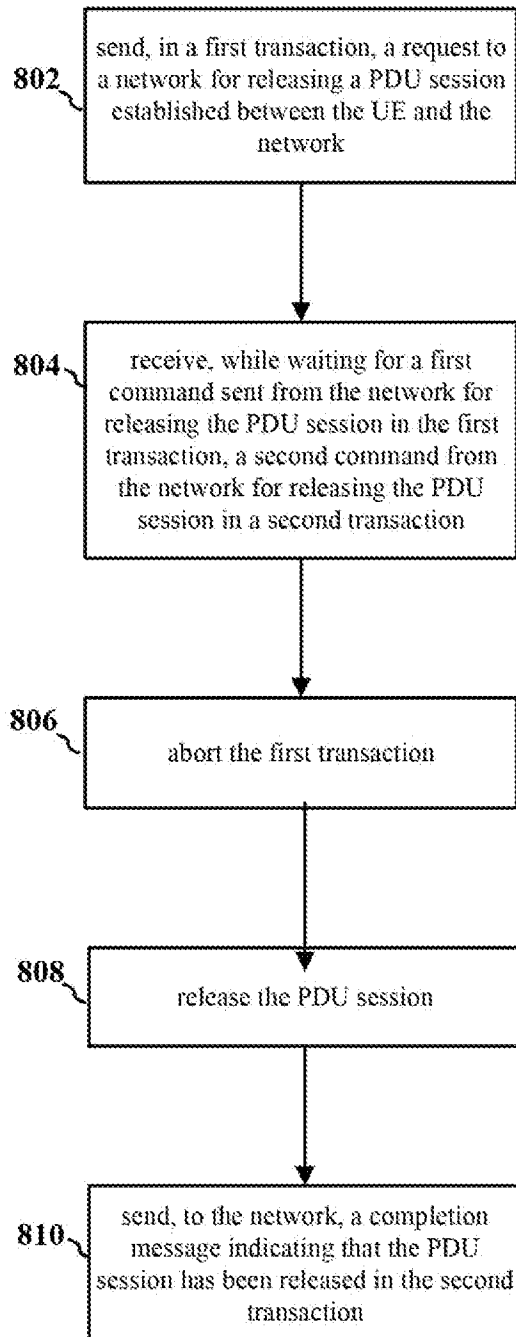


FIG. 7

800  
↘**FIG. 8**

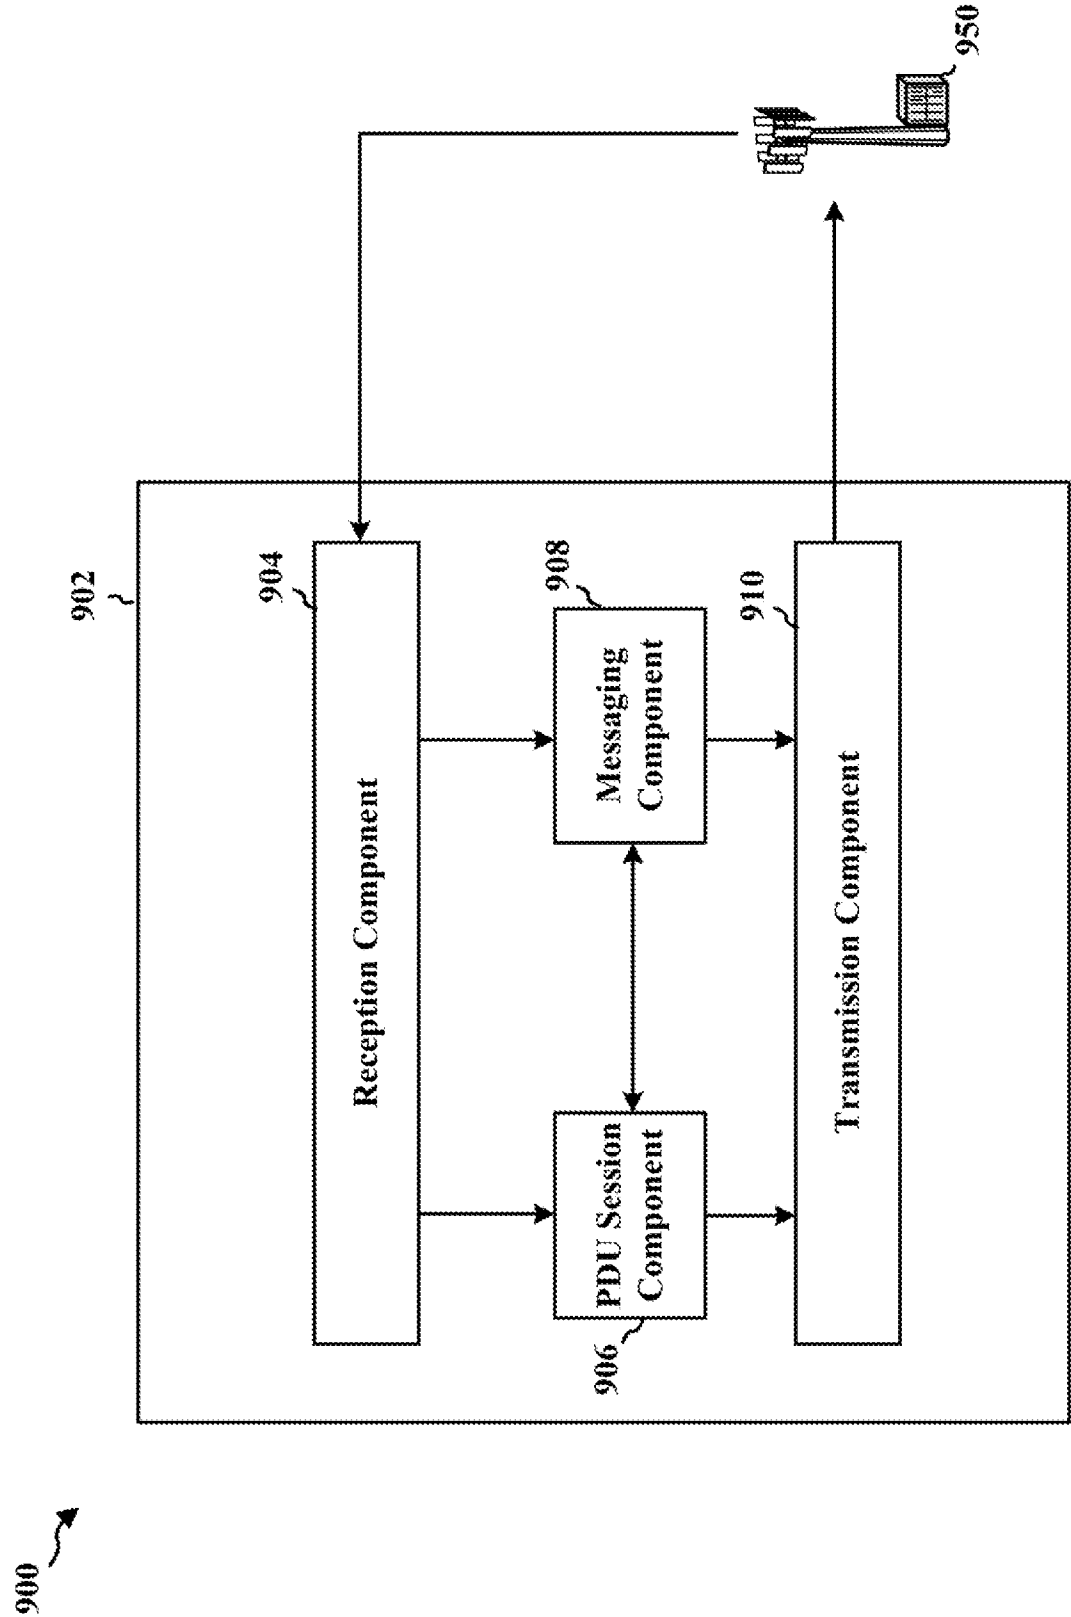


FIG. 9

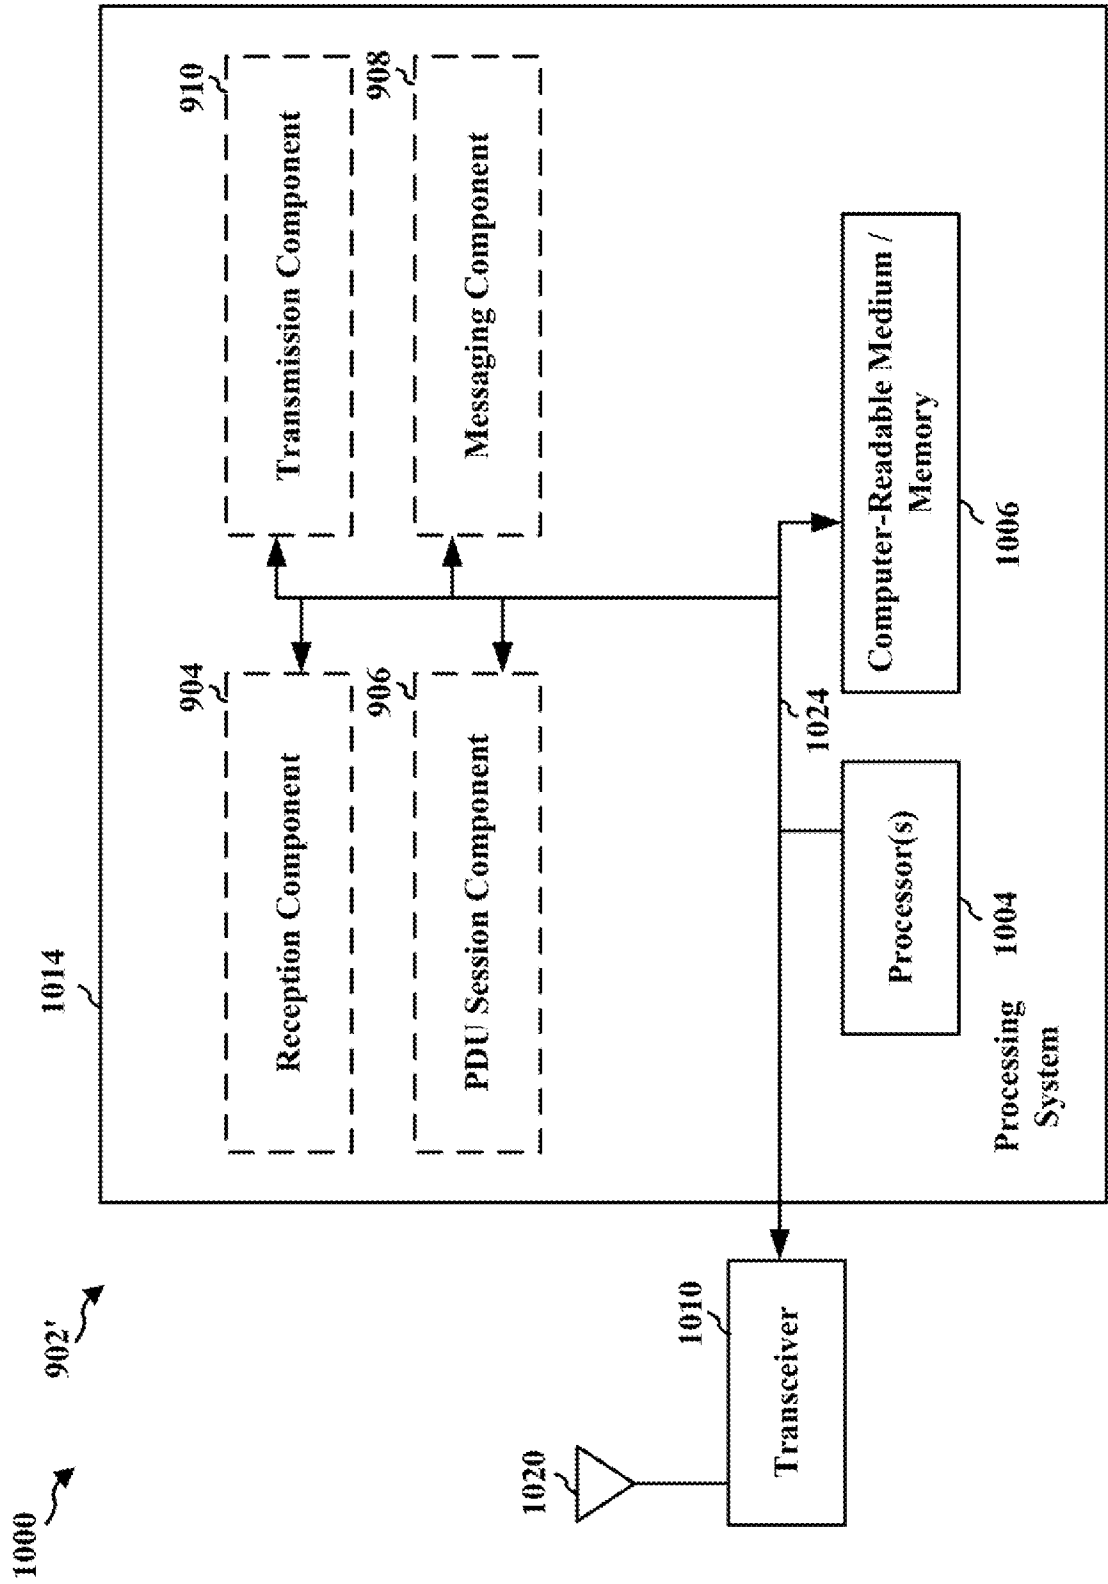


FIG. 10

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2019/086428

**A. CLASSIFICATION OF SUBJECT MATTER**

H04L 12/24(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H04L H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT,CNKI,WPLEPODOC,3GPP:PDU,PTI,UNASSIGNED,RELEASE,REQUEST,TRANSACTION,NETWORK,COMPLET+,IDENTITY

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                           | Relevant to claim No. |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| PX        | CAICT. "3GPP TSG-RAN WG5 Meeting #81 R5-188175"<br><i>Addition of new 5GC TC 10.1.6.3</i> , 16 November 2018 (2018-11-16),<br>section 10.1.6.3.2                                                             | 1-18                  |
| A         | 3GPP. "3GPP TS 24.501 V1.1.1"<br><i>Technical Specification Group Core Network and Terminals; Non-Access-Stratum (NAS) protocol for 5G System (5GS)</i> , 09 May 2018 (2018-05-09),<br>section 8.3.12-8.3.15 | 1-18                  |
| A         | WO 2018066799 A1 (LG ELECTRONICS INC.) 12 April 2018 (2018-04-12)<br>全文                                                                                                                                      | 1-18                  |
| A         | CN 101686563 A (SAMSUNG ELECTRONICS CO., LTD. ET AL.) 31 March 2010<br>(2010-03-31)<br>全文                                                                                                                    | 1-18                  |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 July 2019

Date of mailing of the international search report

15 August 2019

Name and mailing address of the ISA/CN

National Intellectual Property Administration, PRC  
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing  
100088  
China

Authorized officer

FANG,Ting

Facsimile No. (86-10)62019451

Telephone No. 86-010-53961654

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2019/086428**

| Patent document<br>cited in search report |            |    | Publication date<br>(day/month/year) | Patent family member(s) | Publication date<br>(day/month/year) |
|-------------------------------------------|------------|----|--------------------------------------|-------------------------|--------------------------------------|
| WO                                        | 2018066799 | A1 | 12 April 2018                        | None                    |                                      |
| CN                                        | 101686563  | A  | 31 March 2010                        | None                    |                                      |