

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 July 2006 (27.07.2006)

PCT

(10) International Publication Number
WO 2006/077374 A1

(51) International Patent Classification:

C09K 8/508 (2006.01) **C09K 8/504** (2006.01)
C09K 8/512 (2006.01)

(74) Agents: **WAIN, Christopher, Paul** et al.; A A Thornton & Co, 235 High Holborn, London WC1V 7LE (GB).

(21) International Application Number:

PCT/GB2006/000001

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 3 January 2006 (03.01.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/041,554 24 January 2005 (24.01.2005) US

(71) Applicants (*for all designated States except US*): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US]; P.O. Box 1431, Duncan, OK 73533 (US). **SHELL INTERNATIONAL EXPLORATION AND PRODUCTION B.V.** [NL/NL]; Kessler Park 1, Postbus 60, NL-2280 AB Rijswijk (NL).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for MW only*): **WAIN, Christopher, Paul** [GB/GB]; A A Thornton & Co., 235 High Holborn, London WC1V 7LE (GB).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **GRONVELD, Jan** [NL/NL]; Kesslerpark 1, NL-2288 GS Rijswijk (NL). **ARKESTELJN, Fred** [NL/NL]; Kesslerpark 1, NL-2288 GS Rijswijk (NL). **VAN BATENBURG, Diederik, W.** [NL/NL]; Verwersdijk 39, NL-2611 ND Delft (NL). **EIJ-DEEN, Jip** [NL/NL]; Kesslerpark 1, NL-2288 GS Rijswijk (NL).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SEALANT COMPOSITION COMPRISING A CROSSLINKABLE MATERIAL AND A REDUCED AMOUNT OF CEMENT FOR A PERMEABLE ZONE DOWNHOLE

(57) Abstract: A sealant composition for servicing a wellbore, comprising a crosslinkable material, a crosslinking agent, a fluid loss control additive, water, and a cement present in an amount in a range of from about 0% to about 50% by weight of the sealant composition. A method of preparing a sealant composition, comprising combining a crosslinkable material, a crosslinking agent, a fluid loss control additive, water, and a cement, and controlling the amount of cement in the sealant composition such that the sealant composition has a gel time greater than or equal to about 4 hours when exposed to ambient temperatures in a wellbore.



WO 2006/077374 A1

A Sealant Composition Comprising a Crosslinkable Material and a Reduced Amount of Cement for a Permeable Zone Downhole

FIELD OF THE INVENTION

The present invention generally relates to subterranean zonal isolation, and more particularly to methods of plugging a permeable zone in a wellbore using a sealant composition comprising a crosslinkable material and a reduced amount of cement.

BACKGROUND OF THE INVENTION

A technique known as squeeze or remedial cementing is a common operation in the petroleum industry. Most squeezes are performed with a drilling or workover rig and through threaded tubing or drillpipe. Squeeze cementing is most often performed to repair leaks in well tubulars and restore pressure integrity to the wellbore, raise the level of or restore a cement sheath behind the casing to support or protect well tubulars, modify the production or injection profile of a well by sealing unwanted production or thief zones, or repair a poor primary cement job before well completion. Squeeze cementing coupled with coiled tubing has been a standard remediation technique for shutting of unwanted gas or water production. Cement is able to fill perforation tunnels, channels behind pipe, and/or washout zones behind pipe, and consequently cement is able to provide a near wellbore block to production. Production from selected zones can then be reestablished by reperforating these zones. Unfortunately, cement has limitations as it does not penetrate into the porous rock. Microchannels along the cement and porous rock interface often develop due to cyclical changes in underground pressures and temperatures during subsequent production and shut-in stages.

Polymer gels are also used for shutting of unwanted gas or water production and can be placed by bullheading or can be selectively placed through coiled tubing. The main difference with squeeze cementing is that the polymer gels provide in depth blockage by penetrating the porous media and crosslinking in situ. The in situ properties of these gels can be varied from flowing gels to ringing gels by adjusting the polymer concentration, the polymer molecular weight, and/or the type of crosslinker. A limitation of gels is that they may not have the mechanical properties to provide sufficient resistance to flow in the absence of a porous medium, for example in areas such as voids and cavities behind pipe.

A logical solution to the limitations outlined above is to combine polymer gels with cement squeezes to effectively block to production through the porous medium, perforations,

voids and/or cavities. This combination is typically conducted sequentially: first the polymer gel is placed in the formation and the treatment is completed with a cement tail-in to squeeze the perforations and any voids and cavities behind pipe. A disadvantage of the sequential combination treatment may be that the depth of polymer invasion in the porous media extends beyond the depths that can be penetrated by perforating guns and consequently the shut-off may be permanent.

Another approach to combining squeeze cementing and polymer gel technology for shutting of unwanted gas or water production is to use the polymer gel as the "mix water" for the cement slurry. The limited and controlled leak off of the polymer gel into the porous medium during the squeeze enables a controlled depth of invasion. US Patent Application Publication 2003/0224946 A1, incorporated herein by reference in its entirety, discloses compositions that can be used for this combined gel-cement technique. One composition includes a crosslinkable material, e.g., H₂ZERO polymer sold by Halliburton Energy Services of Duncan, Oklahoma, for improving the strength of the composition when it sets such that it can withstand the pressures exerted by fluids in the subterranean formation. However, due to the alkalinity of the cement, which typically has a pH greater than 12, the gel time of the cement composition at the relatively high temperatures in the wellbore may be unacceptably short. The gel time refers to the period of time from initial mixing of the components in the cement composition to the point when a gel is formed. At this point, the viscosity of the cement composition is so high that it is no longer pumpable and thus does not reach the permeable zone where its placement is intended. A need therefore exists to reduce the gel time of such squeeze sealant compositions, thus ensuring that they can be properly placed in permeable zones downhole to prevent fluids from flowing into the wellbore.

SUMMARY OF THE INVENTION

Disclosed herein is a sealant composition for servicing a wellbore, comprising a crosslinkable material, a crosslinking agent, a fluid loss control additive, water, and a cement present in an amount in a range of from about 0% to about 50% by weight of the sealant composition. Further disclosed herein is a method of preparing a sealant composition, comprising combining a crosslinkable material, a crosslinking agent, a fluid loss control additive, water, and a cement, and controlling the amount of cement in the sealant composition such that the sealant composition has a gel time greater than or equal to about 4 hours when exposed to ambient temperatures in a wellbore.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram of a stainless steel test cell used in the Examples.

Fig. 2 is a schematic diagram of a sample test system incorporating the cell of Fig. 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Sealant compositions for plugging permeable zones in a wellbore include at least one crosslinkable material, at least one fluid loss control additive, water, and a reduced amount of cement relative to a conventional cement composition containing the same components except for the cement, for example a cement composition disclosed in U.S. Patent Application Publication No. 2003/0224946 A1, filed June 4, 2002, and incorporated by reference herein in its entirety. The amount of cement in the sealant compositions is reduced by an effective amount to lengthen the gel time of the sealant compositions to greater than or equal to about 4 hours when the composition is exposed to ambient temperatures in the wellbore. In an embodiment, the gel time is in a range of from about 4 hours to about 12 hours, alternatively, from about 4 to about 8 hours, alternatively, from about 4 to about 6 hours. In particular, the amount of cement present in the sealant compositions may be in a range of from about 0% to about 50% by weight of the sealant composition. Thus, cementless sealant compositions are contemplated in one embodiment. As used herein, gel time is defined as the period of time from initial mixing of the components in the sealant composition to the point when a gel is formed. Further, as used herein, a gel is defined as a crosslinked polymer network swollen in a liquid medium.

In embodiments comprising cement, any suitable cement known in the art may be used in the sealant compositions. An example of a suitable cement includes hydraulic cement, which comprises calcium, aluminum, silicon, oxygen, and/or sulfur and which sets and hardens by reaction with water. Examples of hydraulic cements include, but are not limited to a Portland cement, a pozzolan cement, a gypsum cement, a high alumina content cement, a silica cement, a high alkalinity cement, or combinations thereof. Preferred hydraulic cements are Portland cements of the type described in American Petroleum Institute (API) Specification 10, 5th Edition, July 1, 1990, which is incorporated by reference herein in its entirety. The cement may be, for example, a class A, B, C, G, or H Portland cement. Another example of a suitable cement is microfine cement, for example, MICRODUR RU microfine cement available from Dyckerhoff GmbH of Lengerich, Germany.

Examples of suitable crosslinkable materials include but are not limited to the following: a water soluble copolymer of a non-acidic ethylenically unsaturated polar monomer and a copolymerizable ethylenically unsaturated ester; a terpolymer or tetrapolymer of an ethylenically unsaturated polar monomer, an ethylenically unsaturated ester, and a monomer selected from acrylamide-2-methylpropane sulfonic acid, N-vinylpyrrolidone, or both; or combinations thereof. The sealant compositions may also include at least one crosslinking agent, which is herein defined as a material that is capable of crosslinking such copolymers to form a gel. The crosslinking agent may be, for example, an organic crosslinking agent such as a polyalkyleneimine, a polyfunctional aliphatic amine, an aralkylamine, or a heteroaralkylamine. The amount of the crosslinkable material present in the sealant composition may be in a range of from about 1% to about 5% by weight of the sealant composition. The amount of the crosslinking agent may be in a range of from about 0.1% to about 5% by weight of the sealant compositions. A description of such copolymers and crosslinking agents can be found in U.S. Patent Nos. 5,836,392, 6,192,986, and 6,196,317, each of which is incorporated by reference herein in its entirety. In an embodiment, the crosslinkable material is a copolymer of acrylamide and t-butyl acrylate, and the crosslinking agent is polyethylene imine. These materials are commercially available in a single H₂ZERO system sold by Halliburton Energy Services of Duncan, Oklahoma.

Additional examples of suitable crosslinkable materials include but are not limited to self-crosslinking, water soluble hydroxy unsaturated carbonyl monomers and water soluble, vinyl monomers. These monomers may be used in combination with a crosslinking agent, for example a suitable initiator such as an azo compound that is temperature activated over a range of temperatures. As used herein, an initiator is defined as a compound that is capable of forming free radicals that initiate polymerization of self-crosslinking monomers. Further, the vinyl monomers may also be used in combination with crosslinking agents such as multifunctional, vinyl monomers. The amount of the crosslinkable material present in the sealant composition may be in a range of from about 1% to about 5% by weight of the sealant composition. The amount of the crosslinking agent may be in a range of from about 0.05% to about 2% by weight of the sealant compositions. A description of such crosslinkable materials, and initiators, can be found in U.S. Patent Nos. 5,358,051 and 5,335,726, each of which is incorporated by reference herein in its entirety. In an embodiment, the crosslinkable material is 2-hydroxy ethyl acrylate monomer, and the initiators used therewith are different AZO-

compounds. These materials are commercially available in a single PERMSEAL system sold by Halliburton Energy Services.

The water employed in the sealant compositions may be fresh water or salt water, e.g., an unsaturated aqueous salt solution or a saturated aqueous salt solution such as brine or seawater. The amount of water present in the sealant compositions is sufficient to form a pumpable slurry. In an embodiment, the amount of water may be in a range of from about 25% to about 75% by weight of the sealant composition.

Any suitable fluid loss control additives known in the art may be used, for example polymer fluid loss control additives, particulate fluid loss control additives, or combinations thereof. Examples of suitable fluid loss control additives are disclosed in U.S. Patent Nos. 5,340,860, 6,626,992, 6,182,758, each of which is incorporated by reference herein in its entirety. In an embodiment, and in particular in an embodiment where the sealant composition comprises cement, the fluid loss control additives included in the sealant compositions are a copolymer of acrylamido-2-methylpropanesulfonate and N,N dimethylacrylamide, e.g., HALAD-344 fluid loss control additive also sold by Halliburton Energy Services, and a particulate matter such as silica flour, silica fume, sodium silicate, microfine sand, iron oxides, manganese oxides, barite, calcium carbonate, ground nut shells, ground wood, ground corncobs, mica, ceramics, ground tires, ground glass, ground drill cutting, etc., or mixtures of these. In an embodiment, and in particular in an embodiment where the sealant composition does not comprise cement, the fluid loss control additives included in the sealant composition may comprise, for example, natural and/or derivatized polysaccharides like galactomannan gums (guar gum, guar derivatives, etc), biopolymers, modified celluloses or combinations thereof in addition to or in lieu of the fluid loss control additives listed in the preceding sentence. The particulate matter preferably has a particle size between 0.5 and 150 microns. A suitable commercially available particulate matter is SSA-1 silica flour sold by Halliburton Energy Services. In embodiments comprising polymer fluid loss additives, particulate fluid loss additives, or combinations thereof, the amount of the particulate fluid loss additive in the sealant composition may be in the range from about 30 to about 70% by weight of the sealant composition and the amount of polymer fluid loss control additive present in the sealant composition may be in a range of from about 0.1 % to about 3 % by weight of the sealant composition.

Moreover, the sealant compositions may include one or more gel retarders. The amount of gel retarder present in the sealant composition may be in a range of from about 0% to about 5% by weight of the sealant composition. A suitable gel retarder is available from Halliburton Energy Services under the tradename FDP-S727-04.

In an embodiment, the gel retarder may be a formate compound, e.g., water soluble formate, for contributing to the reduction in the gel time of the crosslinkable material as described in US patent application publication 2004/0035580, filed June 5, 2002, and incorporated by reference herein in its entirety. The amount of the formate compound present in the sealant composition is in a range of from about 0% to about 5% by weight of the sealant composition. Examples of suitable water-soluble formates include ammonium formate, lithium formate, sodium formate, potassium formate, rubidium formate, cesium formate, francium formate, and combinations thereof.

Moreover, the sealant compositions may include a gel retarder as described in US patent application 10/875,649, filed June 24, 2004, and incorporated by reference herein in its entirety. In an embodiment, the gel retarder is comprised of a chemical compound that is capable of acetylating an organic amine and/or slowly hydrolyzing or thermolyzing to produce one or more acids in the sealant composition. The compounds retard the cross-linking of the sealant composition at high temperatures, i.e., temperatures above about 200°F, for a period of time sufficient to place the sealant composition in the subterranean formation or zone in which the permeability is to be reduced. Examples of gel retarder chemical compounds that is capable of acetylating an organic amine and/or slowly hydrolyzing or thermolyzing to produce one or more acids that can be utilized in accordance with the present invention include, but are not limited to, anhydrides such as acetic or propionic anhydride, esters such as polylactate, amides such as proteins and polyamides, imides such as polysuccinimide, polyacids such as polyaspartic acid, polyglutamic acids and their salts. Of these, polysuccinimide or polyaspartic acid are preferred. Polysuccinimide hydrolyzes or thermolyzes in water to produce iminodisuccinic acid, polyaspartic acid or aspartic acid.

Optionally, the sealant compositions may include a latex comprising a styrene/butadiene copolymer suspended in water to form an aqueous emulsion. Examples of suitable latexes are described in U.S. Patent No. 5,688,844, which is incorporated by reference herein in its entirety. In an embodiment, the styrene/butadiene copolymer latex is LATEX 2000 emulsion sold by Halliburton Energy Services. The weight ratio of the styrene to

butadiene in LATEX 2000 emulsion is about 25:75, and the amount of the copolymer in the LATEX 2000 emulsion is about 50% by weight of the aqueous emulsion. In addition, the sealing compositions may optionally include a stabilizer such as C₁₅ alcohol ethoxylated with 40 moles of ethylene oxide, which is commercially available from Halliburton Energy Services under the tradename 434C stabilizer.

As deemed appropriate by one skilled in the art, additional additives may be added to the sealant compositions for improving or changing the properties thereof. Examples of such additives include but are not limited to set retarding agents, set accelerating agents, dispersing agents, strength retrogression control agents, viscosifying agents, and formation conditioning agents. The sealant compositions may further include a clay stabilizer for inhibiting damage to the subterranean formation during injection. The amount and type of clay stabilizer may be selected as deemed appropriate by one skilled in the art.

Methods of using the foregoing cement compositions first include preparing the compositions. They may be made by combining all of the components in any order and thoroughly mixing the components in a manner known to those skilled in the art. In an embodiment, the crosslinkable material, the water, and the cement, if any, are combined first, followed by the addition of the fluid loss control additives and any other additives. In an embodiment, the cement compositions are prepared immediately prior to use to ensure that they do not form a gel before reaching permeable zones in the wellbore.

Subsequently, the foregoing sealant compositions may be placed in the permeable zones to improve the zonal isolation of a subterranean formation penetrated by the wellbore. As used herein, a permeable zone is defined as an area in the wellbore through which a fluid can undesirably flow, wherein the permeable zone may be present in a conduit disposed in the wellbore, a cement column disposed in the annulus of the wellbore between the conduit and the wall of the wellbore, a microannulus interposed between the cement column and the conduit, a microannulus interposed between the cement column and the wall of the wellbore, or combinations thereof. Examples of such permeable zones include perforations such as those formed by a perforation gun, fissures, cracks, fractures, streaks, flow channels, voids, high permeability streaks, annular voids, or combinations thereof.

In an embodiment, a cement squeezing technique is employed to force a sealant composition into at least one permeable zone. As indicated previously, the sealant composition has a gel time greater than or equal to about 4 hours, for example, in a range of

from about 4 hours to about 12 hours when it is exposed to ambient temperatures in a wellbore. Ambient downhole temperatures typically range from about 50°C to about 175°C. As such, the composition remains pumpable for a sufficient amount of time to allow it to be squeezed into the permeable zone despite being exposed to relatively high temperatures. After placement in the permeable zone, the sealant composition is allowed to set into a rigid mass, thereby plugging the permeable zone such that fluids, e.g., water, most likely cannot pass through the permeable zone to the subterranean formation. Thus, the sealant composition effectively seals the subterranean formation from outside contaminants.

EXAMPLES

The fluid leak off properties were measured in a custom built system 5 as depicted in Figures 1 and 2. The stainless steel cell 10 has a body 15 disposed between an upper housing 20 and a lower housing 25. The upper housing has a temperature sensor 22, a fill port 24, and a pressure port 27. The body 15 has a central chamber 30 holding a sample of core sample 32 on top of a metal filter 40. The core sample 32 simulates the permeability of a downhole formation. Rubber seals 45 provide a seal between the core sample 32 and the upper housing 20 and lower housing 25. A fluid reservoir 35 containing a sealant composition 37 and a liquid 39 is disposed above the core sample 32. The sealant composition 37 is placed in the reservoir 35 via fill port 24, followed by the liquid 39. The liquid 39 is pressurized via pressure port 27 using pump 50, as shown in Fig. 2. The steel cell 10 may be placed in a heating cabinet 55, and the combination of heat and pressure provided by heating cabinet 55 and pump 50 may be used to simulate downhole conditions. Sealant composition 37 permeating the core sample 32 exits the steel cell 10 via exit port 60 in lower housing 25, and may be recovered and measured using balance 65. The system may be controlled and data acquired via computer 70.

Shut off properties of the sealant composition were measured using a system as depicted in Figures 1 and 2. The steel cell 10 was placed in a heating cabinet and could be operated at 130 °C and 200 bars. Fluid loss was measured on core sample 32, which was sandstone with a permeability in the range from 200 – 1000 mD. A small hole (8 mm ID) was drilled into the core sample to mimic a perforation. The cement slurry, i.e., sealant composition 37, conditioned at 80 °C was poured into the fill port 24 while the cell was at 80 °C. Squeeze pressures of up to 80 bars were applied with a back pressure of 10 bars. Fluids were collected

from the exit port 60 and fluid loss was recorded over time. API fluid loss (ml/30 minutes) was calculated by correcting for the area of the perforation.

In a controlled squeeze the fluid leak off penetrated the core approximately 2 cm. Subsequently the temperature of the heating cabinet was raised to the required value while maintaining an absolute pressure of 10 bars. The sealant was allowed to cure for 24 to 48 hours. After the cure pressure was stepwise increased from the back-side (reverse flow) and flow was monitored. Pressure was increased until maximum operating pressure of the set-up was reached (200 bars) or when pumps could not maintain pressure with the observed flow.

Experiment		#1	#2	#3
Composition				
Fresh water	w/w%	22.3%	19.9%	19.9%
HZ-10	w/w%	13.2%	11.9%	11.9%
HZ-20	w/w%	0.9%	1.0%	1.0%
KCl	w/w%	0.5%	0.4%	0.4%
FDP-S727-04	w/w%	0.2%	0.2%	0.2%
HALAD-344	w/w%	0.4%	0.4%	0.4%
SSA-1	w/w%	56.3%	59.6%	66.2%
Class-G cement	w/w%	6.3%	6.6%	-
Results				
Temperature	°C	150	150	150
Initial permeability	mD	266	750	750
Max Squeeze Pressure	bar	60	60	60
Max Flow back pressure	bar	140	180	180
K _{final} /K _{initial}	%	0.1%	0.002%	0.012%

While preferred embodiments of the invention have been shown and described, modifications thereof can be made by one skilled in the art without departing from the spirit and teachings of the invention. The embodiments described herein are exemplary only, and are not intended to be limiting. Many variations and modifications of the invention disclosed herein are possible and are within the scope of the invention. Use of the term "optionally" with respect to any element of a claim is intended to mean that the subject element is required, or alternatively, is not required. Both alternatives are intended to be within the scope of the claim.

Accordingly, the scope of protection is not limited by the description set out above but is only limited by the claims which follow, that scope including all equivalents of the subject matter of the claims. Each and every claim is incorporated into the specification as an embodiment of the present invention. Thus, the claims are a further description and are an

addition to the preferred embodiments of the present invention. The discussion of a reference in the Description of Related Art is not an admission that it is prior art to the present invention, especially any reference that may have a publication date after the priority date of this application. The disclosures of all patents, patent applications, and publications cited herein are hereby incorporated by reference, to the extent that they provide exemplary, procedural, or other details supplementary to those set forth herein.

What is claimed is:

1. A sealant composition for servicing a wellbore, comprising: a crosslinkable material, a crosslinking agent, a fluid loss control additive, water, and a cement present in an amount in a range of from about 0% to about 50% by weight of the sealant composition.
2. The sealant composition of claim 1, wherein the sealant composition has a gel time in a range of from about 4 hours to about 12 hours.
3. The sealant composition of claim 1, wherein the crosslinkable material comprises a water soluble copolymer of a non-acidic ethylenically unsaturated polar monomer and a copolymerizable ethylenically unsaturated ester; a water soluble terpolymer or tetrapolymer of an ethylenically unsaturated polar monomer, an ethylenically unsaturated ester, and a monomer selected from acrylamide-2-methylpropane sulfonic acid, N-vinylpyrrolidone, or both; or combinations thereof; and wherein the crosslinking agent comprises a polyalkyleneimine, a polyfunctional aliphatic amine, an aralkylamine, a heteroaralkylamine, or combinations thereof.
4. The sealant composition of claim 1, wherein the crosslinkable material comprises a water soluble hydroxy unsaturated carbonyl monomer, a water soluble vinyl monomer, or combinations thereof; and wherein the crosslinking agent comprises an azo compound, a free radical initiator, a multifunctional vinyl monomer, or combinations thereof.
5. The sealant composition of claim 1, wherein the crosslinkable material comprises 2-hydroxy ethyl acrylate monomer and the crosslinking agent comprises an azo compound.
6. The sealant composition of claim 1, wherein the crosslinkable material comprises a copolymer of acrylamide and t-butyl acrylate and the crosslinking agent comprises polyethylene imine.
7. The sealant composition of claim 3, wherein an amount of the crosslinkable material present in the sealant composition is in a range of from about 1% to about 5% by weight of the sealant composition and an amount of the crosslinking agent is in a range of from about 0.1% to about 5% by weight of the sealant composition.
8. The sealant composition of claim 4, wherein an amount of the crosslinkable material present in the sealant composition is in a range of from about 1% to about 5% by weight of the sealant composition and an amount of the crosslinking agent is in a range of from about 0.05% to about 2% by weight of the sealant composition.

9. The sealant composition of claim 1, wherein an amount of the water present in the sealant composition is in a range of from about 25% to about 75% by weight of the sealant composition.
10. The sealant composition of claim 1, wherein the fluid loss control additive comprises particulate matter, a polymer, or combinations thereof.
11. The sealant composition of claim 1, wherein the fluid loss control additive comprises natural polysaccharides; derivatized polysaccharides; galactomannan gums; guar gum; guar derivatives; biopolymers; modified cellulose; a copolymer of acrylamido-2-methylpropanesulfonate and N,N dimethylacrylamide and particulate matter comprising silica flour, silica fume, sodium silicate, microfine sand, iron oxides, manganese oxides, barite, calcium carbonate, ground nut shells, ground wood, ground corncobs, mica, ceramics, ground tires, ground glass, ground drill cutting, or combinations thereof; or combinations thereof.
12. The sealant composition of claim 1, wherein the sealant composition comprises cement, wherein the fluid loss control additive comprises a copolymer of acrylamido-2-methylpropanesulfonate and N,N dimethylacrylamide and particulate matter comprising silica flour, silica fume, sodium silicate, microfine sand, iron oxides, manganese oxides, barite, calcium carbonate, ground nut shells, ground wood, ground corncobs, mica, ceramics, ground tires, ground glass, ground drill cutting, or combinations thereof.
13. The sealant composition of claim 10, wherein the fluid loss control additive comprises a polymer fluid loss control additive in a range of from about 0.1% to about 3% by weight of the sealant composition, a particulate fluid loss control additive in a range of from about 30% to about 70% by weight of the sealant composition, or both.
14. The sealant composition of claim 1, wherein the sealant composition further comprises a clay stabilizer for inhibiting damage to a subterranean formation penetrated by the wellbore.
15. The sealant composition of claim 1, wherein the sealant composition comprises a formate compound for reducing a gel time of the crosslinkable material.
16. The sealant composition of claim 15, wherein the formate compound comprises ammonium formate, lithium formate, sodium formate, potassium formate, rubidium formate, cesium formate, francium formate, or combinations thereof.
17. The sealant composition of claim 1, wherein the sealant composition further comprises a gel retarder comprised of a chemical compound that is capable of acetylating an organic

amine, hydrolyzing, thermolyzing, or combinations thereof, to produce one or more acids in said composition.

18. The sealant composition of claim 17, wherein the gel retarder comprises at least one member selected from the group consisting of anhydrides, esters, amides and polyamides, imides, polyacids and their salts.

19. The sealant composition of claim 1, wherein the sealant composition further comprises a latex comprising a styrene/butadiene copolymer suspended in water.

20. A method of preparing a sealant composition, comprising:

(a) combining a crosslinkable material, a crosslinking agent, a fluid loss control additive, water, and a cement; and

(b) controlling the amount of cement in the sealant composition such that the sealant composition has a gel time greater than or equal to about 4 hours when exposed to ambient temperatures in a wellbore.

Fig.1.


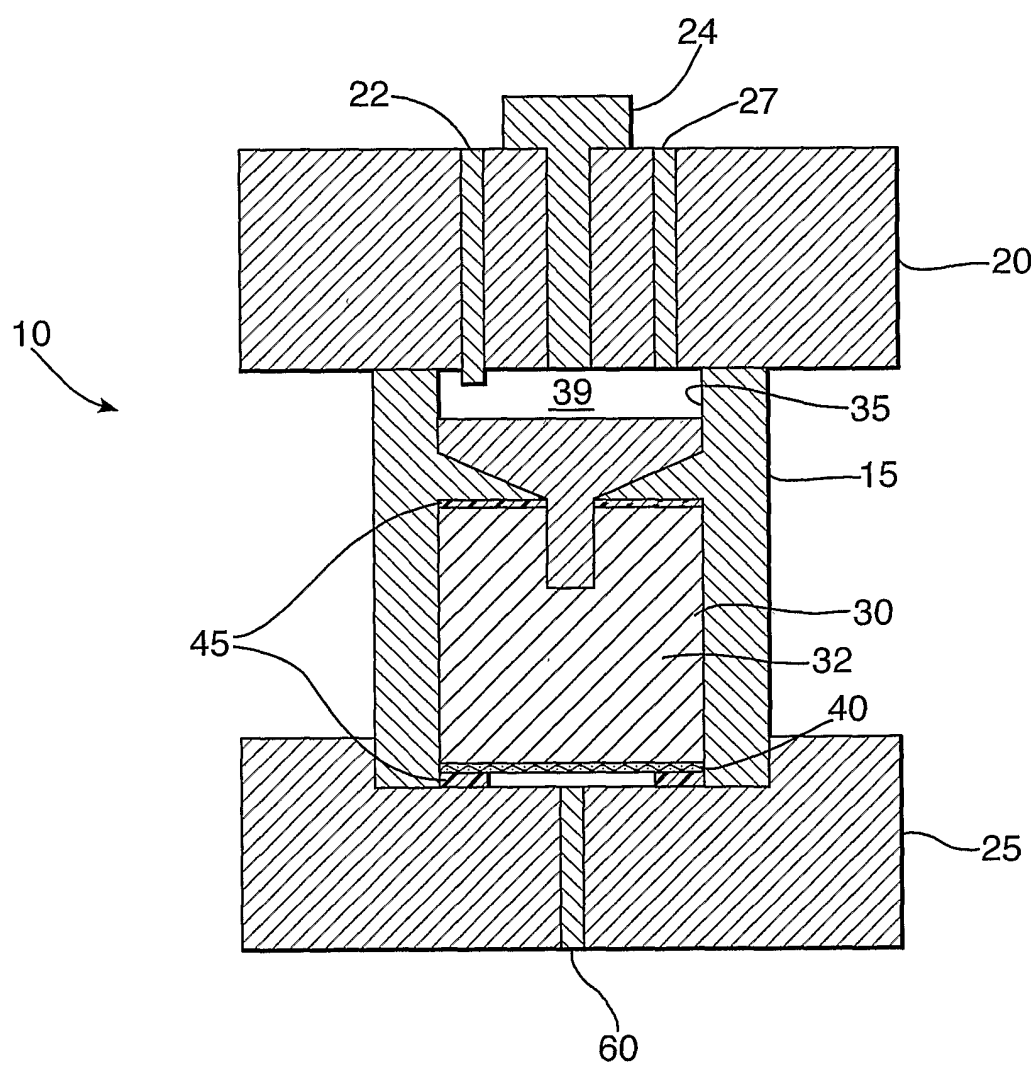


Fig.2.

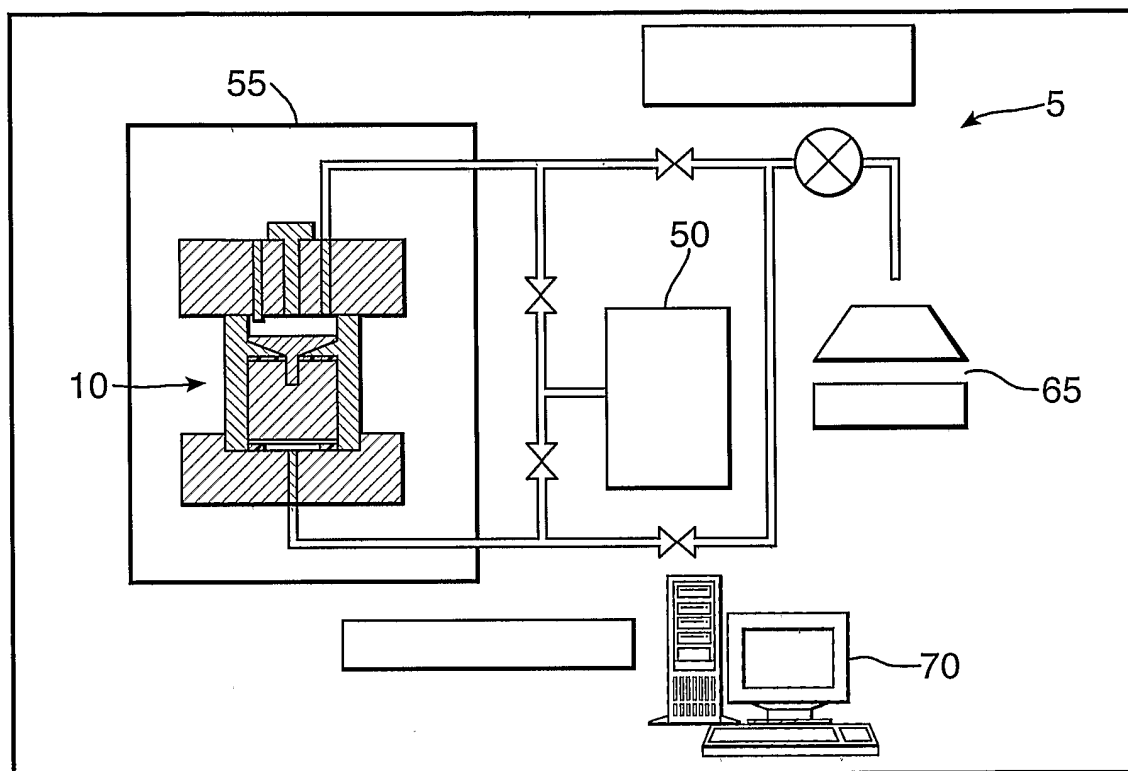

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2006/000001

A. CLASSIFICATION OF SUBJECT MATTER

INV. C09K8/508 C09K8/512 C09K8/504

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	US 2005/197257 A1 (BOUWMEESTER RON C) 8 September 2005 (2005-09-08) claims 1,16	1-20
A	EP 0 145 151 A (HALLIBURTON COMPANY) 19 June 1985 (1985-06-19) claims 1-8 page 8 - page 10	1-20
A	US 5 181 568 A (MCKOWN ET AL) 26 January 1993 (1993-01-26) claim 1 column 2, line 45 - column 5, line 29	1-20
A	US 5 850 880 A (MORAN ET AL) 22 December 1998 (1998-12-22) the whole document	1-20

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

18 May 2006

Date of mailing of the international search report

29/05/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zimpfer, E

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/GB2006/000001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005197257 A1	08-09-2005	WO 2005085591 A1	15-09-2005
EP 0145151 A	19-06-1985	AU 565900 B2	01-10-1987
		AU 3304084 A	18-04-1985
		DE 3470341 D1	11-05-1988
US 5181568 A	26-01-1993	NONE	
US 5850880 A	22-12-1998	CA 2184548 A1	30-06-1997