



US 20050223502A1

(19) **United States**

(12) **Patent Application Publication**

**Kleker**

(10) **Pub. No.: US 2005/0223502 A1**

(43) **Pub. Date: Oct. 13, 2005**

(54) **APPARATUS FOR PROCESSING GARMENTS INCLUDING A HANGER MECHANISM**

**Publication Classification**

(76) **Inventor: Richard G. Kleker, Pleasant Hills, CA (US)**

(51) **Int. Cl.7** ..... **D06B 1/00**

(52) **U.S. Cl.** ..... **8/158; 8/149.3; 68/5 C; 68/5 R**


Correspondence Address:  
**Attn: Craig A. Gelfound**  
**MCDERMOTT, WILL & EMERY**  
**34th Floor**  
**2049 Century Park East**  
**Los Angeles, CA 90067 (US)**




(57) **ABSTRACT**

A garment processing apparatus is disclosed. The garment processing apparatus may include a hanger bar having a plurality of variable width notches, each of the variable width notches being capable of supporting a hanger with a garment thereon. The garment processing apparatus may also include a cabinet having an interior, the hanging bar being supported in the interior of the cabinet, wherein the cabinet is configured to process one or more of the garments.

(21) **Appl. No.: 10/821,561**

(22) **Filed: Apr. 9, 2004**

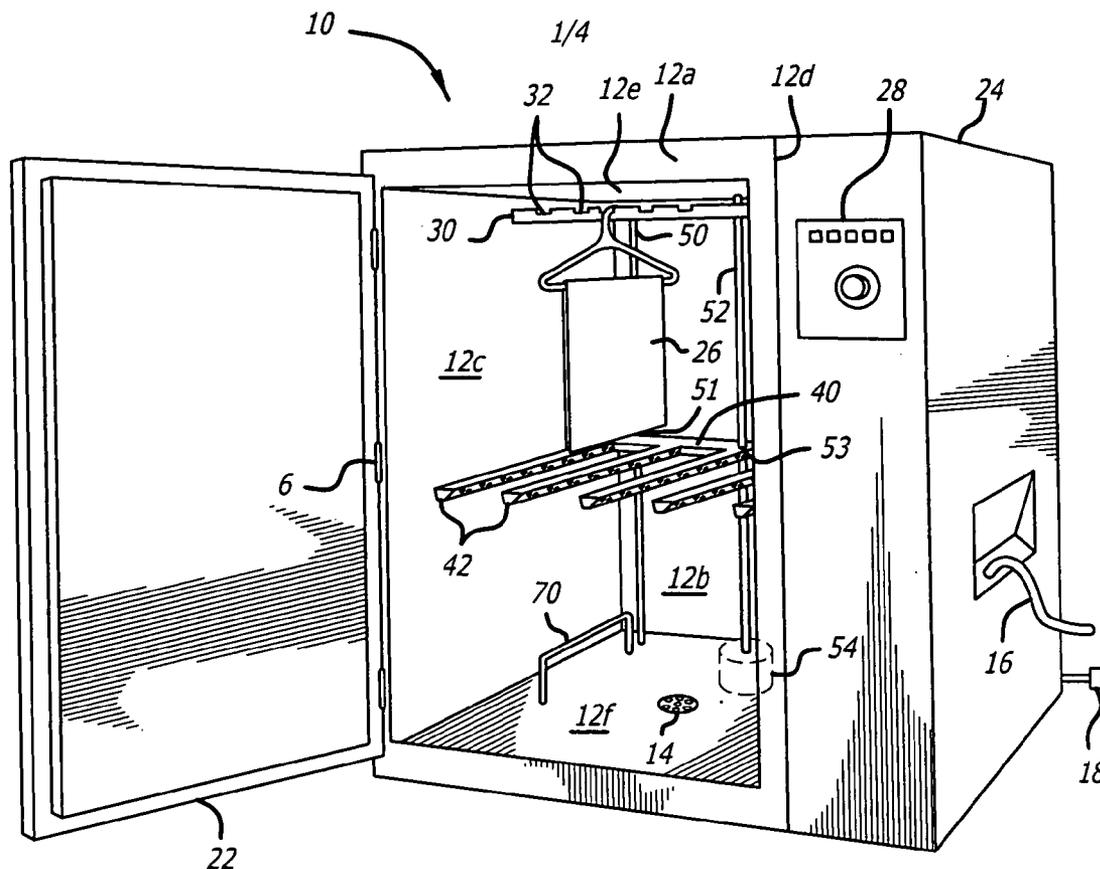

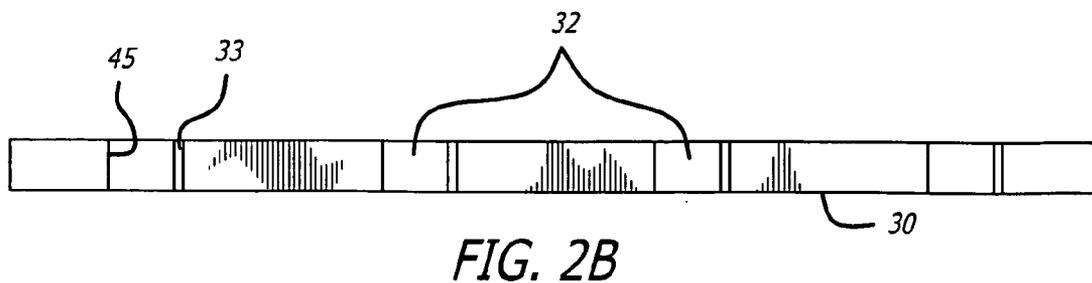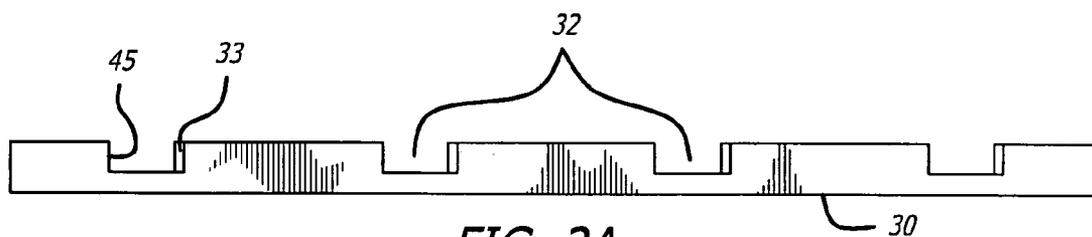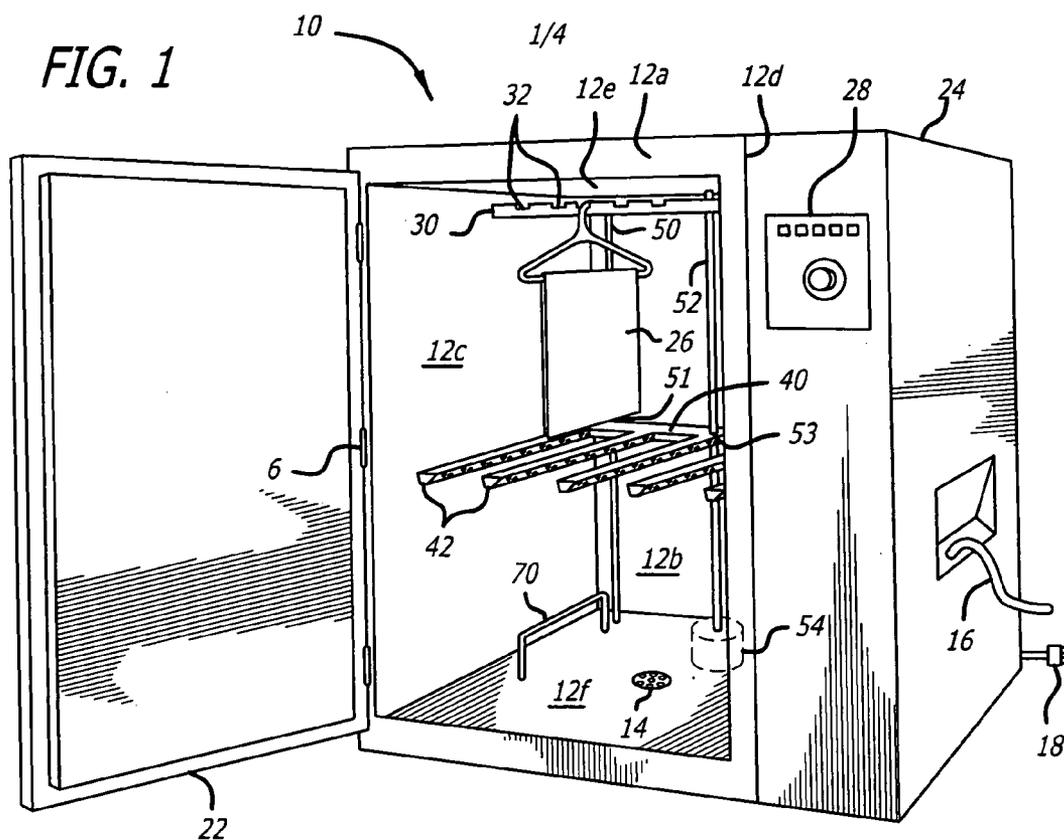

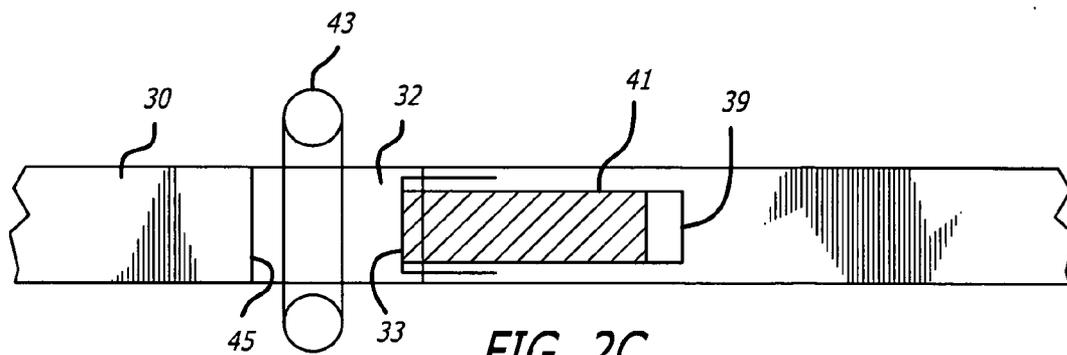


FIG. 2C

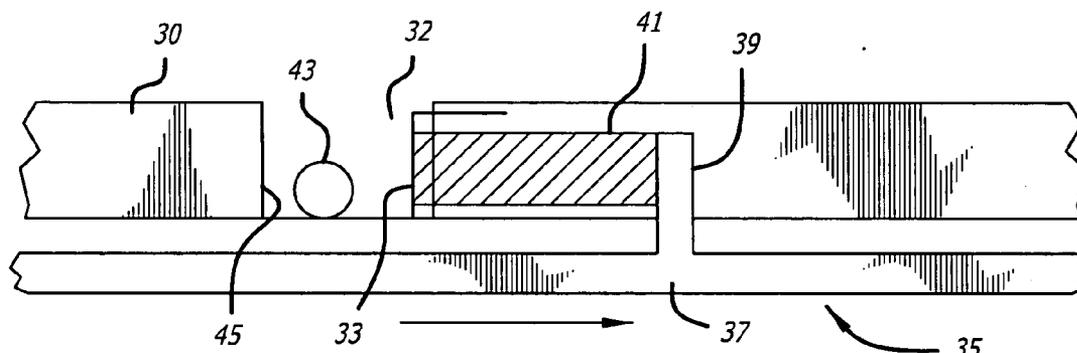


FIG. 2D

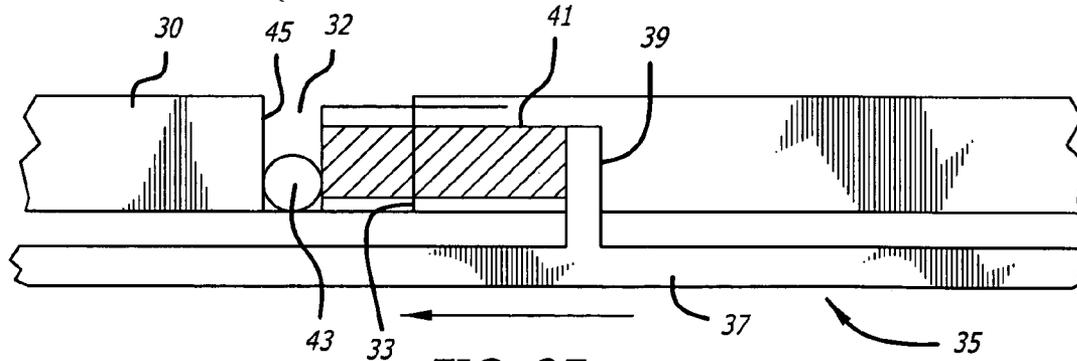


FIG. 2E

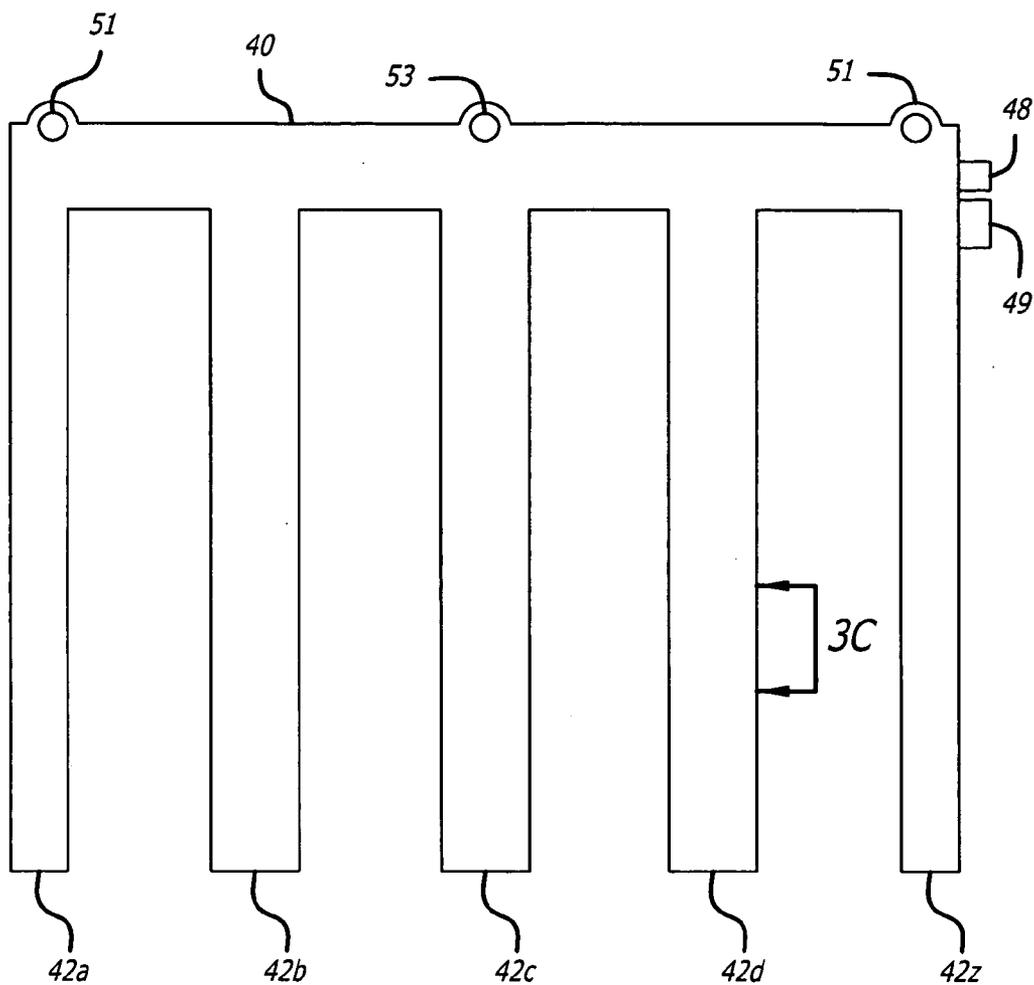


FIG. 3A

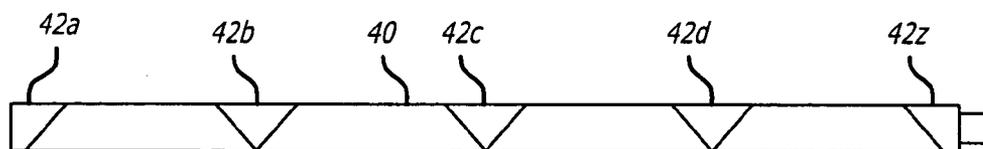


FIG. 3B

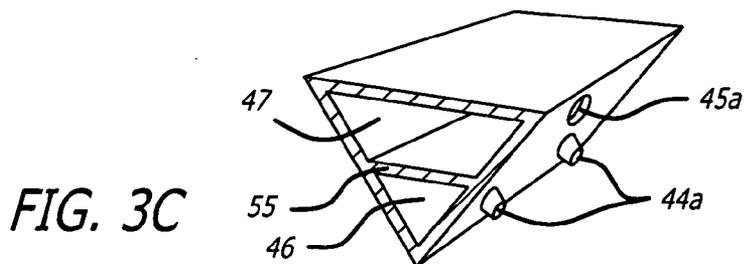


FIG. 3C

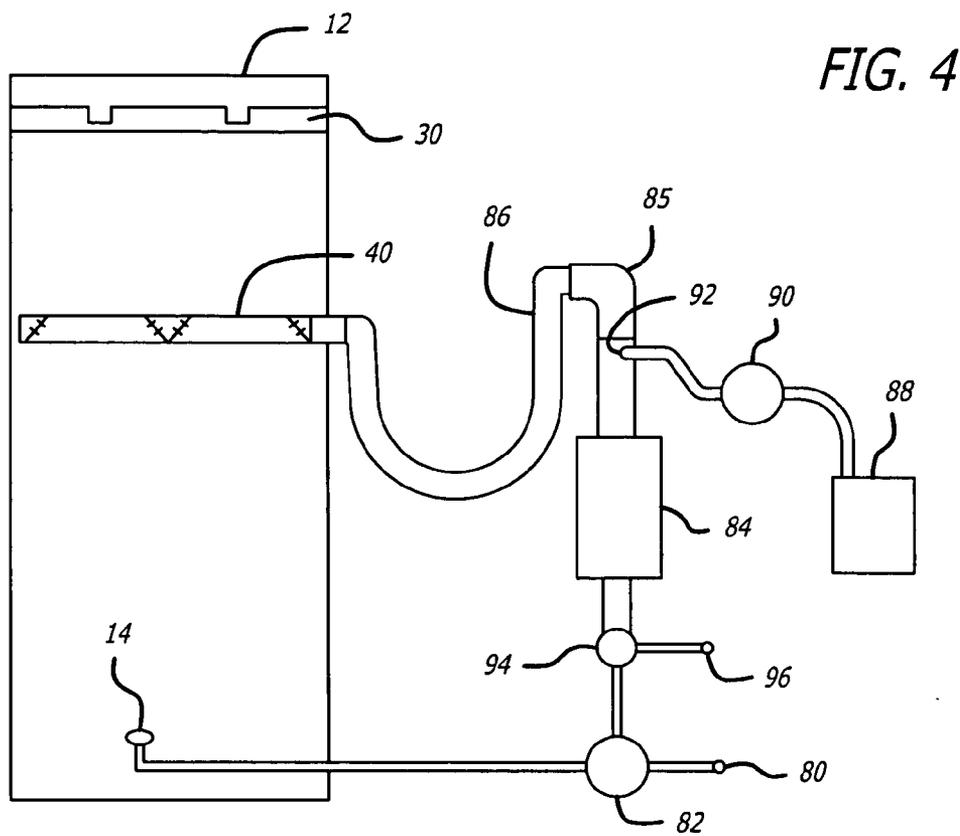


FIG. 4

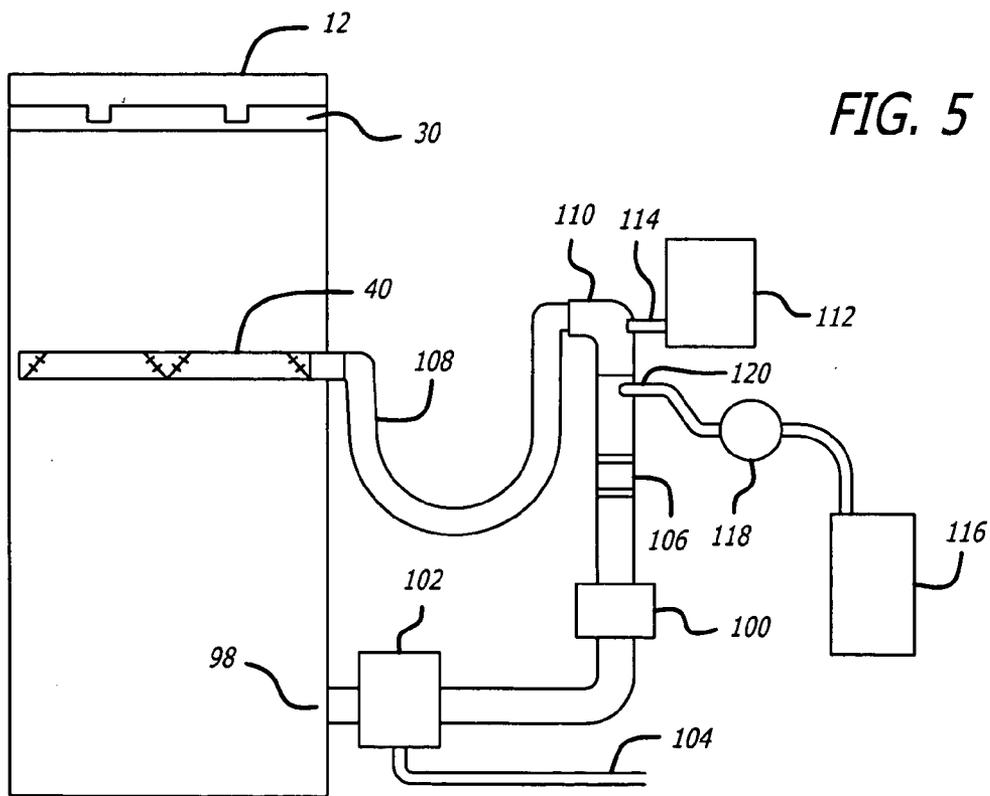


FIG. 5

**APPARATUS FOR PROCESSING GARMENTS INCLUDING A HANGER MECHANISM**

**BACKGROUND**

[0001] A variety of machines in which clothes may be hung and processed in a single unit have been proposed. There are a series of patents that require the use of solvents for dry cleaning garments, for example U.S. Pat. No. 2,845,786, issued to E. L. Chrisman on Aug. 5, 1958; U.S. Pat. No. 3,166,923 issued to Zacks on Jan. 26, 1965; and U.S. Pat. No. 2,741,113, issued to Norkus on Apr. 10, 1956. The use of solvents, especially in the home, can create health and safety issues.

[0002] There are additional patents that claim a machine in which the clothes are “finished” only. These patents are directed toward de-wrinkling and smoothing the clothes, typically by using steam. However, these machines do not clean the clothes, these machines are used after the clothes are already clean. Some examples of these devices are seen in U.S. Pat. No. 3,707,855 issued to Buckley on Jan. 2, 1973; U.S. Pat. No. 4,391,602 issued to Stichnoth et al. on Jul. 5, 1983; U.S. Pat. No. 3,739,496 issued to Buckley et al. on Jun. 19, 1973; U.S. Pat. No. 3,732,628 issued to Bleven et al. on May 15, 1973; and U.S. Pat. No. 4,761,305 issued to Ochiai on Aug. 2, 1988. U.S. Pat. No. 6,189,346 issued to Chen et al. on Feb. 20, 2001 discloses a clothes treating apparatus that uses a “conditioning mist” as an alternative to dry-cleaning clothes. This patent does not provide for washing clothes with water or rinsing the clothes.

[0003] In addition, some patents claim machines that only dry clothes, and do not wash or finish the clothes: for example U.S. Pat. No. 3,257,739 issued to Wentz on Jun. 28, 1966; and U.S. Pat. No. 3,102,796 issued to Erickson on Sep. 3, 1963.

[0004] U.S. Pat. No. 3,114,919 issued to Kenreich on Dec. 24, 1963 discloses a machine that can wash and dry using conventional laundry soap, however, this apparatus can only wash one shirt, or the like, and one pair of pants, or the like, at a time. In addition, this patent discloses an apparatus that has fixed outlets for dispensing wash and rinse water. This patent, like U.S. Pat. No. 3,664,159 issued to Mazza on May 23, 1972, utilizes a shaking of the garments to remove dirt and debris from the garments. However, shaking the garments can cause the garments to fall during the wash cycle, and can impart wrinkles to the garments. In addition, these patents teach that the wash water is applied from the top and bottom of the clothing, and not along the length of the clothing.

[0005] Finally, U.S. Pat. No. 3,672,188 issued to Geschka et al. on Jun. 27, 1972 discloses an apparatus that uses conventional laundry soap water, and hot air to wash and dry clothes. However, in this patent the soap and water are applied to the garments from top and bottom nozzles. Likewise, in U.S. Pat. No. 3,868,835 issued to Todd-Reeve on Mar. 4, 1975, the water and soap are applied from nozzles located near the top and bottom of the apparatus. In neither of these apparatuses is the soap and water applied over the entire length of the garments.

**SUMMARY**

[0006] In one aspect of the present invention, a garment processing apparatus includes a hanger bar having a plural-

ity of variable width notches, each of the variable width notches being capable of supporting a hanger with a garment thereon, and a cabinet having an interior, the hanging bar being supported in the interior of the cabinet, wherein the cabinet is configured to process one or more of the garments.

[0007] In another aspect of the present invention, a garment processing apparatus includes a hanger bar having a plurality of notches, each of the notches being capable of supporting a hanger with a garment thereon, the hanger bar further comprising means for varying the width of each of the notches, and a cabinet having an interior, the hanging bar being supported in the interior of the cabinet, wherein the cabinet is configured to process one or more of the garments.

[0008] In yet another aspect of the present invention, a method of processing a plurality of garments in an apparatus including a cabinet having an interior and a hanger bar having a plurality of notches in the interior of the cabinet, the method including placing each of a plurality of hangers in a different one of the notches, each of the hangers having a garment thereon, adjusting the width of each of said different one of the notches in accordance with the hanger placed thereon, and processing the garments.

[0009] It is understood that other embodiments of the present invention will become readily apparent to those skilled in the art from the following detailed description, wherein various embodiments of the invention are shown and described by way of illustration. As will be realized, the invention is capable of other and different embodiments and its several details are capable of modification in various other respects, all without departing from the spirit and scope of the present invention. Accordingly, the drawings and detailed description are to be regarded as illustrative in nature and not as restrictive.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] Aspects of the present invention are illustrated by way of example, and not by way of limitation, in the accompanying drawings, wherein:

[0011] **FIG. 1** is a perspective view of the garment processing apparatus from the front with the door open;

[0012] **FIG. 2A** is an elevation view of a hanger mechanism for use in the garment processing apparatus;

[0013] **FIG. 2B** is a plan view of the hanger mechanism;

[0014] **FIG. 2C** is a detailed cross-sectional plan view of a variable width notch in the hanger mechanism with the notch in the open position;

[0015] **FIG. 2D** is a detailed cross-sectional elevation view of the variable width notch in the hanger mechanism with the notch in the open position;

[0016] **FIG. 2E** is a detailed cross-sectional elevation view of the variable width notch in the hanger mechanism with the notch in the closed position;

[0017] **FIG. 3A** is a plan view of the manifold.

[0018] **FIG. 3B** is a cross-sectional perspective view of the manifold;

[0019] **FIG. 3C** shows a partial sectional view of the area indicated in **FIG. 3A**;

[0020] FIG. 4 is a functional block diagram illustrating a water system in the garment processing apparatus; and

[0021] FIG. 5 is a functional block diagram illustrating a closed-loop air system in the garment processing apparatus.

#### DETAILED DESCRIPTION

[0022] The detailed description set forth below in connection with the appended drawings is intended as a description of various embodiments of the present invention and is not intended to represent the only embodiments in which the present invention may be practiced. Each embodiment described in this disclosure is provided merely as an example or illustration of the present invention, and should not necessarily be construed as preferred or advantageous over other embodiments. The detailed description includes specific details for the purpose of providing a thorough understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced without these specific details. In some instances, well-known structures and components are shown in block diagram form in order to avoid obscuring the concepts of the present invention.

[0023] In one embodiment, a single apparatus may be used to process garments. The term "process" garments means to wash, rinse, dry and/or steam garments. The apparatus may be used in residences or in hotel rooms, hospitals, laundromats, and other commercial applications. In a conventional washing machine it is best to transfer the clothes soon after they are washed to the dryer in order to prevent wrinkling. In addition, it is even better to rapidly remove dried clothes from the dryer shortly after completion of the drying process to further prevent wrinkling. When using the apparatus described herein, there is no need to rapidly move clothes from the washing machine to the dryer, or to rapidly remove clothes from the dryer. The clothes are washed and dried on hangers in the apparatus. Once the cycle is complete, the clothes may remain in the apparatus indefinitely, until ready to be worn, suspended from hangers.

[0024] The apparatus may be used by placing garments on hangers, and hanging the garments on a bar within the apparatus. Plastic hangers, or any other hanger that will support the garments without imparting stains to the wet garments, may be used. A hanger alignment mechanism may also be used to secure the garments in a relatively fixed position during the operating cycle.

[0025] A manifold may be used to supply water, steam and/or air to the clothes. Chemical agents for treating the garments may be injected into the water, steam and/or air stream in the manifold. The manifold may include a series of arms, with one arm on each side of the garment. The arms may contain nozzles directed downward and toward the garments. The manifold, arms, and nozzles may contain a dual internal system of pipes. One set of internal pipes allows wash water and/or rinse water to be directed toward the clothes. The other set of internal pipes allows air and/or steam to be directed toward the clothes.

[0026] During operation, the wash water containing one or more chemical agents such as soap and the like may travel up the first set of internal pipes in the manifold, through the arms, out the nozzles, and onto the clothes. The entire manifold may be configured to traverse up and down the length of the hanging clothes, spraying the clothes with soapy water.

[0027] After the wash cycle is complete, rinse water may travel through the same first set of internal pipes in the manifold, and arms, and out the same nozzle. The manifold may again traverse up and down the length of the hanging clothes, spraying the clothes with rinse water.

[0028] In the drying cycle, air and/or steam may travel through the second set of internal pipes in the manifold, through the arms, and out a separate set of nozzles and toward the clothes. The air may be used to dry the garments and the steam may be used to remove the wrinkles from the garments. Chemical agents may be injected into the steam and/or air stream. The steam, and more particularly, the air may be recirculated through a condenser. The condenser may be used to remove the moisture from the steam and/or air stream.

[0029] The sequence and duration of the wash cycle, rinse cycle, drying cycle and steam cycle may be controlled through a control panel.

[0030] When the washing and drying cycle is complete, the clothes may remain in the apparatus until such time as is convenient to remove the clothes.

[0031] Referring to FIG. 1, an apparatus 10 may include a cabinet 12 with a front wall 12a, a rear wall 12b, two side walls 12c and 12d, and a top and bottom wall 12e and 12f. The bottom wall 12f may include a drain 14. In one embodiment of the apparatus 10, the walls of cabinet 12 are insulated. The apparatus 10 may be connected to a water supply by hose 16 and an electrical supply by conductors 18.

[0032] The cabinet 12, which may be sealed against the escape of water, may be provided with a door 22 through which clothing to be processed can be inserted. In one embodiment of the apparatus, the door 22 may be transparent so that the garments may be viewed during the operating cycle. Alternatively, the door 22 may be opaque and insulated. The door 22 may be attached to the cabinet 12 with one or more conventional hinges 6. The door 22 may be closed and watertight during operation of the apparatus. The door 22 may, but does not have to, extend the entire length of the front wall 12a of the cabinet 12.

[0033] The cabinet 12 may be adjacent to a sub-cabinet 24. The sub-cabinet 24 may include the mechanism by means of which the operating cycle of the apparatus 10 is automatically carried out. The operating cycle may include any variation or combination of pre-washing, washing, rinsing, steaming and drying. For means of illustration only, and not as a limitation, the control mechanism may allow the consumer to set the apparatus for heavy or light washing; set the water temperature; add chemical agents such as bleach, fabric softeners, or other laundry additives, set one or more rinse cycles; set an initial delay of the start of the wash cycle to allow for the action of spot-removers; set a delay of the start of the wash cycle to accommodate the convenience of the user; set a pre-wash cycle; set varying drying temperatures and times, set a steam cycle after drying to remove wrinkles from the garments, and set the apparatus for steam cycle only to quickly remove wrinkles from garments that do not require washing. The various washing and drying requirements may be set via a control panel 28. The electricity for running the control panel 28, and all other parts of the apparatus 10, may be supplied through the conductor 18.

[0034] The control panel 28 may be used to effectuate the different washing and drying needs of the user. The control

panel 28 may include a timer, a means for setting or programming the various washing, rinse, drying and steam cycles, as well as the temperature for each, a means for dispensing chemical agents such as laundry detergent, bleach, fabric softener, or other laundry additives, and a means for regulating the washing, rinsing, steaming and drying times.

[0035] The clothes-receiving portion of the cabinet 12 may have, at its upper end, a hanging bar 30. The hanging bar 30 may be suspended horizontally and parallel to the walls 12a and 12b. The hanging bar 30 may have one or more hanger notches 32. Hanger-mounted garments 26 such as clothes, towels, sheets or other items to be laundered may be placed on a conventional, non-rusting, hanger. The hanger may be inserted onto the hanging bar 30, and held at regularly spaced intervals by the notches 32 in the hanger bar.

[0036] Referring to FIGS. 2A-2E, the hanger bar 30 may be configured with variable width hanger notches 32 that automatically adjust to the hanger width to align the hangers in a parallel manner. The variable width notch 32 may include a sliding notch wall 33. An actuator 35, or other similar device, may be used to control the width of the notch 32 by moving the sliding notch wall 33 in and out of the notch 32. In one embodiment, the actuator 35 may include an elongated horizontal member 37 that extends the length of the hanger bar 30. The elongated horizontal member 37 may include a number of spaced apart vertical members, one vertical member for each variable width notch. As shown in FIGS. 2C-2E, the vertical member 39 may be coupled to the sliding notch wall 33 of its respective variable width notch 32 with a spring 41.

[0037] The elongated horizontal member 35 may be moved between an open and closed position by a solenoid (not shown) or other actuating device. FIGS. 2C and 2D show the elongated horizontal member 35 in the open position with the notch 32 in its widest position. In the open position, a hanger 43 may be placed in the notch 32, or alternatively, removed from the notch 32. With the hanger 43 in the notch 32, the actuator 35 may be used to adjust the variable width notch 32 to secure the hanger 43. This may be achieved by moving the elongated horizontal member 37 into the closed position as shown in FIG. 2E. As the elongated horizontal member 37 is moved into the closed position, the vertical member 39 moves the sliding notch wall 33 inward until it engages the hanger 43 and forces it against the opposite fixed wall 45 of the notch. With the hanger 43 lodged between both the sliding side 33 and the fixed wall 45 of the notch 32, the spring 41 will begin to compress as the actuator 35 continues to move towards the closed position. This approach allows different diameter hangers to be used in the apparatus. The variable width notch 32 will automatically adjust to the width of the hanger when the elongated horizontal member 37 of the actuator 35 is forced into the closed position.

[0038] As indicated above, the elongated horizontal member 37 of the actuator 35 may be moved between the open and closed position by a solenoid (not shown) or other actuating device. In one embodiment of the hanger bar 30, the solenoid may be user controlled by a switch (not shown). With this approach, the user can simply place the switch in one position to access the hangers and another position to

secure the hangers in place for operation. Alternatively, the solenoid may be controlled automatically. By way of example, a switch (not shown) responsive to the position of the door 22 (see FIG. 1) may be used. In this configuration, the notches may be opened into their widest position when the door is opened to release the hangers. When the door is closed, the variable width hanger notch may adjust to the hanger width causing parallel alignment of the hangers during operation.

[0039] Referring to FIGS. 1 and 3A-3C, a manifold 40 may be used to supply water, steam and/or air to the clothes. The manifold 40 may include a plurality of arms 42. The arms 42 may be in a single plane, parallel to each other, and perpendicular to the hanging bar 30. The arms 42 may extend between hanger-mounted garments 26. The first arm in the parallel plane is 42a, and the last arm in the parallel plane is 42z.

[0040] The manifold 40 may have two sets of internal pipes. One set is the liquid-carrying pipes 46, which may be used to transport wash and rinse water. The other set is the air-carrying pipes 47, which may be used to transport air and steam. The liquid-carrying pipes 46 and air carrying pipes 47 may be a separate set of internal pipes inside manifold 40. Alternatively, as shown in FIG. 3C, the manifold 40, liquid-carrying pipes 46, and air carrying pipes 47 may be manufactured as a single unit with a divider 55 separating the air in the air-carrying pipes 47 from the water in the water-carrying pipes 46.

[0041] FIG. 4 is a perspective view of a water system, which may be used during the wash and rinse cycles. In the water system, water may enter the sub-cabinet 24 through the water inlet 80 attached to the water supply hose 16. A water pump 82 may be used to pump the water through a heater 84 to the manifold 40. A flexible pipe 86 may be used to connect a rigid pipe 85 extending from the heater 84 to the manifold 40.

[0042] A reservoir 88 may be provided for laundry detergent or other chemical agents that may be injected into the water stream, as requested by the user. A peristaltic pump 90, or any other suitable pump, may be used to draw the chemical agents from the reservoir 88 and inject them into the water stream through a nozzle 92 penetrating the rigid pipe 85. The peristaltic pump 90 may be disabled during the rinse cycle.

[0043] In either case, once the water (with or without chemical agents) reaches the manifold 40, it may exit the arms 42 and spray the hanger-mounted garments 26. The manifold 40 may move up and down the length of the hanger-mounted garments 26 spraying both sides of garments 26 with the water. The water may run off the garments 26, down to the bottom wall 12f, through the drain 14, and back to the water pump 82. A waste water valve 94 may be used to recirculate the water, or discharge the water through a water outlet pipe 96.

[0044] FIG. 5 is a perspective view of an air system, which may be used during the drying and steam cycle. In the air system, air may be drawn from the cabinet 12 through an air intake port 98 by a blower 100. The blower 100 may be a variable speed or fixed speed blower. A condenser 102 may be inserted in-line between the air intake port 98 and the blower 100. The condenser 102 may be used to remove

water from the air drawn from the cabinet **12**. The condensed water may be discharged through a water ejection tube **104**. The water ejection tube **104** may be connected to the water outlet pipe **96** in the water system.

[0045] The blower **100** may be used to force the air drawn from the cabinet **12** through a heater **106** and into the manifold **40**. A flexible pipe **108** may be used to connect a rigid pipe **110** extending from the heater **106** to the manifold **40**. The rigid pipe **110** may provide a suitable location for injecting various elements into the air stream. By way of example, a steam generator **112** may be used to inject steam into the air stream through a nozzle **114** penetrating the rigid pipe **110**. A reservoir **116** may also be used as a container for chemical agents that may be injected into the air stream. A peristaltic pump **118**, or any other suitable pump, may be used to draw the chemical agents from the reservoir **116** and inject them into the air stream through a nozzle **120** also penetrating the rigid pipe **110**.

[0046] Once the air stream reaches the manifold **40**, it may be directed to the hanger-mounted garments **26** through the arms **42**. The manifold **40** may move up and down the length of the hanger-mounted garments **26** blowing air or steam on both sides of garments **26**.

[0047] Returning to FIGS. 3A-3C, each arm **42** of the manifold **40** may include a plurality of liquid-exits **44** and air-exits **45**. The liquid-exits **44** and the air-exits **45** may be either nozzles or holes. Arm **42a** may include a plurality of exits **44a** and **45a** on only the side facing toward the garment **26**, and arm **42z** may include has a plurality of exits **44z** and **45z** on only the side facing toward garment **26**. The remainder of the arms **42** may have a plurality of exits **44** and **45** on both sides of each arm **42** so that the hanger-mounted garments **26** may be sprayed from both sides.

[0048] The liquid-exits **44** and air-exits **45** may be placed on the arms **42** so that the liquid or air exits the arms **42** in a downward direction. The shape of the arms may be any shape that allows the liquid-exits **44** and air-exits **45** to point downward. By way of example, the arms **42** may have a cross-sectional shape of an isosceles triangle with the two equal sides of the triangle facing downward, and with the liquid-exits **44** and air-exits **45** on the two downward facing sides of the triangle. The downward angle of the liquid or air may be any angle necessary to prevent the garments **26** from tangling and twisting, and to help smooth the garments **26**. By way of example, a downward angle between 40 degrees and 60 degrees may be used on the liquid-exits **44** and the air-exits **45**.

[0049] There are no specific requirements regarding placement of the liquid-exits **44** and air exits **45** relative to each other. That is, the liquid-exits **44** and the air-exits **45** may be placed in a horizontal line, may be placed with either on top of the other, or may be placed in any arrangement that allows liquid to exit the liquid-exits **44**, and allows air to exit air-exits **45**.

[0050] Returning to FIG. 1, the manifold **40** may have one or more unthreaded guide holes **51**. The apparatus **10** may contain one or more guide post **50**. In one embodiment of the apparatus **10**, the number of unthreaded guide holes **51** is equal to the number to guide posts **50**. The guide post **50** may be a smooth post that runs in a vertical direction parallel to the rear wall **12b**. The guide post **50** may be inserted

through the unthreaded hole **51** in the manifold **40**, and the manifold **40** may freely move along the length of the guide post **50**.

[0051] The manifold **40** may have one or more threaded screw holes **53**. The apparatus **10** may contain one or more screw posts **52**. In one embodiment of the apparatus **10**, the number of threaded screw holes **53** is equal to the number of the screw posts **52**. The screw post **52** may be a threaded post that runs in a vertical direction parallel to the rear wall **12b**. The screw post **52** and the threaded screw hole **53** may be threaded so that the threaded screw post **52** will turn inside the threaded screw hole **53** and, in turning, move the manifold **40** either up or down.

[0052] The screw post **52** may be moveably attached to a motor **54**. The motor **54** may be used to turn the screw post **52** in an alternating clockwise and counter-clockwise direction, thereby moving the manifold **40** up and down the screw post **52**. The motor **54** may be programmed via the control panel **28** so that the screw post **52** turns in one direction for varying lengths of time. The length of time that the screw post **52** turns in any one direction may be directly correlated to the length that the manifold **40** travels in any one direction. Thus, the screw post **52** may turn for such a length of time that the manifold **40** travels only part of the height of the cabinet **12**, or the entire length of the cabinet **12**. The control panel **28** may also provide a means for setting or programming the speed of the upward/downward motion, as well as the distance the manifold **40** travels in the upward/downward plane.

[0053] In one embodiment of the apparatus, one or more racks **70** may be attached to the bottom wall **12f**. The rack **70** may extend horizontally near the bottom of the cabinet **12**. Socks or other small items may be placed on the rack **70** and treated as described above.

[0054] The previous description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. A garment processing apparatus, comprising:

a hanger bar having a plurality of variable width notches, each of the variable width notches being capable of supporting a hanger with a garment thereon; and

a cabinet having an interior, the hanging bar being supported in the interior of the cabinet, wherein the cabinet is configured to process one or more of the garments.

2. The garment processing apparatus of claim 1 wherein each of the variable width notches in the hanger bar is formed with a sliding notch wall.

3. The garment processing apparatus of claim 2 further comprising an actuator coupled to the sliding notch wall of each of the variable width notches.

4. The garment processing apparatus of claim 3 further comprising a plurality of springs, each of the springs cou-

pling the actuator to the sliding notch wall of a different one of the variable width notches.

5. The garment processing apparatus of claim 4 wherein the actuator comprises an elongated member extending at least a portion of the length of the hanger bar, and a plurality of members extending from the elongated member, and wherein each of the springs couples a different one of the members extending from the elongated member of its respective sliding notch wall.

6. The garment processing apparatus of claim 2 wherein each of the variable width notches in the hanger bar is formed with a second notch wall opposing a respective one of the sliding notch walls.

7. The garment processing apparatus of claim 6 wherein the second notch wall of each of the variable width notches comprises a fixed notch wall.

8. The garment processing apparatus of claim 6 further comprising an actuator coupled to the sliding notch wall of each of the variable width notches, the actuator being configured to move the sliding notch wall in relation to its respective opposing second wall for each of the variable width notches.

9. The garment processing apparatus of claim 8 wherein the cabinet comprises a door, and wherein the actuator is further configured to move the sliding notch wall towards its respective opposing second wall for each of the variable width notches when the door is moved from an open position to a closed position, and wherein the actuator is further configured to move the sliding notch wall away from its respective opposing second wall for each of the variable width notches when the door is moved from the closed position to the open position.

10. The garment processing apparatus of claim 1 further comprising a manifold in the interior of the cabinet, the manifold having a plurality of arms, and wherein the variable width notches are configured to support the hangers such that each of the garments is positioned between a different pair of adjacent arms.

11. The garment processing apparatus of claim 10 wherein the manifold is further configured to traverse the length of the garments at least one time while discharging water, air or steam.

12. The garment processing apparatus of claim 10 wherein the manifold is further configured to traverse the length of the garments at least one time while discharging water during a wash and rinse cycle, and traverse the length of the garments at least one more time while discharging air during a dry cycle.

13. The garment processing apparatus of claim 10 wherein each of the different pair of arms are configured to discharge water, air or steam in a downward direction towards the garment therebetween.

14. A garment processing apparatus, comprising:

a hanger bar having a plurality of notches, each of the notches being capable of supporting a hanger with a

garment thereon, the hanger bar further comprising means for varying the width of each of the notches; and

a cabinet having an interior, the hanging bar being supported in the interior of the cabinet, wherein the cabinet is configured to process one or more of the garments.

15. The garment processing apparatus of claim 14 further comprising a manifold in the interior of the cabinet, the manifold having a plurality of arms, and wherein the notches are configured to support the hangers such that each of the garments is positioned between a different pair of adjacent arms.

16. The garment processing apparatus of claim 15 wherein the manifold is further configured to traverse the length of the garments at least one time while discharging water, air or steam.

17. The garment processing apparatus of claim 15 wherein each of the different pair of arms are configured to discharge water, air or steam in a downward direction towards the garment therebetween.

18. A method of processing a plurality of garments in an apparatus including a cabinet having an interior and a hanger bar having a plurality of notches in the interior of the cabinet, the method comprising:

placing each of a plurality of hangers in a different one of the notches, each of the hangers having a garment thereon;

adjusting the width of each of said different one of the notches in accordance with the hanger placed thereon; and

processing the garments.

19. The method of claim 18 further comprising increasing the width of each of said different one of the notches, and removing the hangers from the cabinet.

20. The method of claim 18 wherein the width of each of said different one of the notches is adjusted using an actuator.

21. The method of claim 18 wherein the cabinet further comprises a door, and wherein the width of each of said different one of the notches is adjusted using an actuator responsive to the position of the door.

22. The method of claim 18 wherein the processing of the garments comprises spraying the garments with water from a manifold that traverses the length of the garments at least one time.

23. The method of claim 18 wherein the processing of the garments comprises blowing air onto the garments from a manifold that traverses the length of the garments at least one time.

24. The method of claim 18 wherein the processing of the garments comprises applying steam to the garments from a manifold that traverses the length of the garments at least one time.

\* \* \* \* \*