




(86) Date de dépôt PCT/PCT Filing Date: 1999/02/18
(87) Date publication PCT/PCT Publication Date: 1999/10/28
(45) Date de délivrance/Issue Date: 2007/09/25
(85) Entrée phase nationale/National Entry: 1999/12/15
(86) N° demande PCT/PCT Application No.: DE 1999/000450
(87) N° publication PCT/PCT Publication No.: 1999/054917
(30) Priorité/Priority: 1998/04/20 (DE198 17 475.6)

(51) Cl.Int./Int.Cl. *H01J 65/04* (2006.01),
H01J 65/00 (2006.01)
(72) Inventeurs/Inventors:
VOLLKOMMER, FRANK, DE;
HITZSCHKE, LOTHAR, DE
(73) Propriétaire/Owner:
PATENT-TREUHAND-GESELLSCHAFT FUER
ELEKTRISCHE GLUEHLAMPEN MBH, DE
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : LAMPE A DECHARGE A ELECTRODES PROTEGEES PAR UN DIELECTRIQUE
(54) Title: DISCHARGE LAMP HAVING DIELECTRICALLY IMPEDED ELECTRODES

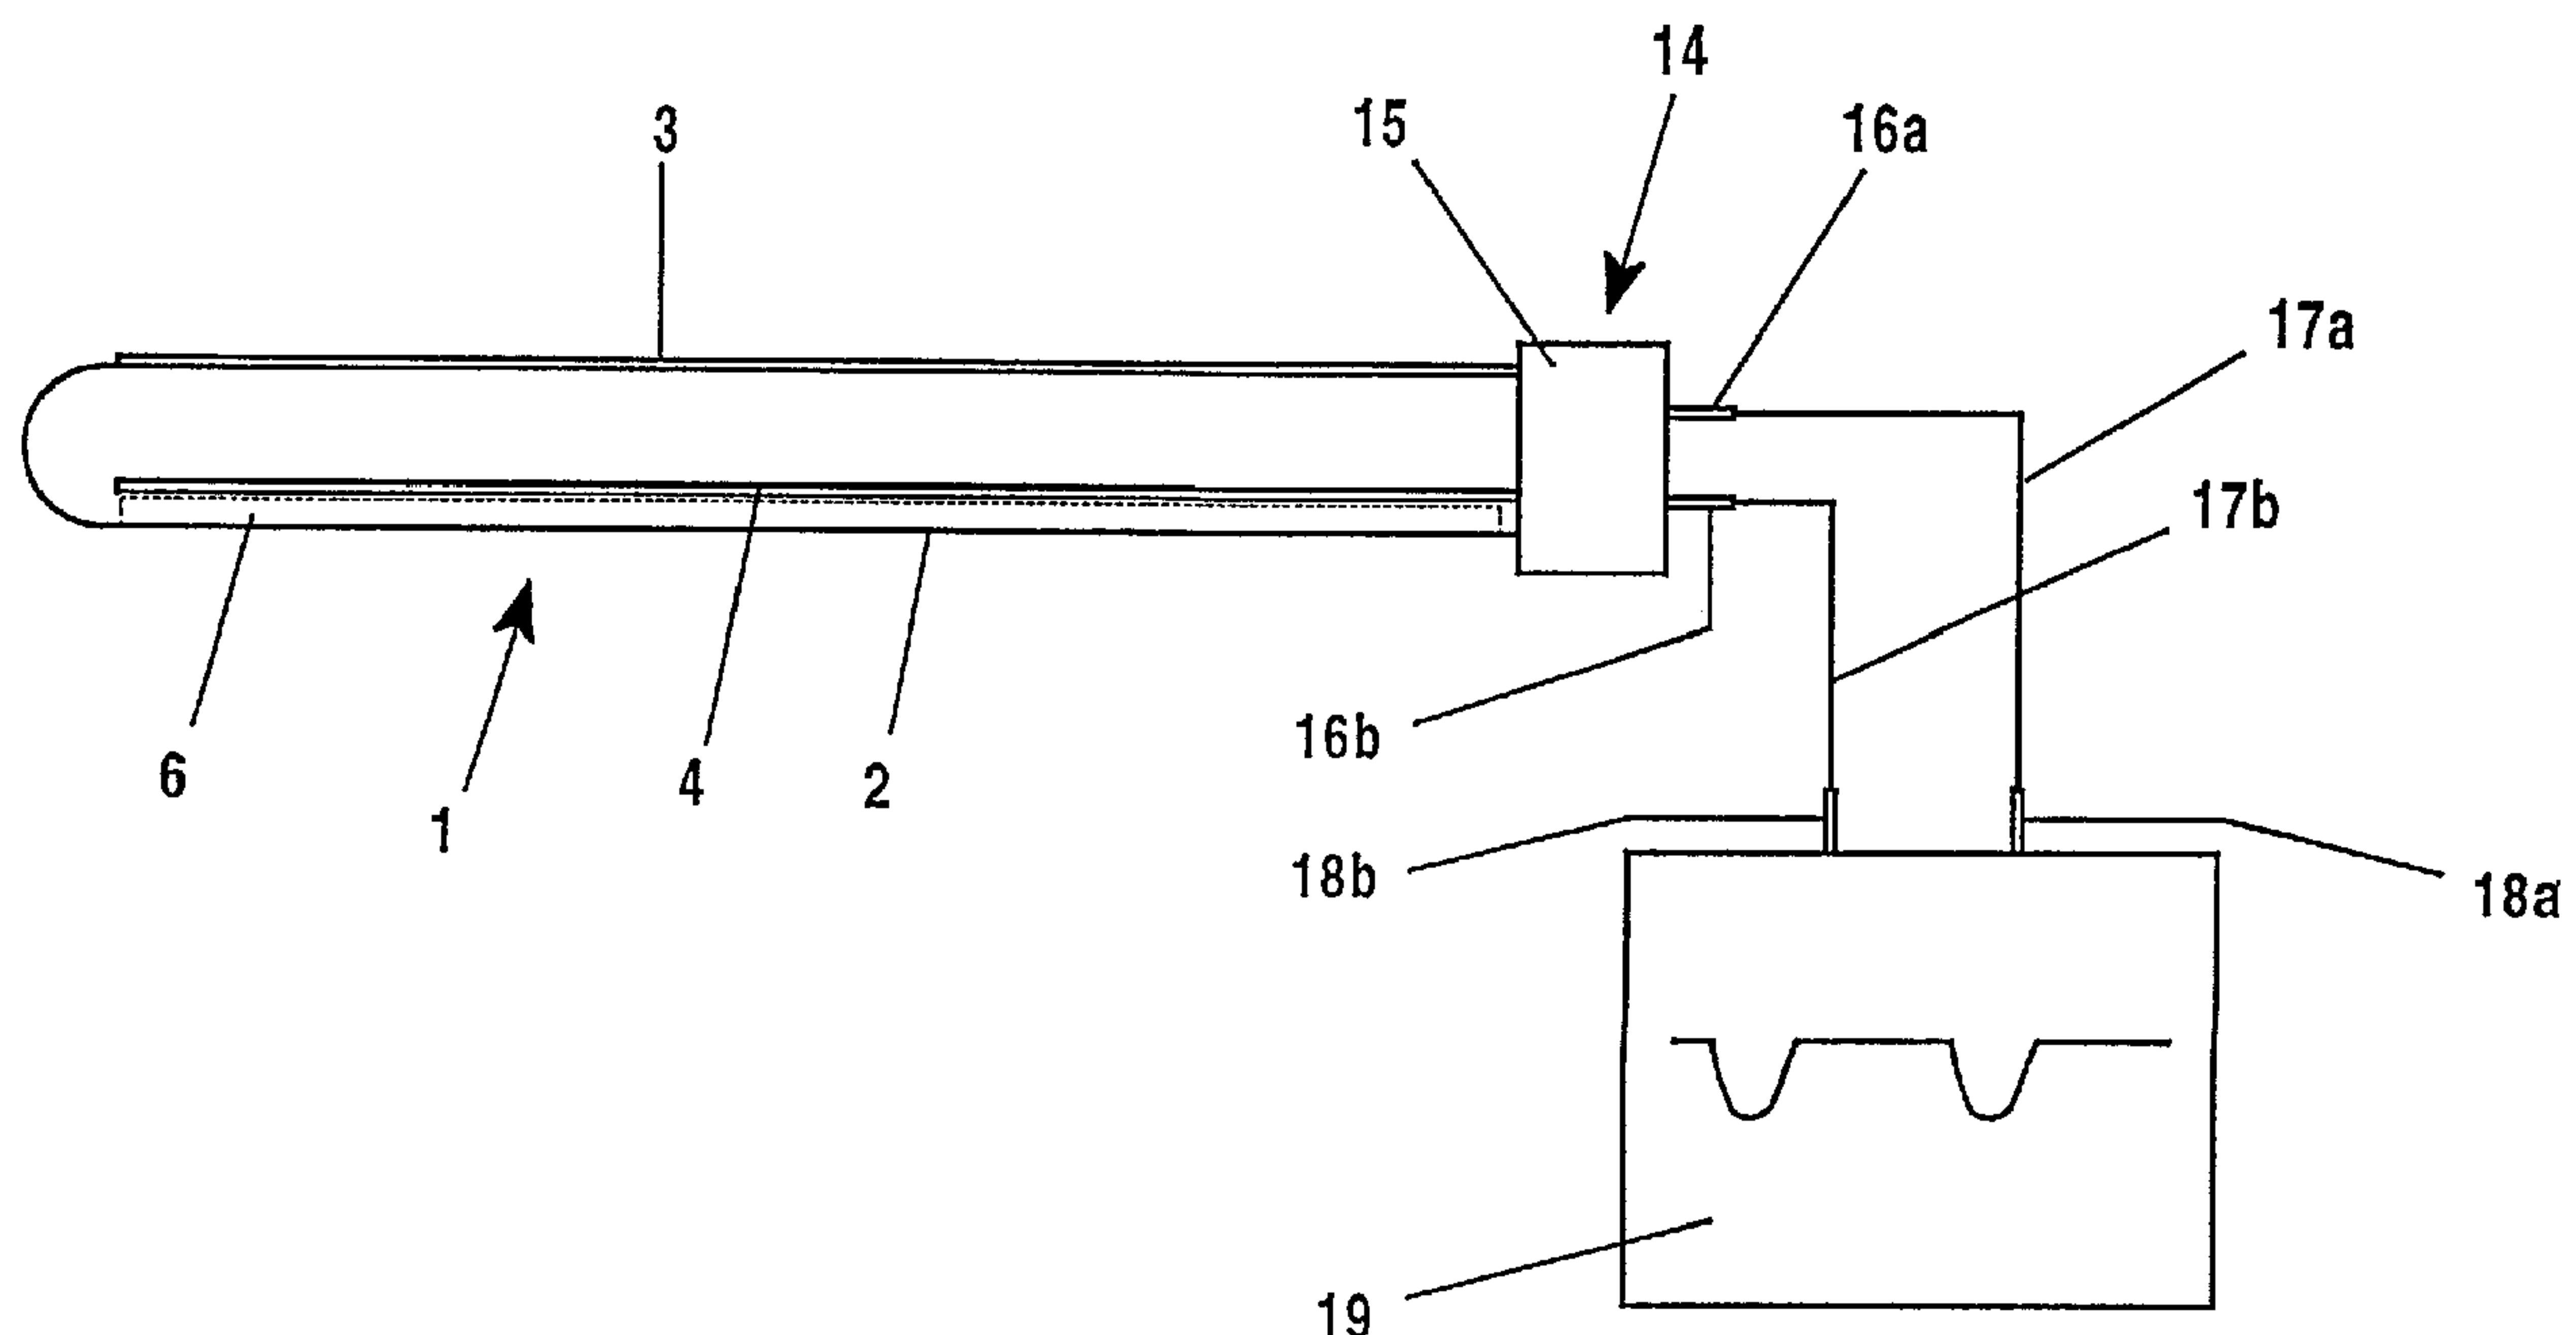

(57) Abrégé/Abstract:

The invention relates to a discharge lamp (1) with a tubular discharge vessel (2) filled with an inert gas, and optionally provided with a layer of a luminescent substance. The discharge lamp comprises at least three elongated electrodes (3, 4, 5) arranged parallel to the longitudinal axis of the tubular discharge vessel (2). The electrodes are arranged in such a way that the ratio $s/a \geq 0.1$ is satisfied, whereby s defines the maximal distance of the imaginary line connecting an electrode pair from the nearest adjacent wall of the discharge vessel, and a defines the distance between the electrodes of this electrode pair. As a result, a higher luminance is obtained. The lamp is especially provided for a pulsed, dielectrically impeded discharge.





PCT
WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro
INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation ⁶ : H01J 65/04, 65/00	A1	(11) Internationale Veröffentlichungsnummer: WO 99/54917 (43) Internationales Veröffentlichungsdatum: 28. Oktober 1999 (28.10.99)
---	-----------	--

(21) Internationales Aktenzeichen: PCT/DE99/00450
(22) Internationales Anmeldedatum: 18. Februar 1999 (18.02.99)

(30) Prioritätsdaten:
198 17 475.6 20. April 1998 (20.04.98) DE

(71) Anmelder (für alle Bestimmungsstaaten ausser US):
PATENT-TREUHAND-GESELLSCHAFT FÜR ELEK-
TRISCHE GLÜHLAMPEN MBH [DE/DE]; Hellabrunner
Strasse 1, D-81543 München (DE).

(72) Erfinder; und
(75) Erfinder/Anmelder (nur für US): VOLLKOMMER, Frank
[DE/DE]; Neuriederstrasse 18, D-82131 Buchendorf (DE).
HITZSCHKE, Lothar [DE/DE]; Theodor-Alt-Strasse 6,
D-81737 München (DE).


(74) Gemeinsamer Vertreter:
PATENT-TREUHAND-GESELLSCHAFT
FÜR ELEKTRISCHE GLÜHLAMPEN MBH; Postfach 22
16 34, D-80506 München (DE).

(81) Bestimmungsstaaten: CA, HU, JP, KR, US, europäisches
Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR,
IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht
Mit internationalem Recherchenbericht.

(54) Title: DISCHARGE LAMP WITH DIELECTRICALLY IMPEDED ELECTRODES

(54) Bezeichnung: ENTLADUNGSLAMPE MIT DIELEKTRISCH BEHINDERTEN ELEKTRODEN

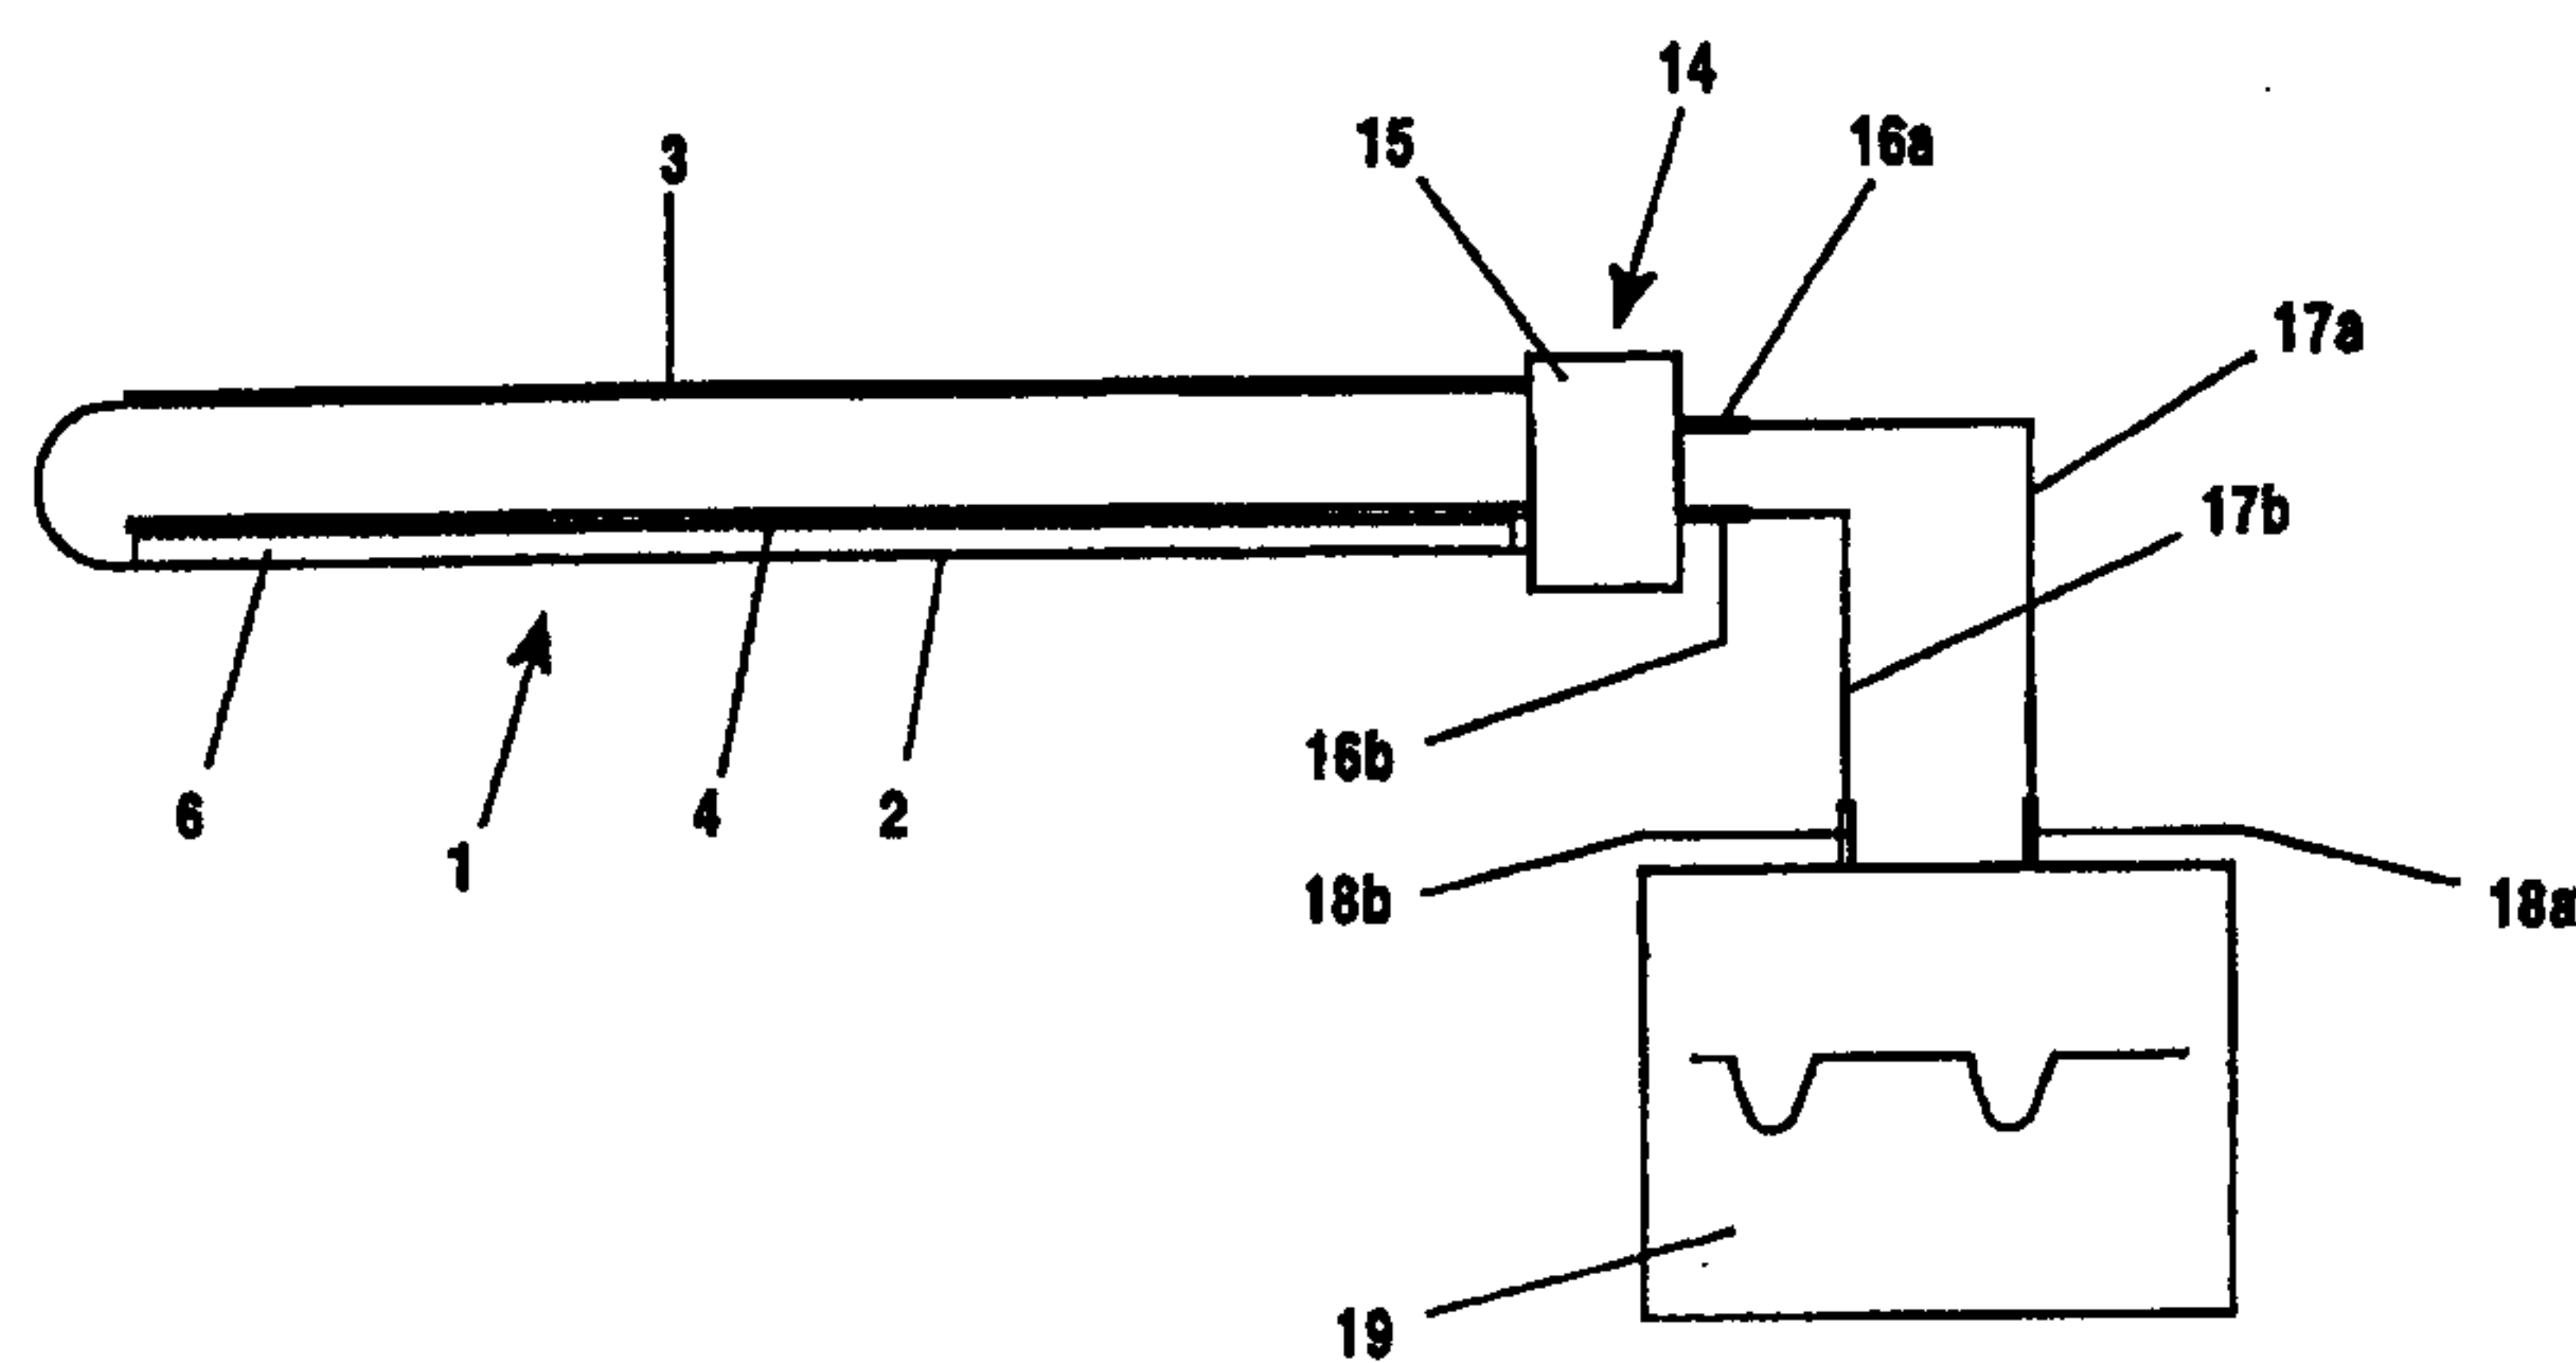

(57) Abstract

The invention relates to a discharge lamp (1) with a tubular discharge vessel (2) filled with an inert gas, and optionally provided with a layer of a luminescent substance. The discharge lamp comprises at least three elongated electrodes (3, 4, 5) arranged parallel to the longitudinal axis of the tubular discharge vessel (2). The electrodes are arranged in such a way that the ratio $s/a \geq 0.1$ is satisfied, whereby s defines the maximal distance of the imaginary line connecting an electrode pair from the nearest adjacent wall of the discharge vessel, and a defines the distance between the electrodes of this electrode pair. As a result, a higher luminance is obtained. The lamp is especially provided for a pulsed, dielectrically impeded discharge.

27813-73

-1-

Discharge lamp having dielectrically impeded electrodes**Technical field**

The invention proceeds from a discharge lamp having an at least partially transparent, closed tubular
5 discharge vessel filled with a gas filling, and having a number of elongated electrodes which are arranged parallel to the longitudinal axis of the tubular discharge vessel and on the external wall of this discharge vessel. The invention also relates to an illuminating system having a
10 fluorescent lamp and an electric pulsed voltage source which is suitable for delivering active-power pulses separated from one another by pauses during operation and having this discharge lamp.

The invention relates to a discharge lamp, in
15 particular also to a fluorescent lamp, in which all electrodes are arranged on the external wall of the discharge vessel. The external wall serves in this case, inter alia, as a dielectric layer which separates the electrodes from the discharge during operation of the lamp.
20 This type of discharge is therefore also termed a bilaterally dielectrically impeded discharge.

The spectrum of the electromagnetic radiation emitted by this lamp can in this case comprise both the visible region and the UV (ultraviolet)/VUV (vacuum
25 ultraviolet) region and the IR (infrared) region. Furthermore, a fluorescent layer can also be provided for

27813-73

-1a-

converting invisible radiation into visible radiation.

Furthermore, the invention relates to a discharge lamp having a tubular discharge vessel sealed at both ends. The cross section of the discharge vessel is preferably
5 circular. However, even only approximately circular cross sections, for example regular polygons such as, for example, hexagons, etc are also suitable. The term "tubular" is not restricted here to straight tubular discharge vessels, but likewise comprises bent, for example angled, tubular
10 discharge vessels. Since the discharge direction runs essentially perpendicular to

- 2 -

the lamp longitudinal axis, the length of the lamp is also not limited in principle.

Such lamps are used, in particular, in equipment for office automation (OA), for example colour copiers and colour scanners, for signal lighting, for example as brake lights and direction indicator lights in automobiles, for auxiliary lighting, for example interior illumination of automobiles, and for background lighting of displays, for example liquid crystal displays, and so-called "edge-type backlights".

These technical fields require both particularly short start-up phases, but also luminous fluxes which are as independent as possible of temperature. Consequently, these lamps contain no mercury. Rather, these lamps are usually filled with inert gas, preferably xenon, or inert gas mixtures.

The said applications require both a high luminous density and a luminous density which is uniform over the length of the lamp. To increase the luminous density, lamps for OA use are normally provided with an aperture along the longitudinal axis. Increasing the power injected into previous systems does not suffice to raise the luminous density further, since the loading of a lamp cannot be raised at will for lasting and reliable operation. A further difficulty is, that with the systems used so far in copiers and scanners, the efficiency of the discharge decreases with increasing injected power.

Prior art

Specification US 5,117,160 has already disclosed an inert gas discharge lamp for OA equipment. There are two strip-shaped electrodes arranged along the lamp longitudinal axis on the outer surface of the wall of a tubular discharge vessel. The lamp is operated with AC

27813-73

-3-

voltage at a preferred frequency of between 20 kHz and 100 kHz. During operation, the 147 nm xenon line is excited. The efficiency of the useful radiation which can be achieved with the employed mode of operation, and consequently the
5 resulting luminous density are relatively low.

It is known, furthermore, from US-A 5,604,410 that the efficiency of dielectrically impeded discharges can be raised substantially compared with the dielectrically impeded discharges excited with AC voltage (see US-A
10 5,117,160) with the aid of a pulsed operation (pulsed, dielectrically impeded discharge) adapted to the particular conditions (striking distance, electrode configuration, electrode geometry, filling gas and filling pressure).

Description of the invention

15 In accordance with one aspect of the present invention, there is provided a discharge lamp comprising an at least partially transparent, closed tubular discharge vessel having an external wall, said tubular discharge vessel being filled with a gas filling, and three or more
20 elongated electrodes which are arranged parallel to the longitudinal axis of the tubular discharge vessel and on the external wall of said tubular discharge vessel, wherein the following relationship is satisfied: $\frac{s}{a} \geq 0.1$, wherein s is the maximum spacing between an imaginary connecting line of a
25 pair of electrodes and the most closely neighboring point of said external wall of the tubular discharge vessel, and a is the mutual spacing between the electrodes of said pair of electrodes.

In accordance with a second aspect of the present
30 invention, there is provided an illuminating system comprising a discharge lamp described herein which is a

27813-73

-4-

fluorescent lamp and an electric pulsed voltage source which delivers active-power pulses separated from one another by pauses during operation, the electric pulsed voltage source being connected in an electrically conducting fashion to two
5 external supply leads of the fluorescent lamp.

It is an object of embodiments of the present invention to eliminate the said disadvantages and provide a discharge lamp having an at least partially transparent, closed tubular discharge vessel filled with a gas filling,
10 and having a number of elongated electrodes which are arranged parallel to the longitudinal axis of the tubular discharge vessel and on the external wall of this discharge vessel, in particular also a fluorescent lamp, with an improved luminous density.

15 This object is achieved by means of: the number of electrodes being three or more, and the following relationship being satisfied: $\frac{s}{a} \geq 0.1$, s defining the maximum spacing between the imaginary connecting line of an electrode pair and the most closely neighbouring wall of the
20 discharge vessel, and a defining the mutual spacing between the electrodes of this electrode pair.

The term "electrode pair" is firstly introduced for the purpose of better comprehension of what follows. It is understood here as two elongated, mutually parallel
25 electrodes having different polarities during operation, between which a "discharge plane" burns during operation. In the case of the preferred pulse-type injection of active power in accordance with US-A 5,604,410, the discharge plane comprises a flat discharge structure which consists of a
30 multiplicity of individual discharges.

27813-73

-4a-

According to an embodiment of the invention, the discharge lamp has three or more elongated electrodes which are arranged on the external wall of the tubular discharge vessel of the lamp and parallel to the longitudinal axis of the tubular discharge vessel in such a way that the following relationship is satisfied:

$$\frac{s}{a} \geq 0.1,$$

10

s defining the maximum spacing between the imaginary connecting line of an electrode pair and the most closely neighbouring wall of the discharge vessel, and a defining the mutual spacing between the electrodes of this electrode pair (measured centrally starting from the electrodes). Reference is also made in this connection to Figure 6 which shows diagrammatically on the example of a discharge lamp 1 and three electrodes 3-5 the maximum spacing s between the imaginary connecting line 20 of an electrode pair 3, 4 or 3,5 and the most closely neighbouring wall of the discharge vessel 2.

Thus, during operation at least two discharge planes are generated which extend between corresponding electrode pairs and along the longitudinal axis of the discharge vessel. A multiplicity of individual discharges are lined up in this plane next to one another along the electrodes and merge in the limiting case into a type of form of discharge resembling a curtain.

In this case, the discharge planes can also have a common electrode, for example in the case of three electrodes, in which two electrodes of the same polarity have only one common counter electrode of opposite polarity. In other words, in this case two electrode pairs share a common electrode. In the case

- 5 -

of unipolar voltage pulses, this is preferably the cathode, the two other electrodes being connected as anodes. Further discharge planes can be generated inside the discharge vessel in order to increase the luminous density of the lamp still further.

In the case of three electrodes, these are preferably - seen in cross section - arranged at least approximately at the corner points of an imaginary isosceles or equilateral triangle. The latter case has the advantage that the lamp can be produced fairly simply, since the lamp need in each case be rotated only by 120° in order to mount the second and third electrodes. Moreover, it may be shown with the aid of simple geometrical considerations that in this case the quotient s/a always assumes the value $1/(2\sqrt{3}) \approx 0.29$, independently of the lamp diameter, and consequently satisfies the relationship named previously. By contrast, the arrangement in the form of an isosceles triangle has the advantage that it is possible thereby to realize larger striking distances (and thus higher injected electric powers, see further below) for the two discharge planes, if the angle formed by the two discharge planes is selected to be less than 120° .

With four electrodes, it is possible either to realize two independent discharge planes, or else three discharge planes with a common electrode, depending on whether in the case of unipolar excitation the four electrodes are connected as two cathodes and two anodes, or as one cathode and three anodes (or one anode and three cathodes).

In principle, it is also possible for more than three discharge planes to be generated in this way. However, it basically depends on the diameter of the discharge tube whether it is possible at all in the case of three and more discharge planes for there still to be an electrode arrangement which satisfies the above-named

- 6 -

relationship.

5 A higher efficiency of useful radiation is achieved with the aid of the teaching according to the invention. This is to be ascribed, inter alia, to the higher electric power injected with the aid of a plurality of discharge planes in simultaneous conjunction with an optimized striking distance of discharges and low wall losses.

10

To be precise, it has emerged that it is certainly initially possible to inject a higher electric power into the lamp by means of more than two electrodes. However, the efficiency with which the useful radiation
15 is generated can decrease again with an increasing number of electrodes. According to the present state of knowledge, this is blamed, inter alia, on increasing wall losses when, to be specific, the discharges which are generated by an electrode pair run too close to the
20 inner wall of the discharge vessel, or there is even a surface creeping discharge. It is also advantageous to aim for as large a striking distance as possible, because the starting or operating voltage rises thereby, with the result that a higher electric power
25 can be injected. For this reason, the number of electrodes and their polarity and positioning are to be selected as a function of the diameter of the discharge vessel such that the above-named relationship is satisfied. In principle, when there is an even number
30 of electrodes it is suitable to operate both with unipolar and with bipolar voltage pulses for injecting active power in accordance with US-A 5,604,410. In the case of an odd number of electrodes, operation with unipolar voltage pulses is preferred.

35

It has also emerged that the electrode arrangement according to the invention permits a relatively high filling pressure of the active discharge gas, typically 150 torrs (approximately 20 kPa) and more, without the

- 7 -

formation of discharge instabilities, for example discharge arcs, which detract from efficient generation of useful radiation. The higher filling pressure of the active discharge gas - which is to be understood as the gas component which generates the radiation - likewise contributes to a higher efficiency of useful radiation. An inert gas, in particular xenon, or an inert gas mixture, for example xenon and krypton, is suitable as active gas filling inside the discharge vessel. In addition, it is also possible to add to the active discharge gas a buffer gas which does not participate directly in the generation of radiation, for example neon. Excimers, for example Xe_2^* -excimers, are generated in the discharge as particles emitting electromagnetic radiation.

Each external wall electrode is constructed as an electrically conductive, elongated, preferably "line-like" strip - which can, however, also have a substructure - and is orientated parallel to the longitudinal axis of the tubular discharge vessel. The width of a strip is typically approximately 1 mm and less. On the one hand, in this way the shading by three and more electrodes is kept low even in the case of lamps of small diameter. On the other hand, it has emerged that a higher efficiency is thereby achieved for the generation of useful radiation.

Moreover, at least part of the inner wall can have a fluorescent layer. In addition, one or more reflective layers for visible light made, for example, of Al_2O_3 and/or TiO_2 , can be applied below the fluorescent layer. If appropriate, a portion of the light emitted by the fluorescent layer is thus prevented from being transmitted through the vessel wall. Rather, the light is essentially directed onto the aperture by reflection or multiple reflection, and the luminous density is consequently increased there. As an alternative, the fluorescent layer can also itself be co-used

- 8 -

additionally as reflective layer by applying the fluorescent layer with an adequate thickness. In both cases, only a strip-shaped aperture remains uncoated or is coated only with a relatively thin fluorescent layer. As a result, the aperture has an increased luminous density during operation.

It can be advantageous for reasons of shock protection to sheath the lamp with a transparent electric insulation, for example with a transparent plastic shrink-fit sleeving, protective varnish or the like.

Description of the drawings

The invention is to be explained in more detail below with the aid of a plurality of exemplary embodiments. In the drawing:

Fig. 1 shows a cross section through a fluorescent lamp according to the invention, having an aperture and having three external wall electrodes,

Fig. 2 shows a cross section through a fluorescent lamp according to the invention, having an aperture and having four external wall electrodes,

Fig. 3 is similar to Figure 2 but has an altered arrangement of the electrodes and the distribution of polarity,

Fig. 4 shows an illuminating system having the aperture fluorescent lamp of Figure 1 and a pulsed voltage source,

Fig. 5 shows a qualitative comparison of two measuring curves of the lamp from Figure 1, having a lamp with only two external wall electrodes, and

- 9 -

Fig. 6 shows a schematic sketch for explaining the maximum spacing s between the imaginary connecting line of an electrode pair and the most closely neighbouring wall of the discharge vessel.

Figure 1 shows a cross section of an aperture fluorescent lamp 1 for OA applications in a very diagrammatic representation. In this case, the thicknesses of the wall, the reflective layer and the fluorescent material as well as the width of the electrode strips are all, in particular, depicted greatly enlarged for reasons of representation. The lamp 1 essentially comprises a tubular discharge vessel 2 with a circular cross section, and a first, a second and a third strip-shaped electrode 3-5. Excepting a rectangular aperture 6, the inner wall of the discharge vessel 2 has a reflective layer 7. A fluorescent layer 8 is applied to this reflective layer 7 and to the inner wall in the region of the aperture 6. The discharge vessel 2 is sealed in a gas-tight fashion (not represented) at two ends in the shape of a dome. Xenon at a filling pressure of 160 torrs (approximately 21.33 kPa) is located inside the discharge vessel 2.

The three electrodes 3-5 are constructed as metal foil strips. The first electrode is provided as a cathode 3, the two others as anodes 4 and 5 (unipolar operation). Seen in cross section, the electrodes 3-5 are arranged at the corner points of an imaginary isosceles triangle on the external wall of the discharge vessel 2. Consequently, during pulsed operation in accordance with US-A 5,604,410 two planes are formed which have dielectrically impeded individual discharges (not represented). A first discharge plane extends inside the discharge vessel 2 between the cathode strip 3 and the first anode strip 4. The other discharge plane extends correspondingly between the cathode strip 3 and

- 10 -

the second anode strip 5.

The respective width of the anode strips 4, 5 is 0.9 mm. The width of the cathode strip 3 is 0.8 mm. The outside diameter of the tubular discharge vessel 2 consisting of glass is approximately 9 mm in conjunction with a wall thickness of approximately 0.5 mm. The width and the length of the aperture 6 are approximately 6.5 mm and 255 mm, respectively. The fluorescent layer 7 is a three-band fluorescent material. It consists of a mixture of the blue component $\text{BaMgAl}_{10}\text{O}_{17}:\text{Eu}$, the green component $\text{LaPO}_4:\text{Ce},\text{Tb}$ and the red component $(\text{Y},\text{Gd})\text{BO}_3:\text{Eu}$. The resulting colour coordinates are $x = 0.395$ and $y = 0.383$, that is to say white light is generated.

The lamp in Figure 2 - similar features being designated by the same reference numerals as in Figure 1 - has four external wall electrodes 9-12. Of these, two electrodes are provided as cathodes 9, 10 and the remaining two electrodes are provided as anodes 11, 12. The two electrode pairs 9, 12 and 10, 11, respectively, are arranged in such a way on the external wall that the two discharge planes (not represented) burning during operation between one electrode pair in each case are orientated parallel to one another. It is true that the somewhat lesser striking distance by comparison with Figure 1 is disadvantageous. However, this electrically symmetrical arrangement is well-suited for bipolar operation. The aperture 6 is arranged centrally between an electrode pair in such a way that over wide regions of the aperture 6, the surface normal is orientated in a quasi-perpendicular fashion relative to the two discharge planes.

The lamp of Figure 2 is provided for automobile illumination, specifically as a brake light or direction indicator light, for example, depending on the fluorescent material used in each case.

- 11 -

The lamp in Figure 3 differs from that in Figure 1 by a further electrode 13, which is arranged between the two anodes and is likewise provided as an anode. In the preferably unipolar pulsed operation, a total of three discharge planes are therefore formed, specifically in each case between the first cathode 3 and one each of the three anodes 4, 13 and 5. The internal wall of the discharge vessel 2 has a fluorescent layer 6. A reflective layer and an aperture are dispensed with here.

Figure 4 shows an illuminating system for OA devices. The aperture fluorescent lamp 1 of Figure 1 additionally has a cap 14 at its second end. The cap 14 essentially comprises a cap part 15 and two connecting pins 16a, 16b. The cap part 15 serves primarily to hold the lamp 1. Moreover, in the interior of the cap part 15 the external wall cathode 3 and the anodes 4 and 5 (which are covered by the discharge vessel 2 and are therefore not to be seen) are connected (not represented) to the two connecting pins 16a and 16b, respectively. The connecting pins 16a, 16b are connected for their part by electric lines 17a, 17b to the two poles 18a and 18b, respectively, of a pulsed voltage source 19.

The pulsed voltage source 19 delivers a sequence of unipolar voltage pulses with pulse levels of approximately 3 kV and with a repetition frequency of 80 kHz. The pulse duration is respectively approximately 1.1 μ s. In the case of a lamp length of 300 mm, up to approximately 20 W of electric power can be efficiently injected. When a pure green fluorescent material ($\text{LaPO}_4\text{:Ce,Tb}$) is used, a luminous density of approximately 45000 cd/m^2 is achieved in conjunction with a power consumption of 10 W.

Since a discharge dielectrically impeded at both ends

- 12 -

is involved here, it is not only operation with unipolar voltage pulses which is possible, but also likewise operation with bipolar voltage pulses.

5 In Figure 5, the luminous density L [cd/m²] measured through the aperture is represented in W in arbitrary units as a function of the time-averaged electric power P . The curve 20 relates to an illuminating system in accordance with Figure 4 having the operating
10 parameters specified there and three external wall electrodes. The curve 21 relates to a comparable lamp having only two electrodes. It may be gathered in qualitative terms from the figure that the lamp according to the invention and having three electrodes
15 achieves in the case of electric powers of more than 10 W a substantially higher luminous density than the conventional lamp. Moreover, the curve 20 also still rises in the case of an electric power of 20 W, whereas the curve 21 already flattens out slightly, that is to
20 say exhibits a saturation response.

The invention is not limited to the exemplary embodiments specified. In particular, it also includes combinations of features of different exemplary
25 embodiments.

27813-73

-13-

CLAIMS:

1. A discharge lamp comprising

an at least partially transparent, closed tubular discharge
vessel having an external wall, said tubular discharge
5 vessel being filled with a gas filling, and

three or more elongated electrodes which are arranged
parallel to the longitudinal axis of the tubular discharge
vessel and on the external wall of said tubular discharge
vessel, wherein the following relationship is satisfied:

10
$$\frac{s}{a} \geq 0.1$$

wherein s is the maximum spacing between an imaginary
connecting line of a pair of electrodes and the most closely
neighboring point of said external wall of the tubular
discharge vessel, and

15 a is the mutual spacing between the electrodes of said pair
of electrodes.

2. The discharge lamp according to claim 1, wherein

$$\frac{s}{a} \geq 0.2$$

20 3. The discharge lamp according to claim 1 or 2,
wherein the number of the electrodes of one polarity differs
from the number of the electrodes of the other polarity.

4. The discharge lamp according to claim 3, wherein
the number of electrodes is three.

27813-73

-14-

5. The discharge lamp according to claim 4, wherein the electrodes are arranged, when seen in cross section, at least approximately at the corner points of an imaginary equilateral triangle.

5 6. The discharge lamp according to claim 4, wherein the electrodes are arranged, when seen in cross section, at least approximately at the corner points of an imaginary isosceles triangle.

7. The discharge lamp according to any one of
10 claims 1 to 6, wherein the lamp is a fluorescent lamp and the gas filling comprises an inert gas or an inert gas mixture.

8. The discharge lamp according to claim 7, wherein the gas filling is at a pressure of more than 13 kPa.

15 9. The discharge lamp according to claim 7 or 8, wherein the gas filling contains xenon.

10. The discharge lamp according to any one of claims 1 to 9, wherein the width of the electrodes is 1 mm or less.

20 11. The discharge lamp according to claim 1, wherein the tubular discharge vessel has on at least part of said external wall a layer of fluorescent material or a mixture of fluorescent materials.

12. A discharge lamp according to claim 11, wherein
25 the discharge lamp is a fluorescent lamp and the external wall of the tubular discharge vessel is covered by the reflective layer, except for an aperture therethrough.

13. A discharge lamp according to claim 1, wherein the discharge lamp is a fluorescent lamp and the tubular

27813-73

-15-

discharge vessel has a circular cross section with an inside diameter of less than 20 mm.

14. An illuminating system comprising

a discharge lamp according to claim 1 which is a fluorescent
5 lamp and

an electric pulsed voltage source which delivers active-
power pulses separated from one another by pauses during
operation, the electric pulsed voltage source being
connected in an electrically conducting fashion to two
10 external supply leads of the fluorescent lamp.

15. The illuminating system according to claim 14,
wherein the system is characterized by the following
operation parameters:

a repetition frequency of the active-power pulses greater
15 than or equal to 20 kHz, and

a pulse duration of the active-power pulses of less than
2 μ s.

16. The discharge lamp according to claim 1, wherein



$$\frac{s}{a}$$

20 is greater than 0.25.

17. The discharge lamp according to claim 13, wherein
the tubular discharge vessel has an inside diameter of less
than 15 mm.

18. The discharge lamp according to claim 1, wherein
25 the tubular discharge vessel has on at least part of said
external wall a layer of fluorescent material or a mixture
of fluorescent materials and a reflective layer.

1/5

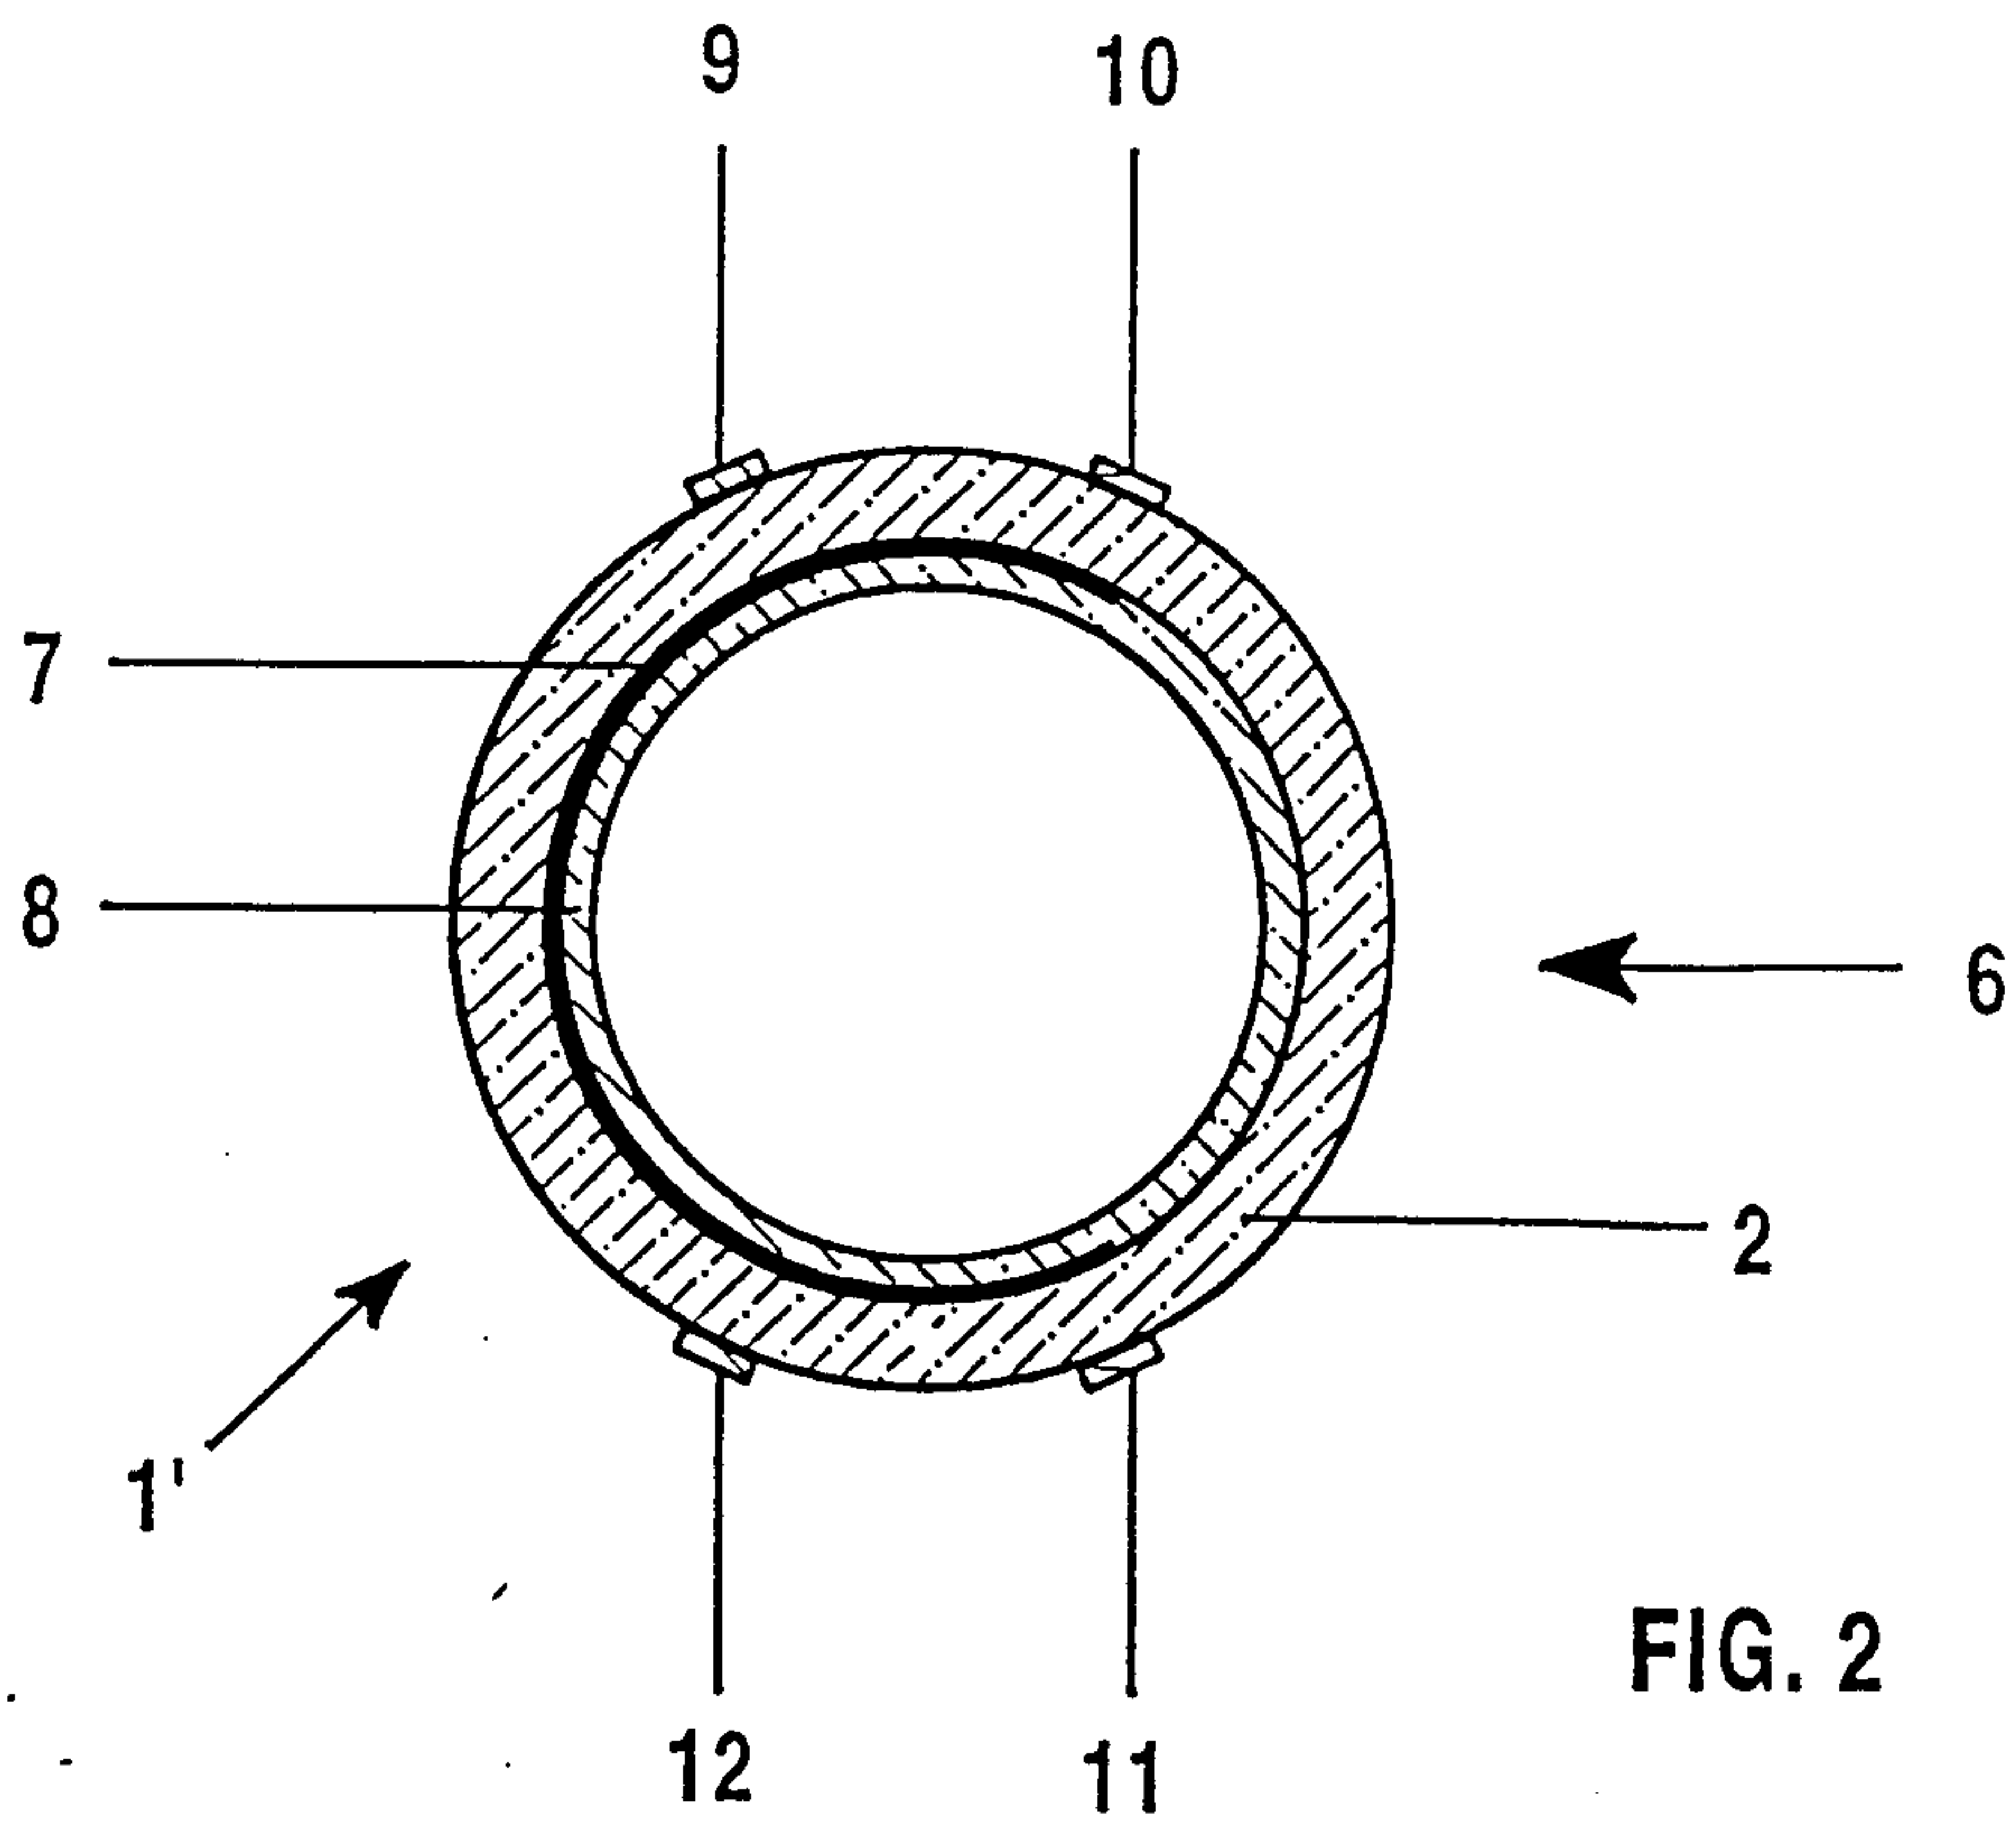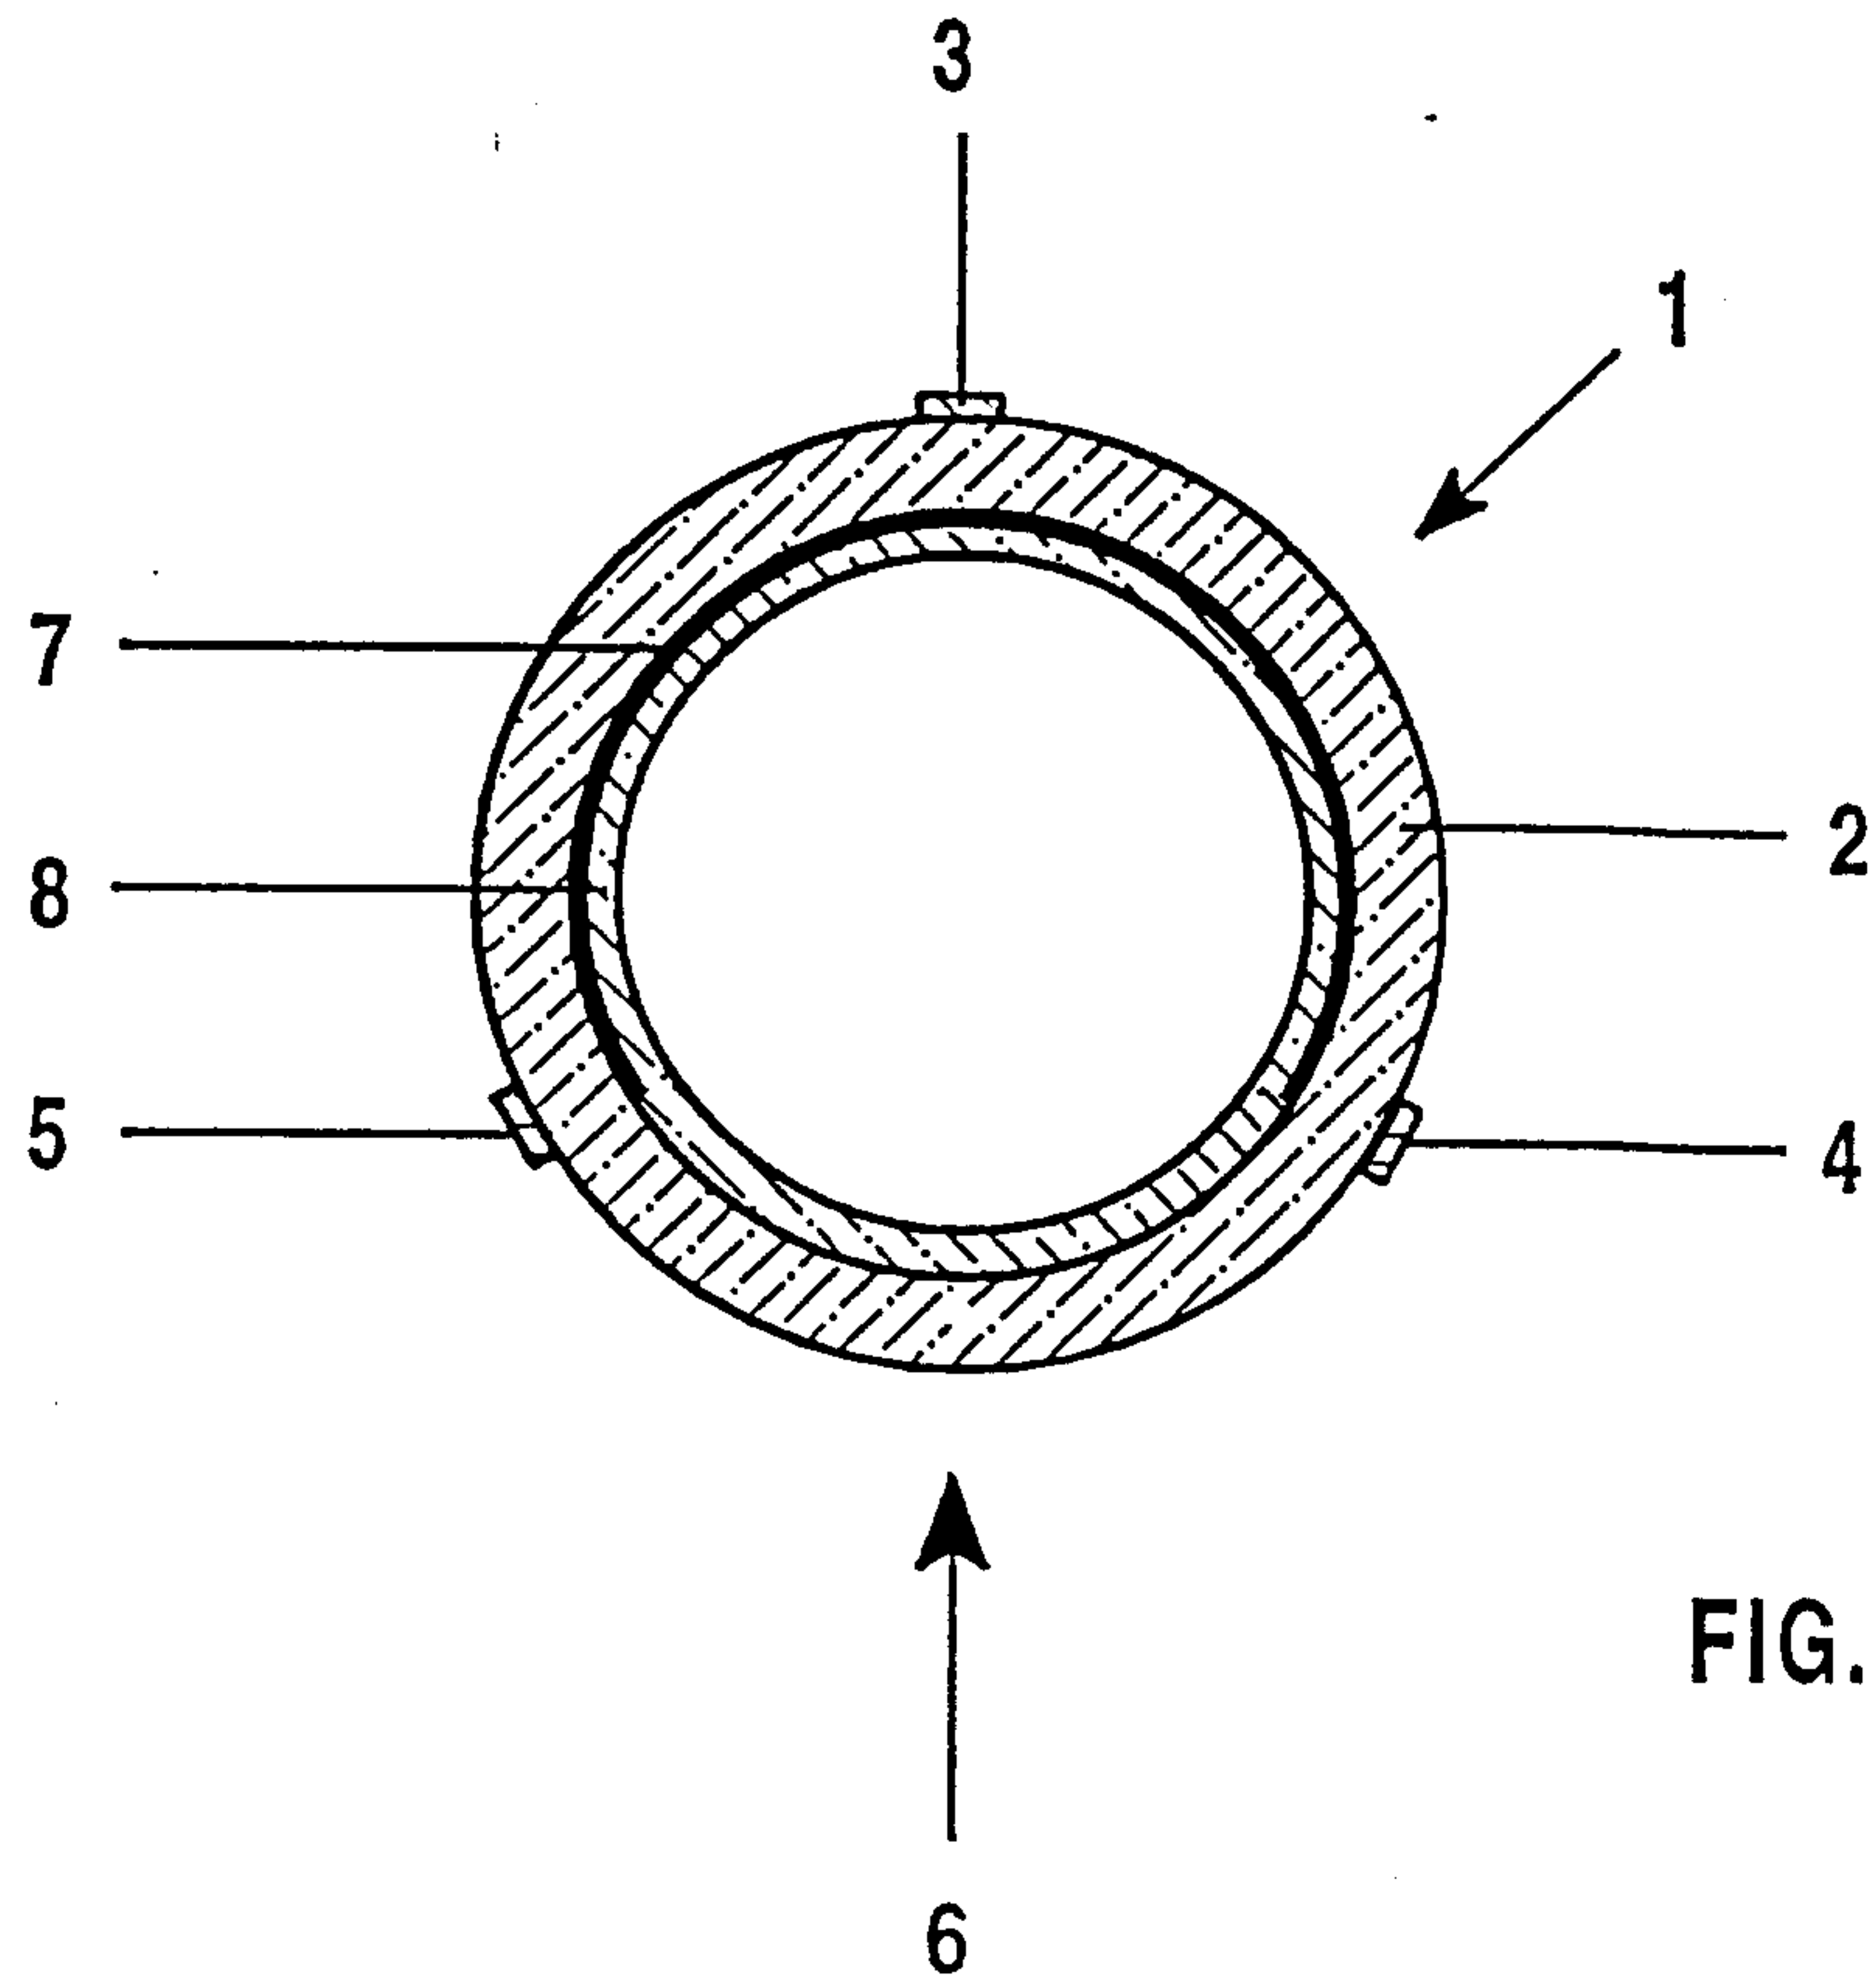

2/5


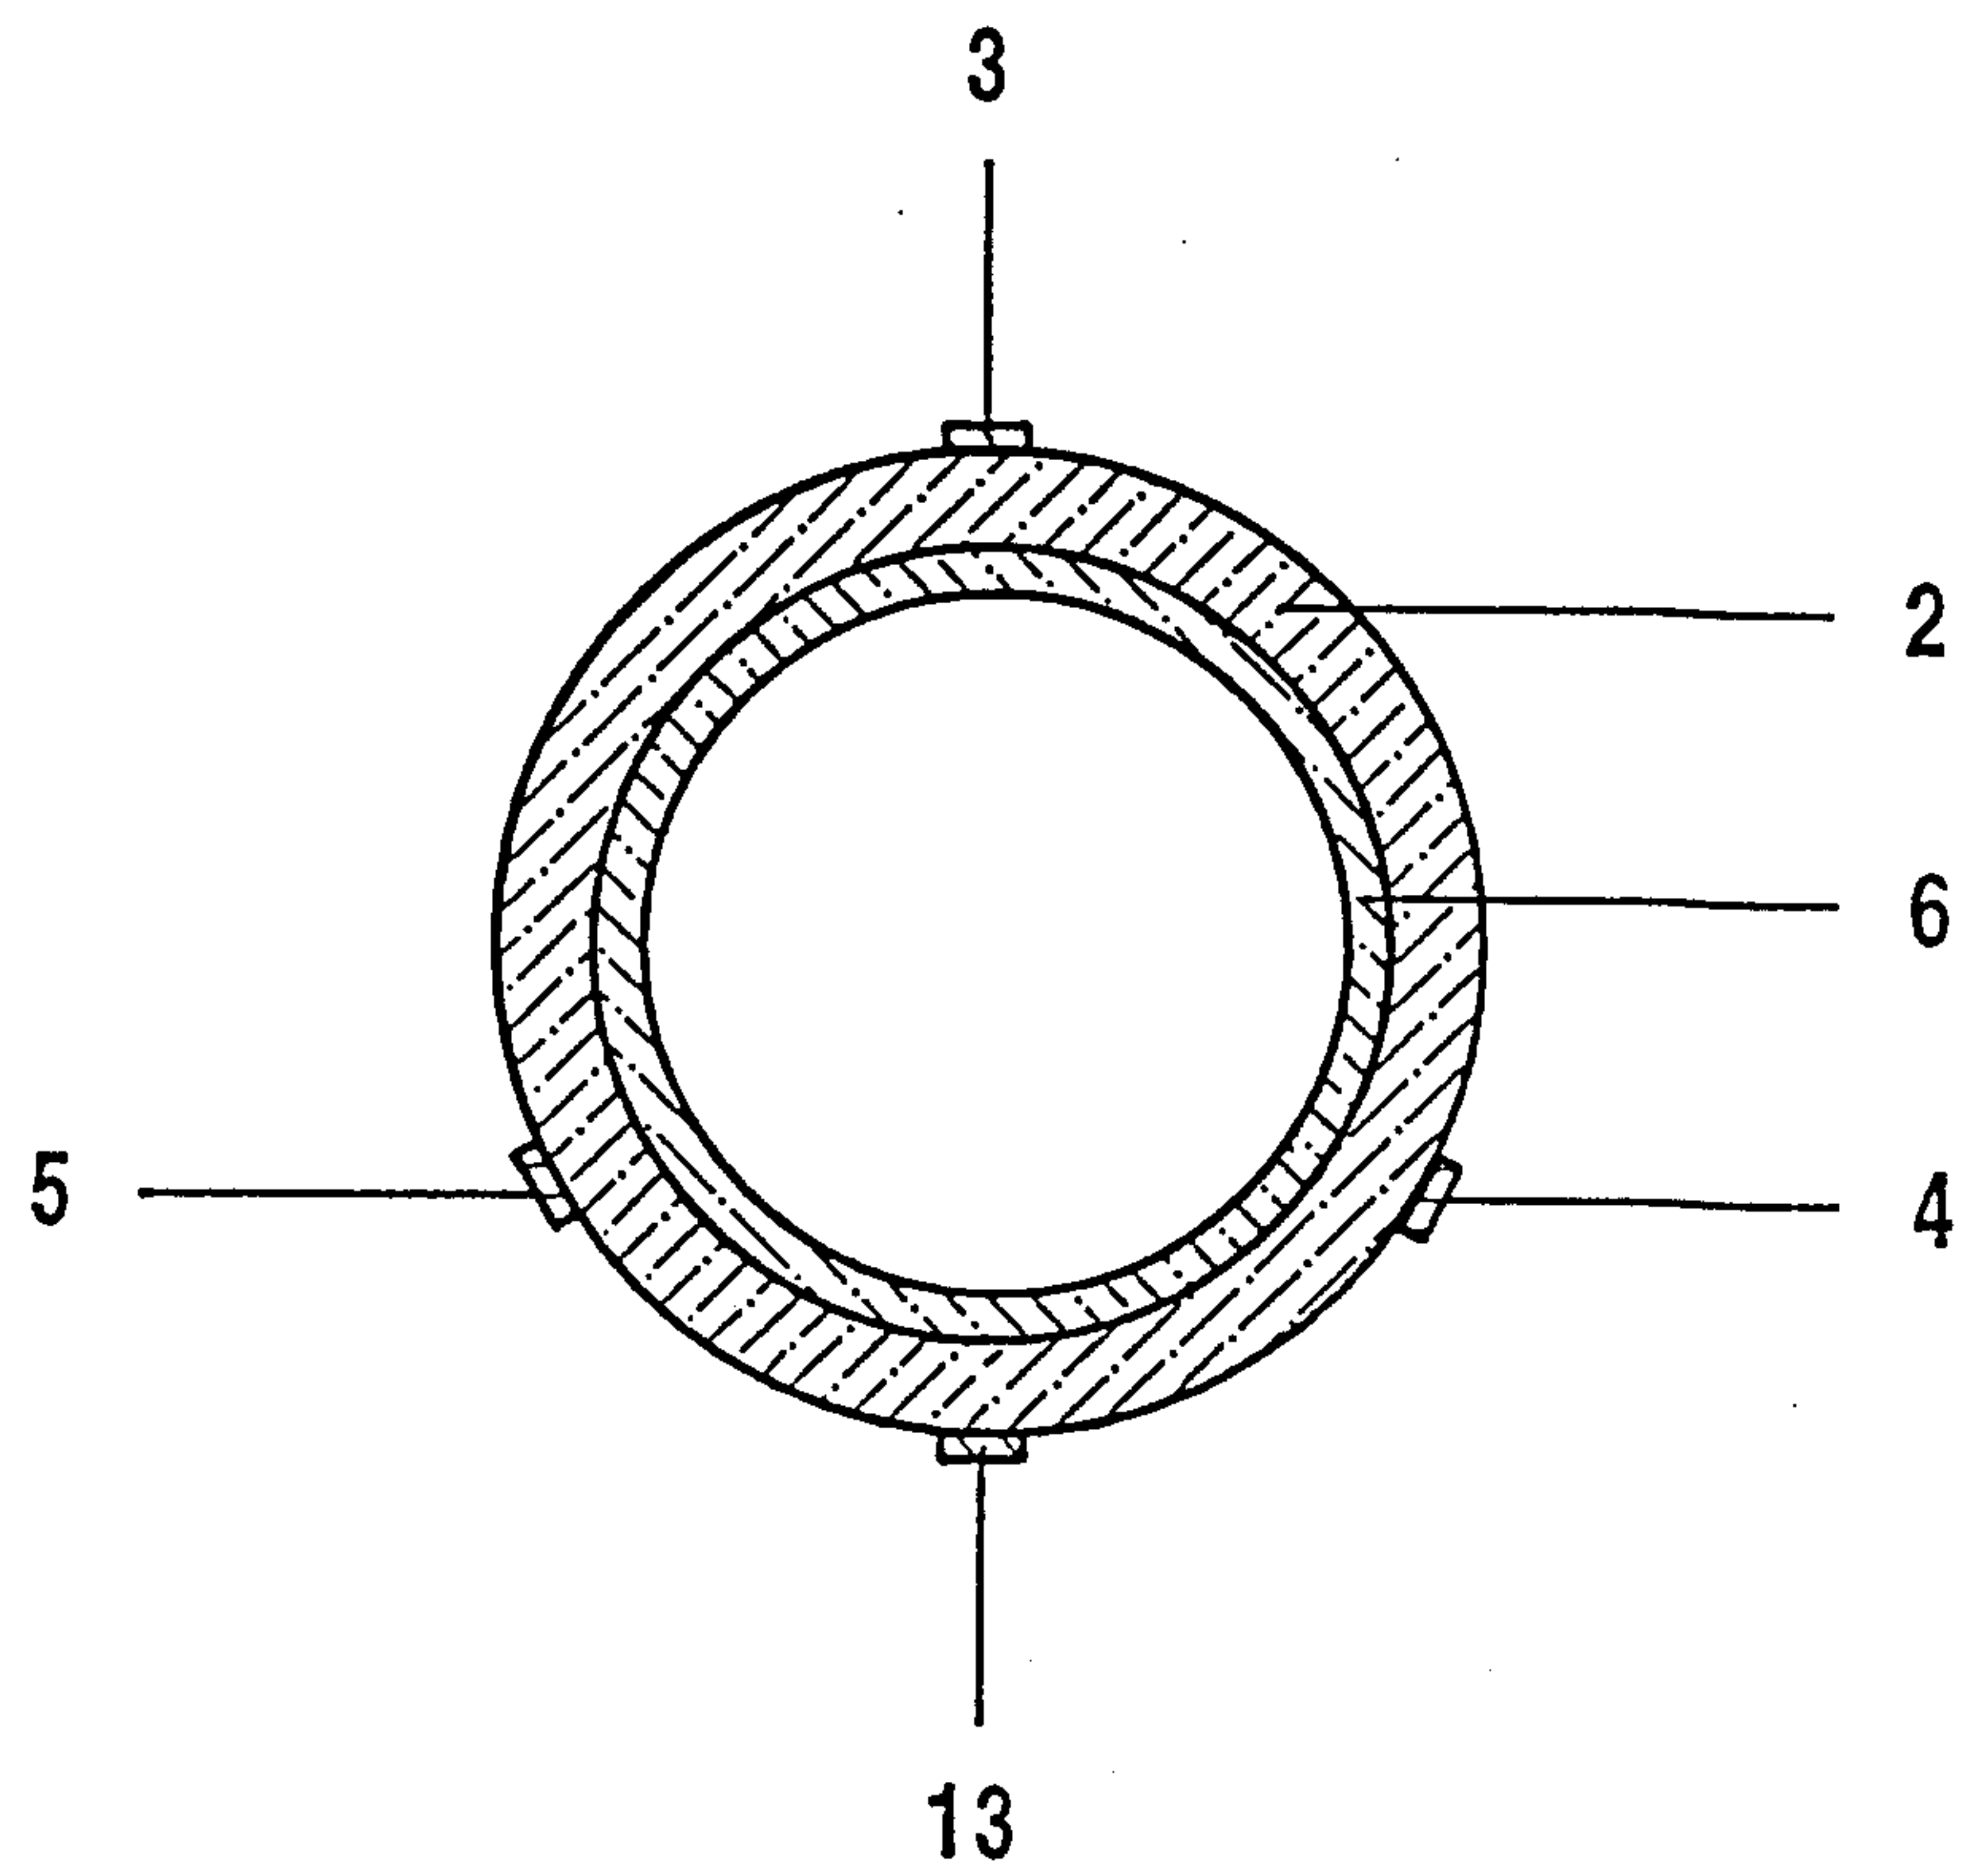


FIG. 3

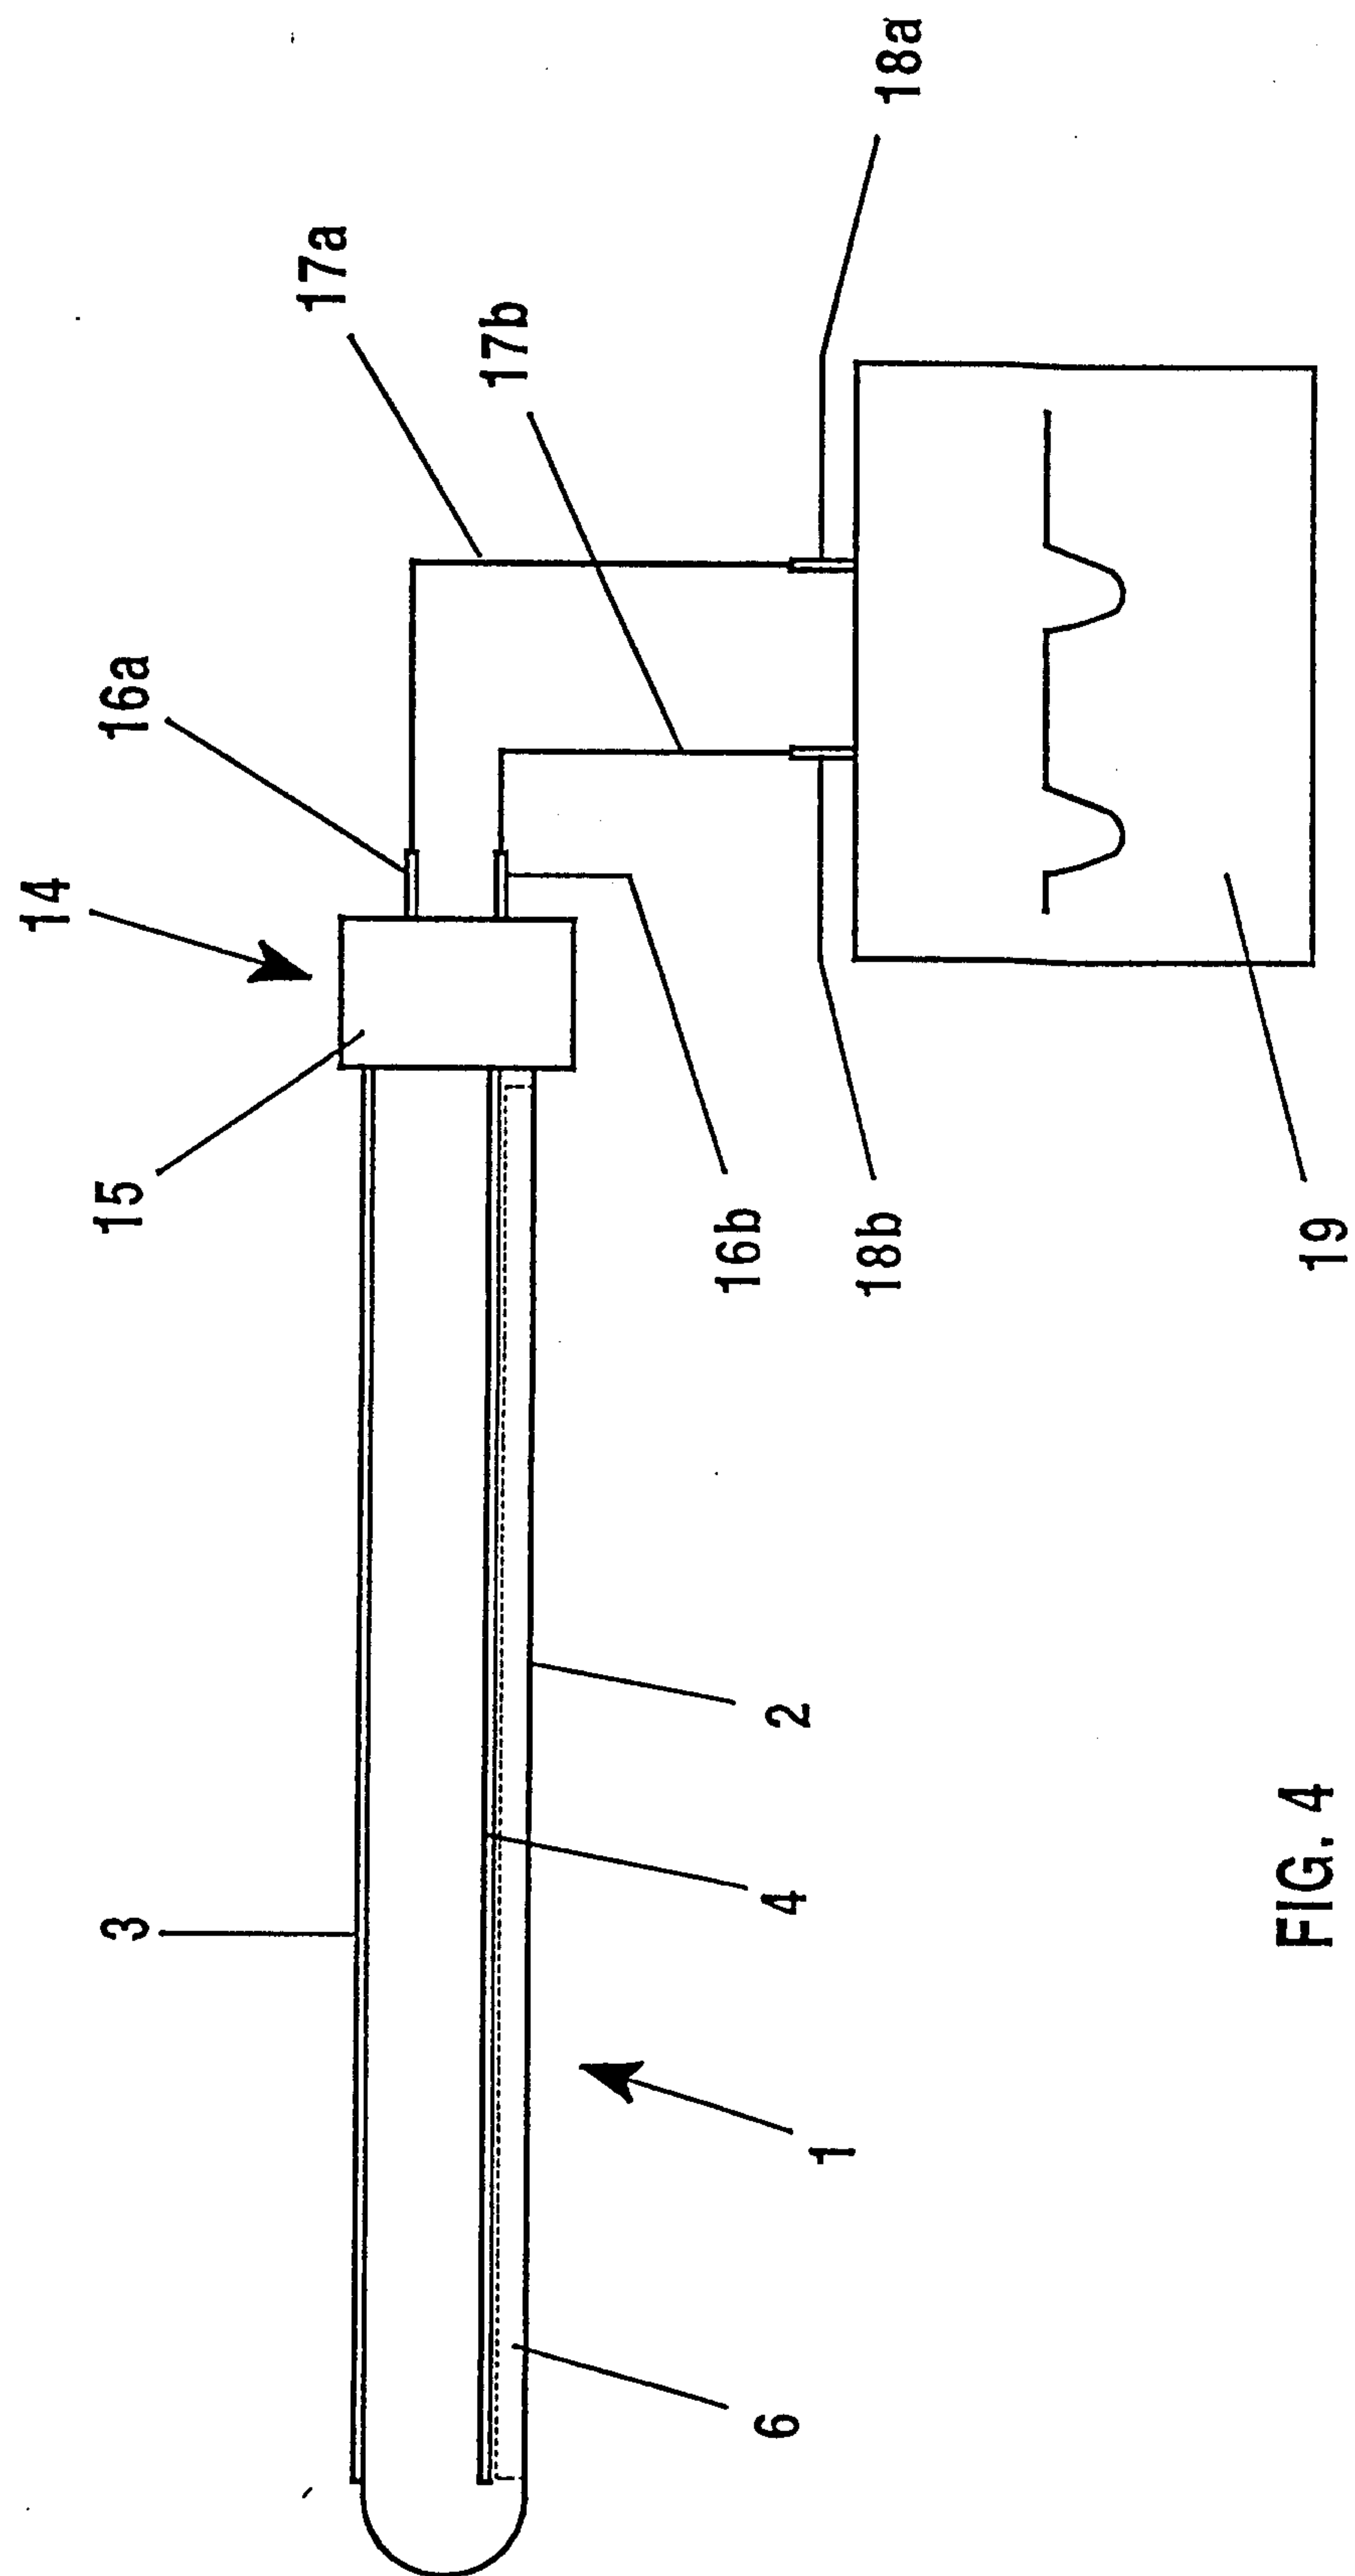

4/5

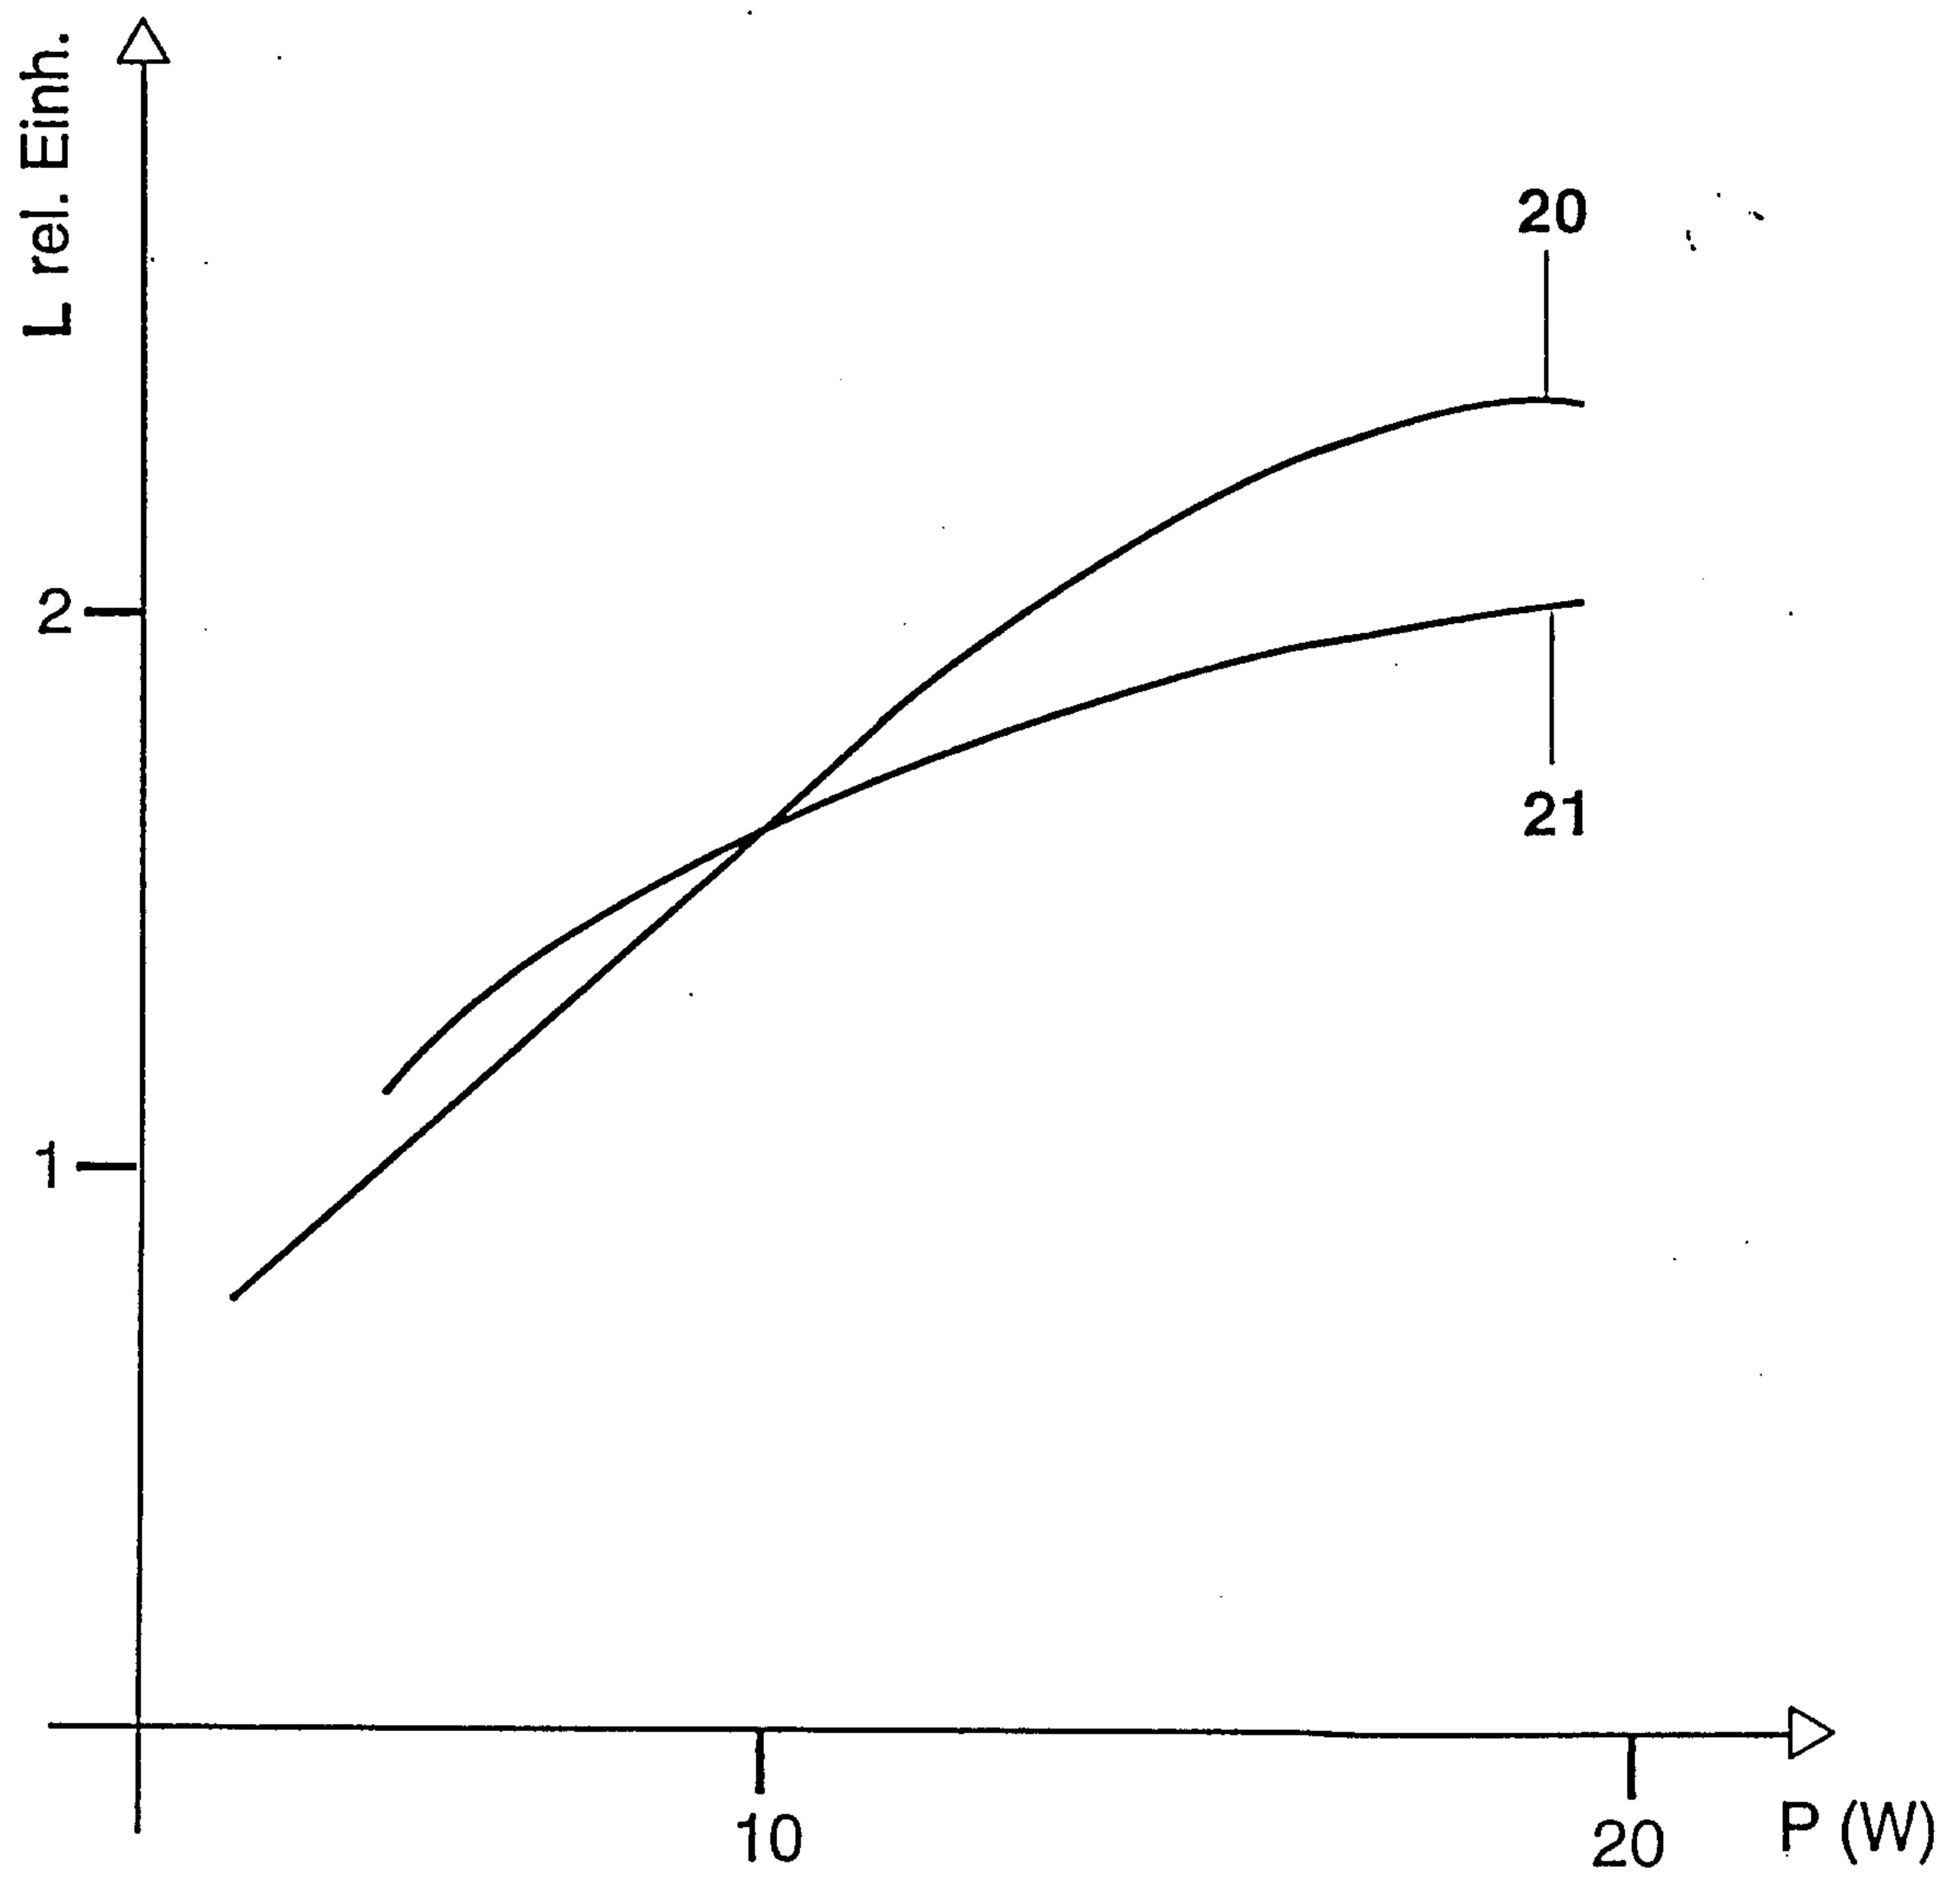


FIG. 5

