

(19)



(11)

EP 3 798 556 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

22.11.2023 Bulletin 2023/47

(51) International Patent Classification (IPC):

F25D 25/02 ^(2006.01)

(52) Cooperative Patent Classification (CPC):

F25D 25/025

(21) Application number: **20196828.6**

(22) Date of filing: **18.09.2020**

(54) **A COOLING DEVICE**

KÜHLVORRICHTUNG

DISPOSITIF DE REFROIDISSEMENT

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **26.09.2019 TR 201914652**

(43) Date of publication of application:

31.03.2021 Bulletin 2021/13

(73) Proprietor: **BSH Hausgeräte GmbH**

81739 München (DE)

(72) Inventors:

- **Aslan, Sinem
Tekirdag (TR)**
- **Dagci, Özkan
59600 TEKIRDAG (TR)**
- **Oruc, Yakup
34180 ISTANBUL (TR)**

(56) References cited:

DE-A1-102014 219 664 US-A- 4 870 836

EP 3 798 556 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The invention relates to a refrigerator having a drawer and a shelf provided at the upper vicinity of said drawer.

KNOWN STATE OF THE ART

[0002] Cooling devices are devices which keep foods without deterioration and which cool beverages and which essentially have a closed chamber and which function by means of motor. In refrigerators, there is particularly a section where vegetables and fruits are kept. In refrigerators, this section is generally a drawer which can be easily opened and closed in order for the user to easily reach vegetables and fruits.

[0003] As the technology develops, said drawers are desired to be kept at different temperatures for keeping vegetables and fruits for a long lifetime. For these cases, the drawers are cooled in an independent manner from the cooling area in the refrigerator. However, in case the drawer is cooled in an independent manner from the cooling area inside the refrigerator, air passages may occur between the two media. For these cases, the sections of the drawer where air passage may occur are covered by means of extra items. However, assembly of such covering items leads to time loss for refrigerator producers.

[0004] The application with number CN104848647 known in the literature relates to a refrigerator comprising refrigerator drawer mechanism. Said drawer is positioned at the lower vicinity of a shelf. The drawer is positioned in an easily removable manner. The shelf is configured to keep fresh the foods inside the drawer.

[0005] DE 10 2014 219 664 A1 discloses a refrigeration device includes a storage area which is delimited by a body and a door and which is subdivided by a shelf into an upper and a lower compartment. A drawer is accommodated in the lower compartment. In a stop position of the drawer in which it is pushed into the lower compartment, a front wall of the drawer bears against a front edge of the shelf. A closure element can be moved across a passage or opening in the shelf between a position which blocks the passage and a position which opens the passage over at least part of its cross section.

BRIEF DESCRIPTION OF THE INVENTION

[0006] The object of the invention is to provide a cooling device where a cover, provided between the shelf and the drawer, can be easily removed and assembled. The problem is solved by the subject matter of the independent claim. Preferred embodiments are subject of the dependent claims.

[0007] The present invention is a cooling device having at least one drawer having a front panel and pluralities of drawer walls, at least one shelf provided in the upper

vicinity of said drawer, at least one cover which at least partially encircles the drawer walls in order to at least partially close the openings which remain between said shelf and said drawer walls. For providing connection between said cover and the shelf, one of the shelf and the cover comprises at least one carrier tab, and the other one of the shelf and the cover comprises at least one opening wherein said carrier tab is at least partially placed. Thus, a structure is obtained where the cover is simply connected to the shelf.

[0008] In a probable embodiment of the invention, the shelf comprises the carrier tab. The cover comprises the opening.

[0009] In a probable embodiment of the invention, one of the shelf and at least one sidewall of the cover comprises at least one fixation tab, and the other one of the shelf and at least one sidewall of the cover comprises at least one fixation housing for housing the fixation tab. Thus, while the cover is hung to the shelf from one side, it is fixed to the shelf from the other side, and easy assembly is provided.

[0010] In a probable embodiment of the invention, the shelf comprises the fixation tab. The cover comprises the fixation housing. The fixation housing is provided on the sidewall of the cover.

[0011] According to the invention, the carrier tab and the opening are provided in the vicinity of a rear wall of the cover. Thus, a structure is obtained where the user or the assembly operator can fix the carrier tabs into the opening at the part, which is far from the user or the assembly operator.

[0012] In a probable embodiment of the invention, the fixation tab and the fixation housing are provided in the vicinity of the front panel of the drawer. Thus, a structure is obtained where the user or the assembly operator can place the fixation tabs into the fixation housings at the part, which is close to the user or the assembly operator.

[0013] In a probable embodiment of the invention, the cover is provided in U-like form in a manner providing exposure of one each end of the sidewalls. Thus, the ends of the sidewalls can bend in a manner diverging from each other, and the fixation tabs can be easily placed to the fixation housings.

[0014] According to the invention, the carrier tab is provided on an extension part, which extends from a frame of the shelf towards the side where the drawer is provided.

[0015] The opening is provided on a rear wall of the cover at a predetermined distance with respect to the edge of the rear wall facing the shelf. Thus, the carrier tab and the opening are embodied in a compliant manner to each other.

[0016] According to the invention, at least one housing is provided in the vicinity of the carrier tab in a manner receiving a hanger part defined between the opening and the edge of the rear wall of the cover facing the shelf. Thus, when the carrier tab is placed into the opening, the hanger part is seated into the housing.

[0017] In a probable embodiment of the invention, the housing comprises a housing base where the hanger part is rested into the housing when the fixation housing and the fixation tab are mutually aligned. Thus, when the hanger part is rested to the housing base during assembly, the fixation tab and the fixation housing are aligned.

BRIEF DESCRIPTION OF THE FIGURES

[0018]

Figure 1 is a representative perspective view of the subject matter cooling device.

Figure 2 is a representative perspective view of a shelf and drawer positioned in the subject matter cooling device.

Figure 3 is a representative perspective view of a shelf and drawer positioned in the subject matter cooling device.

Figure 4 is a representative perspective view of the shelf positioned in the subject matter cooling device.

Figure 5 is a representative perspective view of the housing provided on the shelf positioned in the subject matter cooling device.

Figure 6 is a representative perspective view of the cover positioned in the subject matter cooling device.

Figure 7 is a representative perspective view of the opening provided on the cover positioned in the subject matter cooling device.

Figure 8 is a representative perspective view where the cover is assembled to the shelf positioned in the subject matter cooling device.

Figure 9 is a representative perspective view where the cover is placed to the housing positioned in the subject matter cooling device.

Figure 10 is a representative perspective view of the shelf and cover in the subject matter cooling device.

Figure 11 is a perspective view where the cover is placed to the housing in the subject matter cooling device.

DETAILED DESCRIPTION OF THE INVENTION

[0019] In this detailed description, the subject matter cooling device (10) is explained with references to examples without forming any restrictive effect only in order to make the subject more understandable.

[0020] With reference to Figures. 1-3, the cooling device (10) essentially has at least one drawer (30) and at least one shelf (20) keep at different temperatures. Said drawer (30) is a storage chamber configured to have a depth by means of at least one front panel (32) and the drawer walls (31). The drawer (30) is essentially positioned at the lower vicinity of said shelf (20) and it can partially move horizontally. By means of this, the product can be put and removed from the drawer (30). In a probable embodiment of the present invention, the shelf (20) has at least one frame (21) and at least one extension

part (22) at the side of said frame (21) facing the drawer (30).

[0021] In Figures 2 and 3, at least one cover (40) is positioned between said shelf (20) and said drawer (30) for at least partially preventing airflow in between. Said cover (40) at least partially encircles the drawer walls (31) and the front panel (32) positioned at the drawer (30) and provides isolation of the cooling device (10) from the inner part thereof. In order to realize this, as shown in the Figure 6, the cover (40) has at least one rear wall (42) and at least one sidewall (41). There are two sidewalls (41), and said sidewalls (41) are connected to the rear wall (42) through one each ends thereof. Moreover, at least sidewalls (41) of the cover (40) are made of flexible material.

[0022] As shown in the Figure 4, said extension part (22) provided on the frame (21) is positioned in a manner extending along at least the sidewalls (41). As shown in the Figure 5, at least one housing (24) and at least one fixation tab (27) are positioned on the extension part (22). The housing (24) is essentially an opening positioned on the extension part (22) in order to fix the cover (40) onto the shelf (20). The housing (24) is essentially closed to the outer medium and only the part of the housing (24) facing the drawer (30) is partially opened to the outer medium. The part of the housing (24) which is opened to the outer medium is the housing inlet (26). Said housing inlet (26) provides the cover (40) to enter into the housing (24). At least one carrier tab (23) is positioned in the vicinity of the housing inlet (26). Said carrier tab (23) prevents vertical movement of the cover (40) after the cover (40) engages to the housing (24). The side of the housing (24) facing the fixation tab (27) is defined as the housing base (25). The rear wall (42) is rested to the housing base (25) and the horizontal movement of the cover (40) is delimited.

[0023] In Figure 8, a representative perspective view where the cover (40) is assembled to the shelf (20) positioned in the subject matter cooling device (10) is given. Accordingly, the cover (40) is engaged to the housing (24) from a rear wall (42) side and is rested to the extension part (22) from the sidewalls (41). The fixation tab (27), positioned at the extension part (22), is engaged to at least one fixation housing (45) positioned at the side walls (41), and thereby the cover (40) is moved together with the shelf (20).

[0024] In Figure 9, a representative perspective view where the cover (40) is placed to the housing (24) positioned in the subject matter cooling device (10) is given. Accordingly, at least one opening (43), as shown in the Figure.7, is essentially positioned on the rear wall (42) of the cover (40). At least one hanger part (44) is positioned essentially at the side of said opening (43) facing the shelf (20). While the cover (40) is assembled to the shelf (20), the fixation tab (27) passes through the opening (43) and said hanger part (44) is rested to the housing base (25).

[0025] In Figure 10, a representative perspective view

of the shelf (20) and cover (40) in the subject matter cooling device (10) is given. Accordingly, as the hanger part (44) is rested to the housing base (25), the fixation housing (45) is aligned with the fixation tab (27) and they are engaged and locked to each other.

[0026] In Figure 11, a perspective view where the cover (40) is placed to the housing (24) in the subject matter cooling device (10) is given. Accordingly, the cover (40) engages to the housing (24) and is locked at the shelf (20) by means of the fixation tab (27). The separation of the cover (40) from the shelf (20) is provided by means of bending of the sidewalls (41).

[0027] The airflow, which may occur between the drawer (30) and the shelf (20), is prevented by means of the cover (40). The cover (40) can be easily fixed to and removed from the shelf (20). By means of this, the drawer (30) is kept at different temperatures when compared with the other parts of the cooling device (10), and energy saving and high efficiency are provided.

REFERENCE NUMBERS

[0028]

10	Refrigerator
20	Shelf
21	Frame
22	Extension part
23	Carrier tab
24	Housing
25	Housing base
26	Housing inlet
27	Fixation tab
30	Drawer
31	Drawer wall
32	Front panel
40	Cover
41	Side wall
42	Rear wall
43	Opening
44	Hanger part
45	Fixation housing

Claims

1. A cooling device (10) having at least one drawer (30) having a front panel (32) and pluralities of drawer walls (31),

at least one shelf (20) provided in the upper vicinity of said drawer (30),
at least one cover (40) which at least partially encircles the drawer walls (31) in order to at least partially close the openings which remain between said shelf (20) and said drawer walls (31),

wherein for providing connection between said cover (40) and the shelf (20):

one (20, 40) of the shelf (20) and the cover (40) comprises at least one carrier tab (23), and the other one (20, 40) of the shelf (20) and the cover (40) comprises at least one opening (43) wherein said carrier tab (23) is at least partially placed,

characterized in that

the carrier tab (23) and the opening (43) are provided in the vicinity of a rear wall (42) of the cover (40), wherein

the carrier tab (23) is provided on an extension part (22) which extends from a frame (21) of the shelf (20) towards the side where the drawer (30) is provided, wherein

the opening (43) is provided on the rear wall (42) of the cover (40) at a predetermined distance with respect to the edge of the rear wall (42) facing the shelf (20), wherein

at least one housing (24) is provided in the vicinity of the carrier tab (23) in a manner receiving a hanger part (44) defined between the opening (43) and the edge of the rear wall (42) of the cover (40) facing the shelf (20).

2. The cooling device (10) according to claim 1, wherein one (20, 41) of the shelf (20) and at least one side wall (41) of the cover (40) comprises at least one fixation tab (27), and the other one (20, 41) of the shelf (20) and at least one side wall (41) of the cover (40) comprises at least one fixation housing (45) for housing the fixation tab (27).
3. The cooling device (10) according to claim 1 or claim 2, wherein the fixation tab (27) and the fixation housing (45) are provided in the vicinity of the front panel (32) of the drawer (30).
4. The cooling device (10) according to any one of the preceding claims, wherein the cover (40) is provided in U-like form in a manner providing exposure of one each end of the side walls (41).
5. The cooling device (10) according to any of claims 1 to 4, wherein the housing (24) comprises a housing base (25) where the hanger part (44) is rested into the housing (24) when the fixation housing (45) and the fixation tab (27) are mutually aligned.

Patentansprüche

1. Kühlvorrichtung (10) mit mindestens einem Einschub (30) mit einer Frontblende (32) und mehreren Einschubwänden (31),

mindestens einer Ablage (20), die oben in der Nähe des Einschubs (30) vorgesehen ist,

mindestens eine Abdeckung (40), die die Einschubwände (31) zumindest teilweise umgibt und so die Öffnungen zumindest teilweise schließt, welche zwischen der Ablage (20) und den Einschubwänden (31) verbleiben, wobei zum Bereitstellen einer Verbindung zwischen der Abdeckung (40) und der Ablage (20): die Ablage (20) oder die Abdeckung (40) mindestens eine Trägerzunge (23) und das jeweils andere Element, also die Abdeckung (40) oder die Ablage (20), mindestens eine Öffnung (43) umfasst, wobei die Trägerzunge (23) zumindest teilweise platziert ist,

dadurch gekennzeichnet, dass

die Trägerzunge (23) und die Öffnung (43) in der Nähe einer Rückwand (42) der Abdeckung (40) vorgesehen sind, wobei die Trägerzunge (23) an einem Verlängerungsteil (22) vorgesehen ist, das von einem Rahmen (21) der Ablage (20) aus zu der Seite hin verläuft, an der der Einschub (30) vorgesehen ist, wobei die Öffnung (43) in einem vorgegebenen Abstand in Bezug zu dem zur Ablage (20) weisenden Rand der Rückwand (42) an der Rückwand (42) der Abdeckung (40) vorgesehen ist, wobei in der Nähe der Trägerzunge (23) zumindest eine Aufnahme (24) so vorgesehen ist, dass sie einen Aufhängerteil (44) aufnimmt, der zwischen der Öffnung (43) und dem zur Ablage (20) weisenden Rand der Rückwand (42) der Abdeckung (40) definiert ist.

2. Kühlvorrichtung (10) nach Anspruch 1, wobei die Ablage (20) oder mindestens eine Seitenwand (41) der Abdeckung (40) mindestens eine Fixierzunge (27) und das jeweils andere Element, also mindestens eine Seitenwand (41) der Abdeckung (40) oder die Ablage (20), mindestens eine Fixieraufnahme (45) zum Aufnehmen der Fixierzunge (27) umfasst.
3. Kühlvorrichtung (10) nach Anspruch 1 oder Anspruch 2, wobei die Fixierzunge (27) und die Fixieraufnahme (45) in der Nähe der Frontblende (32) des Einschubs (30) vorgesehen sind.
4. Kühlvorrichtung (10) nach einem der vorhergehenden Ansprüche, wobei die Abdeckung (40) in U-Form so vorgesehen ist, dass dafür gesorgt ist, dass jeweils ein Ende der Seitenwände (41) freiliegt.
5. Kühlvorrichtung (10) nach einem der Ansprüche 1 bis 4, wobei die Aufnahme (24) eine Aufnahmebasis (25) umfasst, an der der Aufhängerteil (44) in der Aufnahme (24) anliegt, wenn die Fixieraufnahme (45) und die Fixierzunge (27) aufeinander ausgerichtet sind.

Revendications

1. Dispositif de refroidissement (10) ayant au moins un tiroir (30) ayant un panneau avant (32) et des pluralités de parois de tiroir (31),

au moins une tablette (20) prévue dans le voisinage supérieur dudit tiroir (30),
au moins un couvercle (40) qui entoure au moins partiellement les parois de tiroir (31) afin de fermer au moins partiellement les ouvertures qui demeurent entre ladite tablette (20) et lesdites parois de tiroir (31), **dans lequel** afin d'établir la connexion entre ledit couvercle (40) et la tablette (20) :

une (20, 40) parmi la tablette (20) et le couvercle (40) comprend au moins une patte de support (23) et l'autre (20, 40) parmi la tablette (20) et le couvercle (40) comprend au moins une ouverture (43) dans laquelle ladite patte de support (23) est au moins partiellement placée, **caractérisé en ce que**

la patte de support (23) et l'ouverture (43) sont prévues dans le voisinage d'une paroi arrière (42) du couvercle (40), dans lequel la patte de support (23) est prévue sur une pièce d'extension (22) qui s'étend d'une structure (21) de la tablette (20) en direction du côté où le tiroir (30) est prévu, dans lequel l'ouverture (43) est prévue sur la paroi arrière (42) du couvercle (40) à une distance prédéterminée par rapport au bord de la paroi arrière (42) faisant face à la tablette (20), dans lequel au moins un logement (24) est prévu dans le voisinage de la patte de support (23) d'une façon recevant une pièce de suspension (44) définie entre l'ouverture (43) et le bord de la paroi arrière (42) du couvercle (40) faisant face à la tablette (20).

2. Dispositif de refroidissement (10) selon la revendication 1, dans lequel un (20, 41) parmi la tablette (20) et au moins une paroi latérale (41) du couvercle (40) comprend au moins une patte de fixation (27) et l'autre (20, 41) parmi la tablette (20) et au moins une paroi latérale (41) du couvercle (40) comprend au moins un logement de fixation (45) pour loger la patte de fixation (27).
3. Dispositif de refroidissement (10) selon la revendication 1 ou la revendication 2, dans lequel la patte de fixation (27) et le logement de fixation (45) sont prévus dans le voisinage du panneau avant (32) du tiroir (30).

4. Dispositif de refroidissement (10) selon l'une quelconque des revendications précédentes, dans lequel le couvercle (40) est prévu sous une forme en U de sorte que chaque extrémité des parois latérales (41) soit exposée. 5

5. Dispositif de refroidissement (10) selon l'une quelconque des revendications 1 à 4, dans lequel le logement (24) comprend une base de logement (25) où la pièce de suspension (44) est arrêtée à l'intérieur du logement (24) lorsque le logement de fixation (45) et la patte de fixation (27) sont mutuellement alignés. 10

15

20

25

30

35

40

45

50

55

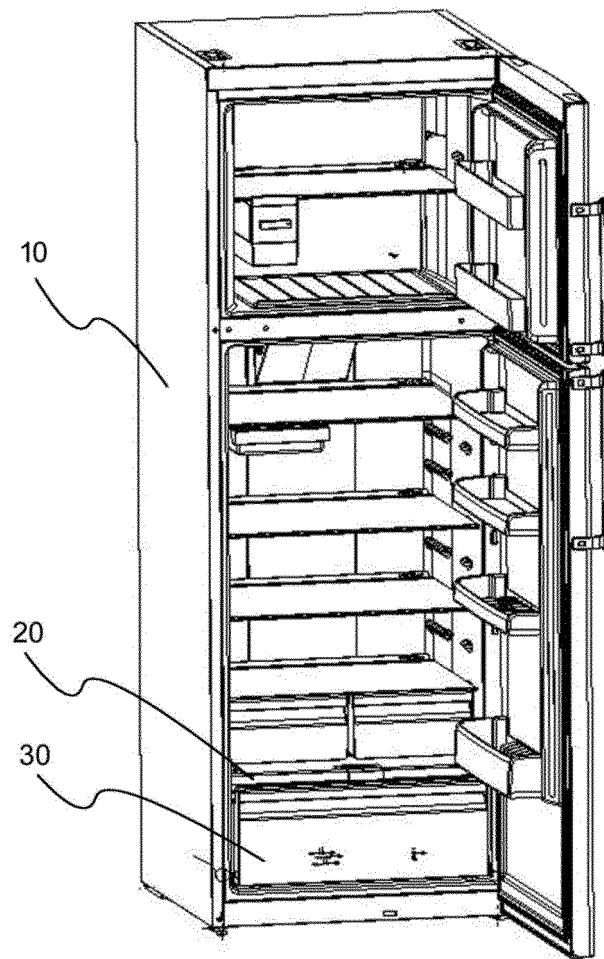


Figure 1

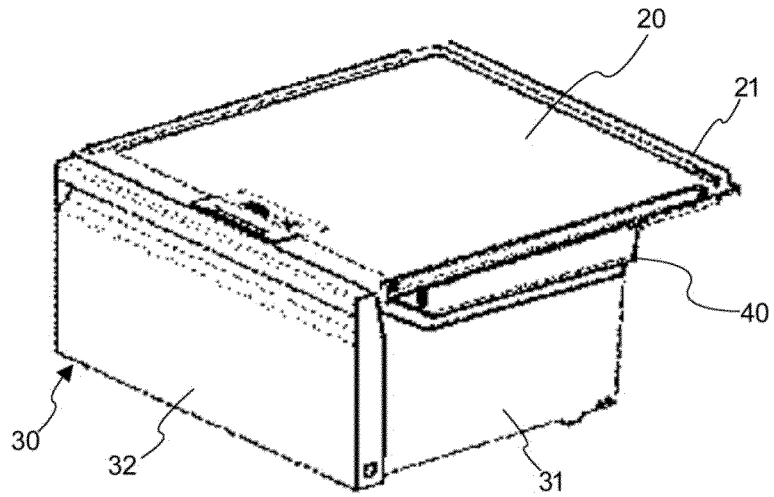


Figure 2

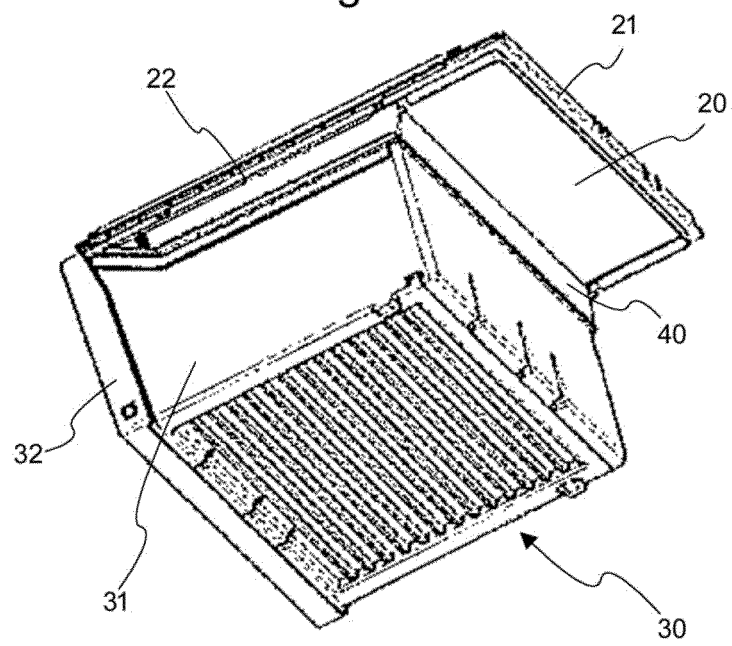


Figure 3

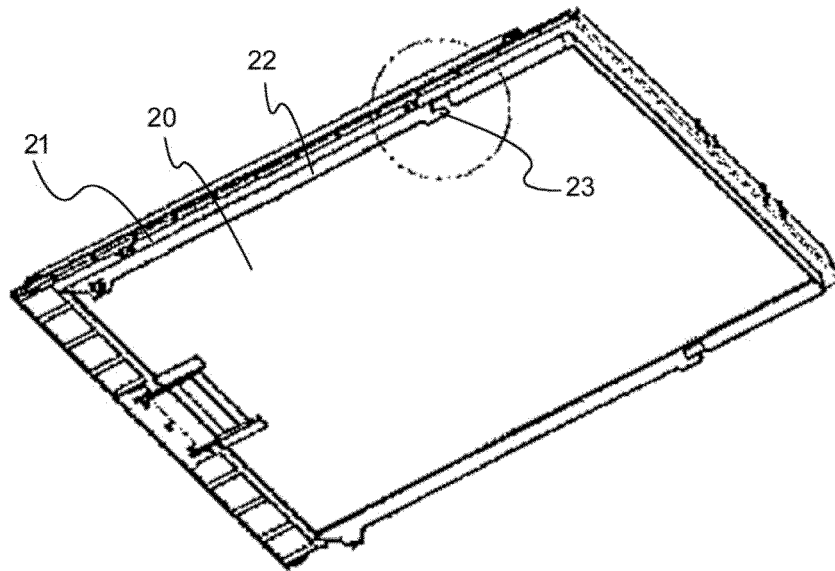


Figure 4

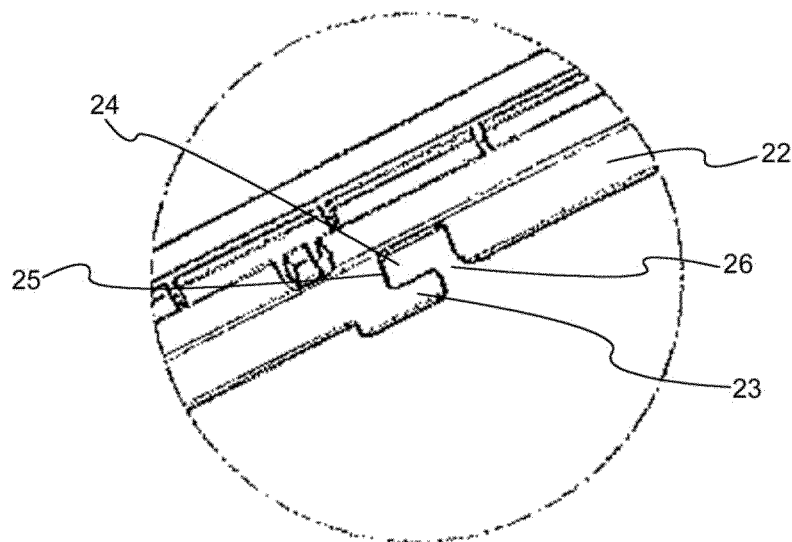


Figure 5

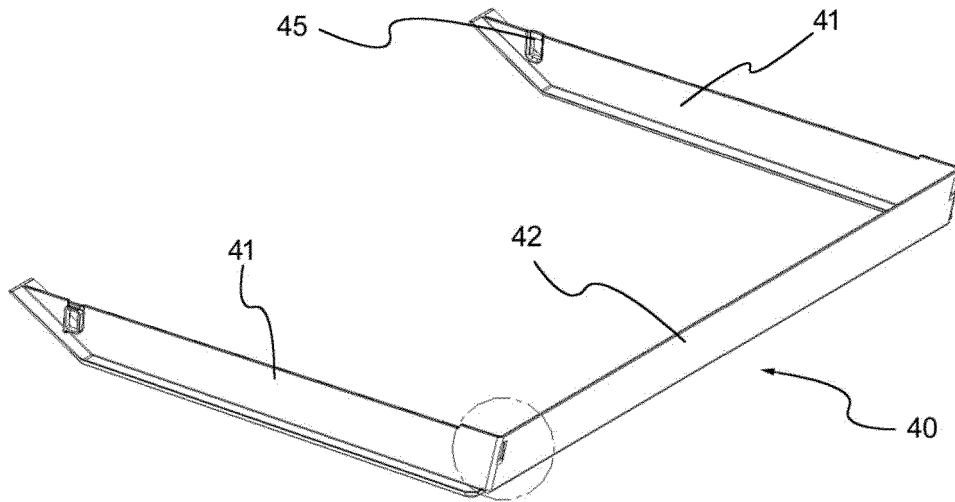


Figure 6

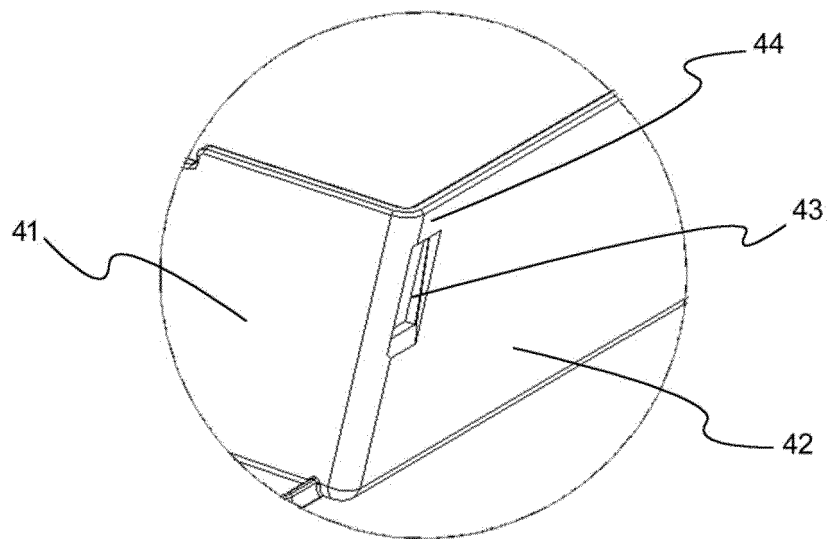


Figure 7

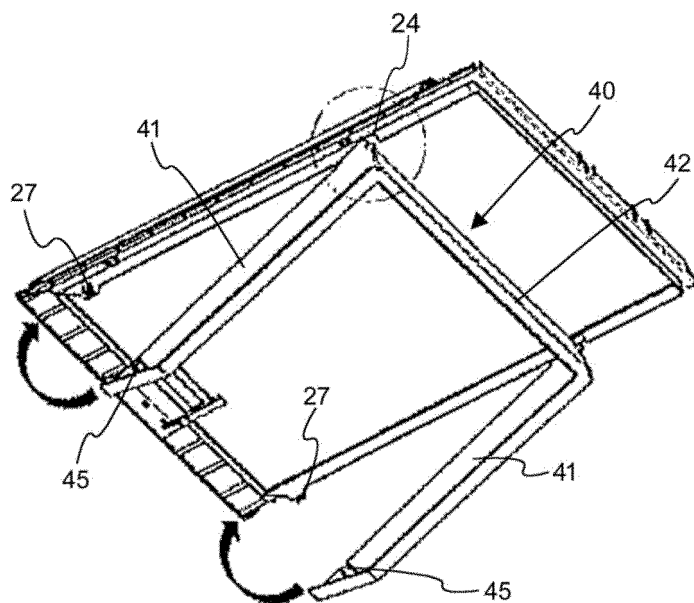


Figure 8

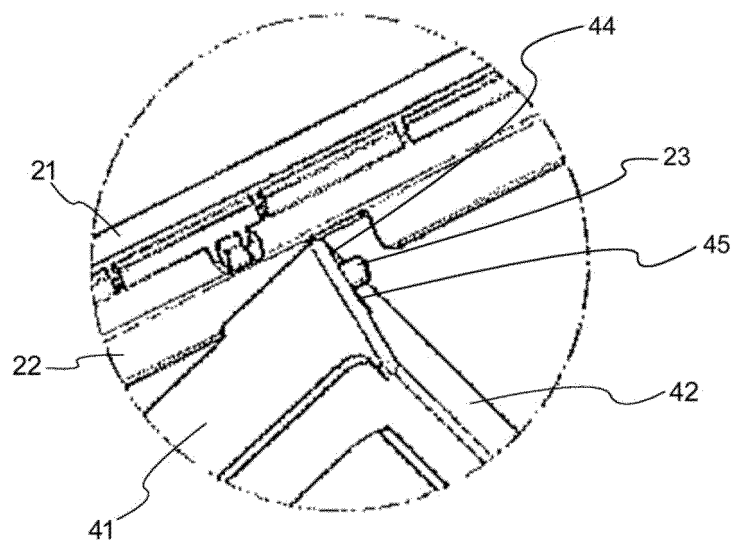


Figure 9

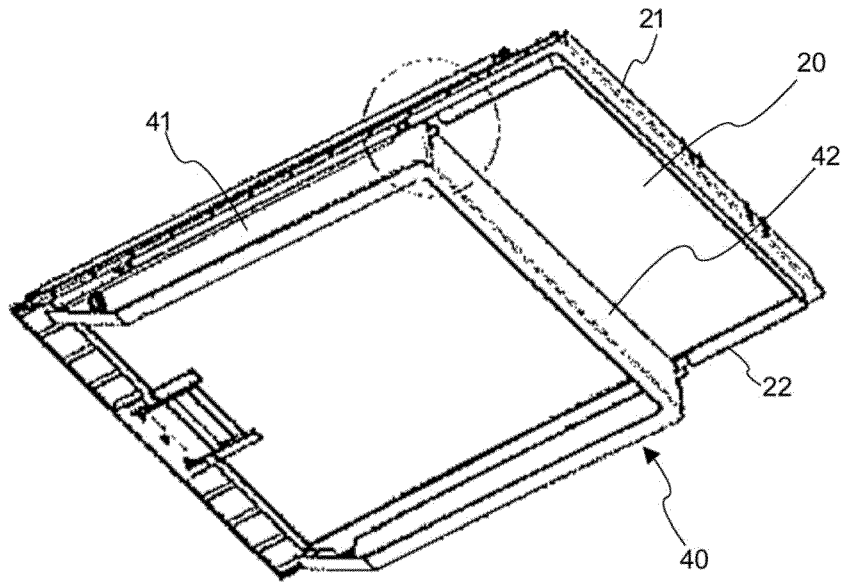


Figure 10

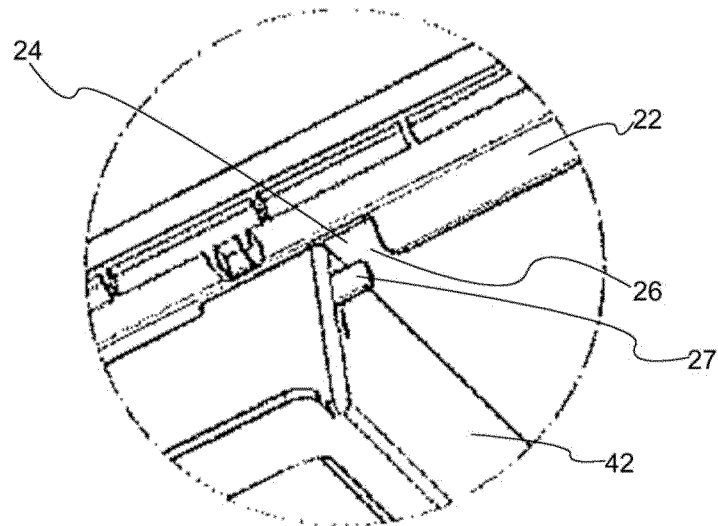


Figure 11

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 104848647 [0004]
- DE 102014219664 A1 [0005]