

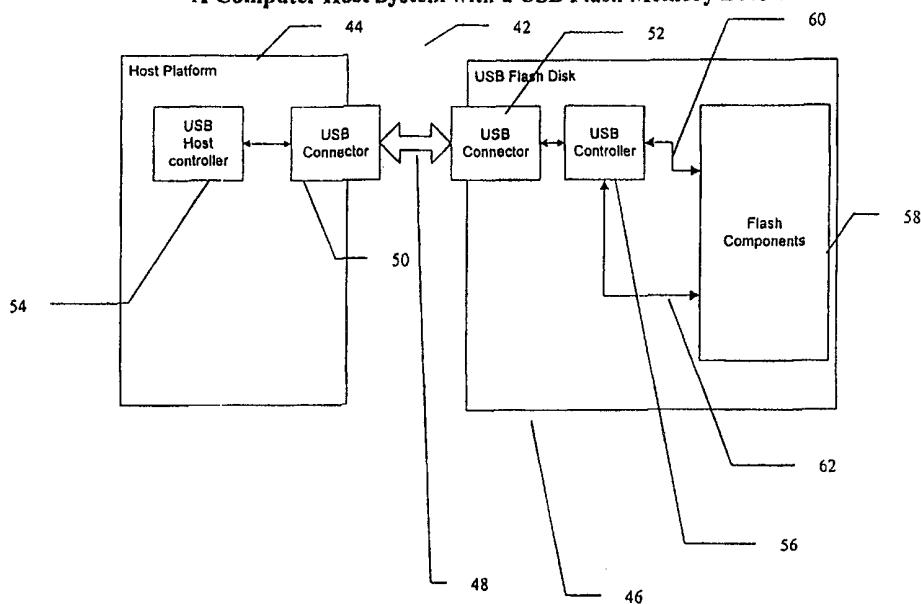


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :	A1	(11) International Publication Number: WO 00/60476
G06F 13/36		(43) International Publication Date: 12 October 2000 (12.10.00)
(21) International Application Number: PCT/US00/07087		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 20 March 2000 (20.03.00)		
(30) Priority Data: 09/285,706 5 April 1999 (05.04.99) US		
(71) Applicant (for all designated States except US): M-SYSTEMS FLASH DISK PIONEERS LTD. [IL/IL]; P.O. Box 58036, 61850 Tel Aviv (IL).		
(71) Applicant (for TJ only): FRIEDMAN, Mark, M. [US/IL]; Alharizi St. 1, 43406 Raanana (IL).		
(72) Inventors; and		Published
(75) Inventors/Applicants (for US only): BAN, Amir [IL/IL]; Yabok St. 5, 47205 Ramat Hasharon (IL). MORAN, Dov [IL/IL]; Itamar Ben Avi St. 15, 44406 Kfar Saba (IL). OGDAN, Oron [IL/IL]; Massarik St. 4B, 93106 Jerusalem (IL).		With international search report.
(74) Common Representative: FRIEDMAN, Mark, M.; c/o Castorina, Anthony, 2001 Jefferson Davis Highway, Suite 207, Arlington, VI 22202 (US).		

(54) Title: ARCHITECTURE FOR A UNIVERSAL SERIAL BUS-BASED PC FLASH DISK

A Computer Host System with a USB Flash Memory Device



(57) Abstract

A storage unit made of a flash array (58) and a Universal Serial Bus (USB) controller (56) is implemented to be compatible with the USB specification. The unit (46) includes memory modules (58) which can accept write commands and read commands from a host (44), and are erasable and non-volatile, referred to as flash modules (58). The USB/flash controller (56) is configured to provide USB functionality and compatibility along with common flash operations such as programming, reading, and erasing the flash modules (58).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		

ARCHITECTURE FOR A UNIVERSAL SERIAL BUS-BASED
PC FLASH DISK

Field and Background of the Invention

5 The present invention is related to semiconductor memory devices, and in particular to erasable and programmable nonvolatile memory modules which are connected to a host platform using the USB PC Bus.

10 Erasable and programmable non-volatile memory modules, hereinafter referred to as flash memory or flash devices, are known in the art for storage of information. Flash devices include electrically erasable and programmable read-only 15 memories (EEPROMs) made of flash-type, floating-gate transistors and are non-volatile memories similar in functionality and performance to EPROM memories, with an additional functionality that allows an in-circuit, programmable, operation to erase pages of the memory. One example of an implementation of such a flash device 20 is given in U.S. Patent No. 5,799,168, incorporated by reference as if fully set forth herein.

Flash devices have the advantage of being relatively inexpensive and requiring 25 relatively little power as compared to traditional magnetic storage disks. However, in a flash device, it is not practical to rewrite a previously written area of the memory without a preceding page erase of the area. This limitation of flash devices causes them to be incompatible with typical existing operating system programs, since data cannot be written to an area of memory within the flash device in which data has previously been written, unless the area is first erased. A software management system, such as that disclosed in U.S. Patent No. 5,404,485, filed on March 5, 1993, 30 which is incorporated as if fully set forth herein, is required to manage these functions of the flash memory device.

Currently, these flash memory devices have a second limitation, which is that they must be either attached statically to the host platform, or attached and detached dynamically using the PCMCIA [Personal Computer Memory Card International Association] interface. Both implementations have drawbacks, including difficulty of use and high cost.

A more useful implementation would follow the USB standard, as described in

the USB Specification Version 1.1 which is incorporated as if fully set forth herein. The USB standard offers a smaller form factor and greater ease of use for the end user, while lowering the cost of the implementation. This standard is specified to be an industry-wide standard promoted by companies such as Compaq Computer 5 Corporation, Microsoft, IBM and Intel to serve as an extension to the PC architecture with a focus on Computer Telephony Integration (CTI), the consumer, and productivity applications.

The criteria which were applied to define the architecture for the USB standard include the ease of PC (personal computer) peripheral expansion, low cost, support of 10 transfer rates up to 12Mb/second and full support for real-time data, voice, audio, and compressed video. This standard also offers protocol flexibility for mixed-mode isochronous data transfers and asynchronous messaging, integration in commodity device technology and provision of a standard interface for rapid integration into any given host product. In addition, the USB standard represents a single model for 15 cabling and attaching connectors, such that all of the details of the electrical functions, including bus terminations, are isolated from the end user. Through the standard, the peripheral devices are self-identifying, and support automatic mapping of functions to a driver. Furthermore, the standard enables all peripheral devices to be dynamically attachable and re-configurable.

20 A system constructed according to the USB standard is described by three separate, defined areas: USB interconnection, USB devices and the USB host platform. The USB interconnection is the manner in which USB devices are connected to, and communicate with, the host platform. The associated functions and components include the bus topology, which is the connection model between USB 25 devices and the host platform.

The USB physical interconnection has a tiered star topology. A hub is at the center of each star. Each wire segment is a point-to-point connection between the host platform and a hub or function, or a hub connected to another hub or function.

In terms of a capability stack, the USB tasks which are performed at each layer 30 in the system include a data flow model and a schedule. A data flow model is the manner in which data moves in the system over the USB between data producers and data consumers. A schedule determines access to the interconnection, which is

shared. Such scheduling enables isochronous data transfers to be supported and eliminates arbitration overhead.

The USB itself is a polled bus. The host controller on the host platform initiates all data transfers. All bus transactions involve the transmission of up to three 5 packets. Each transaction begins when the host controller, on a scheduled basis, sends a USB packet describing the type and direction of transaction, the USB device address, and endpoint number. This packet is referred to as the “token packet.” The USB device, to which the packet is addressed, selects itself by decoding the appropriate address fields. In a given transaction, data is transferred either from the 10 host platform to a device or from a device to the host platform. The direction of data transfer is specified in the token packet. The source of the transaction then sends a data packet or indicates that the source has no data to transfer. The destination, in general, responds with a handshake packet indicating whether the transfer was successful.

15 The USB data transfer model between a source and destination on the host platform and an endpoint on a device is referred to as a “pipe”. There are two types of pipes: stream and message. Stream data has no USB-defined structure, while message data does. Additionally, pipes have associations of data bandwidth, transfer service type, and endpoint characteristics like directionality and buffer sizes. Most pipes come 20 into existence when a USB device is configured. One message pipe, the default control pipe, always exists once a device is powered, in order to provide access to the configuration, status, and control information for the device.

25 The transaction schedule for the USB standard permits flow control for some stream pipes. At the hardware level, this prevents situations in which buffers experience underrun or overrun, by using a NAK handshake to throttle the data rate. With the NAK handshake, a transaction is retried when bus time is available. The flow control mechanism permits the construction of flexible schedules which accommodate concurrent servicing of a heterogeneous mix of stream pipes. Thus, 30 multiple stream pipes can be serviced at different intervals with packets of different sizes.

The USB standard, as described, has three main types of packets, including token packets, data packets and handshake packets. An example of each type of

packet is shown in background art Figures 1-3. Background art Figure 4 shows an exemplary USB abstract device.

A token packet **10**, as shown in background art Figure 1, features a PID (packet identification) field **12**, specifying one of three packet types: IN, OUT, or 5 SETUP. If PID field **12** specifies the IN packet type, the data transaction is defined from a function to the host platform. If PID field **12** specifies the OUT or SETUP packet type, the data transaction is defined from the host platform to a function.

An ADDR field **14** specifies the address, while an ENDP field **16** specifies the endpoint for token packet **10**. For OUT and SETUP transactions, in which PID field 10 **12** specifies that token packet **10** is an OUT packet type or a SETUP packet type, ADDR field **14** and ENDP field **16** uniquely identify the endpoint for receiving the subsequent data packet, shown in Figure 2, which follows after token packet **10**. For IN transactions, in which PID field **12** specifies that token packet **10** is an IN packet type, ADDR field **14** and ENDP field **16** uniquely identify which endpoint transmits a 15 data packet. A CRC5 field **18** contains the checksum, for determining that token packet **10** has been received without corruption. Only host platform can issue token packets **10**, such that token packets **10** provide control over transmission of the subsequent data packets.

As shown in background art Figure 2, a background art USB data packet **20** 20 also features a PID (packet identification) field **22** for identifying the type of data packet. Data packet **20** also features a data field **24** for optionally containing data, and a CRC field **26** for containing the checksum as previously described.

Background art Figure 3 shows a background art USB handshake packet **28**, which features only a PID (packet identification) field **30**. Handshake packets **28** are 25 used to report the status of a data transaction and can return values indicating successful reception of data, command acceptance or rejection, flow control, and halt conditions. Only transaction types which support flow control can return handshake packets **28**. Handshake packets **28** are always returned in the handshake phase of a transaction and may be returned, instead of data packets **20**, in the data phase of a 30 transaction.

These three different types of packets are exchanged during various phases of the transaction which includes a USB device. A schematic block diagram of the

functional blocks in a typical USB device 32 is shown in Figure 4 for an abstract background art USB device. USB device 32 typically includes a USB electrical interface 34, featuring a cable and a connector, which is a physical interface for receiving and transmitting electrical signals which are compatible with the USB 5 specification as previously described. The signals are then passed to a logical interface 36, which includes one or more buffers, the device address decoder for decoding the address of the source device for the signals, and a SYNC field synchronizer for synchronizing the signals. Information and structures required for management of USB abstract device 32 as a USB device are stored in a USB class 10 control and enumeration engine 38. A function and device engine 40, also termed the “application”, controls and manages the specific functions and properties of USB abstract device 32. In addition, function and device engine 40 also consumes and produces most of the data over the USB bus.

The USB specification does not define the relationship between different 15 entities in USB abstract device 32, however. Rather, the USB specification describes only the requirements for the packets, and for the electrical and physical connection between USB abstract device 32 and the bus. Therefore the connections and relationships shown in background art Figure 4 are only one example of an implementation which fulfills the requirements of the USB specification. Thus, any 20 specific device for fulfilling the USB specification must have a specifically defined and described architecture.

Unfortunately, no such architecture exists for a flash memory device containing one or more flash memory modules, which would enable the flash memory device to connect to a bus defined according to the USB specification and thereby to 25 form part of a USB system on a host platform. For example, U.S. Patent No. 5,799,168 does not teach or suggest such an implementation for the flash device. As mentioned previously, such an architecture would be particularly useful for a number of reasons, including low cost, ease of use and transparency to the end user.

There is thus a need for, and it would be useful to have, an architecture for 30 defining and describing a flash memory device which is compatible with a USB system and which follows the USB specification, such that the flash memory device could sit on a USB-defined bus and communicate with the host platform through this

bus.

Brief Description of the Drawings

FIG. 1 is a schematic block diagram of a background art USB token packet structure;

FIG. 2 is a schematic block diagram of a background art USB data packet structure;

FIG. 3 is a schematic block diagram of a background art USB handshake data packet structure;

FIG. 4 is a schematic block diagram of an exemplary background art USB device;

FIG. 5 is a schematic block diagram of a system with a flash USB device functionality according to the present invention;

FIG. 6 is a schematic block diagram of the USB Flash disk;

FIG. 7 is a schematic block diagram of a flash identification request packet;

FIG. 8 is a schematic block diagram of a flash identification status packet;

FIG. 9 is a schematic block diagram of a flash write request packet;

FIG. 10 is a schematic block diagram of a flash write status packet;

FIG. 11 is a schematic block diagram of a flash read request packet;

FIG. 12 is a schematic block diagram of a flash read status packet;

FIG. 13 is a schematic block diagram of a flash erase request packet; and

FIG. 14 is a schematic block diagram of a flash erase status packet.

Summary of the Invention

The present invention is of a flash memory device, containing one or more flash modules, in which the flash memory is mapped to the address space of an ASIC or a controller which has a USB-defined electrical interface and a USB-defined logical interface. This controller/ASIC (hereinafter termed a "controller") supports the USB functionality according to the USB standard, thereby supporting enumeration onto the USB bus, as well as data reception and transmission over USB pipes to and from USB endpoints. This controller also supports the functionality and control of the flash memory device, as well as the processing of command and data packets from the host

controller. The host controller uses one of several possible protocols, either standard or proprietary, to signal the next command to be performed to the USB flash controller. Thus, the entire device acts as a dynamically attachable/detachable non-volatile storage device for the host platform.

5 According to the present invention, there is provided a USB flash memory device for connecting to a USB-defined bus, the flash memory device comprising: (a) at least one flash memory module for storing data; (b) a USB connector for connecting to the USB-defined bus and for sending packets on, and for receiving packets from, the USB-defined bus; and (c) a USB controller for controlling the at 10 least one flash memory module and for controlling the USB connector according to at least one packet received from the USB-defined bus, such that data is written to and read from the at least one flash memory module.

15 Hereinafter, the term “computer” includes, but is not limited to, personal computers (PC) having an operating system such as DOS, WindowsTM, OS/2TM or Linux; MacintoshTM computers; computers having JAVATM-OS as the operating system; and graphical workstations such as the computers of Sun MicrosystemsTM and Silicon GraphicsTM, and other computers having some version of the UNIX operating system such as AIXTM or SOLARISTM of Sun MicrosystemsTM; or any other known and available operating system, including operating systems such as Windows CETM 20 for embedded systems, including cellular telephones, handheld computational devices and palmtop computational devices, and any other computational device which can be connected to a network. Hereinafter, the term “WindowsTM” includes but is not limited to Windows95TM, Windows 3.xTM in which “x” is an integer such as “1”, Windows NTTM, Windows98TM, Windows CETM and any upgraded versions of these 25 operating systems by Microsoft Inc. (Seattle, Washington, USA).

Detailed Description of the Invention

30 The present invention is of a flash memory device, containing one or more flash modules, in which the flash memory is mapped to the address space of an ASIC or a controller which has a USB-defined electrical interface and a USB-defined logical interface. This controller/ASIC (hereinafter termed a “controller”) supports the USB functionality according to the USB standard, thereby supporting enumeration onto the

USB bus, as well as data reception and transmission over USB pipes to and from USB endpoints. This controller also supports the functionality and control of the flash memory dev, as well as the processing of command and data packets from the host controller. The host controller uses one of several possible protocols, either standard 5 or proprietary, to signal the next command to be performed to the USB flash controller. Thus, the entire device acts as a dynamically attachable/detachable non-volatile storage device for the host platform.

While the invention is susceptible to various modifications and can be implemented using many alternative forms, the embodiment is shown by way of 10 example in the drawings and will be described in details in the following pages. It should be understood that one of ordinary skill in the art appreciates that the present invention could be implemented in various other ways. The intention is to cover all modifications and alternatives falling within the spirit of the current invention.

The principles and operation of a USB flash device and system according to 15 the present invention may be better understood with reference to the drawings and the accompanying description, it being understood that these drawings are given for illustrative purposes only and are not meant to be limiting.

Referring now to the drawings, Figure 5 is a schematic block diagram of the 20 main components of a flash memory device and system according to the present invention. A flash memory system 42 includes a host platform 44 as shown. Host platform 44 operates USB flash device 46 as a non-volatile storage space.

Host platform 44 is connected to USB flash device 46 according to the present invention through a USB cable 48. Host platform 44 connects to USB cable 48 through a USB host connector 50, while USB flash device 46 connects to USB cable 25 48 through a USB flash device connector 52. Host platform 44 features a USB host controller 54 for controlling and managing all USB transfers on the USB bus.

USB flash device 46 features a USB flash device controller 56 for controlling 30 the other components of USB flash device 46 and for providing an interface for USB flash device 46 to the USB bus, USB flash device connector 52 and at least one flash memory module 58. Flash memory module 58 is preferably an array of flash memory modules 58 in which the data is stored.

Whenever USB flash device 46 becomes connected to host platform 44, a

standard USB enumeration process takes place. In this process host platform 44 configures USB flash device 46 and the mode of communication with USB flash device 46. Although there are many different methods for configuring USB flash device 46, for the purposes of clarity only and without intending to be limiting, the 5 present invention is explained in greater detail below with regard to a method in which host platform 44 issues commands and requests to USB flash device 46 through one endpoint. Host platform 44 queries USB flash device 46 through the other endpoint for status changes, and receives related packets if any such packets are waiting to be received.

10 Host platform 44 requests services from USB flash device 46 by sending request packets to USB host controller 54. USB host controller 54 transmits packets on USB cable 48. These requests are received by USB flash device controller 56 when USB flash device 46 is the device on the endpoint of the request. USB flash device controller 56 then performs various operations such as reading, writing or erasing data 15 from or to flash memory module(s) 58, or supporting basic USB functionality such as device enumeration and configuration. USB flash device controller 56 controls flash memory module(s) 58 by using a control line 60 to control the power of flash memory module(s) 58, and also through various other signals such as chip enable, and read and write signals for example. Flash memory module(s) 58 are also connected to USB 20 flash device controller 56 by an address/data bus 62. Address/data bus 62 transfers commands for performing read, write or erase commands on flash memory module(s) 58, as well as the addresses and data for these commands as defined by the manufacturer of flash memory module(s) 58.

25 In order for USB flash device 46 to notify host platform 44 on the result and status for different operations requested by host platform 44, USB flash device 46 transmits status packets using the “status end point”. According to this procedure, host platform 44 checks (polls) for status packets and USB flash device 46 returns either an empty packet if no packets for new status messages are present, or alternatively returns the status packet itself.

30 A more detailed structure of the functional components of USB flash device 46 is shown in Figure 6. USB flash device 46 includes the physical and electrical interface defined for the USB standard, shown here as USB flash device connector 52

and a connector interface **64**. USB flash device connector **52** receives the electrical signals from USB cable **48** which carries electrical signals from host controller (not shown). These signals are then passed through connector interface **64**. Every millisecond, a USB frame is carried on the USB-defined bus, such that packets could
5 be sent to USB flash device **46**.

Connector interface **64** then receives these packets through a first interface component, which is a combined physical and logical interface **66**. A functional interface **68** is specifically designed to receive token packets as defined in the USB specification and as previously described with regard to Figure 1. These token packets
10 are related only to particular functional aspects of USB flash device **46** which are required for the USB standard, and do not have any relation to particular application of USB flash device **46** as a flash disk according to the present invention. These token packets and their respective returned data packets enable USB host controller **54** (not shown) and host platform **44** (not shown) to identify USB flash device **46** and allocate
15 resources for USB flash device **46** on the USB bus. Thus, functional interface **68** only supports USB functionality needed for the identification and registration of USB flash device **46** on the USB bus.

USB flash device **46** also features an application packet extractor **70** which extracts the application data and commands from the USB application packets, such
20 that application packet extractor **70** supports only application related packets. Next, any requests to USB flash device **46** by host platform **44** (not shown), in the form of read, write, identify and erase commands, are interpreted by an application command interpreter **72**. For any commands which involve data or an address, such as read, write and erase commands, an address resolve module **74** translates the address from
25 the logical address space to the physical address space. Host platform **44** (not shown) relates to a linear address space of logical addresses, while USB flash device **46** contains at least one, and preferably a plurality of, flash modules **58**, each of which has a physical address space. Thus, a translation must be performed between the logical address space of host platform **44** (not shown) and physical address space or
30 spaces of USB flash device **46**. There are many ways to implement such a translation which are suitable for the present invention. One example of a suitable implementation of an address translation method is described with regard to U.S.

Patent No. 5,404,485, previously incorporated by reference as if fully set forth herein, which teaches a method for managing a flash memory as a flash disk and which is suitable for operation with the present invention.

A data handler **76** handles data related aspects of any received commands, and 5 conveying the data through functional interface **68** to and from flash module(s) **58**. Optionally and preferably, data handler **76** performs any error correction and detection methods. Application command interpreter **72**, data handler **76** and address resolve module **74** all operate with an underlying Memory Technology Driver (MTD) **78** to write, read or erase a particular flash module **58** and the desired address on that 10 flash module **58**.

Host platform **44** checks for status changes in USB flash device **46** and reads status packets from USB flash device **46** when a new status pacis available. Using these status packets, USB flash device **46** can transmit, to host platform **44**, the results of different commands issued by host platform **44** in its requests (not shown). For 15 example, the read command status packet contains one of the available status words such as “success”, “error” or “invalid address”, which enables host platform **44** to determine the result of the read command (not shown). Similarly, the erase status packet contains a status word indicating the completion of the erase process. A write status packet is used by USB flash device **46** to notify host platform **44** about the 20 result of the write command, for example whether the command was successful or erroneous, and whether USB flash device **46** is ready for additional write requests from host platform **44**.

A Memory Technology Driver, or MTD **78** typically contains routines to read, write and erase the flash memory device controlled by the controller operating MTD 25 **78**. In addition, MTD **78** optionally contains an identification routine for recognizing the proper type of flash memory device for which MTD **78** was designed, so that the controller can determine which MTD should be activated upon interacting with a particular flash memory device array. In addition, an identification routine should be able to detect the size of the array of flash memory devices, including the number of 30 flash memory devices within the array, and various features of the flash array geometry, such as interleaving and bus width. This information later enables host platform **44** platform to determine the address space and size of the storage media.

U.S. Patent No. 5,799,168, previously incorporated by reference, discloses an example of such an MTD for a flash device.

Using the above described protocol and architecture, host platform 44 can optionally implement any application which is implementable with any regular 5 memory mapped or I/O mapped flash memory device. For example, host platform 44 can give a standard block device interface to each application, such as a magnetic storage medium "hard disk" drive, as disclosed in the previously described U.S. Patent No. 5,404,485.

As an example of a preferred embodiment of the present invention, the 10 operation of a host system connected to a USB flash device according to the present invention is described with regard to the processes of identifying, programming, reading and erasing the flash device. For the purposes of illustration only and without intending to be limiting in any way, the exemplary USB flash device has an array of 15 two flash memory modules, each of which is 64Mbit in size. The address translation table is within the flash device so that host platform operates with logical addresses. All commands and return codes between the flash device and the host platform are carried on USB data packets, and are transferred through USB data pipes. The exact structure of the packets, pipes and timings are described in the USB specification.

The operation of the exemplary device and system according to the present 20 invention is as follows. When the USB flash device is first connected to the host platform, the USB host controller assigns an address to the USB flash device on the USB bus, and also assigns resources as described in the USB specification. The USB flash device actually asks the host platform to assign these resources, and must inform the host platform how much of these resources are needed. Thus, the USB flash disk 25 can optionally support slower device speeds if the USB host platform has already allocated resources to other devices.

The USB controller also negotiates with the flash modules and determines the 30 size and manufacturing type of these modules. The controller then builds an identification structure holding this information, as well as the translation table and logical address space.

After the USB host controller identifies the USB flash device, the host platform often uploads a USB client driver. The driver issues an identification request

command to the USB host controller, causing the controller to transmit an identification data packet **80**, shown in Figure 7. Identification packet **80** contains PID field **22** and checksum field **26**, as described previously for background art Figure 2. Identification packet **80** also contains an “identify” operation code in an operation code field **82**. The packet extractor of the USB flash device receives identification data packet **80** and transfers the operating code of the “identify” command to the application command interpreter.

In response to the “identify” command, the flash device then sends an identification data packet **84**, shown in Figure 8. In addition to the fields shown in Figure 7, identification data packet **84** also contains information about the size of the flash device in a flash device size field **86**, as well as information about the size of the minimal erase unit for erasing the flash memory in an erase unit size field **88**.

All of the packets described in this example are only data packets which are sent on the USB bus. Before each data packet is sent, a USB token packet is transmitted, instructing the USB controller as to the identity of the device end point to which the data packet should be transmitted. Upon successful reception of the packet, the USB controller issues a USB ACK packet as described in the USB specification.

Once the device drivers in the host platform receive this status packet, the drivers can start issuing read and write commands to the USB flash device with the application commands. When a write request is sent, a USB data packet with the operation code for the “write” command, and the buffer containing the data, is transferred to the USB flash device. A write data packet **90** is shown in Figure 9, which again includes the fields shown previously in Figure 8, except that write data packet **90** also includes a write field **92** with the “write” operational code; an ADDR field **94** with the logical address to be written; a LEN field **96** with the length to be written; and a DATA field **98** which contains the actual data to write. The packet extractor extracts the operational code from write data packet **90** and transfers this code to the application command interpreter. The logical address is transferred to the address resolve module which translates this logical address to a physical address on one of the flash modules. The data handler optionally calculates error correction and detection mechanisms if employed by the USB flash device. Once all of the flash memory modules are ready, a “write” command is sent to the flash module or modules

containing the physical address, which may optionally span across more than one flash module to the MTD block. The MTD block then issues a “write” command on the data/address bus which connects the flash modules to the USB device controller. Once the operation is complete and a status packet is returned to the MTD, the result 5 of the operation is transmitted to the host controller and passed to the device driver in the host platform.

When the flash controller finishes the writing process, the controller signals to the host platform that the status of the USB flash memory device has changed, by sending a “write status” packet **100**, as shown in Figure 10. In place of data field **98**, 10 write status packet **100** contains a status field **102**. The host platform reads the status packets from the flash memory device, and from write status packet **100**, the host platform retrieves information on the completion status of the write command by reading status field **102**. In this example, the flash memory device repeats ADDR field **94** and LEN field **96** in order for the host platform to have a reference to the specific 15 command related to status packet **100**.

As shown in Figure 11, a “read request” packet **104** contains the operation code for the “read” command in a read field **106**, and the logical address of the desired location from which the flash controller should read in an ADDR field **108**. Upon receiving this command, the flash controller issues a read command to the MTD 20 block, after the address resolve module has translated the address contained in ADDR field **108** to a specific physical address in one of the flash components.

When the flash controller receives the data from the flash device, either after the read command was issued, or if an error occurred, the flash controller sends a signal to the host platform to indicate that a new status packet must be read. The host 25 platform issues a read request and receives a “read status” packet **110** as shown in Figure 12. Read status packet **110** contains the address of the read data in ADDR field **108**, as well as the length of the read data in a LEN field **112** and the data itself in a data field **114**. Read status packet **110** also features the status word, according to which the operation was completed, in a status field **116**. The read operation can be 30 completed with many different status situations such as success, fail, error detected, invalid address, invalid length and so forth.

When the host platform needs to erase an erase unit in the flash device, the

host platform issues an “erase request” packet **118**, shown in Figure 13. This packet contains the “erase” operation code in an erase field **120**, and the logical address of the erase unit in an ADDR field **122**. Upon receiving such a request, the flash controller translates the logical address to a physical erase unit address on one of the physical address spaces of the flash modules, and issues an erase command to the MTD block.

5 The erase process generally takes more time than a read or write process. When this erase process is finished, the controller notifies the host platform a new status packet is ready to transmit. The controller then transmits an “erase status” packet **124**, as shown in Figure 14. Erase status packet **124** contains the address of the 10 erased unit in ADDR field **122**, thereby providing the host platform with a reference to the erase requests. The status according to which the operation was completed is provided in a status field **126**.

15 It will be appreciated that the above descriptions are intended only to serve as examples, and that many other embodiments are possible within the spirit and the scope of the present invention.

WHAT IS CLAIMED IS:

1. A USB flash memory device for connecting to a USB-defined bus, the flash memory device comprising:
 - (a) at least one flash memory module for storing data;
 - (b) a USB connector for connecting to the USB-defined bus and for sending packets on, and for receiving packets from, the USB-defined bus; and
 - (c) a USB controller for controlling said at least one flash memory module and for controlling said USB connector according to at least one packet received from the USB-defined bus, such that data is written to and read from said at least one flash memory module.
2. The flash memory device of claim 1, further comprising:
 - (d) an electrical interface for connecting to said USB connector and for receiving said packets from said USB connector as a plurality of electrical signals; and
 - (e) a logical interface for connecting to said electrical interface and for translating said plurality of electrical signals to logic signals, said logic signals being passed to said at least one flash memory module.
3. The flash memory device of claim 2, further comprising:
 - (f) a functional interface for receiving said logic signals such that if said logic signals represent a USB functional packet, said functional interface sends a USB command to said USB controller according to said USB functional packet.
4. The flash memory device of claim 3, further comprising:
 - (g) an application packet extractor for connecting to said logical interface and for receiving said logic signals, said application packet extractor extracting at least one packet from said logic signals; and
 - (h) an application command interpreter for receiving said at least one

packet and for determining a command according to said at least one packet, said command being passed to said USB controller.

5. The flash memory device of claim 4, further comprising:
 - (i) an address resolver module for receiving said at least one packet and for resolving an address contained in said at least one packet, said address being sent to said USB controller, such that said command is performed according to said address.

6. The flash memory device of claim 5, wherein said command is a write command for writing data to said at least one flash memory module and said address is a logical address for writing said data, such that said address resolver module resolves said logical address to a physical address of said at least one flash memory module.

7. The flash memory device of claim 5, wherein said command is a read command for reading data from said at least one flash memory module and said address is a logical address for reading said data, such that said address resolver module resolves said logical address to a physical address of said at least one flash memory module.

8. The flash memory device of claim 5, further comprising:
 - (j) a data handler for performing an error detection and correction routine for said at least one flash memory module.

9. The flash memory device of claim 8, further comprising:
 - (k) a status handler for receiving said USB functional packet from said functional interface, and for sending a status packet concerning a status of said at least one flash memory module according to said USB functional packet.

10. The flash memory device of claim 9, further comprising:

- (l) a MTD (memory technology driver) for receiving a write command and a physical address of said at least one flash memory module, and for performing said write command to said physical address.

11. A USB flash system , the system featuring a USB-defined bus, the system comprising:

- (a) a flash memory device, comprising:
 - (i) at least one flash memory module for storing data;
 - (ii) a USB flash device connector for connecting to the USB-defined bus and for sending packets on, and for receiving packets from, the USB-defined bus; and
 - (iii) a USB flash device controller for controlling said at least one flash memory module and for controlling said USB connector according to at least one packet received from the USB-defined bus, such that data is written to and read from said at least one flash memory module; and
- (b) a host platform for communicating with said flash memory device through the USB-defined bus, said host platform comprising:
 - (i) a USB host controller for controlling said host platform; and
 - (ii) a USB host connector for connecting to the USB-defined bus.

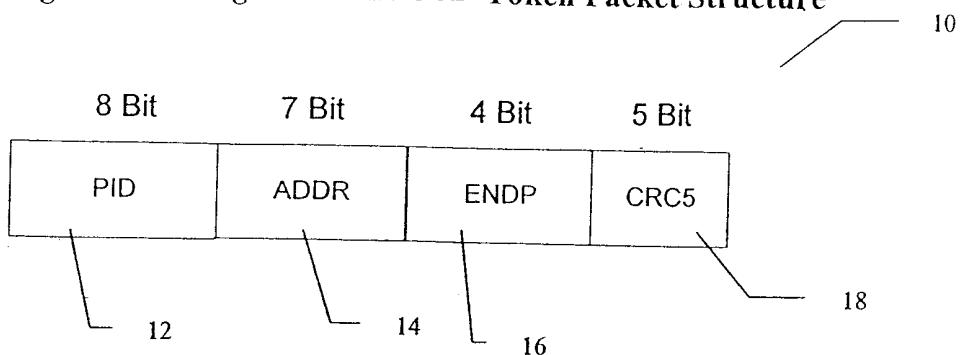
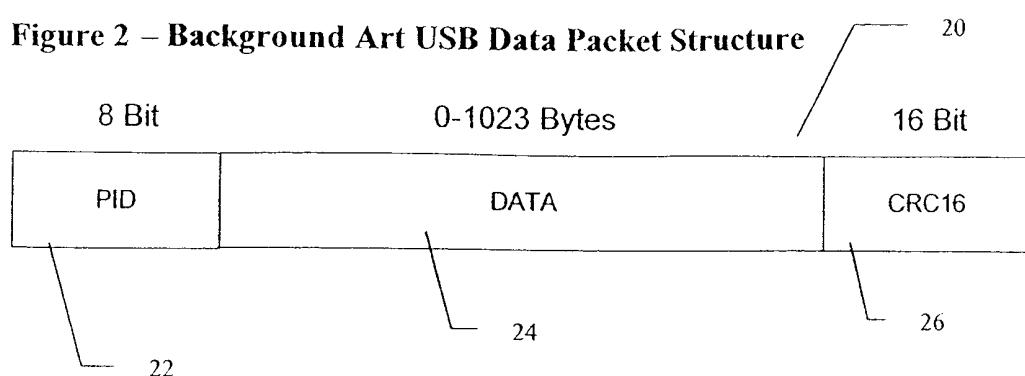
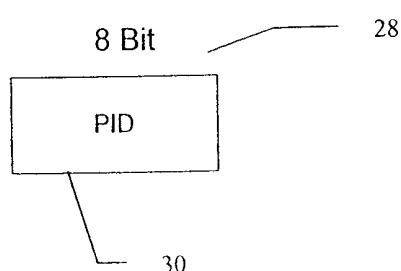
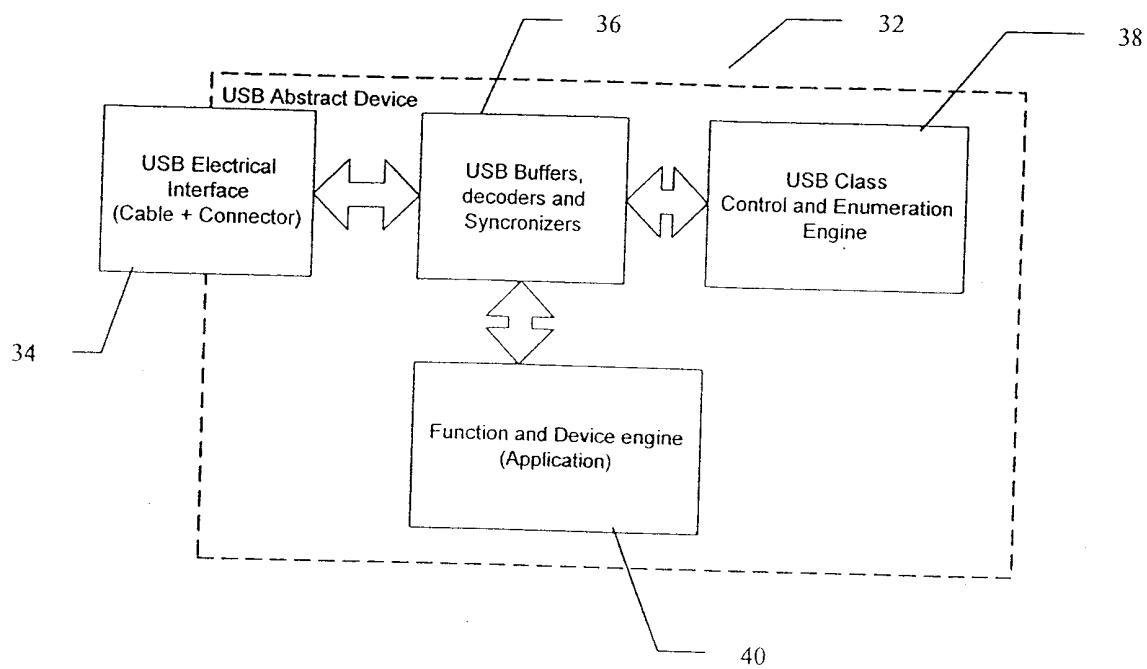
Figure 1 – Background Art USB Token Packet Structure**Figure 2 – Background Art USB Data Packet Structure****Figure 3 – Background Art USB Handshake Packet**

Figure 4 – Functional Blocks of a Background Art USB device



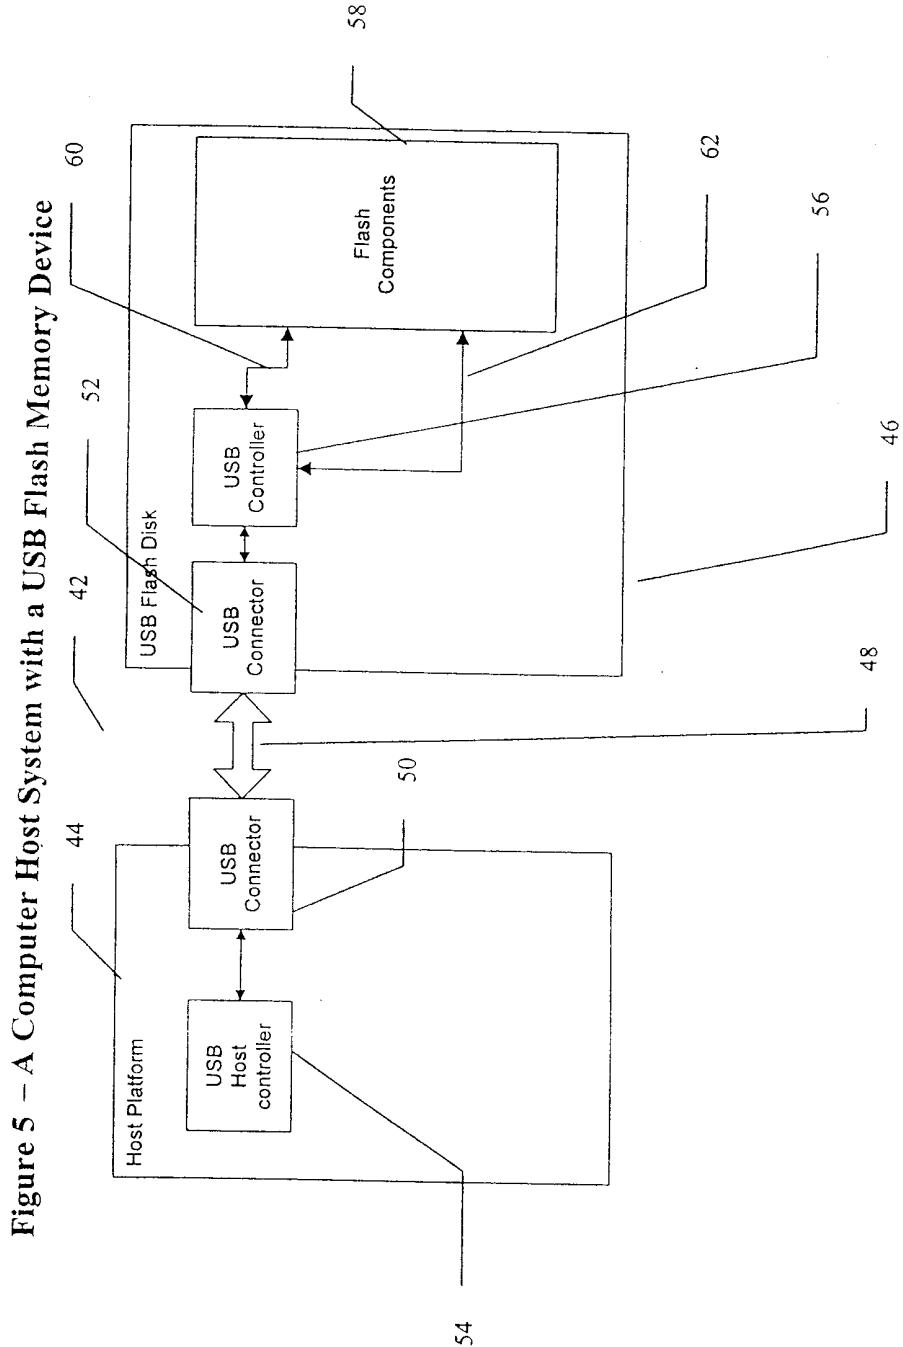


Figure 6 – Detailed Functional Blocks of USB Flash Memory Device

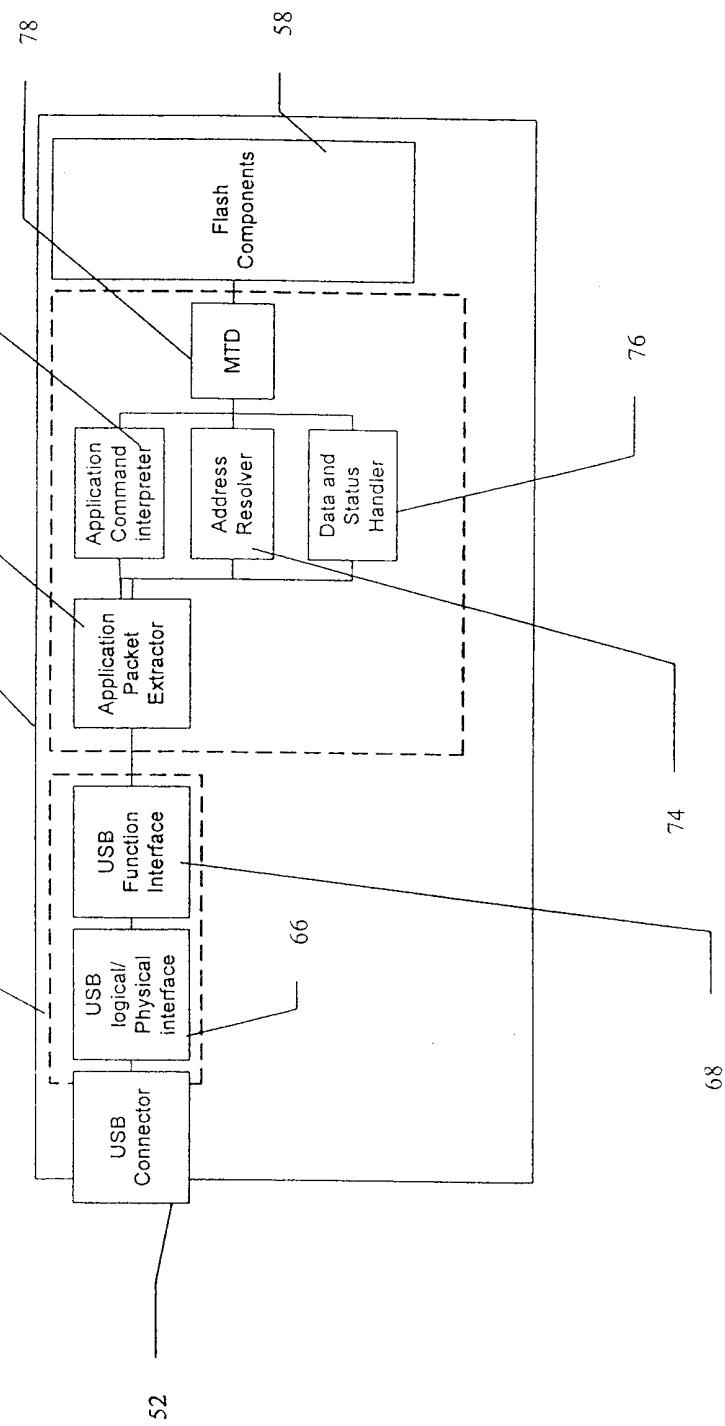


Fig 7 – Flash Identification Request Packet

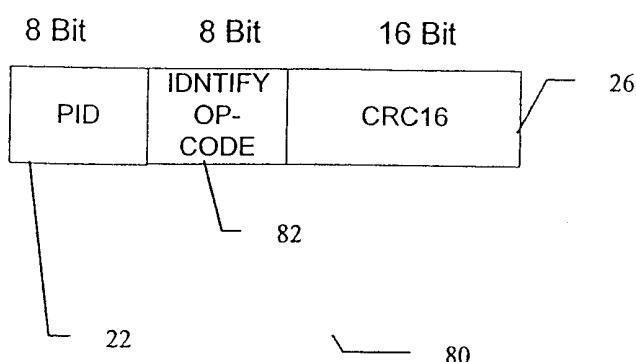


Fig 8 – Flash Identification Reply Packet

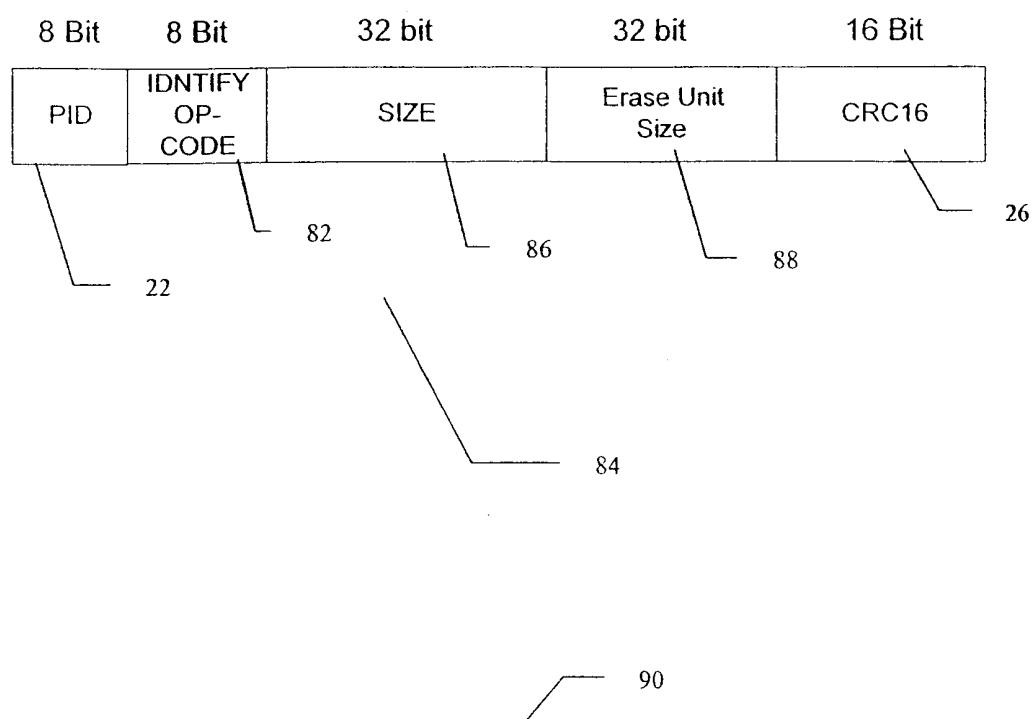
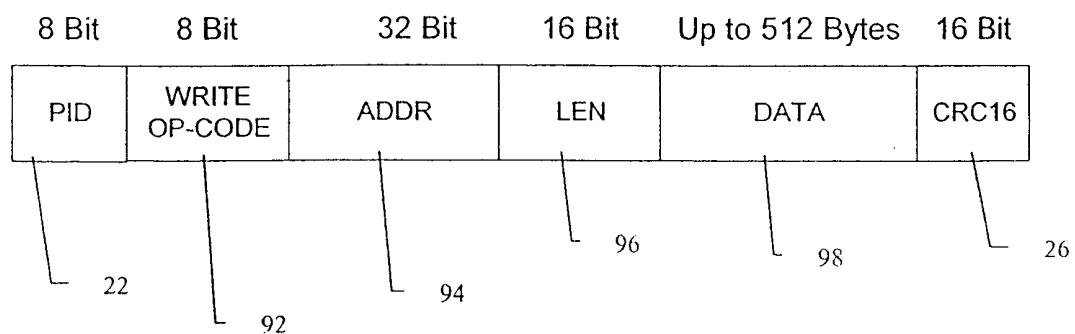


Fig 9 – Write Request Packet



6/7

Fig 10 – Write Status Packet

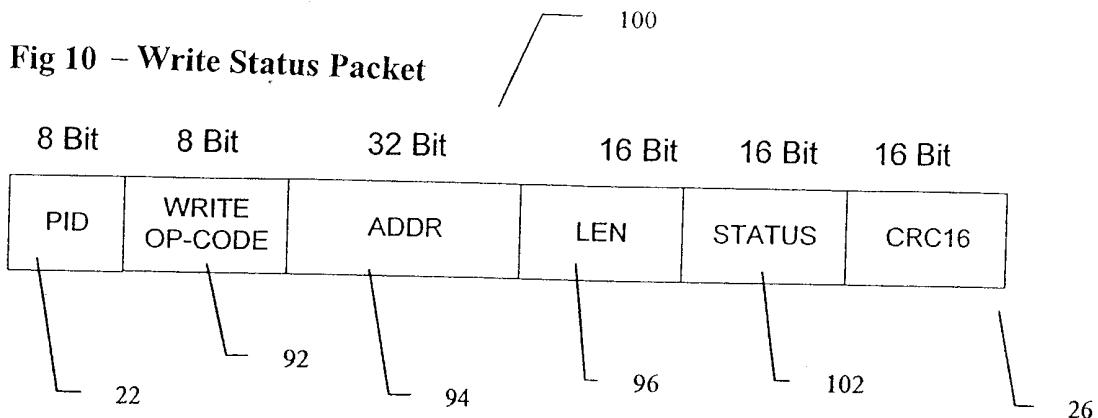


Fig 11 – Read Request Packet

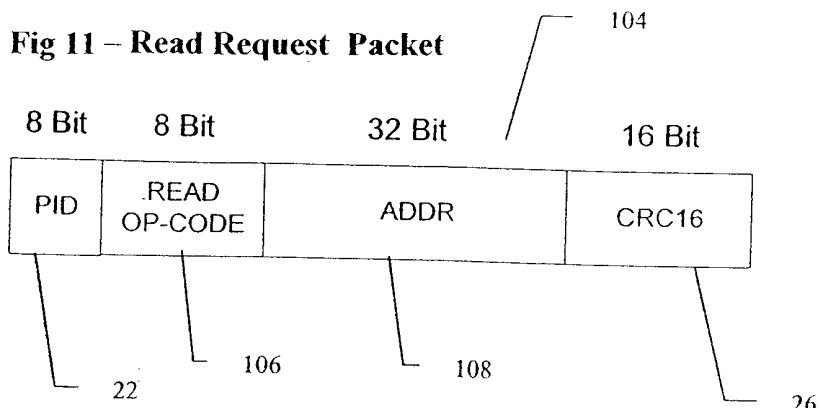


Fig 12 – Read Status Packet

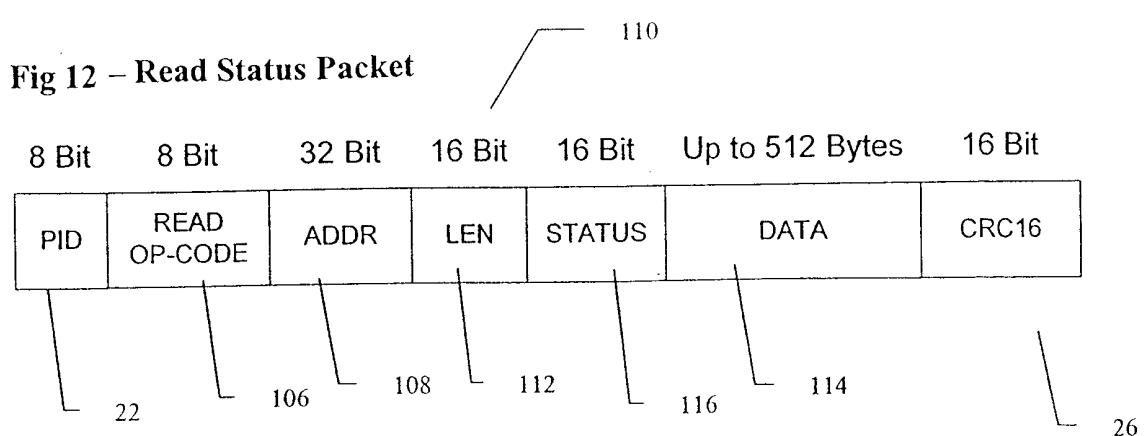
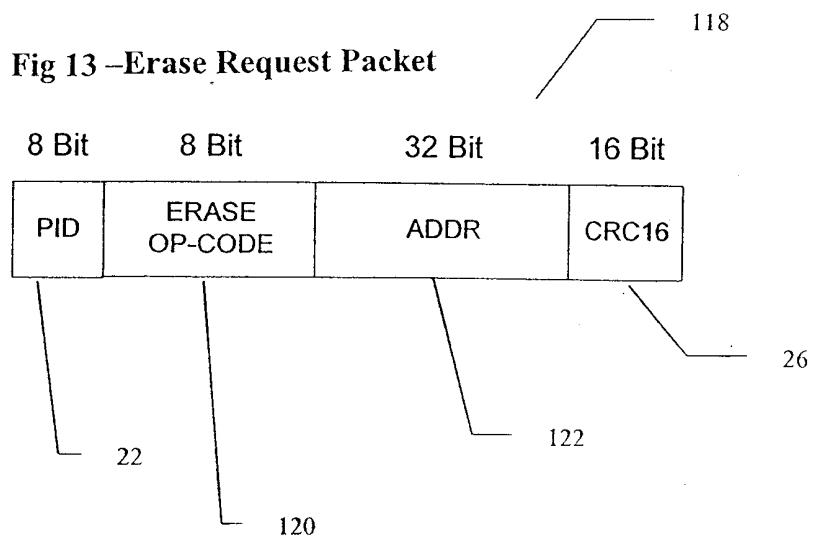
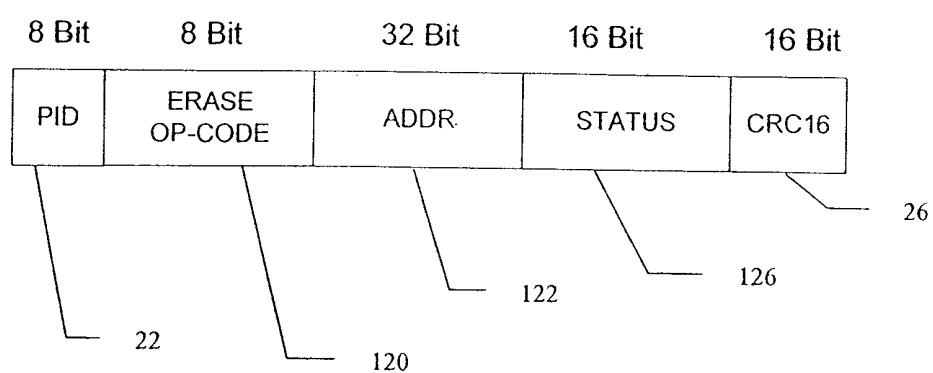


Fig 13 –Erase Request Packet**Fig 14 –Erase Status Packet**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/07087

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 13/36

US CL : 710/129

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 710/129,2,101,102,103,126

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST search of USPAT, Derwent, JPOABS, EPOABS

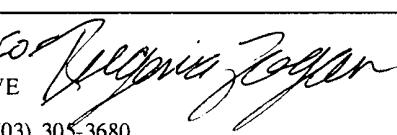
search terms: (usb or universal serial bus) same (flash memor\$3)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 6,012,103 A (SARTORE et al) 04 January 2000, fig.2 and cols. 4-6.	1-3 and 11
A	US 5,404,485 A (BAN) 04 April 1995, whole document.	1-11
A	US 5,799,168 A (BAN) 25 August 1998, whole document.	1-11
A,P	US 6,028,807 A (AWSIENKO) 22 February 2000, fig.13 and cols. 6-7.	1-11
A,E	US 6,044,428 A (RAYABHARI) 28 March 2000, fig.2 and cols. 3-5.	1-11

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search	Date of mailing of the international search report
03 MAY 2000	25 MAY 2000
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer GLENN A. AUVE 
Facsimile No. (703) 305-3230	Telephone No. (703) 305-3680