



(51) International Patent Classification:

G01S 19/02 (2010.01) H04B 10/118 (2013.01)

(21) International Application Number:

PCT/US2022/020611

(22) International Filing Date:

16 March 2022 (16.03.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/163,689 19 March 2021 (19.03.2021) US

(71) Applicant: CALIFORNIA INSTITUTE OF TECHNOLOGY [US/US]; 1200 E. California Blvd., M/C 6-32, Pasadena, California 91125 (US).

(72) Inventor: VELAZCO, Jose E.; c/o California Institute of Technology, 1200 E. California Blvd., M/C 6-32, Pasadena, California 91125 (US).

(74) Agent: STEINFL, Alessandro et al.; 155 N. Lake Avenue, Suite 700, Pasadena, California 91101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,

MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INTERPLANETARY NETWORKS FOR SPACE INTERNET AND SPACE POSITIONING

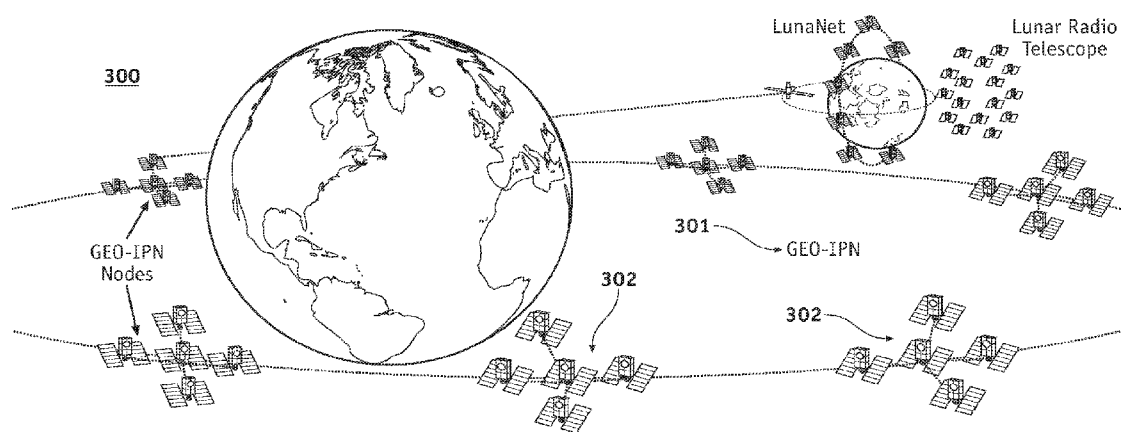


FIG. 3

(57) Abstract: Interplanetary networks for space internet and space positioning are presented. The described networks deploy spacecraft swarms along the solar system to form a science and communications platform. The disclosed network nodes are placed around planetary Lagrange points. Creation of optical synthetic apertures using smallsat swarms for inter- and intranet communications is further described. Exemplary subnetworks such as the cislunar network are also presented.



INTERPLANETARY NETWORKS FOR SPACE INTERNET AND SPACE POSITIONING

CROSS REFERENCE TO RELATED APPLICATIONS

[01] The present application claims priority to U.S. Provisional Patent Application No. 63/163,689 filed on March 19, 2021 incorporated herein by reference in its entirety. The present application is also related to U.S. Pat. Pub. No. 2021/0306071 A1, published on September 30, 2021, titled “Optical Ground Terminal”, to U.S. Patent No. 10,581,525 B2, issued on March 3, 2020, titled “Method and Apparatus for Omnidirectional Optical Communication”, and to U.S. Patent No. 10,707,966 B2, issued on July 7, 2020, titled “Ultrafast Omnidirectional Wireless Data Transfer Apparatus”, all of which are incorporated herein by reference in their entirety.

STATEMENT OF GOVERNMENT GRANT

[02] This invention was made with government support under Grant No. 80NMO0018D0004 awarded by NASA (JPL). The government has certain rights in the invention.

FIELD

[03] The present disclosure is related to interplanetary networks (IPN), and more particularly to IPN's for space internet and space positioning.

BACKGROUND

[04] Typical space missions involve single flagship spacecraft furnished with a suite of sensors and communications system that cost up to \$1B [1-2]. The science data generated by these missions is typically downlinked directly from the spacecraft to ground stations in the Deep Space Network [3] via X-band or Ka-band links. These flagship missions tend to be seasonal and include large communications systems to transmit their data back to Earth. The general issue with such approach is an overall prohibitive cost of deployment.

SUMMARY

[05] According to a first aspect of the present disclosure, an interplanetary satellite network (IPN) deployed across a plurality of planets of a solar system is provided, the IPN comprising a plurality of miniaturized satellite swarms, each swarm forming a node of the IPN, the node being located at a Lagrange point of a corresponding planet with reference to the Sun, and wherein: the plurality of planets comprises Earth, Mercury, Venus, Mars, Jupiter, Saturn, Uranus, Neptune and Pluto, and each miniaturized satellite is configured to optically communicate with miniaturized satellites of a same swarm and miniaturized satellites of other swarms of the IPN.

[06] Further aspects of the disclosure are provided in the description, drawings and claims of the present application.

DESCRIPTION OF THE DRAWINGS

[007] Fig. 1A shows an exemplary interplanetary network according to an embodiment of the present disclosure.

[008] Fig. 1B shows Lagrange points between the Sun and a planet.

[009] Fig. 2 shows subnets of an interplanetary network.

[010] Fig. 3 shows an exemplary implementation of the cislunar inter planetary network according to an embodiment of the present disclosure.

[011] Fig. 4A shows an exemplary implementation of the cislunar inter planetary network according to an embodiment of the present disclosure.

[012] Fig. 4B shows an optical ground station.

[013] Fig. 4C shows a phase array RF station.

[014] Fig. 5 shows a miniaturized satellite (“smallsat”).

[015] Fig. 6A shows an image of the planets’ location along the solar system.

[016] Fig. 6B shows possible data rates between the node of an interplanetary network nodes and the associated latency.

[017] Fig. 7 shows a spacecraft swarm.

[018] Fig. 8A shows an exemplary interplanetary network arrangement.

[019] Fig. 8B shows transmit and receive spacecraft swarms.

DETAILED DESCRIPTION

[020] Throughout the disclosure, the term “interplanetary network” refers to a large sensor and communication platform implemented across the solar system. The term “spacecraft swarm” refers to a plurality of spacecrafts, e.g. tens, hundreds or thousands of spacecrafts. The terms “Lunar Gateway”, or “Gateway”, refer to a planned small space station in lunar orbit intended to serve as a solar-powered communication hub, science laboratory, short-term habitation module for government-agency astronauts, as well as a holding area for rovers and other robots. The term “smallsat” refers to miniaturized satellites, i.e. satellites of low mass and size, usually under 1,200 kg.

[021] According to the teachings of the present disclosure, space missions can also be carried out deploying interplanetary networks (IPNs) that involve the implementation of a spaceborne platform including, e.g. hundreds to thousands, of small spacecrafts placed along the solar system. According to such distributed approach, the IPN includes a plurality of nodes, wherein each node comprises spacecraft swarms used as building blocks of the IPN. In an embodiment, such spacecraft swarms are systematically placed on planetary Lagrange points to gradually form the interplanetary network.

[022] Fig. 1A shows an exemplary IPN (100) implemented across the solar system according to an embodiment of the present disclosure. IPN (100) comprises nodes (101), each including a spacecraft swarm (not shown). Spacecraft swarms may be disposed along planetary Lagrange points (Sun-planet L1-L5). This is illustrated in Fig. 1B, wherein the five Lagrange points (L1-L5) between the Sun and a planet are shown. Lagrange points are points of equilibrium for small-mass objects under the influence of two massive orbiting bodies (in this case Sun and a respective planet). They are well known as such to the person skilled in the art and will not be discussed here in detail.

[023] In the IPN (100) of Fig. 1A, at least one swarm per Lagrange point (5 swarms per planet) is placed along Earth, Mercury, Venus, Mars, Jupiter, Saturn, Uranus, Neptune and the dwarf planet Pluto. The deployment of a swarm on Lagrange point Earth-Moon L2 may also be envisaged. In another embodiment, 5 spacecraft swarms around dwarf planet Ceres Lagrange points may be placed (Sun-Ceres L1-L5). This makes for a total of 51 IPN swarms. According to

the teachings of the present disclosure, IPN (100) can be divided into various subnetworks (hereafter referred to as subnets). As shown in Fig. 2, in an embodiment, the IPN (100) comprises 3 main subnets: cislunar IPN, inner solar system IPN, and outer solar system IPN. All the subnetworks may be fully networked and connected to Earth. In what follows, some mode details about the implementation of cislunar IPN will be given.

[024] Fig. 3 shows an exemplary implementation of the cislunar IPN (300) according to an embodiment of the present disclosure. Cislunar IPN (300) comprises a subnet in geostationary (GEO) orbit, called GEO-IPN (301) including a set of, for example, 8 swarms (302) equally spaced along the GEO orbit. NASA's current strategy includes the implementation of the lunar gateway orbiter (shown in Fig. 3) and lunar ground assets, such as astronauts, rovers and other instruments, as a stepping stone towards manned Mars missions. Also shown in Fig. 3, as part of cislunar IPN (300), in addition to the Gateway, the placement of a lunar radio telescope around L2 (Earth-Moon Lagrange point) [4] and a constellation of lunar orbiting smallsats (e.g. LunaNet [5]) for fast communications between the lunar gateway and surface assets may also be envisaged. In an embodiment, the Gateway may be used as the main communication relay between lunar assets and Earth ground stations.

[025] With continued reference to Fig. 3, LunaNet is a lunar communications and navigation architecture that will bring networking, positioning, navigation and timing (PNT) and science services to the Moon [5]. Once the LunaNet architecture is in place, robotic landers, rovers and astronauts on the Moon will have network access similar to networks on Earth via the IPN. Rovers analyzing samples can send their data to relays orbiting the Moon, which can then transmit that data back to Earth. Astronauts on the lunar surface will be able to receive real-time alerts generated from space weather instruments of incoming solar flares, giving them ample time to seek cover and protect relevant instrumentation. Each communications link will be a connection to the larger IPN (100) of Fig. 1A, allowing fast data transfers between any assets on the network. LunaNet will also support PNT services and allow for more precise surface operations and science than ever before. Among the science instruments that would benefit from LunaNet's PNT is the lunar radio telescope [5] as shown in Fig. 3.

[026] With further reference to Fig. 3, the GEO-IPN (301) has the main purpose of acting as a connectivity backbone for IPN ships. More specifically, it acts as a relay for IPN smallsats located not only in cislunar space but also in the inner and outer solar system. It also allows for redirecting signals along its 8 nodes in order to find an available ground station, in case of bad weather or unavailability of a given station. For instance, the GEO-IPN is able to transmit to and receive optical signals from the lunar gateway, LunaNet and the lunar CADRE radio telescope [5, 4].

[027] Fig. 4A shows an exemplary Cis-lunar IPN (400) according to an embodiment of the present disclosure. Cis-lunar IPN (400) comprises (IGN) interplanetary ground network (410) including, for example, ground complexes (420). As an example, IPN ground network (410) may include up to 8 ground complexes spaced approximately 45 degrees apart in longitude. Such ground complexes may be disposed, for example, in Goldstone, California; Stafford, Virginia; Recife Brazil; Madrid, Spain; Mogadishu, Somalia; Singapore, Singapore; Canberra, Australia; and Hawaii. In an embodiment, Cislunar IPN (400) architecture includes nodes around GEO (430) as well as Earth-moon L1 and L2, as shown in Fig. 4A. Each complex of IGN (420) may host at least one optical ground station (as shown in Fig. 4B) and one phase array RF station (as shown in Fig. 4C). Each IGN complex will be dedicated for full-duplex connectivity with its corresponding GEO-IPN node.

[028] With reference to Figs. 3, 4A-4C, the ground terminals are configured to have large optical apertures, for example, 5–8-meter diameter. The IPN (300) of Fig. 3 may also deploy secure browser-based interfaces to users so they can have easy access to their science and commercial data. According to the teachings of the present disclosure, the data rates from deep space missions to increase approximately one order of magnitude per decade for the next 50 years. The first order of magnitude improvement will come from existing plans for radio frequency (RF) communications including enhancements to both spacecraft and Deep Space Network (DSN) facilities. The next two orders of magnitude are predicted to come from the introduction of deep space optical communications.

[029] According to embodiments of the present disclosure, regarding the optical transmission and reception among smallsats, optical receive apertures of between 8 m to 12 m may be provided.

In another embodiment, antennas can be implemented to include an 8 m segmented aperture. By utilizing a low-cost segmented spherical mirror optical design, and by exploiting the already existing extremely stable large radio aperture structures, both of these cost drivers for implementing large optical communications ground terminals can be minimized. For example, two collocated optical antennas could be arrayed to synthesize the performance of, for example, an 11.3 m receive aperture to support more capable or more distant space missions or used separately to communicate with two optical spacecraft simultaneously.

[030] According to a preferred embodiment, optical connectivity is used across the IPN, although RF stations should still be considered in an auxiliary role. The phase array antennas of Fig. 4C, may have relatively large (several meters) diameters, providing graceful degradation and high gain. The phase array antennas of Fig. 4C may operate alone or arrayed together depending on the connectivity need. The IPN ground complexes may be fully interconnected via high-speed fiber optic networks. The optical telescopes deployed in ground terminals are designed be fast and large enough to provide, for example, tens of gigabits. connectivity with spacecraft operating in cislunar and Martian space.

[031] As disclosed above, a building block for the IPN is the use of distributed systems in the form of spacecraft swarms, a cluster of smallsats that are autonomous and carry miniature instruments. By using autonomous and miniaturized systems, the IPN distributed systems should offer lower operational, manufacturing, and mission costs. As an example, each spacecraft may be a 6U or 12U smallsat.

[032] Fig. 5 shows an exemplary smallsat (500) including an (ISOC), inter-spacecraft optical communicator (501), an (LROC) long range optical communicator (502), solar panel (503), and a housing module (504) including electronic devices, instruments, and sensors. More details about functionalities and structure of ISOCs and LROCs can be found in the above-mentioned US Patent No. 10,707,966 B2 and US Patent No. 10,581,525 B2 respectively, both of which are incorporated herein by reference in their entirety.

[033] Implementation of IPNs involves large orbital maneuvering vehicles (OMVs), each containing, for example, 50-100 smallsats, to deploy swarms from low-Earth orbit (LEO) or geosynchronous transfer orbit (GTO) to their final destination. OMVs may be about 5 meters in

diameter and can be launched into space using conventional launching rockets. Once the OMV reaches its target location within the solar system, it will deploy the spacecraft swarm for subsequent insertion into their final orbital destination.

[034] The optical communications systems to be carried by the IPN ships will provide fast connectivity along the solar system. According to the teachings of the present disclosure, pulse position modulation may be employed as the default IPN modulation. Such modulation has been analyzed by the inventor and various capacity equations based on Poisson channel models have been evaluated. Analysis of optical data rate (capacity) as a function of received power showed three modes of operations for the optical terminal, namely: bandwidth-limited, quantum-limited and noise limited. Performance is greatly improved in terms of capacity by using large spacecraft swarms. Families of capacity plots have been developed as a function of range for various PPM conditions. These preliminary results show that near gigabit connectivity could be achieved in the cislunar and inner solar system IPN subnets, whereas multi-megabit communications can be achieved along the outer solar system planets.

[035] Fig. 6A shows an image of the planets' location along the solar system for February 2022 when Saturn is in conjunction with and farthest away from Earth. Also shown is a potential connectivity path between Saturn and Earth via several IPN nodes. Fig. 6B shows possible data rates between IPN nodes and the associated latency for the same Saturn- Earth data link. For the sake of simplicity only 3 nodes (swarms) per planet are shown. Due to the longer distance in play, connectivity between Saturn and Jupiter L5 node is the slowest (about 40 Mbps). The link latency is 98 minutes as shown. When uninterrupted connectivity is required among IPN nodes, the maximum data rate of the entire link would be dictated by the slowest link (i.e., about 40 Mbps).

[036] The spacecraft swarms deployed as part of an IPN may be small (e.g. CubeSats®), affordable and could include integrated propulsion, telecommunications and sensor payloads. The disclosed IPN spacecraft swarms can be configured to relay information from assets orbiting planets (or located on planetary surfaces) to Earth. In addition, the IPN swarms can be furnished with suitable sensors to form a large science platform for observation, visitation, and an increase in knowledge and understanding of the solar system.

[037] Fig. 7 shows an exemplary spacecraft swarm (700) including a leader spacecraft (701) disposed in the middle of the swarm (700) and one or more follower spacecrafts (702) surrounding the leader spacecraft (700). Each of the spacecraft (701, 702) implement an ISOC which uses an array of optical detectors distributed along its spherically shaped body to continuously determine the angle-of-arrival (AOA) of the laser beams produced by the other spacecraft. The AOA algorithm allows for calculation of the azimuth and elevation of each incoming optical beam. These angles can be calculated with millidegree accuracy. Range between spacecraft can be calculated with additional processing. The ISOCs, in addition to providing super-fast communications, provide means for measuring the position (r, ϕ, θ) of the surrounding ships. The leader spacecraft (701) is able to collect the positional information of the other spacecraft within the swarm using its respective ISOC. Position information is to be gathered continuously (e.g. several times per second) so that information about the location of each spacecraft within the swarm (700) is known at all times. In other words, the ISOC allows for continuous metrology (calculation of (r, ϕ, θ)) among spacecraft forming a swarm. This is further described in what follows.

[038] With continued reference to Fig. 7, according to an embodiment of the present disclosure, the follower spacecrafts (702) turn on their lasers intermittently (every few milliseconds) in the direction of the leader spacecraft (701). The leader spacecraft ISOC, every time it detects a laser beam, calculates azimuth, elevation and range of the follower spacecraft generator of that beam, hence obtaining (r, ϕ, θ) coordinates of that ship. Because ISOC uses a fast FPGA processor, r, ϕ , and θ could be updated every microsecond - however, ISOC updates are typically obtained every millisecond. The metrology protocol runs continuously on the leader so that position information of the entire swarm is updated hundreds of times per second.

[039] In addition to playing a role of network communication nodes, the swarms as disclosed, will also operate as a distributed science instrument. In an embodiment, each IPN spacecraft will carry a suite of miniaturized instruments to perform unique science by unique collecting spatio-temporal measurements.

[040] Spacecraft formation flying is poised to improve the design of future space missions by reducing cost and enhancing capabilities simultaneously. According to the teachings of the

present disclosure, formation flying is a concept of distributing the functionality of large spacecraft among several smaller, less expensive, cooperative smallsats. In a spacecraft swarm, multiple spacecrafts can work together in a group to accomplish the objective of one larger, usually more expensive, satellite. Coordinating smaller spacecrafts has many benefits over single larger spacecraft including simpler designs, faster build times, cheaper replacement creating higher redundancy, unprecedented high resolution, and the ability to view research targets from multiple angles or at multiple times. These qualities make them suitable for astronomy, communications, meteorology, and environmental uses.

[041] As previously disclosed, each IPN swarm includes a large number of smallsats, for example, in the range of 50 to 100 spacecrafts per swarm. In various embodiments, each smallsat may be 6U or 12U and weigh between 10 to 20 kilograms. The smaller swarms may be made of 12U smallsats whereas the larger ones may be formed by 6U ships. This means that the largest swarms may have a total mass of about 1000 kg.

[042] According to embodiments of the present disclosure, the spacecraft swarms may be deployed to orbit a target planet itself or to orbit its Lagrange points. In an exemplary swarm arrangement for orbiting planetary bodies is described in more details.

[043] According to the teachings of the present disclosure, each swarm acts as a network node. In an embodiment, a smallsat similar to smallsat (500) of Fig. 5 may be implemented. Each smallsat uses an ISOC for intranet connectivity and a long-range optical communicator (LROC) for long-range internet connectivity. In order to use relay nodes along the solar system, IPN smallsats may use optical apertures with large diameters (e.g., diameters in the 0.5 to 2m range) or use large amount of transmit power. This would be challenging to achieve with a single terminal like LROC.

[044] Fig. 8A shows an exemplary IPN swarm (800) arrangement where each spacecraft is furnished with both ISOC and LROC optical terminals. For the sake of example and not of limitation, all terminals are assumed to have identical performance and are pointing in the same direction. It is also assumed that there are $\sqrt{n}$ rows and $\sqrt{n}$ columns of spacecraft in the swarm which yields a total of n terminals. Under these assumptions, the total transmitted power by the swarm, P_t^s , is given by,

$$P_t^s = \eta_{ct} \sum_i^n P_{t_i} \quad (1)$$

where P_{t_i} is the power transmitted by the i^{th} terminal and η_{ct} is the power combining efficiency of the transmit swarm. If all terminals transmit the same amount of power (i.e., $P_{t_1} = P_{t_2} = \dots = P_{t_n}$) then,

$$P_t^s = \eta_{ct} n P_t \quad (2)$$

The combining efficiency $\eta_{ct} \leq 1$ accounts for any mismatch and misalignment within the array.

[045] It should be noted that the power combining discussed above does not need to be coherent at the optical level. There just is a need to synchronize the modulating optical pulses produced by each transmit terminal. In this case, the duration of the optical pulses could range from tens of picoseconds to nanoseconds. In order for each spacecraft to emit an optical pulse at the same time, there should be a way to synchronize the emission of these pulses. In an embodiment, in order to synchronize the transmit pulses the ISOCs are used as means to send a trigger signal from the swarm leader to the followers. In another embodiment, this is performed by using very accurate clocks on each spacecraft. If the clocks are very accurate, they can emit pulses at preset times. Also, each smallsat may have knowledge of its distance (range) to the leader so that it can apply the appropriate delay before it emits its optical pulse.

[046] With further reference to Fig. 8A, on the receiver swarm, the power received by a total of m terminals is now given by

$$P_r^s = \eta_{cr} \sum_i^m P_{r_i} \quad (3)$$

where P_{r_i} is the power received by the i^{th} terminal and η_{cr} is the combining efficiency of the receive swarm. Similar to the transmit side, assuming all terminals capture the same amount of power (i.e., $P_{r_1} = P_{r_2} = \dots = P_{r_m}$), the total power received by the receive swarm, P_{s_r} , is given by

$$P_r^s = \eta_{cr} m P_r \quad (4)$$

[047] On the receive swarm, each of the smallsats will receive an amount of power P_r . The information about the power level measured by each smallsat would need to be shared with the leader (either via analog or digital signals) so it can be power-combined by the leader in order to determine the total amount of power received by the swarm. The noise in the detection system of each smallsat may play a bit role on the measurement of the detected power. Care must be taken in order to minimize or reduce optical noise on each receiver.

[048] Fig. 8B illustrates graphically what was disclosed above in terms of synchronizing the transmit and receive swarms. When all the smallsats are synchronized to transmit or receive optical signals, the connectivity performance of the IPN node is substantially improved. On transmit, the total transmitted power could be increase by a factor of n . On receive, the received power could also be increased by a factor of m (where n and m are the number of smallsats in the transmit and receive swarm, respectively). The synchronized swarms allow the IPN nodes to connect at distances of several astronomical units.

[049] The IPNs as disclosed, may also be used as a space positioning system (SPS), wherein larger spacecrafts and smallsats roaming the solar system will use an ISOC to communicate with the IPN nodes. In such system, both larger spacecrafts and smallsats, using their ISOCs, could receive beams from one or several IPN nodes to determine their position within the solar system. The position of each IPN node will be known based on standard position information obtained from terrestrial stations such as NASA's Deep Space Network (DSN).

[050] In other embodiments, the disclosed IPNs may be used as part of a space bistatic radar deploying a large transmitter on the ground. The IPN nodes are used as receivers for detecting asteroids and space assets. Each smallsat forming the IPN node may have a receiver that works at the same frequency as the transmitter. Such radar can be used for planetary defense and debris monitoring.

[051] All of the references in the present application, shown in the reference list below, are incorporated herein by reference in their entirety.

References

[1] JUNO Mission to Jupiter. <https://www.jpl.nasa.gov/missions/juno/>

- [2] InSight Mission to Mars. <https://www.jpl.nasa.gov/missions/insight/>
- [3] The Deep Space Network. <https://deepspace.jpl.nasa.gov/>
- [4] M. de Kok, J. E. Velazco, and M. J. Bentum, "CubeSat Array for Detection of RF Emissions from Exoplanets using Inter-Satellites Optical Communicators," in IEEE Aerospace Conference Proceedings, 2020.
- [5] Israel, D. et.al, 2020. "LunaNet: a Flexible and Extensible Lunar Exploration Communications and Navigation Infrastructure and the Inclusion of SmallSat Platforms," Proceedings of the AIAA/USU Conference on Small Satellites, Communications, SSC20-XII-03. <http://digitalcommons.usu.edu/smallsat/2020/all2020/171/>.

CLAIMS

1. An interplanetary satellite network (IPN) deployed across a plurality of planets of a solar system, the IPN comprising a plurality of miniaturized satellite swarms, each swarm forming a node of the IPN, the node being located at a Lagrange point of a corresponding planet with reference to the Sun, and wherein:

the plurality of planets comprises Earth, Mercury, Venus, Mars, Jupiter, Saturn, Uranus, Neptune and Pluto, and

each miniaturized satellite is configured to optically communicate with miniaturized satellites of a same swarm and miniaturized satellites of other swarms of the IPN.

2. The IPN of claim 1, comprising a first subnetwork deployed across an inner solar system, a second subnetwork deployed across an outer solar system, and a cislunar subnetwork.

3. The IPN of claim 2, wherein the cislunar subnetwork comprises a geostationary orbit subnetwork including a set of miniaturized satellite swarms equally spaced along a geostationary orbit.

4. The IPN of claim 3, wherein the cislunar subnetwork comprises a gateway, a lunar radio telescope disposed at a second Earth-Moon Lagrange point, lunar ground assets including robots and rovers, and Earth ground stations.

5. The IPN of claim 4, wherein the miniaturized satellite swarms of the cislunar subnetwork are configured for connection to the lunar ground assets.

6. The IPN of claim 4, wherein the gateway is configured to establish communications between the lunar ground assets and Earth ground stations.

7. The IPN of any one of claims 1-6, wherein each miniaturized satellite swarm comprises:

an inter-spacecraft optical communicator configured to establish optical communication among miniaturized satellites within the same swarm; and

a long range optical communicator configured to establish optical communications among miniaturized satellites of different swarms.

8. The IPN of claim 7, further comprising solar panels.

9. The IPN of any one of claims 1-6, wherein transmission and reception of signals by the miniaturized satellites are synchronized to produce a desired optical synthetic aperture.

10. The IPN of claim 3, further comprising a ground network comprising eight ground complexes arranged 45-degrees apart in longitude.

11. The IPN of claim 10, wherein each ground complex comprises optical stations configured to provide a duplex connectivity with the swarms of the geostationary orbit IPN.

12. The IPN of claim 11, wherein each ground complex further comprises an auxiliary phased-array antenna station.

13. The IPN of any one of claims 1-6, implemented as a space positioning system, the IPN further comprising one or more additional spacecrafts, and wherein:

each miniaturized satellite and the one or more additional spacecrafts are configured to receive optical beams from one or more nodes of the IPN to determine a position of the miniaturized satellite and the one or more additional spacecrafts in the solar system, and

position of each of the IPN nodes is obtained based on a standard position information obtained from terrestrial stations including NASA's deep space network.

14. The IPN of any one of claims 1-6, implemented as a bistatic radar comprising:

a transmit radar on Earth ground, the transmit radar having a transmit frequency, wherein each miniaturized satellite comprises a receiver tunable at a same frequency as the transmit frequency.

1/12

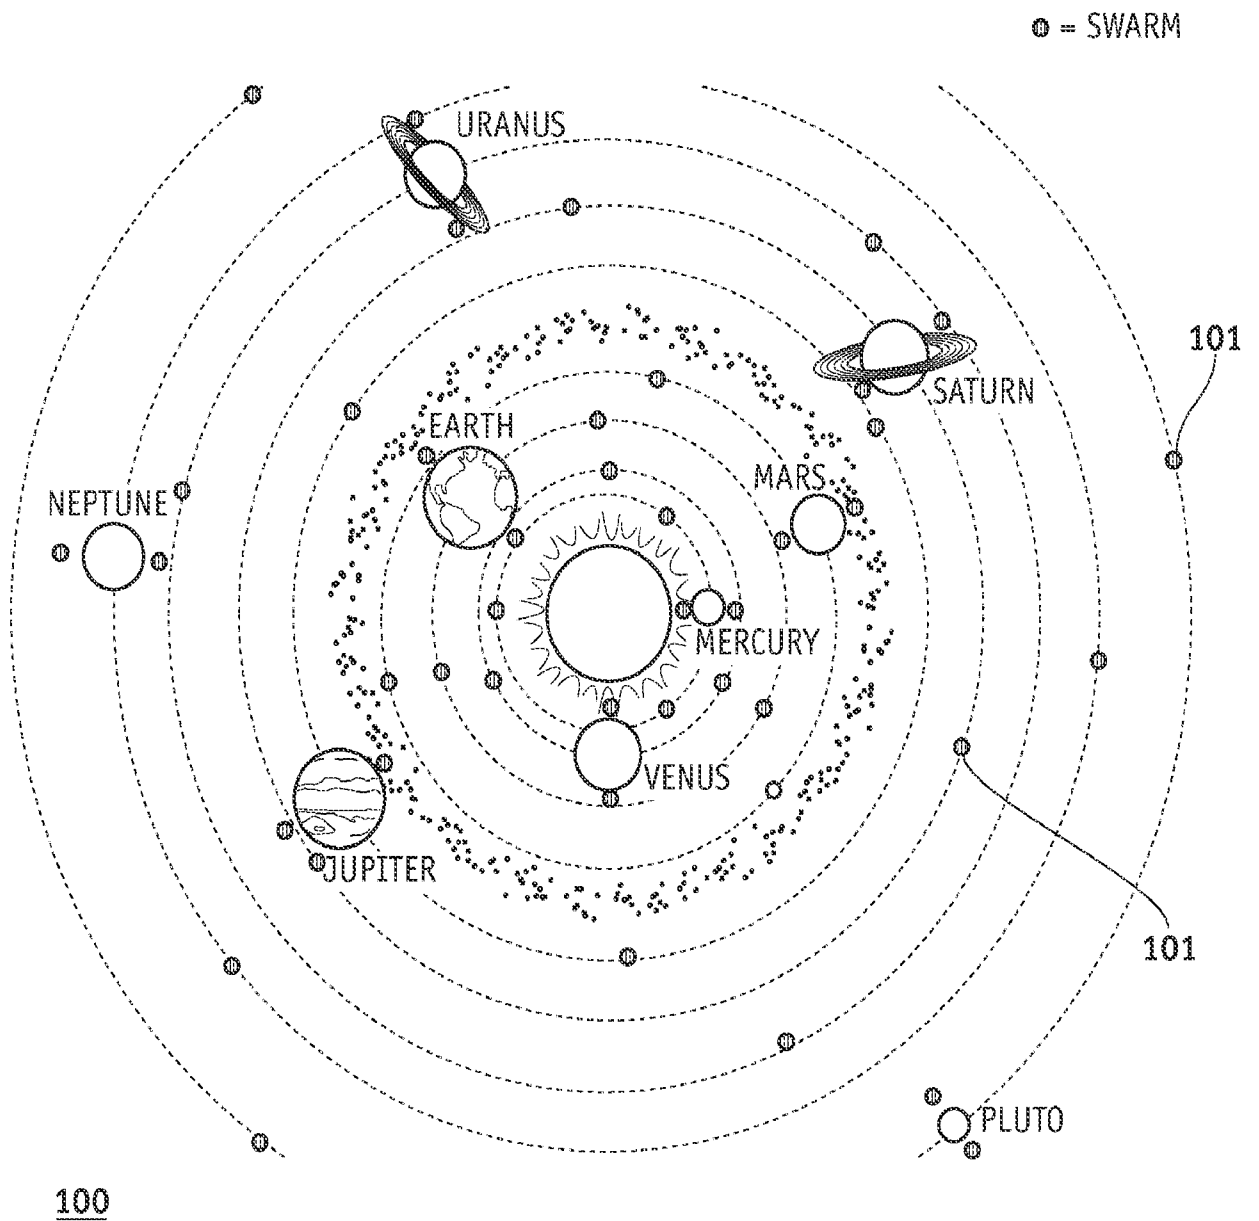


FIG. 1A

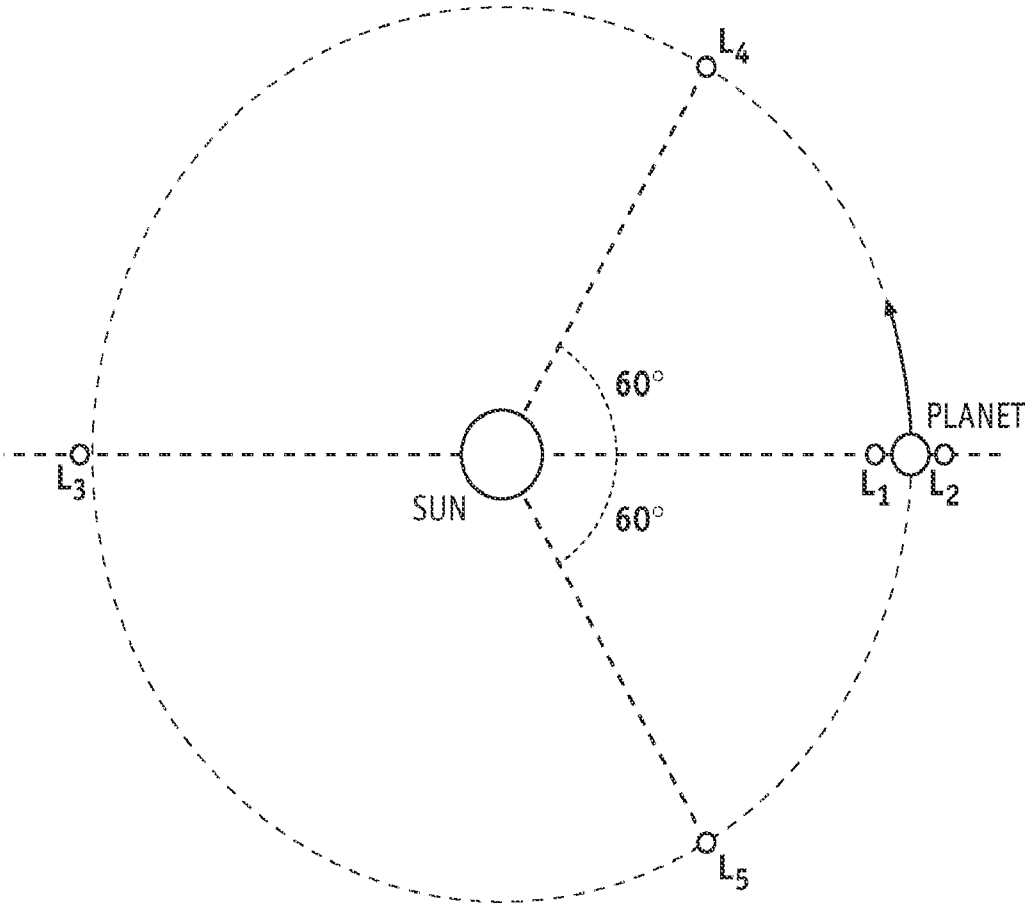


FIG. 1B

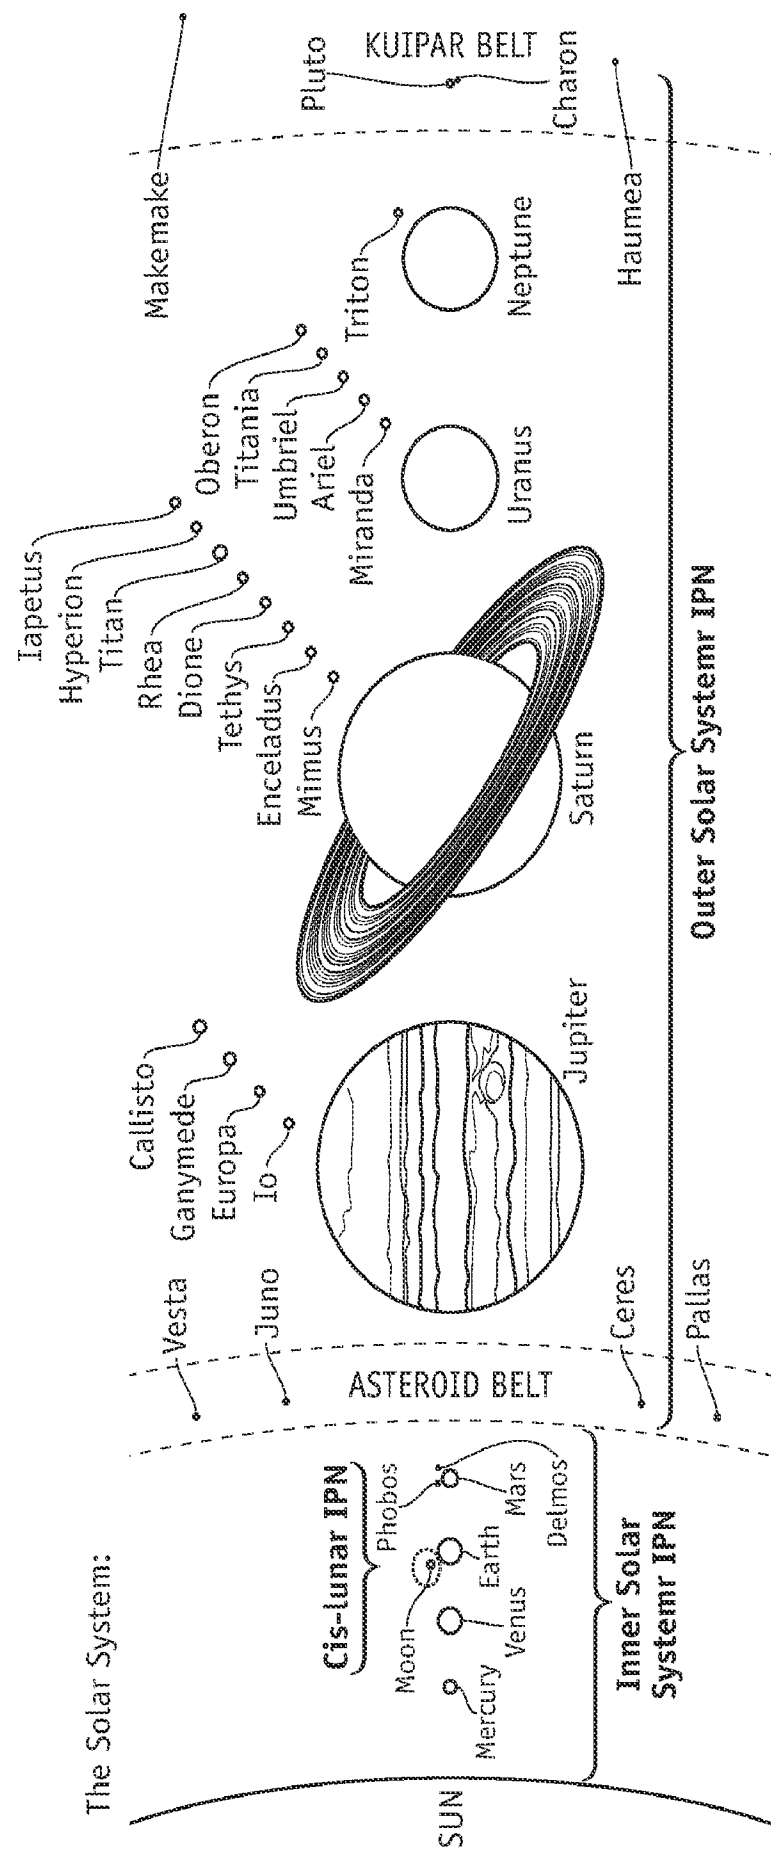


FIG. 2


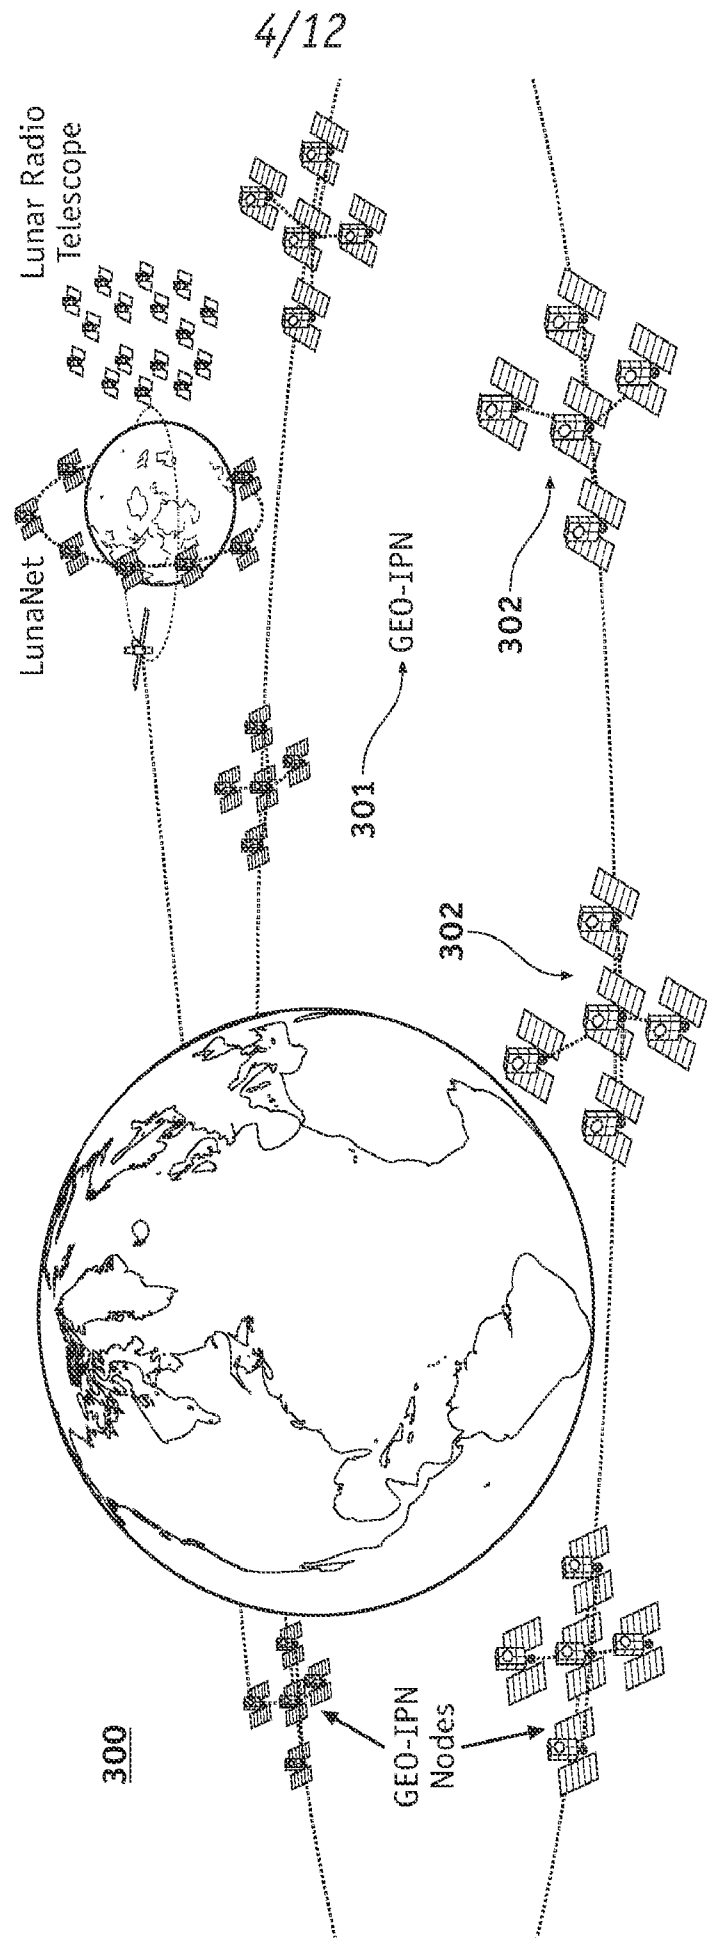


FIG. 3

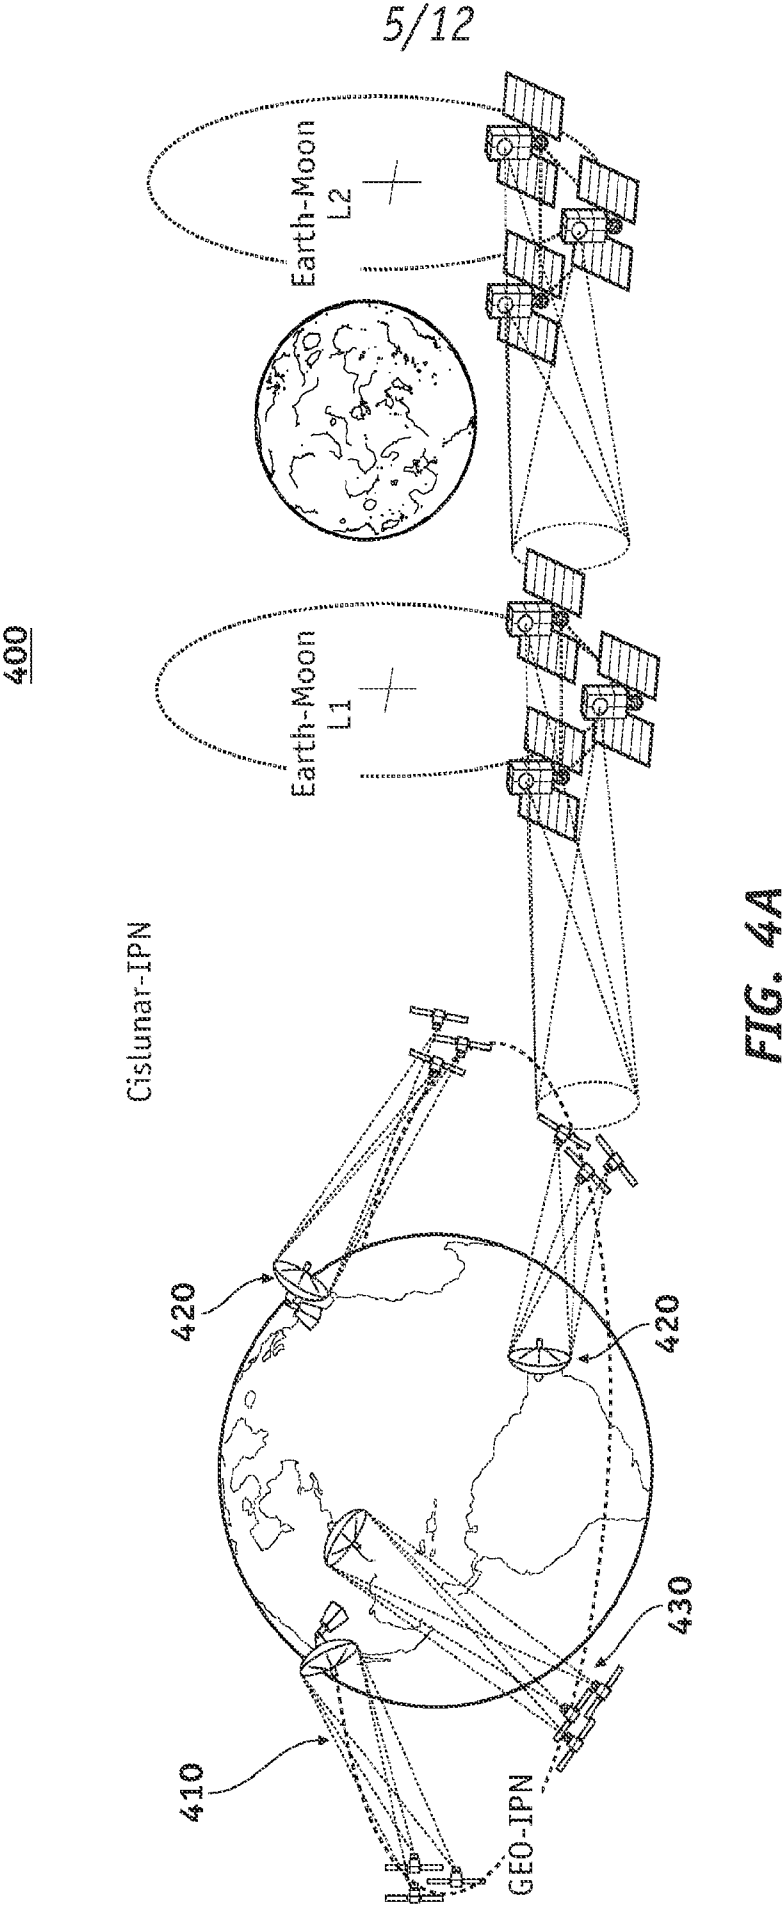

6/12

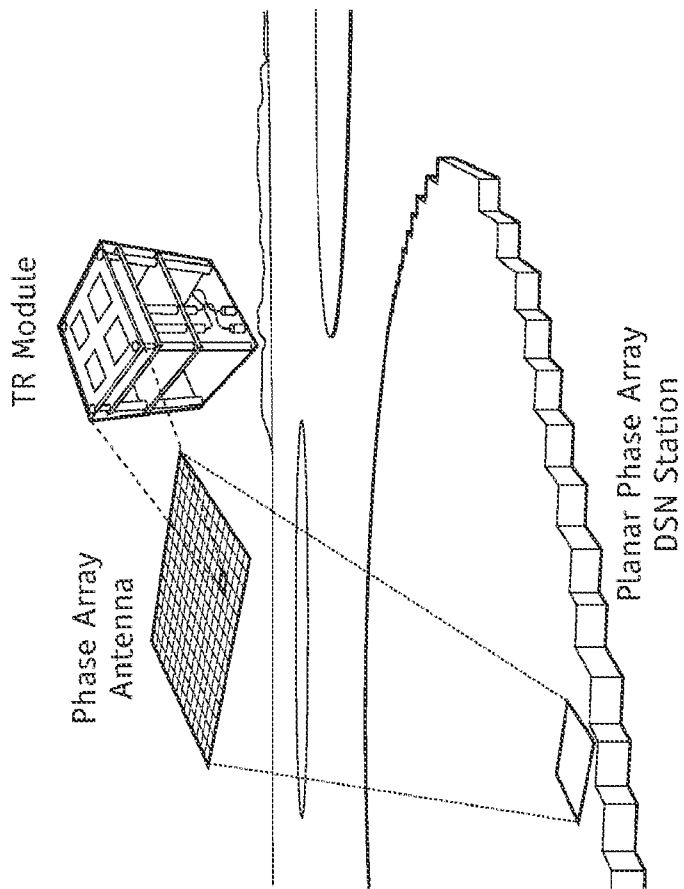


FIG. 4C

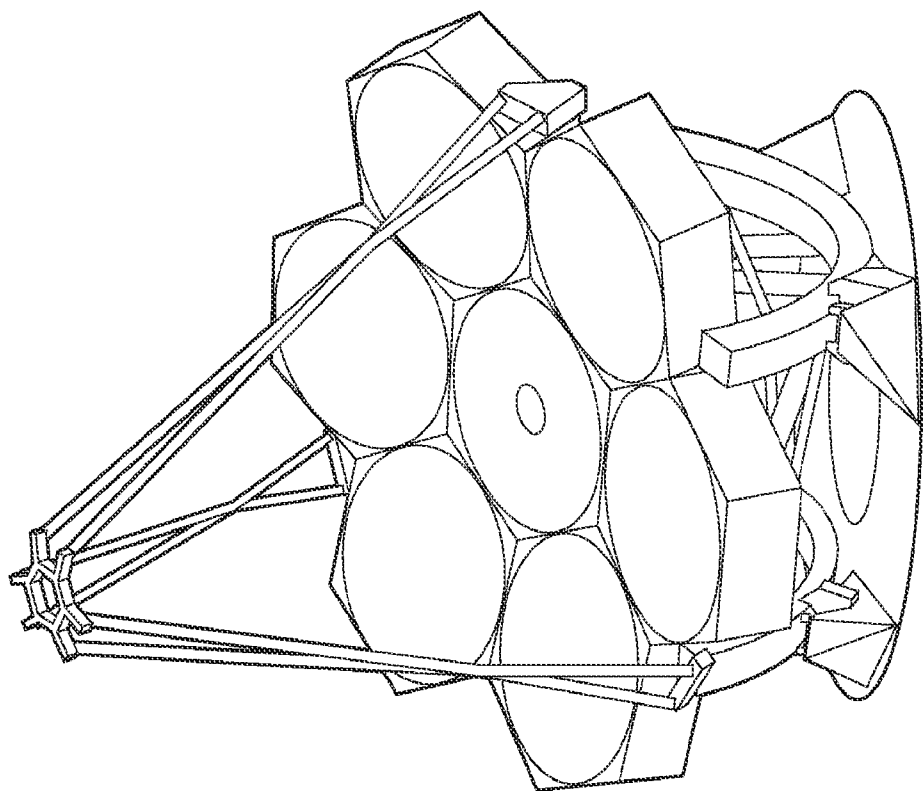
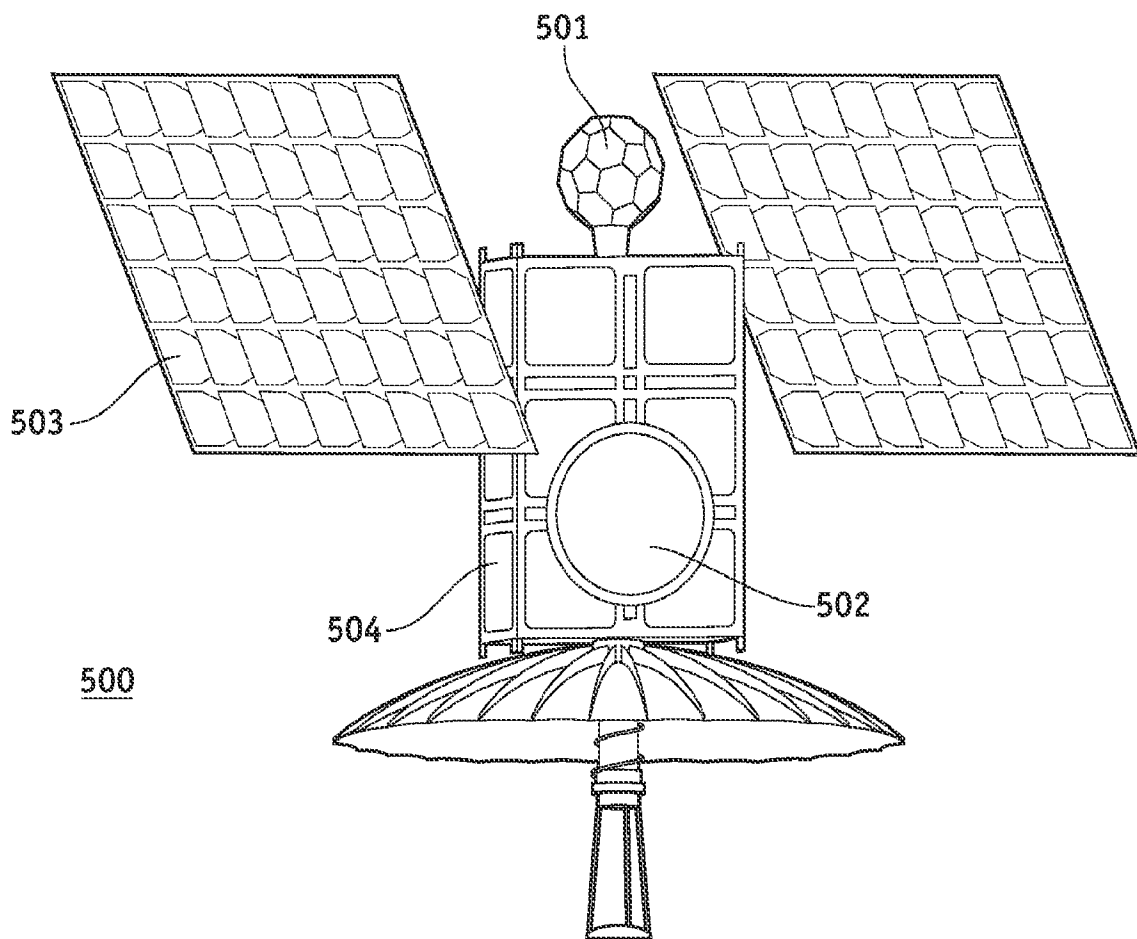


FIG. 4B

7/12

**FIG. 5**

8/12

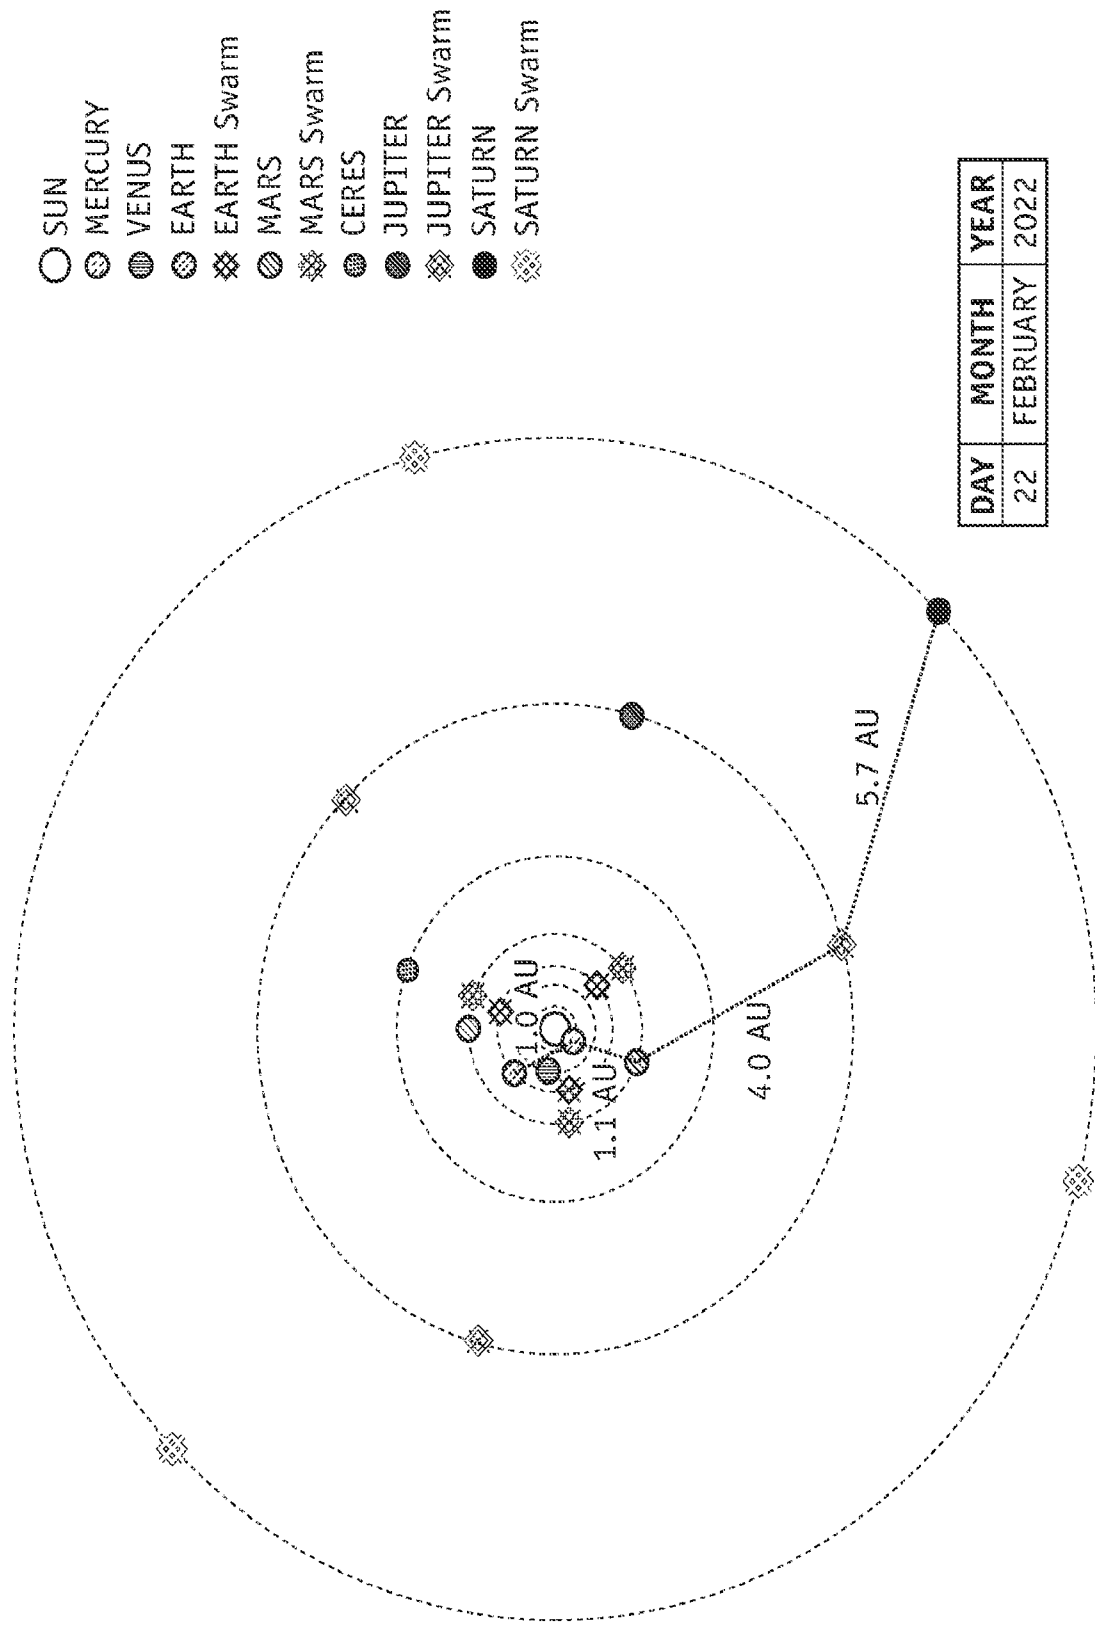


FIG. 6A

9/12

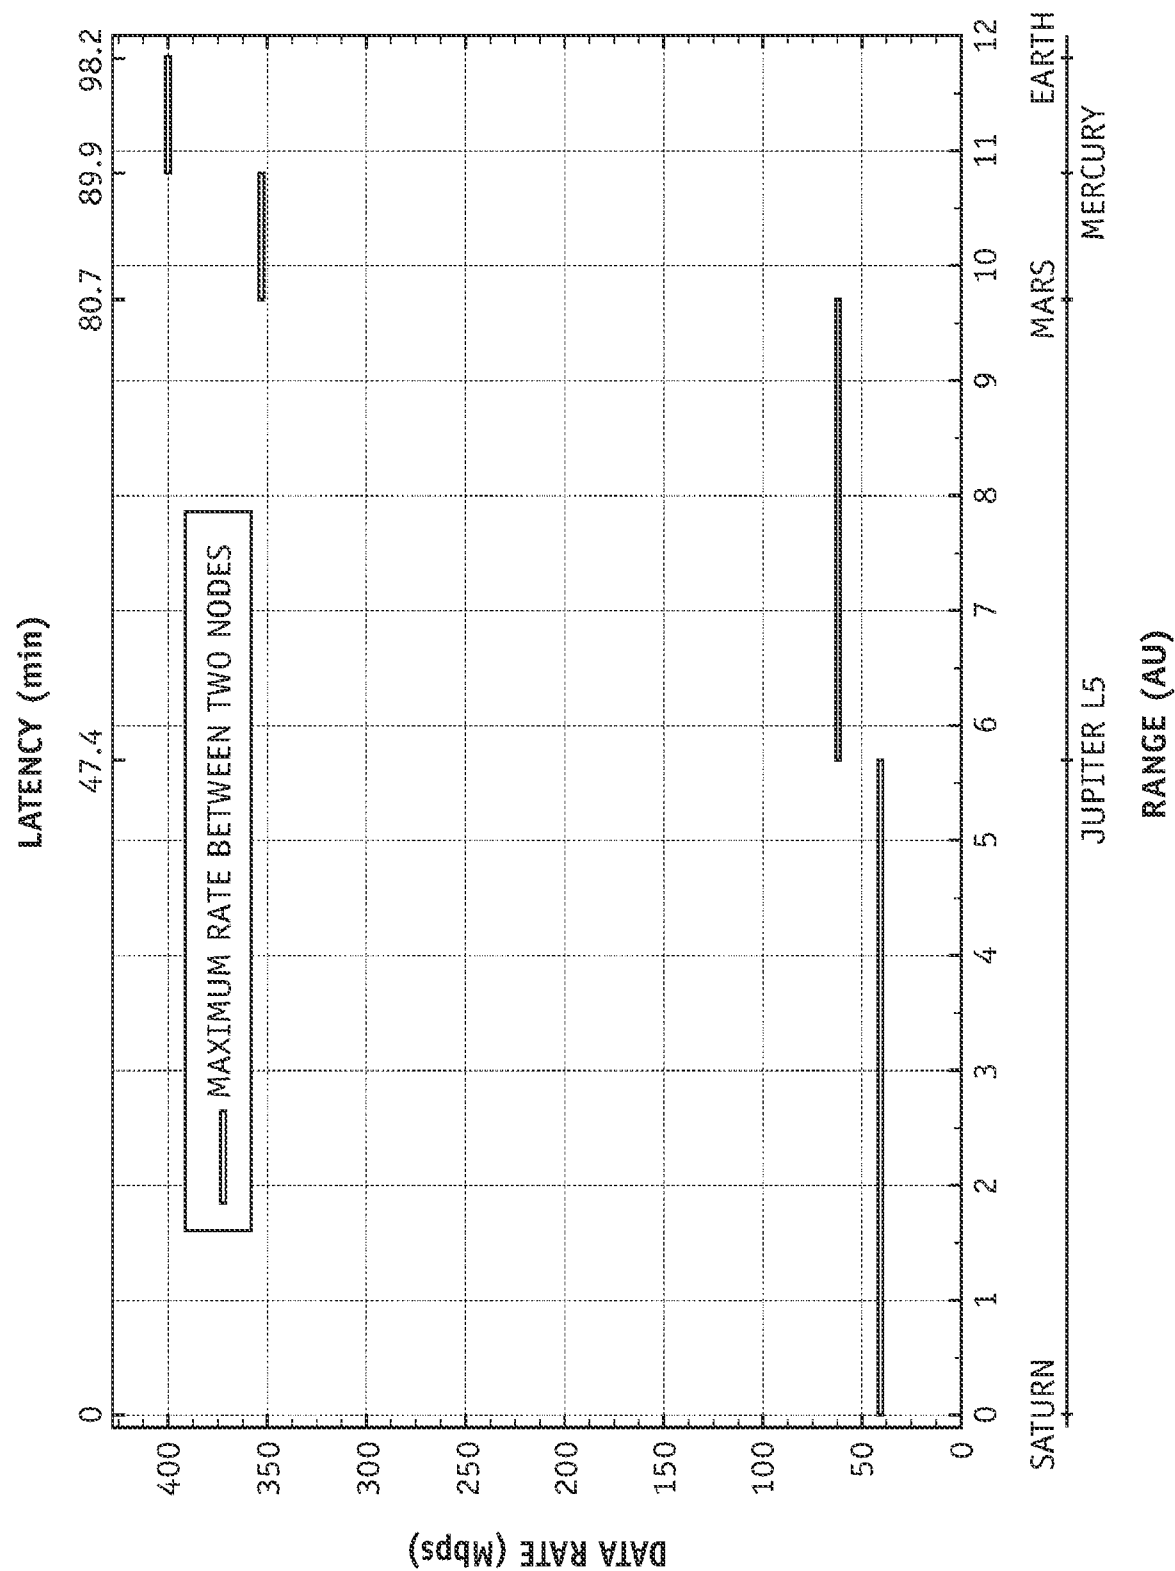


FIG. 6B

10/12

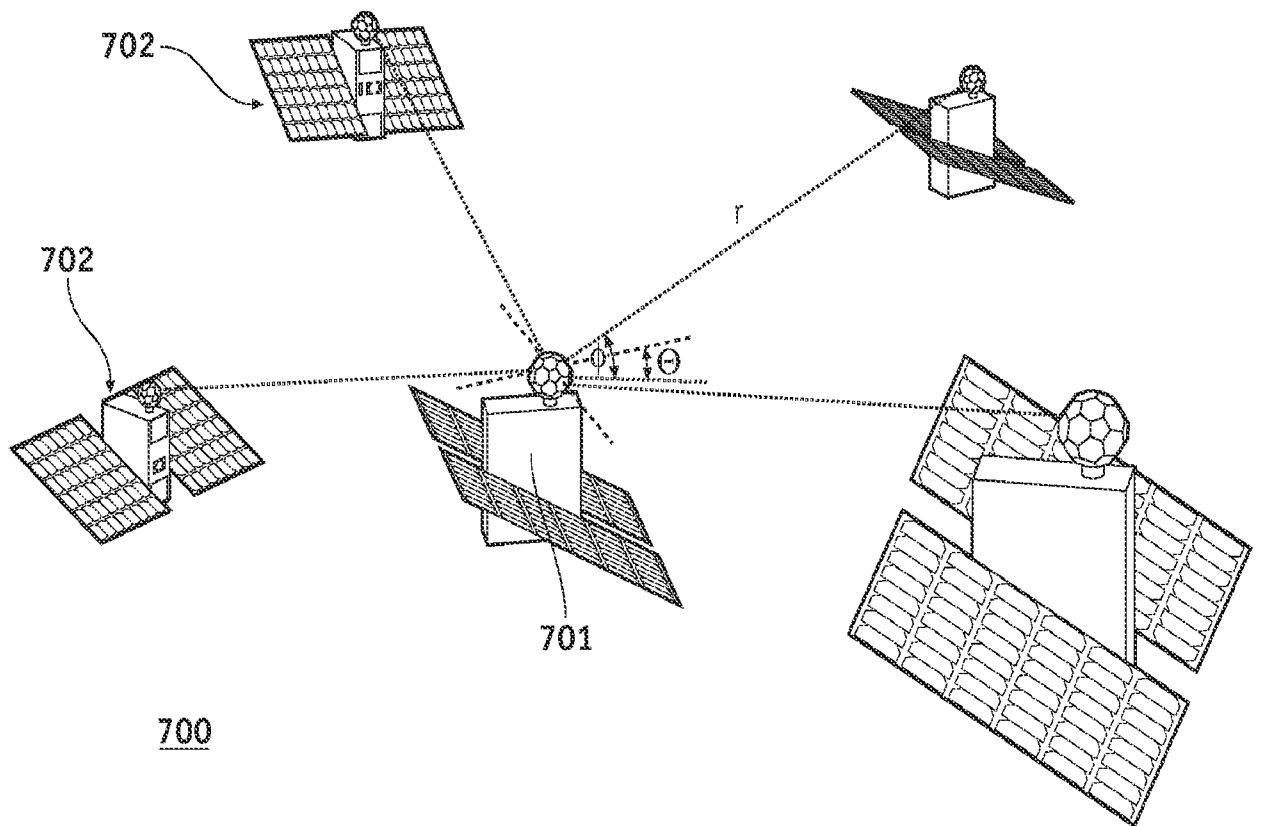


FIG. 7

11/12

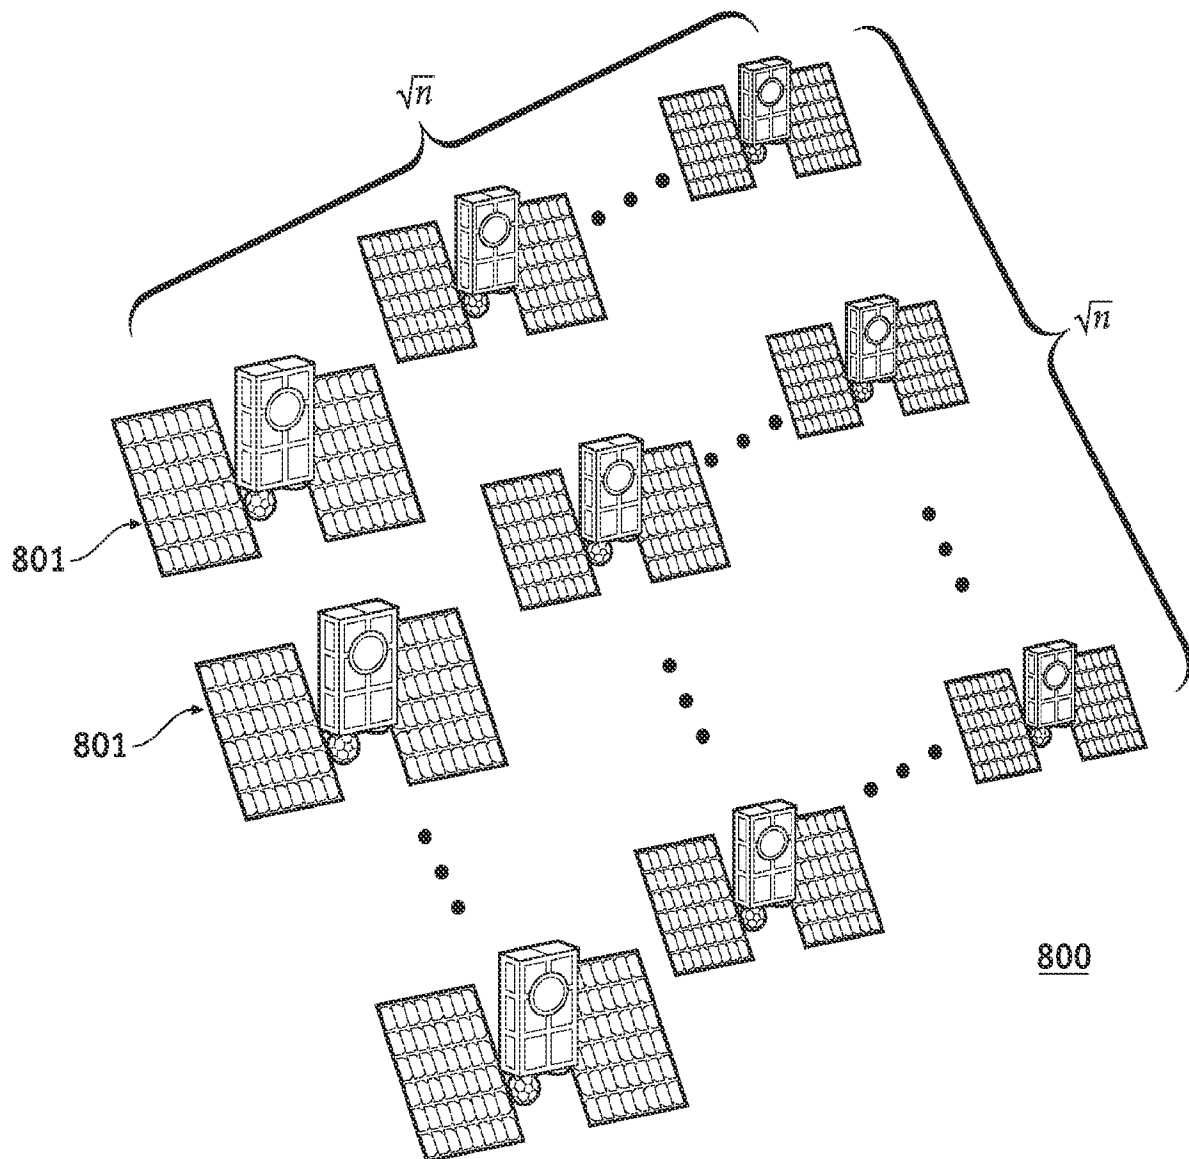


FIG. 8A

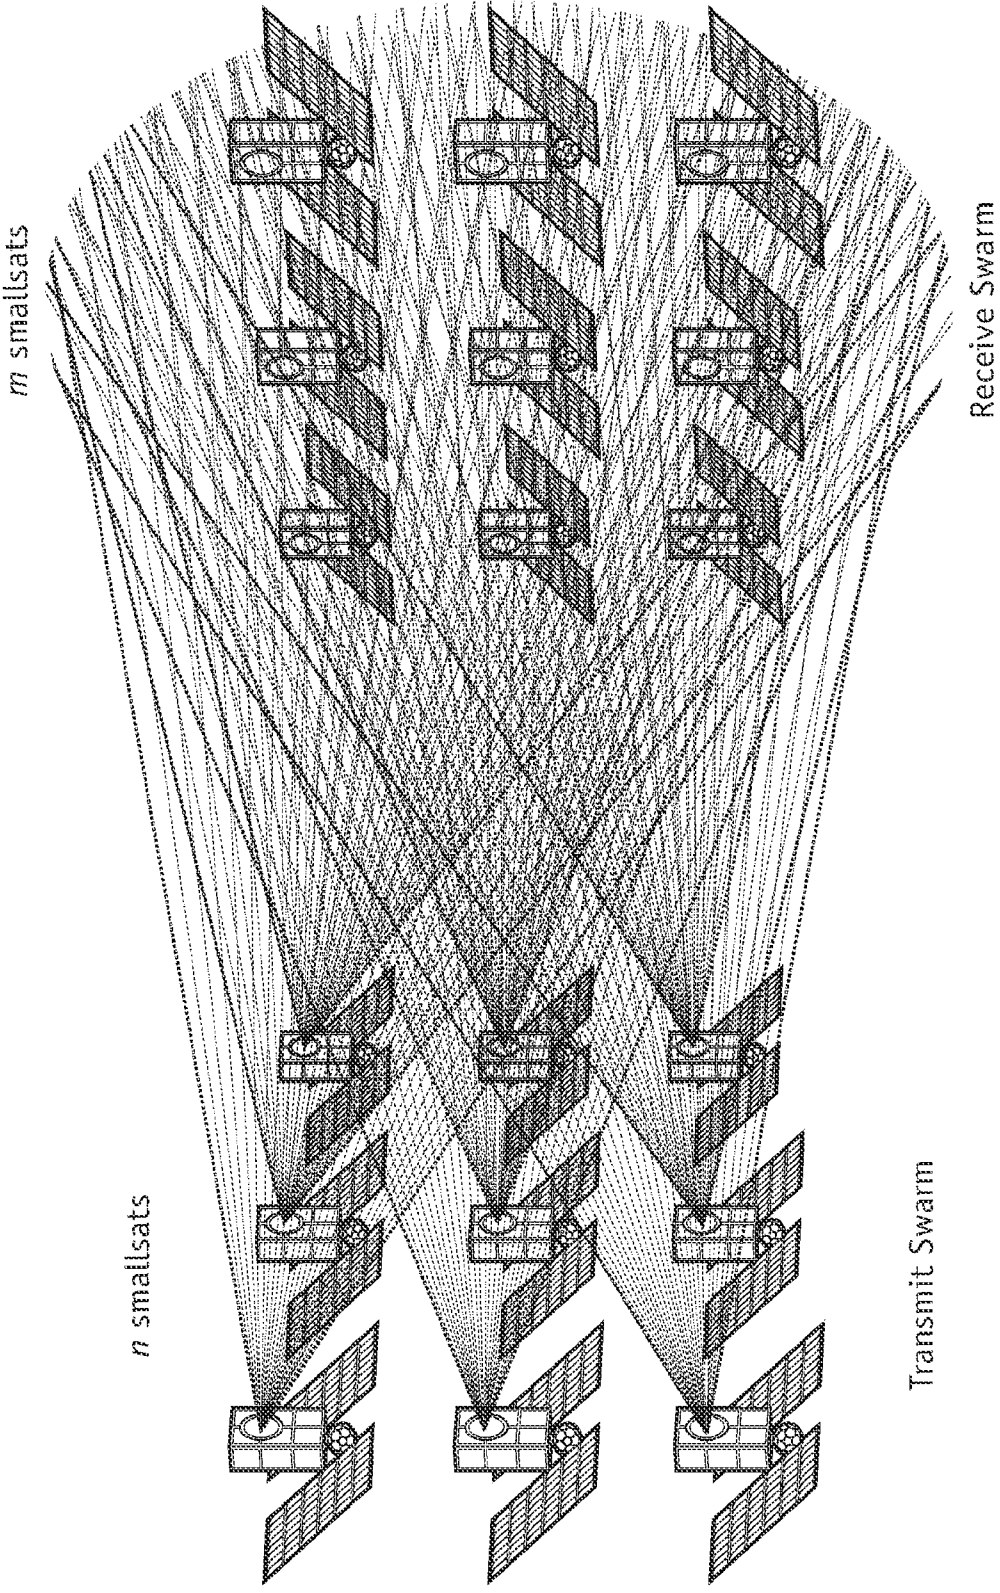


FIG. 8B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2022/020611

A. CLASSIFICATION OF SUBJECT MATTER**G01S 19/02(2010.01)i; H04B 10/118(2013.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01S 19/02(2010.01); G01S 19/17(2010.01); G01S 19/25(2010.01); H04B 7/185(2006.01); H04Q 11/00(2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: interplanetary, network, satellite, swarm, Lagrange point

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JOSE VELAZCO, An Inter Planetary Network Enabled by SmallSats, 2020 IEEE Aerospace Conference, pages 1-10, 07 March 2020 [Retrieved on 2022-06-09]. Retrieved from < https://trs.jpl.nasa.gov/handle/2014/52284 > Pages 1-7, and figures 1-14	1-14
A	US 2008-0151811 A1 (HERSHAM EL-DAMHOUGY et al.) 26 June 2008 (2008-06-26) Paragraphs [0025]-[0058]; claims 1-59; and figures 1A-8	1-14
A	US 2017-0280211 A1 (LONESTAR, LLC) 28 September 2017 (2017-09-28) Paragraphs [0131]-[0166]; claims 1-67; and figures 1-17	1-14
A	KR 10-1701638 B1 (KYUNGPOOK NATIONAL UNIVERSITY INDUSTRY-ACADEMIC COOPERATION FOUNDATION) 13 February 2017 (2017-02-13) Paragraphs [0018]-[0045]; claim 1; and figures 1-4	1-14
A	US 2009-0154391 A1 (THOMAS WITTENSCHLAEGER) 18 June 2009 (2009-06-18) Paragraphs [0024]-[0072]; claims 1-18; and figures 1-3	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“D” document cited by the applicant in the international application

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

01 July 2022

Date of mailing of the international search report

04 July 2022

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon
35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

PARK, HYE LYUN

Telephone No. +82--

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2022/020611

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2008-0151811	A1	26 June 2008	US	10142013	B2	27 November 2018
				US	2008-0151913	A1	26 June 2008
				US	2008-0155070	A1	26 June 2008
				US	7764622	B2	27 July 2010
				US	7881217	B2	01 February 2011
US	2017-0280211	A1	28 September 2017	CN	109074244	A	21 December 2018
				EP	3433939	A1	30 January 2019
				EP	3433939	A4	11 December 2019
				EP	3745604	A1	02 December 2020
				EP	3745605	A1	02 December 2020
				JP	2019-134469	A	08 August 2019
				JP	2019-513331	A	23 May 2019
				JP	2021-101586	A	08 July 2021
				JP	2021-101587	A	08 July 2021
				JP	2021-106411	A	26 July 2021
				JP	2021-106412	A	26 July 2021
				JP	6921851	B2	18 August 2021
				KR	10-2018-0138206	A	28 December 2018
				KR	10-2019-0025049	A	08 March 2019
				KR	10-2021-0108498	A	02 September 2021
				KR	10-2139878	B1	03 August 2020
				KR	10-2296202	B1	02 September 2021
				US	10812880	B2	20 October 2020
				US	11190858	B2	30 November 2021
				US	2019-0166414	A1	30 May 2019
				US	2022-0038797	A1	03 February 2022
				WO	2017-165429	A1	28 September 2017
KR	10-1701638	B1	13 February 2017	None			
US	2009-0154391	A1	18 June 2009	US	10321509	B2	11 June 2019
				US	10349461	B2	09 July 2019
				US	10721126	B2	21 July 2020
				US	11019673	B2	25 May 2021
				US	2009-0154454	A1	18 June 2009
				US	2009-0157860	A1	18 June 2009
				US	2009-0198792	A1	06 August 2009
				US	2009-0198836	A1	06 August 2009
				US	2009-0316619	A1	24 December 2009
				US	2009-0327446	A1	31 December 2009
				US	2010-0312913	A1	09 December 2010
				US	2011-0161527	A1	30 June 2011
				US	2012-0207016	A1	16 August 2012
				US	2013-0308602	A1	21 November 2013
				US	2014-0359094	A1	04 December 2014
				US	2017-0195927	A1	06 July 2017
				US	2017-0295061	A1	12 October 2017
				US	2018-0054766	A1	22 February 2018
				US	2018-0160350	A1	07 June 2018
				US	2019-0335526	A1	31 October 2019
				US	7548545	B1	16 June 2009
				US	7548556	B1	16 June 2009

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2022/020611

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		US 7599314 B2	06 October 2009
		US 7603428 B2	13 October 2009
		US 7904602 B2	08 March 2011
		US 8189496 B2	29 May 2012
		US 8296465 B2	23 October 2012
		US 8364744 B2	29 January 2013
		US 8493889 B2	23 July 2013
		US 8862706 B2	14 October 2014
		US 9642179 B2	02 May 2017
		US 9736052 B2	15 August 2017
		US 9813959 B2	07 November 2017