

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

19 December 2019 (19.12.2019)



(10) International Publication Number

WO 2019/241806 A2

(51) International Patent Classification:

Not classified

(21) International Application Number:

PCT/US2019/043533

(22) International Filing Date:

25 July 2019 (25.07.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/676,839

25 May 2018 (25.05.2018)

US

(71) Applicant: WILDCAT OIL TOOLS, LLC [US/US]; 706

N Colorado St., Midland, TX 79701 (US).

(72) Inventor: ALLEY, Mark F.; 2170 Buckthorne Place, Ste

240, The Woodlands, TX 77380 (US).

(74) Agent: HULSEY, William, N., III; Hulsey, P.C., PO Box

161238, Austin, TX 78716 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: DOWNHOLE ELECTRONIC TRIGGERING AND ACTUATION MECHANISM

(57) Abstract: A triggering mechanism for downhole equipment includes a housing for inserting downhole in an oilfield wellbore and associating downhole with a computer processor, a clock, at least one sensor circuit, and an electrical power source. The computer processor includes computer processing circuitry and a computer readable memory circuit. The sensor circuit senses at least a pressure parameter associated with the pressure within the oilfield wellbore downhole environment. A valve control circuit controls a valve and controls flow of control fluid to a hydromechanical device operating in association with the downhole tool within the oilfield wellbore. The valve control commands derive from real-time sampling of the downhole physical parameters to form ratio-based derivative values relating to physical parameter differences over a predetermined time span. In response to the ratio-based derivative values, the triggering mechanism generates triggering commands for flowing the control fluid to the associated hydromechanical device.



WO 2019/241806 A2

DOWNHOLE ELECTRONIC TRIGGERING AND ACTUATION MECHANISM

CROSS REFERENCE TO RELATED APPLICATIONS

[001] This application claims the benefit of the following patent applications:

- U.S. Provisional Patent Application 62/696,423 entitled “Dual-Action Hydraulically Operable Anchor,” filed on July 11, 2018 with Attorney Docket No. WILD002USP, which is here expressly incorporated by reference;
- 5 • U.S. Provisional Patent Application 62/696,750 entitled “Dual-Action Hydraulically Operable Anchor,” filed on July 11, 2018, also with Attorney Docket No. WILD002USP, which is here expressly incorporated by reference;

FIELD OF THE DISCLOSURE

- 10 The present disclosure relates generally to oilfield drilling and completion equipment and more particularly to downhole electronic triggering apparatus for use in harsh environments, such as downhole in a wellbore in the oil and gas industry, in conjunction with other electro-mechanical components requiring conditional actuation.

BACKGROUND OF THE DISCLOSURE

- 15 [002] In the oil and gas industry, wellbores deviating from the vertical or perpendicular-to-the-surface plane to the horizontal plane have become increasingly common. Such horizontal or lateral wellbores are standard in hydrocarbon wells drilled into shale rock formations in the United States.
- 20 [003] Many situations arise in complex lateral wells in which a conditional actuation of a downhole tool could be very beneficial, with whipstocks being a key example. When drilling a lateral well, it is necessary to place a whipstock in the wellbore so that a drilling bit may be directed out of the vertical plane and traverse into a horizontal—or relatively horizontal or lateral—plane. Anchoring systems, or “anchors,” are common in the industry, serving to
- 25 hold the whipstock in place, either temporarily or permanently. Typically, anchors are actuated either mechanically or hydraulically. A mechanical anchor is simpler in design and function, actuating when it meets an obstruction, such as a bridge plug. When force applied through the workstring from the surface, a plunger at the bottom of the mechanical anchor is depressed into the anchor as it is pushed against the obstruction. Internal

mechanisms extend slip(s) lock the anchor in place, extending outward from the anchor as the plunger depresses into the anchor.

[004] In many cases, however, a more complex, hydraulically actuated anchor, is required.

Many wellbores do not have casing in place or bridge plugs set prior to needing to set a

5 whipstock. With nothing to push against, a hydraulic anchor, well known in the art, is

employed. A general weakness of hydraulic anchor systems lies in the hydromechanical valve system(s) that actuate these anchors. The hydromechanical valve system generally performs a dual function, both closing circulation to the annulus (establishing flow through the drill string) and sending fluid and pressure to actuate the hydraulic anchor. Currently,

10 such valve systems are triggered by increasing flow and pressure through the wellbore until a circulation closing and anchor actuating device moves. Wellbore debris, erosion, and

“Measurement While Drilling” (MWD)/directional systems can complicate the function of such valve systems. Reliability issues are common. In the prior art, problems persist with setting an anchor too soon, i.e. at a higher depth in the wellbore than the target depth. In

15 such cases, the whipstock and anchor must be pulled from the wellbore through application of great pulling force from the rig at surface, or otherwise circumnavigated through sidetracking or drilling a new wellbore.

BRIEF SUMMARY OF THE DISCLOSURE

[005] The present disclosure details a method, system, and fabrication method for a different, more reliable, more precise triggering and actuation mechanism that can consistently close off circulation to the annulus and set the anchoring device at the appropriate time and at the appropriate depth, generally after a device, e.g. MWD, has oriented the whipstock to the proper azimuth/direction. The disclosed apparatus does not use specific pressures to trigger a setting device, but rather uses ratios of pressure increases. The disclosed apparatus solves premature setting issues through electronic means, only triggering a setting mechanism after observed pressure ratios are analyzed and confirmed to match preprogrammed parameters. The disclosed apparatus solves issues that could result from unexpected pressure spikes in the wellbore pressure or from inadequate pump capacity to generate target pressures, as no specific target pressure is necessary and aberrant pressure events have no effect on the electronically executed process.

[006] According to one aspect of the present disclosure, there is here provided a triggering mechanism for oilfield wellbore downhole equipment. The presently disclosed triggering mechanism includes a housing for inserting downhole in an oilfield wellbore and associating with a downhole tool in a predetermined and desired position within the oilfield wellbore. The housing further associates downhole with a computer processor, a clock, at least one sensor circuit, and an electrical power source.

[007] The computer processor includes computer processing circuitry for processing executable instructions associated with a plurality of physical parameters within the oilfield wellbore. The computer processor further includes at least one computer memory circuit including a computer readable memory circuit for storing the executable instructions and data associated with the plurality of physical parameters. The clock provides timing data to the computer processor. The at least one sensor circuit senses the plurality of physical parameters within the oilfield wellbore and generates and communicates the data associated with the plurality of physical parameters. The plurality of physical parameters include at least a pressure parameter associated with the pressure within the oilfield wellbore downhole environment. The electrical power source includes circuitry for powering the computer processor downhole within the oilfield wellbore.

[0008] A valve control circuit receives a plurality of valve control commands from the computer processor for controlling a valve, wherein the valve control commands control a valve associated with a flow path flowing a control fluid. A valve operating in response to the valve control commands controls flow of the control fluid from the flow path to an associated hydromechanical device within the oilfield wellbore. The hydromechanical device operates in association with the downhole tool within the oilfield wellbore.

[0009] Here, the valve control commands derive from real-time sampling of the downhole physical parameters. In response to the real-time sampling of the downhole physical parameters, the computer processor generates a plurality of ratio-based derivative values relating to physical parameter differences over a predetermined time span within the downhole wellbore environment. In response to the plurality of ratio-based derivative values relating to the physical parameter differences the triggering mechanism generates triggering commands to the valve for flowing the control fluid to the associated hydromechanical device. The triggering commands actuate the associated hydromechanical device from a first condition or status to a second condition or status.

[0010] In another aspect of the present disclosure, here are disclosed methods, devices, and systems to provide a computer with a clock and one or more sensors and an electrical power source. In the instant, preferred embodiment, this apparatus includes a computer, clock, pressure transducer, and onboard power source such as a lithium battery or capacitor capable of operating independently in a downhole environment in a wellbore. In the preferred embodiment, the apparatus is capacitor powered and operating autonomously, not connected to any topside equipment. The apparatus is connected to a valve, with this valve, when actuated, being formed of any means of moving an impediment that restricts flow through a given channel to an open position or closed position that alters the flow path. A pump at the surface provides flow to the downhole apparatus. When the valve is actuated, the flow serves to actuate a separate hydromechanical system, such as a downhole anchor as part of a whipstock sidetracking system for horizontal drilling.

[0011] The apparatus uses a process that samples wellbore pressure continually, ideally sampling at least one pressure reading each second. The process contains logic that ignores slow changes in pressure, such as the lowering of the apparatus on drill pipe to a target depth. In other words, the gradual increase in ambient, hydrostatic pressure as the apparatus is lowered into the wellbore will not cause any triggering or unwanted actuation

of a separate device. Similarly, an increase in pressure to make use of an MWD device, or intermittent pressure pulses generated by the MWD device, will not cause triggering. Additionally, an unexpected change in wellbore pressure, or even multiple pressure spikes, will not cause triggering, as pressure increases must match ratio values derived from pressures across a specific time horizon.

[0012] The process or program in the apparatus executes multiple ratio-based pressure derivative analyses. The values that are analyzed result from a surface pump operator pumps applying three pressures for corresponding time spans per simple instructions. When the ratio-based pressure values match preprogrammed parameters that include pressure, time and cross-checked ratios, then conditional logic yields a “true” result, which is to say a triggering event has occurred, and actuation of a separate device results. A technical advantage of the presently disclosed invention is increased reliability, with embodiments relying on few, or in some embodiments no, moving parts.

[001] Another object of this disclosure is to provide not only hydromechanical, but some novel electromechanical and mechanical means of actuating a given downhole tool.

[002] These and other objects of the present invention are achieved through a provision computer-driven, autonomous actuation of preprogrammed downhole valves and actuators.

[003] Still further objects, technical aspects and advantages of the presently disclosed subject matter will become evident upon a full appreciation of the following specification, drawings, and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[004] The present subject matter will now be described in detail with reference to the drawings, which are provided as illustrative examples of the subject matter so as to enable those skilled in the art to practice the subject matter. Notably, the **FIGURES** and examples are not meant to limit the scope of the present subject matter to a single embodiment, but other embodiments are possible by way of interchange of some or all of the described or illustrated elements and, further, wherein:

[005] **FIGURE 1A** depicts a graphical representation of the basic components and functional principle that applies to embodiments in the disclosed subject matter;

[006] **FIGURE 1B** shows sample calculation methodology for the process of the present disclosure;

[007] **FIGURE 1C** depicts the process in action, with three pressure ratios applied from a surface pump and received at a transducer;

[008] **FIGURE 2A** depicts the exterior of an actuator in isometric view bisecting the actuator axial center;

[009] **FIGURE 2B** depicts a section view an actuator showing screw-operated of spool valve actuation;

[0010] **FIGURE 2C** depicts the exterior the actuator of the present disclosure in isometric view;

[0011] **FIGURE 2D** depicts a section view of the presently disclosed actuator

[0012] **FIGURE 3A** depicts an electrically-powered actuator that enables fluid flow without the moving parts appearing elsewhere in the present disclosure;

[0013] **FIGURES 3B and 3C** depict in detail an isometric and section view showing a check valve spool of the present disclosure;

[0014] **FIGURES 3D through 3F** depict aspects of basic check valve spool as applicable to the subject matter of the present disclosure;

[0015] **FIGURES 4A and 4B** depict an actuator for releasing multiple balls for plugging orifices for the present disclosure;

[0016] **FIGURES 5A and 5B** present an actuator for advancing a spool to open a flow passageway to actuate a separate downhole device according to the present disclosure.

[0017] **FIGURES 6A and 6B** highlight an actuator in accordance with the present teachings;

[0018] FIGURES 7A and 7B depict an explosive actuator applicable to the presently disclosed subject matter;

[0019] FIGURES 8A and 8B show an explosive actuator with pressure transducer and explosive push device according to the present subject matter;

5 **[0020] FIGURES 8C and 8D** depict a one-piece, single housing version of the explosive actuator shown in **FIGURE 8A**;

[0021] FIGURES 9A through 9D depict an actuator for advancing a spool and permitting throughflow according to the present subject matter;

10 **[0022] FIGURES 10A and 10B** depict section views of the explosive latch actuator according to the present disclosure;

[0023] FIGURES 11A and 11B show section views a DEAP actuator according to the teachings of the present disclosure.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0024] Various embodiments of the expandable anchor and methods of use will now be described with reference to the accompanying drawings, wherein like reference numerals are used for like features throughout the several views. The detailed description set forth
5 below in connection with the appended drawings is intended as a description of exemplary embodiments in which the presently disclosed subject matter can be practiced. The term “exemplary” used throughout this description means “serving as an example, instance, or illustration,” and should not necessarily be construed as preferred or advantageous over other embodiments. The detailed description includes specific details for providing a
10 thorough understanding of the presently disclosed method and system. However, it will be apparent to those skilled in the art that the presently disclosed subject matter may be practiced without these specific details. In some instances, well-known structures and devices are shown in functional or conceptual diagram form in order to avoid obscuring the concepts of the presently disclosed method and system.

[0025] Certain terms are used throughout the following description and claims to refer to particular assembly components. This document does not intend to distinguish between components that differ in name but not function. In the following discussion and in the claims, the terms “including” and “comprising” are used in an open-ended fashion, and thus should be interpreted to mean “including, but not limited to ...”.

[0026] Reference to up or down will be made for purposes of description with “up”, “upper”, or “upstream” meaning toward the earth's surface or toward the entrance of a well bore; and with “down”, “lower”, or “downstream” meaning toward the bottom of the well bore. In the drawings, the cross-sectional side views of the expandable anchor should be viewed from top to bottom, with the upstream end at the top of the drawing and the downstream
25 end at the bottom of the drawing.

[0027] In the present specification, an embodiment showing a singular component should not be considered limiting. Rather, the subject matter preferably encompasses other embodiments including a plurality of the same component, and vice-versa, unless explicitly stated otherwise herein. Moreover, the applicant does not intend for any term in the
30 specification or claims to be ascribed an uncommon or special meaning unless explicitly set forth as such. Further, the present subject matter encompasses present and future known equivalents to the known components referred to herein by way of illustration.

[0028] One or more embodiments of the disclosure are described below. It should be noted that these and any other embodiments are exemplary and are intended to be illustrative of the disclosure rather than limiting. While the disclosure is widely applicable to different types of systems, it is impossible to include all the possible embodiments and contexts of the disclosure in this disclosure. Upon reading this disclosure, many alternative
5 embodiments of the present disclosure will be apparent to the person's ordinary skill in the art.

[0029] The benefits and advantages that may be provided by the present disclosure has been described above with regard to specific embodiments. These benefits and
10 advantages, and any elements or limitations that may cause them to occur or to become more pronounced are not to be construed as critical, required, or essential features of any of any or all of the claims. As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It is further understood that the terms "comprises" and/or "comprising" or "includes" and/or
15 including", or any other variation thereof, are intended to be interpreted as nonexclusively including the elements or limitations which follow those terms. Accordingly, a system, method, or other embodiment that comprises a set of elements is not limited to only those elements, and may include other elements not expressly listed or inherent to the claimed embodiment. These terms when used in this specification, specify the presence of stated
20 features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more features, regions, integers, steps, operations, elements, components, and/or groups thereof.

[0030] **FIGURE 1A** depicts a graphical representation of the basic components and functional principle that applies to embodiments in the disclosed subject matter. The
25 program logic for the apparatus is based on square roots of ratios sampled over time. For illustrative purposes, an example of one such program logic is as follows:

[0031] A. The pressure transducer samples pressures once per second, with the pressures loaded into a rolling stack of pressures with **160** pressures stored in the stack and a new pressure being added and the oldest pressure being dropped each second. The
30 stack of **160** pressures is used for actuation. A second rolling stack of **480** pressures, also sampled concurrently at one per second, is maintained to eliminate wellbore pressure from

consideration as the base P1 pressure and also as a store of historical data for ratio calculation.

[0032] B. The computer analyzes the pressures and values derived from the pressures.

[0033] C. The pressures, and values derived from the pressures, are generated and
5 analyzed as follows:

[0034] a. pressure 1 ("P1"), the base pressure applied from the surface pump operator,

[0035] i. and value "X," the square root of P1;

[0036] ii. value "Y," the square root of P1 multiplied by two;

10 **[0037]** iii. value "Z," the square root of P1 multiplied by three.

[0038] b. pressure 2 ("P2"), a second pressure applied from the surface pump operator per supplied instructions,

[0039] i. and value "X," the square root of P2;

[0040] ii. value "Y," the square root of P2 multiplied by two;

15 **[0041]** iii. value "Z," the square root of P2 multiplied by three.

[0042] c. pressure 3 ("P3"), a third pressure applied from the surface pump operator per supplied instructions,

[0043] i. and value "X," the square root of P3;

[0044] ii. value "Y," the square root of P3 multiplied by two;

20 **[0045]** iii. value "Z," the square root of P3 multiplied by three.

[0046] d. The surface operator is instructed to provide as follows:

[0047] i. P1: a base pressure, which may be virtually any pressure he chooses, but for illustrative purposes and by way of example, 1,500 psi to be pumped for two minutes. Due to pressure deployment lag, that is, the time needed
25 to ramp up pressure, extra time may be added to the sample stack prior to, and subsequent to, the two-minute period. By way of example, sampling may occur over 120 seconds plus 20 seconds during ramping up to P1 and another 20 seconds subsequent to P1 while ramping up to P2. This method results in the 160 second rolling stack of pressures in A above.

30 **[0048]** ii. P2: At the end of the two minutes for P1, the surface operator begins pumping at P2, P2 being P1 multiplied by 1.2, or a 20% increase from P1. P2 also continues for two minutes. Reiterating that due to pressure deployment lag,

that is, the time needed to ramp up pressure, extra time may be added prior to, and subsequent to, the two-minute period. By way of example, sampling may occur over 120 seconds plus 20 seconds during ramping up to P2 and another 20 seconds subsequent to P2 while ramping up to P3. This method results in the 160 second rolling stack of pressures in A above.

[0049] iii. P3: At the end of the two minutes for P2, the surface operator begins pumping at P3, P3 being P2 multiplied by 1.1, or a 10% increase from P2. P3 also continues for two minutes. As in d(i) and d(ii) above, allowance for pressure deployment lag results in extra time being added to the two-minute period and results in the 160 second rolling stack of pressures in A above.

[0050] e. P1, P2 and P3 as well as the values derived from them may be adjusted for variance due to the imprecise nature of oil and gas pumping operations and unpredictable downhole conditions. By way of example, if 90 of 120 samples occur within +/-5% of a consistent range during P2 pumping, the samples will reach the validity threshold during the P2 pumping period to initiate evaluation of P3 and all values derived from pressures.

[0051] f. A secondary cross check of values and secondary opportunity for adjustments for variance is provided through ratio analysis:

[0052] i. Y from P2 is divided by X from P1, and the result, given the exemplary values should be 2.19, with allowances for variance or other adjustment as deemed necessary. This ratio does not change with different P1, P2 and P3 values as long as the instructed pumping ratios are followed.

[0053] ii. Z from P3 is divided by Y from P2, and the result, given the exemplary values should be 1.57, with allowances for variance or other adjustment as deemed necessary. This ratio does not change with different P1, P2 and P3 values as long as the instructed pumping ratios are followed.

[0054] iii. Z from P3 is divided by X from P1, and the result, given the exemplary values should be 3.45, with allowances for variance or other adjustment as deemed necessary. This ratio does not change with different P1, P2 and P3 values as long as the instructed pumping ratios are followed.

[0055] g. When pressures and derived ratio values, as listed above in C(a-f) above, match preprogrammed parameters, then conditions are deemed to be met

and a subsequent action occurs. In Boolean logic, conditional variables or an “if” condition is true when pressures and derived ratio values in C(a-f) match preprogrammed parameters and then a consequent action is executed. In the preferred embodiment, the consequent action is a signal to actuate a downhole valve.

[0056] Additional program modifiers may be incorporated, such as heuristic or machine learning process that can potentially simplify the triggering process over time, making it simpler for the pump operator at the surface by learning to understand when a triggering event should occur.

[0057] Entirely different programs may be used, such as process that utilize stepped decreasing pressure ranges, or alternating decreasing and increasing pressures.

[0058] Depth, directional (through MEMS gyroscopes and accelerometers), and temperature sensors and resulting process modifiers may be incorporated in additional embodiments to be utilized in addition to or in place of the pressure trigger method described above.

[0059] Each of the disclosed embodiments includes a process based on pressure ratios as described above. In this disclosure, the term “capacitor” may be used interchangeably with any sub-type of capacitor, e.g. “supercapacitor” or “ultracapacitor.” A battery, such as a lithium battery, may be used in place of capacitors in every instance.

[0060] **FIGURE 1A** depicts a graphical representation of the basic components and functional principle that applies to embodiments in this disclosure.

[0061] **FIGURE 1B** shows sample calculation methodology for the process that is applied in embodiments in this disclosure, utilizing pressure ratios to instruct a downhole actuator as to whether it should actuate or remain inactive.

[0062] **FIGURE 1C** depicts the process in action, with three pressure ratios applied from a surface pump and received at a transducer such as the transducer in **FIGURE 2B** and **FIGURE 2D**. The graphical representation in **FIGURE 1C** indicates that after analysis of three applied pressures over three time periods, actuation of an associated device is triggered. This process, in the form depicted in **FIGURE 1C** or a very similar process adjusted for given time and pressure variables at a well, is used in all embodiments in this disclosure.

[0063] In one embodiment, a spool inside a tube has external circumferentially-disposed seals on each end of the spool that seat against the tube wall, sealing the spool against the tube wall. The tube has a hole or plurality of holes in a circumferential, radial area, with such holes being positioned between the seals of the spool located inside the tube. A pressure transducer is affixed to one end of the tube, with capacitors, computer, and electric motor inside the tube and proximal to the transducer, with the computer communicating with the transducer. A hole is located at the other end of the tube distal from the transducer. A screw, preferably an acme threaded screw with nut, is attached to the electric motor, with the electric motor having the capability of turning the screw when receiving a signal from the computer, with the computer sending the signal after analyzing pressures sent to it via the transducer. The spool inside the tube is connected to the screw, and can move either distally from the transducer end or proximally to the transducer end when the screw turns, depending on the direction of rotation of the screw. External pressure is blocked by the spool while it remains in its initial position. When the spool moves in either direction, and a seal at one end of the spool moves beyond the hole(s) located circumferentially in the tube around the middle of the spool, external pressure and fluid can enter the tube. If the spool is retracted toward the transducer end, fluid will enter the tube through the holes in the side of the tube and exit through the end of the tube. The spool may have an axial bore through its center, equalizing the pressure between the tube's end with the transducer and the end with the hole, making movement of the spool easier.

[0064] **FIGURE 2A** depicts the exterior of actuator **2** in isometric view, showing where section **2B-2B**, bisecting the axial center of actuator **2**, is taken from. **FIGURE 2B** depicts a section view **2B-2B** of an actuator **2** that enables screw-operated actuation of a spool valve. The spool **18** is shown in its first position, a position that prevents external pressurized flow from entering the device. **FIGURE 2B** further includes the housing **4**, made of a material capable of resisting burst or crush pressure, a pressure transducer **6**, capacitor(s) **8**, a computer **10**, an electric motor **12**, lead screw **16**, a spool **18** made of a hard and pressure resistant material, O-rings **20** for sealing between spool **18** and housing **4**. A side hole **22** is shown bored transverse to the middle portion of the spool **18**. The middle portion of the spool **18** is exposed to external pressure, but O-rings **20** seal the cavity containing the lead screw **16** and also the cavity toward end hole **24**, an orifice in end connection **23**. The lead

screw **16** has threads that match threads in a bore in the spool **18**. For ease of spool movement under equalized pressure conditions in the cavity containing the lead screw **16** and cavity adjacent to end hole **24**, a spool throughbore **19** is bored completely through spool **18**. Upon the receipt of the required pressure ratios at the pressure transducer **6** and analysis of these ratios by computer **10**, the computer **10** causes the capacitor to send current to the electric motor **12**, causing the electric motor **12** to begin rotating the lead screw **16** and moving the spool **18** either axially away or toward the electric motor **12**, depending upon programming in the computer **10**.

[0065] FIGURE 2C depicts the exterior of actuator **2** in isometric view, showing where section **2D-2D**, bisecting the axial center of actuator **2**, is taken from.

[0066] FIGURE 2D depicts a section view **2D-2D** showing the second position of the spool valve with screw-operated actuation having occurred and the spool **18** having moved in the direction of the electric motor **12**. This second position permits external flow to enter the device due to external pressure being greater than internal pressure inside the housing **4**.

Specifically, movement of the O-rings **20** out of the pressurized flow-preventing second position shown in **FIGURE 2D** and into this second position allows flow to enter side hole **22** and to exit end hole **24**. End hole **24** is connected to a flow line for actuation of a separate device (not shown). **FIGURE 2D** additionally includes the housing **4**, made of a material capable of resisting burst or crush pressure, a pressure transducer **6**, capacitor(s) **8**, a computer **10**, an electric motor **12**, lead screw **16**, a spool **18** made of a hard and pressure resistant material, O-rings **20** for sealing between spool **18** and housing **4**. The lead screw **16** has threads that match threads in a central bore in the spool **18**. In **FIGURE 2D**, the receipt of the required pressure ratios at the pressure transducer **6** has already occurred and analysis of these ratios has been performed by computer **10**, with the computer **10** having signaled the capacitor to send electric current to the electric motor **12**, which has caused the electric motor **12** to rotate the lead screw **16** and move the spool **18** toward the electric motor **12**. After actuation and the spool's **18** movement to the second position shown in **FIGURE 2D**, external pressurized flow from the wellbore enters housing **4** through side hole(s) **22** and then passes through the spool throughbore **19** and through exit hole **24**. Exit hole **24** is in hydraulic fluid communication with a separate downhole device, such as a hydraulic anchor (not shown).

[0067] In another embodiment, a stationary spool inside a tube has seals on each end of the spool that seat against the tube wall and the tube has a hole or plurality of holes in a circumferential, radial area, with such holes being positioned between the seals of the spool located inside the tube. A pressure transducer is affixed to one end of the tube, with
5 capacitors, computer proximal to the transducer, with the computer communicating with the transducer, and with a hole bored in the opposite end of the apparatus, distal from the transducer end. However, in this embodiment, there is no motor or screw, and the spool remains stationary. A capacitor next to the computer has nichrome wire that runs through a sealed passageway inside the spool. The spool is either made of a non-conductive
10 material or has portions contacting the nichrome wire inside the passageway insulated so as to prevent contact with any conductive parts of the spool.

[0068] A hole is bored transversely in the middle area of the spool between the two seals. To prevent external pressure from entering the spool, a meltable, frangible or dissolvable obstruction, such as a plug made of silver solder, is positioned inside the plug and blocks
15 pressurized fluid flow from the external part of the spool to the internal part. Nichrome wire leads from the capacitor to the plug, contacting it and preferably enmeshed in it or intermingled with it. Upon receiving a signal from the computer, the capacitor sends current through the highly resistant nichrome wire, heating up it rapidly, and the plug melts, allowing fluid from outside the tube to enter the spool and pass through the hole at the end
20 of the tube.

[0069] **FIGURE 3A** depicts an isometric view of electrically-powered actuator **100** that enables fluid flow without the moving parts of the embodiment shown in **FIGURE 2B** and **FIGURE 2D**.

[0070] **FIGURE 3B** depicts section view **3B-3B** of an actuator **100**, housing **104**, made of a material capable of resisting burst or crush pressure, a pressure transducer **106**,
25 capacitor(s) **108**, a computer **110**, a high voltage capacitor **111**, a nichrome wire **113**, a check valve spool **101** made of a hard and pressure resistant material, O-rings **120** for sealing between check valve spool **101** and housing **104**. A side hole **122** is shown bored transverse to the middle portion of the check valve spool **101**. The middle external
30 circumference of the check valve spool **101** is exposed to external pressure, but O-rings **120** seal the cavity between high voltage capacitor **111** and check valve spool **101** and also the cavity between check valve spool **101** and end hole **124**. A transverse bore **128** in the

check valve spool **101** penetrates from the side of the spool to the axial center of check valve spool **101**. End hole **124** is bored through end connection **123** which is threaded into the end of housing **104** distal from the high voltage capacitor **111**. An axial bore **130** penetrates from the end of check valve spool **101** along the longitudinal center of check valve spool **101**, terminating where it connects with transverse bore **128**, forming a passageway. In the initial state, this passageway is blocked, as the transverse bore **128** is plugged with an obstruction **132**, comprised of a meltable material, such as a solder with some content of silver. This prevents external pressurized flow from entering transverse bore **128** and axial bore **130**. The nichrome wire **113** intersects and is enmeshed in the obstruction **132**. The nichrome wire **113** has each of its two ends connected to the high voltage capacitor **111**, with the looped end passing through sealed wire bore **121** and the looped portion being enmeshed in the obstruction **132**. To avoid direct contact with the check valve spool **101**, the nichrome wire **113** is insulated by ceramic material (not shown) between the check valve spool **101** and nichrome wire **113**. Upon receipt of the required pressure ratios at the pressure transducer **106** and analysis of these ratios by computer **110**, the computer **110** sends a signal to discharge the high voltage capacitor **111**. When the high voltage capacitor **111** is discharged, the highly electrically resistant nichrome wire **113** rises rapidly in temperature such that the generated heat is sufficient to melt the obstruction **132**. Without the obstruction, pressurized flow enters through axial bore **130**, passes through transverse bore **128**, and exits through end hole **124**. End hole **124** and end connection **123** are connected to a hydraulic flow line for actuation of a separate device (not shown), such as an anchor, packer, or other similar downhole tool.

[0071]FIGURE 3C depicts an external isometric view of check valve spool **101**, while **FIGURE 3D** depicts in detail a section view **3D-3D** showing the check valve spool **101** which is employed in housing **104** in **FIGURE 3B**. This check valve spool **101** may be used in place of the “plain” spool **18** seen in **FIGURE 2B** when necessary. Check valve spool **101** has two key features, one being capable of housing a nichrome wire **113** looped end and passing the nichrome wire **113** into check valve spool **101** through sealed wire bore **121** (seal and non-conductive insulator not shown) and to extend through transverse bore **128**, where it can be placed in contact with a meltable obstruction. Check valve spool **101** also permits easier travel of the check valve spool **101** as it can equalize or adjust pressure on both sides of the spool when minimal movement or short-distance actuation of this spool

is necessary. It can be beneficial to check pressurized external flow so as to prevent excess pressure from reaching the portion of the housing **104** located between the check valve spool **101** and high-voltage capacitor **111**. In **FIGURE 3B**, this flow-checking action would occur at actuation, sealing check valve spool **101** with ball **151** traveling to, and
5 seating on and sealing, a reduced orifice aperture in check valve spool **101** proximal to high voltage capacitor **111**. The check valve spool **101** is comprised of a spool similar to spool **18** in **FIGURE 2B**, but with a central axial throughbore beginning at axial bore **130** which tapers to a reduced orifice aperture at the other end proximal to high voltage capacitor **111**. Thus the larger diameter portion of axial bore **130**, originating at the end distal from the
10 reduced orifice aperture end, tapers in diameter as it approaches the reduced orifice aperture end. For ease of assembly, the check valve spool **101** can be inserted into housing **104**. Subsequently, the ball **151** is temporarily affixed to set screw **152** with adhesive. Set screw **152** can then be threadably inserted into the larger diameter portion of axial bore **130** adjacent to the tapered portion. The set screw **152** retains the ball **151** until
15 a pressure-increasing event occurs on the side of the set screw **152** opposite the ball **151**. At the occurrence of a pressure-increasing event, the ball **151** will release from the set screw **152** and travel toward the reduced orifice aperture, where it will seat. When this check valve spool **101** is employed, upon actuation, the ball **151** seats in the reduced orifice aperture and prevents excess pressure from entering the area inside housing **104**
20 located between the high-voltage capacitor **111** and check valve spool **101**.

[0072] **FIGURE 3E** depicts an isometric view of basic check valve spool **131**, shown in section view **3F-3F** in **FIGURE 3F**. Basic check valve spool **131** is similar to check valve spool **101** seen above in **FIGURE 3B** and **FIGURE 3D**, but does not incorporate either transverse bore **128** or sealed wire bore **121**. Just as in check valve spool **101**, basic
25 check valve **131** utilizes a tapering central axial bore, with the larger diameter portion of axial bore **130** originating at the end distal from the reduced orifice aperture end and tapering in diameter as it approaches the reduced orifice aperture end. Ball **151** disengages from set screw **152** when a pressure-increasing event occurs on the side of the set screw **152** opposite the ball **151** and travels to seat at the reduced orifice aperture end.
30 Basic check valve spool **131** is employed in situations requiring pressure-checking action or ease of spool travel, but not requiring nichrome wire insertion or melting a meltable obstruction. Assembly is the same as with check valve spool **101**, with basic check valve

spool **131** being initially inserted into housing **104**. Subsequently, the ball **151** is temporarily affixed to set screw **152** with adhesive, and then set screw **152** can be threadably inserted into the larger diameter portion of axial bore **130** adjacent to the tapered portion.

5 **[0073]** In another embodiment, a tube has a pressure transducer affixed to one end of the tube, with capacitors, computer, and electric motor inside the tube and proximal to the transducer, with the computer communicating with the transducer. Differing from the previous two embodiments, the end of the tube distal from the transducer is sealed. The only opening to external pressure is a single hole in the middle portion of the tube. A
 10 screw, preferably an acme threaded lead screw with nut at its end distal from the motor, is attached to the electric motor, with the electric motor having the capability of turning the screw when receiving a signal from the computer, with the computer sending a signal to discharge a motor-powering capacitor after analyzing pressures sent to it via the transducer. The lead screw is attached to a carrier of balls via a nut, with the holder
 15 keeping a collection of balls linearly arranged, separated, and with individual angled tabs to assist in forcing the balls outward when they are advanced to the hole. The electric motor turns the lead screw after receiving a signal from the computer, with the computer sending the signal after analyzing pressures sent to it via the transducer. As the lead screw turns the carrier of balls is retracted toward the transducer end of the tube. As the carrier
 20 retracts, a ball becomes aligned with the hole in the middle portion of the tube and is released through the hole. An axial bore through the carrier allows it to pass along the circumference of the lead screw as it is retracted. A positive means of displacing the ball through the opening, such as an inclined tab attached at the wall of the tube opposite the hole and at disposed so that it is aligned with the bottom of the hole proximal to lead screw
 25 nut, may be used. Based upon the program in the computer, the lead screw may retract repeatedly and iteratively, so as to sequentially retract a distance to release one ball, or to release a plurality of balls at one time.

[0074] **FIGURE 4A** depicts an actuator **200** in external isometric view, with side hole **222** visible. **FIGURE 4B** shows a section view **4B-4B** of actuator **200**. Actuator **200** is capable
 30 of releasing multiple balls **240** to plug orifices in a given wellbore tool or casing (not shown). Actuator **200** enables screw-operated actuation of a linear ball carrier **242** that retracts as lead screw **216** turns inside engaged threads of linear ball carrier **242**. Actuator **200** is

comprised of housing **204**, made of a material capable of resisting burst or crush pressure, threaded end connection **223** with end hole **224**, a pressure transducer **206**, capacitor(s) **208**, high voltage capacitor **211**, a computer **210**, an electric motor **212**, a linear ball carrier **242**, single or multiple balls **240**, and side hole **222** that permits balls **240** to exit housing **204**. Linear ball carrier **242** has an axial hole bored through it, with said hole exceeding the outside diameter of lead screw **216** and aligned with lead screw **216** so that it passes over the circumference of lead screw **216** as it retracts toward the electric motor **212**.

[0075] The linear ball carrier **242** is contained within housing **204**, and is unsealed and exposed to wellbore pressure, with a large side hole **222** bored transverse to the lead screw **216** and providing an exit opening for balls **240**. Opposite the side hole **222**, a 45-degree angled tab **218** is affixed to the housing **204**, serving to force balls outward and through side hole **222** as the linear ball carrier **242** retracts. Linear ball carrier **242** has a thin channel axially cut through its spine along the side of housing **242** opposite side hole **222** to accommodate angled tab **218**. Upon receipt of the required pressure ratios at the pressure transducer **206**, analysis of these ratios is performed by computer **210** using the process described in this disclosure, and with correct ratios, the computer **210** proceeds to signal the high-voltage capacitor **211** to discharge and deliver current. The high-voltage capacitor **211** discharges, sending electric current to the electric motor **212**, which causes the electric motor **212** to rotate the lead screw **216** in order to move, or “retract,” the linear ball carrier **242** toward the electric motor **212**.

[0076] Programming of the computer **210** may vary the instructions to actuate after employing the process described above in this disclosure. For example, upon receiving the correct pressure ratios, the computer **210** can retract the linear ball carrier **242** such that it retracts sufficiently for a single ball **240** to exit at large side hole **222**. Upon receiving the correct pressure ratios a subsequent time, the computer **210** could advance another ball **240**, and proceed to sequentially repeat this separate actuation as required. Alternatively, the computer could advance the linear ball carrier **242** such that it moves multiple, or all, balls **240** to exit at large side hole **222**.

[0077] Another embodiment consists of a spool inside a tube that has seals on each end of the spool as well as a third seal in a middle part of the spool. These seals seat against the tube wall. In a first area of the spool, between two of the seals, the tube housing the spool has a hole or plurality of holes in a circumferential, radial area. In a second area of the

spool, a transverse hole in the spool connects to a central axial hole in the spool that extends from the second area through the end of the spool toward the end of the tube with the hole. A meltable, frangible or dissolvable obstruction or blocking “dog”, comprised of a material such as silver solder, is positioned in the tube beyond the end of the spool and
5 contacting the spool. A pressure transducer is affixed to one end of the tube, with capacitors, and computer inside the tube and proximal to the transducer, with the computer communicating with the transducer, and a hole is located in the opposite end of the apparatus, distal from the transducer end. A compression spring (or in a sub-embodiment, tension spring) is attached on one end to the capacitor compartment and on the other end
10 to the spool. A high-voltage capacitor next to the computer connects to nichrome wire that contacts the meltable or frangible obstruction. The spool is either made of a non-conductive material or has portions contacting the nichrome wire insulated so as to prevent nichrome wire from contacting any conductive parts of the spool.

[0078] In order to prevent the spool from moving due to compression from the spring and
15 allowing external pressure to push flow through the hole at the end of the tube, said meltable, frangible or dissolvable obstruction, such as a tab made of silver solder, holds the spool in place. Nichrome wire connecting directly or indirectly to the capacitor, contacts the obstruction and preferably intermingles with it. Upon receiving a signal from the computer, the capacitor sends current through the highly resistant nichrome wire, heating it up rapidly,
20 and the obstruction melts, allowing the spring to move the spool so that the second area of the spool with the transverse hole passes under the hole(s) in the side of the tube, allowing fluid from outside the tube to enter the spool and pass through the hole at the end of the tube.

[0079] The spool is either made of a non-conductive material or has portions contacting the
25 nichrome wire insulated so as to prevent contact with any conductive parts of the spool.

[0080] **FIGURES 5A and 5B** present an actuator for advancing a spool to open a flow passageway to actuate a separate downhole device according to the present disclosure.

FIGURE 5A depicts an actuator **300** in isometric view with end hole **324** and transducer **306** visible. **FIGURE 5B** depicts a section view **5B-5B** with a compressed spring **328**
30 capable of advancing a spool **318** in order to open a flow passageway to actuate a separate downhole device (not shown). Also shown are a housing **304**, made of a material capable of resisting burst or crush pressure, a pressure transducer **306**, capacitor(s) **308**,

high-voltage capacitor **311**, a computer **310**, and nichrome wire **313**, with said nichrome wire **313** extending through compressed spring **328** and into axial bore **319** in spool **318**. Spool **318** is held in the initial position by a meltable obstruction **332** that binds to housing **304** and spool **318** and can be made large enough to mechanically prevent travel of spool **318**. Spool **318** has two O-rings **320** located proximal to end hole **324** and with O-rings **320** disposed about its circumference for sealing between spool **318** and housing **304**. Side hole **322** is shown bored transverse to the portion of the spool **318** located between O-rings **320**, with side hole **322** exposing this area to external wellbore pressure. A meltable obstruction **332** that contacts the spool **318** and the housing **304** wall prevents movement of the compressed spring **328** and spool **318** in the direction of end hole **324**, an orifice in threaded end connection **323**. An axial bore **319** in spool **318** extends from the end of spool **318** that is proximal to end hole **324** and completely through spool **318** to the area inside housing **304** that houses compressed spring **328**. A radial spool bore **317** is shown bored at an angled entry in the spool **318** from an area between the two O-rings proximal to the spring and extending to a depth sufficient to intersect axial bore **319**. A spring-proximal O-ring **325** seals the portion of the housing **304** that houses compressive spring **328**. The portion of spool **318** between spring-proximal O-ring **325** and adjacent O-ring **320** is in fluid communication with end hole **324** and a separate downhole device (not shown). Upon receipt of the required pressure ratios at the pressure transducer **306**, analysis of these ratios is performed by computer **310**, and with correct ratios, the computer **310** proceeds to signal the high-voltage capacitor **311** to discharge and send current to the nichrome wire **313**.

[0081] The nichrome wire **313** extends through sealed wire bore **321**, with its loop end intersecting and enmeshed into the meltable obstruction **332**. Adjacent to the enmeshed-in-meltable-obstruction portion of nichrome wire **313**, it may pass through an insulating material (not shown) such as a ceramic material and pressure-sealing gland (not shown) if needed. The nichrome wire **313** has each of its two ends connected to the high-voltage capacitor **311**, with the looped end being enmeshed in the meltable obstruction **332**. Unshown insulating material could be used for the nichrome wire **313** to avoid direct contact with the spool **318**, and in some configurations, a pressure-sealing gland (not shown) could be employed in the portion of spool **318** between O-rings **320** and adjacent to the point where nichrome wire **313** contacts meltable obstruction **332**. Upon the receipt of

the required pressure ratios at the pressure transducer **306** and analysis of these ratios by computer **310**, the computer **310** sends a signal to discharge the high-voltage capacitor **311**. When the high voltage capacitor **311** is discharged, the highly electrically resistant nichrome wire **313** rises rapidly in temperature such that the generated heat is sufficient to melt the obstruction **332**. Without the obstruction, the stored energy in the compressed spring **328** is freed, permitting the compressed spring to advance the spool **318** in the direction of end hole **324**, until spool **318** contacts the proximal end of threaded end connection **323**, whose inside diameter is smaller than that of housing **304**. The threaded end connection **323** is sized such that its length stops movement of the spool **318** at the point where side hole **322** is disposed between spring-proximal O-ring **325** and its adjacent proximal O-ring **320** and in fluid communication with radial spool bore **317**. Pressurized flow enters through side hole **322**, passes through radial spool bore **317**, passes through axial bore **319** and exits through end hole **324** to a hydraulically connected downhole device (not shown), such as a hydraulic anchor, packer, or similar tool.

[0082] Another embodiment delivers considerable torque to turn a screw for a relatively short duration. This embodiment is comprised of a tube with a pressure transducer affixed to one end of the tube, capacitor for powering electronics, computer, capacitor for powering actuation, and electric motor inside the tube and proximal to the transducer, with the computer communicating with the transducer. The capacitor for powering the electronic components is positioned adjacent to the computer and the capacitor for powering actuation is positioned adjacent to the electric motor. The capacitors may be in the form of a supercapacitor or ultracapacitor, such as those produced by Nanoramic Laboratories, and may incorporate a DC to DC (direct current to direct current) converter. The tube is open at the end distal from the transducer end. A screw, preferably an acme threaded screw with incorporated and threadably matching sealed nut or worm gear, is attached to the electric motor, with the electric motor, powered by a capacitor, having the capability of turning the screw when receiving a signal from the computer, with the computer sending said signal after analyzing pressure ratios according to the process disclosed above. The signal sent from the computer activates the electric motor with power from the capacitor, supercapacitor or ultracapacitor. The electric motor turns for a short time with significant torque, due to the burst of power from the capacitor, supercapacitor or ultracapacitor.

[0083] Upon the electric motor's initiation of rotation, the screw extends axially out of the tube from its initial position, and advances farther out of the tube, in the direction away from the transducer end. At the end of the screw distal from the transducer, the screw is attached to a sliding sleeve (not shown), part of a tubular assembly in which the sliding sleeve and a tubular body each have alignable holes, well known in the art and commonly used in modern oil and gas industry operations. The screw advances the sliding sleeve to either move the holes into alignment with a tubular body, permitting throughflow, or, alternatively, to move the holes out of alignment with a tubular body, preventing throughflow. This is to say that this embodiment moves a sliding sleeve into an open or closed position. Exemplary applications of this embodiment would be, for example, closing a bypass valve to stop circulation from the drill string to the annulus, actuating a differential pressure valve, or advancing into the open position a sleeve on a ported sub at the toe of a lateral wellbore.

[0084] Depending upon programming and electrical power capacity, this embodiment can receive correct pressure ratios sequentially, one after another, and be actuated several times, utilizing a sleeve to sequentially close or open sets of ports upon receiving pressure ratio signals. The screw could be programmed to alternately advance and retract sequentially as well.

[0085] A sub-embodiment of this high-torque embodiment is a screw release mechanism instead of screw advancement mechanism. The end of the screw distal from the transducer can be attached to a mating threaded orifice on a sliding sleeve. Rather than advancing the lead screw outward or retracting it inward by utilizing a threaded nut or worm gear as in the previous embodiment, the lead screw is fixed to the electric motor spindle. Upon receiving a signal from the computer, instead of advancing the screw with positive force to attachably advance an adjacent component, the screw unthreads and disengages the mating threads of a sliding sleeve, releasing a sliding sleeve (or other device) from its initial position, and enabling the sliding sleeve to advance after release via work string flow, spring tension, or spring compression.

[0086] Another sub-embodiment of this high-torque embodiment is a valve open or close mechanism instead of screw advancement mechanism. The end of the screw distal from the transducer can be attached to a dart, gate, ball valve, or other type of valve actuable

with rotation. Upon receiving a signal from the computer, instead of advancing a screw with positive force, the screw opens or closes and attached dart, gate, or ball valve.

[0087] FIGURES 6A and 6B highlight an actuator in accordance with the present teachings.

FIGURE 6A depicts an actuator **400** in isometric view. **FIGURE 6B** depicts in section view

6B-6B actuator **400**, with said actuator of rotating lead screw **416** with significant torque in order to a) advance an adjacent component, b) retract an adjacent component, c) release an adjacent component (not shown) from engagement, or actuate a valve (not shown) with said lead screw **416**. Actuator **400** is comprised of housing **404**, made of a material capable of resisting burst or crush pressure, a pressure transducer **406**, capacitor(s) **408**, a high-voltage capacitor **411**, a computer **410**, an electric motor **412**, and a lead screw **416**. Housing **404** is open at the end distal from transducer **406** with lead screw **416** protruding from this open end. Upon receipt of the required pressure ratios at the pressure transducer **406**, analysis of these ratios is performed by computer **410**, and with correct ratios, the computer **410** proceeds to signal the high-voltage capacitor **411** to discharge and deliver electric current. The high-voltage capacitor **411** discharges and sends electric current to the electric motor **412**, which causes the electric motor **412** to rotate the lead screw **416** in a direction such that said lead screw **416** advances or retracts an adjacent component (not shown), or unthreads from and releases from a threadably attached component (not shown). Programming of the computer **410** may vary the instructions to actuate after employing the process described above in this disclosure. For example, upon receiving the correct pressure ratios, the computer **410** can advance, retract, or release an adjacent component, perform a combination of these actions, or repeat these actions or combinations of actions sequentially upon receiving the correct pressure ratios subsequent times.

[0088] Another embodiment is an actuatable release mechanism comprised of a tube with a pressure transducer affixed to one end of the tube, with capacitor(s) for powering a computer, computer, and power device in addition to the computer-powering capacitors. The power device may be a battery, capacitor, supercapacitor or ultracapacitor and may incorporate a DC to DC converter. The end of the tube distal from the transducer end is open. Wires run from the power device to an explosive bolt or similar explosively releasing item, known in the art and produced by companies such as Pacific Scientific Energetic Materials Company. After analyzing pressure ratios according to the process disclosed

above, the computer sends a signal that allows electric current from the power device to flow through the wires to the explosive bolt. The explosive bolt is attached to a sliding sleeve or similar actuable item, with the explosive bolt being inserted into a hole in the sliding sleeve and retaining the sliding sleeve in a first position. The current sent to the explosive bolt from the power device causes it to break or explode into pieces, releasing the sliding sleeve and enabling it to move into a second position. Upon release, the sliding sleeve is enabled to advance via downhole fluid flow, spring tension, or spring compression.

[0089] FIGURES 7A and 7B depict an explosive actuator applicable to the presently

disclosed subject matter. **FIGURE 7A** depicts an explosive actuator **500** in external isometric view, with transducer **506**, electrical wires **515** and explosive bolt **507** visible.

FIGURE 7B shows actuator **500** in section view **7B-7B**, including the housing **504** with a pressure transducer **506** affixed to one end of the tube and an explosive bolt **507** such as those available from Pacific Scientific Energetic Materials Company or similar explosive frangible component electrically wired at the end distal from transducer **506**. Explosive actuator **500** is further comprised of housing **504**, made of a material capable of resisting burst or crush pressure, a pressure transducer **506**, a computer **510**, capacitor(s) **508**, a high-voltage capacitor **511**, and electrical wires **515**. Upon receiving the correct pressure ratios, having applied the process described above in this disclosure, the computer **510** can signal high-voltage capacitor **511** to discharge, sending current along electrical wires **515** and causing the explosive bolt **507**, which is electrically wired to high-voltage capacitor **511**, to explode or otherwise break apart, releasing a sliding sleeve or similar component (not shown) retained by explosive bolt **507**. A plurality of explosive bolts **507** may be employed to retain a single or multiple components, such as sliding sleeves. Depending on programming, the computer **510** can repeat the exploding of explosive bolts **507** multiple sequential times upon repeatedly receiving the correct pressure ratios subsequent times.

[0090] Another embodiment is comprised of a tube with a pressure transducer affixed to one end of the tube, with capacitors, computer, and power device, such as a high-voltage capacitor, in addition to the capacitors powering the computer. The power device may be a capacitor, supercapacitor or ultracapacitor and may incorporate a DC to DC converter. Adjacent to the power device, either in the same tube, past a compression resistant bulkhead, or, in a separate tube, connected by electrical wires, a spool is positioned inside

the tube. The tube is sealed on one end and has an opening at the other end, where it connects to a separate downhole device. The spool has seals on each end of the spool that seat against the tube wall. The spool has an axial bore extending through the length of the spool. The tube has a hole or plurality of holes in a circumferential, radial area, with
5 such holes being positioned between the seals of the spool located inside the tube. A hole is located in the end of the tube. An explosive push device, known in the art and supplied by such companies as Pacific Scientific Energetic Materials Company, is positioned distally from the hole in the end of the tube and abuts the spool with its piston end touching the spool.

10 **[0091]** The explosive push device is connected to the power device by wires. After analyzing pressure ratios according to the process disclosed above, the computer sends a signal that allows current from the power device to flow through the wires to the explosive push device. The current sent to the explosive push device causes its piston to advance forward a small distance, in this case pushing the spool toward the end with the hole in it.

15 The seals travel beyond the hole(s) in the side of the tube and the seals and spool no longer act as the tube's barrier to external pressure. Fluid enters the tube through the hole(s) in the side of the tube and passes through the spool's axial bore and through the hole at the end of the tube.

[0092] The instant embodiment can be constructed in one or two pieces. In a two-piece
20 version, the transducer, capacitors, computer and power device may be housed in one tube, and the explosive push device and spool may be housed in a separate sealed tube. In this case, the two tubes are connected by wires running from the power device through a pressure sealed gland and into the second tube through a pressure sealed gland where the wires connect to the explosive push device.

25 **[0093]** In a one-piece version, the transducer, capacitors, computer, power device as well as the explosive push device and spool are housed in a single sealed tube. However, in order to mitigate the potential effects of a detonation on adjacent parts of the embodiment, a compression resistant wall or bulkhead may be placed between the transducer, capacitors, computer, power device portion and the explosive push device and spool
30 portion. In such a case, wires running through the bulkhead connect the power device to the explosive push device.

[0094] FIGURES 8A and 8B show an explosive actuator with pressure transducer and explosive push device according to the present subject matter. **FIGURE 8A** depicts a two-piece explosive actuator **700**, connected by electrical wires **715**, in external isometric view. **FIGURE 8B** depicts actuator **700** in section view **8B-8B** comprised of a housing **704** with a pressure transducer **706**, and a second housing **703** containing an explosive push device **707**. This explosive actuator **700** is further comprised of housing **704**, made of a material capable of resisting burst or crush pressure, second housing **703**, made of a material capable of resisting burst or crush pressure, a pressure transducer **706**, a computer **710**, capacitor(s) **708**, a high-voltage capacitor **711**, a spool **718**, and electrical wires **715**.

Housing **704** and second housing **703** are separate and connected by electrical wires in the event that it is desired to locate the control function and explosive actuation function in disparate locations in the wellbore. Housing **704** has transducer **706** located on one end and electrical wires **715** extending out from the other end, and connecting high-voltage capacitor to explosive push device **707** through the closed end of second housing **703**.

Second housing **703** houses spool **718**, a portion of which is sealed against the inner wall of second housing **703** by two O-rings **720** which abut the circumference of spool **718** and inner wall of the second housing **703**. An axial bore **719** extends through spool **718**. One end of second housing **703** is closed, with explosive push device **707** disposed between the closed end and spool **718**. Electrical wires **715** enter through a gland at the closed end of spool **718** and attach to electrical terminals in explosive push device **707**. An end hole **724** is located at the end distal from the closed end of second housing **703**. The end hole **724** connects to a separate actuatable downhole device (not shown). A side hole(s) **722** is bored in the second housing **703** transversely to the spool and is shown disposed between O-rings **720**. Upon receiving the correct pressure ratios, and having applied the process described above in this disclosure, the computer **710** signals high-voltage capacitor **711** to discharge current over electrical wires **715** to explosive push device **707**. The current causes the explosive push device **707** to detonate an internal charge that drives its piston forward, advancing the spool **718** in the direction of the end hole **724**. The O-rings **720** advance past side hole(s) **722** and external pressurized flow from the wellbore enters second housing **703** through side hole(s) **722** and then passes through the axial bore **719** and through exit hole **724**. A plurality of explosive push devices **707** may be employed to actuate multiple components, such as shearable items for actuating sliding sleeves, valves,

and piston-actuated devices (not shown). Depending on programming, the computer **710** can repeat the detonation of explosive push devices **707** multiple sequential times upon repeatedly receiving the correct pressure ratios subsequent times.

[0095] **FIGURES 8C and 8D** depict a one-piece, single housing version of the explosive actuator shown in **FIGURE 8A**. **FIGURE 8C** depicts, in external isometric view, a one-piece, single housing version of the explosive actuator **700** shown in **FIGURE 8A**. **FIGURE 8D** depicts the explosive actuator **700** with a single housing **709** containing explosive push device **707**.

[0096] Explosive actuator **700** is further comprised of housing **709**, made of a material capable of resisting burst or crush pressure, a pressure transducer **706**, a computer **710**, capacitor(s) **708**, a high-voltage capacitor **711**, a spool **718**, and electrical wires **715**. At the end of housing **709** distal from transducer **706**, spool **718** is housed. A portion of spool **718** is sealed against the inner wall of housing **709** by two O-rings **720** which abut the circumference of spool **718** and inner wall of the second housing **709**. An axial bore **719** extends through spool **718**. Explosive push device **707** is disposed between the high-voltage capacitor **711** and spool **718**. Electrical wires **715** connect the high-voltage capacitor **711** to electrical terminals in explosive push device **707**. An end hole **727** is located at the end distal from the pressure transducer **706**. The end hole **727** connects to a separate actuable downhole device (not shown). A side hole(s) **737** is bored in the housing **709** transversely to the spool **718** and is shown disposed between O-rings **720**. Upon receiving the correct pressure ratios and applying the process described above in this disclosure, the computer **710** signals high-voltage capacitor **711** to discharge current over electrical wires **715** to explosive push device **707**. The current causes the explosive push device **707** to detonate an internal charge that drives its piston forward, advancing the spool **718** in the direction of the end hole **727**. The O-rings **720** advance past side hole(s) **737** and external pressurized flow from the wellbore enters housing **709** through side hole(s) **737** and then passes through the axial bore **719** and through exit hole **727**. A plurality of explosive push devices **707** may be employed to actuate multiple components, such as piston-actuated devices (not shown). Depending on programming, the computer **710** can repeat the detonation of explosive push devices **707** multiple sequential times upon receiving the correct pressure ratios subsequent times.

[0097] Another embodiment utilizes a screw that is encircled by a compression spring with the screw serving to release the compression spring so that it advances a spool to permit flow. This embodiment is comprised of a tube with a pressure transducer affixed to one end of the tube, capacitor for powering electronics, computer, capacitor for powering actuation, and electric motor inside the tube and proximal to the transducer, with the computer communicating with the transducer. The capacitor for powering the electronic components and the capacitor for powering actuation are positioned adjacent to the electric motor. The capacitors may be in the form of a supercapacitor or ultracapacitor, such as those produced by Nanoramics, and may incorporate a DC to DC (direct current to direct current) converter.

[0098] A compression spring is disposed around the circumference of a lead screw, preferably with Acme threads, in this embodiment. The spring is retained in a compressed state by a retaining nut. The retaining nut threadably attaches to the lead nut and possesses a large diameter flange portion located at the end of the nut located distal from the capacitor(s). The large diameter flange portion of the nut is of a diameter larger than the diameter of the compressed spring, such that the nut retains the spring in its compressed state. After analyzing pressure ratios according to the process disclosed above, the computer sends signals a capacitor to discharge. The discharging capacitor causes the connected electric motor to begin rotating. As the motor rotates the attached lead screw, it unthreads itself from the threadably attached retaining nut, releasing the nut. Upon released of the nut, the compressed spring releases its stored energy, pushing the nut against the spool and advancing the spool toward the distal end of the tube, enabling pressurized flow from the wellbore to enter the tube, flow through passageways in the spool, and flow through a hole at the end of the tube to a hydraulically connected downhole device (not shown).

[0099] The tube has a hole or plurality of holes bored transverse to the spool and located, initially, between two O-rings on the circumference of the spool, with these O-rings located proximal to the hole at the end of the tube. These two O-rings seal the hole(s) in the tube such that external pressurized flow cannot enter the remainder of tube in the initial position. A third O-ring is located proximal to the retaining nut. Between this O-ring proximal to the retaining nut and the adjacent O-ring, a transverse, radial hole is bored in the spool to a depth that reaches the center of the spool. An axial bore extends from the end of the spool

proximal to the hole at the end of the tube to the point at which it intersects the transversely bored hole in the spool. The holes in the spool are thus in fluid communication with the hole at the end of the tube.

[00100] With the spring released, it pushes the nut against the spool and advances the spool toward the end of the tube with the hole. The spool advances past the middle O-ring and contacts a mechanical stop in the tube. The spool stops its advance at a point in which the hole(s) in the side of the tube are disposed between the middle O-ring and the O-ring proximal to the retaining nut. In this second position, external pressurized flow enters the tube and passes through the passageways in the spool and through the hole at the end of the tube. A separate downhole device (not shown), hydraulically connected to the hole at the end of the tube, is actuated.

[00101] FIGURES 9A through 9D depict an actuator for advancing a spool and permitting throughflow according to the present subject matter. **FIGURE 9A** depicts an external, isometric view of actuator **800**, with transducer **806** and side hole **822** visible.

FIGURE 9B depicts a section view **9B-9B** of actuator **800** in a first position. Actuator **800** utilizes a rotating lead screw **816** encircled by a compression spring **828**, with the lead screw **816** serving to release the compression spring **828** so that it advances a spool **818** and permits throughflow. Actuator **800** is comprised of housing **804**, made of a material capable of resisting burst or crush pressure, a pressure transducer **806**, capacitor(s) **808**, a high-voltage capacitor **811**, a computer **810**, an electric motor **812**, a lead screw **816**, a compression spring **828**, and a retaining nut **844**. Upon receipt of the required pressure ratios at the pressure transducer **806**, analysis of these ratios is performed by computer **810**, and with correct ratios, the computer **810** proceeds to signal the high-voltage capacitor **811** to discharge and deliver electric current. The high-voltage capacitor **811** discharges and sends electric current to the electric motor **812**, which causes the electric motor **812** to rotate the lead screw **816** in a direction such that said lead screw **816** unthreads itself from the retaining nut **844**. When the retaining nut **844** is released, freeing the compression spring **828** and its stored energy. The compression spring pushes the retaining nut **844** against the spool **818** and advances the spool toward the end hole **824** located at the distal end of housing **804**. A mechanical stop **845**, in **FIGURE 9B** simply the end of housing **804**, limits the travel of the spool **818**.

[00102] **FIGURE 9C** again depicts an external, isometric view of actuator **800**.

FIGURE 9D depicts actuator **800** in section view **9B-9B** and shows the actuator **800** in a second position. The housing **804** has a hole or plurality of side hole(s) **822** bored transverse to the spool **818** and located, in the shown first position, between two O-rings **820** on the circumference of the spool **818**, with these O-rings **820** located proximal to the end hole **824** at the end of the tube. These two O-rings seal the side hole(s) **822** in the housing **804** such that external pressurized flow cannot enter the remainder of housing **804** in the initial position. A third O-ring, the retaining nut-proximal O-ring **825**, is located proximal to the retaining nut **844**. Between this nut-proximal O-ring **825** and the adjacent O-ring **820**, a radial spool bore **819** is bored in the spool **818** to a depth that reaches the center of the spool **818**. An axial bore **830** extends from the end of the spool **818** proximal to the end hole **824** to the point at which it intersects the radial spool bore **819** in the spool **818**. The holes in the spool are thus in fluid communication with the end hole **824**. With the compression spring **828** released, it pushes the retaining nut **844** against the spool **818** and advances the spool **818** toward the end of the housing **804** with the end hole **824**. The spool **818** advances so that the middle O-ring **820** goes past side hole(s) **822**. The spool **818** contacts a mechanical stop **845** in the housing **804** and ceases its advance. The spool **818** stops its advance at a point in which side hole(s) **822** are disposed between the middle O-ring **820** and the retaining nut-proximal O-ring **825**. In this second position, external pressurized flow enters the housing **804** and passes through the radial spool bore **819** and axial bore **830** and through the end hole **824**. A separate downhole device (not shown), is hydraulically connected to the end hole **824** and actuated.

[00103] Another embodiment is an explosive latch actuator that utilizes an explosive push device to actuate a latch mechanism. The actuator houses its components in a tube, with said components including an explosive push device connected to a power device, such as a high-voltage capacitor, by electrical wires. After analyzing pressure ratios according to the process described above in this disclosure, the computer sends a signal that allows current from the power device to flow through the electrical wires to the explosive push device. The current sent to the explosive push device causes its piston to advance forward a small distance, in this case the explosive push device's piston abutting and pushing a latch into an unlocked position, in this process causing the latch to release its mating latch keeper, and in turn freeing a compressed spring which had been retained

by the latch to advance a piston contiguous with the mating latch keeper. The latch keeper-piston has an internal passageway bored in rod axial bore along its axis, with said passageway turning **90** degrees to exit the side of the latch piston transversely through a piston transverse bore. At the piston transverse bore, the now-advanced piston's piston transverse bore hole fluidly connects with a transversely bored side hole(s) in the tubular housing. External pressurized flow can enter through the side hole(s) in the tubular housing, pass through the piston transverse bore and rod axial bore, exit the piston and flow through an end hole in a threaded piston barrel at the end of the housing. The end hole hydraulically connects with a separate downhole device, such as a hydraulic anchor or similar downhole tool.

[00104] **FIGURES 10A and 10B** depict section views of the explosive latch actuator according to the present disclosure. **FIGURE 10A** depicts a half section view of the explosive latch actuator **900**, which includes a tubular housing **904** that houses explosive push device **907** and integrated latch-keeper piston **972**. In detail, explosive actuator **900** is comprised of a housing **909**, made of a material capable of resisting burst or crush pressure, a pressure transducer **906**, a computer **910**, capacitor(s) **908**, a high-voltage capacitor **911**, and an explosive push device **972** that extends a push device piston **975** with significant force when activated. In a first position shown in **FIGURE 10A**, adjacent to explosive push device piston **975** is latch **970**. Latch **970** retains latch-keeper piston, a contiguous latch keeper and piston, at keeper **977**, a keeper that mates latch **970**. Compressed spring **928** applies force against latch **970** and latch-keeper piston **972**. The large diameter portion of latch-keeper piston's piston is shown at latch piston **973**. At the end of housing **904** distal from transducer **906**, a threaded piston barrel **923** is threadably inserted into housing **904**, circumferentially surrounding the rod portion of latch-keeper piston **972**, this rod portion referred to as latch rod **976**. Threaded piston barrel **923** contains a smaller diameter hole than its barrel portion's diameter, with this smaller diameter hole located at the end of housing **904** distal from transducer **906**, said hole referred to as end hole **924**, bored at the axial center of threaded piston barrel **923**. A side hole(s) **922** in housing **904** is bored transverse to latch piston **973**. In this first position as shown in **FIGURE 10A**, the latch piston **973** seals side hole(s) **922**, preventing external pressurized flow from entering latch piston **973** or housing **904**.

[00105] A rod axial bore **919** extends through latch rod **976** to latch piston **973**. A piston transverse bore **921** intersects rod axial bore **919**, with piston transverse bore radially exiting one side of latch piston **973**. In this first position, external pressurized fluid is sealed off by a portion of latch piston **973** positioned so that its circumferential face blocks side hole(s) **922**.

[00106] Upon receiving the correct pressure ratios and applying the process described above in this disclosure, the computer **910** signals high-voltage capacitor **911** to discharge current through electrical wires **915** that connect to explosive push device **907**.

[00107] **FIGURE 10B** shows a half section view of actuator **900** following actuation of explosive push device **907**, whose push device piston **975** has exerted force against latch **971** has unlatched keeper **977** of the latch-keeper piston. The unlatching action frees compressed spring **928**, whose stored energy now exerts force against latch-keeper piston **972**. Compressed spring **928** latch piston **973** toward end hole **924**. In the advanced, second position of **FIGURE 10B**, the latch piston **973** exposes piston transverse bore **921** to side hole **922**, establishing fluid connectivity. External pressurized flow can now enter through side hole **922** and pass through piston transverse bore **921**, rod axial bore **919**, and exit through end hole **924**. The end hole **924** connects to a separate actuable downhole device, such as a hydraulic packer, anchor, or similar downhole tool (not shown). Depending on programming, based on use of the process described above in this disclosure, the computer **910** can repeat the detonation of explosive push devices **907** multiple sequential times upon repeated receipt of the correct pressure ratios in subsequent instances. Furthermore, a plurality of explosive push devices **907** may be employed to actuate multiple connected components (not shown).

[00108] Another embodiment utilizes electrical actuation of dielectrically actuated polymers ("DEAP"), known in the art and produced by companies such as Danfoss, to move a piston in a separate assembly. This embodiment, DEAP actuator **1000**, has a tubular housing **1004**, a transducer **1006** located at one end of housing **1004**, with the transducer in communication with a computer **1010**, and a capacitor **1008** situated between the transducer **1006** and computer **1010** and used for powering the computer **1010**.

Housing **1004** is made of a material capable of resisting burst or crush pressure. High-voltage capacitor **1011** is located adjacent to the computer **1010** in the distal portion of housing **1004** from transducer **1006**. A sealing member **1081** inside housing **1004** seals

capacitor **1008**, computer **1010**, high-voltage capacitor **1011** from external pressure. The high-voltage capacitor connects to a stack of dielectrically actuated polymers, DEAP stack **1007**, with electrical wires. The DEAP stack can be located inside or near to housing **1004**, or can be placed in a disparate location in a wellbore for remote actuation. The DEAP stack changes form when electricity is applied to it, arching upward. This change in form exerts significant force as it occurs, and is capable of moving a hydraulic piston under significant load or pressure. The DEAP stack is composed of a plurality of DEAP membranes, which may be stacked in the nature of Belleville springs with additional layers of DEAP membranes providing additive force, with each deforming to the same shape concurrently with others. The DEAP actuator **1000** functions similarly as other embodiments in this disclosure, with pressure ratios being received by transducer **1006** and analyzed by computer **1010** using the process described above. The computer **1010** signals the high-voltage capacitor to send current to the DEAP stack which deforms and exerts force against a piston, with the piston being part of a downhole tool such as a wellbore anchor or packer (not shown).

[00109] FIGURES 11A and 11B show section views a DEAP actuator according to the teachings of the present disclosure. FIGURE 11A depicts an isometric view of DEAP actuator **1000**, showing the DEAP stack **1007** from an overhead isometric view, with electrical wires **1015** leading from housing **1004** to connect with DEAP stack **1007**.

FIGURE 11B depicts a section view 11B-11B of DEAP actuator **1000**, with a stack of dielectrically actuated polymers, DEAP stack **1007**, being in an actuated position and the individual membrane layers arching upward in the middle, , each adjacent to the next with one on top of another. An unactuated position (not shown), would depict the membrane layers in DEAP stack **1007** as lying flat, each adjacent to the next with one on top of another. DEAP actuator **1000** further includes a tubular housing **1004** made of a material capable of resisting burst or crush pressure, a transducer **1006** located at one end of housing **1004**, a capacitor **1008**, a computer **1010**, and a high-voltage capacitor **1011**. High-voltage capacitor **1011** is located adjacent to the computer **1010** in the distal portion of housing **1004** from transducer **1006**. A sealing member **1081** inside housing **1004** seals capacitor **1008**, computer **1010**, and high-voltage capacitor **1011** from external pressure. Through sealing member **1081**, the high-voltage capacitor **1011** connects to DEAP stack **1007** with electrical wires **1015**. The DEAP stack **1007** is shown proximal to housing **1004**

in **FIGURE 11A** and **FIGURE 11B**. DEAP stack **1007** may be located, alternatively, a long distance from housing **1004** and the actuating power source, high-voltage capacitor **1011**. Further alternatively, a small version of DEAP stack **1007** could be placed inside housing **1004** and with a piston and barrel (not shown) inline inside housing **1004**. DEAP stack

5 **1007** has its layers of membranes electrically connected so as to receive current concurrently and deform into another shape concurrently. Shown atop DEAP stack **1007** is piston **1073** with piston rod **1076**. Piston **1073**, along with DEAP stack **1007**, can be placed in a cylinder or barrel housing of a separate downhole device such as a wellbore anchor or packer (not shown), well known in the art.

10 **[00110]** Upon receiving the correct pressure ratios and applying the process described above in this disclosure, the computer **1010** signals high-voltage capacitor **1011** to discharge current through electrical wires **1015**, supplying that current to DEAP stack **1007**.

[00111] **FIGURE 11B** further shows section view **11B-11B** of DEAP actuator **1000** in

15 an actuated position, with the computer **1010** having analyzed the proper pressure ratios by applying the algorithm described in this disclosure and having signaled high-voltage capacitor **1011** to discharge, which has supplied current over electrical wires **1015** to actuate the DEAP stack **1007**. The membrane layers of DEAP stack **1007** have changed form upon receiving current, and are shown arched upward. The stacking of membrane

20 layers adds force, producing a similar result to stacking Belleville springs in compression. However, the DEAP membranes begin in a completely flat form (not shown), and with electrical actuation, deform, or change shape, and in doing so exert significant force. Piston **1073** can be advanced with force sufficient to set a downhole anchor or packer (not shown) with the force applied from DEAP stack **1007**.

25 **[00112]** In summary, therefore, the present disclosure provides a triggering mechanism for oilfield wellbore downhole equipment. The presently disclosed triggering mechanism includes a housing for inserting downhole in an oilfield wellbore and associating with a downhole tool in a predetermined and desired position within the oilfield wellbore. The housing further associates downhole with a computer processor, a clock, at

30 least one sensor circuit, and an electrical power source.

[00113] The computer processor includes computer processing circuitry for processing executable instructions associated with a plurality of physical parameters within

the oilfield wellbore. The computer processor further includes at least one computer memory circuit including a computer readable memory circuit for storing the executable instructions and data associated with the plurality of physical parameters. The clock provides timing data to the computer processor. The at least one sensor circuit senses the plurality of physical parameters within the oilfield wellbore and generates and communicates the data associated with the plurality of physical parameters. The plurality of physical parameters include at least a pressure parameter associated with the pressure within the oilfield wellbore downhole environment. The electrical power source includes circuitry for powering the computer processor downhole within the oilfield wellbore.

[00114] A valve control circuit receives a plurality of valve control commands from the computer processor for controlling a valve, wherein the valve control commands control a valve associated with a flow path flowing a control fluid. A valve operating in response to the valve control commands controls flow of the control fluid from the flow path to an associated hydromechanical device within the oilfield wellbore. The hydromechanical device operates in association with the downhole tool within the oilfield wellbore.

[00115] Here, the valve control commands derive from real-time sampling of the downhole physical parameters. In response to the real-time sampling of the downhole physical parameters, the computer processor generates a plurality of ratio-based derivative values relating to physical parameter differences over a predetermined time span within the downhole wellbore environment. In response to the plurality of ratio-based derivative values relating to the physical parameter differences the triggering mechanism generates triggering commands to the valve for flowing the control fluid to the associated hydromechanical device. The triggering commands actuate the associated hydromechanical device from a first condition or status to a second condition or status.

[00116] The foregoing description of embodiments is provided to enable any person skilled in the art to make and use the subject matter. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the novel principles and subject matter disclosed herein may be applied to other embodiments without the use of the innovative faculty. The claimed subject matter set forth in the claims is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein. It is contemplated that additional embodiments are within the spirit and true scope of the disclosed subject matter.

WHAT IS CLAIMED IS:

1. A triggering mechanism for oilfield wellbore downhole equipment, comprising;
a housing for inserting downhole in an oilfield wellbore and associating with a
downhole tool in a predetermined and desired position within said oilfield wellbore;

5 said housing further for associating there within a computer processor, a clock, at
least one sensor circuit, and an electrical power source;

 said computer processor comprising computer processing circuitry for
processing executable instructions associated with a plurality of physical parameters within
said oilfield wellbore, said computer processor further comprising at least one computer
10 memory circuit comprising a computer readable memory circuit for storing said executable
instructions and data associated with said plurality of physical parameters;

 said clock comprising circuitry for providing timing data to said computer
processor;

 said at least one sensor circuit for sensing said plurality of physical parameters
15 within said oilfield wellbore and generating and communicating said data associated with
said plurality of physical parameters, said plurality of physical parameters comprising at
least a pressure parameter associated with the pressure within said oilfield wellbore
downhole environment; and

 said electrical power source comprising circuitry for powering said computer
20 processor downhole within said oilfield wellbore;

 a valve control circuit for receiving a plurality of valve control commands from said
computer processor for controlling a valve, wherein said valve control commands control a
valve associated with a flow path flowing a control fluid;

 a valve operating in response to said valve control commands and in response
25 thereto controlling flow of said control fluid from said flow path to an associated
hydromechanical device within said oilfield wellbore, said hydromechanical device
operating in association with said downhole tool within said oilfield wellbore;

 wherein said valve control commands derive from real-time sampling of said
downhole physical parameters; and further

30 wherein, in response to said real-time sampling of said downhole physical
parameters said computer processor generates a plurality of ratio-based derivative values

relating to physical parameter differences over a predetermined time span within said downhole wellbore environment; and

in response to said plurality of ratio-based derivative values relating to said physical parameter differences generating triggering commands to said valve for flowing said control
5 fluid to said associated hydromechanical device for actuating said associated hydromechanical device from a first condition or status to a second condition or status.

2. The downhole electronic triggering and actuation mechanism of Claim 1, further comprising executable instructions executing on said computer processor whereby said
10 plurality of ratio-based derivative values provide for only triggering said actuator after said plurality of ratio-based derivative values are analyzed and confirmed to match preprogrammed parameters.

3. The downhole electronic triggering and actuation mechanism of Claim 1, further
15 comprising executable instructions executing on said computer processor whereby said plurality of ratio-based derivative values prevent triggering of said valve unexpectedly or undesiredly in response to spikes in wellbore pressures.

4. The downhole electronic triggering and actuation mechanism of Claim 1, wherein
20 said electrical power source further comprises a capacitor powered circuit unconnected with equipment or circuitry outside the wellbore.

5. The downhole electronic triggering and actuation mechanism of Claim 1, further comprising executable instructions executing on said computer processor whereby said
25 plurality of ratio-based derivative values prevent triggering said valve control circuitry in response to pressure pulses deriving from use of measurement while drilling (MWD) equipment.

6. The downhole electronic triggering and actuation mechanism of Claim 1, further
30 comprising executable instructions executing on said computer processor whereby said plurality of ratio-based derivative values prevent triggering said valve control circuitry in

response to gradual changes in wellbore pressures and, instead, respond only to a predetermined set of pressure ratios within the wellbore.

7. The downhole electronic triggering and actuation mechanism of Claim 1, further comprising executable instructions executing on said computer processor whereby said plurality of ratio-based derivative values provide data for use by said computer processor for performing multiple ratio-based pressure derivative analyses deriving from pressures and time spans for use in conditional logic circuitry for confirming the presence of a valve actuation triggering event.

8. A method for operating downhole electronic triggering and actuation mechanism for oilfield wellbore downhole equipment, comprising the steps of;

providing a housing for inserting downhole in an oilfield wellbore and associating with a downhole tool in a predetermined and desired position within said oilfield wellbore;

further associating with said housing a computer processor, a clock, at least one sensor circuit, and an electrical power source;

providing, in association with said computer processor, processing circuitry for processing executable instructions associated with a plurality of physical parameters within said oilfield wellbore, said computer processor further comprising at least one computer memory circuit comprising a computer readable memory circuit for storing said executable instructions and data associated with said plurality of physical parameters;

providing, from said clock, timing data to said computer processor;

sensing said plurality of physical parameters within said oilfield wellbore and generating and communicating said data associated with said plurality of physical parameters using said at least one sensor circuit, said plurality of physical parameters comprising at least a pressure parameter associated with the pressure within said oilfield wellbore downhole environment; and

powering said computer processor downhole within said oilfield wellbore using said electrical power source;

receiving a plurality of valve control commands from said computer processor for controlling a valve using a valve control circuit, wherein said valve control commands control a valve associated with a flow path flowing a control fluid;

operating a valve in response to said valve control commands and in response thereto controlling flow of said control fluid from said flow path to an associated hydromechanical device within said oilfield wellbore, said hydromechanical device operating in association with said downhole tool within said oilfield wellbore;

5 deriving said valve control commands from real-time sampling of said downhole physical parameters; and further

10 generating a plurality of ratio-based derivative values relating to physical parameter differences over a predetermined time span within said downhole wellbore environment in response to said real-time sampling of said downhole physical parameters said computer processor; and

15 generating triggering commands to said valve for flowing said control fluid to said associated hydromechanical device for actuating said associated hydromechanical device from a first condition or status to a second condition or status in response to said plurality of ratio-based derivative values relating to said physical parameter differences.

20 **9.** The method of Claim **8**, further comprising the step of executing executable instructions on said computer processor whereby said plurality of ratio-based derivative values provide for only triggering said actuator after said plurality of ratio-based derivative values are analyzed and confirmed to match preprogrammed parameters.

25 **10.** The method of Claim **8**, further comprising the step of executing executable instructions on said computer processor whereby said plurality of ratio-based derivative values prevent triggering of said valve unexpectedly or undesiredly in response to spikes in wellbore pressures.

30 **11.** The method of Claim **8**, further comprising the step of providing said electrical power source further comprises a capacitor powered circuit unconnected with equipment or circuitry outside the wellbore.

35 **12.** The method of Claim **8**, further comprising the step of executing said executable instructions on said computer processor whereby said plurality of ratio-based derivative

values prevent triggering said valve control circuitry in response to pressure pulses deriving from use of measurement while drilling (MWD) equipment.

13. The method of Claim 8, further comprising the step of executing said executable instructions on said computer processor whereby said plurality of ratio-based derivative values prevent triggering said valve control circuitry in response to gradual changes in wellbore pressures and, instead, respond only to a predetermined set of pressure ratios within the wellbore.

14. The method of Claim 8, further comprising the step of executing said executable instructions on said computer processor whereby said plurality of ratio-based derivative values provide data for use by said computer processor for performing multiple ratio-based pressure derivative analyses deriving from pressures and time spans for use in conditional logic circuitry for confirming the presence of a valve actuation triggering event.

15. A method for manufacturing a downhole electronic triggering and actuation mechanism, comprising the steps of:

making a housing for inserting downhole in an oilfield wellbore and associating with a downhole tool in a predetermined and desired position within said oilfield wellbore;

installing in association with said housing a computer processor, a clock, at least one sensor circuit, and an electrical power source;

said computer processor comprising computer processing circuitry for processing executable instructions associated with a plurality of physical parameters within said oilfield wellbore, said computer processor further comprising at least one computer memory circuit comprising a computer readable memory circuit for storing said executable instructions and data associated with said plurality of physical parameters;

said clock comprising circuitry for providing timing data to said computer processor;

said at least one sensor circuit for sensing said plurality of physical parameters within said oilfield wellbore and generating and communicating said data associated with said plurality of physical parameters, said plurality of physical parameters comprising at

least a pressure parameter associated with the pressure within said oilfield wellbore downhole environment; and

said electrical power source comprising circuitry for powering said computer processor downhole within said oilfield wellbore;

5 making a valve control circuit for receiving a plurality of valve control commands from said computer processor for controlling a valve, wherein said valve control commands control a valve associated with a flow path flowing a control fluid;

making a valve operating in response to said valve control commands and in response thereto controlling flow of said control fluid from said flow path to an associated
10 hydromechanical device within said oilfield wellbore, said hydromechanical device operating in association with said downhole tool within said oilfield wellbore;

wherein said valve control commands derive from real-time sampling of said downhole physical parameters; and further

wherein, in response to said real-time sampling of said downhole physical
15 parameters said computer processor generates a plurality of ratio-based derivative values relating to physical parameter differences over a predetermined time span within said downhole wellbore environment; and

programming said computer processor such that in response to said plurality of ratio-based derivative values relating to said physical parameter differences said trigger
20 mechanism generates triggering commands to said valve for flowing said control fluid to said associated hydromechanical device for actuating said associated hydromechanical device from a first condition or status to a second condition or status.

16. The downhole electronic triggering and actuation mechanism manufacturing
25 method of Claim **15**, further comprising the step of making executable instructions for executing on said computer processor whereby said plurality of ratio-based derivative values provide for only triggering said actuator after said plurality of ratio-based derivative values are analyzed and confirmed to match preprogrammed parameters.

17. The downhole electronic triggering and actuation mechanism manufacturing
30 method of Claim **15**, further comprising the step of making executable instructions executing on said computer processor whereby said plurality of ratio-based derivative

values prevent triggering of said valve unexpectedly or undesiredly in response to spikes in wellbore pressures.

5 **18.** The downhole electronic triggering and actuation mechanism manufacturing method of claim **15**, further comprising the step of making said electrical power source further comprises a capacitor powered circuit unconnected with topside equipment or circuitry.

10 **19.** The downhole electronic triggering and actuation mechanism manufacturing method of Claim **15**, further comprising the step of making executable instructions for executing on said computer processor whereby said plurality of ratio-based derivative values prevent triggering said valve control circuitry in response to pressure pulses deriving from use of measurement while drilling (MWD) equipment.

15 **20.** The downhole electronic triggering and actuation mechanism manufacturing method of Claim **15**, further comprising the step of making executable instructions for executing on said computer processor whereby said plurality of ratio-based derivative values prevent triggering said valve control circuitry in response to gradual changes in wellbore pressures and, instead, respond only to a predetermined set of pressure ratios
20 within the wellbore.

1/16

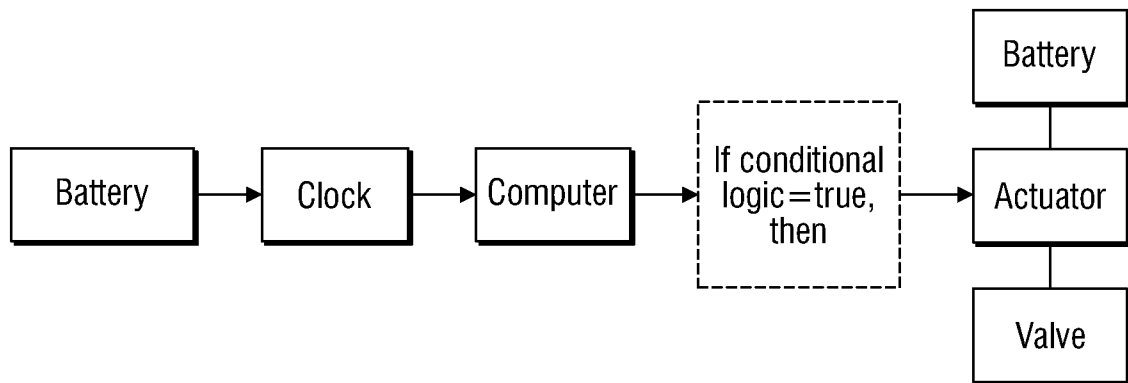


FIG. 1A

			x = sqrt root			y=sqr rt base X 2			z=sqr root base X 3						
p time	cycle	pressure	x	y	z		y/x	z/y	z/x	cycle	y2/x1	z3/y2	z3/x1		
2 min	P1	1500	38.729833	77.45967	116.1895004		2	1.5	3	1	2.19089				
2 min	P2	1800	42.426407	84.85281	127.2792206		2	1.5	3	2		1.573213			
2 min	P3	1980	44.497191	88.99438	133.4915728		2	1.5	3	3			3.446738		
	cycle	base p	x	y	z		y/x	z/y	z/x	cycle	y2/x1	z3/y2	z3/x1		
2 min	P1	3000	54.772256	109.5445	164.3167673		2	1.5	3	1	2.19089				
2 min	P2	3600	60	120	180		2	1.5	3	2		1.573213			
2 min	P3	3960	62.928531	125.8571	188.7855927		2	1.5	3	3			3.446738		

LOGIC: Ambient/hydrostatic pressure (e.g. slow change during trip) does not trigger. Pressure change must be fast as in algorithm.

Readings = 1 per second, rolling stack of readings

Applied pressures constant within 10 (adjust amplitude to expected pressure variation norms when pumping)

Pressure deployment lag +/- 20 seconds (adjust amplitude based on worst case/deepest case)

IF stable P1 runs clock 120 seconds +/- 20 seconds AND P2 at 120% of P1 runs clock 120 seconds +/- 20 seconds

AND P3 at 110% of P2 clock 120 seconds +/- 20 seconds

AND $y^2/x_1 = 2.19 \pm 5\%$ and $z^3/y_2 = 1.57 \pm 5\%$ and $z^3/x_1 = 3.44 \pm 5\%$

THEN driver/controller/actuator causes valve to set the anchor

FIG. 1B

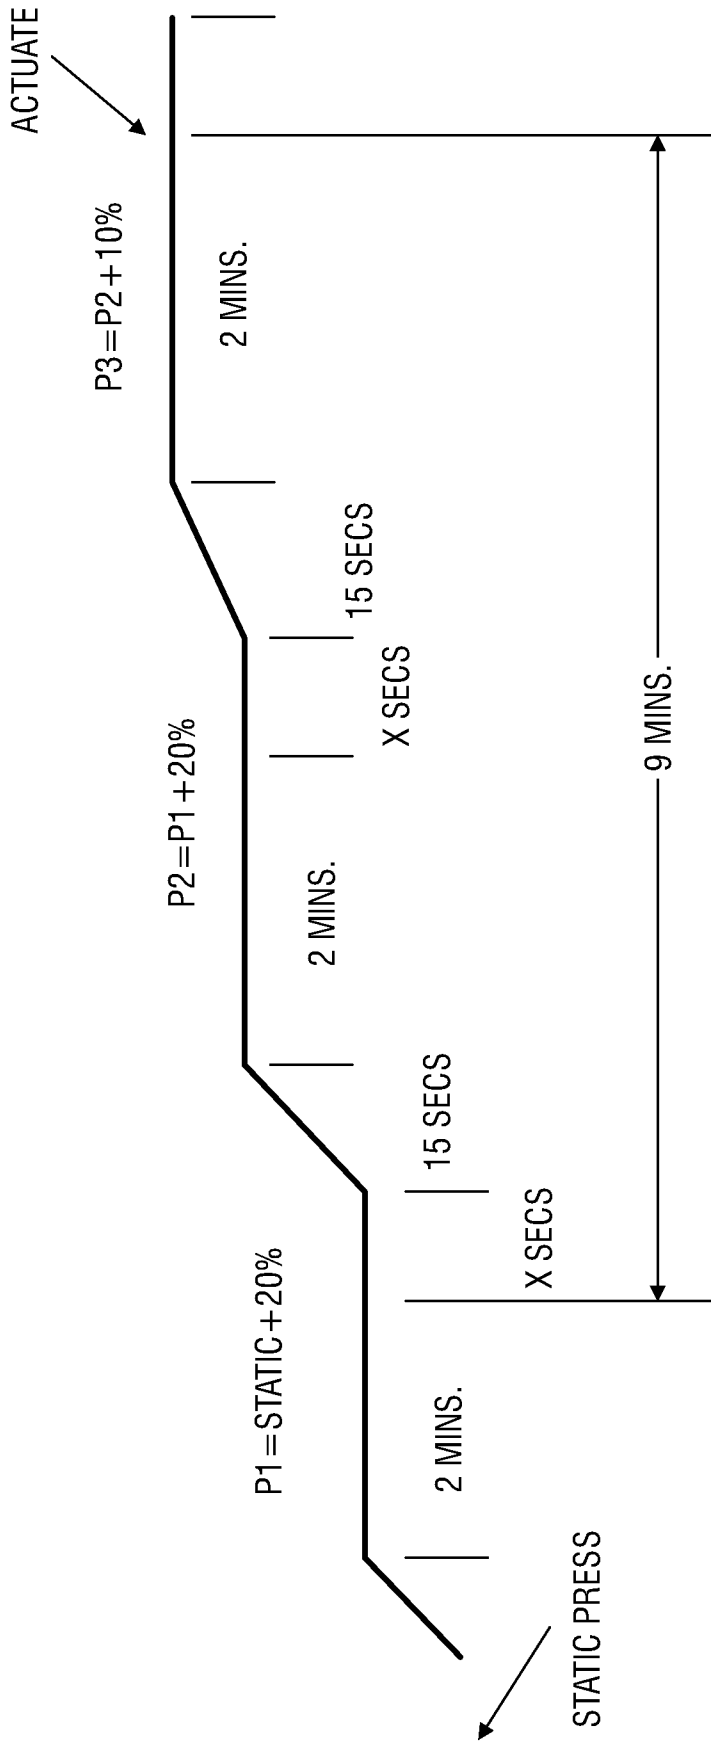


FIG. 1C

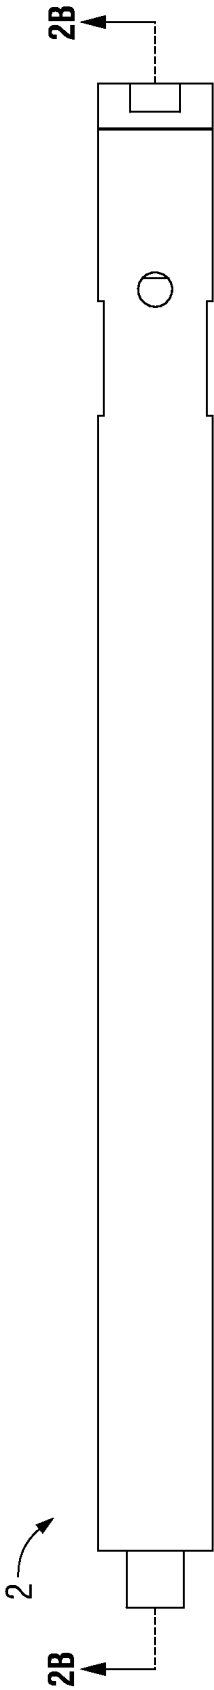


FIG. 2A

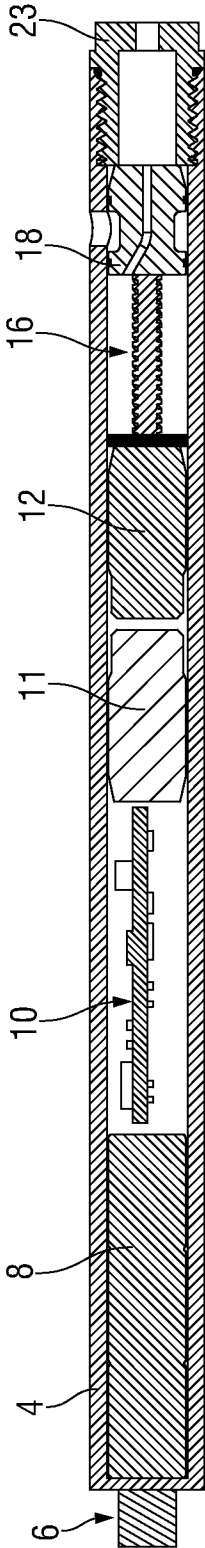


FIG. 2B

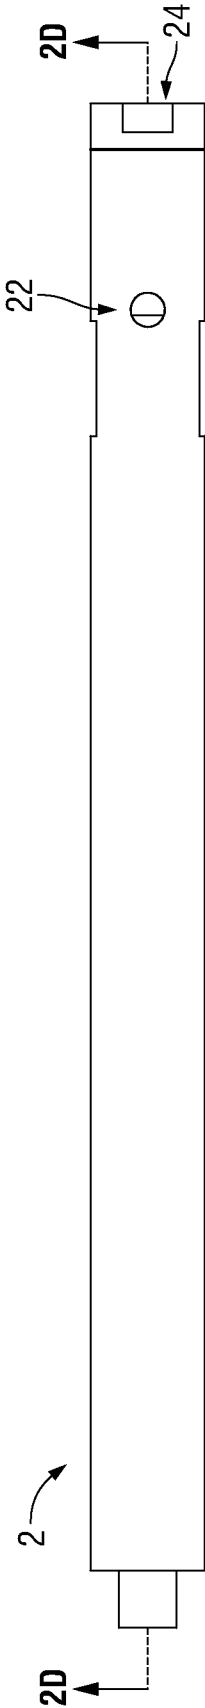


FIG. 2C

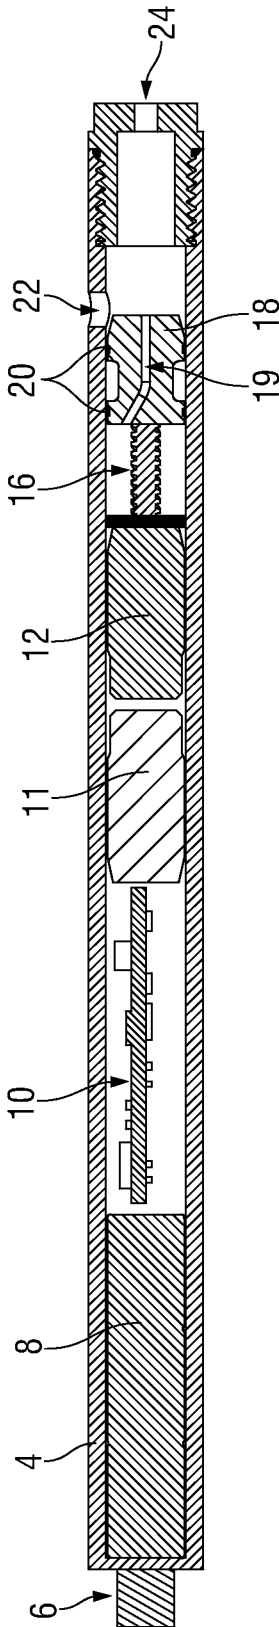


FIG. 2D



FIG. 3A

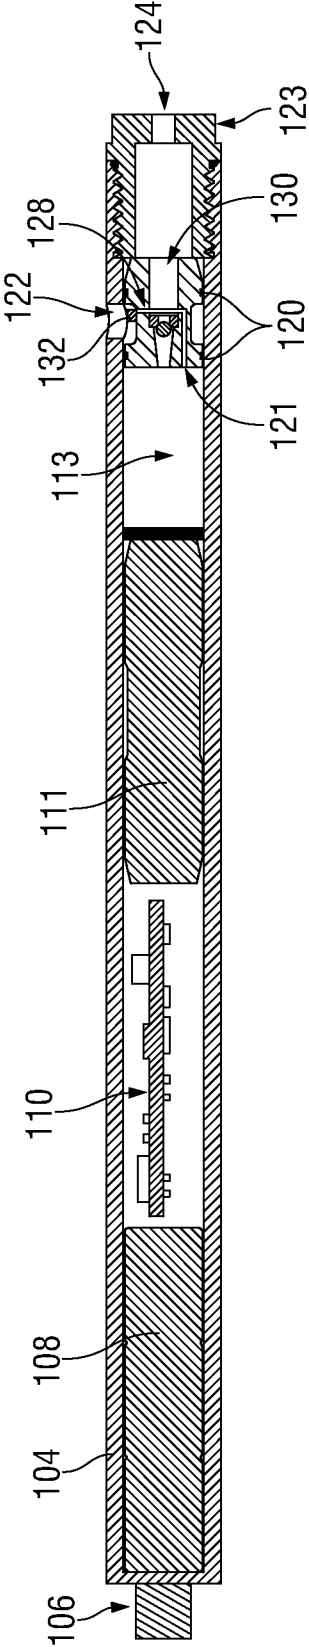


FIG. 3B

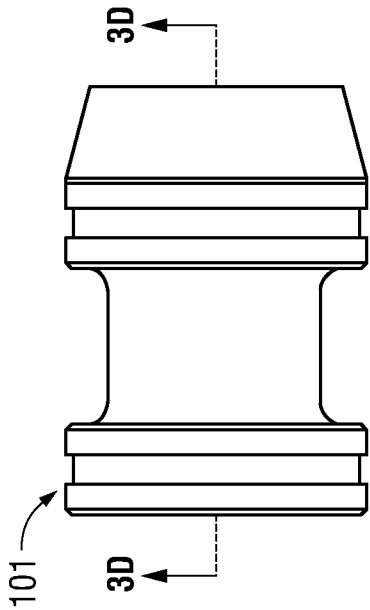


FIG. 3C

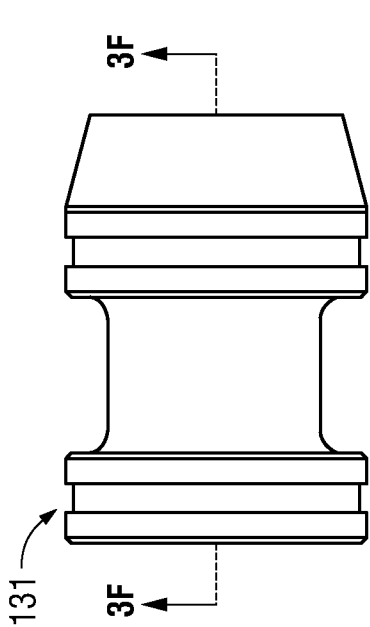


FIG. 3E

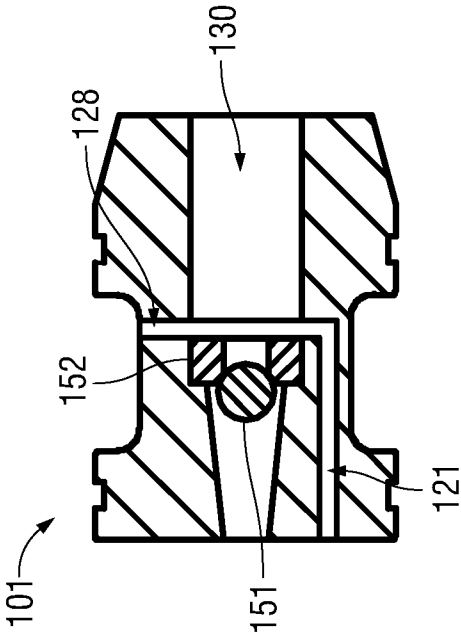


FIG. 3D

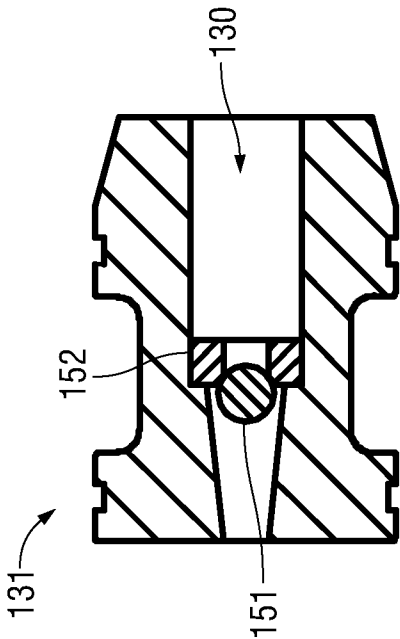


FIG. 3F

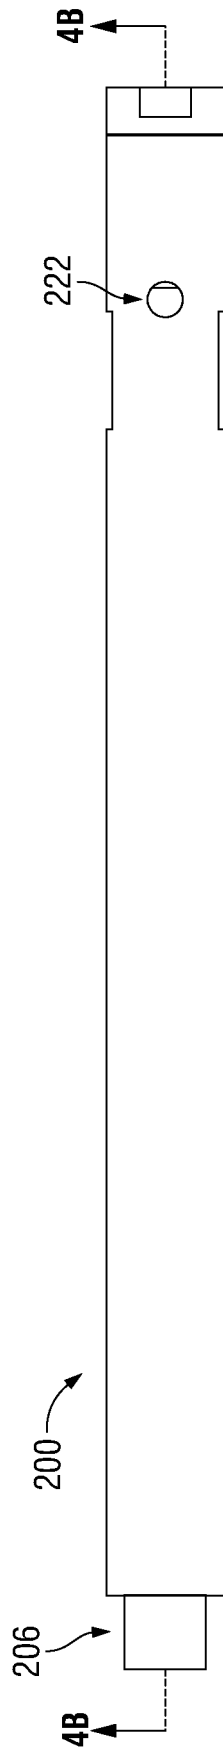


FIG. 4A

7/16

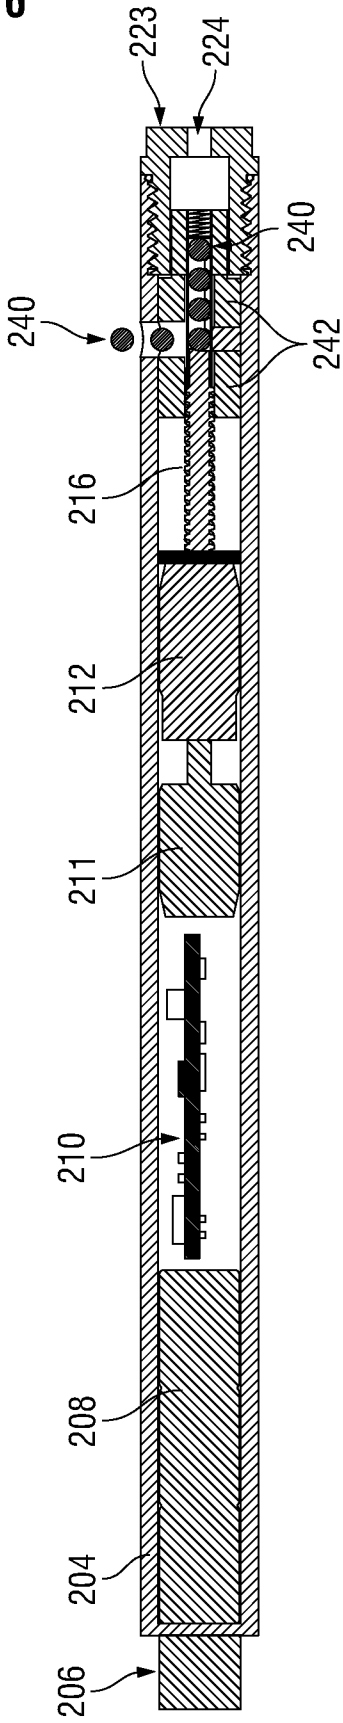


FIG. 4B

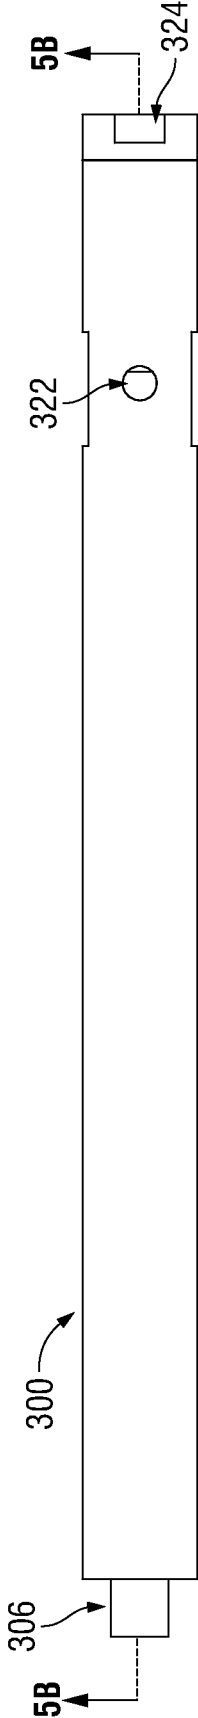


FIG. 5A

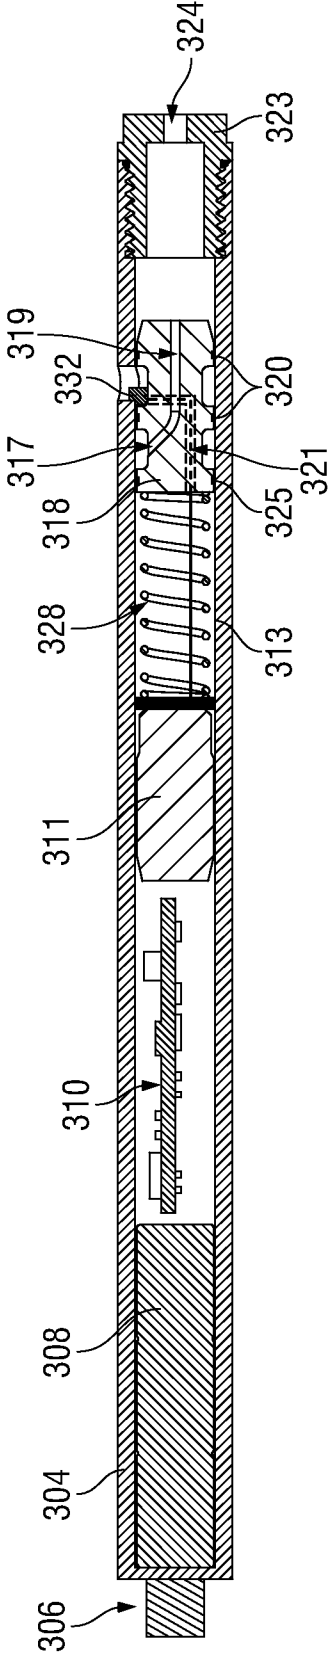


FIG. 5B

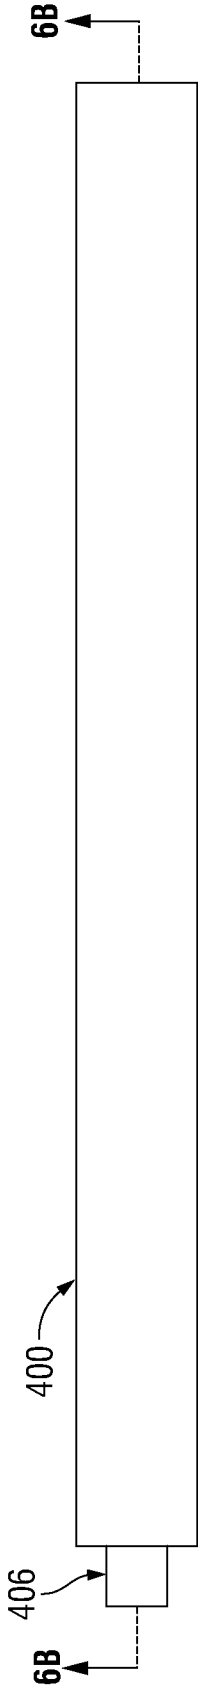


FIG. 6A

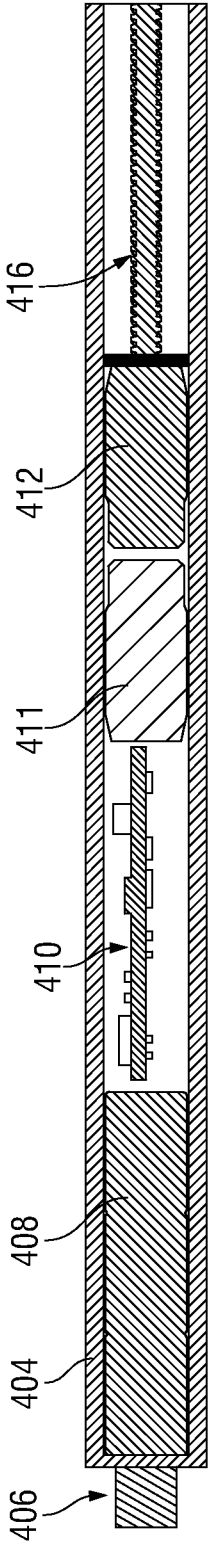


FIG. 6B

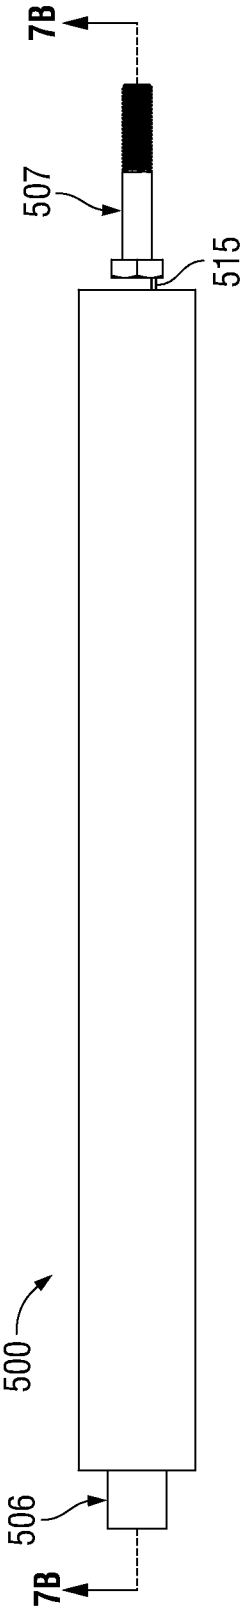


FIG. 7A

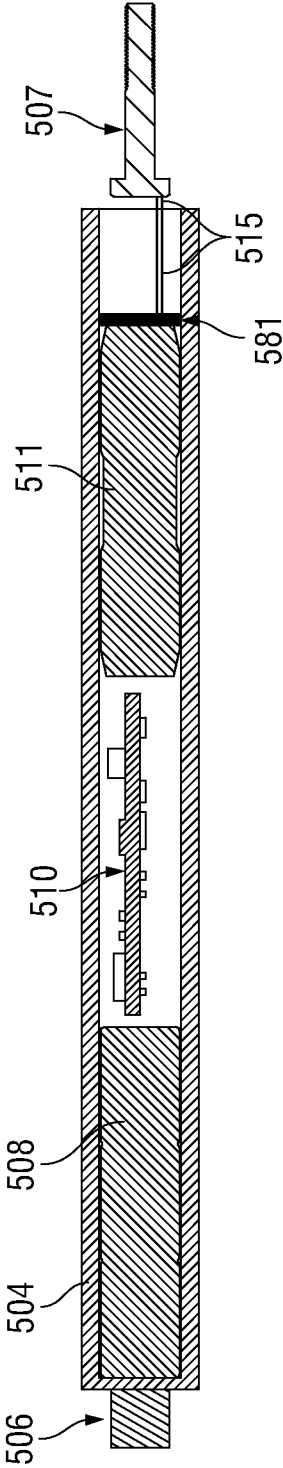


FIG. 7B

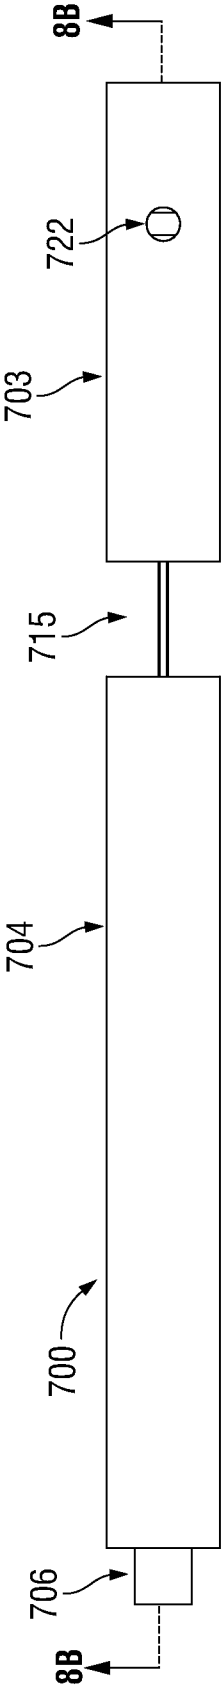


FIG. 8A

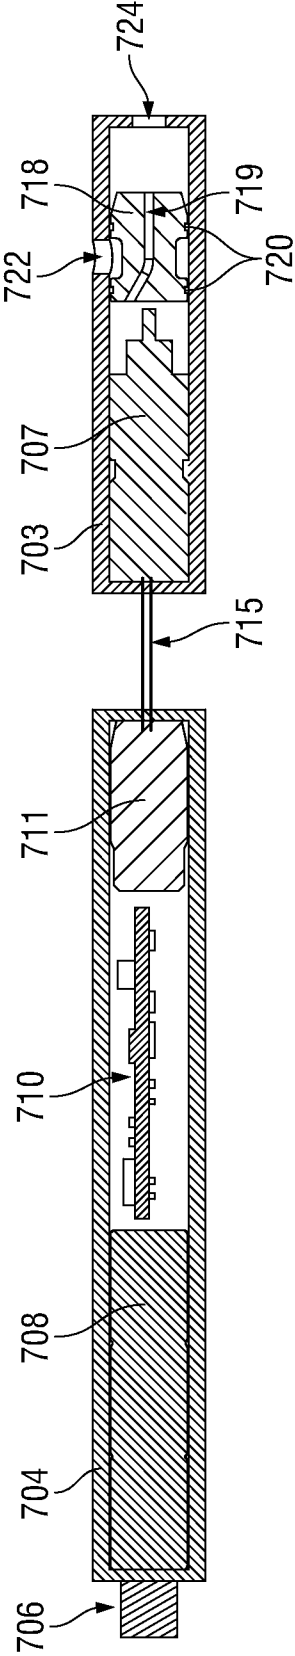


FIG. 8B



FIG. 8C

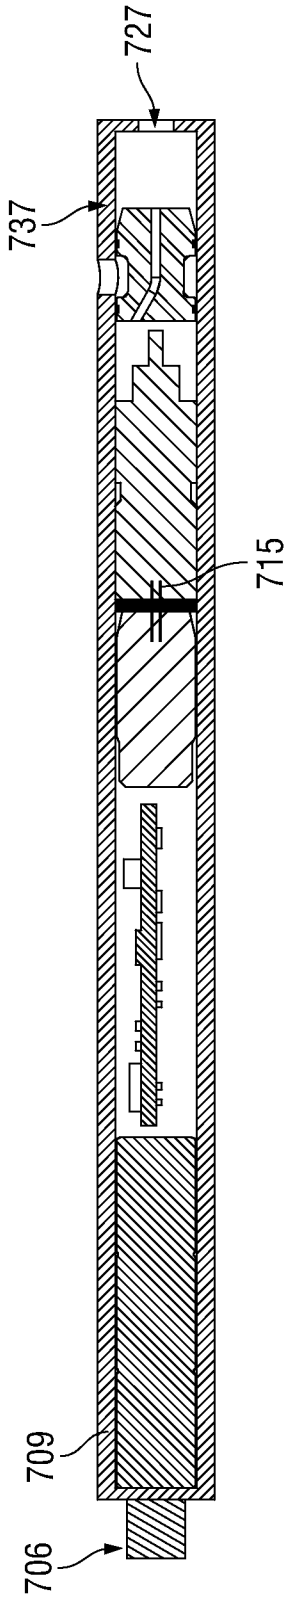


FIG. 8D

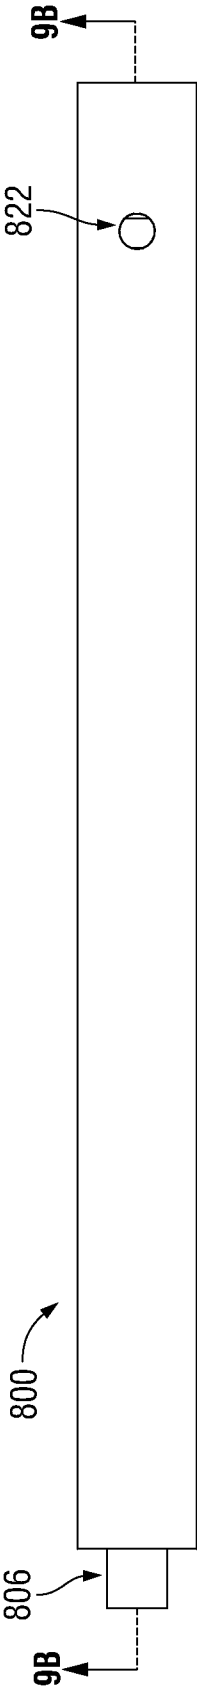


FIG. 9A

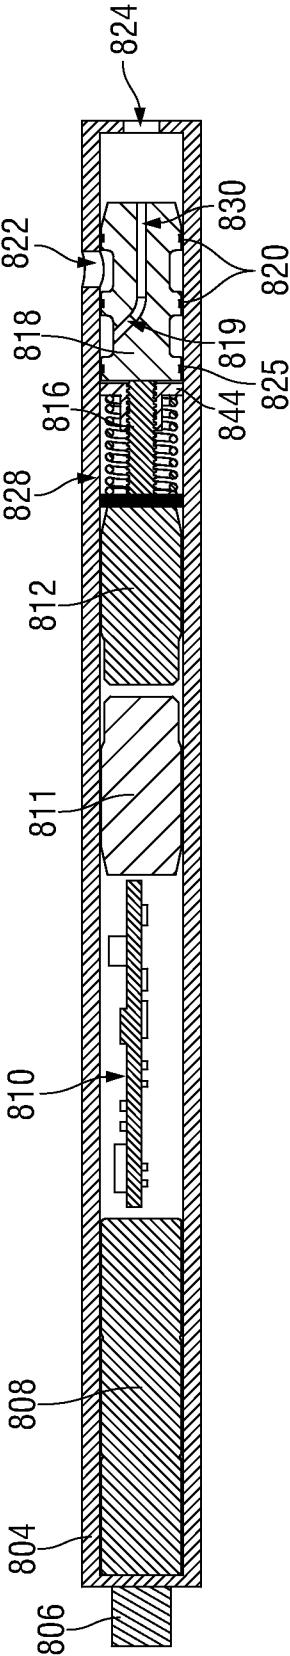


FIG. 9B

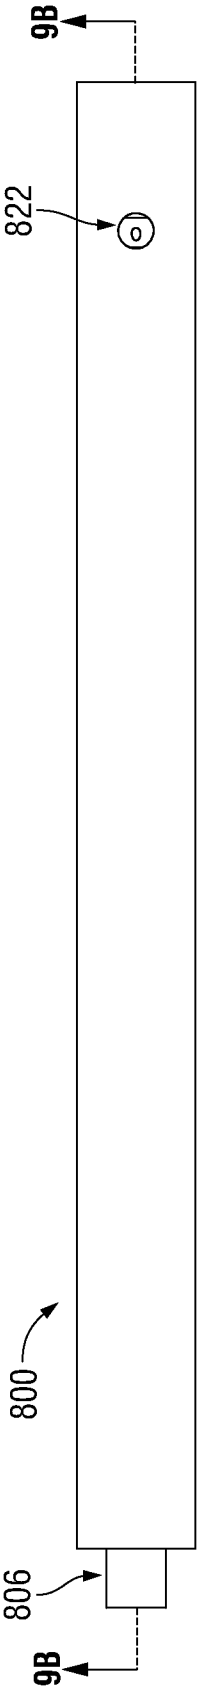


FIG. 9C

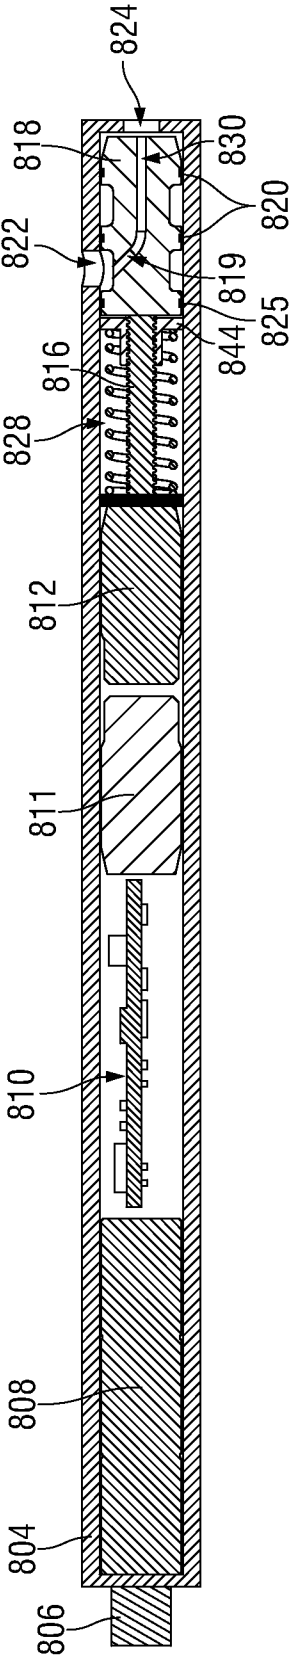


FIG. 9D

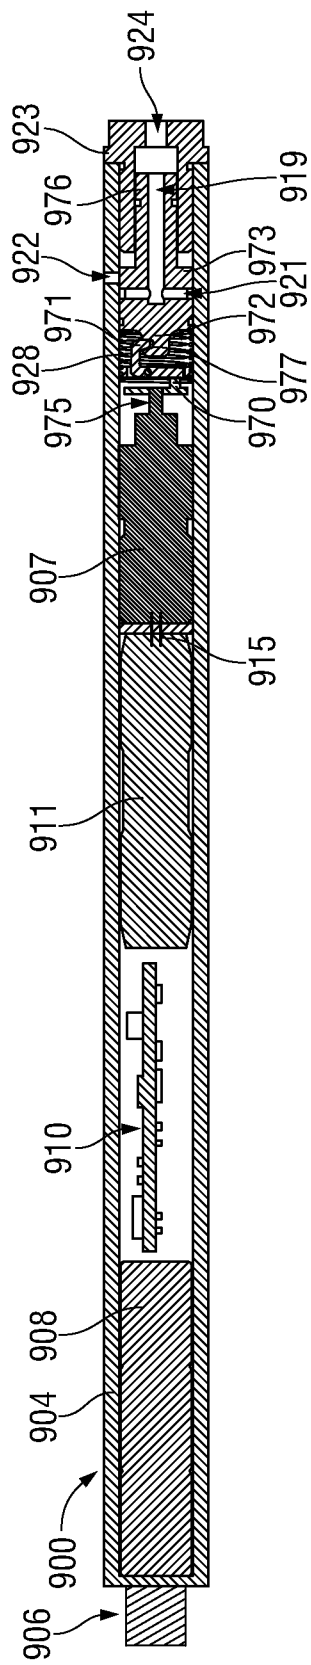


FIG. 10A

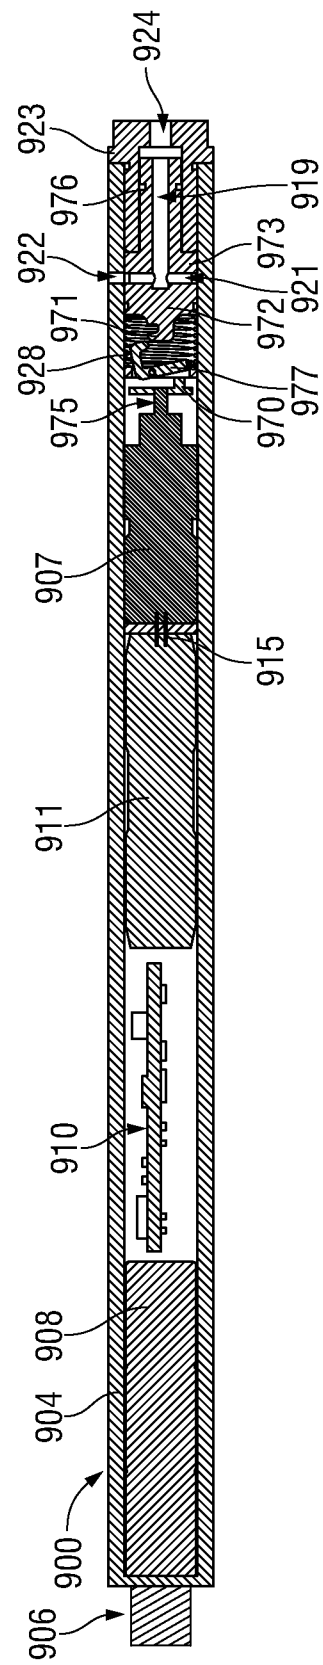


FIG. 10B

16/16

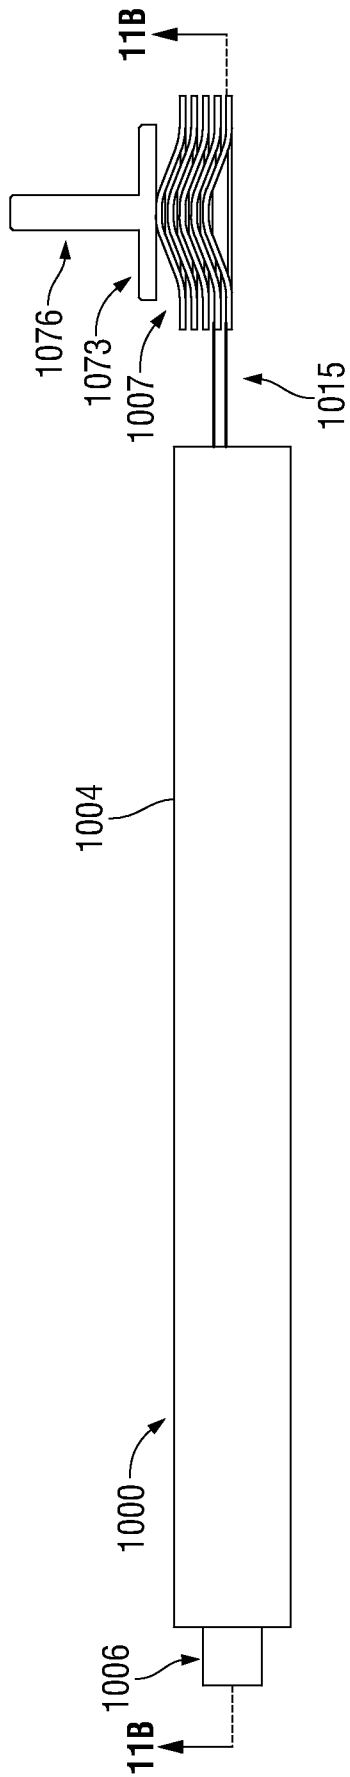


FIG. 11A

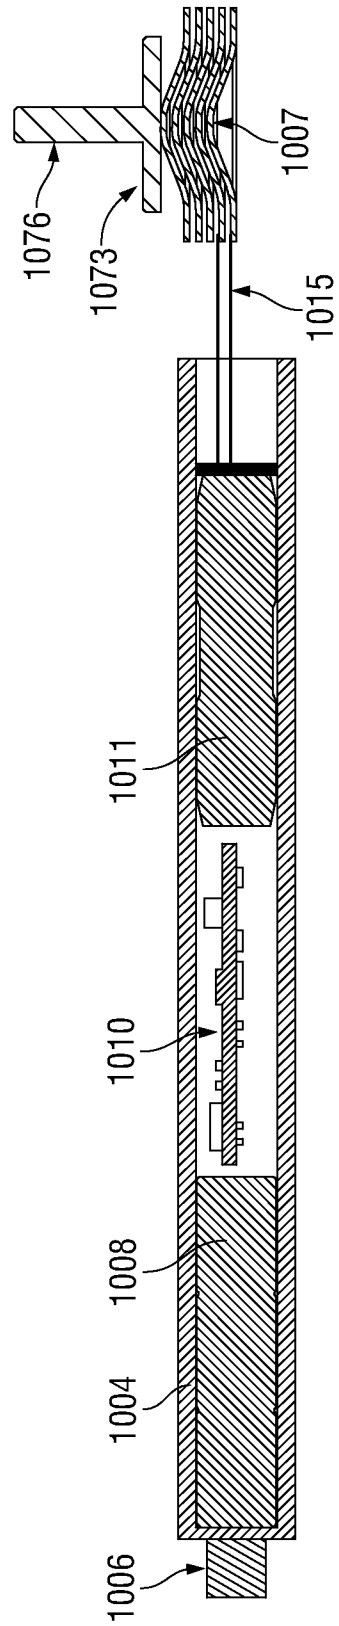


FIG. 11B