United States Patent [19]

Taylor et al.

[11] **3,897,230**

[45] **July 29, 1975**

[54] **COOLING SYSTEM**

[75] Inventors: **Harold L. Taylor,** Hebron, Ind.; **John M. Marshall,** South Holland, Ill.

[73] Assignee: **Inland Steel Company,** Chicago, Ill.

[22] Filed: **May 9, 1973**

[21] Appl. No.: **358,480**

[52] **U.S. Cl.** ..... **62/266;** 62/375; 164/89; 164/283 S; 266/4 S; 266/6 S; 72/201

[51] **Int. Cl.** **F25d 23/02**

[58] **Field of Search** ..... 62/63, 373, 374, 375, 378, 62/266; 266/4 S, 6 S; 72/201; 164/283 S, 89

[56] **References Cited**

UNITED STATES PATENTS

1,859,359	5/1932	Fisk	266/6 S
2,287,825	6/1942	Postlewaite	62/63 X
3,245,671	4/1966	Takaishi	266/4 S
3,420,083	1/1969	Safford et al.	72/201
3,423,254	1/1969	Safford et al.	266/4 S X
3,531,334	9/1970	Schrader et al.	148/153
3,546,911	12/1970	Lenz	72/201
3,675,908	7/1972	Amend	266/6 S
3,687,145	8/1972	Schrader et al.	134/114

FOREIGN PATENTS OR APPLICATIONS

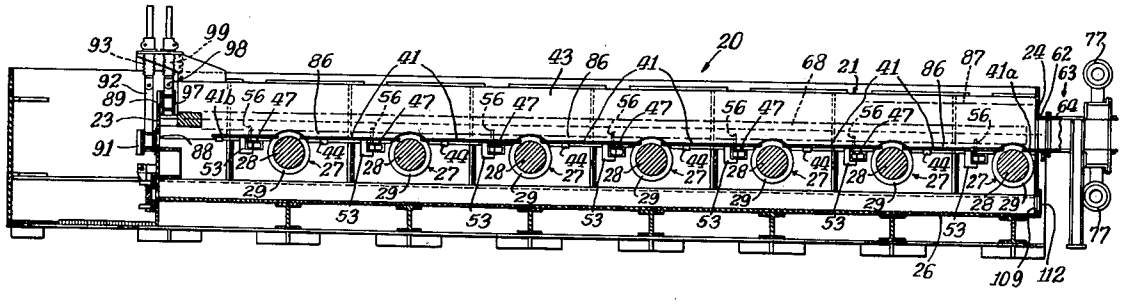
1,847,039	2/1962	Germany

Primary Examiner—William F. O'Dea
Assistant Examiner—Ronald C. Capossela
Attorney, Agent, or Firm—Hibben, Noyes & Bicknell

[57] **ABSTRACT**

A cooling system for cooling steel slabs or the like comprises an elongated tank with parallel rollers for conveying the heated slab horizontally beneath the surface of a water bath. Water curtains from angularly directed upper and lower nozzles seal the entry opening in the end of the tank through which the slab is introduced into the tank and also supply cooling water to the tank. The rollers have axially spaced disk portions for supporting the slab in spaced relation above guide plates or aprons extending between the rollers. Inlet cooling water from the lower water curtain impinges against the lower surface of the slab and is diverted into and flows at high velocity through the restricted cooling channel defined between the guide plates or aprons and the underside of the slab. In a continuous form of the cooling system, a water curtain sealed outlet opening for the slabs is also provided in the opposite end of the tank. Intermediate cooling water nozzles may also be provided between the ends of the tank.

14 Claims, 13 Drawing Figures



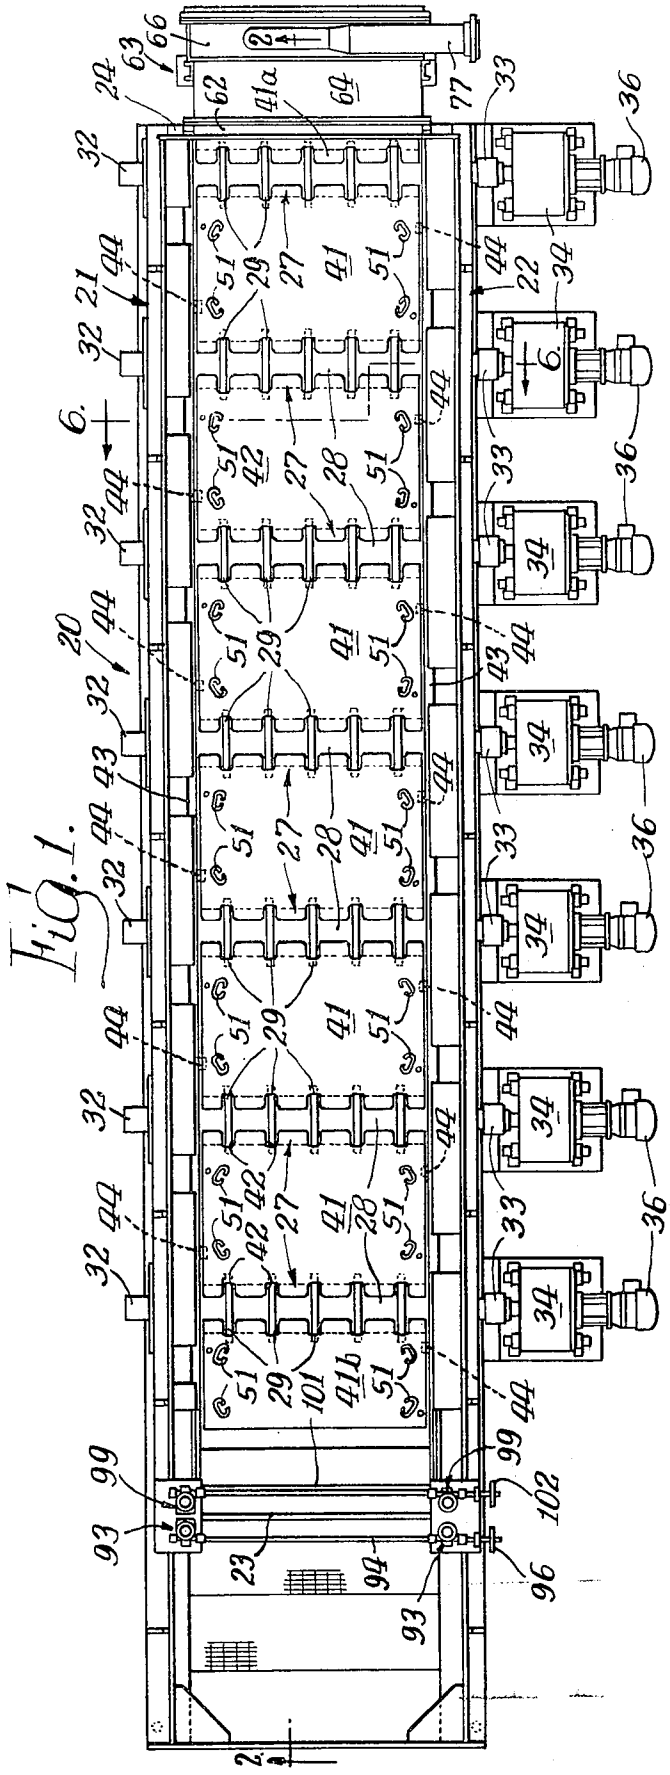


Fig. 1.

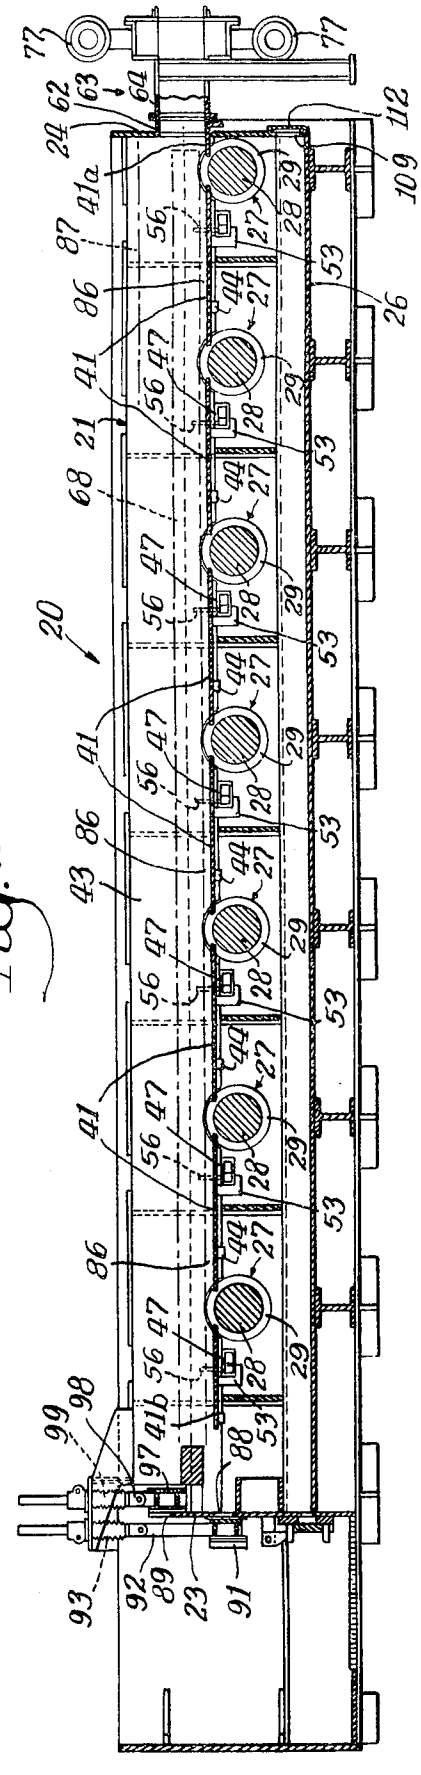


Fig. 2.

Fig. 3.

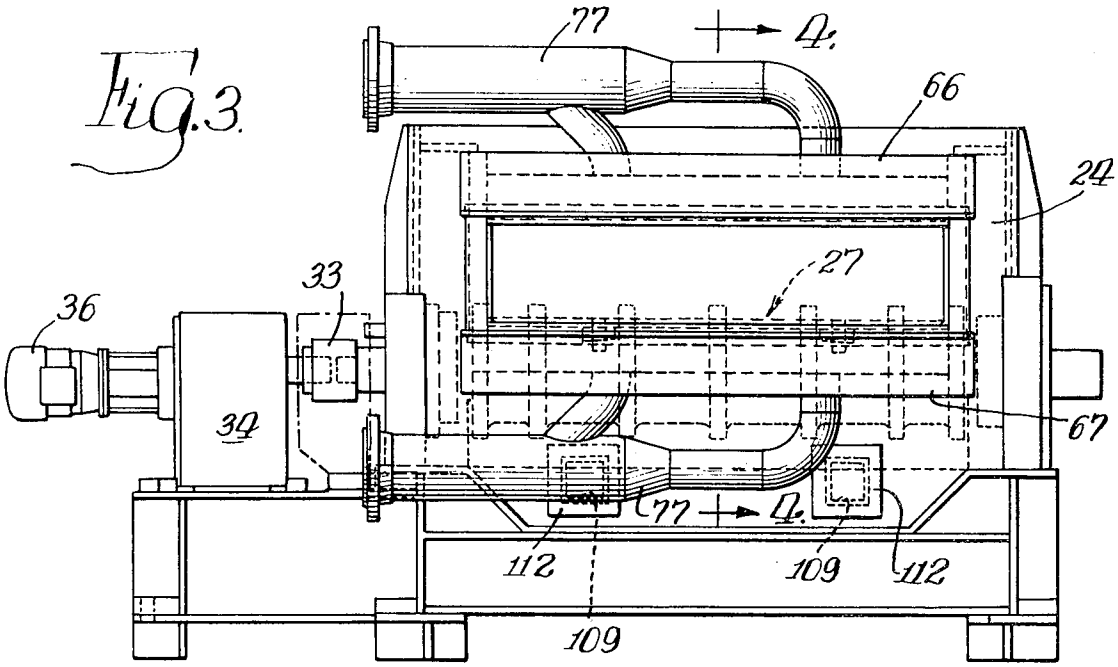
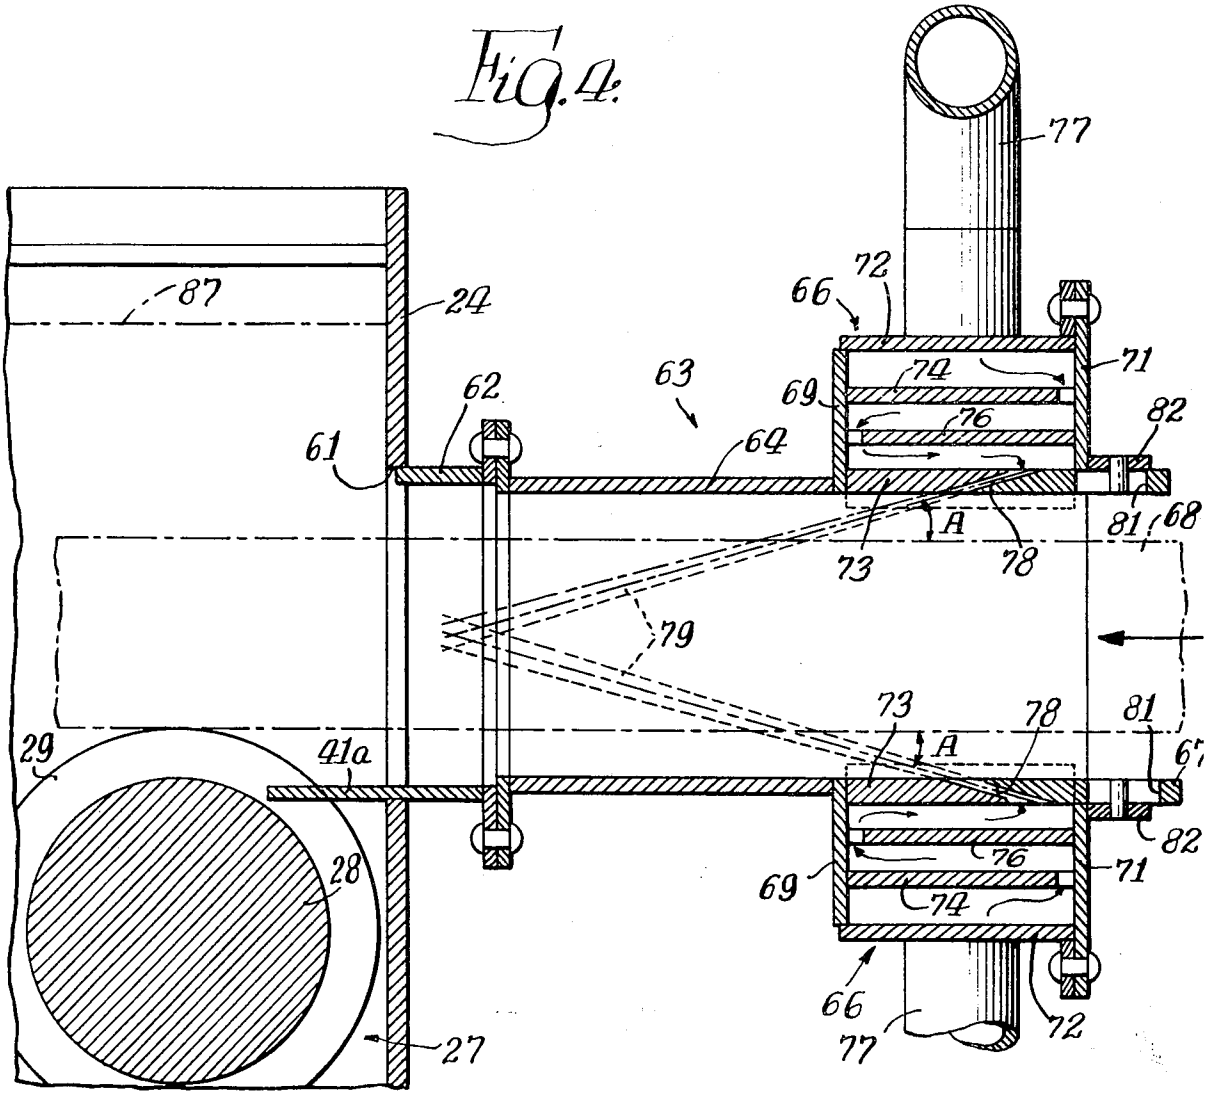

77
4
66
24
27
33
36
34
67
77
4
112
109
112
109

Fig. 4.


77
87
24
72
66
71
74
63
62
69
76
82
61
64
A
81
68
73
78
79
73
78
81
29
41a
A
67
82
28
76
71
69
74
66
77
72
27

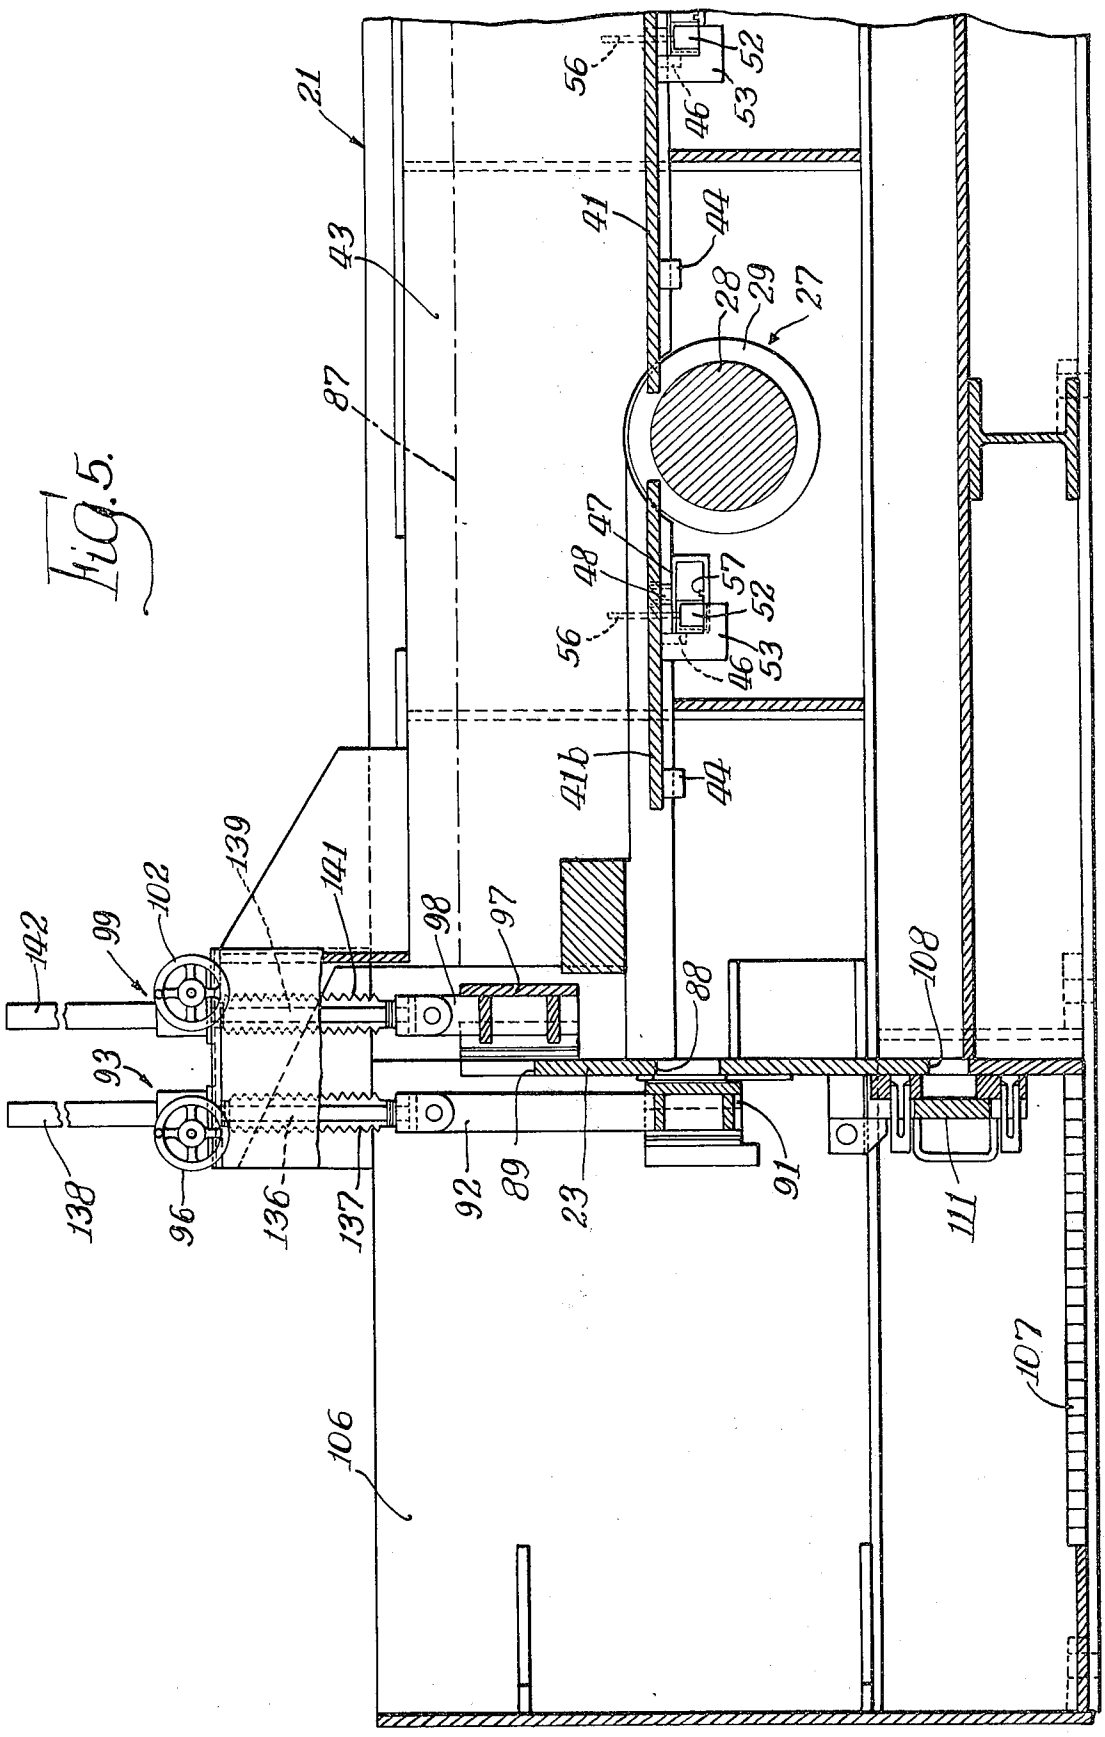

21
43
87
41
44
28
29
27
47
48
57
52
56
53
46
41b
44
139
141
102
99
142
98
97
88
108
93
138
96
136
137
92
89
23
91
111
107
106

Fig. 5.

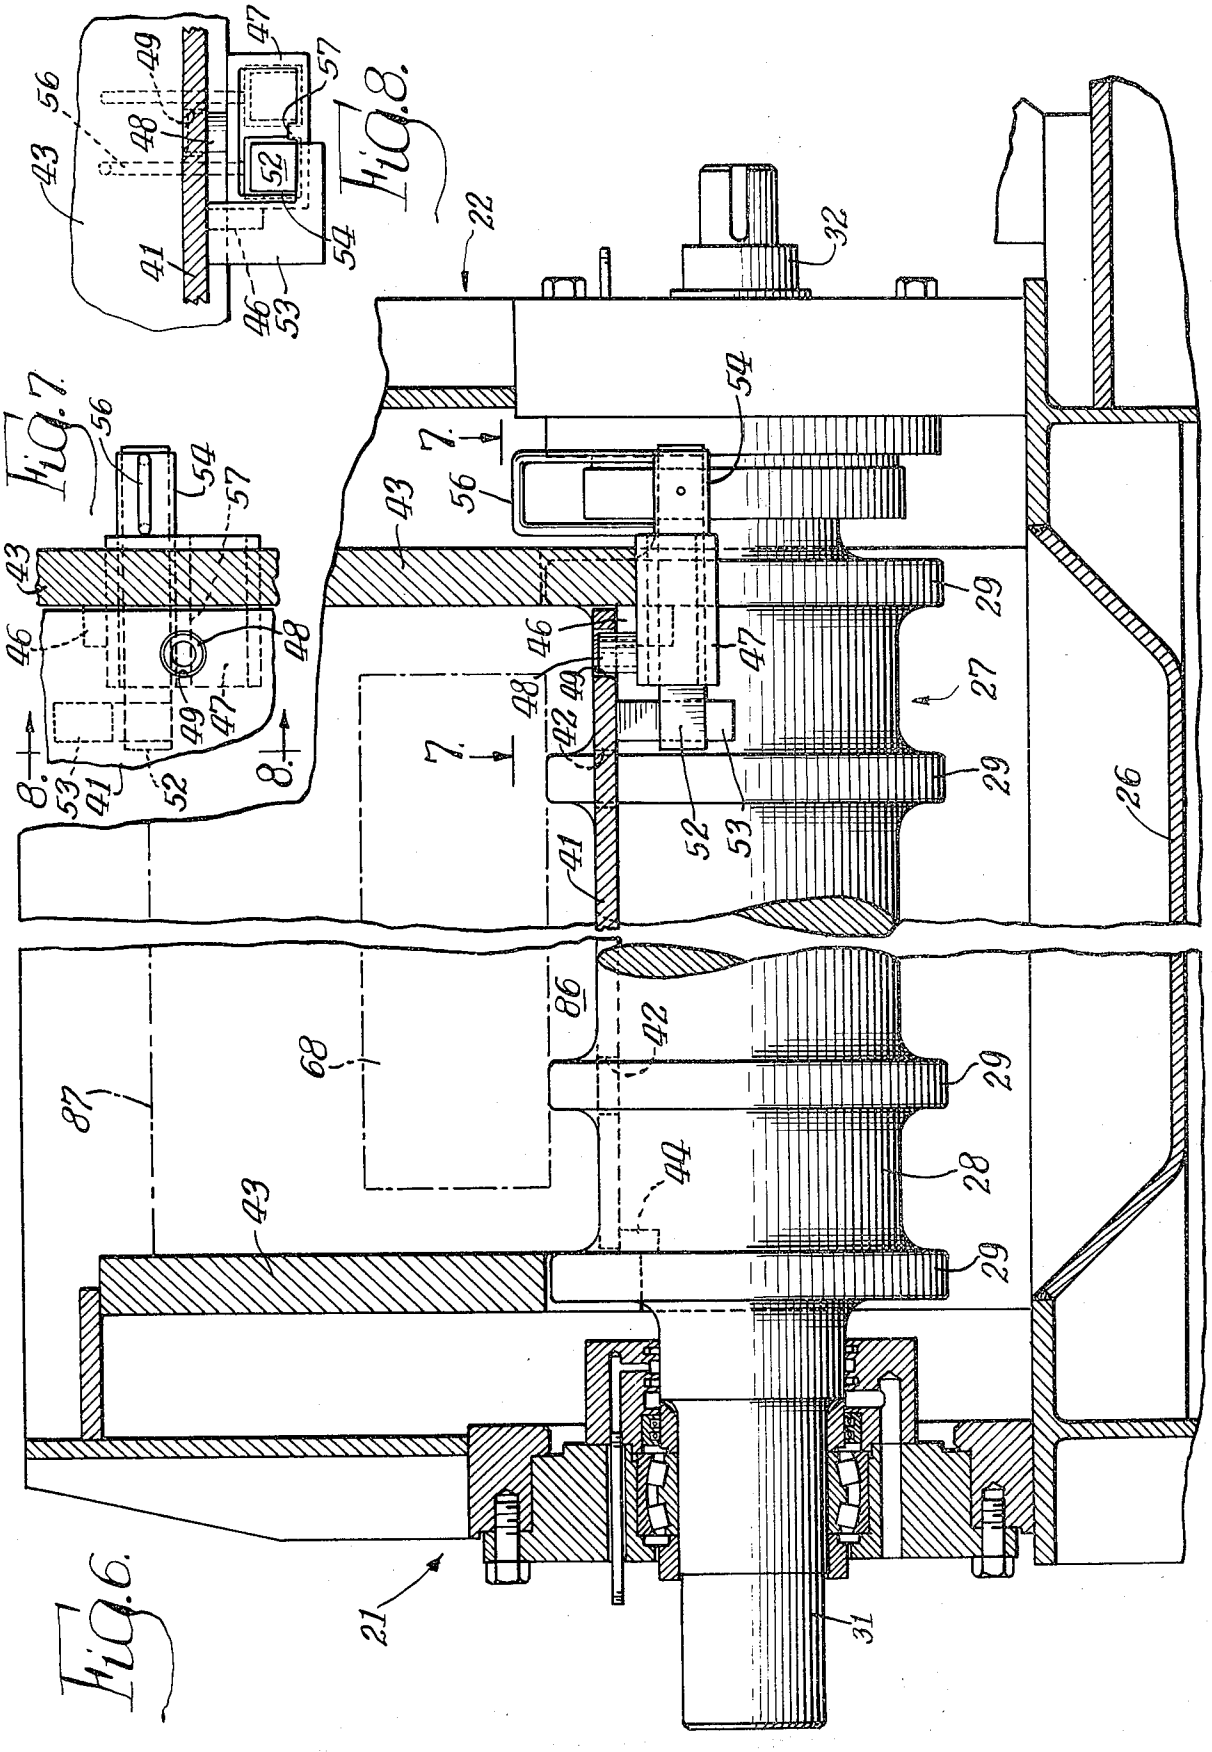

Fig. 6.
Fig. 7.
Fig. 8.
21
22
26
27
28
29
31
32
40
41
42
43
46
47
48
49
52
53
54
56
57
68
86
87

FIG. 10.

FIG. 11.

FIG. 12.

FIG. 9a.

FIG. 9b.

COOLING SYSTEM

This invention relates to a novel and improved cooling system for water cooling metal objects, particularly cast or hot rolled steel bodies such as slabs, plates, beams, bars, billets, rounds, and structural shapes. The invention includes both a novel method and a novel apparatus.

For many years hot steel slabs have been air cooled, but air cooling requires a long period of time, e.g. 16 to 24 hours, and results in a large inventory of slabs being cooled. In recent years water cooling facilities for slabs have been developed which have the advantage of faster cooling, reduction of slab inventory, and minimized scale formation. One type of slab cooler comprises a so-called "water wheel" in which slabs are introduced into radial compartments of a rotating wheel structure and immersed in a bath of agitated water. However, the capital cost of such equipment is quite high. Another type of slab cooler utilizes stationary banks of water sprays through which the slabs are conveyed. The principal disadvantages of spray-type coolers are the large water flow rates required, the large number of spray nozzles required, and the difficulties of obtaining and maintaining uniform cooling conditions. A further disadvantage of spray-type coolers is that they do not permit complete access to the slabs or other work-pieces because of the presence of the required piping and nozzles over the top of the tank.

The present invention provides an improved cooling system which can be used to cool a variety of products and which combines the advantages of rapid and uniform immersion cooling with low capital cost and ease of operation.

Accordingly, a primary object of the invention is to provide a novel and improved water cooling system for cooling steel objects and shapes which overcomes the disadvantage of the air cooling and water cooling systems heretofore known.

A further object of the invention is to provide a novel and improved water cooling system for steel slabs and the like which provides the advantages of immersion cooling but does not require massive and costly equipment for lifting and lowering the heavy material.

Another object of the invention is to provide a novel and improved water cooling system for steel slabs and the like which utilizes horizontal conveyor movement of the material being cooled but does not utilize water sprays which require high water flow rates and have serious maintenance problems.

A further object of the invention is to provide a novel and improved water cooling system for steel slabs and the like which is readily adapted for intermittent batch cooling of selected work-pieces or for continuous cooling of a succession of work-pieces.

Still another object of the invention is to provide a novel quench method and a novel quench apparatus for achieving the aforementioned results.

Other objects and advantages of the invention will become apparent from the subsequent detailed description taken in conjunction with the accompanying drawings, wherein:

FIG. 1 is a top plan view of one embodiment of a slab cooling apparatus in accordance with the present invention;

FIG. 2 is a longitudinal sectional view taken along the line 2—2 of FIG. 1;

FIG. 3 is an end elevational view, on an enlarged scale, as seen from the right end of FIG. 1;

FIG. 4 is a fragmentary transverse sectional view, on an enlarged scale, taken along the line 4—4 of FIG. 3;

FIG. 5 is an enlarged view of the left-hand end portion of the structure shown in FIG. 2;

FIG. 6 is a broken transverse sectional view, on an enlarged scale, taken along the line 6—6 of FIG. 1;

FIG. 7 is a fragmentary view taken along the line 7—7 of FIG. 6;

FIG. 8 is a fragmentary view taken along the line 8—8 of FIG. 7;

FIGS. 9*a* and 9*b* are schematic side elevational views showing the operating principles of the invention;

FIG. 10 is a schematic plan view of a further embodiment of the invention;

FIG. 11 is a longitudinal sectional view of the apparatus shown schematically in FIG. 10; and

FIG. 12 is an enlarged fragmentary sectional view taken along the line 12—12 of FIG. 10.

The invention, briefly described, comprises an elongated cooling tank adapted to contain a water bath and having an inlet opening in an end wall for introducing a heated slab or other work-piece into the tank beneath the bath surface. A plurality of driven conveyor rollers are arranged in parallel relation spaced along the length of the tank, and the rollers are provided with axially spaced parallel disk portions for supporting the slab or work-piece and moving it horizontally into and out of the bath. Angularly disposed nozzles having slit orifices are arranged at the tank opening to provide angularly intersecting water curtains which seal the opening and prevent water from flowing out of the tank. Guide plates or aprons are disposed between adjacent rollers to provide a substantially continuous barrier or wall spaced slightly from the lower surface of the slab or work-piece supported on the roller disks. The angularly directed sealing water enters the elongated narrow cooling or quench channel thereby defined at the underside of the slab or work-piece and insures rapid and effective cooling at the underside. The sealing water is also directed in effective cooling relation along the upper surface of the slab or work-piece. For batch cooling, the slab or work-piece is moved into the cooling tank through the water curtains at the inlet opening and is then withdrawn reversely through the same opening. For a continuous operation, the tank may also have an exit opening at its opposite end which is provided with a similar nozzle arrangement for sealing the opening, in which case the slabs or work-pieces are conveyed continuously through the tank from one end to the other. For most efficient operation the center of the slab or work-piece should be in substantial alignment vertically with the intersection of the sealing water curtains at the tank inlet, and at least during the initial phase of the cooling, a portion of the slab or work-piece should be positioned in the water curtains. The presence of the slab or work-piece in the water curtains insures that the angularly directed curtains are impacted against the upper and lower horizontal surfaces of the slab or work-piece and are thence diverted longitudinally along these surfaces to obtain the desired effective cooling action.

FIGS. 1–9*b* illustrate one embodiment of the invention which is particularly suited for intermittent batch cooling of cast or hot rolled slabs. For example, as an adjunct to a continuous slab casting facility, it is very

important to have a suitable means for effecting rapid cooling of selected slabs so that they may be evaluated promptly for quality control purposes. Although the invention will be described hereinafter with particular reference to slab cooling, it should be understood that the invention is also useful in cooling other articles such as plates, bars, billets, rounds, beams, and structural shapes.

An elongated rectangular open top tank **20** has side walls **21** and **22**, end walls **23** and **24**, and a bottom wall **26**. A plurality of parallel conveyor rollers **27** are disposed transversely between the side walls of the tank **20** adjacent the bottom thereof and spaced longitudinally along the length of the tank. As best seen in FIG. **6**, each roller **27** has a cylindrical body portion **28**, a plurality of larger diameter disk-shaped portions **29** spaced axially along the body portion, and integral shaft portions **31** and **33** which are journalled in suitable bearings in the side walls **21** and **22**, respectively. The shaft portions **31** of the rollers **27** are coupled, as at **33** (FIGS. **1** and **3**), to gear reduction units **34** which are in turn connected to a plurality of electric motors **36** for driving the rollers.

As hereinafter explained in greater detail, an important feature of the invention is the provision of a plurality of rectangular guide plates or aprons **41** interposed between the rollers **27** to provide a substantially continuous barrier or channel wall along the length of the tank **20** underlying the upper edges of the roller disk portions **29**. As seen in FIGS. **1**, **2**, and **5**, transverse edges of the aprons **41** fit with close clearance adjacent the body portions **28** and disk portions **29** of the rollers and are provided with edgewise slots or notches **42** to receive the disk portions **29**. Each apron **41** is removably supported along its longitudinal edges by four projecting lugs or flanges which extend inwardly of the tank from the lower edges of a pair of elongated inner partitions **43** (FIG. **6**) comprising part of the tank side wall structures **21** and **22**. Two of these supporting lugs for each apron **41** are shown at **44**, and the other two, designated at **46**, are affixed to a pair of tubular box structures **47** secured to the partitions **43** and extending inwardly in slightly spaced relation below the apron. To insure proper alignment of the aprons **41** in relation to the rollers **27** when the aprons are supported on the lugs **44** and **46**, each of the box structures **47** is provided with an upstanding tubular element **48** (FIG. **6**) which is received in a corresponding aperture **49** in the apron **41**. The aprons **41** are also provided adjacent their corners with C-shaped lifting holes **51** (FIG. **1**) which are adapted to receive hooks, cables, or the like for lifting the aprons away from the tank structure when necessary for maintenance or other reasons.

Each of the aprons **41** is releasably retained in supported position on the lugs **44** and **46** by means of a pair of removable elongated locking pins **52** of rectangular cross-section which are inserted axially through the box structures **47** so that their inner ends are received in locking relation with L-shaped brackets **53** depending rigidly from the underside of the apron **41**. The outer end portion of each locking pin **52** is detachably secured, as by a cotter pin or the like, in a socket member **54** of corresponding cross-sectional shape, and a handle or bail **56** projects rigidly from the socket member **54** for manipulating the locking pin. As best seen in FIGS. **7** and **8**, the opening of the box structure **47** has a small upstanding transverse ridge or projection **57** which divides the interior of the box into two compartments or recesses. As shown in FIG. **8** in solid lines, when the locking pin **52** is in the left-hand compartment, the pin is in locking relation with the corresponding apron bracket **53**. As shown in broken lines in FIG. **8**, when the locking pin **52** is in the right-hand compartment, the pin clears the bracket **53** to permit removal of the apron. The locking pin **52** can be shifted between the two compartments by lifting the pin upwardly by the handle **56** until the pin clears the transverse ridge **57**, the internal vertical dimension of the box structure **47** being slightly greater than the thickness of the pin **52** to provide the required clearance.

At the inlet end of the tank **20** (the right-hand end as seen in FIGS. **1** and **2**), a narrow apron **41*a*** (FIGS. **1**, **2**, and **4**) is provided to bridge the gap between a rectangular opening **61** (FIG. **4**) in the tank end wall **24** and the first roller **27**. At the outlet end of the tank (the left-hand end as seen in FIGS. **1** and **2**), a modified apron **41*b*** is supported in close-fitting relation with the last roller **27**.

Referring particularly to FIGS. **3** and **4**, it will be seen that the apron **41*a*** comprises part of a rectangular tubular inlet **62** extending from the opening **61**. A nozzle structure **63** is bolted to the inlet **62** and comprises a tubular mounting section **64** and a pair of elongated upper and lower nozzles **66** defining an inlet **67** for a slab **68**. The nozzles **66** are preferably of the type described more fully in U.S. Pat. No. 3,360,202. Thus each nozzle **66** consists of an elongated rectangular housing having side walls **69** and **71**, an outer wall **72**, and an inner wall **73**. Spaced parallel baffle members **74** and **76** are mounted within the housing to define a plurality of interconnected chambers. Cooling water is supplied to the nozzles **66** through upper and lower headers or manifolds **77**, and the water flows in a tortuous path through the connected baffle chambers, as indicated by the arrows in FIG. **4**, and is discharged through elongated angularly disposed slit orifices **78** in the inner walls **73** to provide uniform intersecting curtains or sheets of water in the section **64**, as designated schematically at **79**. The outer end portion of each wall **73** is laterally adjustable, by means of slotted portions **81** cooperating with a support flange **82**, to vary the width of each slit orifice **78**. The angle of the orifices **78** may vary but preferably is such that the water curtains **79** are at an acute angle of from about 10° to about 25° with respect to the horizontal, e.g. as indicated at A in FIG. **4**. In practice, it has been found that an angle of about 15° to 17° is highly effective.

As seen in FIGS. **1**, **4**, and **6**, the slab **68** is supported horizontally on the outer peripheries of the roller disk portions **29** which are all in substantial horizontal alignment. Thus, an elongated confined cooling channel **86** (FIGS. **2** and **6**) is defined between the underside of the slab **68** and the substantially continuous wall formed by the rollers **27** and the aprons **41**, **41*a***, and **41*b***. FIG. **9*a*** illustrates schematically the water flow in relation to the slab **68**. At the lower surface of the slab, the water flow from the lower angular water curtain impinges against the slab and is diverted into the inlet end of the channel **86** and flows at a high velocity through the channel **86**. It will be understood that the narrow disk portions **29** of the rollers **27** support the slab **68** in spaced relation above the roller body portions **28** to permit continuous and substantially unimpeded flow through the channel **86**.

In operation, the tank **20** is maintained full of water, the water level being substantially above the inlet opening **61**, as indicated, for example, by the broken line **87**. However, water is substantially prevented from flowing out of the opening **61** by means of the intersecting inwardly directed water curtains **79** which extend fully across the nozzle structure **63** and effectively seal the opening **61**. Thus, the water from the nozzle structure **63** not only effects sealing of the slab entry end of the tank but also supplies the cooling water for the tank. In practice it has been found that the water flow rate required for cooling of the slab (e.g. in a cooling system operating in conjunction with a continuous slab caster casting eight to ten inch thick slabs at a casting rate of 50 to 100 inches per minute) is more than adequate to provide the desired sealing effect at the water curtains.

At the opposite end of the tank from the opening **61**, as best seen in FIG. **5**, the end wall **23** is provided with at least one water outlet, and preferably a pair of outlets. Thus, the end wall **23** has a rectangular submerged outlet opening **88** and a rectangular overflow opening or weir **89** at its upper edge. The submerged outlet opening **88** is controlled by a transverse closure or gate **91** mounted for vertical movement relative to the opening **88** at the outside of the wall **23** by means of a pair of straps **92** connected to worm gear jacks **93** located at opposite sides of the tank **20**. The jacks **93** have elongated screw members **136** which are enclosed in flexible boots **137** and are raised and lowered in unison by worm gears (not shown) interconnected by a rotary shaft **94** (FIG. **1**) having a hand wheel **96**. When the screw members **136** are in their elevated positions they are received in tubular dust guards or caps **138**. In a similar manner, the overflow opening **89** is controlled by a transverse closure or gate **97** mounted for vertical movement relative to the opening **89** at the inside of the wall **23** by means of a pair of straps **98** connected to worm gear jacks **99**. The jacks **99** have screw members **139** enclosed in flexible boots **141**, and the worm gears of the jacks are interconnected by a shaft **101** having an operating hand wheel **102**. Dust guards or caps **142** receive the screws **139** in their elevated positions.

By regulating the positions of the closures or gates **91** and **97** in relation to the flow rate of the incoming water at the nozzle structure **63**, the outlet flow of water is distributed between the openings **88** and **89** so as to maintain a substantially uniform flow velocity over the work-piece surfaces and at the same time maintain the desired substantially uniform water level in the tank. Regulation of the lower gate **91**, which is submerged at all times, allows a predetermined flow of water through the outlet opening **88** as may be required to insure the desired high velocity through the channel **86**. In this connection, it will be noted from FIG. **2** that the channel **86** is in substantial alignment with the opening **88**.

The effluent water from the tank **20** passes through the openings **88** and **89** into an end compartment **106** formed by a continuation of the tank **20** at the downstream side of the end wall **23**. The bottom of the compartment **106** has a grill **107** which serves as a filter for oxides scale, sludge, or the like, and the effluent water is discharged in whole or in part to a cooling and recirculation system (not shown) for return to the nozzle structure **63**. As seen in FIG. **6**, the bottom wall **26** of the tank **20** has a depressed or trough-shaped configuration which receives accumulated oxides, scale, sludge, or the like separated by the grill **107**. When necessary the trough-shaped tank bottom is flushed out to remove accumulated foreign material by means of clean-out ports **108** (FIG. **5**) and **109** (FIGS. **2** and **3**) in the tank end walls **23** and **24**, respectively. The clean-out ports are provided with removable closures **111** and **112**.

In the operation of the cooling system, a slab **68** (or other heated work-piece) is fed into the inlet **67**, in the direction indicated by the arrow in FIG. **4**, by means of an aligned roller table or feed conveyor (not shown). As the leading end of the slab enters the water curtains **79**, the water curtains impinge angularly against the upper and lower surfaces of the slab. As the slab **68** continues its movement, it engages the roller disk portions **29** and is supported thereon in spaced relation above the aprons **41***a*, 41, and 41*b* to provide the channel **86**, as previously described. Since the rollers **27** are driven by the motors **36**, the slab **68** is advanced into the tank beneath the bath surface and fully immersed in the water bath contained therein. The water introduced at the nozzles **66** flows lengthwise in the bath along the surfaces of the slab parallel to the direction of movement of the slab. In addition, as previously described in connection with FIG. **9***a*, the lower water curtain **79** after impinging angularly against the lower surface of the slab is diverted, at least in part, into the restricted channel **86** and flows at a high velocity therethrough. The high velocity flow of cooling water through the channel **86** results in uniform cooling of the slab at a high rate of heat transfer, thereby avoiding the formation of explosive pockets of steam at the underside of the slab. It has been found that during the initial portion of the cooling period for the slab (e.g. during the first 5 minutes when cooling a steel slab having a thickness of 8 to 10 inches), the channel cooling effect at the underside of the slab is essential in order to achieve the desired uniform cooling and avoidance of steam pockets. In the absence of the aprons **41**, a loud rumbling noise is heard during the first few minutes of cooling which is indicative of inadequate or non-uniform cooling resulting in the formation of steam pockets. In addition, if the aprons **41** are not present, the resultant deeper water channel and lower velocity of flow at the underside of the slab tends to produce a lower rate of heat transfer at the underside of the slab than at the upper side. Consequently, differential cooling and warpage may occur.

It has also been found in practice that rapid uniform cooling of the upper surface and sides of the slab **68** is likewise obtained. As will be evident from FIG. **6**, in the case of a wide slab the side edges of the slab **68** are relatively close to the tank partitions **43**, thereby providing unobstructed high velocity flow of cooling water therebetween. At the upper surface of the slab **68** the flow of cooling water is completely unobstructed, and the upper water curtain **79** after impinging angularly against the upper surface of the slab **68** is diverted therealong at high velocity to achieve rapid uniform cooling. A similar effect is also realized at the sides of the work-piece in the case of slabs or shapes of lesser width.

Thus, with the present invention essentially all of the water discharged from the nozzle structure **63** at the sealing curtains **79** enters the tank **20** and flows parallel to the slab over substantially the entire length of the

tank. An efficient utilization of the water for both sealing and cooling purposes is thereby achieved.

For the most effective water seal at the tank inlet, it is desirable that the horizontal axis of the slab **68** be substantially centered vertically on a horizontal line passing through the intersection of the water curtains **79**, as shown in FIG. **4**. Thus, in the case of a slab having a thickness of ten inches, the rollers **27** should be mounted so that the plane defined by the uppermost portions of the disk portions **29** is about 5 inches below the point of intersection of the water curtains **79**. Absolute centering, however, is not essential and some deviation is permissible without destroying the water seal effect. For example, with the rollers **27** located as just described, a satisfactory water seal is also obtained when a slab 8 inches thick is being cooled. If the apparatus is to be used for cooling work-pieces of widely varying thickness, then provision should be made for vertically adjusting the rollers **27** or the nozzle structure **63** relative to each other so that the work-piece can be centered approximately at the point of intersection of the water curtains.

As discussed above, it has been found that the channel cooling effect at the channel **86** is essential, especially during the initial phase of the cooling operation, in order to obtain uniform and efficient cooling. A further requirement in this regard is that the slab (or other work-piece) must be disposed in the inlet water curtains so as to obtain the angular impingement of the water curtains against the upper and lower surfaces of the slab as illustrated in FIG. **9***a*. A condition to be avoided, particularly in the initial phase of the cooling, is illustrated in FIG. **9***b* where the trailing end of the slab **68** is shown as having moved beyond the intersecting water curtains. In such case, the water curtains **79** impinge against the vertical end surface of the slab and are diverted in the opposite direction thereby hindering the desired high velocity channel flow of water along the length of the tank, particularly through the channel **86**. This undesirable condition can be avoided by controlling the operation of the rollers **27** so that the slab is not moved into the tank far enough to clear the water curtains **79**. For example, the slab is preferably stopped with a few inches of its trailing end protruding out of the water curtain. The rollers **27** are then reversed to withdraw the slab completely from the cooling tank onto the entry roller table or conveyor (not shown).

FIGS. **10–12** illustrate schematically a modification of the cooling apparatus for continuous cooling of successive slabs as contrasted with the intermittent batch cooling operation described heretofore in connection with FIGS. **1–9***b*. In the batch cooling operation, the heated slab is fed into the cooling tank inlet through the sealing water curtains and then retracted through the same opening upon completion of the cooling. In the continuous cooling operation (shown in FIGS. **10–12**) the heated slab enters the cooling tank at one end beneath the bath surface and is removed from the opposite end of the tank beneath the bath surface. Thus, the cooling tank designated at **116** is provided with a series of rollers **117** (similar to the rollers **27** previously described) for supporting and conveying a slab **118**. A plurality of aprons **119** are disposed between the rollers **117** to provide a restricted cooling channel beneath the slab as previously explained. The slab **118** is introduced beneath the surface **120** of the water bath in the tank through sealing water curtains from upper and lower nozzles **121** at one end of the tank and through an inlet opening in the tank end wall. The slab **118** is conveyed horizontally through the tank to the opposite end where the cooled slab is removed through an outlet opening in the tank end wall and through similar inwardly directed sealing water curtains from upper and lower nozzles **122**. To avoid the undesirable condition illustrated in FIG. **9***b*, the slabs should be conveyed into the inlet end of the tank **118** in end-to-end abutted relation so that at all times a portion of a slab is present in the inlet water curtains. Similarly, it is also desirable that at all times a portion of a slab be present in the outlet water curtains in order to insure an effective seal and entry of the water into the tank.

As shown in FIGS. **10** and **11** supplementary water inlet nozzles **123** and **124** may be provided between the sides of the tank **116** adjacent the aprons **119**. The nozzles **123** and **124** are similar to the lower nozzles **121** and **122** at the ends of the tank and are arranged to introduce cooling water into the restricted channel beneath the slabs **118** at a suitable angle so as not to impede or interfere with the flow of cooling water from the nozzles **121** and **122**. These supplementary nozzles or jets are suitably located intermediate the ends of the tank in order to insure the required high velocity flow of cooling water in the restricted channel between the slabs **118** and the aprons **119**. As will be evident from the drawing, the nozzles **123** and **124** are located downstream from the points of introduction of cooling water through the nozzles **121** and **122**, respectively. The use of such supplementary nozzles is particularly important when the tank **116** is relatively long, as may be the case in a continuous system where the tank can accommodate a plurality of slabs at one time. Although not shown in the drawings, supplementary lower nozzles intermediate the ends of the tank may also be used in the batch cooling embodiment illustrated in FIGS. **1–9**, and such supplementary nozzles are particularly desirable when cooling relatively long slabs. If necessary, supplementary cooling water nozzles may also be located at the upper portion of the tank **116**, e.g. as shown in broken lines at **126**, to assist in cooling the upper surfaces of the slabs.

As will be evident from FIGS. **10** and **11**, sealing and cooling water is introduced into the tank **116** at both ends and flows toward the center of the tank from both directions. Thus, water from the nozzles **121** and **123** flows from the right-hand portion of the tank toward the center, and water from the nozzles **122**, **124**, and **126** flows from the left-hand portion of the tank toward the center. A pair of water outlet compartments **127** are located centrally of the tank **116** at opposite sides thereof. As seen in FIG. **12**, each compartment **127** has a bottom grill **128**, and each compartment **127** communicates with the tank **116** through openings **129** and **131** in the tank wall **132**. As in the previously described embodiment, the openings **129** and **131** are controlled by gates **133** and **134**, respectively. The electric motor drives for the rollers **117** have been omitted from FIGS. **10–12** for simplicity, but in the case of roller **117***a* located between the drain compartments **127**, it will be evident that this roller will be driven most conveniently by means of a driving connection with an adjacent motor driven roller, or in some cases the roller **117***a* may simply be a non-driven or idler roller.

The cooling apparatus of the present invention has the important advantages of relatively low capital cost

as compared with other types of equipment, lower water flow rates than conventional spray systems, freedom from the maintenance problems associated with conventional spray systems, and the ability to provide rapid uniform cooling. In addition, the large cooling inventories characteristic of air cooling are eliminated. Furthermore, scale formation is minimized as compared with air cooling, and due to the rapid cooling effect any scale present tends to pop off resulting in a relatively clean slab surface. Inspection of the slab is very convenient because of the clean surface and because the slab is at a low enough temperature for easy handling. Moreover, the cooling of low carbon steel slabs can be effected without warping or cracking.

As an example, using equipment generally similar to that shown in FIGS. **1–9***b*, it was found possible to cool 8 to 10 inch thick slabs of low carbon aluminum-killed steel from 1600° F. to 400° F. in about **15** to **25** minutes without warping or cracking and with minimum scale formation. The operation of the cooler was not significantly affected by the slab thickness or the cooling water temperature, and the rate of heat transfer was found to be limited primarily by the rate of heat conduction in the slab. The slit orifice **78** in the upper nozzle **66** was 0.375 inch by 72 inches, and in the lower nozzle **66** the slit orifice was 0.500 inch by 72 inches. The angle A of the upper orifice was 17° and the angle A of the lower orifice was 15°. The water flow rate was 4600 gallons per minute supplied to the two nozzles. The operating pressure at the upper nozzle was 7 pounds per square inch gage and at the lower nozzle was 12 pounds per square inch gage.

Although the invention has been described with particular reference to certain specific structural embodiments, it is to be understood that various modifications and equivalent structures may be resorted to without departing from the scope of the invention as defined in the appended claims.

We claim:

1. An apparatus for cooling work-pieces, comprising:

a tank adapted to contain a cooling liquid bath, said tank having an opening for introducing a work-piece into the tank beneath the bath surface and having means for removing the work-piece from the tank beneath the bath surface;

supporting means comprising a plurality of spaced parallel rollers in said tank for receiving and supporting the work-piece horizontally beneath the bath surface;

combined sealing means and cooling liquid supply means adjacent said opening and adapted to direct upper and lower cooling liquid curtains angularly and inwardly into said tank beneath the bath surface for substantially preventing liquid from flowing out of said opening while permitting the work-piece to be moved horizontally therethrough into said tank with the cooling liquid curtains impinging against the upper and lower surfaces of the work-piece; and

means providing an elongated guide wall between said rollers in spaced relation below the lower surface of the work-piece when the latter is supported on said rollers, thereby defining an elongated restricted cooling channel at the underside of the work-piece, said channel having an inlet end positioned so that the cooling liquid curtain impinging against the lower surface of the work-piece is diverted into said inlet end and flows through said channel at high velocity.

2. The apparatus of claim **1** further characterized in that said rollers are provided with drive means for rotating the rollers and thereby conveying the work-piece horizontally in the cooling bath.

3. The apparatus of claim **1** further characterized by the provision of means for introducing additional cooling liquid into said channel at the underside of the work-piece and spaced downstream from said liquid curtains.

4. The apparatus of claim **1** further characterized in that each of said rollers has a cylindrical body portion and a plurality of axially spaced disk portions of greater diameter than said body portion, said guide wall extending between the body portions of the rollers and said disk portions being adapted to support the work-piece in spaced relation above said guide wall while permitting flow of cooling liquid through said channel.

5. The apparatus of claim **4** further characterized in that said guide wall comprises a plurality of guide plates supported in horizontal alignment between the body portions of said rollers.

6. The apparatus of claim **5** further characterized by the provision of releasable locking means associated with each of said guide plates for removably retaining the guide plates in said tank.

7. The apparatus of claim **1** further characterized in that said opening is generally rectangular and said combined sealing means and cooling liquid supply means comprises a pair of upper and lower nozzles extending across said inlet opening, said nozzles having elongated slit orifices for discharging uniform curtains of cooling liqiud, and said orifices being arranged and constructed to direct the cooling liquid curtains at an acute angle to the horizontal and inwardly toward said opening in intersecting relation.

8. The apparatus of claim **7** further characterized in that said angle is from about 10° to about 25°.

9. The apparatus of claim **7** further characterized in that said rollers and said nozzles are arranged and constructed so that the horizontal axis of the work-piece is substantially aligned vertically with the intersection of the cooling liquid curtains.

10. The apparatus of claim **1** further characterized in that said tank is also provided with cooling liquid outlet means, and control means is provided at said cooling liquid outlet means for maintaining a desired flow velocity over the work-piece surfaces and a desired liquid level in said tank.

11. The apparatus of claim **10** wherein said cooling liquid outlet means comprises an overflow weir in a wall portion of said tank.

12. The apparatus of claim **10** further characterized in that said cooling liquid outlet means comprises an overflow weir at the upper edge of a wall portion of said tank remote from said opening and a submerged liquid outlet in said wall portion below said weir, and said control means comprises adjustable closures at said weir and said outlet for obtaining a desired distribution of the outlet flow of cooling liquid between said weir and said outlet.

13. The apparatus of claim **10** further characterized in that said tank has an elongated configuration with said opening at one end of said tank and said cooling liquid outlet means at the opposite end of said tank, the work-piece being moved in one direction into the tank

through said opening and also being withdrawn in the reverse direction from the tank through said opening which also comprises said means for removing the work-piece from the tank.

14. The apparatus of claim **10** further characterized in that said tank has an elongated configuration with said opening at one end of the tank, said means for removing the work-piece from the tank comprising an additional opening at the opposite end of the tank for withdrawing the work-piece from the tank beneath the bath surface, combined sealing means and cooling liquid supply means is also provided adjacent said additional opening for directing upper and lower cooling liquid curtains angularly and inwardly into said tank for substantially preventing liquid from flowing out of said additional opening while permitting the work-piece to be moved horizontally therethrough out of said tank, and said cooling liquid outlet means is located intermediate the ends of the tank.

* * * * *