

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199738326 B2**
(10) Patent No. **731380**

(54) Title
Pressure vessel and method of manufacturing thereof

(51)⁶ International Patent Classification(s)
B65D 043/00

(21) Application No: **199738326** (22) Application Date: **1997 .09 .18**

(30) Priority Data

(31) Number (32) Date (33) Country
08/721829 1996 .09 .27 US

(43) Publication Date : **1998 .04 .02**

(43) Publication Journal Date : **1998 .04 .02**

(44) Accepted Journal Date : **2001 .03 .29**

(71) Applicant(s)
Automotive Fluid Systems, Inc.


(72) Inventor(s)
Robert J. Slaiss

(74) Agent/Attorney
FISHER ADAMS KELLY,GPO Box 1413,BRISBANE QLD 4001

(56) Related Art
US 4675971
US 5245842
US 5375327

ABSTRACT OF THE DISCLOSURE

A pressure vessel suitable for use in an automotive air-conditioning system includes a cylindrical body (10, 40) including an annular wall (14, 44). The cylindrical body preferably
5 includes an opposite closed end, an initially opened end (12, 42), and a closure member (20, 50) inserted into the open end of the cylindrical body. The closure member and the cylindrical body each have extensions or annular flanges (28, 58) which are spin welded together. The cylindrical body is fused to the closure
10 member when the annular flange (28, 58) of the closure member is spin welded to an annular, outermost portion (18, 48) of the cylindrical body. The closure member and the cylindrical body are further locked together by inwardly rolling a portion of the annular wall into an annular groove (30, 60) and an outermost
15 surface of the closure member.



AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Invention Title: "PRESSURE VESSEL AND METHOD
OF MANUFACTURING THEREOF"

The following statement is a full description of this invention, including the best
method of performing it known to us:

PRESSURE VESSEL AND METHOD OF MANUFACTURE THEREOF

BACKGROUND OF THE INVENTION1. Field of the Invention

This invention relates to a pressure vessel and to a method of manufacturing the pressure vessel. More particularly, this invention relates to a pressure vessel of the type used in an automotive air conditioning system such as a refrigerant receiver or an accumulator dehydrator.

2. Description of the Prior Art

U.S. Patent 5,191,775, (Shiina et al.) discloses a receiver of the type used in an automotive air conditioning system and a method for the manufacture of such receiver. The receiver of the Shiina et al. reference is composed of a generally cylindrical body having a thin annular wall, a first integral and unitary end, and a disk-shaped closure member, commonly referred to as a puck, inserted into an opposed open end of the cylindrical body. The closure member is secured to the cylindrical body, after insertion of a desiccant material or other elements of the receiver, as used in a refrigerant circuit, into the interior of the cylindrical body. Shiina et al. disclose that the open end of the cylindrical body is reshaped by electromagnetic forming, after insertion of the closure member, to closely conform the interior of the open end of the cylindrical body to the exterior of the closure member to thereby secure the closure member and the cylindrical body to one another. Shiina et al. teach that the closure member and cylindrical body are sealed

using O-rings. Nevertheless, the assembly of the closure member and the cylindrical body to one another according to this reference does not result in a receiver that is pressure-tight, i.e., that it eliminates all leak paths for the molecules of refrigerant fluid. Consequently, the O-rings must be used between the exterior of the closure and the interior of the cylindrical body to retain the refrigerant fluid within the receiver of this reference.

U.S. Patent 5,425,250, to Hutchinson et al., also discloses a receiver for an automotive air conditioning system that consists of a generally cylindrical aluminum body with a thin annular wall and an initially open end which is closed, after the insertion of a desiccant material or other elements into the cylindrical body, by a disk-shaped aluminum closure member, or puck, inserted into the open end of the cylindrical body. According to the Hutchinson et al. reference, the closure member is joined to the cylindrical body using an annular weld. However, it is very well known in the art that welded joints, or even brazed joints, in an air conditioning system receiver are subject to leakage, and, therefore, have not been totally satisfactory in service because of such phenomena.

It is also well known to use spin welding for pressure vessels in an air-conditioning circuit, as disclosed, for example, in U.S. Patent Nos. 4,628,704; 4,675,971; 5,245,842; and 5,375,327.

The disclosures of the aforesaid U.S. Patents 5,191,775; 5,425,250; 4,628,704; 4,675,971; 5,245,842; and 5,375,327 are incorporated by reference herein.

SUMMARY OF THE INVENTION

5 The foregoing and other problems of prior art refrigerant receivers are overcome by the receiver of the present invention, and by the method of its manufacture, in which an aluminum disk-shaped closure member, or puck, is secured to an initially open end of a generally cylindrical thin-walled aluminum
10 body utilizing a spin welding process. The spin welding process of the present invention is preferably used in conjunction with a rolling operation to roll an annular portion of the wall of the cylindrical body into an annular recess in the exterior of the closure member to form a positive mechanical lock between the
15 cylindrical body and the closure member. The positive mechanical lock between the closure member and the cylindrical body, which results from the rolling operation, serves to overcome the tendency of the closure member to eject from the receiver under significant internal pressure, and the spin welding step of the
20 present invention results in a continuous, leak-free seam between the cylindrical body and the closure member, eliminating the need for an O-ring or other sealing member therebetween, and does so without using a conventional welding or brazing operation to form a seam between the closure member and the cylindrical body,
25 thereby eliminating the known processing problems associated with any such conventional welding operation.

To effect the spin welding of the cylindrical body of the receiver of the present invention to the closure member, the closure member and the cylindrical body are provided with relatively thin annular flanges; which are spaced close to one another when the closure member and the cylindrical body are properly positioned for the beginning of the spin welding operation. In one embodiment of the present invention, the annular flanges of the closure member and the cylindrical body extend in a direction essentially parallel to a longitudinal central axis of the cylindrical body, in which case the spin welding step is preferably accomplished by spinning a spinning tool, whose axis of rotation is aligned with the longitudinal central axis of the cylindrical body, relative to the cylindrical body and the closure member while they are held in fixed positions. In another embodiment of the present invention, the annular flanges of the closure member and the cylindrical body extend substantially perpendicular to the longitudinal central axis of the cylindrical body, in which case the welding is preferably accomplished by rotating the closure member and the cylindrical body with respect to a tool moving rectilinearly along an axis that extends substantially perpendicular to the longitudinal central axis of the cylindrical body.

Accordingly, it is an object of the present invention to provide an improved pressure vessel of a type having a cylindrical body having a thin annular wall and a closure member inserted into

an initially open end of the cylindrical body and secured thereto, as well as an improved method for manufacturing such a pressure vessel.

For a further understanding of the present invention and the objects thereof, attention is directed to the drawings and the following brief description thereof, to the detailed description of the preferred embodiment of the invention, and to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a fragmentary view, in cross section, of a cylindrical body with an initially open end that is to be closed by a closure member to produce a pressure vessel in accordance with the preferred embodiment of the present invention;

FIG. 2 is a fragmentary view, in cross section, schematically illustrating a processing step to be performed on the cylindrical body and closure of FIG. 1 to produce a receiver according to the preferred embodiment of the present invention from the cylindrical body and closure of FIG. 1;

FIG. 3 is a fragmentary view, in cross section, schematically illustrating a subsequent processing step to be performed after the processing step of FIG. 2 to produce a receiver according to the preferred embodiment of the present invention from the cylindrical body and closure of FIG. 1;

FIG. 4 is a view similar to FIG. 2 of the cylindrical body and closure of FIG. 1 after completion of the processing step illustrates in FIG. 3; and

FIG. 5 is a view similar to FIG. 1 of an alternative embodiment of a cylindrical body and a closure to be joined to one another to produce a receiver in accordance with an alternative embodiment of the present invention.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 illustrates a cylindrical body 10, shown fragmentarily, the cylindrical body 10 having an initially open end 12 and preferably being formed from aluminum or an aluminum alloy. The cylindrical body 10 has a thin annular wall 14, and the end 12 of the cylindrical body 10 is preferably enlarged, for example, by an impacting or expanding operation or as part of a deep draw process, such that the cylindrical body 10 preferably will have an outwardly projecting shoulder 16 which may, as illustrated in FIG. 1, also extend upwardly toward the open end 12.

The open end 12 of the cylindrical body 10 is to be closed by a closure or puck 20 that is inserted into the open end 12, and is later secured to the cylindrical body 10 as will be hereinafter described more fully. The closure 20 is formed of a material that is compatible with the material of the cylindrical body 10, so as to be weldable to the cylindrical body 10 by spin welding. Thus, the closure 20 is also preferably formed of aluminum or an aluminum alloy when the cylindrical body 10 is formed of such a material. In any case, the closure 20 is preferably formed in its illustrated complex configuration by machining in a known manner, and has a main body portion 22 that

fits snugly within the open end 12 of the cylindrical body 10, a smaller end portion 24 and a shoulder 26 extending between the main body portion 22 and the end portion 24. Preferably, the shoulder 26 of the closure 20 extends substantially or
 5 approximately parallel to the shoulder 16 of the cylindrical body 10.

The closure 20 includes a relatively thin, annular flange 28 extending outwardly from the main body portion 22 of the closure 20 and substantially parallel to a longitudinal central
 10 axis of the cylindrical body 10. The annular flange 28 is spaced close to an outermost portion 18 of the initially open end 12 of the cylindrical body 10, for reasons which will be hereinafter described more fully. The axial position of the closure 20 relative to the open end 12 of the cylindrical body 10, and thus
 15 the axial position of the annular flange 28 relative to the outermost portion 18 of the open end 12, is preferably accurately fixed by the shoulder 16 of the cylindrical body 10, which limits the distance the closure 20 can be inserted into the cylindrical body 10.

The main body portion 22 of the closure 20 is also provided with an annular groove 30. After the closure 20 is in the position shown in FIG. 1 relative to the cylindrical body 10, a rolling tool R preferably engages the exterior of the open end
 20 12 of the cylindrical body 10, at a location in alignment with the annular groove 30, to roll a portion 12a of the open end 12 into
 25

the annular groove 30 as illustrated in FIG. 2. The engagement between the rolled portion 12a of the open end 12 of the cylindrical body and the annular groove 30 of the closure 20 serves to lock the closure 20 and the cylindrical body 10 to one another and prevent ejection of the closure 20 from the cylindrical body 10 as a result of positive pressure within the cylindrical body 10, which is common within a receiver for an automotive air conditioning system, the intended application for the combined cylindrical body 10 and closure 20 at the conclusion of the manufacturing operations to be performed thereon. However, it is possible to use any known technique, besides rolling, for forcing the portion 12a into the annular groove 30.

At the conclusion of the processing step illustrated in FIG. 2, the cylindrical body 10 and closure 20, now mechanically locked together but not sealed, are axially aligned with a spinning tool S, which is caused to spin at a relatively high rotational velocity about its central axis and is axially translated toward the cylindrical body 10 and closure 20, while the cylindrical body 10 is held in a fixed position, for example, in a conventional chuck, not shown. The axial advance of the spinning tool S gradually traps the outermost portion 18 of the open end 12 of the cylindrical body 10 and the annular flange 28 of the closure 20 in a generally V-shaped groove G of the spinning tool S to urge the outermost portion 18 and the annular flange 28 toward one another. The high rotational speed spinning of the

spinning tool S relative to the fixed cylindrical body 10 generates heat sufficient to weld the outermost portion 18 and the annular flange 28 to one another in a continuous piece, which will be completely leak-free as opposed to a seam formed by brazing, a
5 conventional process for joining aluminum components to one another, or by any other welding process.

It should be appreciated that it is also possible to further roll form the outermost portion 18 to further conform with the annular flange 28 prior to the spinning operation.

10 The nonillustrated end of the cylindrical body 10 that is opposed to the open end 12 is preferably integral to the annular wall 14, or further the cylindrical body 10 may be formed in a unitary one-piece configuration by a deep drawing operation as is known in the art. For example, the aforesaid U.S. Patent
15 5,191,775 discloses such a one-piece body, which is identified by reference numeral 11 therein. Alternatively the nonillustrated end of the cylindrical body 10 may also be closed by a separate closure, not shown, similar to the closure 20 that is affixed to the open end 12 of the cylindrical body 10, and affixed thereto in
20 a similar manner, as heretofore described.

While not illustrated, it is to be understood that the closure 20 may be, and preferably is, provided with openings extending therethrough to permit necessary inlet and outlet tubes, not shown, to be affixed to the closure 20 for the purpose of
25 permitting refrigerant fluid to flow into and out of the

cylindrical body 10, as is also shown, for example, in the aforesaid U.S. Patent 5,191,775.

FIG. 5 illustrates a vessel that is made up of a cylindrical body 40 with an initially open end 42. The cylindrical body 40 is preferably formed of aluminum or an aluminum alloy and is defined by an annular wall 44. The free end or the initially open end 42 of the cylindrical body 40 is provided with a radially outwardly projecting annular flange 48. A closure 50, which is also preferably formed of aluminum or an aluminum alloy and preferably by machining, has a radially outwardly projecting annular flange 58, and is inserted into the open end 42 of the cylindrical body 40 until the radial flange 58 of the closure 50 abuts against the radial flange 48 of the cylindrical body 40 and the radial flanges 48 and 58 are aligned for further processing.

The closure 50 also has an annular groove 60 in its exterior side, similar to the annular groove 30 of the closure 20 of the embodiment of FIGS. 1 through 4, and the annular wall 44 of the cylindrical body 40 preferably is rolled into the annular groove 60 to positively lock the closure 50 and the cylindrical body 40 to one another, though such step is not positively illustrated in FIG. 5. Moreover, the closure 50 has an opening 62 extending therethrough, the opening 62 having a small diameter innermost portion 62a and a larger diameter outermost portion 62b, separated by an annular shoulder 62c. An annular tube 70 is

inserted into the cylindrical body 40 through the opening 62 to introduce refrigerant fluid into the cylindrical body 40. The tube 70 has an outermost annular flange 70a that abuts against the annular shoulder 62c of the opening 62, and a bead 70b that abuts against an inner surface 64 of the closure 50 to positively position the tube 70 axially with respect to the closure 50. The bead 70b may be formed using any known process such as cold forming or, preferably, rolling.

To form a leak-free seal between the closure 50 and the cylindrical body 40, and specifically between the annular flange 48 and the annular flange 58, the assembly of the cylindrical body 40 and the closure 50 is caused to spin about the longitudinal central axis of the cylindrical body 40 at a relatively high rotational velocity, and a translating tool T is advanced toward the annular flange 48 and the annular flange 58 while the cylindrical body 40 and the closure 50 are rotating. The tool T has a generally V-shaped groove G1 that engages the annular flange 48 and the annular flange 58 while they are spinning, to generate a level of heat that will cause the annular flange 48 and the annular flange 58 to fuse, or weld, to one another to eliminate any potential leak path for the molecules of the refrigerant fluid. A pressure vessel formed by the method of FIG. 5 will, thus, have an external lip that can be used to facilitate the assembly of such a pressure vessel to an automotive vehicle as well as provide a sealed, secured pressure vessel.

Although the best mode contemplated by the inventor for carrying out the present invention as of the filing date hereof has been shown and described herein, it will be apparent to those skilled in the art that suitable modifications, variations and
5 equivalents may be made without departing from the scope of the invention, such scope being limited solely by the terms of the following claims and the legal equivalents thereof.



The claims defining the invention are as follows:

1. A vessel for use in an automotive air-conditioning system, said vessel comprising:

a cylindrical body having an annular wall and an open end; and

5 a closure having an annular flange, said closure being positioned within said open end of said cylindrical body with said annular flange of said closure being spin welded in a circumferential pattern to a portion of said annular wall of said cylindrical body such that said annular flange of said closure and said annular wall are sealed shut to prevent refrigerant fluid from escaping said vessel;
10 wherein said closure has an annular groove in an outermost surface thereof, and wherein an annular portion of said cylindrical body is inwardly rolled into said annular groove in a circumferential pattern to thereby lock said closure and said cylindrical body to one another.

2. A vessel according to Claim 1 wherein said annular flange of said
15 closure extends coaxially with the longitudinal central axis of said cylindrical body, and wherein said portion of said annular wall of said cylindrical body extends coaxially with the longitudinal central axis of said cylindrical body.

3. A vessel according to Claim 1 wherein said open end of said cylindrical body has an enlarged outermost portion, an inner portion and an
20 annular shoulder joining said outermost portion and said inner portion, and wherein said closure is inserted into said open end of said cylindrical body to a depth that is limited by said annular shoulder.

4. A vessel according to Claim 1 wherein said cylindrical body is formed of aluminium, and wherein said closure is formed of aluminum.



5. A vessel according to Claim 1 wherein said annular flange of said closure extends generally perpendicular to the longitudinal central axis of said cylindrical body, and wherein said cylindrical body includes an annular flange that extends generally perpendicular to the longitudinal central axis of said cylindrical

5 body.

6. A method of forming a vessel having a longitudinal central axis from a cylindrical body having an annular wall having an end portion located at an open end of said cylindrical body and a closure having an annular groove in a outermost surface thereof and an annular flange, said method comprising the steps

10 of:

positioning the closure in the open end of the cylindrical body with the flange of the closure positioned near a portion of the annular wall of the cylindrical body;

providing a tool having a groove, the groove of the tool being

15 adapted to engage the annular flange of the closure and the end portion of the cylindrical body;

causing rapid relative rotation between the tool, on the one hand, while the tool engages the annular flange of the closure, and the end portion of the cylindrical body and the closure and the cylindrical body, on the other hand, to

20 produce sufficient heat to fuse the annular flange of the closure to the portion of the cylindrical body; and

rolling inwardly an annular portion of the cylindrical body into the annular groove of the closure to lock the closure and the annular body to one another.



7. The method according to Claim 6 wherein the annular flange of the closure is coaxial with the longitudinal central axis of the cylindrical body, the end portion of the cylindrical body is an outermost portion of the annular wall and extends coaxial with the longitudinal central axis of the cylindrical body, and the rapid rotation is caused by spinning the tool while holding the cylindrical body and the closure fixed against rotation during the spinning of the tool.

8. The method according to Claim 6 wherein the open end of the annular body has an enlarged outermost portion, an inner portion and an annular shoulder joining the outermost portion and the inner portion, and wherein the step of positioning the closure includes inserting the closure into the open end of the annular body to a depth that is limited by the annular shoulder.

9. The method according to Claim 6 wherein the annular flange of the closure extends generally perpendicular to the longitudinal central axis of the cylindrical body, and wherein the end portion of the cylindrical body is an annular flange extending generally perpendicular to the longitudinal central axis of the cylindrical body, the method further comprising the steps of:

spinning the cylindrical body and the closure relative to a tool that is fixed against rotation; and

moving the tool with respect to the spinning cylindrical body.

DATED this Fourth day of January 2001.

AUTOMOTIVE FLUID SYSTEMS, INC.

By its Patent Attorneys,

FISHER ADAMS KELLY.



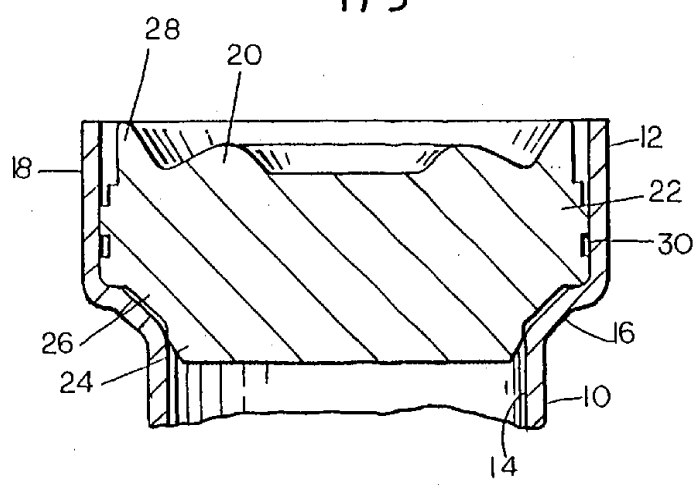


FIG. 1

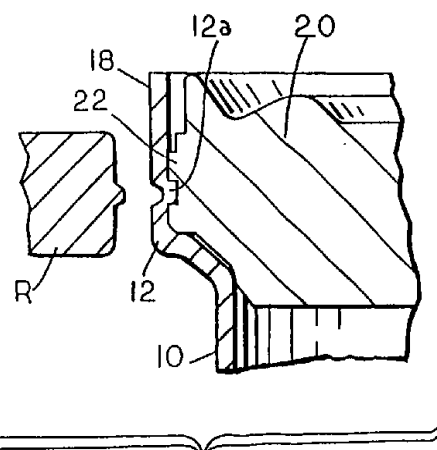


FIG. 2

2 / 3

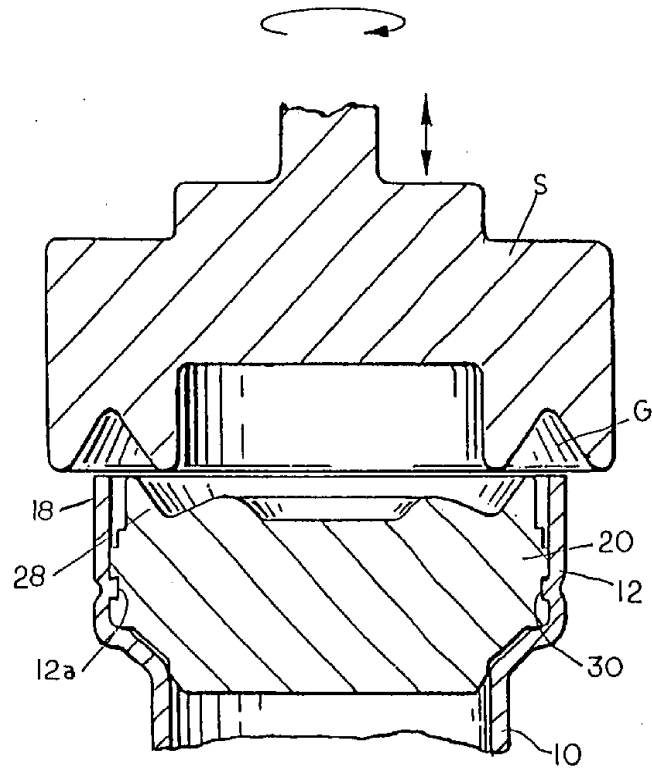


FIG.3

3/3

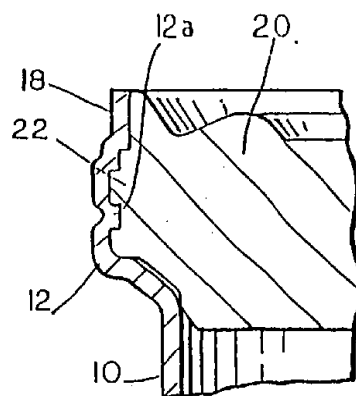


FIG. 4

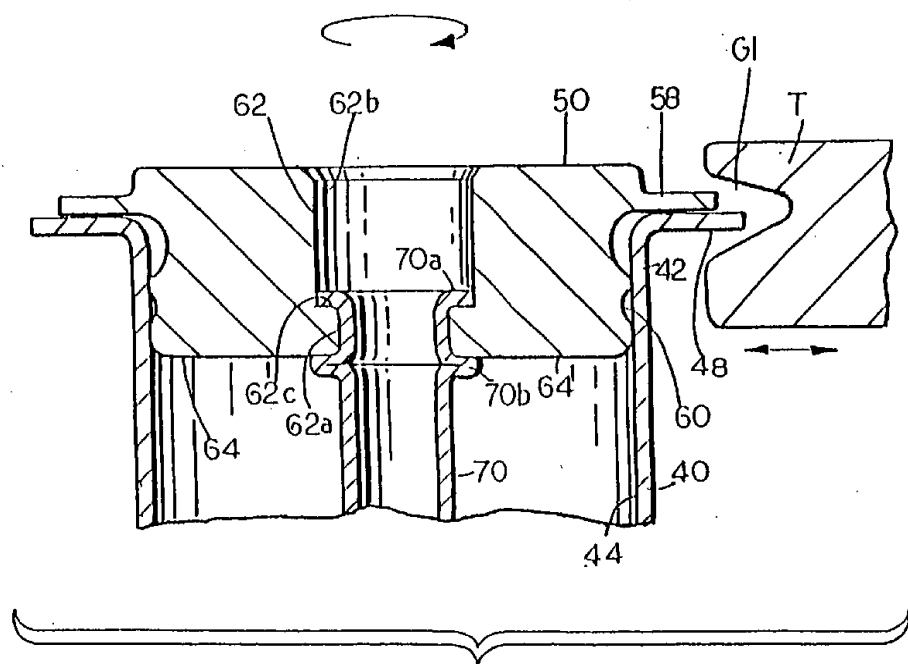


FIG. 5