



(51) International Patent Classification:
B31F 1/07 (2006.01)

(21) International Application Number:
PCT/CH2009/000214

(22) International Filing Date:
22 June 2009 (22.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
969/08 26 June 2008 (26.06.2008) CH

(71) Applicant (for all designated States except US):
BOEGLI-GRAVURES S.A. [CH/CH]; Rue de la Gare
24-26, CH-2074 Marin (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BOEGLI, Charles**
[CH/CH]; Rue de la Gare 24, CH-2074 Marin (CH).

(74) Agent: **AMMANN PATENT ATTORNEYS LIMITED**
BERNE; Schwarztorstrasse 31, P.O. Box, CH-3001
Berne (CH).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE FOR SATINIZING AND EMBOSSED PACKAGING FOILS

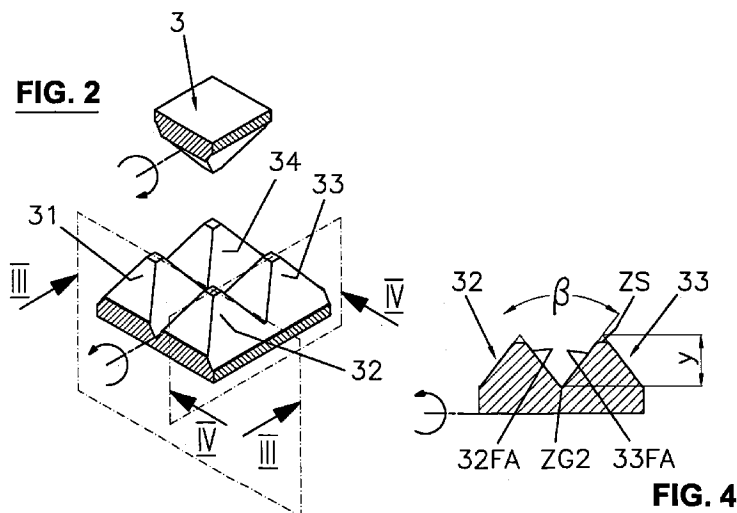

(57) Abstract: The device for satinizing and embossing packaging foils comprises at least two embossing rollers that are each provided with a toothing consisting of individual teeth, the pyramidal teeth having an essentially rectangular horizontal projection, and the sides of the teeth being essentially parallel and perpendicular, respectively, to the longitudinal axis of the embossing roller. In contrast to the prior art, the opening angle (α) between the radially aligned adjacent tooth flanks (31FR, 32FR) is smaller than the opening angle (β) between the axially aligned adjacent tooth flanks (32FA, 33FA), and the tooth height (X) in the radial direction, measured from the tooth tip (ZS) to the tooth bottom (ZG1), is greater than the tooth height (Y) in the axial direction measured from the tooth tip (ZS) to the tooth bottom (ZG2). This dimensioning and arrangement of the teeth provides an improved gearing with a reduced specific pressure as well as an improved processing of the paper part of the foil that results in its better folding, curling, and tubing behavior.

DEVICE FOR SATINIZING AND EMBOSSING PACKAGING FOILS

The present invention refers to a device for satinizing and embossing packaging foils, comprising at least two embossing
5 rollers that are each provided with a toothing consisting of individual teeth, according to the preamble of claim 1.

Such a device for satinizing and embossing packaging foils is known from WO 02/076716 A1 to the applicant of the
10 present invention. According to some exemplary embodiments disclosed therein, e.g. according to Figs. 6 to 9, the embossing device comprises three embossing rollers, two of which are provided with a toothing of regularly arranged teeth while the third roller has either longitudinal or
15 transversal ribs. The modification of individual teeth for creating signs whose reflection varies according to the position of the observer is known from US-7 036 347 to the applicant of the present invention.

20 The arrangement and the shape of the individual teeth are disclosed in different patents and patent applications to the applicant of the present invention, e.g. in US-6 176 819, WO 00/69622, and in EP-A-1 925 443. The purpose of the individual teeth essentially consists in
25 creating an appearance on the metallized or other surface of the packaging foil intended therefor that has become known under the term "satinizing". By eliminating teeth, the original surface is conserved in these locations, thereby allowing to create a logo and other such signs. Furthermore,
30 by modifying individual teeth that are involved in the embossing process, however, signs may be created which may serve for identifying the content of the package.

All the aforementioned known tooth shapes according to the
35 preamble of claim 1 have in common that they are pyramidal

and have an essentially square base, and that the opening angle between adjacent teeth has the same value both in the axial direction and in the radial direction.

5 In the references cited above, it is further disclosed that satinizing packaging foils not only serves for improving their esthetic appearance but also for treating the paper part of the packaging foil such that its fibers are broken in order to reduce or avoid a so-called memory effect and to
10 achieve better overall folding properties. The term packaging foil encompasses metal-coated, metallized, printed, or otherwise surface-treated and light reflecting paper. The term "memory effect" denotes the backspringing of a fold under the action of the paper fibers which interferes
15 with the subsequent processing of the packaging foil. Since the trend is to continuously reduce or entirely omit the metal layer, the mechanical behavior of the paper of the packaging foil becomes more and more significant for the subsequent procedure, i.e. the packaging of cigarettes,
20 foods, or pharmaceutical products.

One of the possible improvements consists in reducing the distances between the individual teeth. In view of the already attained small dimensions of the teeth, a reduction
25 of that distance below 0.3 mm is limited by the fact that the teeth generally also serve for driving the second embossing roller so that past a certain fineness of the teeth, there is a risk of slippage, particularly if the teeth are worn or the packaging foil has a great thickness.

30

On the background of this prior art, it is an object of the present invention to improve a device of the kind mentioned in the introduction in such a manner that a better effect upon the paper part of the packaging foil and thus a better

folding behavior is achieved. This object is attained by the device according to claim 1.

Fig. 1 shows, in a first exemplary embodiment of the invention, a part of a device in a perspective view,

Figs. 1A, 1B, and 1C show respective enlarged views of the surfaces of the embossing rollers,

Fig. 2 schematically shows the shape and arrangement of teeth of embossing rollers in a perspective view and in a further enlarged view,

Fig. 3 shows a section according to line III-III in Fig. 2,

Fig. 4 shows a section according to line IV-IV in Fig. 2,

Fig. 5 shows a variant of the schematic shape and arrangement of teeth in an enlarged perspective view,

Fig. 6 shows a section according to line VI-VI in Fig. 5,

Fig. 7 shows a section according to line VII-VII in Fig. 5,

Fig. 8 shows another variant of the schematic shape and arrangement of teeth in an enlarged perspective view,

Fig. 9 shows a section according to line IX-IX in Fig. 8,

Fig. 10 shows a section according to line X-X in Fig. 8,

Figures 11 to 20 show a second exemplary embodiment of the invention that is analogous to the first exemplary embodiment according to Figures 1 to 10.

Fig. 1 shows one of the possible arrangements of the embossing rollers in the case where the device comprises three embossing rollers. The first embossing roller 1 is a driven roller which is always provided with a toothing 2 consisting of individual teeth 3. In the present case, embossing roller 1 cooperates with a second embossing roller 4 that is driven by the first embossing roller 1 and has no external driving means. This second embossing roller has the same toothing 2 with the same teeth 3 as first embossing roller 1.

The second embossing roller 4 cooperates with a third embossing roller 5 which, rather than individual teeth, has rings 6 which, in accordance with the shape of the teeth, are outwardly tapered and flattened so as to engage between the frustopyramidal teeth 3. Alternatively, instead of rings, longitudinal ribs may be used.

In Figs. 1A and 1B, it is schematically shown that toothing 2 of embossing rollers 1 and 4 is composed of individual teeth 3 that are arranged in a regular basic grid.

Furthermore, it follows from the references to the prior art cited above that the axle of second embossing roller 4 is not only resiliently pressed against the driving embossing roller 1 but also movably arranged in the other two

coordinate planes such that the teeth of the second embossing roller may engage between the teeth of the first embossing roller in a self-synchronizing manner. Thereby, the two embossing rollers cooperate in the manner of
5 gearwheels with or without paper and are therefore essentially rigidly coupled after the self-synchronization.

In the configuration shown in Fig. 1, neither a separate drive nor synchronizing means are required for the second
10 embossing roller as the two embossing rollers are self-synchronizing. The third embossing roller provided with the rings is generally driven by the packaging foil. However, it is also possible for particular applications to use synchronizing means that are known *per se*, such as
15 electronic parts, toothed belts, or gearwheels.

One of the inventively significant differences with respect to the prior art is the shape and arrangement of the teeth. The latter are pyramidal and have an essentially square or
20 rectangular base, the flanks of the teeth of the first exemplary embodiment being essentially parallel and perpendicular, respectively, to the longitudinal axis of the embossing rollers. As further known from the prior art, the tips of the teeth are flattened.

25 As appears in Figs. 3 and 4, the opening angles of the tooth flanks are different in the radial and axial directions. In the radial direction, i.e. according to section III-III or in the driving direction, respectively, opening angle α
30 between two adjacent flanks 31FR and 32FR of teeth 31 and 32 is smaller than opening angle β between the two axially aligned adjacent tooth flanks 32FA and 33FA of teeth 32 and 33.

The theoretical tooth height X, measured from the theoretical tooth tip ZS to tooth bottom ZG1, is greater than tooth height Y between theoretical tooth tip ZS and tooth bottom ZG2, these theoretical tooth tips ZS being
5 located at the same distance from the rotational axis for all teeth and, for the present purposes, at the point of intersection of the tooth flanks. As mentioned, these are theoretical values that do not take account of manufacturing tolerances and of wear. In the present case, the practical
10 tooth heights X' and Y' are indicated too, the difference X'-Y' being the same as for the theoretical tooth heights.

Due to the fact that in the driving direction, the maximum tooth height X is provided, the force transmission between
15 the driving embossing roller and the following second embossing roller is fully effective. In the axial direction, according to plane IV-IV, no driving force has to be transmitted, and therefore a smaller tooth height is sufficient in this direction.

20 In this manner it is possible to reduce the minimum distance between the teeth, the result being a finer embossing and an improved processing of the paper of the packaging foil. For the embossing rollers of the prior art mentioned in the
25 introduction, the minimum distances, i.e. the pitch, is approximately 0.3 mm for a tooth height of up to 0.5 mm. The present design of the teeth allows reducing the minimum distance down to 0.05 mm.

30 On this basis, a rectangular design of the tooth bases is possible while conserving the full driving force. Thus, according to Figures 5 to 7, length L1 of the base of tooth 7 or of teeth 71 to 74, respectively, in the radial direction is smaller than length L2 in the axial direction
35 or, according to Figures 8 to 10, length L3 of the base of

tooth 8 or of teeth 81 to 84, respectively, in the radial direction is greater than length L4 of this tooth in the axial direction. In this respect it will be noted that the lengths are only schematically depicted as only their
5 difference is significant here.

Further variations are possible in that the tooth flanks and the bases do not have to be arranged in a strictly straight or rectangular shape but may alternatively be rounded or
10 curved.

Opening angle α may be comprised in a range of 40° to 90° and angle β in a range of 60° to 120° , α always being smaller than β . The differences in tooth height, i.e. X - Y,
15 may be comprised in a range of 0.02 to 0.43 mm.

Furthermore, it follows from Fig. 2 that in the arrangement according to Fig. 1, each tooth of one embossing roller engages between four teeth of the other embossing roller.
20 However, this is not required for carrying out the invention; alternatively, an arrangement may be provided where each tooth of one roller engages in a corresponding recess in the other roller.

25 In Figures 11 to 20, a second exemplary embodiment of the invention is illustrated where the teeth having square or rectangular bases are not arranged in parallel or perpendicularly to the roller axes but form angle δ thereto. In this exemplary embodiment, the angle δ is equal to 45° .
30 The angle δ may be comprised in a range of greater than 0° to 89° , preferably in a range of 35° to 60° .

The three rollers 11 and 14 are each provided with a toothing 12 of individual teeth 13, and roller 15 is
35 provided with rings 16 that may be continuous or

discontinuous. Individual teeth 13 and rings 16 are of the same type as teeth 3 and ring 6, however form an angle δ to the roller axes.

5 In Figure 12 it appears that teeth 131, 132, 133, and 134 have a square bases and form an angle of 45° with respect to the axis of rotation RA of the roller. Opening angles α and β as well as the theoretical and actual tooth heights X, X' and Y, Y' are defined in the same way as in the first
10 exemplary embodiment.

In Figures 15 to 17, rectangular teeth 17, 171 to 174 are illustrated whose length L1 in the longitudinal direction is smaller than length L2 in the driving direction, and in
15 Figures 18 to 20, rectangular teeth 18, 181 to 184 are illustrated whose length L3 in the longitudinal direction is greater than length L4 in the driving direction, the definition of the opening angles α and β again being the same as in the preceding exemplary embodiment.

20

The suggested solution provides various advantages:

1. Due to the reduced distance between the teeth, the embossed paper exhibits a very good behavior with
25 regard to tubing and curling.
2. It is possible with this toothing to work with a drive without additional synchronizing means, but the latter are not excluded for special applications.
- 30 3. After the embossing process, the alterations of the packaging foil in the longitudinal direction are minimal, so that very little faults arise in the following folding operation and the packaging of the
35 wrapped material, e.g. cigarettes, is not impaired.

This is particularly true in the case of a three-roller system.

4. The specific pressure applied to the packaging foil
5 may be reduced by approx. 25 % as compared to standard
pyramids since a higher penetration depth needs a
smaller pressure.
5. Due to the increased pressure in the radial direction,
10 the paper fibers are broken much better, thereby
resulting in improved folding properties.
6. The embossing rollers of the prior art that are not
forcedly synchronized are rolling off on the foil as a
15 coupling medium, the first driving roller driving the
foil and the second embossing roller in turn being
driven by the foil. This may cause a slight slippage
that influences the following processing. With the
present toothing, the two embossing rollers cooperate
20 in the manner of gearwheels with or without paper and
are therefore essentially rigidly coupled after the
self-synchronization.
7. The present embossing rollers are suitable for a very
25 large range of packaging foils, e.g. for foils from
5 to 120 GSM total weight.
8. Due to the fact that the tooth heights are smaller in
the axial direction, a dipping of the engraving roller
30 at the location of the logos, i.e. where the teeth are
absent, is reduced, i.e. there is no over-embossing of
the edge areas.

The reduction of the distances between the individual teeth
35 that is achieved by the toothing according to the invention

not only results in a better processing of the packaging foil or of the paper part of the packaging foil, respectively, but also in an improved visual appearance of the satinized treated surface of the packaging foil. In addition, as disclosed in the cited prior art, further optical effects may be achieved by completely removing the corresponding teeth at the location of the intended logo on the driving embossing roller or, in order to produce a so-called shadow embossing where the created sign or image or the like variably reflects depending on the viewing angle, by modifying the corresponding individual teeth by a modification of their height, shape, or surface, or alternatively, as known from the prior art, by creating micro- or nanostructures on the tooth surface or on the flattened tooth tip, respectively, in order to produce authentication features that are generally indistinguishable by the naked eye.

Lately, moreover, foils are being used that are no longer provided with a metallized surface but with another treated light reflecting surface that is modified by the satinizing process so that a high-contrast logo is achieved by eliminating teeth in this case also.

In the exemplary embodiment according to the drawings, a device having three embossing rollers is depicted and described. The inventively significant properties of the arrangement of the teeth and their design are also applicable to an embossing device having two embossing rollers and of course also to an embossing device having more than three embossing rollers.

- - - - -

Claims

1. Device for satinizing and embossing packaging foils, comprising at least two embossing rollers that are each
5 provided with a toothing consisting of individual teeth, the pyramidal teeth having an essentially rectangular horizontal projection, characterized in that the opening angle (α) between the essentially radially aligned adjacent tooth
10 flanks (31FR, 32FR; 131FR, 132FR) is smaller than the opening angle (β) between the essentially axially aligned adjacent tooth flanks (32FA, 33FA; 132FA, 133FA) and that the tooth height (X) in the radial direction, measured from
15 the tooth tip (ZS) to the tooth bottom (ZG1), is greater than the tooth height (Y) in the axial direction measured from the tooth tip (ZS) to the tooth bottom (ZG2).
2. Device according to claim 1, characterized in that the sides of the teeth (3, 7, 8) are aligned essentially
20 parallelly or perpendicularly to the longitudinal axis of the embossing roller, respectively.
3. Device according to claim 1, characterized in that the sides of the teeth (13, 17, 18) form an angle (δ) of greater
25 than 0° up to 89° with the longitudinal axis (RA) of the embossing roller, or perpendicularly thereto, respectively.
4. Device according to any one of claims 1 to 3, characterized in that the smaller opening angle (α) is
30 comprised in a range of 40° to 90° and the greater opening angle (β) in a range of 60° to 120° , α always being smaller than β .
5. Device according to any one of claims 1 to 4, characterized in that for a tooth height (X) of up to 0.5

mm, the tooth height difference (X - Y) is comprised in a range of 0.02 to 0.43 mm.

6. Device according to any one of claims 1 to 5,
5 characterized in that each tooth (3) of one of the embossing rollers (1 or 4) is located between four teeth (3) of the other embossing roller (4 or 1).

7. Device according to any one of claims 1 to 6,
10 characterized in that the base of the individual teeth (31-34; 131-134) is square.

8. Device according to any one of claims 1 to 6,
characterized in that the base of the individual teeth (71-
15 74; 81-81; 171-174, 181-184) is rectangular (L1, L2; L3, L4).

9. Device according to any one of claims 1 to 8,
characterized by a third embossing roller (5, 15) having a
20 surface structure without individual teeth.

10. Device according to claim 9, characterized in that the surface structure of the third embossing roller (5, 16) comprises rings (6, 16) or longitudinal ribs that are
25 arranged in a continuous or discontinuous manner.

11. Device according to any one of claims 1 to 10,
characterized in that the second embossing roller (4) is journaled such as to be capable of an excursion in the
30 longitudinal direction of the axle and/or in the direction of the contact pressure and/or in the travelling direction of the material that is to be embossed.

12. Device according to any one of claims 1 to 11,
35 characterized in that individual teeth of one of the two

embossing rollers (1, 4; 11, 14) are modified in height or shape in order to produce embossed signs whose appearance varies depending on the viewing angle.

FIG. 1

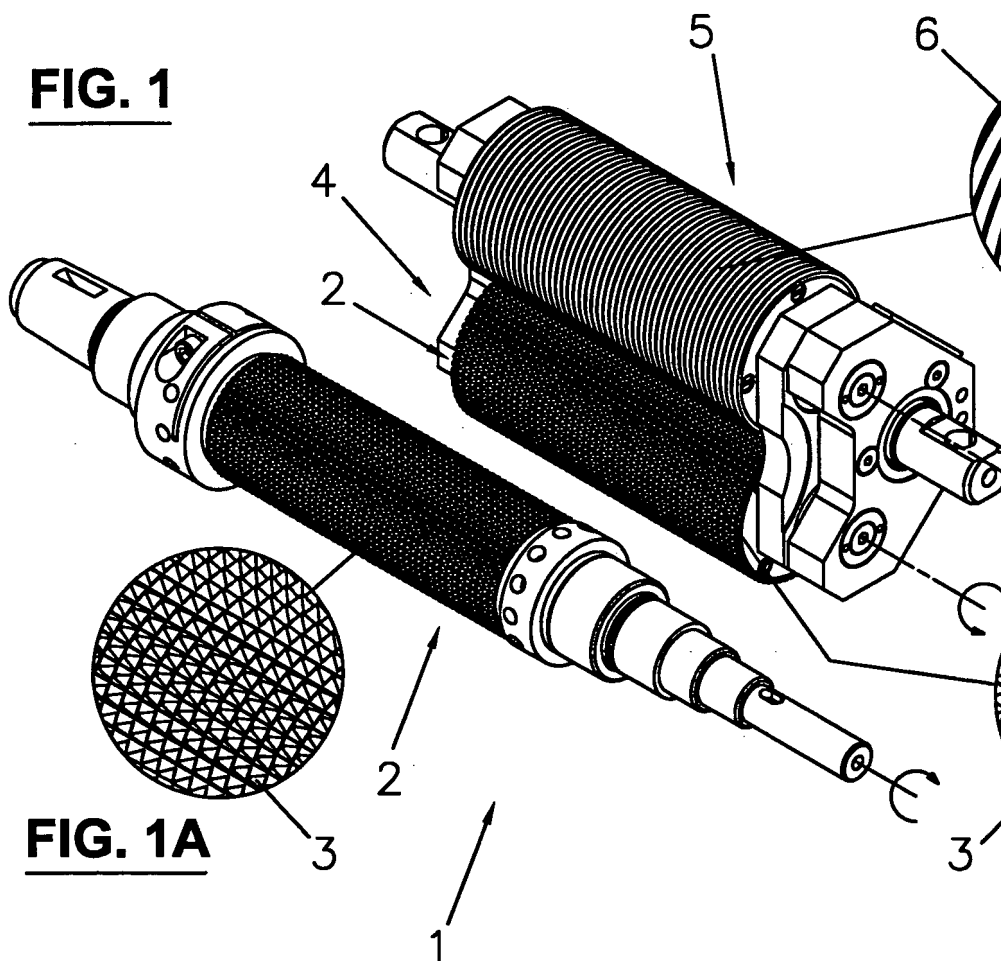


FIG. 1C

FIG. 1B

FIG. 1A

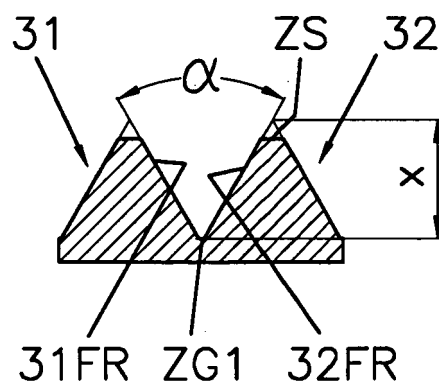
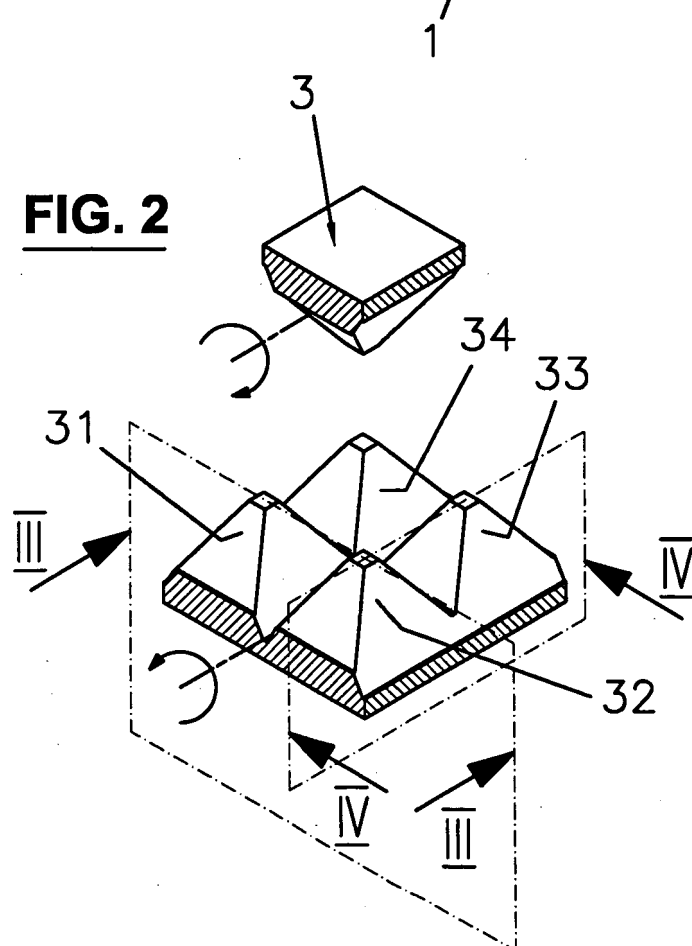


FIG. 3

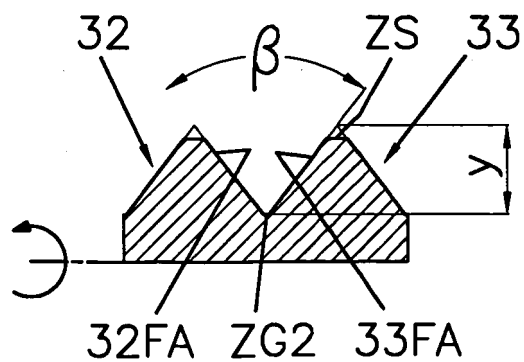


FIG. 4

FIG. 5

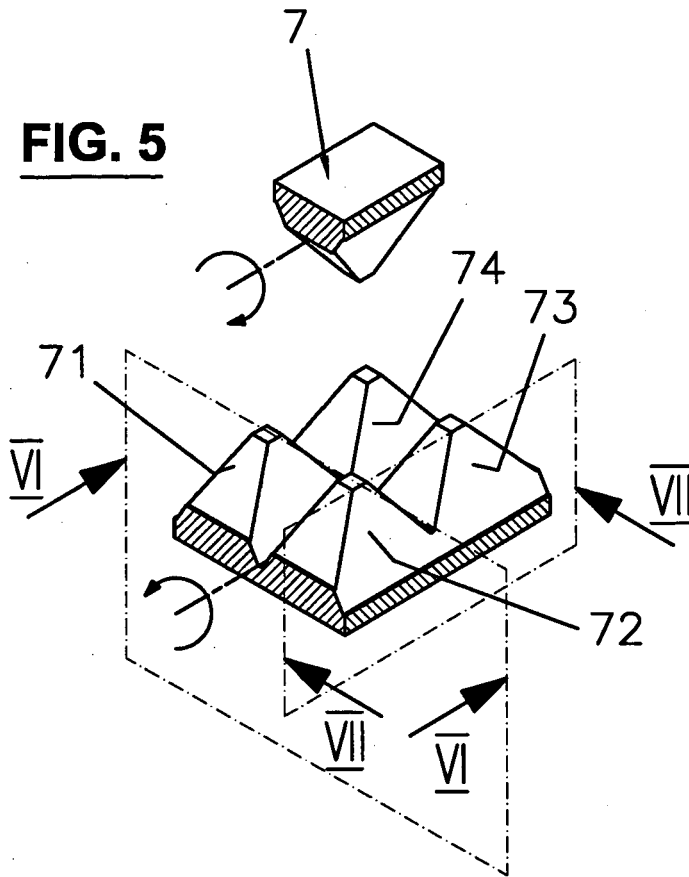


FIG. 6

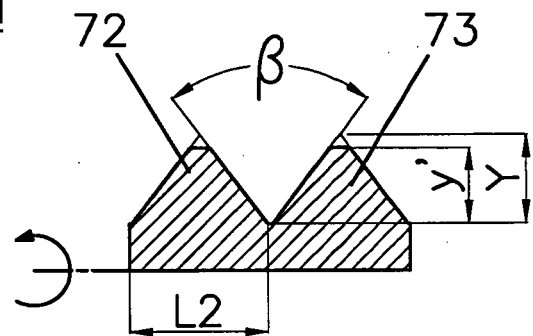
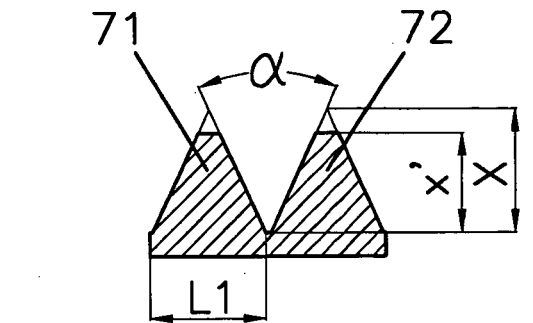


FIG. 7

FIG. 8

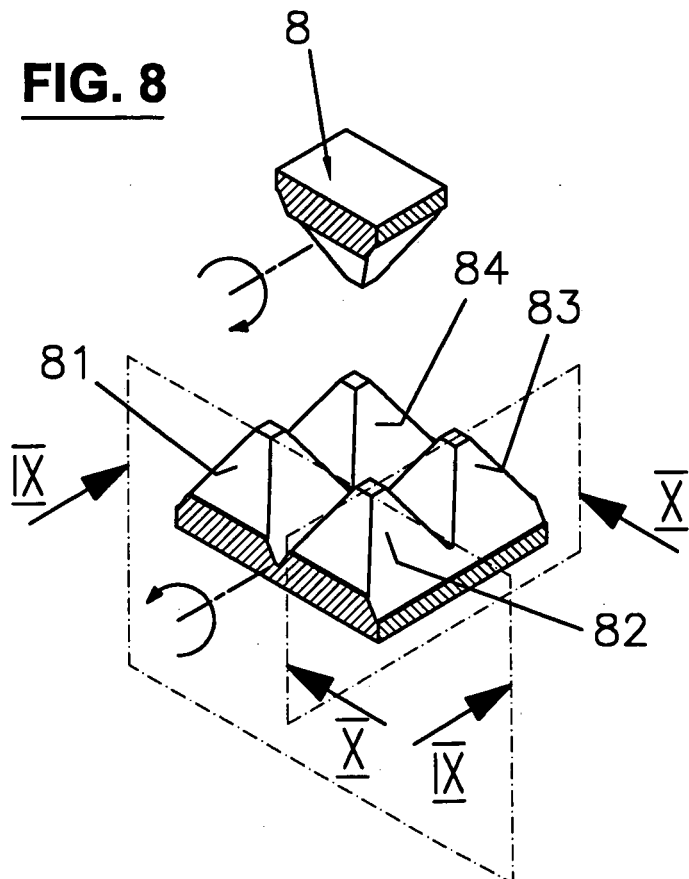


FIG. 9

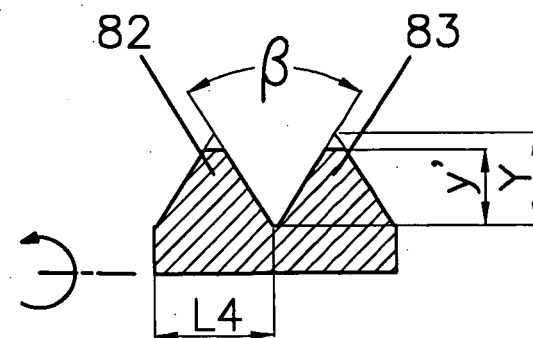
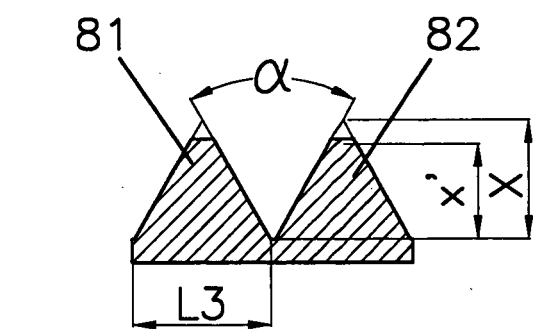


FIG. 10

FIG. 11

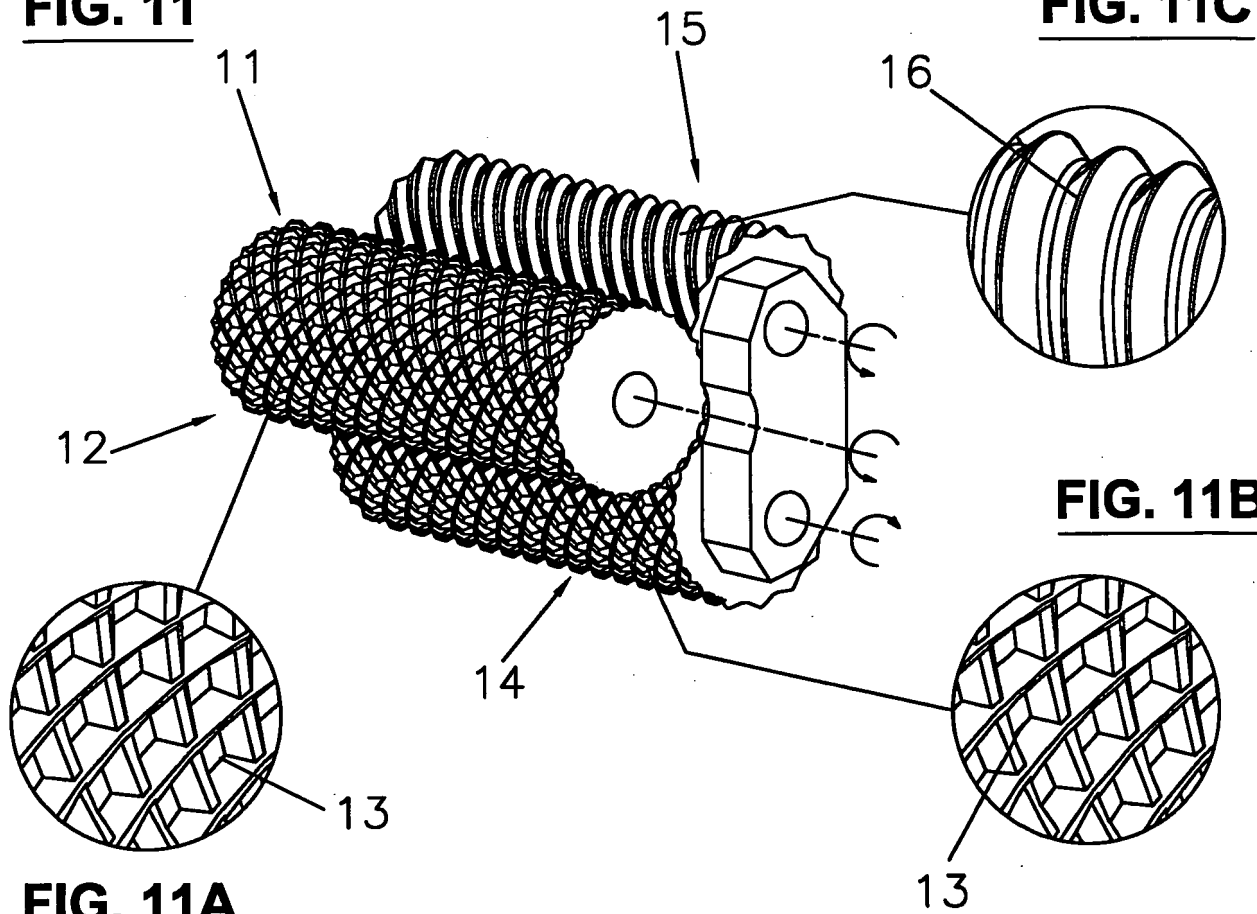


FIG. 12

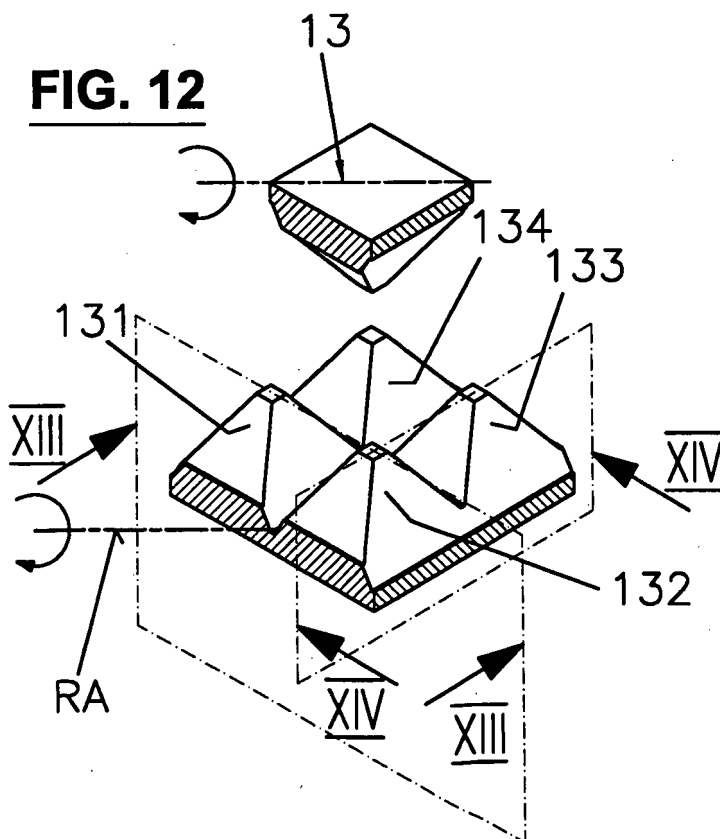


FIG. 13

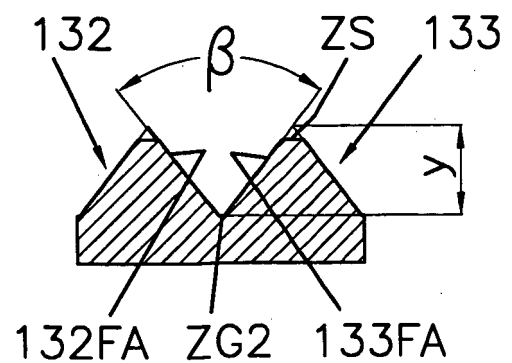
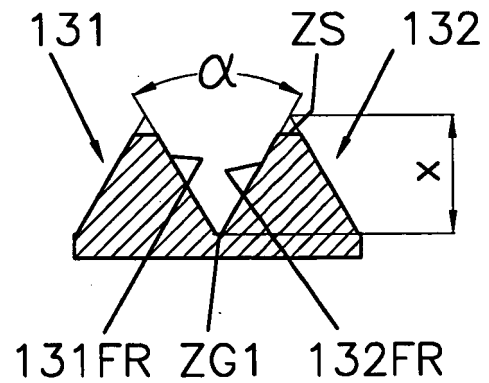


FIG. 15

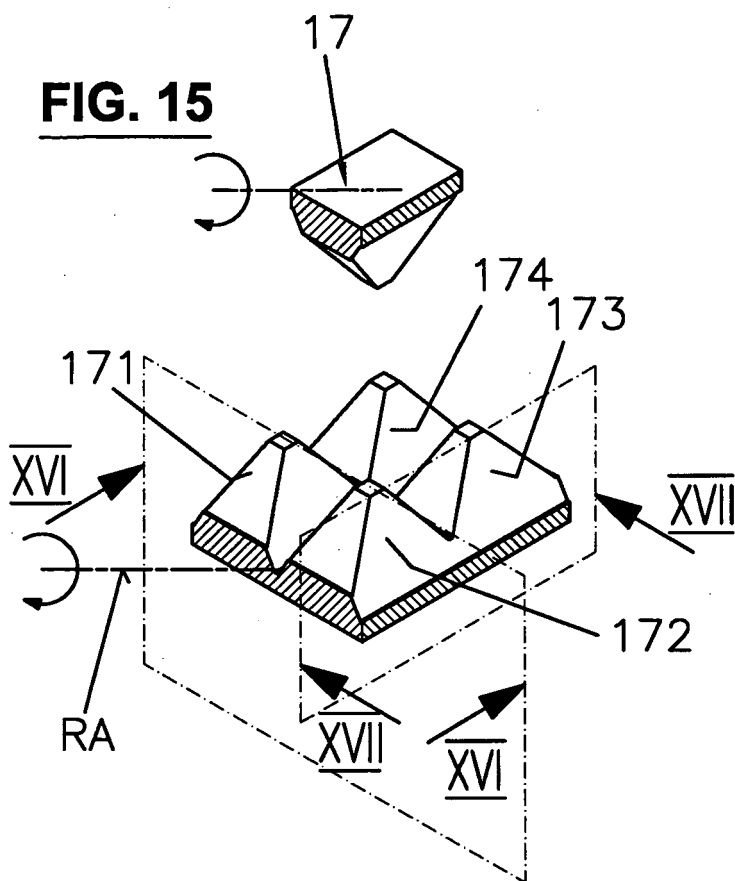


FIG. 16

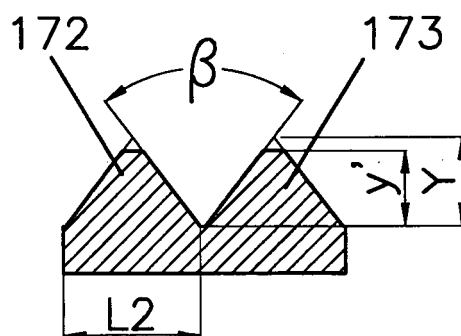
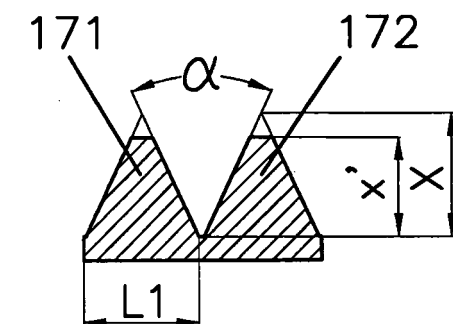


FIG. 17

FIG. 18

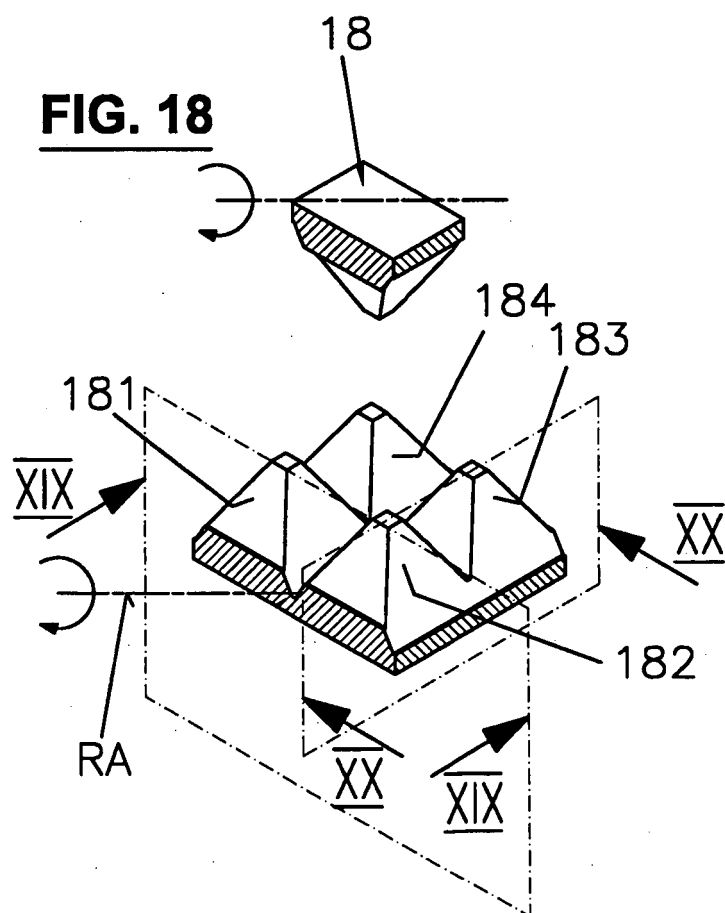


FIG. 19

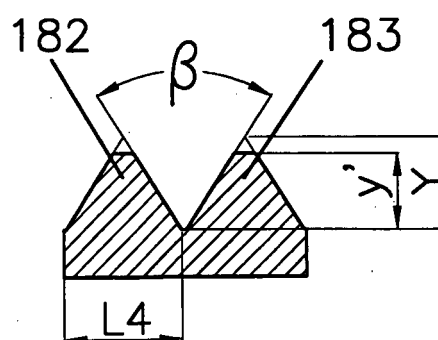
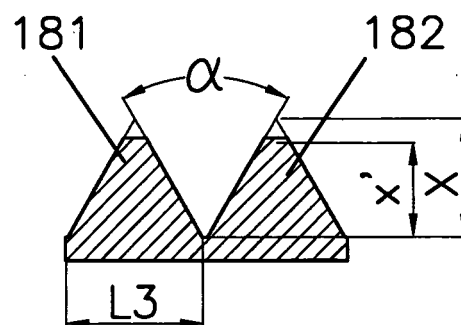


FIG. 20

INTERNATIONAL SEARCH REPORT

International application No

PCT/CH2009/000214

A. CLASSIFICATION OF SUBJECT MATTER

INV. B31F1/07

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B31F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 523 382 A (SEALED AIR CORP [US]) 20 January 1993 (1993-01-20) page 7, lines 26-37	1-12
A	US 2005/138981 A1 (WILHELM LEE D [US]) 30 June 2005 (2005-06-30) paragraphs [0040] - [0042]	1-12
A	DE 197 34 414 A1 (SCA HYGIENE PROD GMBH [DE]) 25 February 1999 (1999-02-25) column 4, lines 39-50	1-12
A	WO 02/076716 A (BOEGLI GRAVURES SA [CH]; BOEGLI CHARLES [CH]) 3 October 2002 (2002-10-03) cited in the application	
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

20 August 2009

Date of mailing of the international search report

31/08/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Philippon, Daniel

INTERNATIONAL SEARCH REPORT

International application No

PCT/CH2009/000214

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 176 819 B1 (BOEGLI CHARLES [CH] ET AL) 23 January 2001 (2001-01-23) cited in the application -----	
A	WO 00/69622 A (BOEGLI GRAVURES SA [CH]) 23 November 2000 (2000-11-23) cited in the application -----	
A	EP 1 925 443 A (BOEGLI GRAVURES SA [CH]) 28 May 2008 (2008-05-28) cited in the application -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/CH2009/000214

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0523382	A	20-01-1993	AU 1829292 A	24-12-1992
			CA 2071316 A1	18-12-1992
			DE 69213852 D1	24-10-1996
			DE 69213852 T2	30-01-1997
			ES 2093143 T3	16-12-1996
			HK 1007121 A1	01-04-1999
			JP 7187225 A	25-07-1995
			MX 9202892 A1	01-12-1992
			SG 44665 A1	19-12-1997
			US 5203761 A	20-04-1993
			US 5297919 A	29-03-1994
			US 5327805 A	12-07-1994
US 2005138981	A1	30-06-2005	BR PI0405601 A	20-09-2005
			EP 1708872 A1	11-10-2006
			WO 2005065928 A1	21-07-2005
DE 19734414	A1	25-02-1999	AT 237465 T	15-05-2003
			AU 746109 B2	18-04-2002
			AU 8976098 A	01-03-1999
			BR 9811879 A	22-08-2000
			CA 2297728 A1	18-02-1999
			CN 1272079 A	01-11-2000
			CO 5050381 A1	27-06-2001
			WO 9907546 A1	18-02-1999
			EP 1001879 A1	24-05-2000
			ES 2197501 T3	01-01-2004
			HR 20000064 A2	31-10-2000
			HU 0003200 A2	28-02-2001
			JP 2001513461 T	04-09-2001
			PL 338560 A1	06-11-2000
			SK 1652000 A3	14-08-2000
			TR 200000370 T2	23-07-2001
			US 6440564 B1	27-08-2002
WO 02076716	A	03-10-2002	AT 408497 T	15-10-2008
			CA 2441975 A1	03-10-2002
			CN 1500037 A	26-05-2004
			DK 1372946 T3	05-01-2009
			EP 1372946 A1	02-01-2004
			ES 2314026 T3	16-03-2009
			JP 2004531397 T	14-10-2004
			PT 1372946 E	03-11-2008
			US 2004109911 A1	10-06-2004
			ZA 200307217 A	01-11-2004
US 6176819	B1	23-01-2001	AT 195281 T	15-08-2000
			BR 9805449 A	14-12-1999
			CA 2256325 A1	19-06-1999
			DE 59800229 D1	14-09-2000
			EP 0925911 A1	30-06-1999
			ES 2150308 T3	16-11-2000
			HK 1020915 A1	09-02-2001
			PT 925911 E	31-01-2001
WO 0069622	A	23-11-2000	AT 261812 T	15-04-2004
			AU 4395900 A	05-12-2000
			BR 0010755 A	26-02-2002

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/CH2009/000214

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0069622	A	CA 2382597 A1 CN 1273905 A DE 50005695 D1 EP 1181152 A1 ES 2215646 T3 JP 2002544019 T ZA 200109014 A	23-11-2000 22-11-2000 22-04-2004 27-02-2002 16-10-2004 24-12-2002 31-01-2003
EP 1925443	A	28-05-2008	
		BR PI0704244 A CA 2610176 A1 CN 101186125 A JP 2008126669 A US 2008116610 A1 ZA 200709348 A	15-07-2008 22-05-2008 28-05-2008 05-06-2008 22-05-2008 29-10-2008