

12

EUROPEAN PATENT SPECIFICATION

- 45 Date of publication of patent specification: **14.08.85** 51 Int. Cl.⁴: **A 47 L 15/42**
21 Application number: **82305972.0**
22 Date of filing: **09.11.82**

54 **A dishwasher incorporating combination drain pump and grinding apparatus.**

30 Priority: **09.11.81 US 319831**
10.06.82 US 387067

43 Date of publication of application:
25.05.83 Bulletin 83/21

45 Publication of the grant of the patent:
14.08.85 Bulletin 85/33

84 Designated Contracting States:
DE FR GB

58 References cited:
DE-B-1 144 447
DE-B-1 628 609
US-A-2 959 179
US-A-3 079 094
US-A-3 080 874
US-A-3 370 598
US-A-4 150 680
US-A-4 228 962
US-A-4 319 599

73 Proprietor: **Hobart Corporation (a corporation of the State of DELAWARE)**
World Headquarters
Troy, Ohio 45374 (US)

72 Inventor: **Meyers, Theodore F.**
3205 Magnolia Drive
Troy Ohio (US)

74 Representative: **Warren, Anthony Robert et al**
BARON & WARREN 18 South End Kensington
London W8 5BU (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

The present invention relates to warewashing machines, and more particularly, to domestic or household-type dishwashers having pump assemblies which drain the wash chamber and grind food.

Many dishwashers are provided with drain pumps which drain the washing solution from the sump of the dishwashing tank and at the same time grind up or comminute relatively soft food soil particles suspended in the dishwashing solution drained from the sump. Generally speaking, these small disposers used in dishwashers have been designed to handle only "soft foods". Their purpose was primarily to reduce particle size of soft food to prevent plugging of wash arm nozzles in that type of domestic dishwasher which did not filter recirculated wash solution, and also to grind any soft food en route to a drain, in both filtered and unfiltered systems.

However, toothpicks, cherry and olive pits, cigarette filter tips, chips of glass and other hard or stringy objects also find their way into the sump. Unless they are trapped by a coarse filter covering the inlet to the disposer, they can enter the drain. Sometimes they will pass through the coarse filter and cause clogging of the system despite the presence of a soft food disposer. If either the impeller or stator of the soft food disposer is made of a plastic such as a phenolic, a hard item passing through the disposer can break parts which must then be replaced. If a coarse filter is used, it often includes labyrinthine passages to prevent long, thin objects such as toothpicks or bones from bending around short curves, while permitting passage of items such as corn, peas, cherry pits, and the like. Corn and peas can be ground in a disposer easily because they are relatively soft, but hard items such as cherry pits present a serious problem for these types of disposers.

If a flat, coarse filter were used, the openings in the filter typically would be of a size large enough such that soft items such as peas and corn would be passed to the disposer. However, a toothpick could approach the face of such a filter end first and pass straight through to cause a clogging problem. While some toothpicks are capable of cracking across the wood grain easily and being ground up by a soft food disposer, many have a long grain of such strength that they are easily bent without being broken. Whether toothpicks are trapped upstream by a coarse filter, or pass through it and cannot be cut up by the soft food disposer and are thus trapped downstream, they may create problems. Trapped toothpicks bridge across openings and capture other soil. If this occurs at the disposer itself, it may necessitate a service call. If it occurs at the coarse filter, it may result in unsatisfactory dishwashing. The reason for the latter is that trapped soil, by being unable to drain from the dishwasher at the end of any of the several discrete periods of a total dishwashing cycle, can partially break loose from time to time

and get redeposited on the ware. Obviously, if this happens during the final rinse, unclean ware can result. In addition, depending on the degree to which the filter traps soil, the recirculating pump may be partially or wholly starved of a water supply.

There are several devices in the prior art which contain means to perform such draining and grinding or comminuting functions. These devices are equipped with drain and/or wash pump impellers that, either alone or in combination with stationary members, perform a comminuting function in order to reduce the oversized food and other particles that invariably would pass through coarse filters designed to retain them and cause clogging problems in the drain line or wash arm.

For example, U.S. Patent No. 3,370,598 discloses a dishwasher having a drain pump which includes a drain impeller mounted on a common shaft with a circulating pump impeller which pumps washing solution to the spray arms. The drain impeller is positioned within a stationary shredder ring having slots spaced about its periphery through which the washing solution and food soil particles pass during both washing and draining cycles. Food soil is comminuted by the interaction of the slots of the stationary shredder ring and the blades of the impeller. The washing solution and comminuted food particles flow outwardly through the slots and downwardly to the inlet to the drain tube or line, positioned substantially below the drain impeller.

The drain pump assembly disclosed in that patent is representative of those devices which incorporate a stationary shredder ring surrounding the impeller for adapting the device to also function as a disposer. A disadvantage of this design is that, to operate efficiently as a pump as well as a disposer, the solution and comminuted particles must be subjected to pumping action after passage through the stationary shredder ring. Therefore, additional space must be provided below the impeller to accommodate the drain line inlet there as well as to expose the bottom of the impeller to the solution in order for the impeller to provide the needed pumping action.

Another disadvantage with this device is that some of the food particles are collected in the drain line downstream of the drain pump during the washing operation. Therefore, these particles make only one brief pass through the impeller prior to draining and may not be sufficiently reduced in size to eliminate a clogging problem.

U.S. Patent No. 3,080,874 discloses a dishwasher having a waste disposer and comprising a single impeller mounted within a stationary, cup-shaped shredder ring. During draining, washing solution bearing food soil particles flows downwardly from the sump of the dishwashing tank onto the rotating impeller which propels the solution outwardly, the interaction of the shredder ring and impeller serving to comminute the food particles. A diverter valve positioned be-

neath the impeller directs the washing solution either to the spray arms or to a drain conduit.

While this type of device may save space in utilizing a single impeller, it possesses several disadvantages. The centrifugal pumping action of the impeller on the washing solution and particles would be substantially disrupted by the presence of the stationary shredder ring. Once the solution and particles flow through the shredder ring they are not subjected to any additional pumping action since the cup-shaped bottom of the shredder ring encloses the lower surface of the impeller. Another disadvantage is that there is no well-defined flow path for pumped fluid during either the washing or the draining modes. Fluid is pumped radially outwardly through the shredder ring, then must angle sharply downward, then sharply radially inward, then sharply upward or downward. The number of sharp turns reduces the efficiency of the pump.

There is also a disadvantage common to both of the aforementioned drain pumps. Since the components of the drain pump must be manufactured and assembled at a competitive price, these components are dimensioned to provide loose tolerances to allow for variations in size and fit. Thus, there must of necessity exist a gap between the impeller periphery and the shredder ring which may be large enough to permit the passage through the openings in the shredder ring of an elongate object, such as a section of a toothpick, without being sheared by the impeller, or only being sheared in half.

Some dishwashers include a drain pump which functions as a valve to control the fluid flow through the drain conduit. For example, U.S. Patent No. 2,959,179 discloses a dishwasher in which the drain impeller and washing impeller are powered by a reversible motor. When the impeller is rotated in one direction, it drains the solution from the sump by functioning as an axial flow impeller, propelling the washing solution downward and outward from the sump to the drain conduit. When rotated in the opposite direction, the impeller does not permit washing solution to flow to the drain conduit but allows it to be recirculated by the blades of the washing impeller.

A disadvantage of this device is that there is no stationary member to interact with the blades of the impeller to shear food soil into smaller pieces. Therefore, hard or stringy objects suspended in the fluid being pumped by the impeller may not be comminuted at all. Furthermore, there is no means for retaining large food particles in the vicinity of the impeller until they are sufficiently comminuted to reduce the likelihood of their clogging the drain.

The device disclosed in that patent possesses a disadvantage similar to that of the devices previously discussed in that the outlet to the drain conduit is positioned directly below the drain impeller, requiring additional space.

Each of the aforementioned patents discloses a centrifugal or axial flow drain pump having an

impeller which performs a cutting or grinding function to reduce the size of said particles in the fluid pumped to facilitate removal of soil during draining. However, none discloses a combination pump and comminuting impeller having radially inwardly facing grinding teeth and radially outwardly facing pumping vanes so that seeds, toothpicks, glass, and stringy objects can be sheared, and can comminute the relatively softer food particles, as well.

Accordingly, there is a need for a combination drain pump and grinding apparatus which is capable of shearing food particles to reduce their size, as well as harder material such as seeds, glass or toothpicks; which retains material in the vicinity of the comminuting activity until it is sufficiently comminuted; and which is capable of comminuting long or stringy material without the use of expensive, closely-toleranced parts.

According to the present invention, there is provided a dishwasher having a wash chamber and a sump at the bottom of said chamber for containing wash fluid therein; primary spray means for recirculating and spraying wash fluid onto food ware in said wash chamber; a drain system communicating with a drain line and including a drain pump and a drain pump inlet communicating with said sump; a housing having a circular wall and a floor defining a pump chamber; means defining said inlet above said chamber; said housing having a pump outlet extending through said side wall and communicating with said chamber and said drain line; a waste impeller positioned within said chamber; means for mounting said impeller for rotation about a vertical axis; and means associated with said mounting means for rotating said impeller; characterised by:

said impeller having a disk-shaped base substantially parallel to and spaced above said floor, said base including a plurality of soil-sizing orifices therethrough, an upstanding rim extending about a periphery of said base and including an inner wall having a plurality of radially-extending, substantially vertical cutting edges and an outer wall having a plurality of radially-extending, substantially vertical pumping vanes, and a first breaker tooth extending upwardly from said base and positioned inwardly of said rim; and

a stationary tooth having a vertical cutting edge extending downwardly adjacent said inner wall such that rotation of said impeller causes said stationary tooth to pass between said inner wall and said breaker tooth such that said cutting edges come into opposing close proximity to said cutting edge of said tooth.

In a preferred embodiment, the rim is a continuous structure without openings of any kind and comprises a plurality of inner and outer members arranged in a continuous, alternately overlapping fashion. Each member has a pair of substantially vertically disposed, longitudinal edges such that the edges of the inner members define pairs of opposing surfaces which comprise the cutting edges, and the edges of the outer

members define pairs of opposing surfaces comprising the pumping vanes.

The pump inlet defining means preferably is a cover plate having a downturned lip which extends about the pump inlet opening and is positioned adjacent the inner wall of the impeller. This overlapping relationship between the outer periphery of the lip and the inner periphery of the upper portion of the inner wall forms a labyrinth seal which creates a tortuous path for the washing fluid from the interior of the impeller to its exterior such that food soil and other material suspended in the fluid is left behind. Therefore, relatively loose tolerances can be allowed for the lip and rim without resulting in a grinding apparatus which permits soil to escape to the drain without first being ground.

Also in the preferred embodiment, the downturned lip supports the stationary tooth which has opposing vertical cutting edges extending downwardly adjacent the inner wall and adjacent the breaker tooth carried on the impeller base. The stationary tooth interacts with the cutting edges of the inner wall and the breaker tooth to shear material suspended in the fluid entering the pump chamber. Due to the cupped shape of the impeller and the labyrinth seal formed by the rim and the downturned lip, the flow path of substantially all of the comminuted material from the cutting surfaces of the impeller to the drain opening is through the plurality of soil-sizing orifices in the base.

Soil remains within the cup of the impeller until it has been reduced sufficiently to pass through these orifices. The orifices are sized such that material capable of passing through them presents relatively little danger of clogging the drain line. The interior of the impeller, which is defined by the base and rim, comprises a soil grinding region in which soil is held until reduced in size sufficiently by the interaction of the cutting teeth, stationary tooth, and breaker tooth to pass through the sizing orifices.

Substantially all of the cutting is effected within the cup of the impeller where little or no pumping action is provided. Outside of the cup, the pump vanes provide little cutting action but provide substantially all of the pumping action, creating a suction outside of the impeller to draw the reduced soil through the sizing holes of the floor. Thus, the impeller provides a disposer within the cup upstream of and functioning in series with a pump that draws ground soil through sizing orifices by creating a negative pressure outside of the impeller within the pump chamber.

In a preferred embodiment of the invention, the wall of the pump chamber includes a second outlet opening, spaced from the first, which communicates with a conduit that may lead to other apparatus of the dishwasher, such as a soil collecting chamber. Since the inner and outer walls of the impeller rim include opposing faces which provide the cutting edges and impeller blades respectively, the impeller may be rotated in either direction and provide the same pumping

and comminuting action. Therefore, when rotated by a reversible motor, the combination pump and grinding apparatus of the present invention is capable of performing its pumping and grinding operation in both a forward and a reverse mode.

The wall of the pump chamber in the preferred embodiment includes a section extending between the two openings on one side of the pump chamber which is closer to the outer periphery of the impeller than the remainder of the wall, thereby forming a constriction in the passageway which extends between the outer periphery of the impeller and the wall of the pump chamber. During rotation of the impeller in one direction, this constricted passage creates a positive pressure head adjacent a first outlet opening, thereby permitting fluid flow through it, and at the same time creates a negative pressure head adjacent the opening, thereby preventing fluid flow through it. Conversely, rotation of the impeller in an opposite direction creates a positive head adjacent the second opening and a negative head adjacent the first opening, thereby permitting flow through the second opening and restricting it through the first.

The dishwasher embodying the present invention incorporates a combination pump and grinding apparatus in which a single impeller operates as a disposer in series with a pump which draws ground soil through sizing orifices in the impeller. The combination pump and grinding apparatus can be relatively inexpensively manufactured from inexpensive materials and dimensioned to have loose tolerances, yet provide an effective pumping and grinding operation. Hard materials such as toothpicks, seeds, and glass, as well as soft and/or stringy food particles, may be reduced in the apparatus until they are of a size which does not present a potential for clogging. The need is eliminated for a known-type of coarse filter by providing in its stead a long, narrow unrestricted entranceway to the drain which traps only soil and other articles larger than the entranceway in more than one dimension across the particle, thus permitting long thin articles such as toothpicks and also objects such as cherry and olive pits, small bones, etc. to enter the disposer for grinding, thereby avoiding the tendency thereof to trap soil. The apparatus is capable of performing an efficient pumping and comminuting function during both forward and reverse rotation of the pump impeller.

In order that the invention may be more readily understood, reference will now be made to the accompanying drawings, in which:

Fig. 1 is a front elevation of a conventional dishwasher with portions partially broken away to reveal the interior of the dishwasher and the combination drain pump and grinding apparatus embodying the present invention;

Fig. 2 is an elevation in section of the wash pump and the combination drain pump and grinding apparatus of Fig. 1, the base plate being taken in section at line 2—2 of Fig. 5;

Fig. 3 is an exploded view of the wash pump

and combination drain pump and grinding apparatus of Fig. 2;

Fig. 4a and 4b are perspective views of the impeller;

Fig. 5 is a plan view of the drain pump housing taken at line 5—5 of Fig. 2; and

Fig. 6 is a plan view of the cover plate of the preferred embodiment.

As shown in Fig. 1, a warewashing machine such as a domestic dishwasher 50 includes conventional upper and lower racks 51, 52 for supporting food ware such as cups, saucers, plates, and silverware, within a tank 54. Tank 54 substantially defines the rear, bottom, sides, and top of a wash chamber 55 within dishwasher 50 where the washing and rinsing of food ware takes place. The front of the chamber 55 is defined by a door (not shown) which closes the tank 54 during washing and rinsing of the food ware.

As shown and described in greater detail in U.S. Patent No. 4,097,307, issued June 27, 1978, assigned to us, and incorporated herein by reference, dishwasher 50 also includes primary spray means consisting in part of a recirculating pump 56, primary spray arms 57 mounted on a fixed shaft 58 (shown in Fig. 2), and drive motor 59 linked to a recirculating pump impeller 60 by drive shaft 61. A sump 62 formed in the bottom of the tank 54 comprises part of the wash chamber 55, and the recirculating pump 56 is positioned within this sump.

As shown in Figs. 2 and 3, a pump housing 64 encloses both recirculating pump 56 and the combination drain pump and grinding apparatus of the preferred embodiment, generally designated 66. The drain pump and grinder 66 preferably forms a part of a drain system which has an opening in the bottom of the sump 62 for receiving and draining the wash and rinse fluids from the dishwasher 50, through a drain line 68 having a check valve 69 (Fig. 1), and into a conventional household drain (not shown), for example.

The drain pump inlet 70 is located beneath the recirculating pump 56 and serves as the inlet to the drain system. The recirculating pump inlet 72 is located in sump 62 slightly above the drain pump inlet 70. Inlet 72 is covered by a main filter screen 74 which is supported by the outer edge of a circular divider plate 76, which forms a part of the pump housing 64, to prevent food soil debris and other material from entering the recirculating pump inlet 72 and blocking or clogging the jet spray orifices in the spray arms 57.

The drain pump and grinding apparatus 66 preferably communicates with a soil collecting circuit 78 which includes a fluid inlet conduit 84 which extends from the drain pump apparatus upwardly past the recirculating pump 56 and into a soil collecting chamber 100 (also shown in Fig. 3) which is mounted above the recirculating pump and has a generally toroidal shape surrounding the fixed shaft 58 defined by an annular wall 102 and a conical floor 104. The collecting chamber 100 is covered by a mesh screen 86 which permits fluid within the chamber to flow

outwardly to be utilized by the recirculating pump 56, while straining food soil from it and retaining it within the chamber.

As shown in Figs. 2, 3, and 5, the fluid inlet conduit 84 is contained within the pump housing 64. Pump housing 64 includes a lower housing base plate 120 and an upper section 122, which are essentially separated by the divider plate 76. Plate 76 thus constitutes the fluid dividing line between the primary spray means and the drain system. Base plate 120 defines a passageway 124 which comprises a continuation of the sump 62 beneath the upper section 122 to the drain pump inlet 70. Since the drain pump 66 is capable of grinding hard objects such as glass, toothpicks, seeds, bones, and the like, the passageway 124 preferably does not include a coarse filter screen covering the entrance to the passageway. Instead, passageway 124 is relatively long, narrow in a vertical direction, and unrestricted.

The combination drain pump and grinding apparatus 66 of the preferred embodiment is contained within the base plate 120 and includes a pump chamber 126 defined by a substantially circular wall 128 and a floor 129. The base plate 120 also includes a drain channel 130, which forms an integral part of the drain line 68 and communicates with the pump chamber 126 at a pump outlet 131 formed in the wall 128. The base plate 120 also defines a soil collector channel 132 which forms an integral part of the soil collecting circuit 78 and fluid inlet conduit 84. The soil collector channel 132 communicates with the pump chamber 126 at a second pump outlet 133 which is spaced from the pump outlet 131, best shown in Fig. 5. The wall 128 also includes a wall section 134 which extends between the first pump outlet 131 and the second pump outlet 133, and is located beneath the passageway 124. Wall section 134 defines an arc having a radius of curvature which is less than that of the remainder of the wall 128.

As shown in Figs. 2, 3, and 5, a drain impeller, generally designated 138, is mounted within the pump chamber 126 on drive shaft 61 and is sized to provide a circular fluid passageway between the impeller and the circular wall 128. The impeller is positioned within the chamber 126 such that a constricted passageway is formed between the impeller and wall section 134 (best shown in Fig. 5) that is narrower in width than the remainder of the passageway about the impeller. As shown in Figs. 4a and 4b, the impeller 138 includes a disk-shaped base 139 having a plurality of upturned, overlapping members 140 formed about its periphery. Each member 140 is generally plate-shaped, and the members are alternately overlapping to form a continuous rim 141 without openings therethrough. The radially inner ones 142 of the upturned members 140 form an inner wall 143. The inner members 142 each include opposing, radially extending vertical surfaces 144, 145 whose radially inner edges 146, 147, respectively, form the cutting edges of the impeller 138.

Similarly, the radially outer ones 148 of the up-turned members 140 form an outer wall 149. Each outer member 148 includes opposing, radially extending vertical surfaces 150, 151 which act as the vanes of the impeller 138.

The base 139 of the impeller 138 includes a plurality of soil-sizing holes 152, which are spaced about the base in a circular pattern. As shown in Figs. 2, 4A, and 4B, the base 139 also includes breaker teeth 153, 154 which extend upwardly from the base and are located radially inwardly from the inner wall 143. The base 139 also includes a central hub 155 which is located concentrically with respect to the base and is shaped to fit over a water seal 156 carried by the output shaft 61 of the pump (shown in Fig. 2).

As best shown in Figs. 2 and 3, the pump chamber 126 is closed by a cover plate 157 which is mounted within a recess formed in the base plate 120 above the floor 129 of the pump chamber. The cover plate 157 includes a central orifice which defines the drain pump inlet 70. The cover plate 157 includes a downturned lip 158 which extends about the pump inlet 70 and is curved downward toward the base 139 of the impeller 138.

The downturned lip 158 is positioned to overlap the radially inward periphery of the inner wall 143 at an upper portion thereof. The gap formed between the outer circumferential periphery of the downturned lip 158 and the inner periphery of the inner wall 143 overlapped by the lip, and the gap formed between the upper surface of the inner wall and the adjacent surface of the underside of the cover plate together form a labyrinth seal which creates a tortuous path for fluid flowing between the downturned lip and the rim of the impeller. The gap formed can be as wide as 0.076 cm (0.030 inches) and still provide a seal which prevents food soil and other material suspended within the fluid in the region defined by the impeller base 139 and rim 141 from flowing through the gap.

The cover plate 157 also includes arms 159, 160 which extend over and close the drain channel 130 and extend over to define an opening in the soil collector channel 132, respectively. As shown in Figs. 2, 3 and 6, the cover plate 157 includes a stationary tooth 161 which is attached to and extends downwardly from the downturned lip 158. The stationary tooth 161 is curved to follow the arcuate contour of the downturned lip 158 in the section where it is attached. The tooth 161 includes a pair of opposing faces 162, 163. As shown in Fig. 2, the tooth 161 extends downwardly between the inner periphery of the inner wall 143 and the breaker tooth 153.

The space between the stationary tooth 161 and the inner members 142 is sufficiently small that rotation of the impeller 138 provides a shearing action between the cutting edges 146, 147 of the inner members 142 and the radially outer edges of the opposing faces 162, 163, respectively, of the stationary tooth. The stationary tooth 161 is

preferably of sufficient length, measured along a circumferential axis, to provide the necessary strength to enable the shearing action previously described to comminute hard objects such as seeds, toothpicks, and glass. In addition, the gap between the stationary tooth 161 and the breaker tooth 153 is sufficiently close so that the breaker tooth interacts with the stationary tooth to provide a shearing action which also comminutes hard objects such as those previously described. Breaker tooth 154, which extends upwardly from the base 139 of the impeller 138 through the inlet opening 70, acts during impeller rotation to knock objects into the inlet opening where they can be comminuted by the aforementioned shearing action.

The operation of the preferred embodiment of the invention is as follows. During a recirculating mode of operation of the dishwasher 50, the drive motor is activated to rotate the output shaft, and hence the impeller 126, in a counterclockwise direction as it is shown in Fig. 5. This causes the recirculating pump impeller to pump fluid from the sump 62 through the recirculating pump 72 and out the spray orifices in the primary spray arms 57.

The fluid leaving the spray arms 57 impinges upon the food ware carried in the upper and lower racks 51, 52 within the wash chamber 55, and dislodges food soil and other debris from the ware. The fluid and food soil then falls from the food ware into the sump 62 of the wash chamber 55. The concentration of food soil and other debris within the fluid contained in the sump 62 increases as a result of the accretion of food soil dislodged from the food ware within the wash chamber 55. However, the food soil within the washing fluid contained in the sump 62 is not permitted to enter the recirculating pump inlet 72 since the fluid entering the inlet is filtered through the main filter screen 74.

At the same time that the recirculating pump is performing its cleaning action upon the food ware, washing solution within the sump 62, and the food soil and other material suspended within it, flows from the sump through the passageway 124, over the cover plate 157, and through the drain pump inlet 70 into the drain pump chamber 126. The fluid flowing through the inlet 70 impinges upon the spinning base 139 of the rotating drain impeller 138 and is driven outwardly by the hydraulic force of fluid above it and the centrifugal force of rotation imparted to it from the base. The food soil and other material within the fluid encounters the shearing action of the inner edges 146 of the vertical surfaces 144 of the inner members 142, and the radially outer edges of the face 163 of the stationary tooth 161. In addition, elongate objects, such as toothpicks and small bones, are broken up by the coaction of the breaker tooth 153, stationary tooth 161, and the aforementioned cutting edges 146. The food soil is held within the food grinding region, defined by the base and rim of the impeller, and is

65

6

continuously subjected to the shearing action of the stationary tooth, inner members, and breaker tooth.

While this grinding or comminuting activity is occurring, wash fluid flows downwardly through the soil sizing holes 152 and, as a result of the centrifugal force of the spinning impeller 138, is thrown against the wall 128 of the pump chamber 126 where it is urged along the circular passageway by the vane-like surfaces 150 of the outer members 148 in a counterclockwise direction. This fluid is thus forced to flow along the wall 128 to the second pump outlet 133 and soil collector channel 132. Once the food soil and other material has been comminuted to a sufficiently small size, it, too, flows through the soil-sizing holes 152 and is carried with the washing solution through the second pump outlet 133 to flow upwardly through the fluid inlet conduit to be stored within the soil collecting chamber 100. Thus, the cupped shape of the impeller 138, which defines the food grinding region within the pump chamber 126 which is bounded by the base 139 and rim 141 of the impeller, holds food soil and other material and repeatedly grinds and shears it until reduced to particles of a size sufficiently small to pass through the soil sizing holes 152.

The wall section 134 which provides a relatively constricted section of the passageway between the first pump outlet 131 and the second pump outlet 133, creates a negative pressure area defined by the outer wall 149 of the impeller 138, the cover plate 157, and the floor 129, since the velocity of the fluid in this region is greater than for the rest of the passageway. This negative pressure area is upstream of and thus prevents fluid from flowing through the first pump outlet 131 and along the drain channel 130 during this mode of operation. The negative pressure area is downstream of, and hence does not impede the fluid flow to, the second pump outlet 133. There is no need for a valve mechanism to prevent fluid flow through the drain line 68 during the recirculating mode.

In the preferred embodiment, the wall section 134 is shaped to create several inches of negative pressure upstream of the opening of the first pump outlet 131. Should the mesh screen 86 (Fig. 2) become partially clogged with food soil, thereby creating a backpressure along the fluid inlet conduit 84 and soil collector channel 132 and reducing the negative head at the outlet 131, there will still be sufficient negative head at the outlet to prevent fluid from flowing to the drain line 68. However, since during the recirculating mode there usually is a negative pressure head sufficient to draw fluid out of the drain line 68 and into the pump chamber 126, the check valve 69 is employed to prevent reverse flow of fluid from the drain line back into the pump chamber.

As the impeller 128 is rotated in a counterclockwise direction, it is the surfaces 150 of the outer members 148 which act as impeller vanes, urging the fluid to flow in a counterclockwise direction. During this mode of rotation the surfaces 151 do

not act upon the fluid in the chamber 126. Similarly, the inner cutting edges 146 are interacting with the stationary tooth 161 during this mode of operation, while the cutting edges 147 of the inner members 142 are inactive.

After the dishwashing machine 50 has completed its fluid recirculating mode of operation, it commences a fluid draining mode of operation. The drive motor 59 reverses its rotation of the drive shaft 61 so that the recirculating pump impeller 60 and the drain impeller 138 rotate in a clockwise direction as viewed in Fig. 5. The recirculating pump impeller 60 is shaped so that it does not pump fluid to the spray arms 57 during this mode.

However, clockwise rotation of the drain pump impeller 138 causes the fluid to rotate in an opposite sense within the pump chamber 126 than during the recirculating mode. In the draining mode of operation the comminuting function continues, but the shearing action is between the cutting edges 147 of the inner members 142 and the radially outer portion of the opposing face 162 of the stationary tooth 161. The cutting edges 146 and the opposing face 163 are inactive during this mode of operation.

Similarly, the surfaces 151 of the outer members 148 act as impeller vanes to urge the fluid within the circular passageway within the pump chamber 126 in a clockwise direction. The constriction between the outer periphery of the impeller 138 and the wall section 134, which now is upstream of second pump outlet 133 and downstream of first pump outlet 131, creates a negative pressure area which causes fluid to flow through the first pump outlet 131 and along the drain channel 130, and prevents fluid flow into the second pump outlet 133 and soil collector channel 132. Since the recirculating pump impeller 60 is no longer pumping wash fluid onto the food ware, most of the wash fluid is in the sump 62, where it drains through the passageway 124 to the drain pump 66. The soil collector chamber 100, having been filled with food soil during the recirculating mode, is now drained of its contents since wash fluid is not being pumped through the fluid inlet conduit 84. Now, the contents flow from the chamber 100 to the collector channel 132, where it is pumped around the pump chamber 126 in the drain channel 130. Thus, clockwise rotation of the impeller 138 causes the comminuted food soil and other material, and the accompanying washing fluid, to flow to the drain line 68.

Although in the preferred embodiment of the invention the pump chamber 126 defines two pump outlets 131, 133, the drain pump and grinder 66 can function effectively in a dishwasher having but one pump outlet from its drain pump chamber to a drain line. With such an embodiment, a pump chamber would not need a side wall having a section forming a constriction in the fluid path about the periphery of the impeller, but the drain line could employ a mechanical drain valve to selectively permit fluid flow from the pump chamber through the drain line.

With such an embodiment, a single direction pump motor could be used. Alternatively, the drain pump and grinder of the invention could be utilized with a single outlet pump chamber and driven by a reversible motor. In such an embodiment, if the configuration of the drain pump chamber was that of the preferred embodiment (with a constricted section 134 shown in Fig. 5) rotation of the impeller would pump fluid to the single drain in one direction of rotation, and prevent fluid flow to the drain line opening when rotated in an opposite direction, thus acting as a drain valve. However, a check valve would be needed for reasons previously discussed.

The combination drain pump and grinding apparatus of the preferred embodiment can be made from any materials which are sufficiently strong and can withstand contact with water and cleaning agents. However, the stationary tooth 161 and the drain impeller 138 preferably are made of stainless steel to provide the necessary strength and resistance to corrosion required for long life. The lower housing base plate 120 may be made from any hardened material, but preferably is made from a cast phenolic. Many types of thermoplastics can also be used.

The combination drain pump and grinding apparatus herein described and illustrated operates effectively as a pump while at the same time comminuting food soil particles and other material to a size sufficiently small to reduce substantially the likelihood of it clogging the conduits which receive the fluid pumped from the assembly. In addition, the combination pump and grinding apparatus is capable of shearing and reducing stringy objects and cigarette filters as well as relatively hard materials such as toothpicks, seeds, small bones, and bits of glass without damage to the components of the assembly. Furthermore, the apparatus retains food soil and other particles in the grinding area of the impeller until sufficiently reduced in size to pass through sizing holes, thus controlling the size of the particles passing through the pump. The assembly is also much less complicated in structure than prior art devices having similar capabilities with machined parts and is designed to utilize stamped, loosely toleranced parts. Therefore, the assembly is relatively less expensive to fabricate and assemble than those prior art devices having machined parts, yet is as efficient.

Claims

1. A dishwasher (50) having a wash chamber (55) and a sump (62) at the bottom of said chamber for containing wash fluid therein; primary spray means (56, 57) for recirculating and spraying wash fluid onto food ware in said wash chamber; a drain system communicating with a drain line (68) and including a drain pump (66) and a drain pump inlet (70) communicating with said sump; a housing (64) having a circular wall (128) and a floor (129) defining a pump chamber (126); means (157) defining said inlet (70) above

said chamber; said housing having a pump outlet (131) extending through said side wall and communicating with said chamber and said drain line; a waste impeller (138) positioned within said chamber; means (61) for mounting said impeller for rotation about a vertical axis; and means (59) associated with said mounting means for rotating said impeller; characterized by:

said impeller having a disk-shaped base (139) substantially parallel to and spaced above said floor, said base including a plurality of soil-sizing orifices (152) therethrough, an upstanding rim (141) extending about a periphery of said base and including an inner wall (143) having a plurality of radially-extending, substantially vertical cutting edges (146, 147) and an outer wall having a plurality of radially-extending, substantially vertical pumping vanes (150, 151), and a first breaker tooth (153) extending upwardly from said base and positioned inwardly of said rim; and

a stationary tooth (161) having a vertical cutting edge (162, 163) extending downwardly adjacent said inner wall such that rotation of said impeller causes said stationary tooth to pass between said inner wall and said breaker tooth such that said cutting edges come into opposing close proximity to said cutting edge of said tooth.

2. A dishwasher as claimed in claim 1 wherein said rim (141) comprises a plurality of inner and outer members (142, 148) arranged in a continuous, overlapping fashion, each member having a pair of substantially vertically disposed, longitudinal surfaces (144, 145, 150, 151) such that said surfaces of said inner members include said cutting edges (146, 147), and said surfaces of said outer members comprise said vanes (150, 151); and

said stationary tooth (161) includes a pair of opposing faces (162, 163) which define said cutting edge such that said impeller (138) may perform a food soil grinding and pumping function when rotated in either direction by said rotating means.

3. A dishwasher as claimed in claims 1 or 2 further characterized by a second breaker tooth (154) extending upwardly from said base (139) and positioned radially inwardly from said first breaker tooth (153) such that said second tooth extends into said inlet (70) so that objects extending into said opening above said chamber (126) may be dislodged by said second tooth to fall through said inlet.

4. A dishwasher as claimed in claims 1, 2, or 3 wherein said circular wall (128) includes a substantially circular contour (134) having a minimum clearance with said impeller (138) adjacent a downstream side of said outlet (131), and a maximum clearance (134) with said impeller adjacent an upstream side of said outlet.

5. A dishwasher as claimed in claims 1, 2, 3 or 4 wherein said means defining said inlet comprises a cover plate (157) positioned over said chamber (126) and including an orifice, concentric with said impeller (138), forming said inlet (70), said cover plate having a downturned lip (158) extending

about said inlet and positioned adjacent said inner wall (143) of said rim (141) thereby forming a labyrinth seal therewith, said lip supporting said stationary tooth (161).

6. A dishwasher as claimed in claims 1, 2, 3, 4 or 5 further characterized by said housing means including a second pump outlet (133) extending through said circular wall (128) communicating with said chamber (126) and spaced from said pump outlet (131); and

means (59) for rotating said impeller in either a forward or a reverse direction, said rotating means driving said mounting means (61).

7. A dishwasher as claimed in claim 6 further comprising conduit means (78) communicating with said second outlet (133) and with soil collecting means (102, 104).

Revendications

1. Lave-vaisselle (50) comprenant une cuve de lavage (55) et un fond de cuve (62) à la partie inférieure de ladite cuve destiné à recevoir le fluide de lavage; un dispositif de pulvérisation primaire (56, 57) permettant de recirculer et de pulvériser le fluide de lavage sur la vaisselle dans ladite cuve; un circuit de vidange relié à une tuyauterie de vidange (68) et comportant une pompe de vidange (66) dont l'orifice d'entrée (70) communique avec ledit fond de cuve; un carter (64) constitué d'une paroi circulaire (128) et d'un fond (129) définissant une chambre de pompe (126); un dispositif (157) définissant ladite entrée de pompe (70) au-dessus de ladite chambre; ledit carter comportant un orifice de sortie de pompe (131) traversant ladite paroi latérale et communiquant avec ladite chambre et ladite tuyauterie de vidange; une couronne d'évacuation (138) montée à l'intérieur de ladite chambre; un dispositif (61) de montage de ladite couronne en rotation autour d'un axe vertical; et un dispositif (59) lié audit dispositif de montage entraînant ladite couronne en rotation; caractérisé en ce que:

— ladite couronne présente une base en forme de disque (139) sensiblement parallèle audit fond de carter et à une certaine distance au-dessus de celui-ci,

— ladite base étant percée d'une pluralité d'orifices permettant de calibrer les déchets (152), un rebord vertical (141) à la périphérie de ladite base comportant une paroi interne (143) munie d'une pluralité de bords tranchants sensiblement verticaux et orientés radialement (146, 147), une paroi externe munie d'une pluralité d'ailettes d'aspiration (150, 151) sensiblement verticales et orientées radialement, et une première dent broyeuse (153) partant de la base vers le haut et située du côté interne dudit rebord; et une dent fixe (161) avec un bord tranchant vertical (162, 163) dirigée vers le bas et adjacente à ladite paroi interne de sorte que la rotation de ladite couronne entraîne ladite dent fixe entre ladite paroi interne et ladite dent broyeuse et que les bords tranchants se rapprochent et viennent se placer en face dudit bord

tranchant de ladite dent.

2. Lave-vaisselle selon la revendication 1, caractérisé en ce que ledit rebord (141) comporte une pluralité de pièces internes et externes (142, 148) se chevauchant de façon continue, chaque pièce consistant en deux surfaces longitudinales (144, 145, 150, 151) sensiblement verticales, de sorte que lesdites surfaces desdites pièces internes constituent lesdits bords tranchants (146, 147) et que lesdites surfaces desdites pièces externes constituent lesdites ailettes (150, 151); et dont ladite dent fixe (161) comporte deux faces opposées (162, 163) définissant ledit bord tranchant de sorte que ladite couronne (138) puisse remplir une double fonction de broyage des déchets alimentaires et de pompage du fluide lorsqu'elle est actionnée dans un sens ou dans le sens inverse par ledit dispositif de rotation.

3. Lave-vaisselle selon les revendications 1 ou 2, caractérisé en outre par une seconde dent broyeuse (154) partant de ladite base (139) vers le haut et orientée radialement du côté interne de ladite première dent broyeuse (153) de sorte que ladite seconde dent passe dans ledit orifice d'entrée (70) pour pouvoir délonger tout objet ayant pénétré dans ledit orifice au-dessus de ladite chambre (126) et le faire retomber par ledit orifice d'entrée.

4. Lave-vaisselle selon les revendications 1, 2 ou 3, caractérisé en ce que la partie circulaire (128) est constituée d'une paroi sensiblement circulaire (134) dont le jeu par rapport à ladite couronne (138) est minimal du côté aval dudit orifice (131) et maximal (134) du côté amont dudit orifice.

5. Lave-vaisselle selon les revendications 1, 2, 3 ou 4, caractérisé en ce que ledit dispositif définissant ledit orifice d'entrée comporte un couvercle (157) monté au-dessus de ladite chambre (126) et percé d'un orifice, concentrique avec ladite couronne (138), formant ledit orifice d'entrée (70) ledit couvercle présentant une lèvre retournée vers le bas (158) sur le pourtour dudit orifice d'entrée et adjacente à ladite paroi interne (143) dudit rebord (141) pour former avec celui-ci un labyrinthe étanche, ladite lèvre supportant ladite dent fixe (161).

6. Lave-vaisselle selon les revendications 1, 2, 3, 4 ou 5 caractérisé en outre en ce que ledit carter comporte un deuxième orifice de sortie (133) traversant ladite paroi circulaire (128) et communiquant avec ladite chambre (126), situé à une certaine distance dudit orifice de sortie de pompe (131); et en ce que le dispositif (59) actionnant ladite couronne vers l'avant ou en sens inverse entraîne ledit dispositif de montage (61).

7. Lave-vaisselle selon la revendication 6, comprenant en outre un conduit (78) communiquant avec ledit deuxième orifice (133) et avec le dispositif collecteur des déchets (102, 104).

Patentansprüche

1. Spülmaschine (50) mit einer Spülkammer (55) und einem Sumpf (62) am Boden der Kam-

mer für die Aufnahme eines Spülfleißmittels; ersten Sprühmitteln (56, 57) für das Umwälzen und Sprühen von Spülfleißmittel auf das Eßgeschirr in der Spülkammer; einem Entleerungssystem, welches mit einer Entleerungsleitung (68) in Verbindung steht und eine Entleerungspumpe (66) sowie einen Entleerungspumpeneinlaß (70) aufweist, der mit der Pumpe in Verbindung steht; einem Gehäuse (64) mit einer Kreiswand (128) und einem Boden (129) unter Bildung einer Pumpenkammer (126); Mitteln (157) zur Bildung des Einlasses (70) über der Kammer; wobei das Gehäuse einen Pumpenauslaß (131) hat, der sich durch die Seitenwand erstreckt und mit der Kammer sowie der Entleerungsleitung in Verbindung steht; einem innerhalb der Kammer angeordneten Abfallaufrad (138); Mitteln (61) zur Befestigung des Laufrades für die Drehung um eine Vertikalachse; und Mitteln (59), welche den Befestigungsmitteln für die Drehung des Laufrades zugeordnet sind; dadurch gekennzeichnet, daß das Laufrad eine scheibenförmige Basis (139) hat, die im wesentlichen parallel zum Boden ist und im Abstand über diesem angeordnet ist, daß die Basis eine Mehrzahl von Schmutzsieboöffnungen (152), einen hochstehenden Rand (141), welcher sich um den Umfang der Basis erstreckt, und eine Innenwand (143) mit einer Mehrzahl von sich radial erstreckenden, im wesentlichen vertikalen Schneidkanten (146, 147) und eine Außenwand aufweist mit einer Mehrzahl von sich radial erstreckenden, im wesentlichen vertikalen Pumpenschaufeln (150, 151) und einen ersten Brechzahn (153) aufweist, der sich von der Basis nach oben erstreckt und innerhalb des Randes angeordnet ist; und

daß ein stationärer Zahn (161) eine vertikale Schneidkante (162, 163) aufweist, die sich neben der Innenwand derart nach unten erstreckt, daß die Drehung des Laufrades den stationären Zahn veranlaßt, zwischen der Innenwand und dem Brechzahn derart hindurchzugehen, daß die Schneidkanten in gegenüberliegende dichte Nachbarschaft zu der Schneidkante des Zahnes kommen.

2. Spülmaschine nach Anspruch 1, wobei der Rand (141) eine Mehrzahl von inneren und äußeren Teilen (142, 148) aufweist, die in fortlaufender, überlappender Weise angeordnet sind, wobei jedes Teil ein Paar von im wesentlichen vertikal angeordneten, länglichen Oberflächen (144, 145, 150, 151) derart aufweist, daß die Oberflächen der

inneren Teile die Schneidkanten (146, 147) aufweisen und die Oberflächen der äußeren Teile die Schaufeln (150, 151) aufweisen; und

der stationäre Zahn (161) ein Paar von gegenüberliegenden Flächen (162, 163) aufweist, welche die Schneidkante derart bilden, daß das Laufrad (138) eine Speiseschmutzzerkleinerungs- und Pumpfunktion durchführt, wenn es durch die Drehmittel in irgendeiner Richtung gedreht wird.

3. Spülmaschine nach Anspruch 1 oder 2, gekennzeichnet ferner durch einen zweiten Brechzahn (154), der sich von der Basis (139) nach oben erstreckt und radial einwärts von dem ersten Brechzahn (153) derart angeordnet ist, daß sich der zweite Zahn in den Einlaß (70) hinein so erstreckt, daß sich in die Öffnung über der Kammer (126) erstreckende Gegenstände durch den zweiten Zahn verdrängt bzw. entfernt werden, um durch den Einlaß hindurch zu fallen.

4. Spülmaschine nach Anspruch 1, 2 oder 3, wobei die Kreiswand (128) eine im wesentlichen kreisförmige Kontur (134) mit minimalem Spiel mit dem Laufrad (138) neben einer abstromigen Seite des Auslasses (131) hat und ein maximales Spiel (134) mit dem Laufrad neben einer aufstromigen Seite des Auslasses hat.

5. Spülmaschine nach Anspruch 1, 2, 3 oder 4, wobei die Mittel zur Bildung des Einlasses eine Abdeckplatte (157) aufweisen, die über der Kammer (126) angeordnet ist und eine Öffnung konzentrisch zum Laufrad (138) aufweist, unter Bildung des Einlasses (70), wobei die Abdeckplatte eine nach unten gekehrte Lippe (158) aufweist, die sich um den Einlaß erstreckt und neben der Innenwand (143) des Randes (141) angeordnet ist, wodurch eine Labyrinthdichtung damit gebildet wird, wobei die Lippe den stationären Zahn (161) abstützt.

6. Spülmaschine nach Anspruch 1, 2, 3, 4 oder 5, ferner gekennzeichnet durch Gehäusemittel mit einem zweiten Pumpenauslaß (131), der sich durch die Kreiswand (128) in Fließverbindung mit der Kammer (126) und in Abstand vom Pumpenauslaß (131) erstreckt; und

Mitteln (59) für das Drehen des Laufrades in entweder einer Vorwärts- oder einer Rückwärtsrichtung, wobei die Drehmittel die Befestigungsmittel (61) antreiben.

7. Spülmaschine nach Anspruch 6, ferner mit Leitungsmitteln (78), die mit dem zweiten Auslaß (131) und mit Schmutzsammelmitteln (102, 104) in Verbindung stehen.

55

60

65

10

FIG-1

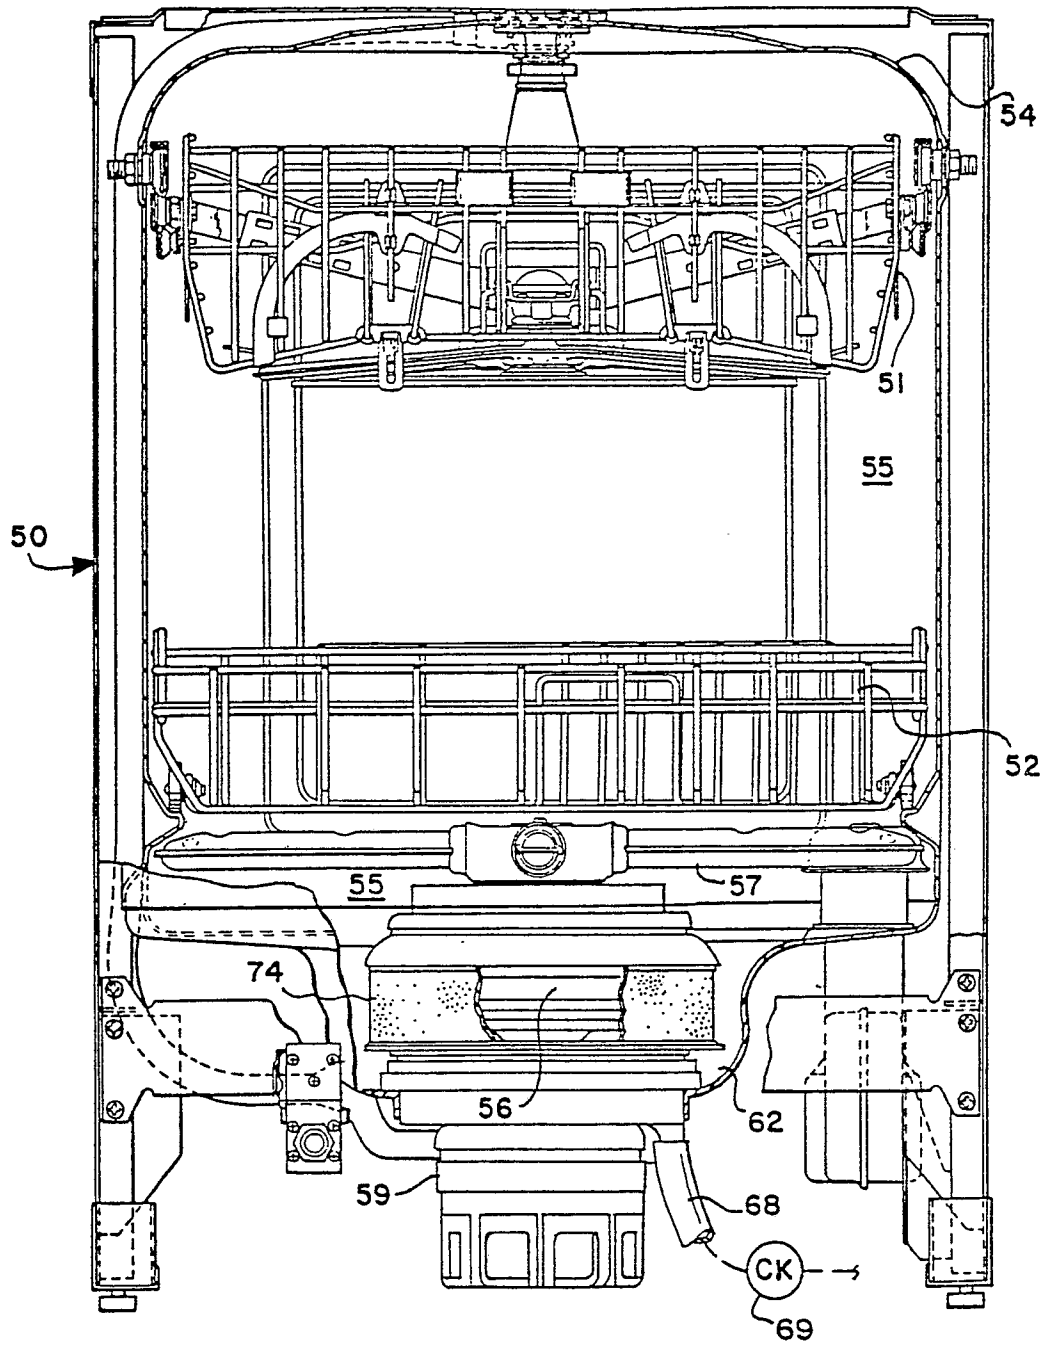


FIG-3

