



(51) International Patent Classification:

C23C 30/00 (2006.01) C23C 16/36 (2006.01)

C23C 28/04 (2006.01) C23C 16/52 (2006.01)

C23C 16/34 (2006.01)

(21) International Application Number:

PCT/EP2022/060698

(22) International Filing Date:

22 April 2022 (22.04.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

21170080.2 23 April 2021 (23.04.2021) EP

(71) Applicant: AB SANDVIK COROMANT [SE/SE];

Mossvägen 10, 811 81 SANDVIKEN (SE).

(72) Inventors: MORJAN BRENNING, Raluca; Mossvä-

gen 10, 811 Sandviken (SE). VON FIEANDT, Linus;

Mossvägen 10, 811 81 Sandviken (SE). ENGQVIST, Jan;

Mossvägen 10, 811 81 Sandviken (SE).

(74) Agent: SANDVIK; Sandvik Intellectual Property AB, 811

81 SANDVIKEN (SE).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH,

KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,

MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,

NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,

RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM,

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM,

ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: A CUTTING TOOL

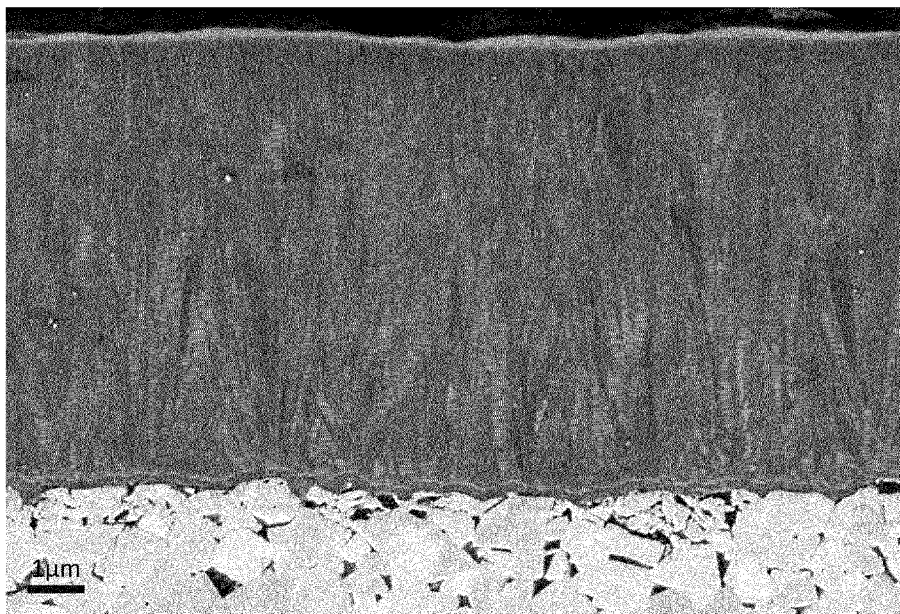


Fig. 1

(57) Abstract: The present invention relates to a cutting tool for metal cutting, wherein said cutting tool comprise a substrate at least partially coated with a 3-30 μm coating, said substrate is of cemented carbide, cermet or ceramic, said coating comprise one or more layers, wherein at least one layer is a Ti(C,N) layer with a thickness of 3-25 μm , wherein said Ti(C,N) layer being composed of columnar grains with mean grain size ≥ 25 nm and ≤ 35 nm.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

A CUTTING TOOL

TECHNICAL FIELD

The present invention relates to a coated cutting tool comprising a substrate and a coating, wherein the coating comprises a Ti(C,N) layer with an average grain size between 25 nm
5 and 35 nm.

BACKGROUND

In the technical area of cutting tools for metal machining, the usage of CVD coatings is a well-known method to enhance the wear resistance of the tools. CVD coatings of ceramic materials such as TiN, TiC, Ti(C,N) and Al₂O₃ are commonly used.

10 EP2791387 discloses a coated cutting tool provided with a fine-grained titanium carbonitride layer. The coating is advantageous in showing high resistance to flaking in turning of nodular cast iron and in high speed cutting. A columnar MTCVD Ti(C,N) layer is described with an average grain width of 0.05-0.4 μm.

There is a continuous need of finding cutting tool coatings that can prolong the lifetime of
15 the cutting tool and/or that can withstand higher cutting speeds than the known cutting tool coatings.

SUMMARY OF THE INVENTION

One object of the present invention is to provide a coated cutting tool with improved resistance to wear in metal cutting applications. A further object is to improve its resistance
20 in turning operations, especially in turning of steel and hardened steel. It is a further object to provide a wear resistant coating that provides a high crater and flank wear resistance in turning of steel and hardened steel.

At least one of these objects is achieved with a coated cutting tool according to claim 1.

Preferred embodiments are listed in the dependent claims.

25 The present disclosure relates to a cutting tool for metal cutting, wherein said cutting tool comprise a substrate at least partially coated with a 3-30 μm coating, said substrate is of cemented carbide, cermet or ceramic, said coating comprise one or more layers, wherein at least one layer is a Ti(C,N) layer with a thickness of 3-25 μm, wherein said Ti(C,N) layer being composed of columnar grains wherein the average grain size D₄₂₂ of the Ti(C,N)

layer, as measured with X-ray diffraction with CuK α radiation, the grain size D_{422} is calculated from the full width at half maximum (FWHM) of the (422) peak according to Scherrer's equation:

$$D_{422} = \frac{K\lambda}{B_{422}\cos\theta}$$

- 5 wherein D_{422} is the mean grain size of the Ti(C,N) grains in the Ti(C,N) layer, K is the shape factor here set at 0.9, λ is the wavelength for the CuK α_1 radiation here set at 1.5405 Å, B_{422} is the FWHM value for the (422) reflection and θ is the Bragg angle, wherein D_{422} is ≥ 25 nm and ≤ 35 nm.

10 It has surprisingly been found that a cutting tool provided with a very fine grained Ti(C,N) layer shows a very high resistance to wear when used in metal cutting applications such as turning in high alloyed steel. It is believed that the combination of a crystallinity and columnar grains with a high amount of grain boundaries contributes to the high wear resistance.

15 In one embodiment of the present invention said at least one Ti(C,N) layer exhibits an X-ray diffraction pattern, as measured using CuK α radiation and θ -2 θ scan, wherein the TC(hkl) is defined according to Harris formula:

$$TC(hkl) = \frac{I(hkl)}{I_0(hkl)} \left[\frac{1}{n} \sum_{n=1}^n \frac{I(hkl)}{I_0(hkl)} \right]^{-1}$$

20 where $I(hkl)$ is the measured intensity (integrated area) of the (hkl) reflection, $I_0(hkl)$ is the standard intensity according to ICDD's PDF-card No. 42-1489, n is the number of reflections, reflections used in the calculation are (1 1 1), (2 0 0), (2 2 0), (3 1 1), (3 3 1), (4 2 0) and (4 2 2), wherein $TC(422) \geq 3$.

In one embodiment of the present invention the said at least one Ti(C,N) layer is 6-25 μ m in thickness and exhibits an X-ray diffraction pattern, wherein $TC(422) \geq 4$.

25 In one embodiment of the present invention the said at least one Ti(C,N) layer is 4.5-25 μ m in thickness and exhibits an X-ray diffraction pattern, wherein $TC(422)$ is the highest and $TC(311)$ is the second highest. In one embodiment of the present invention the ratio C/(C+N) in the Ti(C,N) layer is 50% to 70%, preferably 55% to 65%. This composition is advantageous in that this Ti(C,N) layer shows a high chemical stability.

In one embodiment of the present invention the coating comprises an innermost layer of TiN.

In one embodiment of the present invention the Ti(C,N) layer is the outermost layer of the coating.

- 5 The present invention also relates to the use of the cutting tools described above in metal cutting.

In one embodiment of the present invention the cutting tool is used in metal cutting in high alloyed steel, hardened steel, cast iron or stainless steel, preferably used in metal cutting in high alloyed steel.

- 10 In one embodiment of the present invention the cutting tool is a drill, a milling insert or a turning insert, preferably a turning insert.

The coated cutting tools described herein can be subjected to post-treatments such as blasting, brushing or shot peening in any combination. A blasting post-treatment can be wet blasting or dry blasting for example using alumina particles.

- 15 Still other objects and features of the present invention will become apparent from the following definitions and examples considered in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

- 20 Embodiments of the invention will be described with reference to the accompanying drawings, wherein:

Figure 1 shows a Scanning Electron Microscope (SEM) image of a cross section of an example of the inventive coating, sample A.

Figure 2 shows a Scanning Electron Microscope (SEM) image of a cross section of an example of a reference coating, sample B.

- 25 Figure 3 shows a Scanning Electron Microscope (SEM) image of a cross section of an example of a reference coating, sample C.

Figure 4 shows a Scanning Electron Microscope (SEM) image of the outer surface of an example of the inventive coating, sample A.

Figure 5 shows a Scanning Electron Microscope (SEM) image of the outer surface of an example of a reference coating, sample B.

Figure 6 shows a Scanning Electron Microscope (SEM) image of the outer surface of an example of a reference coating, sample C.

5 Fig. 7 shows a TKD (Transmission Kikuchi Diffraction) map of a plane view in the Ti(C,N) layer of sample A. The plane view is of a distance of about 6 μm from the substrate-coating interface.

Fig. 8 shows a TKD (Transmission Kikuchi Diffraction) map of a plane view in the Ti(C,N) layer of sample B. The plane view is of a distance of about 6 μm from the substrate-coating
10 interface.

Fig. 9 shows a TKD (Transmission Kikuchi Diffraction) map of a plane view in the Ti(C,N) layer of sample C. The plane view is of a distance of about 6 μm from the substrate-coating interface.

Fig. 10 shows a bright field image from a Transmission Electron Microscope (TEM) analysis
15 of a plane view in the Ti(C,N) layer of sample A. The plane view is of a distance of about 6 μm from the substrate-coating interface.

Fig. 11 shows a bright field image from a Transmission Electron Microscope (TEM) analysis of a plane view in the Ti(C,N) layer of sample B. The plane view is of a distance of about 6 μm from the substrate-coating interface.

20 Fig. 12 shows a bright field image from a Transmission Electron Microscope (TEM) analysis of a plane view in the Ti(C,N) layer of sample C. The plane view is of a distance of about 6 μm from the substrate-coating interface.

DEFINITIONS

The term "cutting tool" is herein intended to denote cutting tools suitable for metal cutting
25 applications such as inserts, end mills or drills. The application areas can for example be turning, milling or drilling in metals such as steel.

METHODS

XRD

In order to investigate the texture or orientation of the layer(s) and also the average grain size, X-ray diffraction (XRD) was conducted on the flank face using a PANalytical CubiX3 diffractometer equipped with a PIXcel detector. The coated cutting tools were mounted in sample holders to ensure that the flank face of the samples are parallel to the reference surface of the sample holder and also that the flank face is at appropriate height. Cu-K α radiation was used for the measurements, with a voltage of 45 kV and a current of 40 mA. Anti-scatter slit of 1/2 degree and divergence slit of 1/4 degree were used. The diffracted intensity from the coated cutting tool was measured in the 2 θ range 20° to 140°, i.e. over an incident angle θ range from 10 to 70°. The data analysis, including background fitting, Cu-K α_2 stripping and profile fitting of the data, was done using PANalytical's X'Pert HighScore Plus software.

The integrated peak full width at half maximum for the profile fitted curve achieved from PANalytical's X'Pert HighScore Plus software was used to calculate the grain size of the layer according to the Scherrer equation (Eq1) (Birkholz, 2006).

The average grain size D_{422} is calculated from the full width at half maximum (FWHM) of the (422) peak according to Scherrer's equation:

$$D_{422} = \frac{K\lambda}{B_{422}\cos\theta}$$

wherein D_{422} is the mean grain size of the Ti(C,N), K is the shape factor here set at 0.9, λ is the wave length for the CuK α_1 radiation here set at 1.5405 Å, B is the FWHM value for the (422) reflection and θ is the Bragg angle i.e the incident angle.

β is the line broadening (in radians) at FWHM after subtracting the instrumental broadening (0,00174533 radians), θ is the incident angle. For the calculation of the broadening with subtraction of the instrumental broadening, a Gaussian approximation was used (Eq2)(Birkholz, 2006):

$$\beta = \sqrt{((FWHM_{obs})^2 - (FWHM_{ins})^2)}$$

Where β is the real broadening (in radians) used for the grain size calculation, $FWHM_{obs}$ is the measured broadening (in radians), $FWHM_{ins}$ is the instrumental broadening (in radians).

The texture or orientation of the layer(s) was defined based on the X-ray diffraction pattern, measured using CuK α radiation and θ -2 θ scan, wherein the TC(hkl) was defined according to Harris formula:

$$TC(hkl) = \frac{I(hkl)}{I_0(hkl)} \left[\frac{1}{n} \sum_{n=1}^n \frac{I(hkl)}{I_0(hkl)} \right]^{-1}$$

where $I(hkl)$ is the measured intensity (integrated area) of the (hkl) reflection, $I_0(hkl)$ is the standard intensity according to ICDD's PDF-card No. 42-1489, n is the number of reflections, reflections used in the calculation are $(1\ 1\ 1)$, $(2\ 0\ 0)$, $(2\ 2\ 0)$, $(3\ 1\ 1)$, $(3\ 3\ 1)$, $(4\ 2\ 0)$ and $(4\ 2\ 2)$.

Since possible further layers above the Ti(C,N)-layer will affect the X-ray intensities entering the Ti(C,N)-layer and exiting the whole coating, corrections need to be made for these, taken into account the linear absorption coefficient for the respective compound in a layer. Alternatively, a further layer, above the Ti(C,N)-single-layer can be removed by a method that does not substantially influence the XRD measurement results, e.g. chemical etching.

It is to be noted that peak overlap is a phenomenon that can occur in X-ray diffraction analysis of coatings comprising for example several crystalline layers and/or that are deposited on a substrate comprising crystalline phases, and this has to be considered and compensated for by the skilled person. It is also to be noted that for example WC in the substrate can have diffraction peaks close to the relevant peaks of the present invention.

Elemental analysis is performed by electron microprobe analysis using a JEOL electron microprobe JXA-8530F equipped with wavelength dispersive spectrometer (WDS) in order to determine C/(C+N) ratio of the Ti(C,N) layers presented in Figure 1, 2 and 3. The analysis of the Ti(C,N) layers was conducted on polished cross section on the rake face. For each type of Ti(C,N) layer 3 samples were analyzed in 10 points with a spacing of 50 μm along a straight line parallel to the substrate surface at a distance of 4-6 μm from the interface between the substrate and the TiN layer. The data was acquired using 10kV, 29nA and a Ti(C,N) reference with a composition of 10.22 wt% C, 10.68 wt% N, 78.86 wt% Ti and 0.24 wt% O.

EXAMPLES

Exemplifying embodiments of the present invention will now be disclosed in more detail and compared to reference embodiments. Coated cutting tools (inserts) were manufactured, analyzed and evaluated in cutting tests.

Cemented carbide substrates were manufactured utilizing conventional processes including milling, mixing, spray drying, pressing and sintering. The sintered substrates were CVD coated in a radial CVD reactor of Ionbond Type size 530 capable of housing 10.000 half inch size cutting inserts. The substrates were placed on the plates and the samples to be tested and analysed further were selected from the middle of the chamber and at a position along half the radius of the plate. The ISO-type geometry of the cemented carbide substrates (inserts) were CNMG-120408-PM. The composition of the cemented carbide was 7.2 wt% Co, 2.9 wt% TaC, 0.5 wt% NbC, 1.9 wt%TiC, 0.4 wt% TiN and the rest WC.

CVD depositions

10 A first innermost coating of about 0.2 μm TiN was deposited on all substrates in a process at 400 mbar and 885 °C. A gas mixture of 48.8 vol% H₂, 48.8 vol% N₂ and 2.4 vol% TiCl₄ was used. Thereafter the Ti(C,N) layers were deposited as disclosed below.

On the sample A the Ti(C,N) layer was deposited in one step at 80 mbar at 870°C in a gas mixture of 2.95 vol% TiCl₄, 0.45 vol% CH₃CN and balance H₂.

15 On the sample B the Ti(C,N) layer was deposited in one step at 80 mbar at 830°C in a gas mixture of 2.95 vol% TiCl₄, 0.45 vol% CH₃CN and balance H₂.

On the sample C the Ti(C,N) layer was deposited in two steps, an inner Ti(C,N) and an outer Ti(C,N). The inner Ti(C,N) was deposited for 10 minutes at 55 mbar at 885°C in a gas mixture of 3.0 vol% TiCl₄, 0.45 vol% CH₃CN, 37.6 vol% N₂ and balance H₂. The outer
 20 Ti(C,N) was deposited at 55 mbar at 885°C in a gas mixture of 7.8 vol% N₂, 7.8 vol% HCl, 2.4 vol% TiCl₄, 0.65 vol% CH₃CN and balance H₂.

Coating analysis

The layer thicknesses were measured on the rake face of the cutting tool samples using light optical microscope. The layer thicknesses of the coating the samples A-C are shown
 25 in Table 1.

Table 1. Layer thicknesses

Sample	Layer thickness TiN	Layer thickness Ti(C,N)
	[μm]	[μm]

A	0.2	9.3
B	0.2	8.3
C	0.2	9.0

The grain size of the Ti(C,N) layers were analysed with X-ray diffraction analysing the 422 peak as disclosed above. The ratios C/(C+N) of the Ti(C,N) layers were analysed using electron microprobe analysis as disclosed above. The resulting grain sizes and carbon contents for the samples A, B and C are presented in Table 2.

Table 2. Grain sizes and carbon contents

Sample	Grain size [nm]	C/(C+N) ratio in Ti(C,N)
A	33	60.3%
B	37	59.5%
C	>67*	55.8%

* not correct to use Scherrer since absence of peak widening caused by small grain size

The orientation of the Ti(C,N) layers were analysed using X-ray diffraction as disclosed above. The results are presented in Table 3.

10 Table 3. Texture coefficients

Sample	TC(111)	TC(200)	TC(220)	TC(311)	TC(331)	TC(420)	TC(422)
A	0.31	0.01	0.20	1.58	0.64	0.18	4.08
B	0.38	0.01	0.06	1.71	0.37	0.14	4.33
C	0.41	0.01	0.07	1.98	0.41	0.16	3.96

The grain size of the Ti(C,N) in the samples were also studied via TEM images of a plane view of the Ti(C,N) layer. Cross-sections of each sample were first prepared by cutting the insert in the middle and thereafter polishing the cross-sections. FIB (focused ion beam) lamellae were then taken from the Ti(C,N) coating parallel to the substrate surface, at about 6 μm from the coating-substrate interface using a lift-out technique. The lamellae were thinned using an ion beam until electron transparency was achieved. Bright-field scanning TEM images were acquired on a ThermoFisherScientific Titan transmission electron microscope operated at 300 kV. TKD (transmission Kikuchi diffraction) maps were collected with an Oxford Aztec system installed on a ThermoFisherScientific Helios FIB-SEM. The IPF (inverse pole figure) maps with grain boundary overlay were produced with AztecCrystal software. The bright field images are shown in Fig- 10-12. The TKD images are shown in Fig. 7-9. It can be seen that there is a distribution in grain size in all samples. It can also seen that the Ti(C,N) in sample A shows smaller grains than the Ti(C,N) in sample B.

Cutting test 1

The cutting tools were tested in a longitudinal turning operation in a work piece material of SS2310, a high alloyed steel. The cutting speed, V_c , was 125 m/min, the feed, f_n , was 0.072mm/revolution, the depth of cut, a_p , was 2 mm and water miscible cutting fluid was used. The machining was continued until the end of life time criterion was reached. One cutting edge per cutting tool was evaluated.

The tool life criterion was set to: for the primary or secondary flank wear >0.3 mm or for the crater area > 0.2 mm². As soon as any of these criteria were met the lifetime of the sample was considered reached. The result of the cutting test is presented in Table 4.

Table 4. Cutting test 1 results

Sample	Lifetime [min]	Criterion setting lifetime
A	84	Secondary flank wear
B	52	Secondary flank wear
C	40	Primary flank wear

As can be seen in Table 4 the sample A shows an unexpectedly high wear resistance with a lifetime close to the double as compared to the samples B and C.

Cutting test 2

- 5 The cutting tools were also tested in an intermittent face turning operation in a square bar 100*100mm work piece material of SS1672 steel. The cutting speed, V_c , was 250 m/min, the feed, f_n , was 0.1 mm/revolution, the depth of cut, a_p , was 2.5 mm and water miscible cutting fluid was used. The machining was continued until the end of lifetime criterion was reached. One cutting edge per cutting tool was evaluated.
- 10 In evaluating the tool wear the % of damage of the primary edge line was measured along the contact length where the primary edge had been in contact with the workpiece material. The tool life criterion was set to $\geq 40\%$ damage such that the substrate was exposed along the primary edge line in the area of contact with the work piece material. The tool wear was measured every three cycles, i.e. after three facing passes. As soon as the criteria was met
- 15 the lifetime of the tool was considered reached. To calculate the final tool life of 40% damage a simple interpolation between the damage before and after reaching 40% of damage was made. The average results of 4 parallel cutting tests per type of sample are presented in Table 5. Occasionally, cutting edge breakage was observed, these were removed from the results. Only samples showing continuous wear and thereby reflecting
- 20 the contribution from the coating on the tool life, are included here.

Table 5. Cutting test 2 results

Sample	Lifetime [cycles]
A	24.2
B	15.7
C	7.2

While the invention has been described in connection with various exemplary embodiments, it is to be understood that the invention is not to be limited to the disclosed exemplary embodiments, on the contrary, it is intended to cover various modifications and equivalent arrangements within the appended claims. Furthermore, it should be recognized that any disclosed form or embodiment of the invention may be incorporated in any other disclosed or described or suggested form or embodiment as a general matter of design choice. It is the intention, therefore, to be limited only as indicated by the scope of the appended claims appended hereto.

CLAIMS

1. A cutting tool for metal cutting, wherein said cutting tool comprise a substrate at least partially coated with a 3-30 μm coating, said substrate is of cemented carbide, cermet or ceramic, said coating comprise one or more layers, wherein at least one layer is a
 5 Ti(C,N) layer with a thickness of 3-25 μm , wherein said Ti(C,N) layer being composed of columnar grains wherein

the average grain size D_{422} of the Ti(C,N) layer, as measured with X-ray diffraction with $\text{CuK}\alpha$ radiation, the grain size D_{422} is calculated from the full width at half maximum (FWHM) of the (422) peak according to Scherrer's equation

$$10 \quad D_{422} = \frac{K\lambda}{B_{422}\cos\theta}$$

wherein D_{422} is the mean grain size of the Ti(C,N) grains in the Ti(C,N) layer, K is the shape factor here set at 0.9, λ is the wavelength for the $\text{CuK}\alpha_1$ radiation here set at 1.5405 \AA , B_{422} is the FWHM value for the (422) reflection and θ is the Bragg angle,

wherein D_{422} is ≥ 25 nm and ≤ 35 nm.

- 15 2. The cutting tool according to claim 1, wherein said at least one Ti(C,N) layer having a thickness of 4.5-25 μm exhibits an X-ray diffraction pattern, as measured using $\text{CuK}\alpha$ radiation and θ -2 θ scan, wherein the TC(hkl) is defined according to Harris formula:

$$\text{TC}(\text{hkl}) = \frac{I(\text{hkl})}{I_0(\text{hkl})} \left[\frac{1}{n} \sum_{n=1}^n \frac{I(\text{hkl})}{I_0(\text{hkl})} \right]^{-1}$$

- 20 where $I(\text{hkl})$ is the measured intensity (integrated area) of the (hkl) reflection, $I_0(\text{hkl})$ is the standard intensity according to ICDD's PDF-card No. 42-1489, n is the number of reflections, reflections used in the calculation are (1 1 1), (2 0 0), (2 2 0), (3 1 1), (3 3 1), (4 2 0) and (4 2 2), wherein $\text{TC}(422) \geq 3$.

- 25 3. The cutting tool according to claim 2, wherein said at least one Ti(C,N) layer having a thickness of 6-25 μm and $\text{TC}(422) \geq 4$.

4. The cutting tool according to claim 2 or 3, wherein said at least one Ti(C,N) layer exhibits an X-ray diffraction pattern, wherein the TC(422) is the highest and TC(311) is the second highest.
5. The cutting tool according to any of the preceding claims, wherein the ratio C/(C+N) in the Ti(C,N) layer is 50% to 70%, preferably 55% to 65%.
6. The cutting tool according to any of the preceding claims, wherein the coating comprises an innermost layer of TiN.
7. The cutting tool according to any of the preceding claims, wherein the Ti(C,N) layer is the outermost layer of the coating.
- 10 8. The cutting tool according to any of the preceding claims, wherein the cutting tool is a drill, a milling insert or a turning insert, preferably a turning insert.
9. Use of a cutting tool according to any of the preceding claims in metal cutting.
10. The use of a cutting tool according to claim 9 in metal cutting in high alloyed steel, hardened steel, cast iron or stainless steel, preferably used in metal cutting in high alloyed steel.
- 15

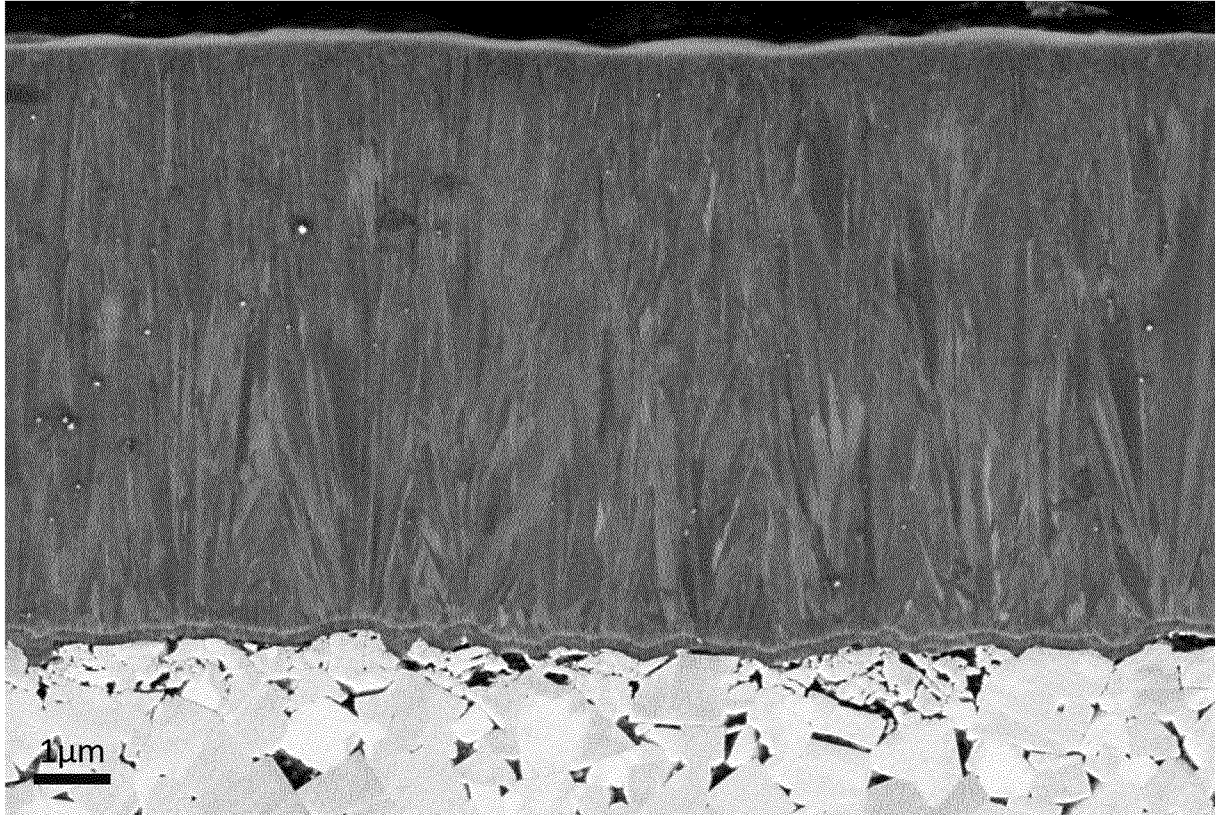


Fig. 1

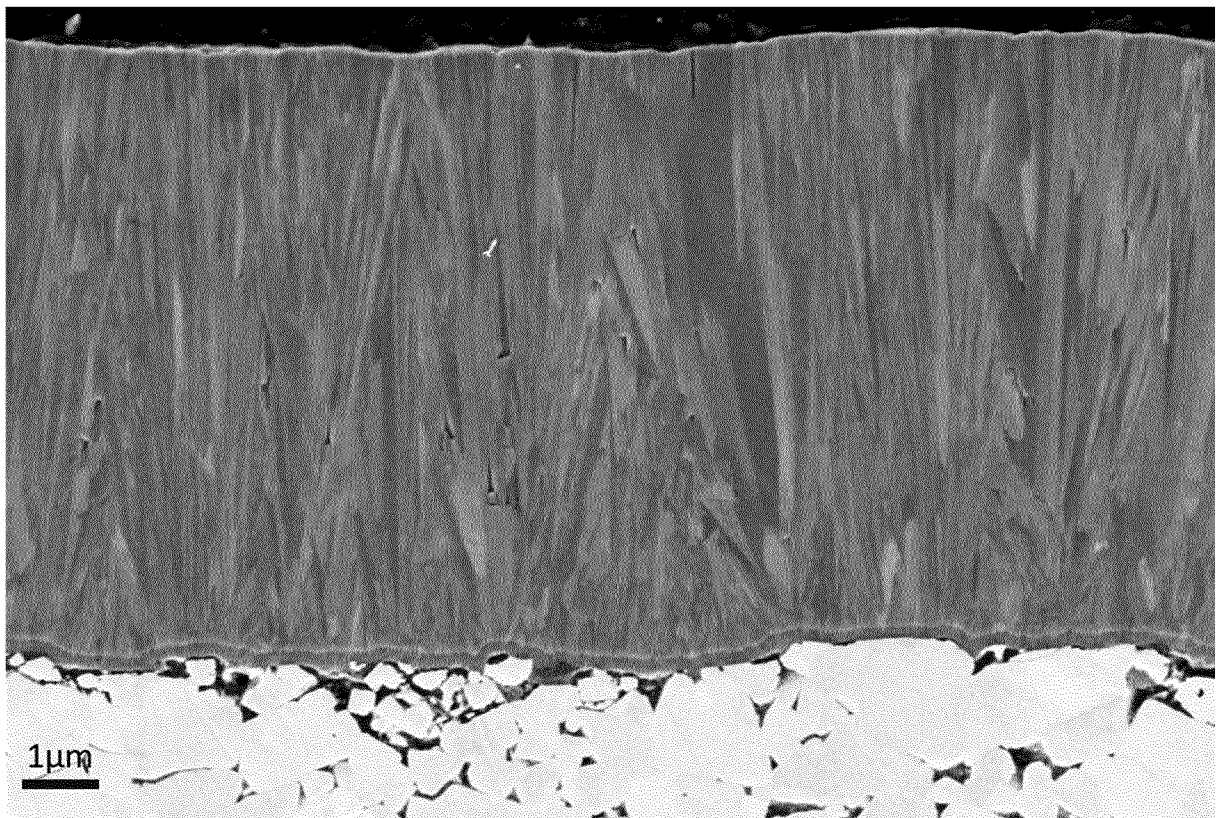


Fig. 2

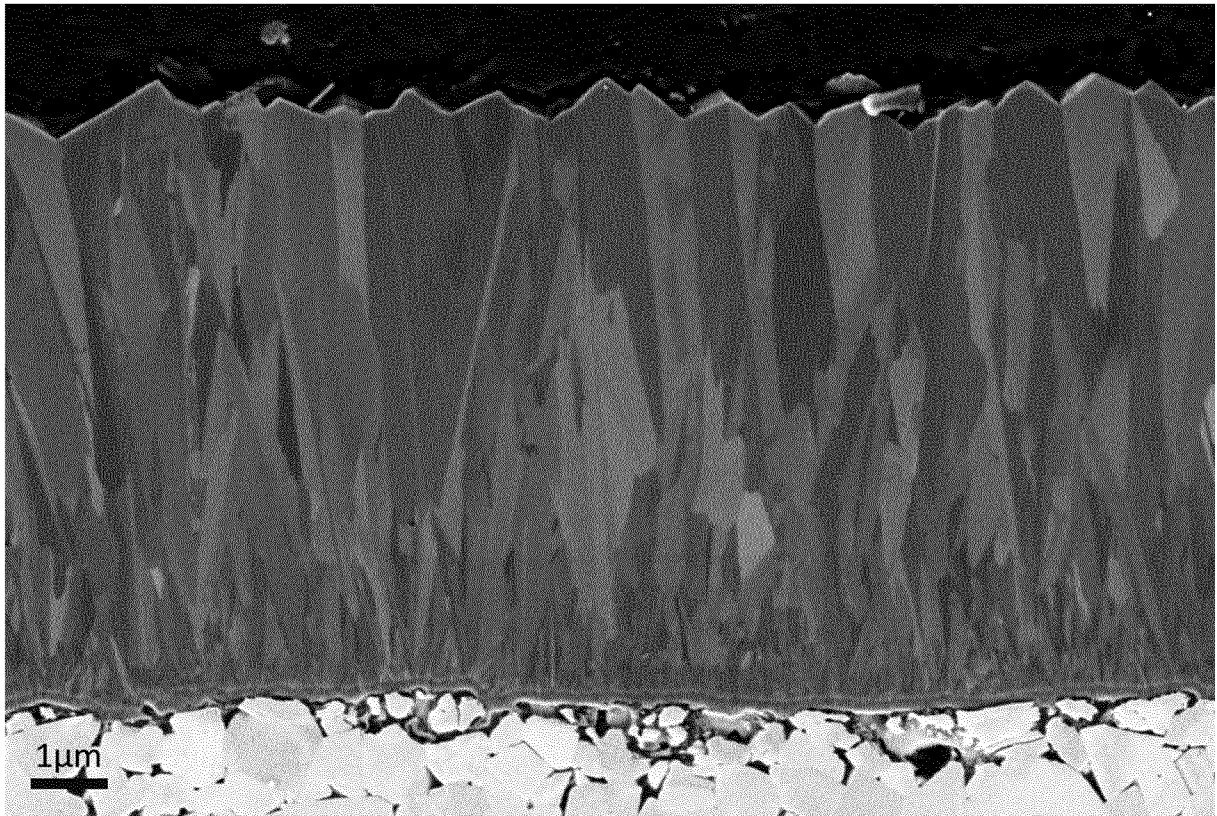


Fig. 3



Fig. 4

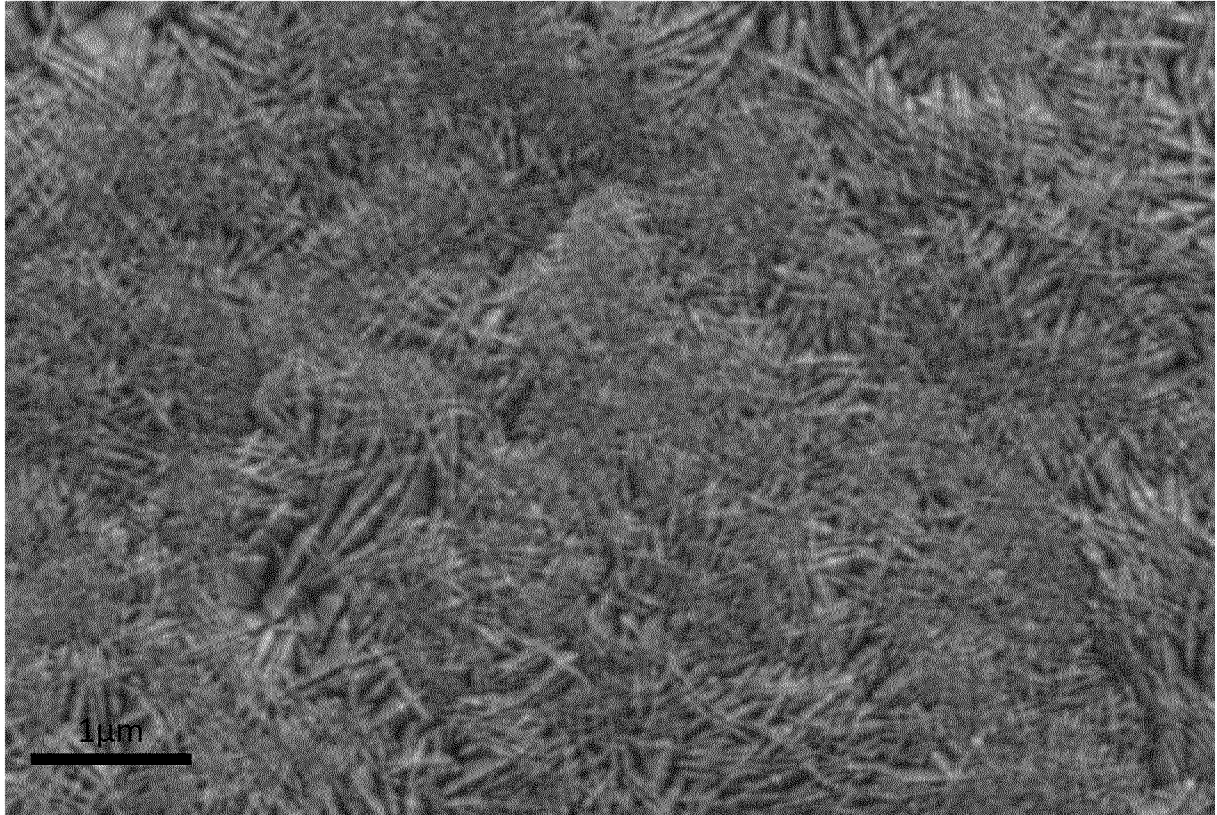


Fig. 5

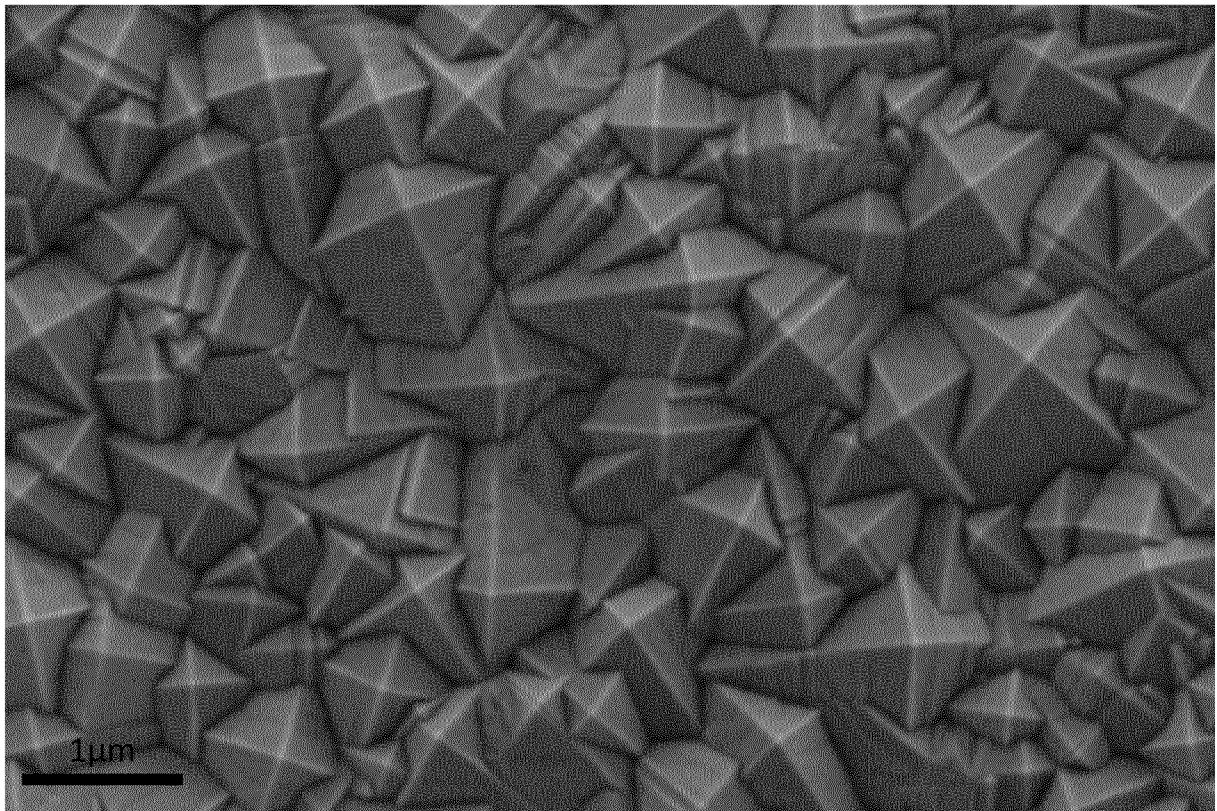


Fig. 6

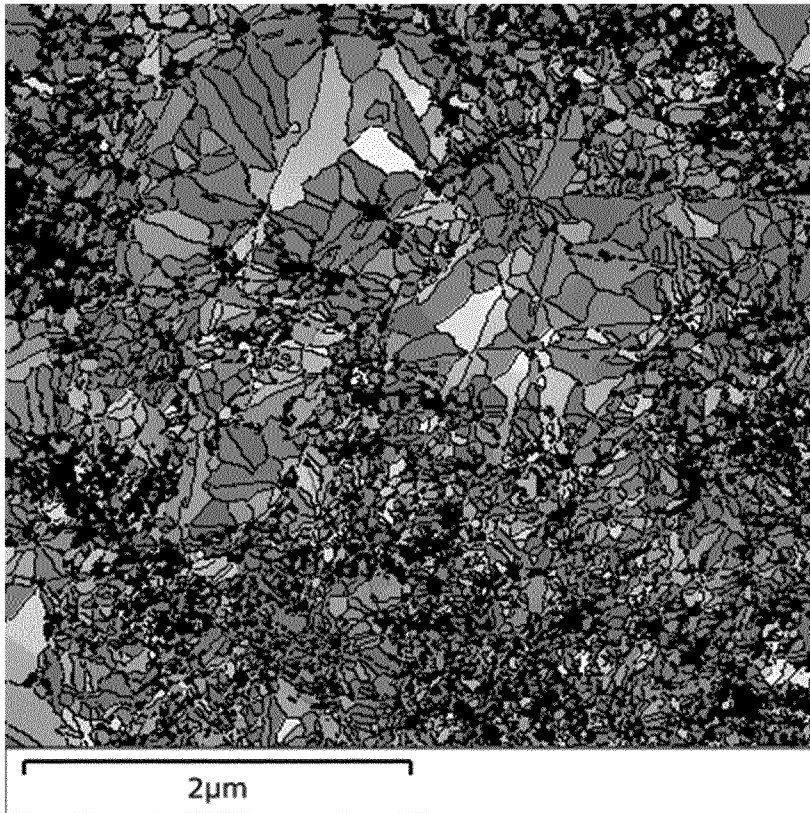


Fig. 7

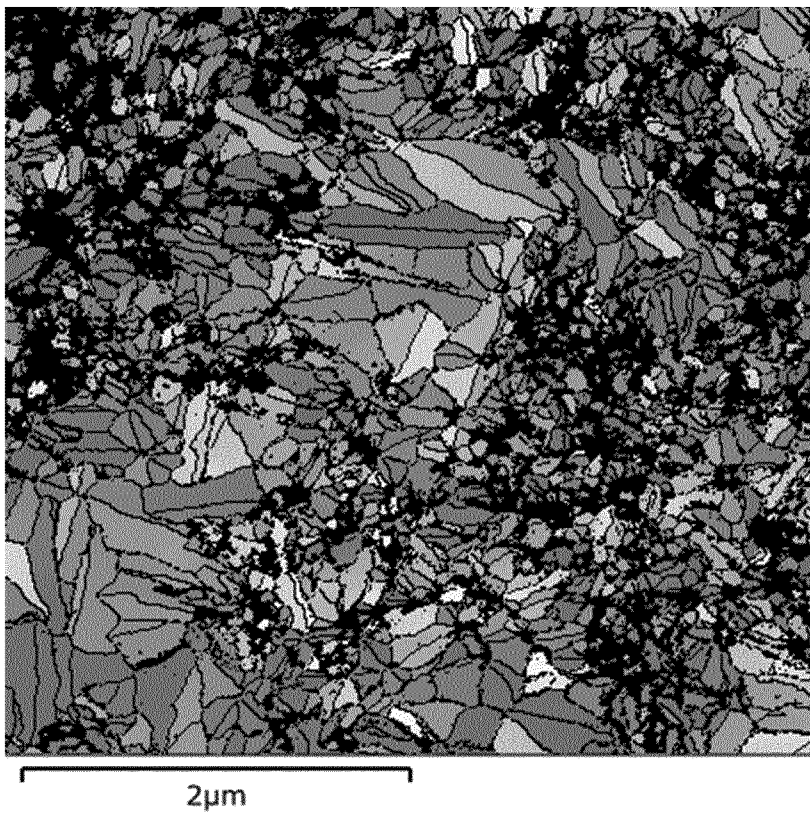


Fig. 8

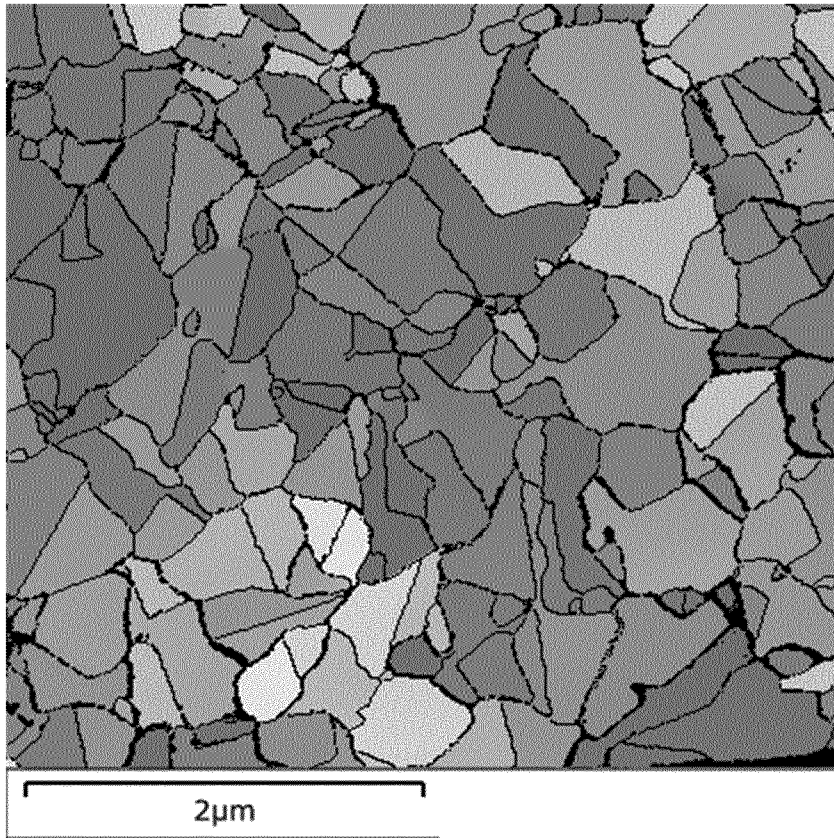


Fig. 9

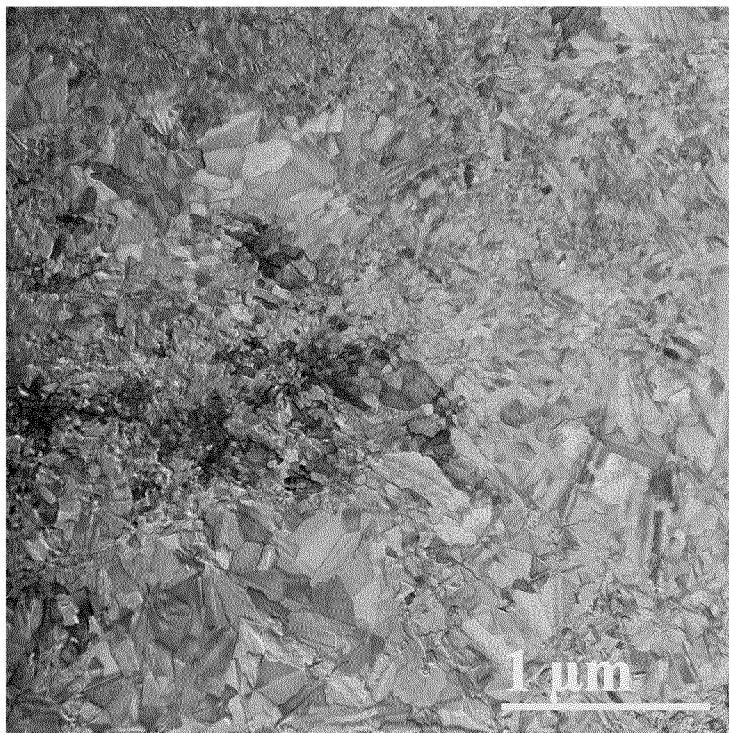


Fig. 10

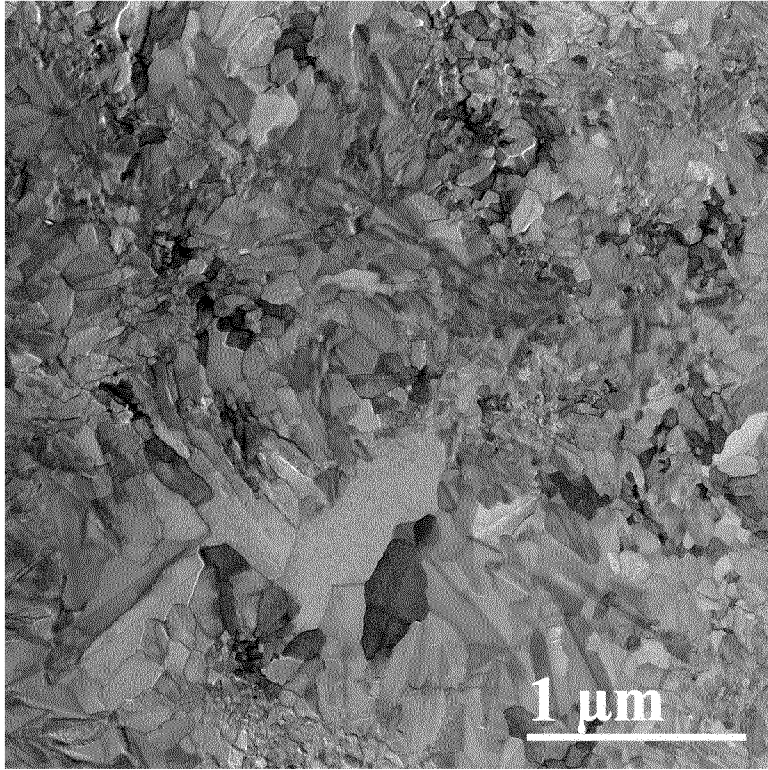


Fig. 11

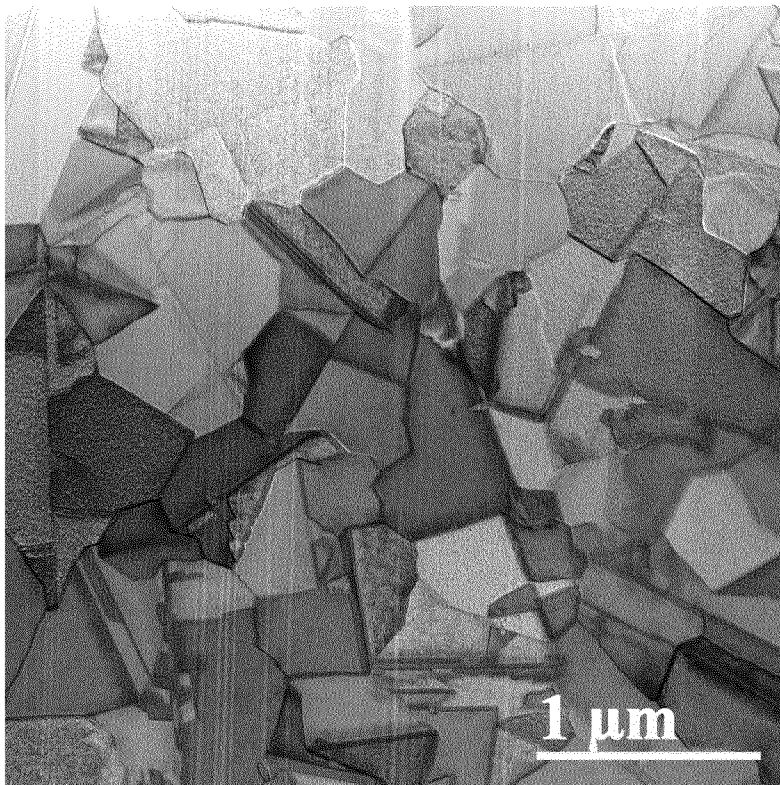


Fig. 12

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2022/060698
--

A. CLASSIFICATION OF SUBJECT MATTER
INV. C23C30/00 C23C28/04 C23C16/34 C23C16/36 C23C16/52
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>ANONGSACK PASEUTH ET AL: "Microstructure, mechanical properties, and cutting performance of TiC x N 1-x coatings with various x values fabricated by moderate temperature chemical vapor deposition", SURFACE AND COATINGS TECHNOLOGY, vol. 260, 1 December 2014 (2014-12-01), pages 139-147, XP055552880, NL</p> <p>ISSN: 0257-8972, DOI: 10.1016/j.surfcoat.2014.09.068</p> <p>Sections 1, 2.1, 2.2 3.1, 5; figures 3(A), 6; tables 1, 4</p> <p style="text-align: center;">----- -/--</p>	1-10

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 23 June 2022	Date of mailing of the international search report 01/07/2022
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center;">Martinavicius, A</p>
--	--

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2022/060698

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>RUPPI S ET AL: "Deposition, microstructure, and properties of nanocrystalline Ti(C,O,N) coatings", JOURNAL OF VACUUM SCIENCE AND TECHNOLOGY: PART A, AVS /AIP, MELVILLE, NY., US, vol. 21, no. 1, 1 January 2003 (2003-01-01), pages 66-75, XP012006295, ISSN: 0734-2101, DOI: 10.1116/1.1521965 the whole document</p> <p>-----</p>	1-10
A	<p>US 2005/013995 A1 (RUPPI SAKARI [SE]) 20 January 2005 (2005-01-20) the whole document</p> <p>-----</p>	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2022/060698

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005013995 A1	20-01-2005	CN 1570202 A	26-01-2005
		EP 1471166 A2	27-10-2004
		KR 20040093037 A	04-11-2004
		SE 527346 C2	14-02-2006
		US 2005013995 A1	20-01-2005
		US 2007110897 A1	17-05-2007
