



(22) Date de dépôt/Filing Date: 2014/03/12

(41) Mise à la disp. pub./Open to Public Insp.: 2014/12/03

(30) Priorité/Priority: 2013/06/03 (US13/908,653)

(51) Cl.Int./Int.Cl. *G01S 13/74* (2006.01),
G01C 11/02 (2006.01), *G01S 13/75* (2006.01)


(71) Demandeur/Applicant:
THE BOEING COMPANY, US

(72) Inventeurs/Inventors:
LEONARD, JAMES V., US;
EGGEMEYER, AARON L., US;
HALBERT TERRENCE L., US;
GOODALL, MICHAEL L., US

(74) Agent: SMART & BIGGAR

(54) Titre : SYSTEME DE NOTIFICATION D'IDENTIFICATION PAR RADIOFREQUENCE

(54) Title: RADIO FREQUENCY IDENTIFICATION NOTIFICATION SYSTEM

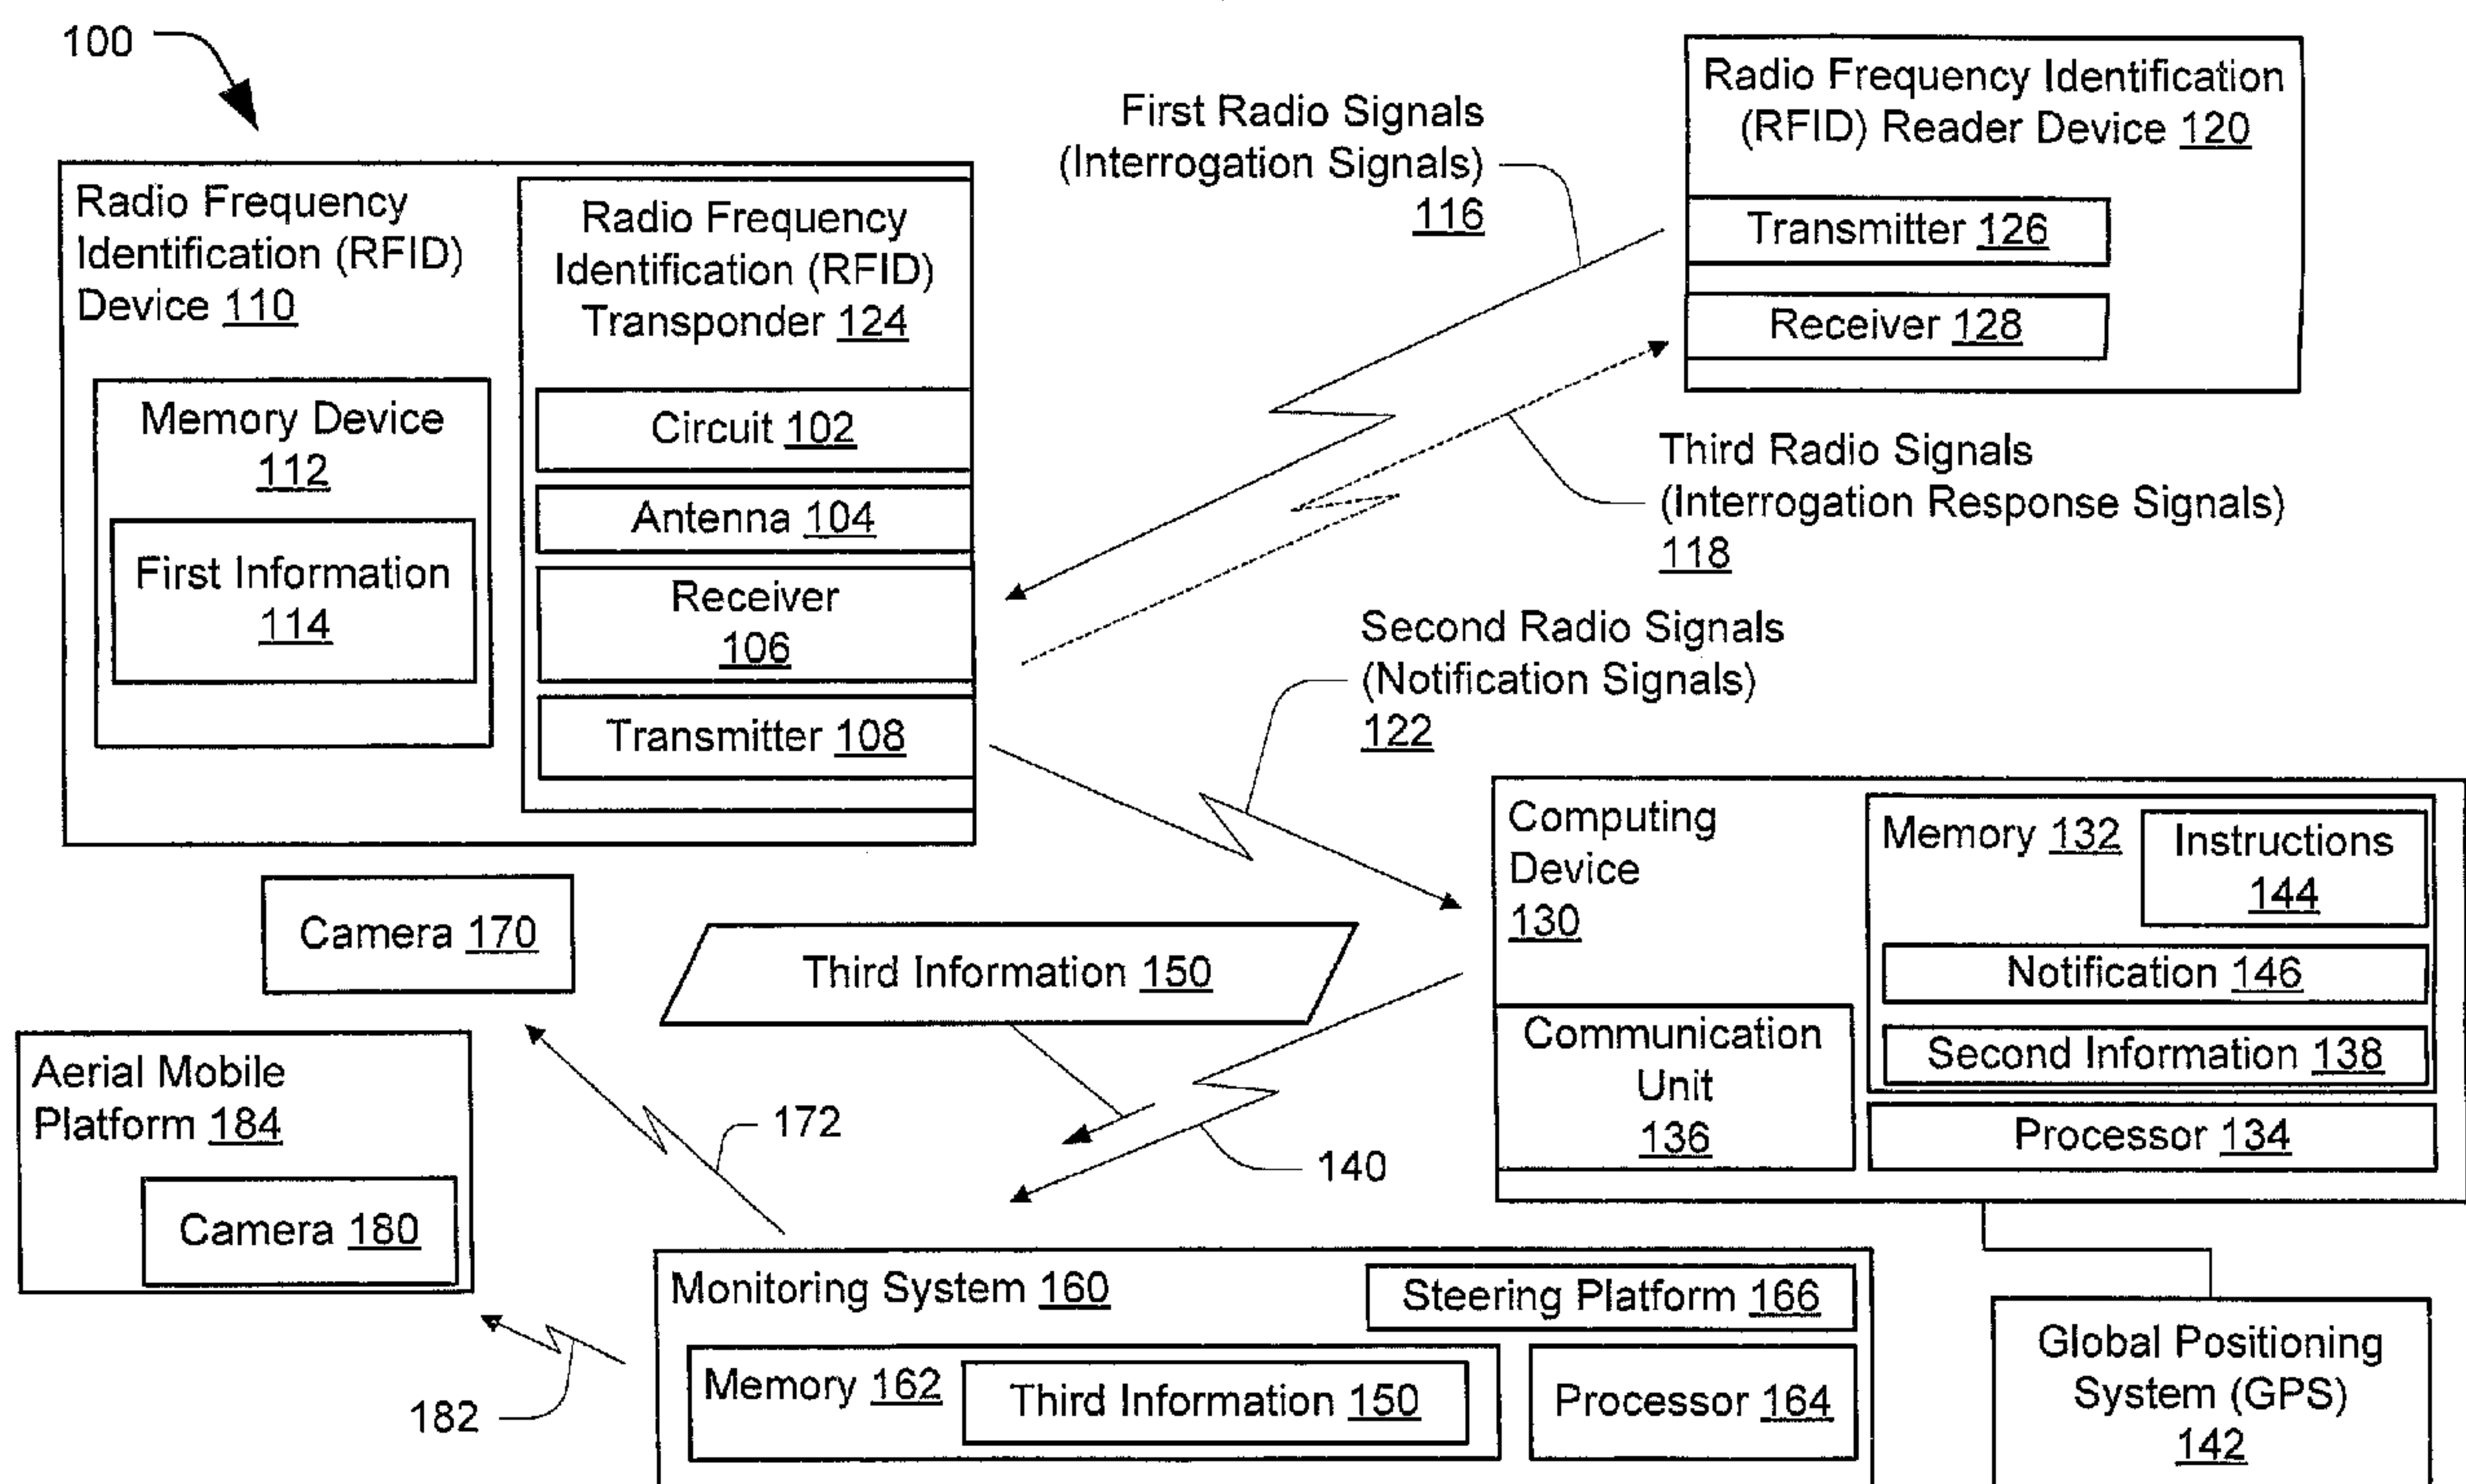

(57) Abrégé/Abstract:

A device, such as a radio frequency identification (RFID) device, includes a receiver to receive interrogation signals transmitted over a first frequency band from an RFID reader device. The device includes a transmitter to transmit a notification signal over a second frequency band to a computing device (e.g., a mobile phone) in response to receiving a particular interrogation signal at the receiver. The computing device is distinct from the RFID reader device and the second frequency band is distinct from the first frequency band. The notification signal includes data indicating that the particular interrogation signal was received at the device.



ABSTRACT

A device, such as a radio frequency identification (RFID) device, includes a receiver to receive interrogation signals transmitted over a first frequency band from an RFID reader device. The device includes a transmitter to transmit a notification signal
5 over a second frequency band to a computing device (e.g., a mobile phone) in response to receiving a particular interrogation signal at the receiver. The computing device is distinct from the RFID reader device and the second frequency band is distinct from the first frequency band. The notification signal includes data indicating that the particular interrogation signal was received at the device.

10

15

RADIO FREQUENCY IDENTIFICATION NOTIFICATION SYSTEM

FIELD

[0001] The present disclosure is generally related to radio frequency identification devices.

BACKGROUND

5 [0002] Radio frequency identification (RFID) systems enable RFID devices, such as an RFID reader device, to obtain information (e.g., a tag, a label, or an identifier) stored in an RFID tag via short range, wireless radio frequency communication. Some commercial applications using RFID systems may attach an RFID tag to an object to facilitate
10 tracking and monitoring of the object.

[0003] RFID systems may also be used in payment systems. For example, a smart card may include financial information and an RFID transponder. The RFID transponder may provide the financial information to an RFID reader to facilitate a financial transaction. Some such RFID systems may have vulnerabilities. For example, information stored on a
15 smart card including an RFID transponder may be provided to an unauthorized third party (e.g., a criminal) operating an RFID reader device that is capable of communicating with the RFID transponder. The information obtained from the smart card may include personal identification information and bank account information, which may be used for malicious purposes. As a result, businesses, consumers, and governments may spend
20 significant amount of money to prevent and cure the effects of stolen identities and compromised personal and private information.

SUMMARY

[0004] Particular embodiments disclosed herein describe a radio frequency (RFID) notification system. The RFID notification system enables one or more notifications
25 (e.g., a message or an audio output), information (e.g., a time, a date, or a geographic location), or both, to be provided by a computing device (e.g., a mobile phone). The

notifications, the information, or both, may indicate occurrences of activity at an RFID device, such as an RFID tag device (e.g., an RFID credit card), which stores information (e.g., personal identification information or bank account information). The occurrences of activity at the RFID device may be based on receipt of radio frequency communications (e.g., an interrogation signal) at the RFID device from an RFID reader device. The notifications, the information, or both, may be provided to a monitoring system (e.g., a security system), which may perform one or more actions responsive to the notifications, the information, or both. For example, the monitoring system may control operation of one or more cameras at a geographic location identified based on the notifications, the information, or both.

[0005] The notifications provided by the computing device may enable a user of the RFID device to monitor communications received by the RFID device. Additionally, data obtained via one or more cameras operated in response to an occurrence of activity at an RFID device may enable the user to monitor activity in an area associated with unauthorized access of the RFID device. Monitoring activity within an area surrounding the RFID device may aid in apprehension of a third party using an RFID reader device to access information from the RFID device without authorization.

[0006] To identify the occurrences of activity at the RFID device, the RFID device may be configured to transmit a radio frequency communication (e.g., a notification signal) to the computing device in response to receiving an RFID interrogation signal from an RFID reader device. The radio frequency communication transmitted to the computing device may include data indicating that the RFID interrogation signal was received at the RFID device. Based on the radio frequency communication received from the RFID device, the computing device may determine a time, a date, or both, when the RFID device was accessed based on when the computing device received the radio frequency communication from the RFID device. The computing device also may determine a geographic location indicating where activity at the RFID device occurred (e.g., using a global positioning system). The computing device may generate a notification of the activity occurring at the RFID device based on the information determined at the

computing device in response to receiving the radio frequency communications from the RFID device.

[0007] In a particular embodiment, a device (e.g., an RFID transponder) includes a receiver to receive interrogation signals transmitted over a first frequency band from an RFID reader device. The device includes a transmitter to transmit, in response to receiving a particular interrogation signal at the receiver, a notification signal over a second frequency band to a computing device (e.g., a mobile phone). The computing device is distinct from the RFID reader device and the second frequency band is distinct from the first frequency band. The notification signal includes data indicating that the particular interrogation signal was received at the device.

[0008] In a particular embodiment, a method includes receiving, at a receiver of an RFID device, an interrogation signal transmitted over a first frequency band from an RFID reader device. The method further includes, in response to receiving the interrogation signal, transmitting, from the RFID device, a notification signal over a second frequency band to a computing device. The computing device is distinct from the RFID reader device and the second frequency band is distinct from the first frequency band. The notification signal includes data indicating that interrogation signal was received at the RFID device.

[0009] In another particular embodiment, a computer readable medium stores instructions that, when executed by a processor, cause the processor to receive, at a computing device, a notification signal over a second frequency band from an RFID device. The notification signal is transmitted from the RFID device in response to receipt of an interrogation signal by the RFID device. The interrogation signal is transmitted over a first frequency band from an RFID reader device. The second frequency band is distinct from the first frequency band. The notification signal includes data indicating that the interrogation signal was received at the RFID device. The instructions are further executable by the processor to, in response to receiving the notification signal, determine information associated with the RFID device. The information indicates a geographic location of the computing device when the notification signal was received at the computing device.

[0010] The features, functions, and advantages that have been described can be achieved independently in various embodiments or may be combined in yet other embodiments, further details of which are disclosed with reference to the following description and drawings.

5

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a block diagram of a radio frequency identification (RFID) notification system;

[0012] FIG. 2 is a flow diagram of a particular embodiment of a method performed by an RFID notification system; and

10 [0013] FIG. 3 illustrates a particular embodiment of a computing system that may be used to implement one or more aspects of the disclosure.

DETAILED DESCRIPTION

[0014] Referring to FIG. 1, a block diagram of a radio frequency identification (RFID) notification system **100** is shown. The RFID notification system **100** may facilitate
 15 detection of attempts to access information (e.g., personal information, or financial information) from a smart card (e.g., a credit card or a debit card) or another RFID enabled device. A notification may enable identification of an authorized and/or an unauthorized attempt to access the smart card. As use of smart cards that store information and that support RFID communications to facilitate transactions become
 20 more common, such information may be more accessible to thieves who have learned to access information from a smart card without an owner of the smart card having knowledge or having provided authorization. One way a third party may scan information from a smart card is by using an RFID interrogation device (also referred to as an RFID reader device **120**) in a public area within a communicative distance of the
 25 smart card. Such an RFID reader device **120** may be programmed to periodically transmit RFID interrogation signals (such as a first radio signal **116**) and to gather and store responses (e.g., interrogation response signals such as a third radio signal **118**) that are received from the smart card. Such interrogation response signals may include

financial information or other personal information that is stored on smart cards in the public area.

[0015] To facilitate identification and/or apprehension of individuals engaged in gathering information in this manner, the RFID notification system 100 may include an RFID device 110. The RFID device 110 may be a smart card that is modified or configured in a manner that enables the RFID notification system 100 to identify attempts to scan the smart card in a particular area. For example, the RFID device 110 may include an RFID transponder 124. The RFID transponder 124 may be configured to receive RFID interrogation signals, such as the first radio signal 116, and to transmit a notification signal (such as a second radio signal 122), which indicates that an attempt was made to access information (e.g., first information 114) from the RFID device 110.

[0016] In a particular embodiment, the RFID interrogation signals are received at the RFID device 110 in a first frequency band, and the notification signals 122 are transmitted from the RFID device 110 in a second frequency band that is different from the first frequency band. For example, the first frequency band may be used for RFID communications that support an RFID protocol using frequencies in a ultra-high frequency (UHF) frequency range, such as a range of approximately from 860 MHz to 960 MHz. The second frequency band may be used for data communications that support frequencies in a range that is approximately from 300 MHz to 3000 MHz. The second frequency band may support communications using a communication protocol that includes a personal area network communication protocol, a wireless local area network protocol, a cellular communication protocol, or a combination thereof. The personal area network protocol may include protocols such as a Bluetooth® communication protocol (Bluetooth® is a registered trademark of Bluetooth SIG, Inc.) or an infrared data communication protocol. The wireless local area network protocol may include a wireless communication protocol supported by one of the Institute of Electrical and Electronics Engineers (IEEE) 802.11 wireless communication standards. The cellular communication protocol may include code division multiple access (CDMA), time division multiple access (TDMA), frequency division multiple access (FDMA), orthogonal frequency division multiple access (OFDMA), single-carrier frequency

division multiple access (SC-FDMA), a global system for mobile communications (GSM), enhanced data rates for GSM evolution (EDGE), evolved EDGE, Universal Mobile Telecommunications System (UMTS), general packet radio service (GPRS), 3rd generation partnership project (3GPP), 3GPP2, 4th generation (4G), long term evolution
 5 (LTE), 4G-LTE, or a combination thereof.

[0017] The notification signal **122** may be received by a computing device **130** (e.g., a mobile phone) that is located in close proximity to the RFID device **110** such that a user of the computing device **130** may receive a notification indicating an attempt to access the RFID device **110**. For example, the computing device **130** may be portable such that the
 10 computing device **130** is carried by the user who is also carrying the RFID device **110**. As such, the user may carry both the RFID device **110** and the computing device **130** when walking through the public area.

[0018] The computing device **130** may determine information (e.g., second information **138**) related to an occurrence of activity at the RFID device **110**, such as an attempt by
 15 the RFID reader device **120** to obtain the information **114** from the RFID device **110**. The second information **138** determined by the computing device **130** may indicate a time, a physical location of the computing device **130** (e.g., a geographic location), or both, when the notification signal **122** was received at the computing device **130**. The computing device **130** may provide a notification of the attempt to access the RFID
 20 device **110** by generating a display that includes the second information **138** (e.g., a message indicating the time and the physical location), by providing an audio alert, or by causing vibration of the computing device **130**.

[0019] Additionally, or in the alternative, the computing device **130** may send communications to a security monitoring system (e.g., the monitoring system **160**) to
 25 notify the monitoring system of the attempt to access the RFID device **110** and to provide information (e.g., third information **150**) related to the attempt. The third information **150** may include the second information **138** determined by the computing device **130**, instructions for controlling operating of the monitoring system **160**, other information, or a combination thereof.

[0020] The monitoring system **160** may control a surveillance system that includes cameras, such as a camera **170** and a camera **180**, to gather additional information related to the attempt to access the RFID device **110**. For example, the monitoring system **160** may operate the cameras **170**, **180** to gather data (e.g., video data) in area within a vicinity
 5 of the geographic location where the attempt to access the RFID device **110** occurred. The data may be useable to apprehend a person operating the RFID reader device **120**. In particular embodiments, the camera **180** may be mobile. For example, the camera **180** may be mounted on a mobile platform, such as an aerial mobile platform (e.g., a quadcopter). When mobile, the camera **180** may be movable to a position that is closer to
 10 an area where the RFID device **110** may have been accessed such that data may be gathered about individuals in the area.

[0021] In a particular embodiment, the RFID device **110** may include the RFID transponder **124** and a memory device **112**. The RFID transponder **124** may include a circuit **102** and communication circuitry, including an antenna **104**, a receiver **106** and a
 15 transmitter **108**. The antenna **104** may include or be coupled to the receiver **106** and the transmitter **108**. The memory device **112** may include non-volatile memory. The memory device **112** may be configured to store information (e.g., the first information **114**). The first information **114** may include identification information (e.g., a tag, a label, or an identifier) to identify the RFID device **110** or an object associated with,
 20 attached to, or including the RFID device **110**. The first information **114** may include personal identification information, bank account information, travel identification, government identification, information that is associated with an object attached to, associated with, or including the RFID device **110**, information that is associated with a user of the RFID device **110**, or a combination thereof.

[0022] The circuit **102** may be coupled to the memory device **112**. The circuit **102** may include or be included within an integrated circuit. The antenna **104** may be coupled to the circuit **102**. The circuit **102** may be configured to store, process, or both, the first information **114** stored in the memory device **112**. Further, the circuit **102** may be configured to control operation of the antenna **104**, the receiver **106**, and the transmitter
 25 **108**. For example, the circuit **102** may perform modulation and demodulation of radio
 30

frequency signals at the antenna **104**. In a particular embodiment, the RFID device **110** may include a chip (e.g., a microchip) in which the circuit **102** and the memory device **112** may be integrated. In other particular embodiments, the RFID device **110** may include an inlay with a substrate film onto which the antenna **104** and the chip including
5 the memory device **112** and the circuit **102** are mounted or attached.

[0023] The RFID device **110** may be configured to communicate with an RFID interrogation device (e.g., the RFID reader device **120**), the computing device **130**, or both, via the antenna **104**. For example, the receiver **106** may receive the first radio signals **116**, such as an RFID interrogation signal transmitted from the RFID reader
10 device **120** to obtain the first information **114** stored at the RFID device **110**. The transmitter **108** may transmit the second radio signals **122**, such as a notification signal, to the computing device **130**. The notification signal **122** may include data indicating an occurrence of activity at the RFID device **110** based on receipt of the first radio signal **116** at the RFID device **110**. The data included in the notification signal **122** may include
15 at least a portion of the first information **114** (e.g., an identifier of the RFID device **110**).

[0024] In a particular embodiment, the RFID reader device **120** sends the interrogation signal **116** the RFID device **110** in the first frequency band using an RFID communication protocol. In response to receiving the interrogation signal **116**, the RFID device **110** sends the notification signal **122** in the second frequency band using a
20 communication protocol (e.g., a cellular communication protocol) that is distinct from the RFID communication protocol. The second frequency band is distinct from the first frequency band. In this embodiment, the RFID reader device **120** may not be configured to receive communications, such as the notification signal **122**, transmitted in the second frequency band using the communication protocol that is distinct from the RFID
25 communication protocol. Thus, transmitting the notification signal **122** in the second frequency band using a distinct communication protocol may prevent the user (e.g., a thief) of the RFID reader device **120** from receiving the notification indicating that the RFID device **110** was accessed.

[0025] In a particular embodiment, the transmitter **108** may also transmit the third radio signals **118**, such as an RFID interrogation response signal, to the RFID reader device **120**. The interrogation response signal **122** may be transmitted in response to receipt of the first radio signal **116** at the RFID device **110**. The third radio signals **118** may be transmitted to provide all or a portion of the first information **114** stored at the RFID device **110**. Thus, the RFID device **110** may function as a smart card to transmit the information **114** in response to receiving the interrogation signal **116** and to alert a user that the interrogation signal **116** was received. In an alternate embodiment, the RFID device **110** does not respond to RFID reader device **120** by transmitting the interrogation response signal **118**.

[0026] The RFID device **110** may be configured to operate as a passive RFID device or active RFID device. When the RFID device **110** operates as a passive RFID device, the RFID device **110** may obtain power for operation from energy provided by an electromagnetic energy field transmitted via the first radio signals **116**. In a particular embodiment, when the RFID device **110** operates as a passive RFID device, the transmitter **108** may transmit the second radio signal **122**, the third radio signal **118**, or both, in response to receiving the first radio signal **116** using energy derived from the first radio signal **116**. When the RFID device **110** operates as an active RFID device, the RFID device **110** may obtain power for operation from energy supplied by power sources, such as a battery integral with or coupled to the RFID device **110**.

[0027] The RFID reader device **120** may be configured to communicate with devices that use RFID communications, such as an RFID tag, an RFID transponder, a smart card, or the RFID device **110**. The RFID reader device **120** may include a transmitter **126** and a receiver **128**. The transmitter **126** may be configured to transmit the first radio signals **116** to the RFID device **110** to obtain the first information **114**. The receiver **128** may be configured to receive the third radio signals **118** from the RFID device **110**. The third radio signal **118** may contain information (e.g., the first information **114**) stored at the RFID device **110**. The RFID reader device **120** may display or store the first information **114** to perform an activity based on the first information. For example, the first information **114** may be used to perform an unauthorized financial transaction.

[0028] The computing device **130** may include a communications unit **136** that is configured to receive communications from RFID devices, such as the RFID device **110**. For example, the communications unit **136** may be configured to receive the second radio signals **122** from the RFID device **110**. The communications unit **136** may be configured to send communications to monitoring systems, such as the monitoring system **160**, via a data communication connection **140**. The data communication connection **140** may be implemented as a wired data communication or a wireless data communication.

[0029] In a particular embodiment, the computing device **130** includes or is included within a mobile communication device (e.g., a mobile phone or a smart phone), a mobile computing device (e.g., a tablet computing device or a personal digital assistant device), or a personal computer. The computing device **130** may include a processor **134** and a memory **132** that is accessible to the processor **134**. The memory **132** may store instructions **144** that are executable by the processor **134** to perform one or more operations described herein. The instructions **144** may be included in one or more computer program products, one or more computer software applications (e.g., mobile phone applications), program code, or a combination thereof, stored in the memory **132**. The memory **132** may store information (e.g., the second information **138**), a notification (e.g., the notification **146**), or both, determined by the computing device **130**. The second information **138**, the notification **146**, or both, may provide an indication of activity that occurred at the RFID device **110**. Additionally, or in the alternative, the computing device **130** may store the second information **138**, the notification **146**, or both, in a storage device (e.g., a database, a network memory device, or a server) associated with or accessible to the computing device **130**.

[0030] The computing device **130** may determine the second information **138** based on the notification signal **122** received from the RFID device **110**. The second information **138** may indicate a time, a date, or both, when the second radio signal **122** was received at the computing device **130**. The second information **138** may indicate a physical location of the computing device **130** at which the notification signal **122** was received at the computing device **130**. The physical location may be a geographic location that corresponds to an area where activity at the RFID device **110** occurred. In a particular

embodiment, the physical location may be determined based on information provided by a global positioning system (GPS) **142** integral with or coupled to the computing device **130**.

[0031] The computing device **130** may generate a display that provides the second information **138** related to the occurrence of the activity at the RFID device **110**. The computing device **130** may also generate a display that includes an analysis (e.g., trends, patterns, comparisons, or a combination thereof) of a plurality of occurrences of activity at the RFID device **110** based on the second information **138** determined for a plurality of second radio signals **122**. The computing device **130** may present the display at a display device associated with the computing device **130**. The computing device **130** may provide a notification, such as the notification **146** (e.g., a message or an audio output), identifying the occurrence of the activity at an RFID device **110**. The notification **146** may be determined based on the notification signal **122**, the second information **138**, or both. The notification **146** may be displayed as a message at the display device.

[0032] In a particular embodiment, the computing device **130** may be configured to send, to the monitoring system **160** via the data communication connection **140**, a communication including information (e.g., third information **150**) related to the occurrence of the activity at the RFID device **110**. The third information **150** may include the notification **146**, the second information **138**, or both. The third information **150** may also include instructions to control operation of the monitoring system **160**. For example, the instruction may indicate how the monitoring system **160** is to control operation of a camera (e.g., the camera **170** or the camera **180**) at a geographic location identified based on the second information **138**. Data (e.g., video data, audio data, or both) obtained via the cameras **170**, **180** may enable the user to monitor activity in an area associated with the geographic location where an activity at the RFID device **110** may have occurred.

[0033] The monitoring system **160** may include a processor **164** and a memory **162** that is accessible to the processor **164**. The memory **162** may include instructions that are executable by the processor **164** to perform operations described herein. The monitoring system **160** may be configured to receive communications from computing devices, such

as the computing device **130**. For example, the monitoring system **160** may receive a communication including the third information **150** from the computing device **130** via the data communication connection **140**. The memory **162** may store information, such as the third information **150**.

5 [0034] The monitoring system **160** may be configured to control operation of a camera, such as the camera **170** or the camera **180**. Either or both of the cameras **170**, **180** may be operated in response to the communication received from the computing device **130**. The monitoring system **160** may operate the camera **170** and the camera **180** by sending a communication including instructions to the camera **170** and the camera **180** via the data
10 communication connection **172** and the data communication connection **182**, respectively. Either or both of the cameras **170**, **180** may include a mobile camera, a video camera, a security camera, or a combination thereof. In a particular embodiment, the camera **180** may be mounted on a mobile platform, such as an aerial mobile platform **184**. For example, the camera **180** may be mounted on a quadcopter, or any other
15 unmanned or manned aerial vehicle. The monitoring system **160** may also include steering platform **166** to steer the aerial mobile platform **184** in a particular area associated with a geographic location. The monitoring system **160** may communicate with the aerial mobile platform **184** via the data communication connection **182**.

[0035] In a particular embodiment, the monitoring system **160** may be associated with or
20 implemented in a security system. A user associated with the monitoring system **160** may be distinct from a user associated with the computing device **130**. The monitoring system **160** may be located at a geographic location that is distinct from a geographic location of the computing device **130**. In particular embodiments, the monitoring system **160** may be associated with the computing device **130**. For example, the monitoring system **160** may
25 be portable such that the monitoring system **160** may be carried by a user of the computing device **130**. The monitoring system **160** may provide a notification (e.g., a message, a video output, an audio output, or a combination thereof) based on the third information **150** received from the computing device **130**. The monitoring system may also provide a display of all or a portion of the third information **150**.

[0036] During operation, a first user of the RFID reader device **120** may operate the RFID reader device **120** to interrogate the RFID device **110** to obtain at least a portion of the first information **114** stored on the RFID device **110**. To obtain the portion of the first information **114**, the RFID reader device **120** may transmit the first radio signal **116** (e.g., an interrogation signal) to the RFID device **110**. The RFID device **110** may be associated with or operated by a second user. For example, the first user may be a thief who does not have authorization to access the first information **114** and attempts to gather the first information **114** (e.g., personal identification information and bank account information associated with the second user) from the RFID device (e.g., a credit card). The thief may operate the RFID reader device **120** in a public area by causing the RFID reader device **120** to periodically transmit the interrogation signal **116** to the RFID device **110** to obtain the first information **114**. In another example, the first user may be a sales agent, or an automated check-out, or purchase, system, of a business who has authorization from the second user to access the first information **114** (e.g., bank account information) from the RFID device **110** to perform a transaction at the business. The sales agent may operate the RFID reader device **120** at an establishment of the business by causing the RFID reader device **120** to transmit the interrogation signal **116** to obtain the first information **114**.

[0037] In a particular embodiment, the interrogation signal **116** may be transmitted over a first frequency band from the RFID reader device **120** to the RFID device **110**. The first frequency band may support communication using one or more RFID protocols using frequencies in a range that is approximately from **300 MHz** to **3000 MHz**. In a particular embodiment, the first frequency band may support UHF communications in a range that is approximately from **860 MHz** to **960 MHz**. In other particular embodiments, the first frequency band may include frequencies in lower frequency ranges, such as very low frequency (VLF) having a frequency range of **3kHz** to **30kHz**, low frequency (LF) having a frequency range of **30 kHz** to **300 kHz**, high frequency (HF) having a frequency range of **3 MHz** to **30 MHz**, or a combination thereof. Different portions of the radio frequency spectrum may be selected based on radio transmission technologies, protocols, applications, and range of communication. Some frequencies in the first frequency band

may be regulated by a government entity or regulated by licensing restrictions of private communication operators.

[0038] In response to receiving the interrogation signal 116, the RFID device 110 may transmit the second radio signal 122 (e.g., a notification signal) over the second frequency band to the computing device 130. The notification signal 122 transmitted to the computing device 130 may include data indicating an occurrence of activity at the RFID device 110, such as when that the interrogation signal 116 was received at the RFID device 110. In a particular embodiment, the RFID device 110 may receive power to transmit the notification signal 122 based on energy derived from the interrogation signal 116.

[0039] The second frequency band may support communication using one or more RFID protocols that use frequencies in a range that is approximately from 300 MHz to 3000 MHz. In other particular embodiments, the second frequency band may support communication using one or more other communication protocols including a personal area network communication protocol, a wireless local area network protocol, a cellular communication protocol, or a combination thereof. The personal area network protocol may include protocols such as the Bluetooth® communication protocol or an infrared data communication protocol. The wireless local area network protocol may include a wireless communication protocol supported by one of the IEEE 802.11 wireless communication standards. The cellular communication protocol may include CDMA, TDMA, FDMA, OFDMA, SC-FDMA, GSM, EDGE, evolved EDGE, UMTS, GPRS, 3GPP, 3GPP2, 4G, LTE, 4G-LTE, or a combination thereof. The second frequency band may be selected based on radio transmission technologies, protocols, applications, and range of communication. Some frequencies in the second frequency band may be regulated by a government entity or regulated by licensing restrictions of private communication operators.

[0040] In a particular embodiment, the second frequency band may be distinct from the first frequency band. For example, the first frequency band may support an RFID communication protocol, and the second frequency band may support a distinct

communication protocol, such as a cellular communication protocol. In this example, the first frequency band may have a range that is approximately from **860 MHz** to **960 MHz** used for the RFID communication protocol, and the second frequency band may include frequencies used for a cellular communication protocol supported by a particular communications carrier. Transmission of the notification signal **122** over the second frequency band may enable the computing device **130** to receive the information related to the occurrence of an activity at the RFID device **110** when the computing device **130** is not accessible to the user of the RFID device **110**. For example, the computing device **130** may be at a remote location where the computing device **130** receives the notification signal **122**.

[0041] In a particular embodiment, the RFID reader device **120** may be configured to receive the interrogation signal **116** in the first frequency band and may not be configured to receive the notification signal **122** in the second frequency band, which is distinct from the first frequency band. In this embodiment, the RFID reader device **120** may be configured to communicate using an RFID communication protocol, which may not support other communication protocols that use radio frequencies outside of a range of the first frequency band. Thus, the RFID reader device **120** may not receive or detect the notification signal **122**.

[0042] In response to receiving the interrogation signal **116**, the RFID device **110** may transmit the third radio signal **118** (e.g., an interrogation response signal) over a third frequency band to the RFID reader device **120**. The RFID device **110** may receive power to transmit the interrogation response signal **118** using energy derived from the interrogation signal **116**. The third frequency band may support communications using one or more RFID protocols that use frequencies in a range that is approximately from **300 MHz** to **3000 MHz**. In a particular embodiment, the third frequency band may support one or more of frequencies included in the first frequency band.

[0043] The interrogation response signal **118** transmitted to the RFID reader device **120** may include at least a portion of the first information **114** stored at the RFID device **110**. For example, the interrogation response signal **118** may include an identifier of the RFID

device and may not include other information stored at the RFID device **110**, such as personal identification information, bank account information, government identification information, account information, or a combination thereof. In particular embodiments, the RFID device **110** may prohibit transmitting the interrogation response signal **118** in response to receiving the interrogation signal **116**. Prohibiting transmission of the interrogation response signal **118** may prevent an unauthorized third party from obtaining the first information **114** by the RFID reader device **120**.

[0044] The computing device **130** may determine second information **138** based on when the notification signal **122** is received by the computing device **130**. For example, the second information **138** may indicate a time, a date, or both, when the notification signal **122** was received at the computing device **130**. An indication that the notification signal **122** was received may indicate that the RFID device **110** received the interrogation signal **116**, the receipt of which caused the RFID device **110** to transmit the notification signal **122**. In another example, the second information **138** may indicate a physical location at which the notification signal **122** was received by the computing device **130**. The physical location may be proximate to a geographic location where activity at the RFID device **110** may have occurred, causing the RFID device **110** to transmit the notification signal **122**. Additionally, or in the alternative, the physical location may be associated with or correspond to a landmark, a business address, a residential address, a name of a business, a geographic location (e.g., global position coordinates), or a combination thereof. In a particular embodiment, the physical location may be a geographic location based on information (e.g., global position coordinates) provided by the global positioning system (GPS) **142** associated with the computing device **130**.

[0045] The computing device **130** may generate a display including at least a portion of the second information **138**, which is presented at a display device associated with the computing device **130**. The portion of the second information **138** presented in the display may indicate an occurrence of activity at the RFID device **110**. To illustrate, the computing device **130** may present information indicating a time and a date corresponding to when the notification signal **122** was received. In another example, the computing device **130** may present a geographical map that indicates the physical

location at which the notification signal **122** was received. The computing device **130** may also determine an analysis (e.g., trends, patterns, comparisons, or a combination thereof) of activity at the RFID device **110** based on the second information **138**. In a particular embodiment, the display generated by the computing device may include the analysis (trends, patterns, comparisons, or a combination thereof) of a plurality of activities that occurred at the RFID device **110**. The analysis may be determined based on the second information **138**. For example, the display may include a chart illustrating a pattern of a time period when multiple notification signals **122** were received within a vicinity of a particular physical location. The chart may be useful in determining whether unauthorized access of the first information **114** may have been obtained at the particular physical location during a particular time.

[0046] In response to receiving the notification signal **146**, the computing device **130** may provide the notification **146** to a user of the computing device **130**. For example, the notification **146** may be a message presented at the display device with information (e.g., a time, a date, or an address of the computing device **130** when the notification signal **122** was received by the computing device **130**). The computing device **130** may communicate the third information **150** to the monitoring system **160** via the data communication connection **140** in response to receiving the notification signal **122**. The third information **150** may indicate an occurrence of activity at the RFID device **110**. The third information **150** may include at least a portion of the second information **138**, the notification **146**, the analysis of the plurality of activities that occurred at the RFID device **110**, or a combination thereof. In a particular embodiment, the third information **150** may include instructions to control operation of the monitoring system **160**. For example, the third information **150** may include an instruction to direct each or both of the cameras **170**, **180** within a vicinity of the physical location identified based on the notification signal **122**.

[0047] The monitoring system **160** may operate either or both of the cameras **170**, **180** in response to receiving the third information **150**. For example, the camera **170** and the camera **180** may be operated at an area within proximity of the physical location (e.g., a geographic location) of the computing device **130** indicated in the third information **150**.

In a particular embodiment, the steering platform **166** may communicate an instruction to the aerial mobile platform **184** via the data communication connection **182** to steer the aerial mobile platform **184** within proximity of the physical location of the computing device **130**. The monitoring system **160** may control operation of the camera **180** to
 5 obtain data when the aerial mobile platform **184** is within a vicinity of the physical location.

[0048] The monitoring system **160** may provide the notification **146** included in the third information **150** to a user of the monitoring system **160**. For example, the notification **146** may be displayed at the monitoring system **160** to indicate an occurrence of activity
 10 at the RFID device **110** based on the notification signal **122**. In another example, the notification **146** may be presented an audio alert at the monitoring system **160**. The monitoring system may provide a display that includes all or a portion of the third information **150**. For example, the display may indicate when the second radio signal **122** was received at the computing device **130**. In another example, the display may present a
 15 geographical map that identifies the physical location corresponding to the second radio signal **122** received at the computing device **130**. The information provided in the display may assist a user of the monitoring system **160** to determine where activity at the RFID device **110** may have occurred. Such information may enable the user to determine when and where to control operation of either or both of the cameras **170**, **180** to obtain data
 20 (e.g., video data, audio data, or both). The data may be useful in identifying unauthorized activity in an area surrounding the RFID device **110**.

[0049] The RFID notification system may enable a user of an RFID device (e.g., a smartcard) to use a computing device, such as a mobile phone, to monitor or track any communications received at the RFID device based on a notification signal that is
 25 received by a computing device. The notification signal may further enable the computing device to provide information, a notification, or both, which may indicate where (e.g., a geographic location) and when (e.g., a time and a date) activity may have occurred at the RFID device. Based on such information and a notification, the user of the RFID device may be able to identify an attempt by a third party (e.g., a thief) to gain
 30 unauthorized access to private information stored on the RFID device. The RFID

notification system further enables a monitoring system to obtain data (e.g., audio or video data) within an area of the geographic location where activity occurred at the RFID device. The audio and video data may aid in apprehension of a third party who may have accessed information from the RFID device without authorization.

5 [0050] In FIG. 2, a flow diagram of a particular embodiment of a method **200** performed by an RFID notification system is shown. The method **200** may be performed by the RFID device **110** of the RFID notification system **100** of FIG. 1.

[0051] At **210**, the method **200** includes receiving, at a receiver of an RFID device, an interrogation signal transmitted over a first frequency band from an RFID reader device.
10 For example, the receiver **106** of the RFID device **110** of FIG. 1 may receive an interrogation signal **116** transmitted over a first frequency band from the RFID reader device **120**.

[0052] At **220**, the method **200** includes, in response to receiving the interrogation signal, transmitting, from the RFID device, a notification signal over a second frequency band to
15 a computing device. The computing device is distinct from the RFID reader device, and the second frequency band is distinct from the first frequency band. The notification signal includes data indicating that the interrogation signal was received at the RFID device. For example, in response to receiving an interrogation signal **116** of FIG. 1, the transmitter **108** of the RFID device **110** may transmit a notification signal **122** over a
20 second frequency band to the computing device **130**. The computing device **130** is distinct from the RFID reader device **120**, and the second frequency band is distinct from the first frequency band. The notification signal **122** includes data indicating that the interrogation signal **116** was received at the RFID device **110**.

[0053] FIG. 3 is a block diagram of a computing environment **300** including a general
25 purpose computing device **310** operable to support communications. For example, the computing device **310**, or portions thereof, may correspond to the RFID device **110** of FIG. 1, RFID reader device **120** of FIG. 1, the computing device **130** of FIG. 1, or the monitoring system **160** of FIG. 1.

[0054] The computing device **310** may include at least one processor **320**. Within the computing device **310**, the at least one processor **320** may communicate with a system memory **330**, one or more storage devices **340**, one or more input/output interfaces **350**, one or more communications interfaces **360**, or a combination thereof.

5 [0055] The system memory **330** may include volatile memory devices (e.g., random access memory (RAM) devices), nonvolatile memory devices (e.g., read-only memory (ROM) devices, programmable read-only memory, and flash memory), or both. The system memory **330** may include an operating system **332**, which may include a basic input/output system for booting the computing device **310** as well as a full operating
 10 system to enable the computing device **310** to interact with users, other programs, and other devices. The system memory **330** may also include one or more applications **334**, program data **336**, radio frequency identification (RFID) notification operations **337**, and algorithm(s) **338**. For example, the RFID notification operations **337** may include one or more operations described herein as being performed by the RFID device **110** of FIG. 1,
 15 the RFID reader device **120** of FIG. 1, the computing device **130** of FIG. 1, the monitoring system **160** of FIG. 1, or a combination thereof. The RFID notification operations **337** may include one or more operations performed by the RFID device **110** of FIG. 1, the computing device **130** of FIG. 1, or the monitoring system **160** of FIG. 1. The algorithms **338** may include instructions that are executable to perform the methods
 20 described herein, such as the method **200**. The program data **336** may include data used by the applications **334** to perform respective functions of the applications **334**.

[0056] The at least one processor **320** may also communicate with one or more storage devices **340**. For example, the one or more storage devices **340** may include nonvolatile storage devices, such as magnetic disks, optical disks, or flash memory devices. The
 25 storage devices **340** may include both removable and non-removable memory devices. The storage devices **340** may be configured to store an operating system, applications and program data. In a particular embodiment, the system memory **330**, the storage devices **340**, or both, include tangible, non-transitory computer-readable media. The storage devices **340** may store data used by one or more of the applications **334**.

[0057] The at least one processor **320** may also communicate with one or more input/output interfaces **350**. The input/output interface **350** may include the input interface **352**. The one or more input/output interfaces **350** may enable the computing device **310** to communicate with one or more input/output devices **370** to facilitate user interaction. For example, the one or more input/output interfaces **350** may be adapted to receive input from the user, to receive input from another computing device, or a combination thereof. The input/output interfaces **350** may conform to one or more standard interface protocols, including serial interfaces (e.g., universal serial bus (USB) interfaces or Institute of Electrical and Electronics Engineers (IEEE) interface standards), parallel interfaces, display adapters, audio adapters, or custom interfaces. The input/output devices **370** may include user interface devices and displays, including some combination of buttons, keyboards, pointing devices, displays, speakers, microphones, touch screens, and other devices.

[0058] The at least one processor **320** may communicate with other computer systems **380** and/or other devices via the one or more communications interfaces **360**. The one or more communications interfaces **360** may include wired Ethernet interfaces, IEEE **802** wireless interfaces, Bluetooth communication interfaces, electrical, optical or radio frequency interfaces, infrared interfaces, or other wired or wireless interfaces. The one or more communication interfaces **360** may include a transmitter **362**. The transmitter **362** may correspond to the transmitter **108** of FIG. 1, the transmitter **126** of FIG. 1, or a transmitter included in the communications unit **136** of FIG. 1. The one or more communication interfaces **360** may include a receiver **364**. The receiver **364** may correspond to the receiver **106** of FIG. 1, the receiver **128** of FIG. 1, or a receiver included in the communications unit **136** of FIG. 1. The other computer systems **380** may include host computers, servers, workstations, portable computers, telephones, tablet computers, or any other communication device or component.

[0059] The illustrations of the embodiments described herein are intended to provide a general understanding of the structure of the various embodiments. The illustrations are not intended to serve as a complete description of all of the elements and features of apparatus and systems that utilize the structures or methods described herein. Many other

embodiments may be apparent to those of skill in the art upon reviewing the disclosure. Other embodiments may be utilized and derived from the disclosure, such that structural and logical substitutions and changes may be made without departing from the scope of the disclosure. For example, method steps may be performed in a different order than is
5 shown in the illustrations or one or more method steps may be omitted. Accordingly, the disclosure and the figures are to be regarded as illustrative rather than restrictive.

[0060] Moreover, although specific embodiments have been illustrated and described herein, it should be appreciated that any subsequent arrangement designed to achieve the same or similar results may be substituted for the specific embodiments shown. This
10 disclosure is intended to cover any and all subsequent adaptations or variations of various embodiments. Combinations of the above embodiments and other embodiments not specifically described herein will be apparent to those of skill in the art upon reviewing the description.

[0061] In the foregoing Detailed Description, various features may have been grouped
15 together or described in a single embodiment for the purpose of streamlining the disclosure. This disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, the claimed subject matter may be directed to less than all of the features of any of the disclosed embodiments.

20

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A device comprising:

5 a receiver to receive interrogation signals transmitted over a first frequency
band from a radio frequency identification (RFID) reader device; and

10 a transmitter to transmit, in response to receiving a particular interrogation
signal at the receiver, a notification signal over a second frequency band to
a computing device, the computing device distinct from the RFID reader
device, wherein the second frequency band is distinct from the first
frequency band, and wherein the notification signal includes data
indicating that the particular interrogation signal was received at the
device.

15 **2.** The device of claim 1, wherein receipt of the notification signal by the computing
device causes the computing device to determine information indicating a time, a
date, or both, when the notification signal was received at the computing device.

20 **3.** The device of any of claims 1-2, wherein receipt of the notification signal by the
computing device causes the computing device to determine information
indicating a geographic location of the computing device at which the notification
signal was received at the computing device.

25 **4.** The device of any of claims 1-3, wherein the computing device is a mobile
communication device.

5. The device of any of claims 1-4, wherein the receiver and the transmitter are
components of an RFID transponder.

6. The device of any of claims 1-5, wherein the RFID reader device is configured to receive an interrogation response signal in the first frequency band and is not configured to receive the notification signal in the second frequency band.
- 5 7. The device of any of claims 1-6, wherein the first frequency band is approximately from 860 MHz to 960 MHz.
8. The device of any of claims 1-7, wherein the second frequency band includes a frequency band that supports communication using a personal area network communication protocol, a wireless local area network protocol, a cellular communication protocol, or a combination thereof.
- 10 9. The device of any of claims 1-8, wherein the transmitter is further configured to transmit an interrogation response signal over the first frequency band to the RFID reader device in response to the particular interrogation signal, and wherein the interrogation response signal includes information stored at the device.
- 15 10. The device of any of claims 1-9, wherein receipt of the notification signal causes the computing device to communicate information to a monitoring system, and wherein the information indicates the particular interrogation signal was received by the device, indicates a geographic location of the computing device at which the notification signal was received at the computing device, and indicates a time when the notification signal was received at the computing device.
- 20 11. The device of any of claims 1-10, wherein the transmitter transmits the notification signal using energy derived from the particular interrogation signal.
- 25 12. A method comprising:

receiving, at a receiver of a radio frequency identification (RFID) device,
an interrogation signal transmitted over a first frequency band from an
RFID reader device; and

5 in response to receiving the interrogation signal, transmitting, from the
RFID device, a notification signal over a second frequency band to a
computing device, the computing device distinct from the RFID reader
device, wherein the second frequency band is distinct from the first
frequency band, and wherein the notification signal includes data
10 indicating that the interrogation signal was received at the RFID device.

13. The method of claim 12, wherein the second frequency band includes a frequency
band that supports communication using a personal area network communication
protocol, a wireless local area network protocol, a cellular communication
15 protocol, or a combination thereof.

14. The method of any of claims 12-13, wherein the RFID reader device is operated
by a first user that is distinct from a second user of the RFID device and wherein
the first user is not authorized to access information stored at the RFID device.

20 15. The method of any of claims 12-14, wherein receipt of the notification signal by
the computing device causes the computing device to determine information
associated with the RFID device, the information indicating a geographic location
of the computing device when the notification signal was received at the
25 computing device.

16. The method of claim 15, wherein the computing device is associated with a
monitoring system, and wherein receipt of the notification signal by the
computing device causes the monitoring system to operate a camera in an area
30 proximate to the geographic location of the computing device.

17. The method of any of claims **15-16**, wherein receipt of the notification signal by the computing device causes the computing device to send instructions to a monitoring system, wherein the instructions cause the monitoring system to steer an aerial mobile platform including a camera to an area proximate to the geographic location of the computing device and cause the monitoring system to operate the camera at the area.

18. A computer readable medium storing instructions that, when executed by a processor, cause the processor to:


receive, at a computing device, a notification signal over a second frequency band from a radio frequency identification (RFID) device, wherein the notification signal is transmitted from the RFID device in response to receipt of an interrogation signal by the RFID device, the interrogation signal transmitted over a first frequency band from an RFID reader device, wherein the second frequency band is distinct from the first frequency band, and wherein the notification signal includes data indicating that the interrogation signal was received at the RFID device; and

in response to receiving the notification signal, determine information associated with the RFID device, wherein the information indicates a geographic location of the computing device when the notification signal was received at the computing device.

19. The computer readable medium of claim **18**, wherein the information indicates a time, a date, or both, when the notification signal was received at the computing device, and wherein the instructions are further executable by the processor to display a notification based on the information.

20. The computer readable medium of any of claims **18-19**, wherein the second frequency band includes a frequency band that supports communication using a personal area network communication protocol, a wireless local area network protocol, a cellular communication protocol, or a combination thereof.

5

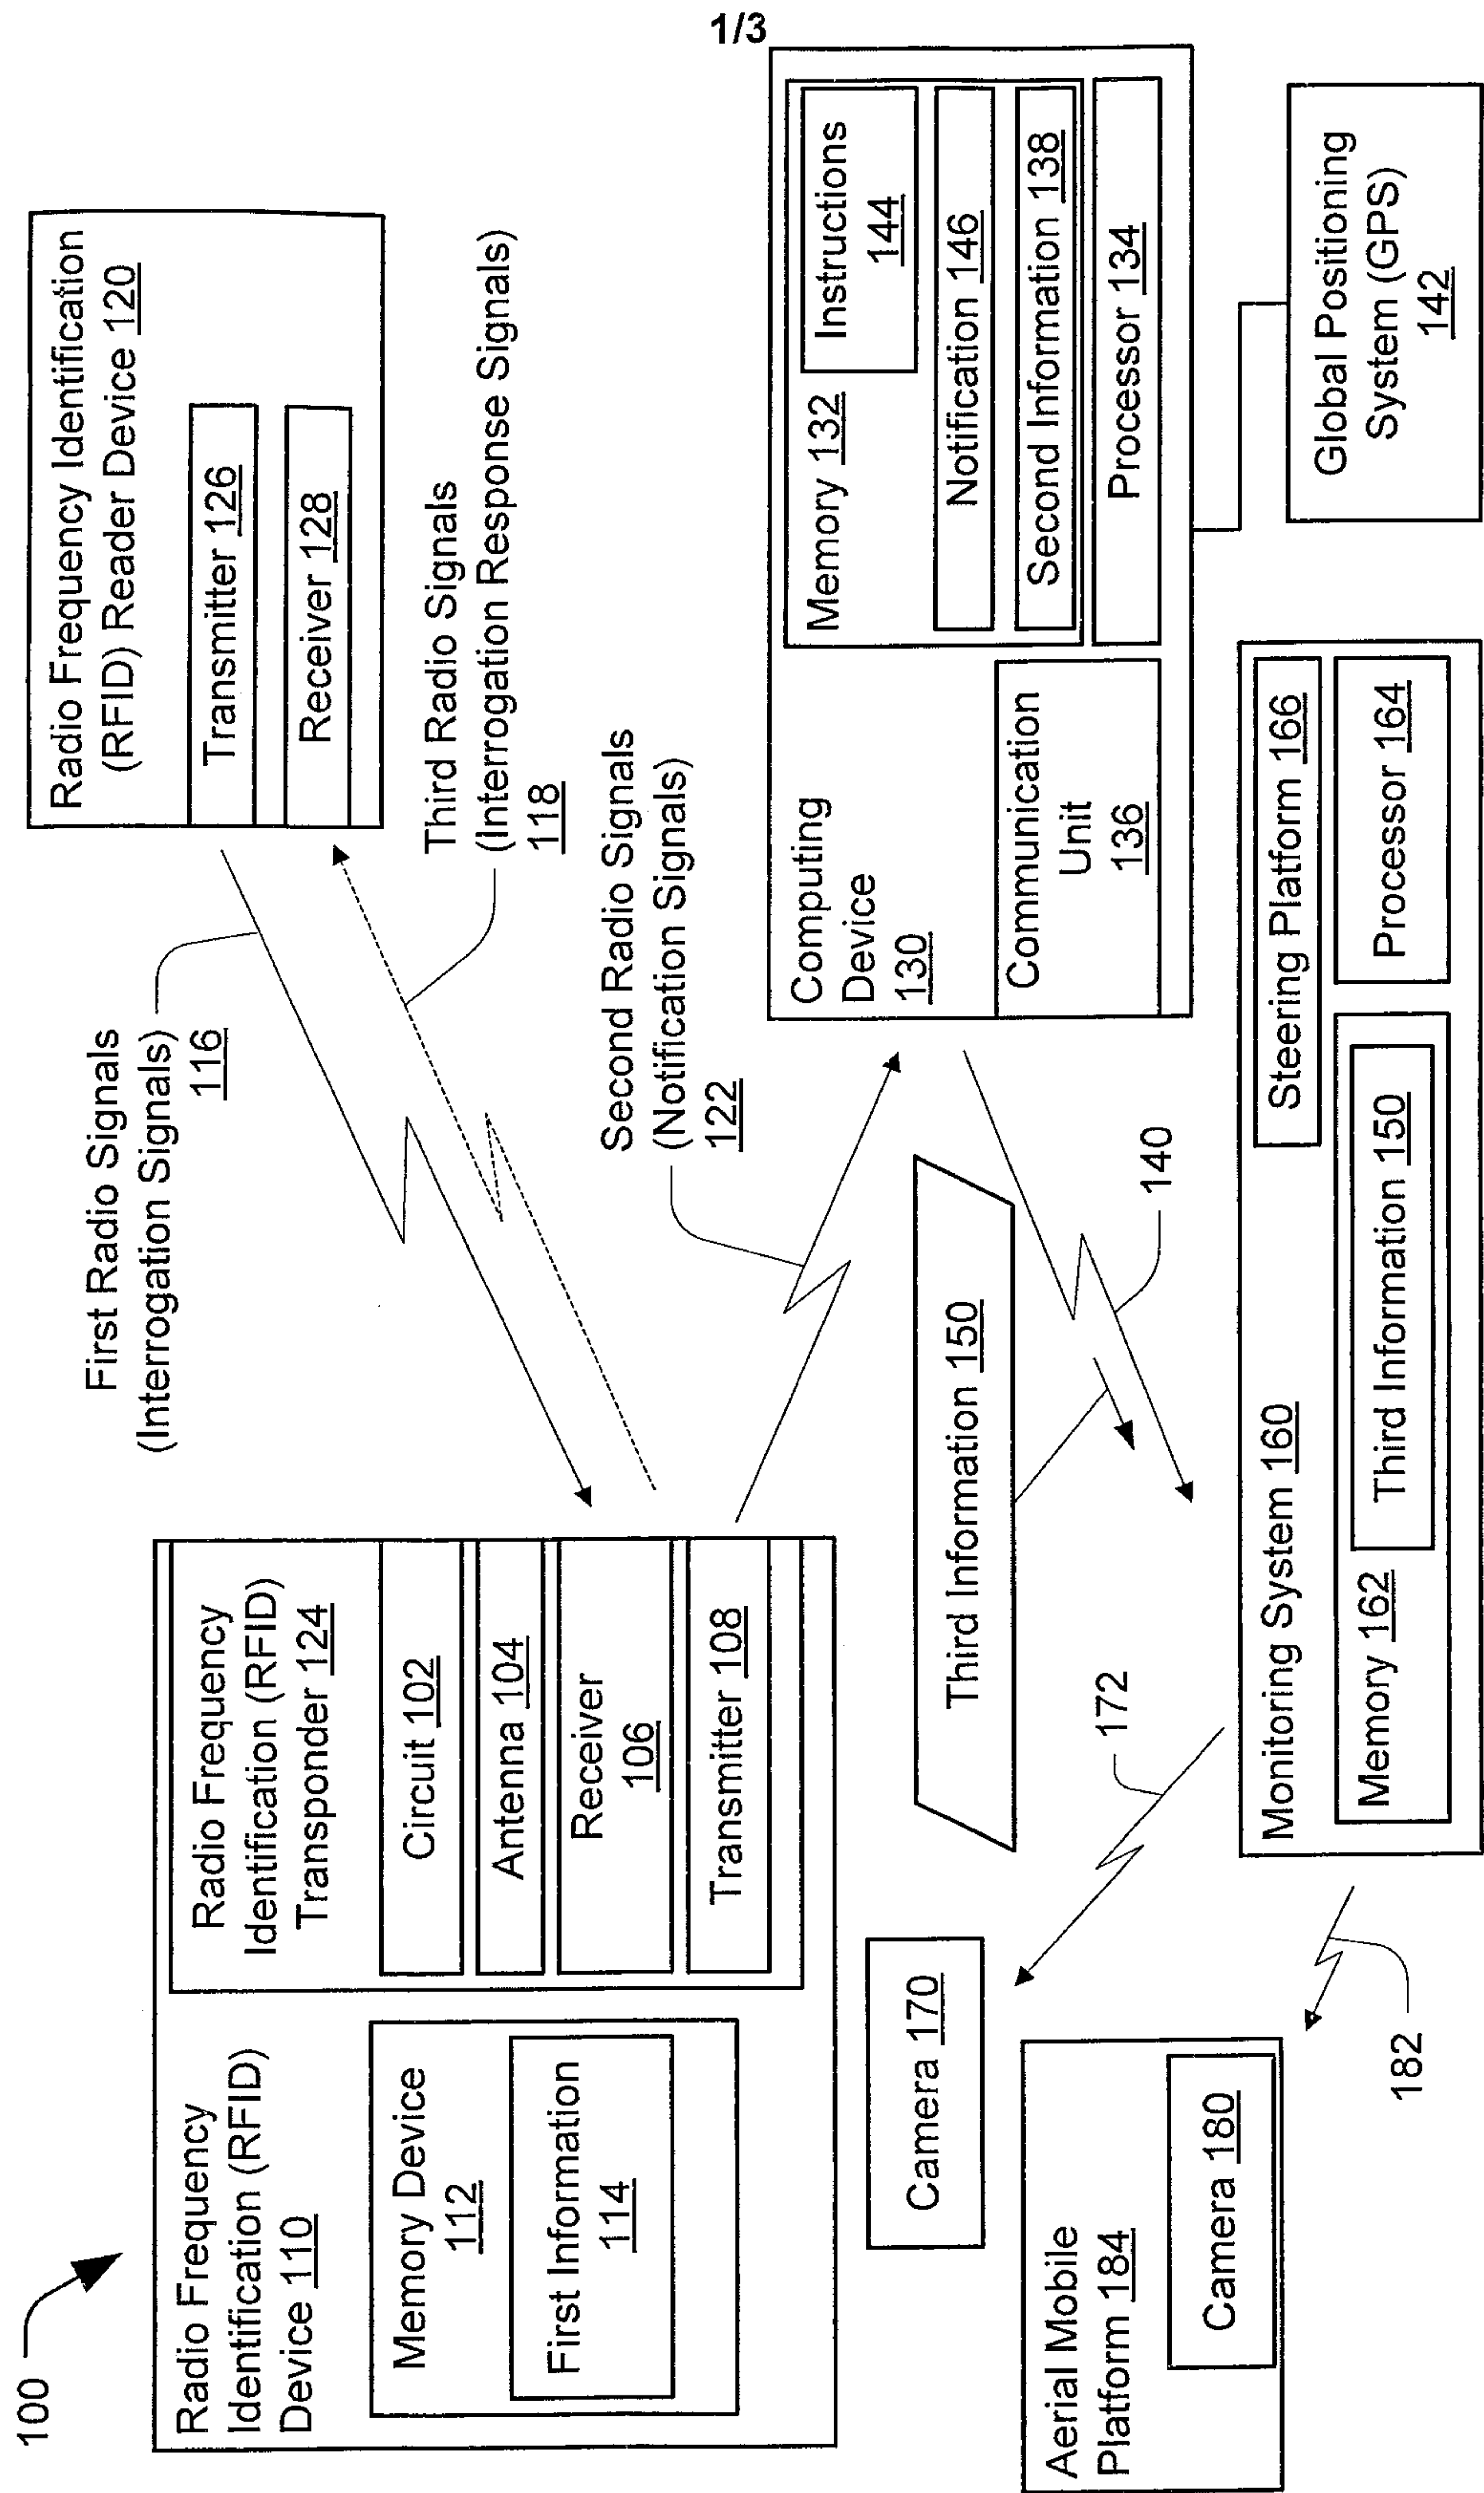

2/3

200 

210

Receive, at a receiver of a radio frequency identification (RFID) device, an interrogation signal transmitted over a first frequency band from an RFID reader device



220

In response to receiving the interrogation signal, transmit, from the RFID device, a notification signal over a second frequency band to a computing device, the computing device distinct from the RFID reader device, where the second frequency band is distinct from the first frequency band, and where the notification signal includes data indicating that the interrogation signal was received at the RFID device

FIG. 2

3/3

300

