



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2391852 C 2007/07/31

(11)(21) **2 391 852**


(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2000/08/31
(87) Date publication PCT/PCT Publication Date: 2001/03/08
(45) Date de délivrance/Issue Date: 2007/07/31
(85) Entrée phase nationale/National Entry: 2002/02/26
(86) N° demande PCT/PCT Application No.: US 2000/040796
(87) N° publication PCT/PCT Publication No.: 2001/015989
(30) Priorité/Priority: 1999/08/31 (US09/386,702)

(51) Cl.Int./Int.Cl. *B65D 41/16* (2006.01),
B65D 1/16 (2006.01), *B65D 43/16* (2006.01)
(72) Inventeur/Inventor:
BUCHOLTZ, MICHAEL, US
(73) Propriétaire/Owner:
CSP TECHNOLOGIES, INC., US
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : RECIPIENT ETANCHE, OUVRABLE ET SON ENSEMBLE COUVERCLE
(54) Title: A LEAK PROOF, RESEALABLE CONTAINER AND CAP ASSEMBLY

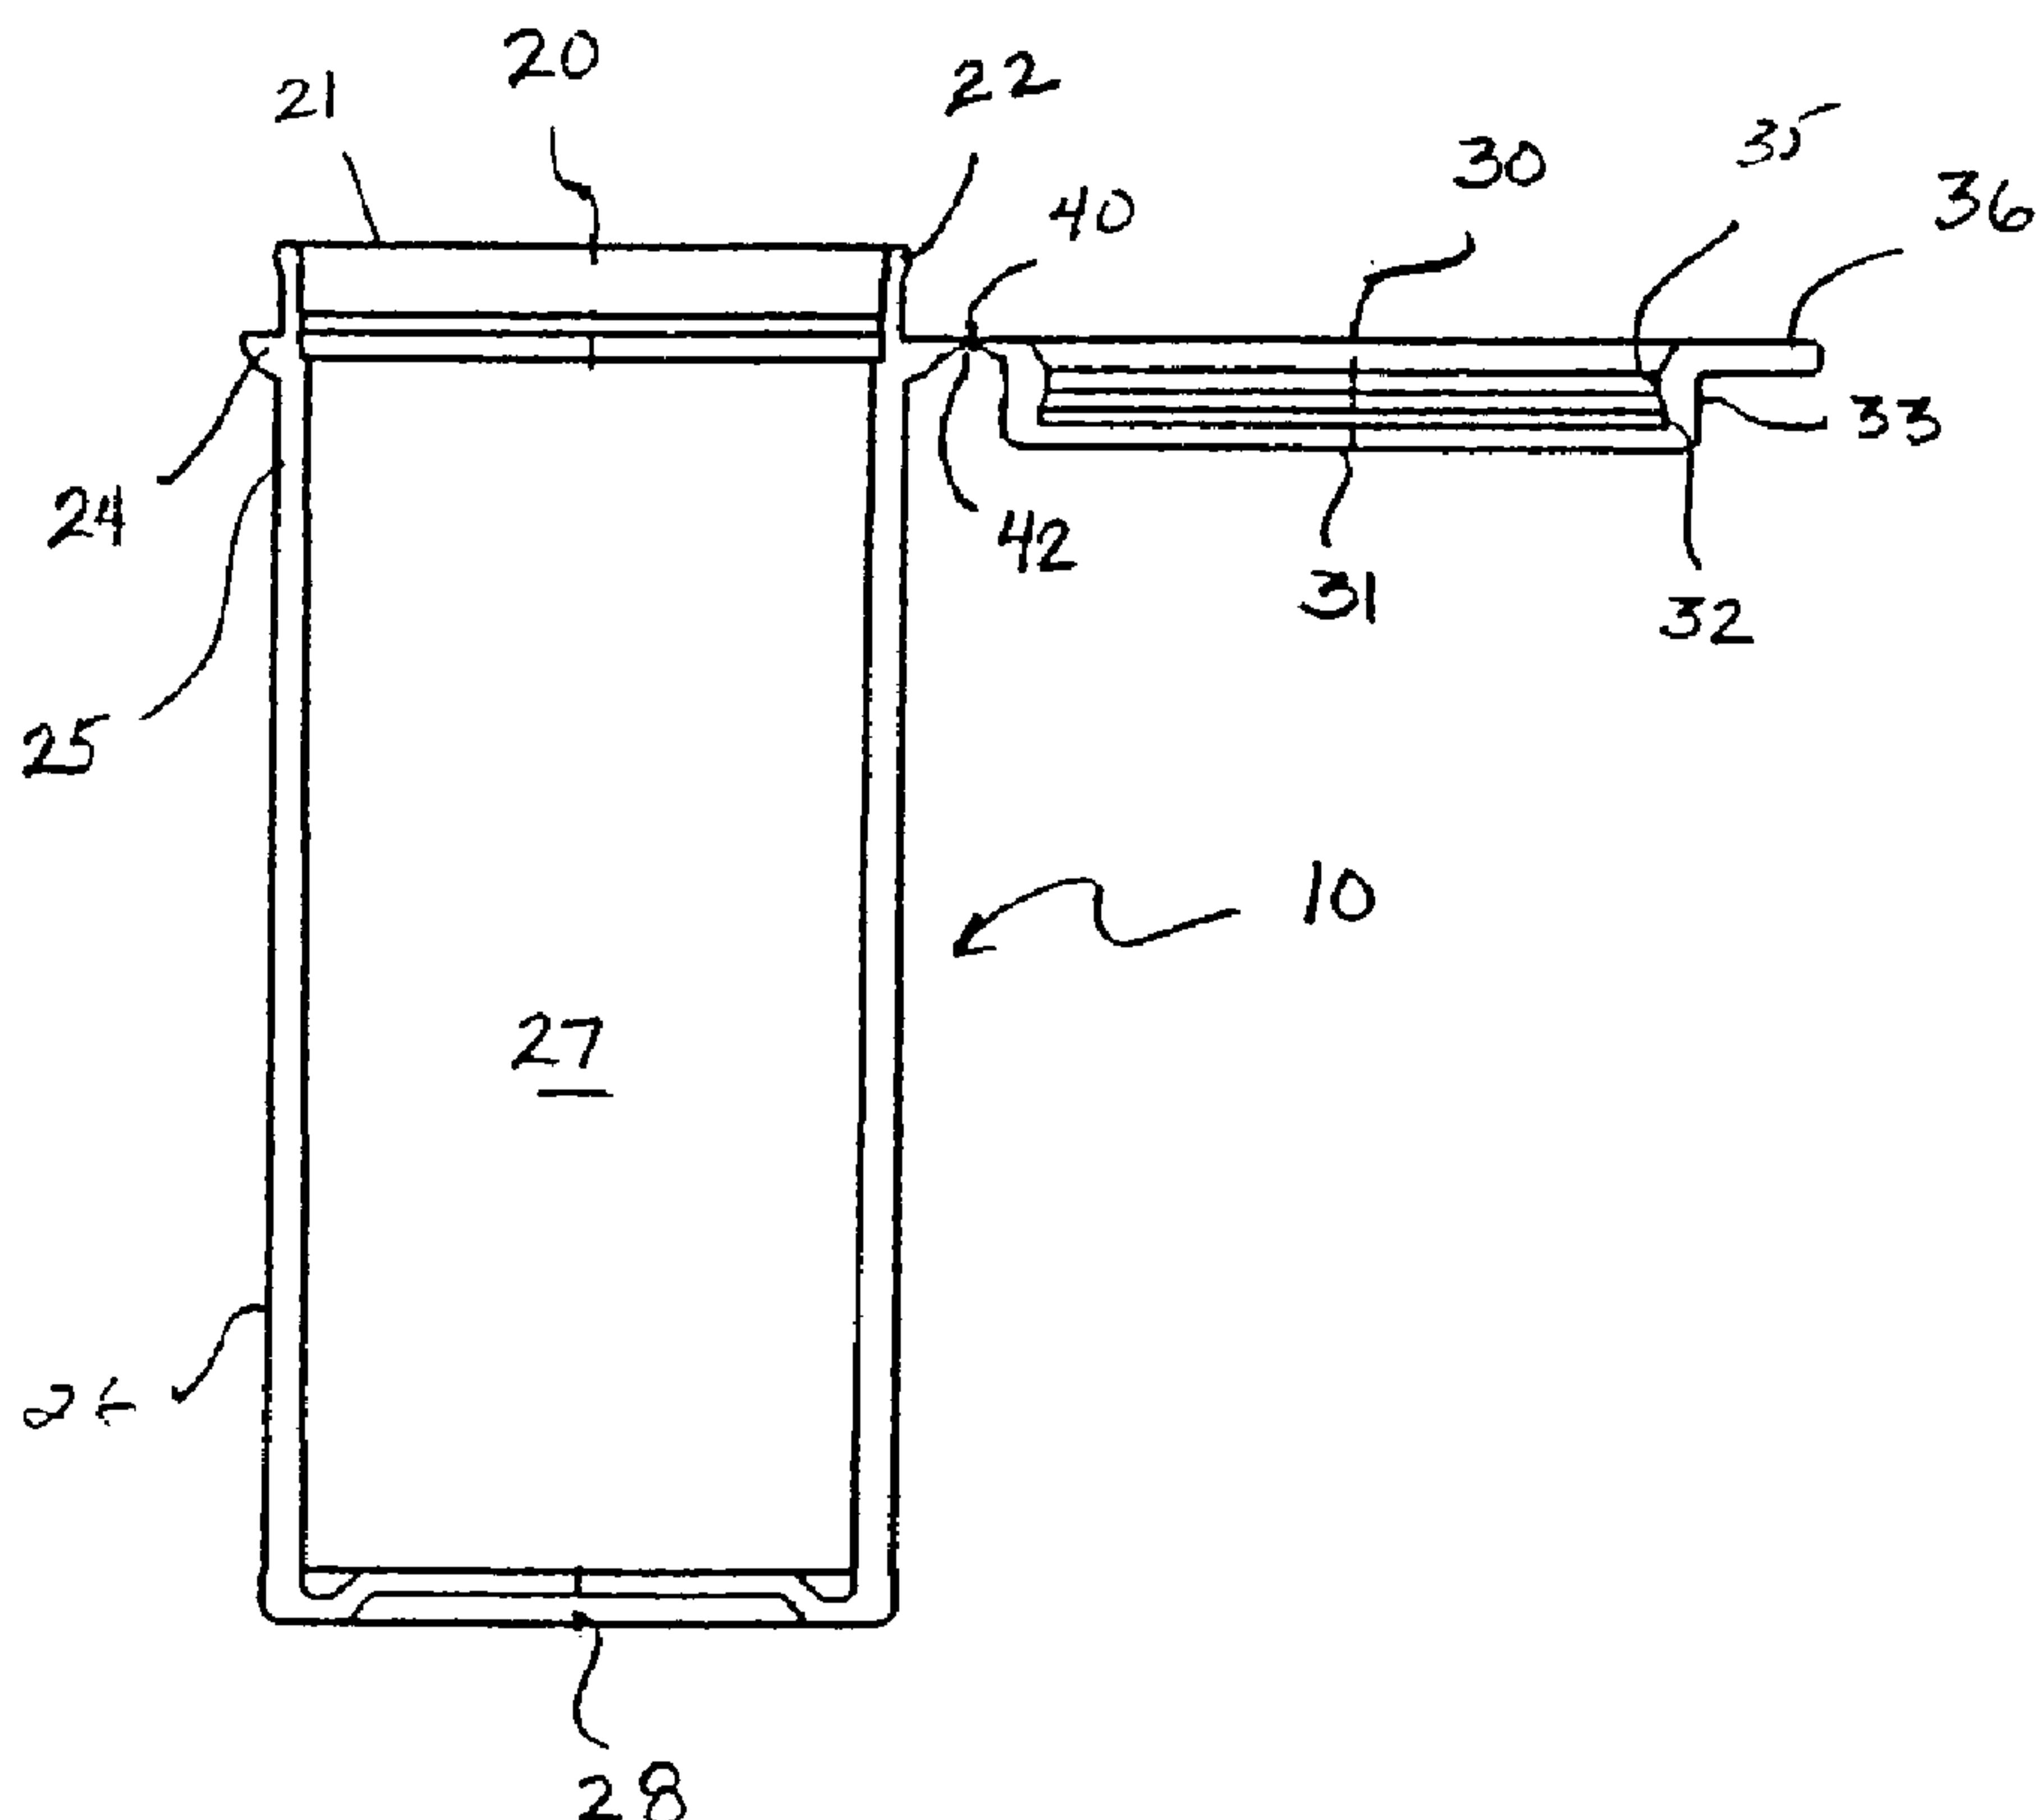

(57) Abrégé/Abstract:

A leakproof, resealable container and cap assembly (10), consisting essentially of a container (20) having a rim (22) at its upper portion and a cap (30) having a circular base (31) with an outer periphery, a cylindrical tubular skirt (33) having an inner wall with at least one recess (32), a thumb tab (36) for facilitating the opening and closing of the container (20), and a hinge (40) connecting the cap (30) to the container; and in a closed position, the skirt (33) of the cap overlies the container (20) and the rim (22) of the container (30) is situated within the recess (32) of the inner wall of the skirt (33) of the cap (30).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/15989 A1(51) International Patent Classification⁷: **B65D 41/16** (74) Agent: SCHINDLER, Barry, J.; Dreier & Bartiz LLP, 499 Park Avenue, New York, NY 10022 (US).

(21) International Application Number: PCT/US00/40796

(81) Designated States (national): AU, BR, CA, JP, MX, NO, NZ.

(22) International Filing Date: 31 August 2000 (31.08.2000)

(25) Filing Language:

English

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(26) Publication Language:

English

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

(30) Priority Data:


09/386,702 31 August 1999 (31.08.1999) US

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(71) Applicant: CAPITOL SPECIALTY PLASTICS, INC.
[US/US]; 2039 McMillan Street, Auburn, AL 36832 (US).

(72) Inventor: BUCHOLTZ, Michael; 8314 Bliestein Road, Colden, NY 14033 (US).

(54) Title: A LEAK PROOF, RESEALABLE CONTAINER AND CAP ASSEMBLY

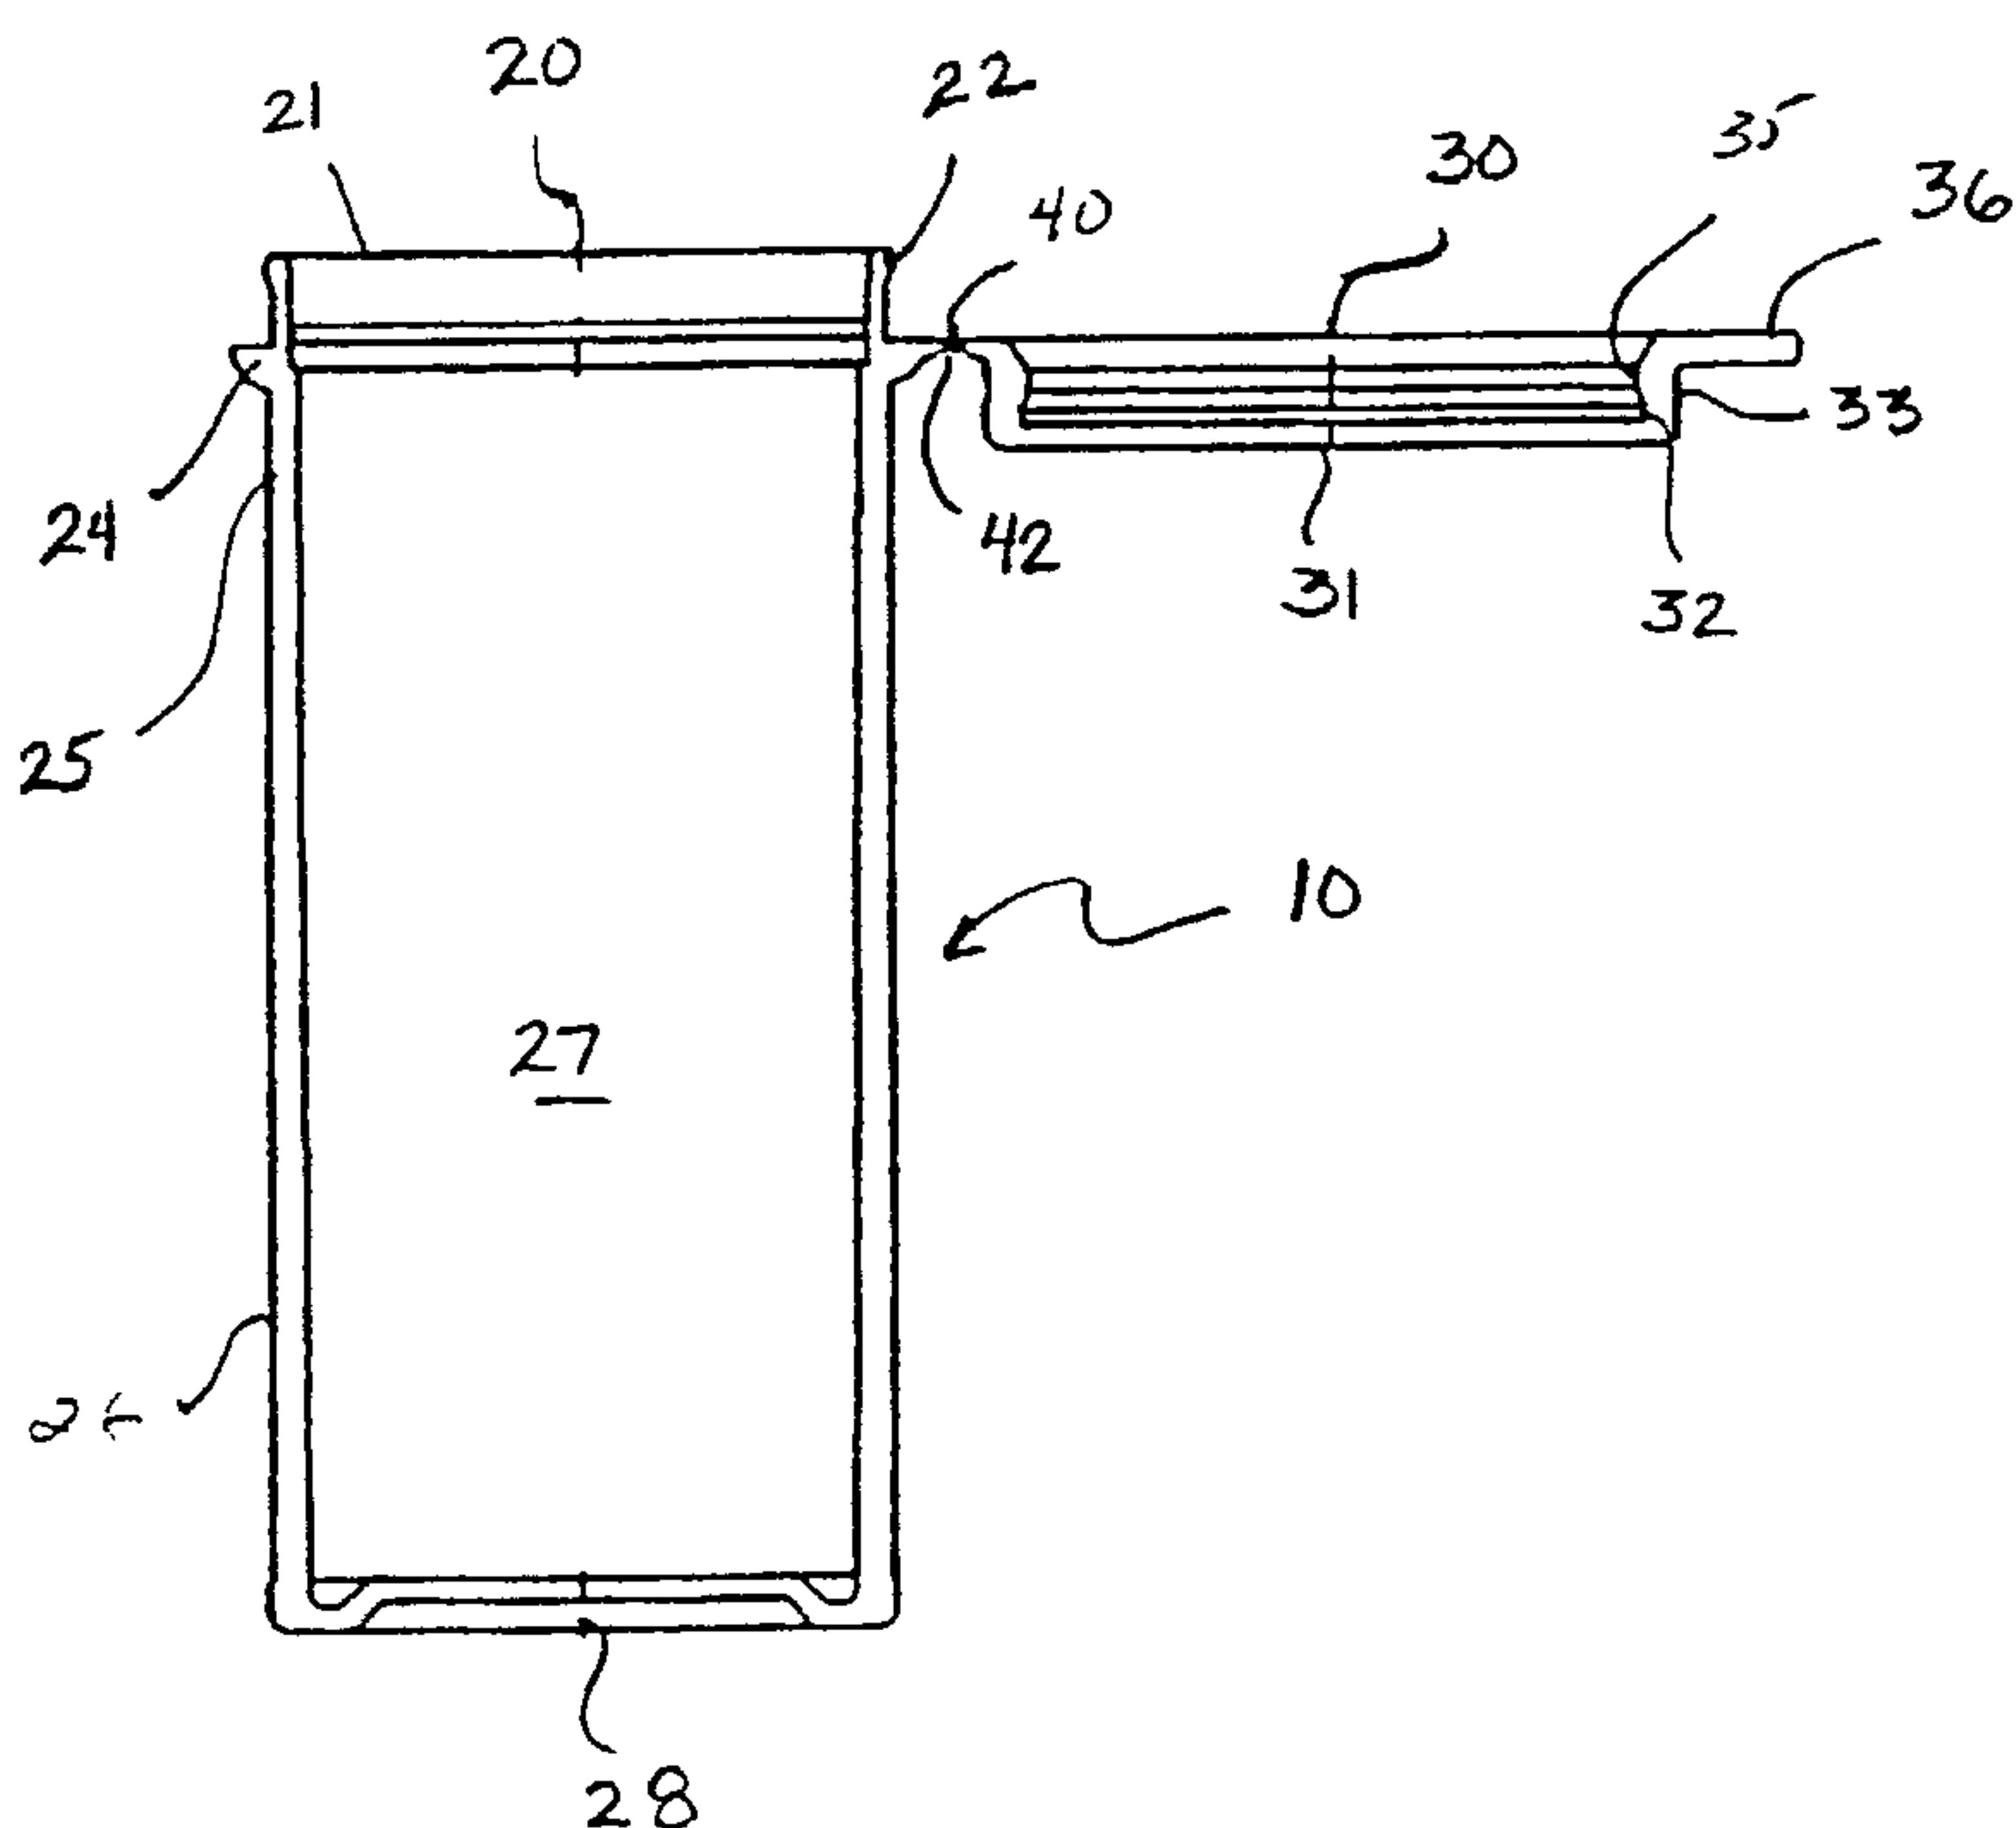

(57) Abstract: A leakproof, resealable container and cap assembly (10), consisting essentially of a container (20) having a rim (22) at its upper portion and a cap (30) having a circular base (31) with an outer periphery, a cylindrical tubular skirt (33) having an inner wall with at least one recess (32), a thumb tab (36) for facilitating the opening and closing of the container (20), and a hinge (40) connecting the cap (30) to the container; and in a closed position, the skirt (33) of the cap overlies the container (30) and the rim (22) of the container (30) is situated within the recess (32) of the inner wall of the skirt (33) of the cap (30).

WO 01/15989 A1

29981-38

BACKGROUND OF THE INVENTION:

It is desirable to provide a container that can be opened, sealed, or resealed using a frontal, singular motion and that can still produce a leakproof seal. For example, 5 during laboratory applications such as drug testing, users of the containers desire the accessibility and resealability of the specimen by simply using frontal thumb pressure upon the thumb tab of the container to result in a leakproof container. In addition to ease to use, the integrity of the 10 specimens in the containers is significant in ensuring proper chain of custody requirements of the container contents.

SUMMARY OF THE INVENTION:

The present invention relates to a leakproof and 15 resealable container and cap assembly. In one embodiment of the present invention, the assembly comprises a cap and container attached by a hinge. The container has an upper portion and an outer surface, and at the upper portion, the container has a rim. The cap has a circular base with an 20 outer periphery and a cylindrical tubular skirt extending perpendicularly and outwardly around said outer periphery of the base; the skirt has an inner wall which includes at least one recess. In another embodiment, the cap has opposing ends; the cap has a thumb tab for facilitating the 25 opening and closing of the container and the hinge attached to the container. The thumb tab and hinge are positioned on opposing ends of the cap and extend perpendicularly and outwardly from the skirt of the cap. In a further embodiment, the skirt of the cap overlies the container and 30 the rim of the container is situated within the recess of

29981-38

the inner wall of the skirt of the cap during a closed position.

In yet another embodiment, the container further comprises a flange (i.e. an anti-decapping ring that serves 5 to prevent the cap from being unintentionally opened and also serves as a visual scale to assure uniform cap position around the flange) projecting radially outwardly from the outer surface of the container. In still another embodiment, the hinge is attached to the container flange 10 and the skirt of the cap is designed to overlie the rim of the container and be in uniform close proximity to the container flange during the closed position.

In a further embodiment, the cap and container assembly, in a closed position, forms an air tight seal.

15 In another embodiment, the cap and container are molded of plastic. In yet another embodiment, the cap and container are integrally molded of the plastic to form a hinge therebetween. In still another embodiment, the cap is fit to the container during the closed position to form a 20 leakproof, air tight seal.

In a further embodiment, the hinge of the assembly has a recess. The recess forms two elements, the first element being attached to the skirt of the cap and the second element being attached to the container. In still a 25 further embodiment, the recess functions as a bending point during the opening and closing of the container.

The present invention also relates to a method of manufacturing a leakproof resealable container and cap assembly, comprising: providing a container and cap 30 connected by a hinge, the container has an upper portion and

30768-15

an outer surface, the container includes a rim at the upper portion; the cap has a circular base with an outer periphery and a cylindrical tubular skirt extending perpendicularly and outwardly around the outer periphery of the base, the 5 skirt has an inner wall having at least one recess; the cap has opposing ends, the cap including a thumb tab; the tab and hinge is positioned on opposing ends of the cap and extend perpendicularly and outwardly from the skirt of the cap; and closing the container by applying, in a singular 10 motion, a frontal, downward pressure upon the thumb tab to allow the skirt to overlie the container and the rim of the container to be situated within the recess of the inner wall of the skirt of the cap.

According to one aspect of the present invention, 15 there is provided a method of using a leakproof resealable container and cap assembly, comprising the steps of: gripping the container and cap assembly with one hand; opening the container and cap assembly at a thumb tab, wherein: a) the cap is integrally attached to the container; 20 b) the container having an upper portion and an inner and outer surface, the container having a cylindrical upstanding rim at the upper portion, the rim is defined as that portion of the container that contacts an inner wall of the cap, the rim having an inner and outer wall rim, whereby the inner 25 rim wall is substantially parallel to the inner surface of the container; c) the cap having a circular base with an outer periphery and a cylindrical tubular skirt extending perpendicularly and outwardly around the outer periphery of the base, the skirt having an inner wall, the inner wall of 30 the skirt comprising a first portion that is conically tapered, extends downward from a top portion of the skirt and is planar, a second portion connected to the first portion and that is substantially perpendicular to the base,

30768-15

extends downward from the first portion, and is planar, a third portion connected to the second portion and extends downward from the second portion, a fourth portion connected to the third portion and extends downward from the third 5 portion, the inner wall having at least one cap recess formed by at least the third and fourth portions of the inner wall of the skirt, the cap having opposing ends, the cap including a thumb tab for facilitating the opening and closing of the container, d) the cap consisting of one hinge 10 attached to the container wherein the hinge has at least one hinge recess bend point that functions to rotate the cap at one pivot point, the thumb tab and the hinge being positioned on substantially opposing ends of the cap and extending perpendicularly and outwardly from the skirt of 15 the cap; gripping the container and cap assembly with one hand; applying a sufficient frontal, downward pressure upon the thumb tab of the cap with the one hand until the skirt of the cap overlies the container and at least a portion of the rim of the container engages the cap recess of the inner 20 wall of the skirt of the cap so as to form a leakproof seal; wherein the leakproof seal is formed without the presence of an interlocking mechanism, whereby the interlocking mechanism consists of a projection, a gap and the annular skirt of the cap that combine to form an annular channel for 25 interlocking with the rim of the container, the annular channel is an annular gap formed between the annular projection and the inner wall of the skirt of the cap whereby the annular projection projects from an interior surface of the cap and is substantially perpendicular to the 30 interior surface of the cap; gripping the container and cap assembly with one hand; opening the container and cap; gripping the container and cap assembly with one hand; again applying a sufficient frontal, downward pressure upon the thumb tab of the cap until the skirt of the cap overlies the

30768-15

container at least a portion of the rim of the container engages the cap recess of the inner wall of the skirt of the cap so as to form a leakproof seal.

According to another aspect of the present

5 invention, there is provided a method of using an air-tight resealable container and cap assembly, comprising the steps of: gripping the container and cap assembly with one hand; opening the container and cap assembly at a thumb tab, wherein: a) the cap is integrally attached to the container;

10 b) the container having an upper portion and an inner and outer surface, the container having a cylindrical upstanding rim at the upper portion, the rim is defined as that portion of the container that contacts an inner wall of the cap, the rim having an inner and outer wall rim, whereby the inner

15 rim wall is substantially parallel to the inner surface of the container; c) the cap having a circular base with an outer periphery and a cylindrical tubular skirt extending perpendicularly and outwardly around the outer periphery of the base, the skirt having an inner wall, the inner wall of

20 the skirt comprising a first portion that is conically tapered, extends downward from a top portion of the skirt and is planar, a second portion connected to the first portion and that is substantially perpendicular to the base, extends downward from the first portion, and is planar, a

25 third portion connected to the second portion and extends downward from the second portion, a fourth portion connected to the third portion and extends downward from the third portion, the inner wall having at least one cap recess formed by at least the third and fourth portions of the

30 inner wall of the skirt, the cap having opposing ends, the cap including a thumb tab for facilitating the opening and closing of the container, d) the cap consisting of one hinge attached to the container wherein the hinge has at least one

30768-15

hinge recess bend point that functions to rotate the cap at one pivot point, the thumb tab and the hinge being positioned on substantially opposing ends of the cap and extending perpendicularly and outwardly from the skirt of the cap; gripping the container and cap assembly with one hand; applying a sufficient frontal, downward pressure upon the thumb tab of the cap with the one hand until the skirt of the cap overlies the container and at least a portion of the rim of the container engages the cap recess of the inner wall of the skirt of the cap so as to form an airtight seal; wherein the airtight seal is formed without the presence of an interlocking mechanism, whereby the interlocking mechanism consists of a projection, a gap and the annular skirt of the cap that combine to form an annular channel for interlocking with the rim of the container, the annular channel is an annular gap formed between the annular projection and the inner wall of the skirt of the cap whereby the annular projection projects from an interior surface of the cap and is substantially perpendicular to the interior surface of the cap; gripping the container and cap assembly with one hand; opening the container and cap; gripping the container and cap assembly with one hand; again applying a sufficient frontal, downward pressure upon the thumb tab of the cap until the skirt of the cap overlies the container and at least a portion of the rim of the container engages the cap recess of the inner wall of the skirt of the cap so as to form an airtight seal.

BRIEF DESCRIPTION OF THE DRAWINGS:

A more complete appreciation of the present invention and many of the attendant advantages thereof will be readily understood by reference to the following description when considered in connection with the accompanying drawings in which:

30768-15

FIGURE 1 is a longitudinal sectional view of one embodiment through the leakproof, resealable container and cap assembly in accordance with the present invention;

FIGURE 2 is an overhead plan view of one embodiment of the container and the cap connected by the hinge in an opened position;

FIGURE 3 is a side elevation view of one embodiment of the container and cap assembly of the present invention in a closed position;

29981-38

FIGURE 4 is a cross-sectional side view of one embodiment of the assembly in a closed position; and

FIGURE 5 is a blow-up showing a portion of the cap and container of one embodiment of the container and cap assembly of the present invention.

Among those benefits and improvements that have been disclosed, other objects and advantages of this invention will become apparent from the following description taken in conjunction with the accompanying drawings. The drawings constitute a part of this specification and include exemplary embodiments of the present invention and illustrate various objects and features thereof.

DETAILED DESCRIPTION OF THE PRESENT INVENTION:

The present invention relates to a leakproof and resealable container and cap assembly. The term "resealable" means that the container can be opened/reopened and closed/reclosed a numerous amount of times. The term "leakproof" means that the container passes the blue crystal dye test. The blue crystal dye test is a visual test to detect leaks within a container seal. A container "passes" the blue crystal dye test if the white paper, in which the container is placed on, does not visually change color (i.e. The white paper does not become contaminated with the blue crystal dye liquid from the container). The blue crystal dye test procedure consists of the following: (a) the blue crystal dye liquid is prepared by adding one teaspoon of blue crystal dye powder to one gallon of alcohol and then thoroughly mixing the solution; (b) the blue crystal dye liquid is poured into the container (i.e. a sufficient

29981-38

amount of the dye liquid must be added so, when the container is placed upside down, the entire seal area must be covered); (c) the container is closed by applying, in a singular motion, a frontal downward pressure upon the thumb 5 tab (e.g. a user places his/her thumb parallel or on top of the thumb tab and applies a singular downward pressure) until the rim portion, adjacent to the thumb tab, contacts the inside flat part of the cap; (d) the container is placed upside down (i.e. inverted) on the white paper at room 10 temperature; and (e) after 30 minutes, the white paper is inspected to determine if the white paper is contaminated with the blue crystal dye liquid.

In another embodiment, the cap and container assembly, in a closed position, forms an air tight seal. 15 The term "air tight" means the moisture ingress of the container (after three days) was less than about 750 micrograms of water, preferably, about 250 micrograms of water, more preferably, about 150 micrograms of water determined by the following test method: (a) place one gram 20 plus or minus 0.25 grams of molecular sieve in the container and record the weight; (b) the container is closed by applying, in a singular motion, a frontal downward pressure upon the thumb tab until the rim portion, adjacent to the thumb tab, contacts the inside flat part of the cap also 25 adjacent to the thumb tab; (c) place the closed container in an environmental chamber at conditions of 80% relative humidity and 72°F; (d) after one day, weigh the container containing the molecular sieve; (e) after four days, weigh the container containing the molecular sieve; and (f) 30 subtract the first day sample from the fourth day sample to calculate the moisture ingress of the container in units of micrograms of water.

29981-38

Referring now to the drawings wherein like reference numerals designate identical or corresponding parts throughout the several views, and more particularly to FIG. 1 wherein one embodiment of the leakproof, resealable 5 cap and container assembly 10 of the present invention is illustrated. The assembly 10 consist essentially of a container 20 having a base 28, an internal cavity 27, an outer surface 25, an upper 21 and lower 26 portion. The container 20 has a rim 22 at the upper portion 21. The 10 assembly 10 also has a cap 30 which has a circular base 31 and a cylindrical tubular skirt 33 extending perpendicularly and outwardly around the outer periphery of the base 31. The cap 30 has opposing ends, at one end the cap 30 has a thumb tab 36 for facilitating the opening and closing of the 15 container, and a hinge 40 attached to the container 20. The tab 36 and hinge 40 are positioned on opposing ends of the cap and extend perpendicularly and outwardly from the skirt 33 of the cap 30.

The container may also have a flange 24 projecting 20 radially outwardly from the outer surface 25 of the container 20. The hinge 40 may also be attached to the container flange 24. The hinge 40 also has a recess 42 that functions as a bending point during the opening and closing of the container.

25 Suitable material for assembly 10 includes plastic (e.g. thermoplastics such as polypropylene and polyethylene). In one embodiment, the cap 30 and container 20 may be integrally molded of the plastic to form a hinge 40 therebetween. In one embodiment, the cap 30 and 30 container 20 may be produced in a molding process and, in another embodiment, may be molded in accordance with the

29981-38

mold similar to that disclosed in U.S. Patent Nos. 4,783,056 and 4,812,116, respectively. In a further embodiment, with such a process and mold, the assembly, including the cap, container and hinge may be produced in accordance with the 5 operation disclosed in U.S. Patent Nos. 4,783,056 and 4,812,116 or, in another embodiment, may be produced in accordance with U.S. Patent No. 5,723,085. The disclosure of these patents are incorporated by reference herein.

In another embodiment, two step (*i.e.* thickened 10 sections of the hinge) bridge the recess 42 on opposing ends of the recess. In yet a further embodiment, the first element of the hinge 40 is from about 0.03 inches to about 0.125 inches, preferably 0.06 inches, measured from the center-line of the recess and the outside perimeter of the 15 cap. In still yet another embodiment, the second element of the hinge 40 is from about 0.1 inches to about 0.195 inches, preferably 0.125 inches, measured from the center-line of the recess to the outside perimeter of container.

In another embodiment, the thumb tab 36 (which is 20 located in the frontal portion of the cap) is from about 0.125 inches to about 0.325 inches, preferably 0.235 inches, measured from the outside perimeter of the cap to the end of the tab. In still another embodiment, the assembly 10 can be sealed and/or resealed by applying, in a singular motion, 25 a frontal, downward pressure upon the thumb tab to obtain a leakproof seal. As an example, a user places his/her thumb parallel or on top of the thumb tab (*i.e.* the frontal portion of the container) and applies a singular downward pressure until an audible snap is heard and then verified by 30 visual inspection of uniform cap position around the flange.

29981-38

FIG. 2 refers to an overhead plan view of the assembly 10 to the present invention in an opened position. The assembly 10 includes the container 20 and the cap 30 connected by the hinge 40. The container 20 has the cavity 27, the rim 22, and the flange 24. The cap includes the circular base 31, the inner wall 35 with the recess 32, and the thumb tab 36. The hinge 40 has two elements, 41 and 43, respectively, formed by the recess. One element 41 is attached to the flange 24 of the container 20 and the second element 43 is attached to the cap 30.

FIG. 3 depicts a side elevation view of the present invention in a closed position. The cap and container assembly 10 comprises the cap 30 and the container 20 connected by the hinge 40. The container 20 has a flange 24 extending from the outer surface 25 and a base 28. The cap 30 has a cylindrical skirt 33 and the thumb tab 36 extending perpendicularly outwardly from the skirt 33. In a closed position, the skirt 33 of the cap 30 overlies the container 20 and lies upon the flange 24 of the container 20.

FIG. 4 illustrates a cross-section view of the assembly 10 in a closed position. The skirt 33 of the cap 30 overlies the container 20 and lies upon the flange 24 of the container 30 while the rim 22 of the container 20 is situated within the recess 32 of the inner wall 35 of the skirt 33 of the cap 30. The container 20 can be sealed and/or resealed by applying, in a singular motion, frontal, downward pressure upon the thumb tab 36 to obtain a leakproof seal and/or an air tight seal.

FIG. 5 illustrates a cross-section view of one embodiment of the cap and container assembly of the present

29981-38

invention made of polypropylene with measurements and angles detailed in Figure 5. In this embodiment, the rim 22 has an inner wall rim 22a and an outer wall rim 22b and has one engagement surface 22c, which has about a 20 degree vertical 5 inclination for locking engagement against the corresponding surface of the cap. The rim 22 also has a rounded edge, which has about a 5 degree vertical inclination, for ease of closing. The inner wall of the skirt 33 of the cap 30 has a recess 32 having a first angular plane surface 32a of about 10 5 degrees from the reference vertical, a second angular plane surface 32b of about 21 degrees from a reference vertical, and a third angular plane surface 32c of about 31 degrees from a reference vertical. In another embodiment, the recess 32 has two angular plane surfaces--(i.e. the 5 15 degree angular plane surface of Figure 5 is eliminated).

Numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the attendant claims attached hereto, this 20 invention may be practiced otherwise than are specifically disclosed herein.

30768-15

CLAIMS:

1. A method of using a leakproof resealable container and cap assembly, comprising the steps of:

gripping the container and cap assembly with one
5 hand;

opening the container and cap assembly at a thumb tab, wherein: a) the cap is integrally attached to the container; b) the container having an upper portion and an inner and outer surface, the container having a cylindrical upstanding rim at the upper portion, the rim is defined as that portion of the container that contacts an inner wall of the cap, the rim having an inner and outer wall rim, whereby the inner rim wall is substantially parallel to the inner surface of the container; c) the cap having a circular base with an outer periphery and a cylindrical tubular skirt extending perpendicularly and outwardly around the outer periphery of the base, the skirt having an inner wall, the inner wall of the skirt comprising a first portion that is conically tapered, extends downward from a top portion of the skirt and is planar, a second portion connected to the first portion and that is substantially perpendicular to the base, extends downward from the first portion, and is planar, a third portion connected to the second portion and extends downward from the second portion, a fourth portion connected to the third portion and extends downward from the third portion, the inner wall having at least one cap recess formed by at least the third and fourth portions of the inner wall of the skirt, the cap having opposing ends, the cap including a thumb tab for facilitating the opening and closing of the container, d) the cap consisting of one hinge attached to the container wherein the hinge has at least one hinge recess bend point that functions to rotate the cap at

30768-15

one pivot point, the thumb tab and the hinge being positioned on substantially opposing ends of the cap and extending perpendicularly and outwardly from the skirt of the cap;

5 gripping the container and cap assembly with one hand;

 applying a sufficient frontal, downward pressure upon the thumb tab of the cap with the one hand until the skirt of the cap overlies the container and at least a 10 portion of the rim of the container engages the cap recess of the inner wall of the skirt of the cap so as to form a leakproof seal; wherein the leakproof seal is formed without the presence of an interlocking mechanism, whereby the interlocking mechanism consists of a projection, a gap and 15 the annular skirt of the cap that combine to form an annular channel for interlocking with the rim of the container, the annular channel is an annular gap formed between the annular projection and the inner wall of the skirt of the cap whereby the annular projection projects from an interior 20 surface of the cap and is substantially perpendicular to the interior surface of the cap;

 gripping the container and cap assembly with one hand;

 opening the container and cap;

25 gripping the container and cap assembly with one hand;

 again applying a sufficient frontal, downward pressure upon the thumb tab of the cap until the skirt of the cap overlies the container at least a portion of the rim

30768-15

of the container engages the cap recess of the inner wall of the skirt of the cap so as to form a leakproof seal.

2. The method of using a leakproof resealable container and cap assembly of claim 1 wherein a flange 5 projects radially outwardly from the outer surface of the container.

3. The method of using a leakproof resealable container and cap assembly of claim 1 wherein the container and cap assembly are molded of plastic.

10 4. The method of using a leakproof resealable container and cap assembly of claim 3 wherein the hinge recess forms a first element and a second element, the first element being attached to the skirt of said cap and the second element being attached to the container; the recess 15 functions as a bending point during the opening and closing of the container.

5. The method of using a leakproof resealable container and cap assembly of claim 4 wherein the first element of the hinge is from about 0.03 inches to 20 about 0.125 inches measured from a center line of the recess and an outside perimeter of the cap.

6. The method of using a leakproof resealable container and cap assembly of claim 4 wherein the second element of the hinge is from about 0.1 inches to 25 about 0.195 inches measured from a center line of the recess to an outside perimeter of the container.

7. A method of using an air-tight resealable container and cap assembly, comprising the steps of:

gripping the container and cap assembly with one 30 hand;

30768-15

opening the container and cap assembly at a thumb tab, wherein: a) the cap is integrally attached to the container; b) the container having an upper portion and an inner and outer surface, the container having a cylindrical upstanding rim at the upper portion, the rim is defined as that portion of the container that contacts an inner wall of the cap, the rim having an inner and outer wall rim, whereby the inner rim wall is substantially parallel to the inner surface of the container; c) the cap having a circular base with an outer periphery and a cylindrical tubular skirt extending perpendicularly and outwardly around the outer periphery of the base, the skirt having an inner wall, the inner wall of the skirt comprising a first portion that is conically tapered, extends downward from a top portion of the skirt and is planar, a second portion connected to the first portion and that is substantially perpendicular to the base, extends downward from the first portion, and is planar, a third portion connected to the second portion and extends downward from the second portion, a fourth portion connected to the third portion and extends downward from the third portion, the inner wall having at least one cap recess formed by at least the third and fourth portions of the inner wall of the skirt, the cap having opposing ends, the cap including a thumb tab for facilitating the opening and closing of the container, d) the cap consisting of one hinge attached to the container wherein the hinge has at least one hinge recess bend point that functions to rotate the cap at one pivot point, the thumb tab and the hinge being positioned on substantially opposing ends of the cap and extending perpendicularly and outwardly from the skirt of the cap;

gripping the container and cap assembly with one hand;

30768-15

applying a sufficient frontal, downward pressure upon the thumb tab of the cap with the one hand until the skirt of the cap overlies the container and at least a portion of the rim of the container engages the cap recess 5 of the inner wall of the skirt of the cap so as to form an airtight seal; wherein the airtight seal is formed without the presence of an interlocking mechanism, whereby the interlocking mechanism consists of a projection, a gap and the annular skirt of the cap that combine to form an annular 10 channel for interlocking with the rim of the container, the annular channel is an annular gap formed between the annular projection and the inner wall of the skirt of the cap whereby the annular projection projects from an interior surface of the cap and is substantially perpendicular to the 15 interior surface of the cap;

gripping the container and cap assembly with one hand;

opening the container and cap;

gripping the container and cap assembly with one 20 hand;

again applying a sufficient frontal, downward pressure upon the thumb tab of the cap until the skirt of the cap overlies the container and at least a portion of the rim of the container engages the cap recess of the inner 25 wall of the skirt of the cap so as to form an airtight seal.

8. The method of using an air-tight resealable container and cap assembly of claim 7 wherein the recess of the hinge forms a first element and a second element, the first element being attached to the skin and the second 30 element being attached to the container, the first element of the hinge is from about 0.03 inches to about 0.125 inches,

30768-15

measured from a center line of the recess and an outside perimeter of the cap; and wherein the recess of the inner wall of said cap has angular plane surfaces of about 15 to about 35 degrees from a reference vertical.

5 9. The method of using an air-tight resealable container and cap assembly of claim 7, wherein the airtight ability of the assembly in the closed position is less than about 150 micrograms of water after three days.

FETHERSTONHAUGH & CO.
OTTAWA, CANADA

PATENT AGENTS

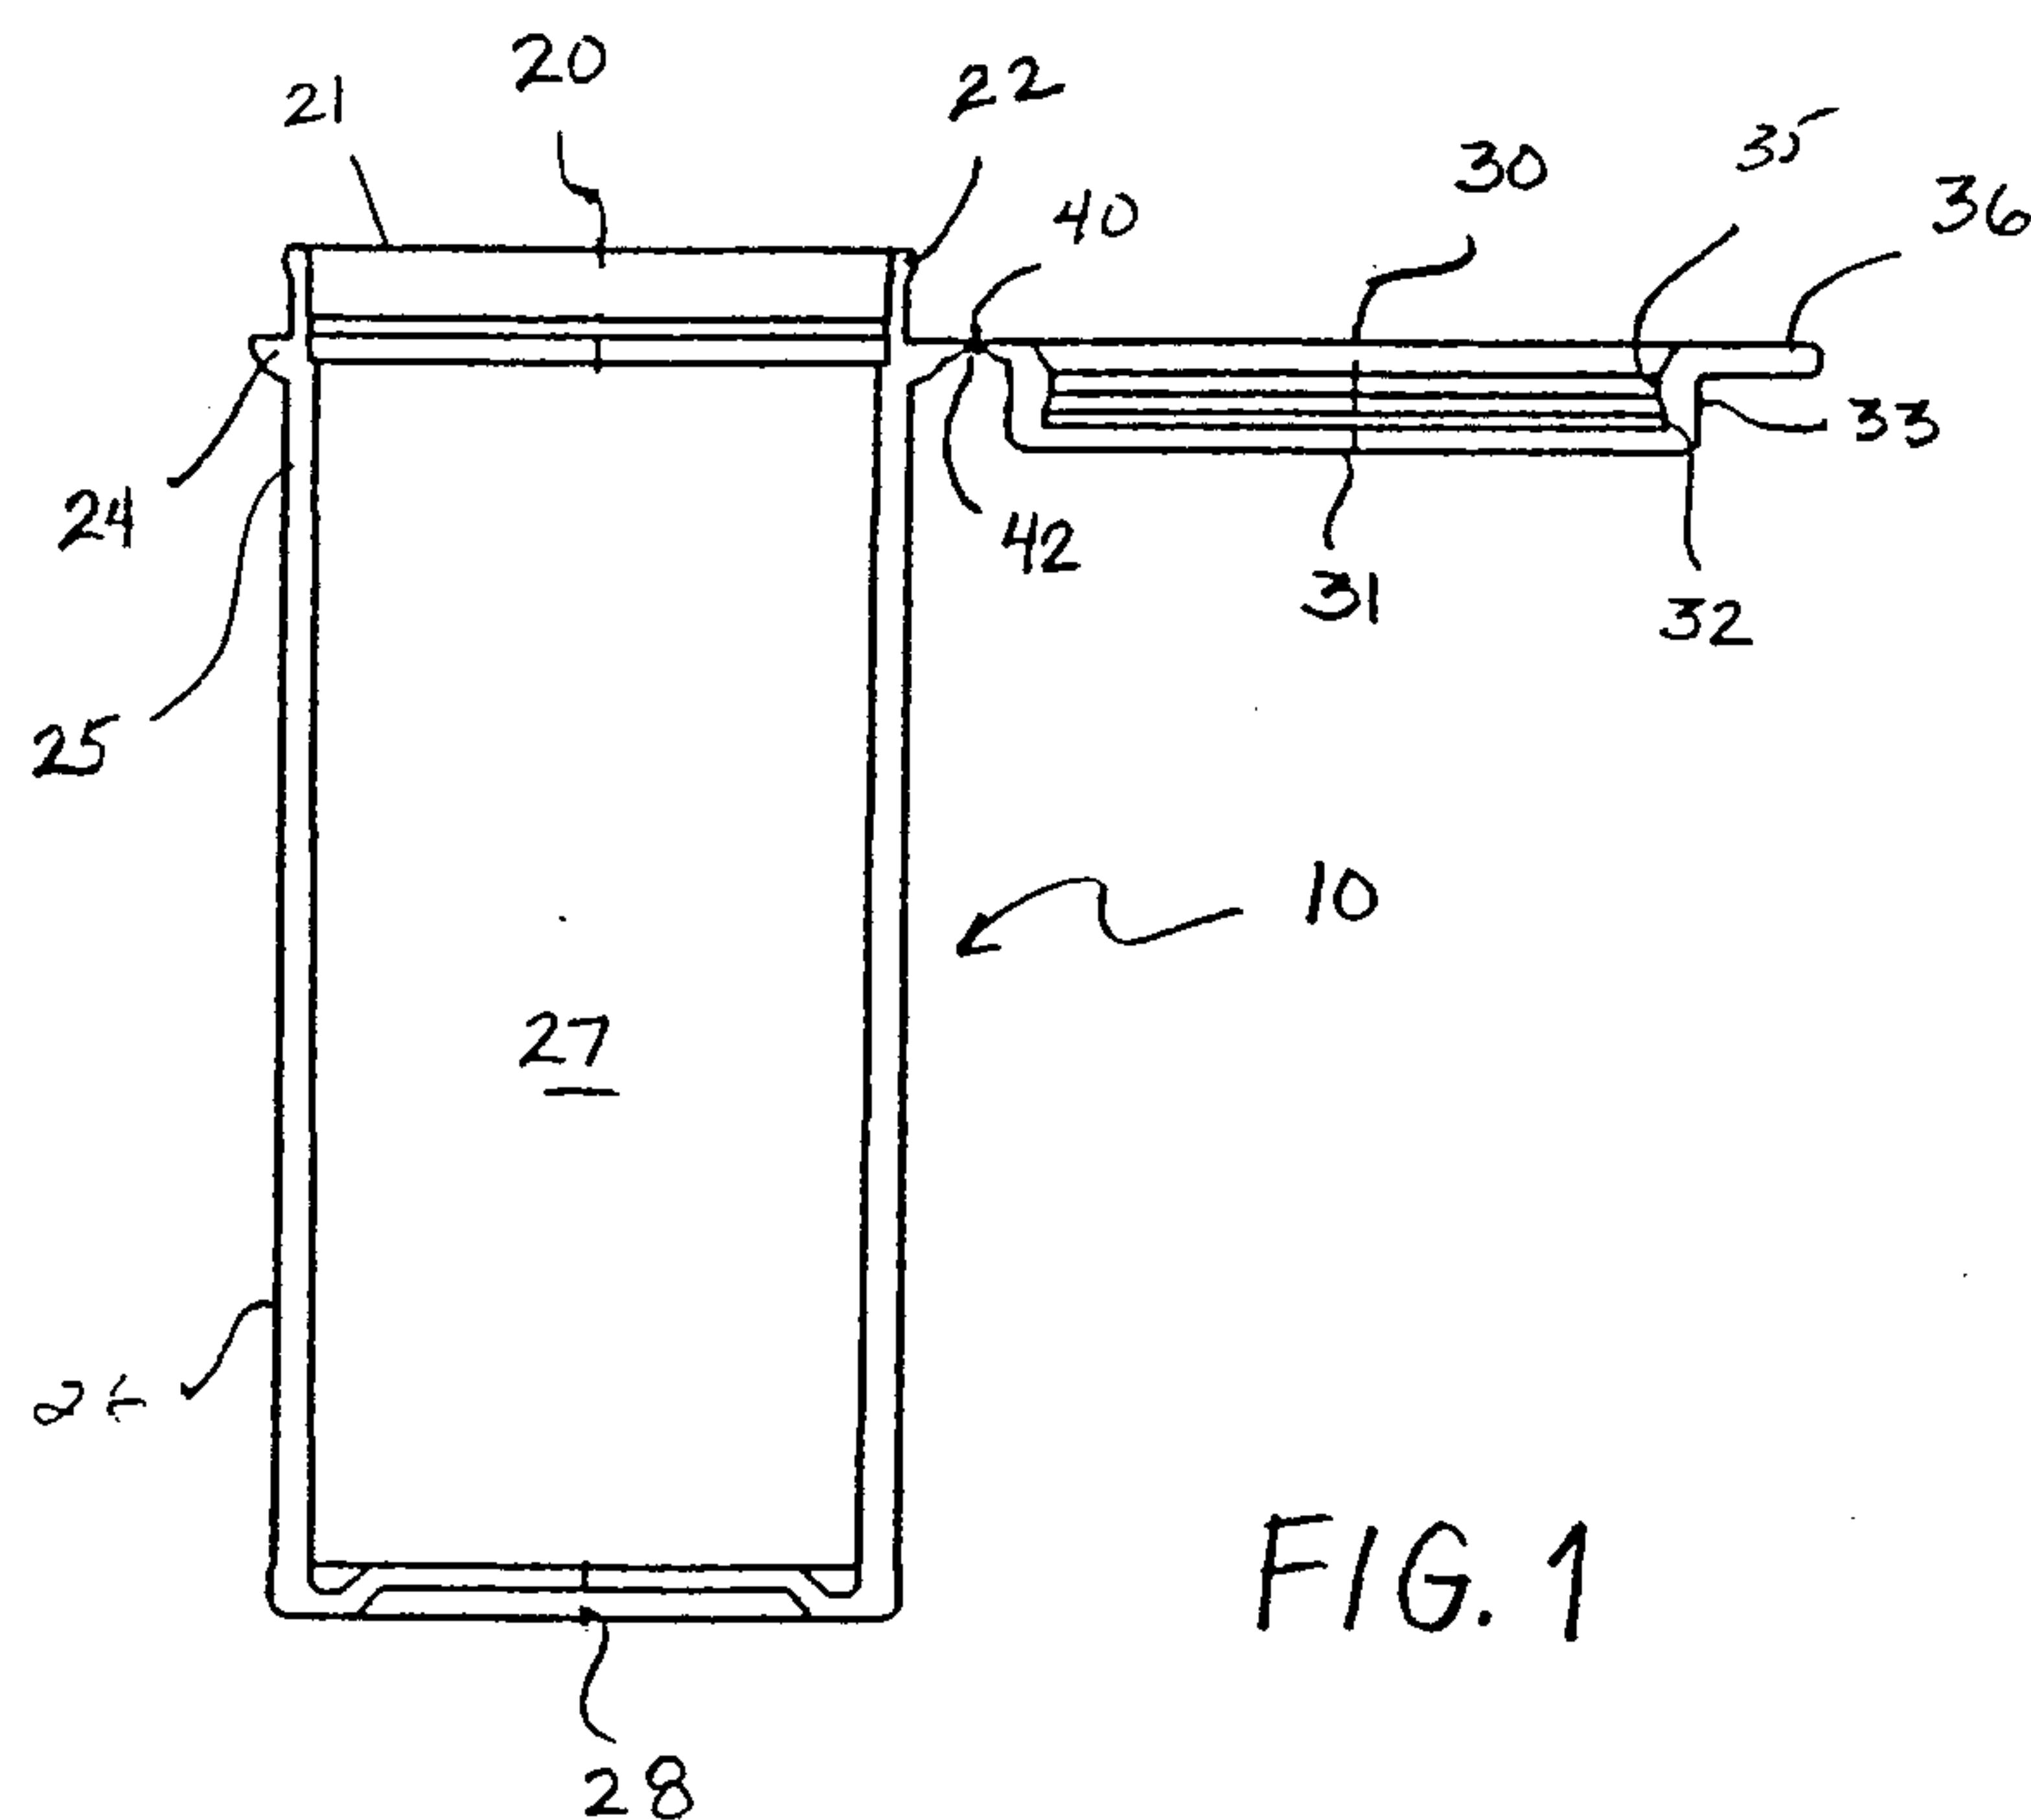


FIG. 1

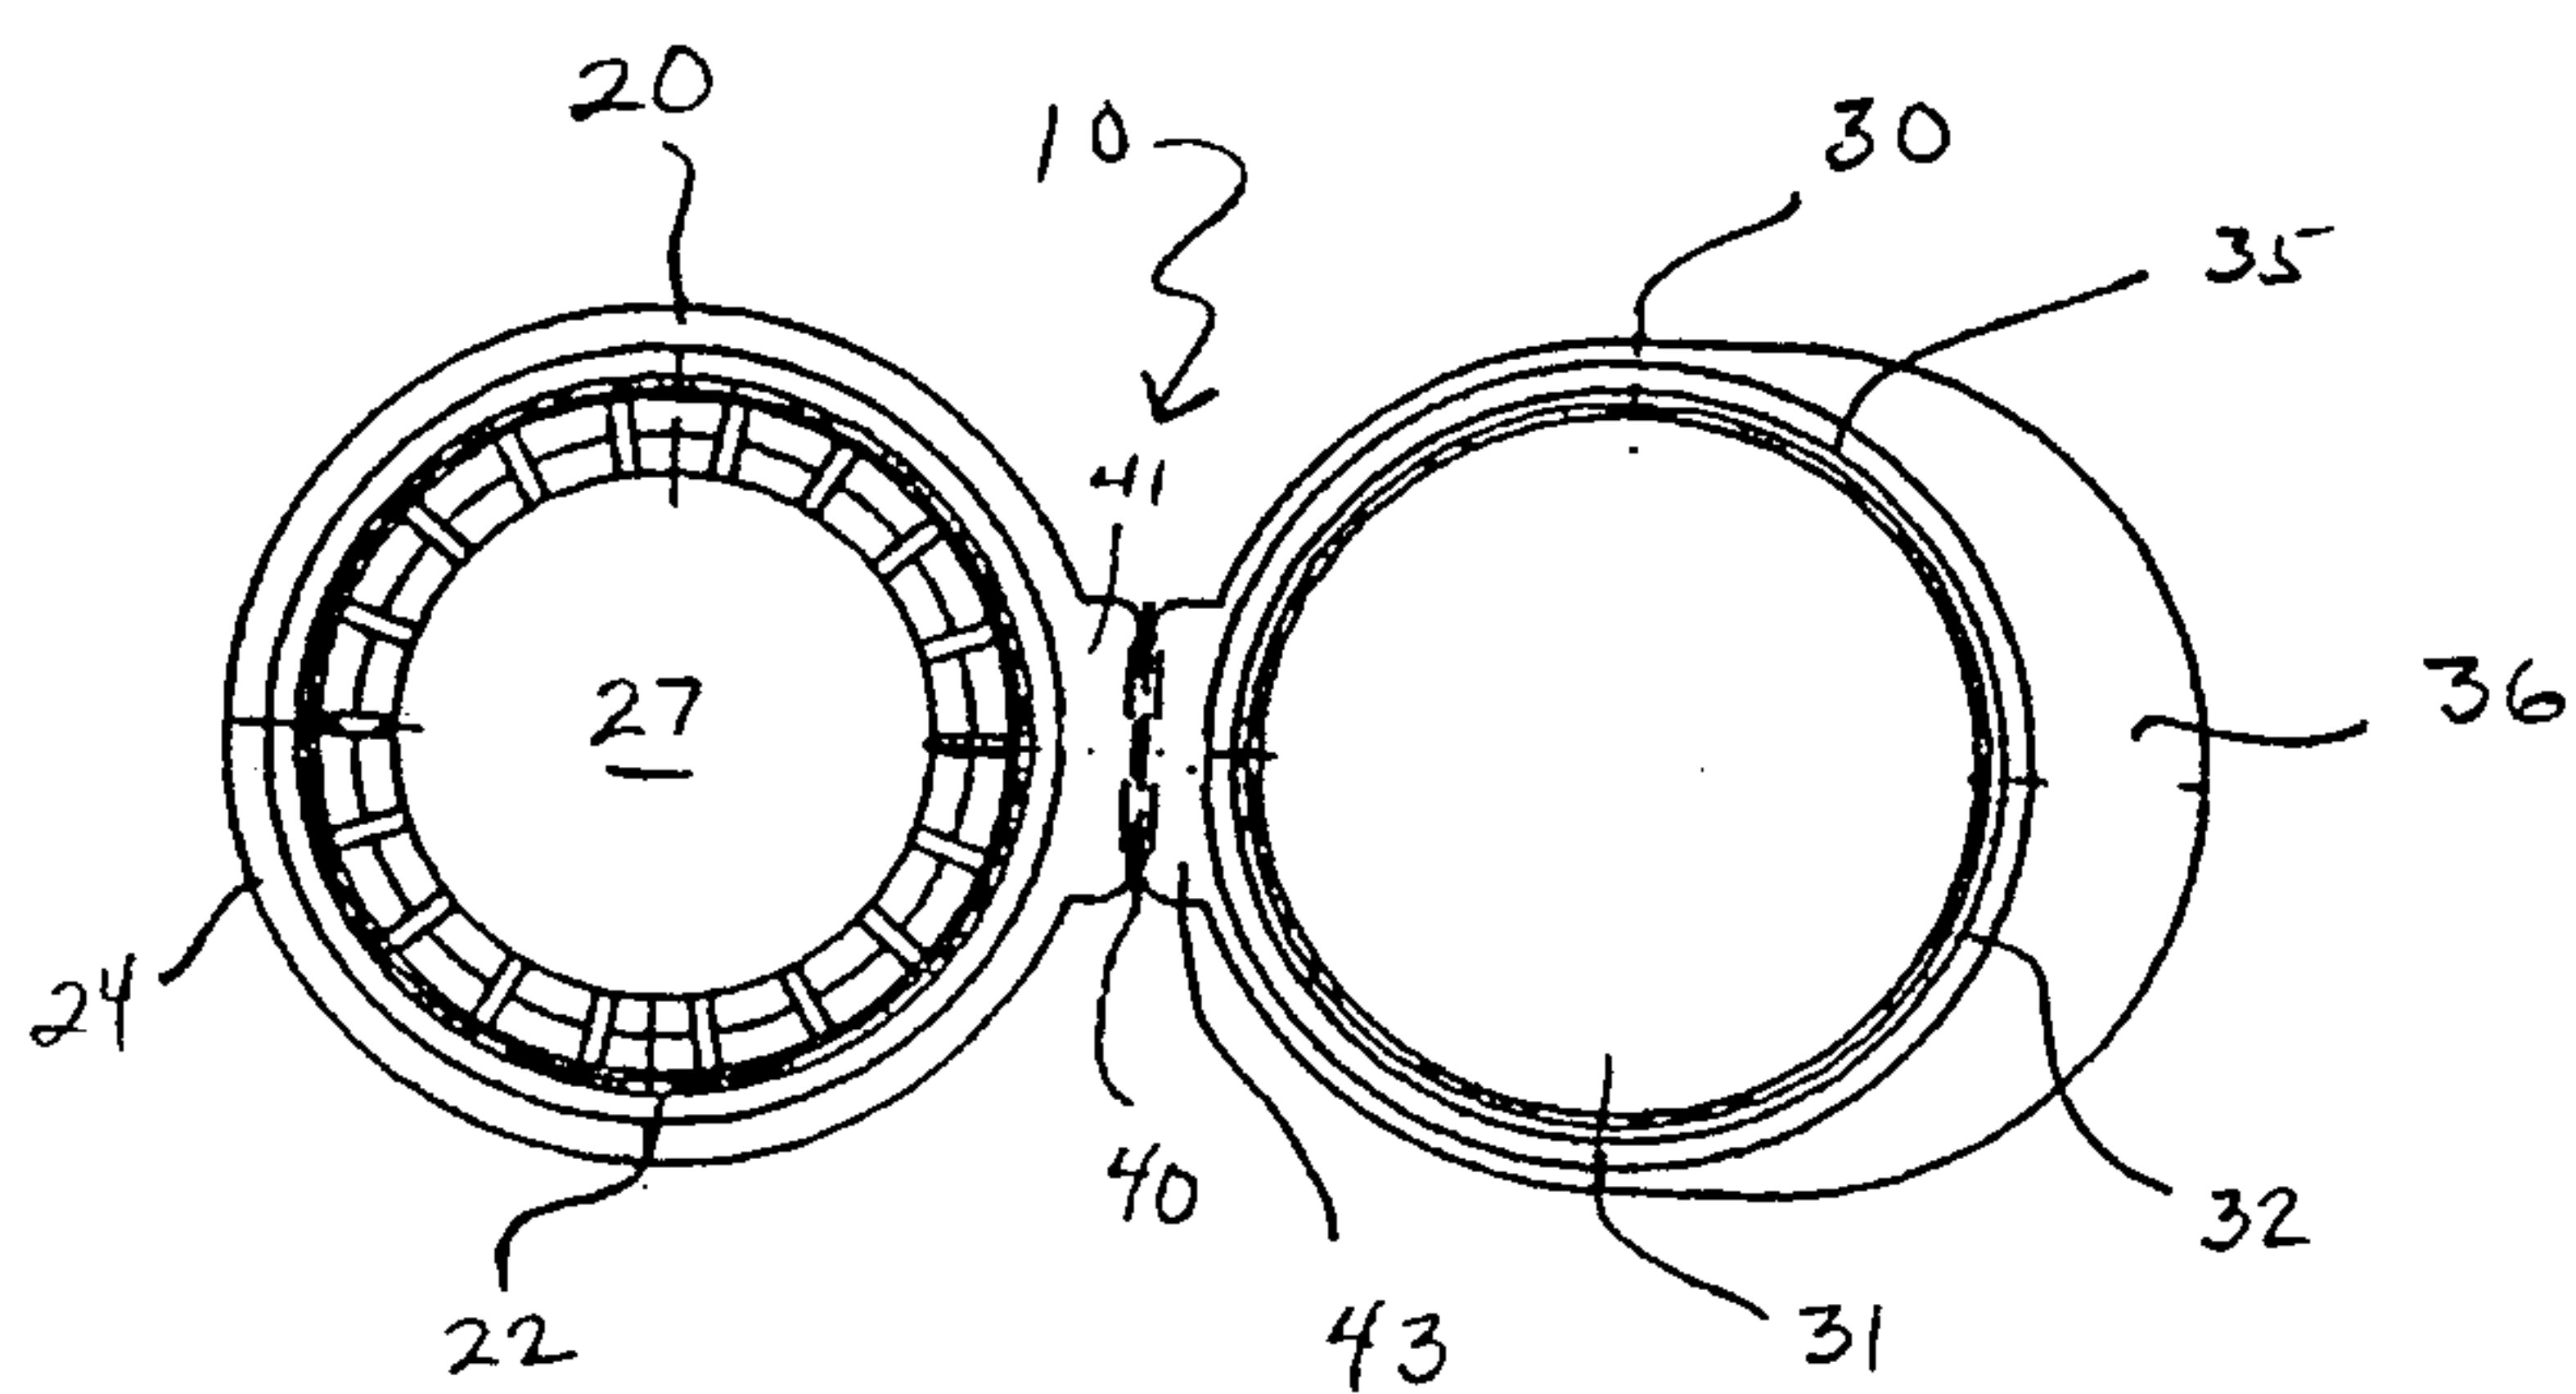


FIG. 2

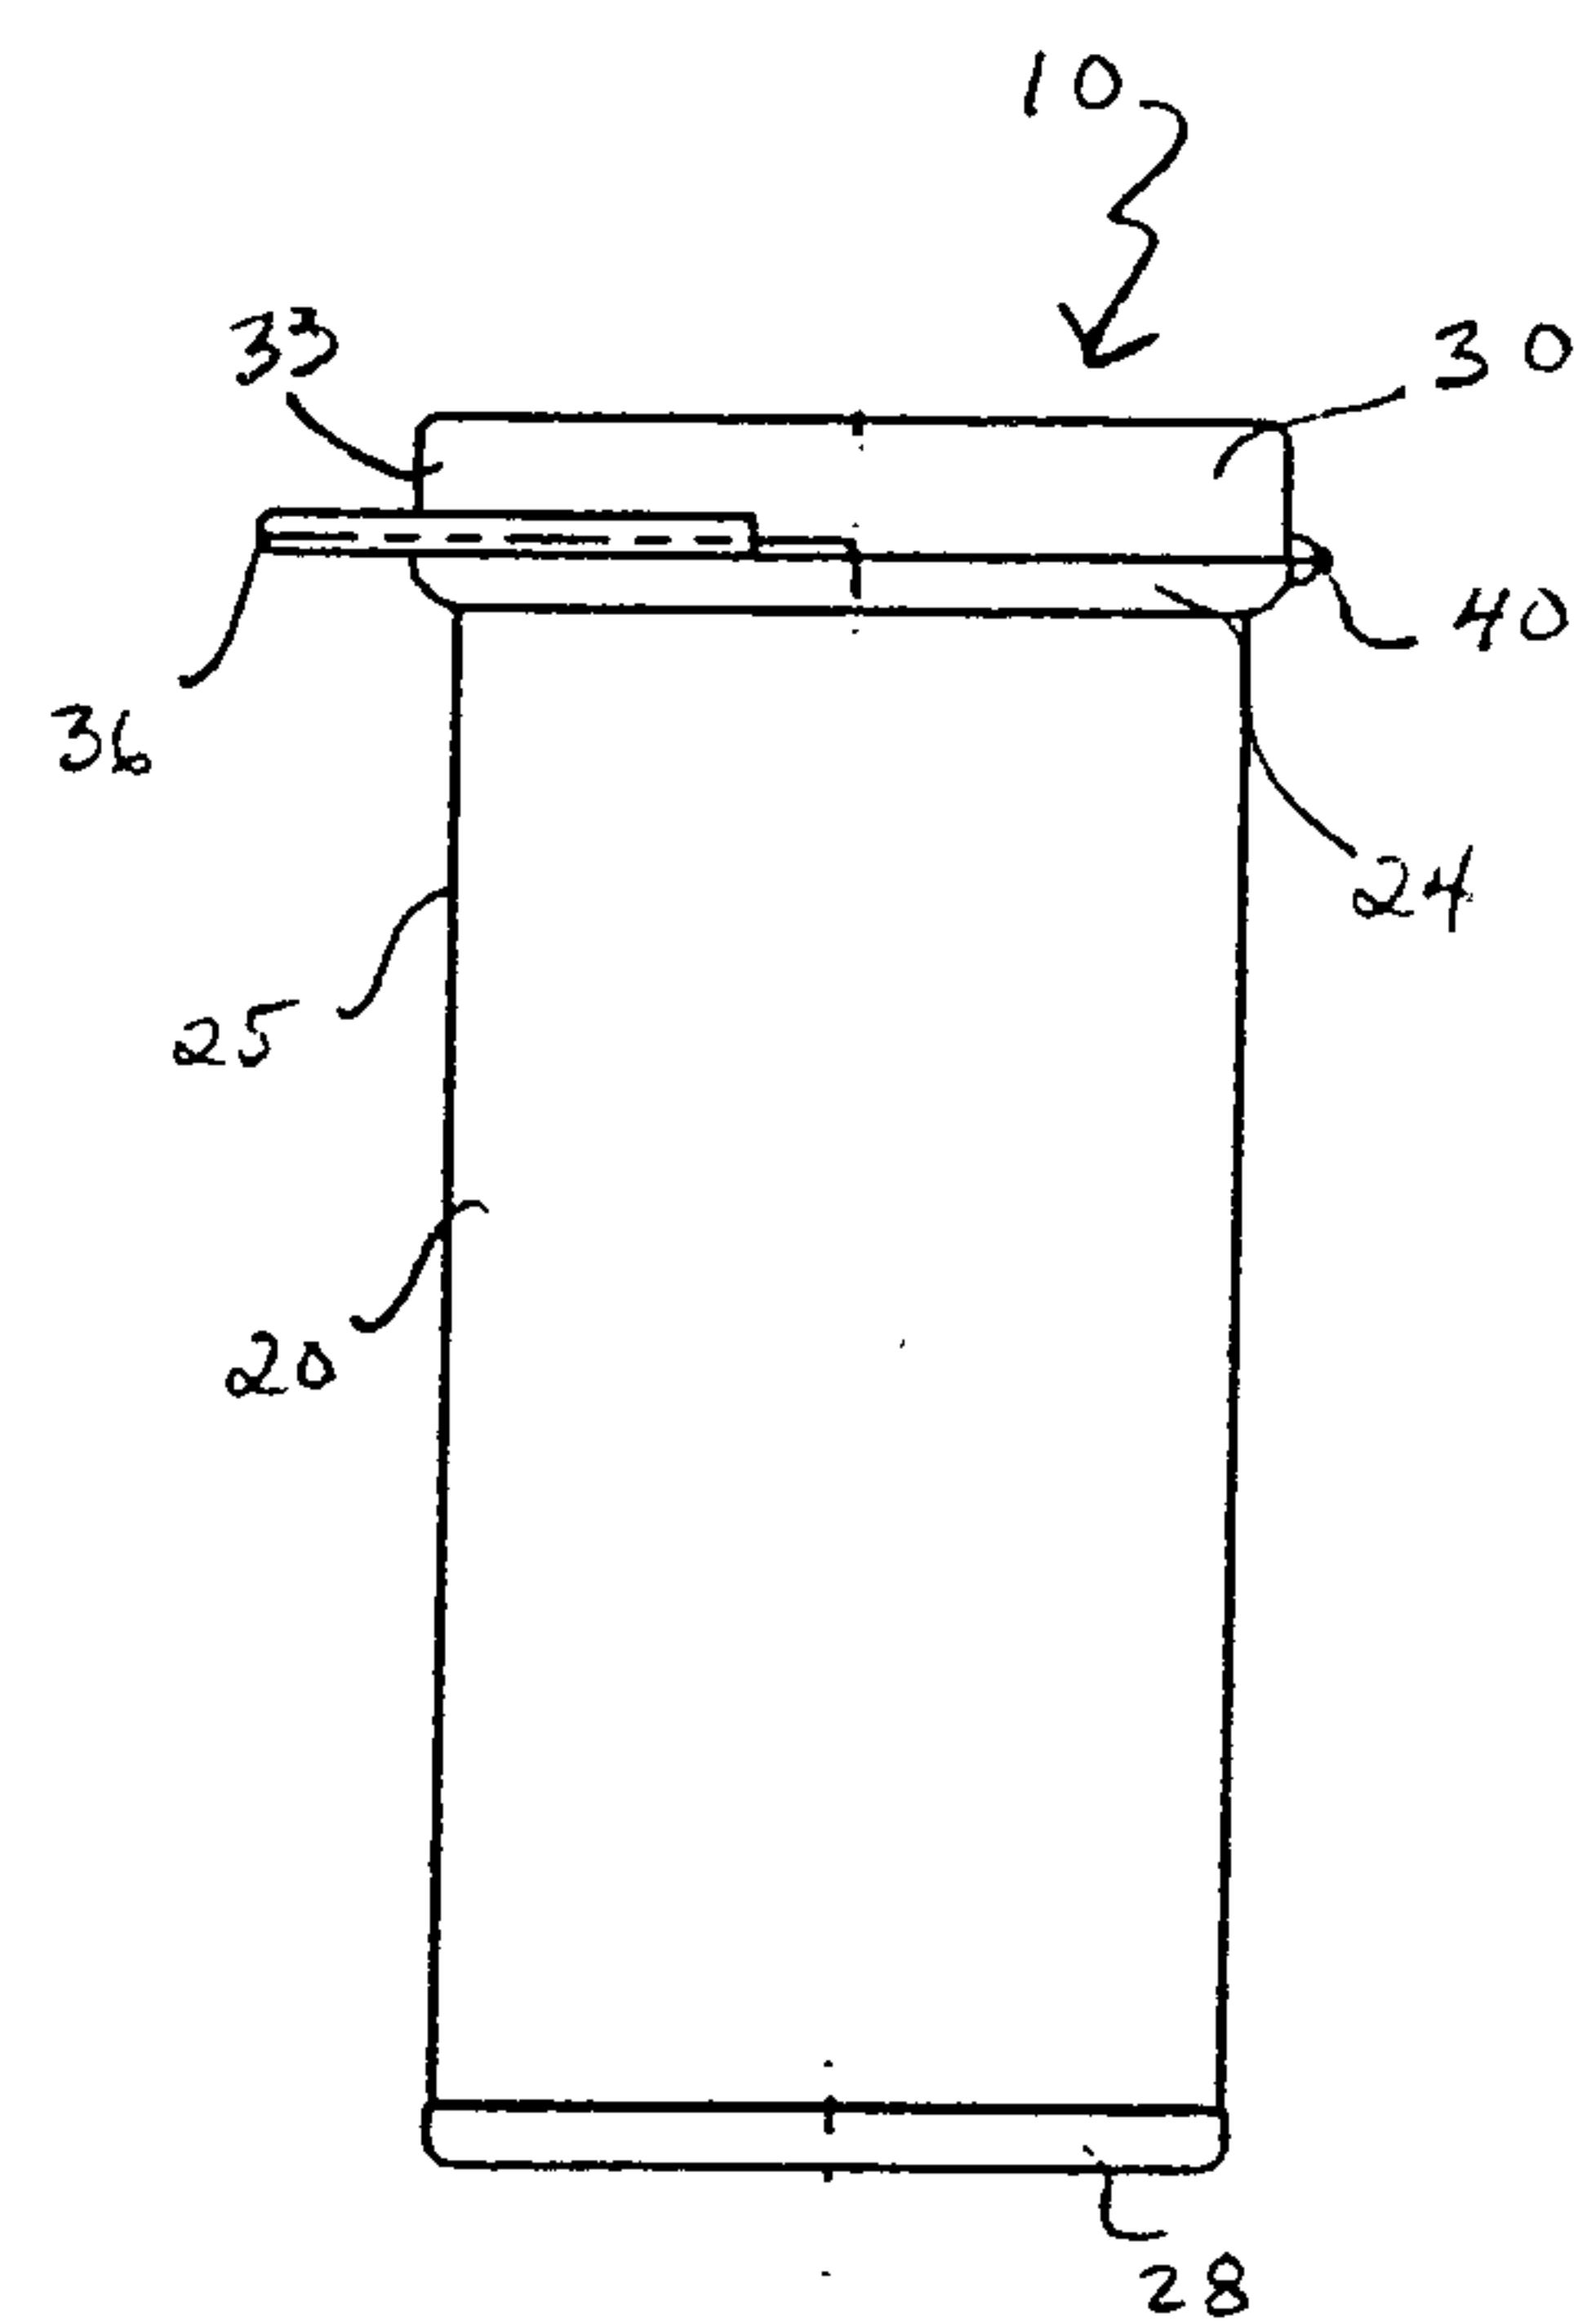


FIG. 3

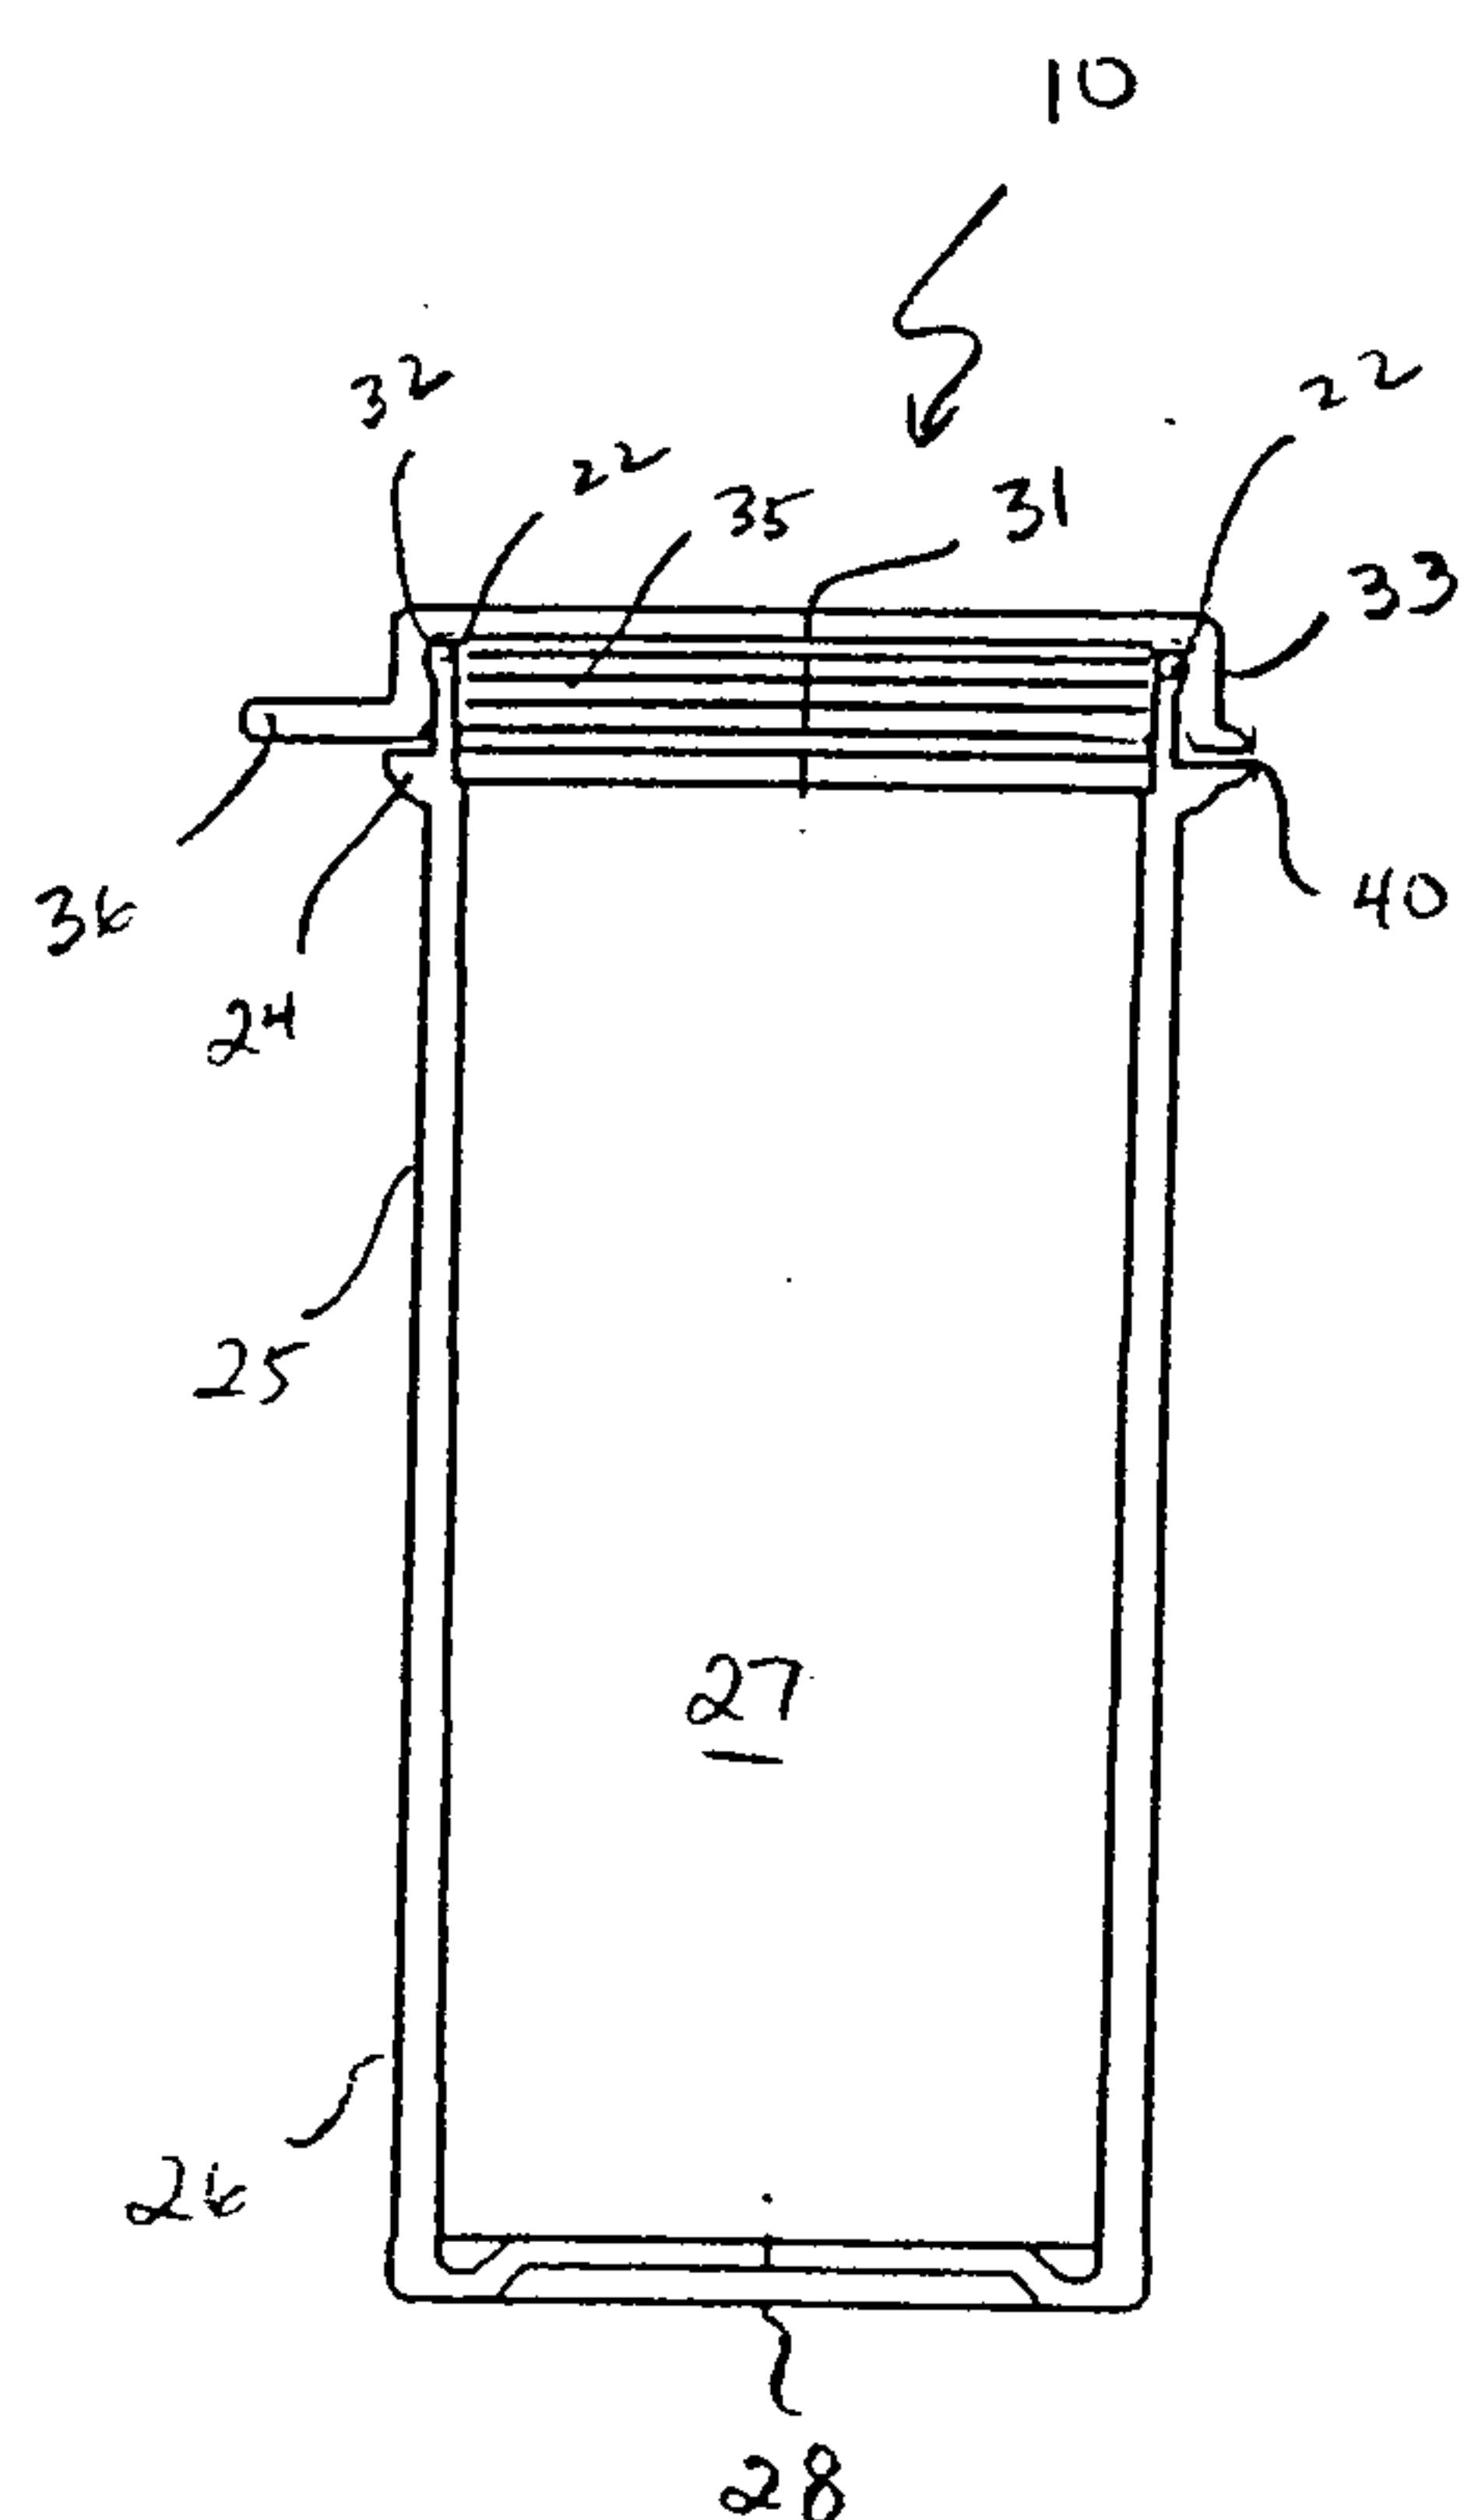


FIG. 4

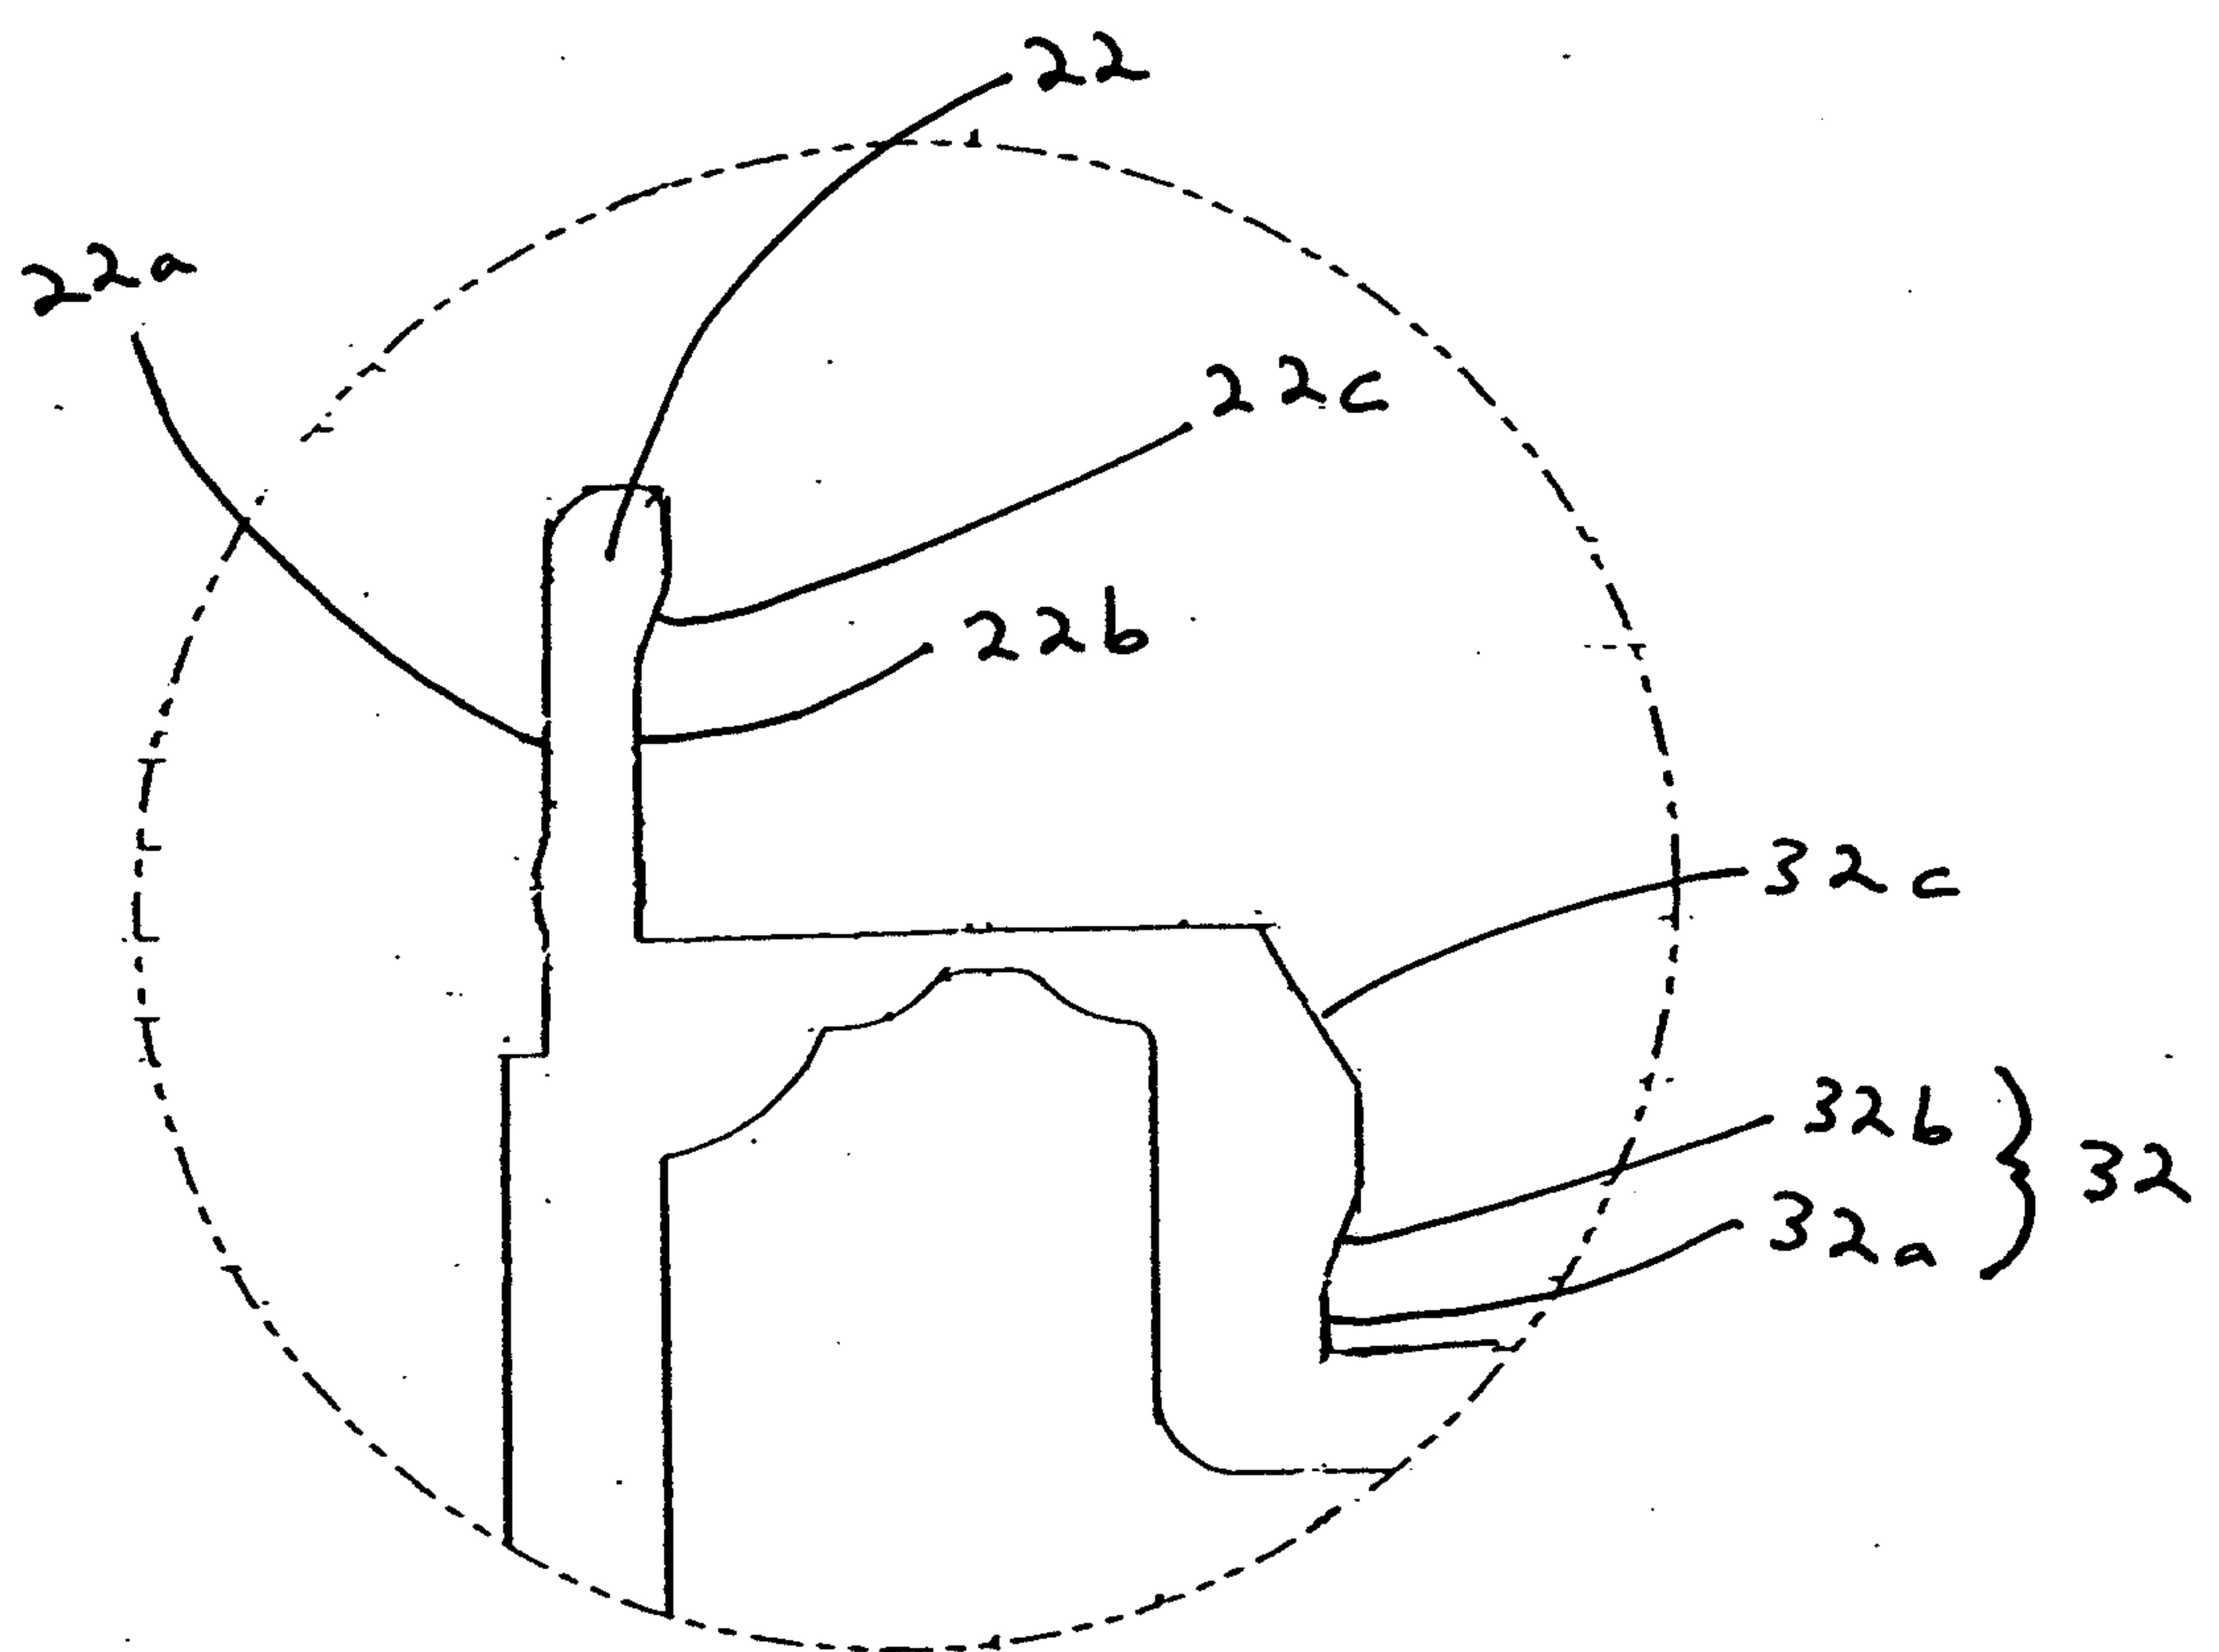


FIG. 5

