

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A63B 69/36	A1	(11) International Publication Number: WO 00/02629 (43) International Publication Date: 20 January 2000 (20.01.00)
<p>(21) International Application Number: PCT/AU99/00553</p> <p>(22) International Filing Date: 8 July 1999 (08.07.99)</p> <p>(30) Priority Data: PP 4563 8 July 1998 (08.07.98) AU</p> <p>(71)(72) Applicant and Inventor: NESKUDLA, Rudolph, John [AU/AU]; 8 Landon Way, Mount Claremont, W.A. 6010 (AU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): WALMSLEY, Timothy, John [AU/AU]; 4 Blaikie Street, Myaree, W.A. 6151 (AU). MICALIZZI, Carmelo, Giovanni [AU/AU]; 14 Langham Street, Nedlands, W.A. 6009 (AU).</p> <p>(74) Agent: WRAY & ASSOCIATES; 239 Adelaide Terrace, Perth, W.A. 6000 (AU).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: DEVICE FOR PRACTISING GOLF</p> <div data-bbox="263 1232 1324 1713" data-label="Image"> </div> <p>(57) Abstract</p> <p>A device for practising ball sports comprising an enclosure (3) defined by a membrane supported from a self-supporting structure (7), the structure (7) comprising a base (8) having a playing surface (19) and having a forward edge (2) and a support means (9, 10) spaced forwardly and upwardly of the base (8) and supported at least in part from the base (8), the structure (7) further comprising an upstanding frame (11) supported from the sides (12, 13) of the base (8) and extending over the base (8), the enclosure (3) being supported from the structure (7) to define a space (6) having an open end (4) and a closed end (5), the space (6) being of a general conical configuration, the open end (4) being supported from the base (8) to maintain the open end (8) in an open condition adjacent the forward edge (2) and the closed end (5) being supported from the support means in spaced relation to the open end (4), wherein the lower portion of the enclosure (3) is inclined downwardly from the closed end (5) to the base (8) to enable a ball thereon to return to the playing surface (19).</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TITLE: Device for Practising GolfFIELD OF THE INVENTION

The present invention relates to a golf training device.

BACKGROUND ART

5 Practice nets and backstops have been used as practice or training apparatus for golfers who wish to practice striking a golf ball without the golf ball travelling considerable distances. However, these types of apparatus suffer from the disadvantage of not being portable such that the golfer can practise striking the ball at any desired location.

10 United States Patent 4,063,739 discloses a golf warm up net whereby a portable structure consists of a pair of upright posts which are adapted to be inserted into a ground surface, a substantially U shaped support member which is adapted to support a net therebetween and is located on an upper portion of the pair of posts and a bottom sleeve which contains a plurality of weights which retains the net in
15 a substantially upright position.

United States Patent 4,913,439 discloses a golf practice net apparatus consisting of an elongate cross member having arm portions pivotable between a deployed position in which arm portions are aligned with one another and a storage position in which the arm portions are in adjacent, generally facing abutment with each
20 other whereby a net is securable along both arm portions of the elongate cross member.

United States Patent 4,723,780 discloses a golf practice device consisting of a single net enclosure wherein a U shaped canopy is pivotally attached to the upper ends of vertical support members and is held in position for use by brackets which
25 are pivotally attached to the upper portions of the vertical support members and secured to the lower end of the canopy by a nut and bolt arrangement.

United States Patent 5,569,094 discloses a self-erecting golf practice net, which is portable and stops the flight of a golf ball and returns the golf ball generally to a selected location and which is foldable for storage and transport. The practice net has a sloping base formed so as to return the golf ball to a selected location
5 and is formed from elastic frame members arranged to provide an upright net and a retaining means for selectively retaining the net in a folded position and for allowing the net to spontaneously move into an erect position when the retaining means is not engaged.

United States Patent 5,018,731 discloses a golf ball driving practice apparatus
10 comprised of a rigid framework which supports a conical net into which a player practice drives golf balls off a tee.

The problem with the above devices except for US 5,018,731 is that they cannot be used indoors since they all use a substantially erect net whereby stray shots from a golfer will not necessarily be intercepted by the net and accordingly the
15 ball may cause damage within a confined area. Furthermore most of the above devices utilise a spike or post to be inserted into a ground surface so as to secure the net in use.

While the invention disclosed in US 5,018,731 does contemplate indoor use, this use is limited to non-domestic locations due to the inherent size of the device.
20 Further it does not contemplate the ball returning to the playing area so that a user can strike the same ball again without taking any other intermediate action

The present invention has as one of its preferred objects to provide a device for practising ball sports which is portable and self-supporting and avoids at least some of the difficulties of the prior art referred to above.

25

DISCLOSURE OF THE INVENTION

Accordingly, the present invention resides in a device for practising ball sports comprising an enclosure defined by a membrane supported from a self-supporting structure, said structure comprising a base having a playing surface and having a forward edge and a support means spaced forwardly and upwardly
5 of the base and supported at least in part from the base, said structure further comprising an upstanding frame supported from the sides of the base and extending over the base, said enclosure being supported from said structure to define a space having an open end and a closed end, said space being of a general conical configuration, said open end being supported from the base to
10 maintain said open end in an open condition adjacent the forward edge and the closed end being supported from the support means in spaced relation to the open end, wherein the lower portion of the enclosure is inclined downwardly from the closed end to the base to enable a ball thereon to return to the playing surface.

15 According to a preferred feature of the invention, the playing surface provides a support surface from which a ball can be struck into the space through the open end.

According to a preferred feature of the invention, the enclosure extends to each side of the base to provide lateral panels to each side of the base rearwardly of
20 the forward edge. According to one preferred embodiment, the open end of the enclosure is of a general arcuate configuration having the ends located at each side of the base rearwardly of the forward edge, said open end being inclined forwardly from the ends wherein the portion of the enclosure between the open end and the upstanding frame provides the lateral panels. According to a
25 preferred feature of the embodiment, the open end is defined by a resiliently flexible elongate member received in the edge of the membrane and resiliently deformed to define the open end. According to a preferred feature of the embodiment, the elongate member is hollow and accommodates a filament which extends through the elongate member and which is adapted to be fixed at either
30 end to the base. According to a further preferred feature of the embodiment, the

open end of the enclosure is further defined by a portion which underlies the base and which extends between the sides thereof said portion comprising a flexible resilient second elongate member received in the edge of the membrane and fixed at its ends to the sides of the base and said second elongate member being
5 resiliently bent to an arcuate configuration extending rearwardly away from the forward edge. According to one embodiment of the invention, the enclosure has the general shape of a cylinder wherein one end of the cylinder accommodates the first and second elongate elements and the other end is gathered to provide the closed end.

10 According to a further preferred feature of the invention the membrane is formed of netting.

According to a further preferred feature of the invention, the tension of the membrane defining the enclosure between the upstanding frame and the closed end is such as to allow for movement of the membrane transverse to the surface
15 of the space to enable the membrane to absorb the impact forces of any ball impacting on the membrane.

According to a further preferred feature of the invention, the space between the upstanding frame and the closed end is trumpet shaped.

According to a further preferred feature of the invention, the base comprises a
20 substantially rectangular or square frame which defines the forward edge and sides of the base and which provides a support surface which comprises a panel received by the frame.

According to one particular embodiment, the base comprises a substantially rectangular or square base frame defined by a plurality of elongate elements fixed
25 at their ends by corner elements and said support means comprises a strut member mounted to each side of the base frame adjacent to forward edge and extending forwardly from the forward edge, said strut members converging to be supported by a junction element, said junction element being supported by an

upstanding frame element depending downwardly therefrom, said junction element providing support for the closed end.

According to a further preferred feature of the embodiment, the corner elements of the base located at each end of the forward edge receive and support strut
5 members.

According to a further preferred feature of the embodiment, the corner elements of the base located at each end of the forward edge receive and support strut members.

The invention will now be more fully understood in light of the following
10 description of one specific embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

The embodiment will now be described with reference to the accompanying drawings, in which:

Figure 1 is a front perspective view of a device for practising golf in accordance
15 with the embodiment;

Figure 2 is a rear perspective view of the device for practising golf as shown in Figure 1;

Figure 3 is a plan view of the device for practising golf as shown in Figure 1;

Figure 4 is a front view of the device for practising golf as shown in Figure 1;

20 Figure 5 is a side view of the device for practising golf as shown in Figure 1;

Figure 6 is an expanded view of a front corner element of the base of the device for practising golf as shown in Figure 1;

Figure 7 is a plan view of the base of a device for practising golf as shown in Figure 1 with the base panel removed.

Figure 8 is a sectional view through the front of the base of a device for practising golf as shown in Figure 1.

- 5 Figure 9 is a sectional view through an upstanding frame member of a device for practising golf as shown in Figure 1

BEST MODE(S) FOR CARRYING OUT THE INVENTION

According to a preferred embodiment of the invention, there is provided a device 1 for practising golf. However, it will be apparent to the skilled person that the
10 device 1 may also be adapted for use for other ball sports including but not limited to soccer, rugby, Australian rules football and field hockey.

The embodiment will be described with reference to golf balls being struck by a golfer using the full range of clubs including metal woods, woods, other driver clubs including fairway woods, irons, etc. However, the invention should not be
15 restricted in scope to this preferred embodiment and could easily be adapted for use for other ball games.

It is a feature of the embodiment that the device may be erected on any suitable support surface such as reasonably flat ground or on the floor of a room. It is a further feature of the embodiment that the device is freestanding and requires no
20 other structural support such as being tied to pegs in the ground

The device comprises an enclosure 3 for catching a ball (not shown) having a membrane in the form of a net having an open end 4 and a closed end 5 thereby defining a space 6 into which a ball may be projected. The enclosure 3 is supported from a self-supporting structure 7 which comprises a base 8 with a
25 front edge 2, a pair of support struts 9 and 10 extending forwardly of the base 8 and converging to be connected at their forwardmost ends by a junction element

24. The structure further comprises an upstanding frame 11 supported from the sides 12 and 13 of the base 8.

The base 8 of the structure 7 comprises a rectangular base frame defined by side members 14 and 15, a front member 16 defining the front edge 2 and a rear member 17. The members are fixed at their ends by two rear corner elements 22 and 23 and two front corner elements 20 and 21. The four members may be of any convenient material such as wood, plastics material or metal. To enhance portability, each member may be constructed from two or more sub-members joined together by joining elements (not shown). Thus when the structure is disassembled for transportation, the length of each sub-member will not exceed a length that may be conveniently carried in a car.

A panel 18 formed of a suitable resilient material such as rubber is received within the area enclosed by the base frame. The upper surface 19 of the panel defines the playing surface upon which a ball can be placed to be struck by the player into space 6. To enhance the feel and appearance of the playing surface, a covering such as artificial grass, outdoor or indoor carpet or matting is provided. The thickness of the panel and covering is substantially the same as the thickness of the base frame members to ensure that a ball does not encounter a bump or ridge when being struck or when returning to the user.

As shown in Figure 6, the two front corner elements 20 and 21 at each end of the front member 16 are also adapted to disconnectably support the upstanding frame 11. The upstanding frame 11 is of rigid material such as wood, plastics material or metal and extends above the front base frame member. A substantially semi-circular shape is selected so as to conform to the shape of the netting. The frame can be constructed from two or more sub-members disconnectably joined together by joining elements, to provide a structure that is easily transportable and where all elements will fit within a car.

Also as shown on Figure 6, the two front corner elements 20 and 21 at each end of the front member 16 are further adapted to engage the rear ends of the support

struts 9 and 10 which extend forward of the base 8. The support struts 9 and 10 are rigid elements formed of convenient material such as wood, plastics material or metal. As stated, the forward ends of the support struts are connected by a junction element 24 to form an apex. The apex is supported above the surface
5 upon which the structure is located by a rigid upstanding frame element 25. Again, each support strut can be constructed from two or more sub-members disconnectably joined together by joining elements, to provide a structure that is easily transportable and where all elements will fit within a car.

The membrane may be formed from any suitable material but netting of Rachell
10 Knotless Knitted type has been found to be particularly suitable. Nylon is the preferred cord material for forming the netting. Other materials including polyester, polypropylene or polyethylene could also be used. However, nylon is preferred to its superior strength which therefore provides the least weight per unit of area of netting material. It is also more pliable which enables the net to adopt
15 the desired enclosure shape more readily and with lower tension applied. The netting mesh size is determined to be as large as practicable while still being capable of preventing the passage of the ball through the netting. The size selected will also depend upon the netting material chosen and its thickness. A net produced from nylon of 3mm thickness with a mesh size of 16mm x 16mm is
20 considered optimum to stop a golf ball, although these parameters may be modified depending on the circumstances.

The enclosure 3 is manufactured in cylindrical form wherein a one end provides the open end and the other end provides the closed end. The enclosure 3 is supported at the open end 4 by the upstanding frame 11. The open end 4 also
25 extends beyond the upstanding frame 11 and is further supported by an arcuate tube at a rear edge of the enclosure. The closed end 5 is supported by connection to the junction 24 of the support struts 9 and 10. The closed end 5 is created by circumferentially binding the enclosure 3 adjacent the closed end 5. A disc or cup (not shown) of plastics material is secured at the closed end to

prevent a ball from becoming jammed at the closed end 4 and also to reduce wear at that area.

A support hem 26 is provided in the enclosure 3 adjacent the upstanding frame 11. The upstanding frame 11 supports the enclosure 3 by being inserted into the support hem 26.

The enclosure 3 extends to each side 12 and 13 of the base 8 to provide lateral panels 30 and 31 to each side 12 and 13 of the base 8 rearwardly of the front member 16 of the base 8. The upper rear edge 32 of the open end 4 of the enclosure 3 is of a general arcuate configuration, extending from the rear corners 22 and 23 of the base 8 and being inclined forwardly from the ends to pass adjacent the uppermost point 33 of the upstanding frame 11. Thus, the portion of the enclosure between the open end 4 and the upstanding frame 11 provides the lateral panels 30 and 31. The upper rear edge 32 is provided with a hem (not shown) into which is inserted a resiliently flexible tube. Due to its resilience, when inserted into the arcuate hem, the tube biases the upper rear edge 32 outwardly or in a sideways direction so that the lateral panels 30 and 31 do not interfere with the golfer's swing. The tube accommodates a filament which extends through the elongate member and which is fixed at either end to the base 8.

As shown in Figure 8, the open end 4 of the enclosure is also provided with a portion 27 which extends over the base frame front member 16 and underlies the base panel 18. This portion extends between the sides 12 and 13 of the base and is supported by a flexible resilient rod 28 received in a hem 29 at the edge of the enclosure portion 27. As shown in Figure 7, the rod 28 is bent into an arc extending rearwardly away from the front member 16 and is fixed at each end to the side members 14 and 15 of the base 8 at the front corner elements 20 and 21. This novel restraining method mechanism displays two advantages. As shown in Figure 8, by passing the enclosure portion above the front member of the base frame, the presence of a lip or bump in the path of a ball returning to the playing surface 19 is avoided. Further, by bending the rod 28 into an arc, the

enclosure 3 is better able to adopt its natural shape about the rod 28 when it is tensioned.

A further feature of the invention resides in the way in which the enclosure 3 is extended rearwardly of the upstanding frame. As shown in Figure 9, the enclosure membrane 2 is supported by the support hem 26 via a support webbing 34 to hold the enclosure membrane clear of the upstanding frame member 11. As a result, the upstanding frame member 11 cannot be directly struck by a mis-hit ball, thus avoiding or at least reducing the risk of such a ball rebounding adversely towards the user.

As a result of this novel manner of providing the lateral panels 30 and 31, the height of the upstanding frame above the support surface on which the device is located can be restricted to less than the height of an average player while the lateral panels 30 and 31 provide a semi-canopy over the base area which will capture almost any possible mis-hit ball and yet which does not interfere with the club of the golfer during the golf swing. This enables the device to be sufficiently small to be used in normal domestic rooms, while providing the safety necessary for such use.

The closed end of the enclosure 3 is secured to the junction of the support struts under tension to give it its shape and create the space into which the ball is struck. While certain prior art devices have disclosed an enclosure having a frusto-conical shape obtained by stretching the net under considerable tension, it has been found advantageous to erect the enclosure 3 under reduced tension so that it adopts a form akin to that of a trumpet horn, as shown in Figure 5. In that shape, the enclosure 3 is not unduly taut so that, on impact of the ball upon the enclosure membrane, the adjacent area of membrane can be displaced substantially transversely to the surface of the enclosure. This displacement allows the enclosure to absorb the kinetic energy of the ball without imparting substantial rebound velocity or causing damage to the material, as can be the case if the material is held very taut.

In use, a user who wishes to practice their golf shots places a ball on the playing surface on the base 8. The user then aims the ball towards the open end 4 of the enclosure 2. The ball once struck will move towards the closed end 5 either directly or indirectly by deflecting from the enclosure towards the closed end 5.

- 5 The ball loses its energy due to the impact with the surrounding wall and will return to the feet of the user since the substantially trumpet shape biases the slope such that the ball will return to substantially the same position on the playing surface 19 as the ball was initially struck.

- 10 According to another embodiment, the upstanding frame is formed from a resilient rod which can be bent such that the ends are located in the front corner elements.

Throughout the specification, unless the context requires otherwise, the word "comprise" or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or group of integers but not the exclusion of any other integer or group of integers.



- 15 Those skilled in the art will appreciate that the invention described herein is susceptible to variations and modifications other than those specifically described. It is to be understood that the invention includes all such variations and modifications which fall within its spirit and scope and that the invention should not be limited to the particular embodiment(s) described above.

The claims defining the invention are as follows:

1. A device for practising ball sports comprising an enclosure defined by a membrane supported from a self-supporting structure, said structure comprising a base having a playing surface and having a forward edge
5 and a support means spaced forwardly and upwardly of the base and supported at least in part from the base, said structure further comprising an upstanding frame supported from the sides of the base and extending over the base, said enclosure being supported from said structure to define a space having an open end and a closed end, said space being of a
10 general conical configuration, said open end being supported from the base to maintain said open end in an open condition adjacent the forward edge and the closed end being supported from the support means in spaced relation to the open end, wherein the lower portion of the enclosure is inclined downwardly from the closed end to the base to enable a ball
15 thereon to return to the playing surface.
2. A device for practising ball sports according to claim 1 wherein the playing surface provides a support surface from which a ball can be struck into the space through the open end.
3. A device for practising ball sports according to claim 1 or claim 2 wherein
20 the enclosure extends to each side of the base to provide lateral panels to each side of the base rearwardly of the forward edge.
4. A device for practising ball sports according to any one of claims 1 to 3 wherein the open end of the enclosure is of a general arcuate configuration having the ends located at each side of the base rearwardly of the forward
25 edge, said open end being inclined forwardly from the ends wherein the portion of the enclosure between the open end and the upstanding frame provides the lateral panels.

5. A device for practising ball sports according to any one of claims 1 to 4 wherein the open end is defined by a resiliently flexible elongate member received in the edge of the membrane and resiliently deformed to define the open end.
- 5 6. A device for practising ball sports according to claims 5 wherein the elongate member is hollow and accommodates a filament which extends through the elongate member and which is adapted to be fixed at either end to the base.
- 10 7. A device for practising ball sports according to any one of claims 1 to 6 wherein the open end of the enclosure is further defined by a portion which underlies the base and which extends between the sides thereof said portion comprising a flexible resilient second elongate member received in the edge of the membrane and fixed at its ends to the sides of the base and said second elongate member being resiliently bent to an arcuate
15 configuration extending rearwardly away from the forward edge.
8. A device for practising ball sports according to any one of claims 1 to 7 wherein the enclosure has the general shape of a cylinder wherein one end of the cylinder accommodates the first and second elongate elements and the other end is gathered to provide the closed end.
- 20 9. A device for practising ball sports according to any one of claims 1 to 8 wherein the membrane is formed of netting.
10. A device for practising ball sports according to any one of claims 1 to 9 wherein the tension of the membrane defining the enclosure between the upstanding frame and the closed end is such as to allow for movement of
25 the membrane transverse to the surface of the space to enable the membrane to absorb the impact forces of any ball impacting on the membrane.

11. A device for practising ball sports according to any one of claims 1 to 10 wherein the space between the upstanding frame and the closed end is trumpet shaped.
- 5 12. A device for practising ball sports according to any one of claims 1 to 11 wherein the base comprises a substantially rectangular or square frame which defines the forward edge and sides of the base and which provides a playing surface which comprises a panel received by the frame.
- 10 13. A device for practising ball sports according to any one of claims 1 to 12 wherein the base comprises a substantially rectangular or square base frame defined by a plurality of elongate elements fixed at their ends by corner elements and said support means comprises a strut member mounted to each side of the base frame adjacent to forward edge and extending forwardly from the forward edge, said strut members converging to be supported by a junction element, said junction element being
15 supported by an upstanding frame element depending downwardly therefrom, said junction element providing support for the closed end..
14. A device for practising ball sports according to claim 13 wherein the corner elements of the base located at each end of the forward edge receive and support said strut members.
- 20 15. A device for practising ball sports according to claim 13 or 14 wherein the corner elements of the base located at each end of the forward edge receive and support the ends of the upstanding frame.
16. A device for practising golf substantially as herein described.
- 25 17. A device for practising golf substantially as herein described with reference to the accompanying drawings.

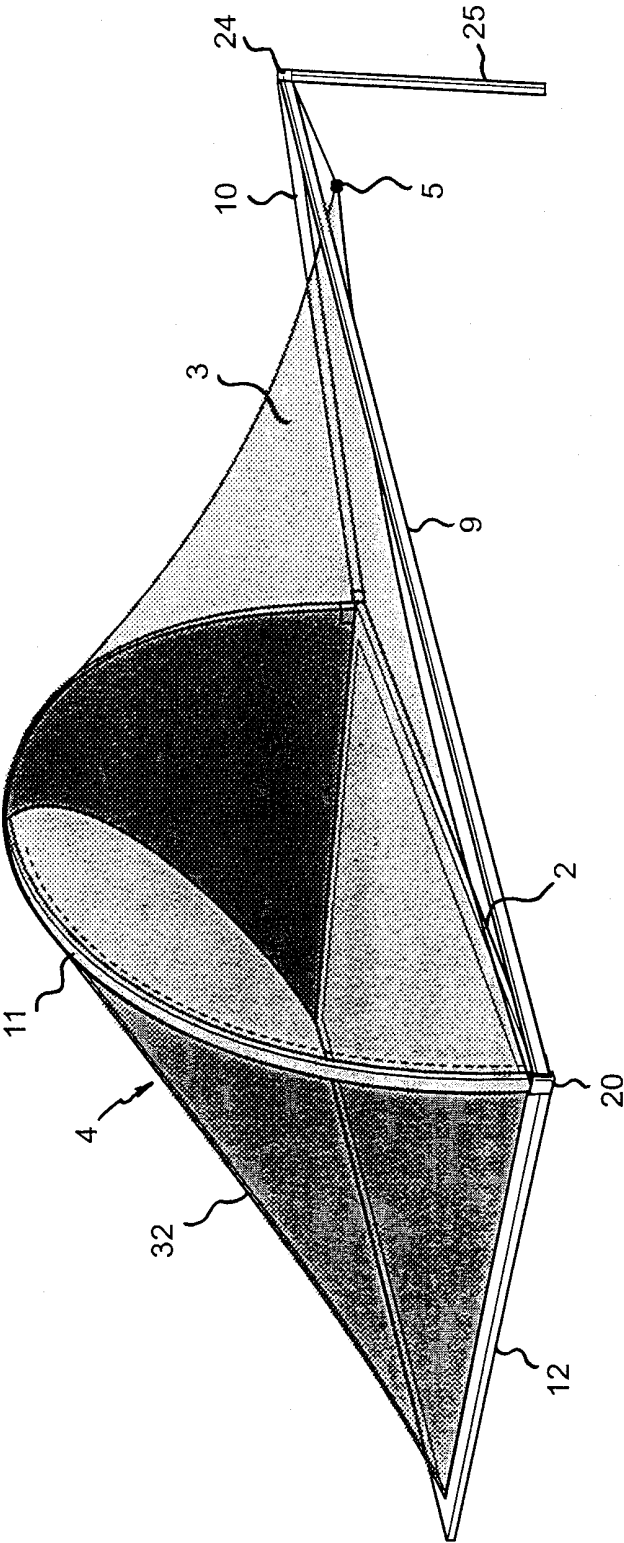

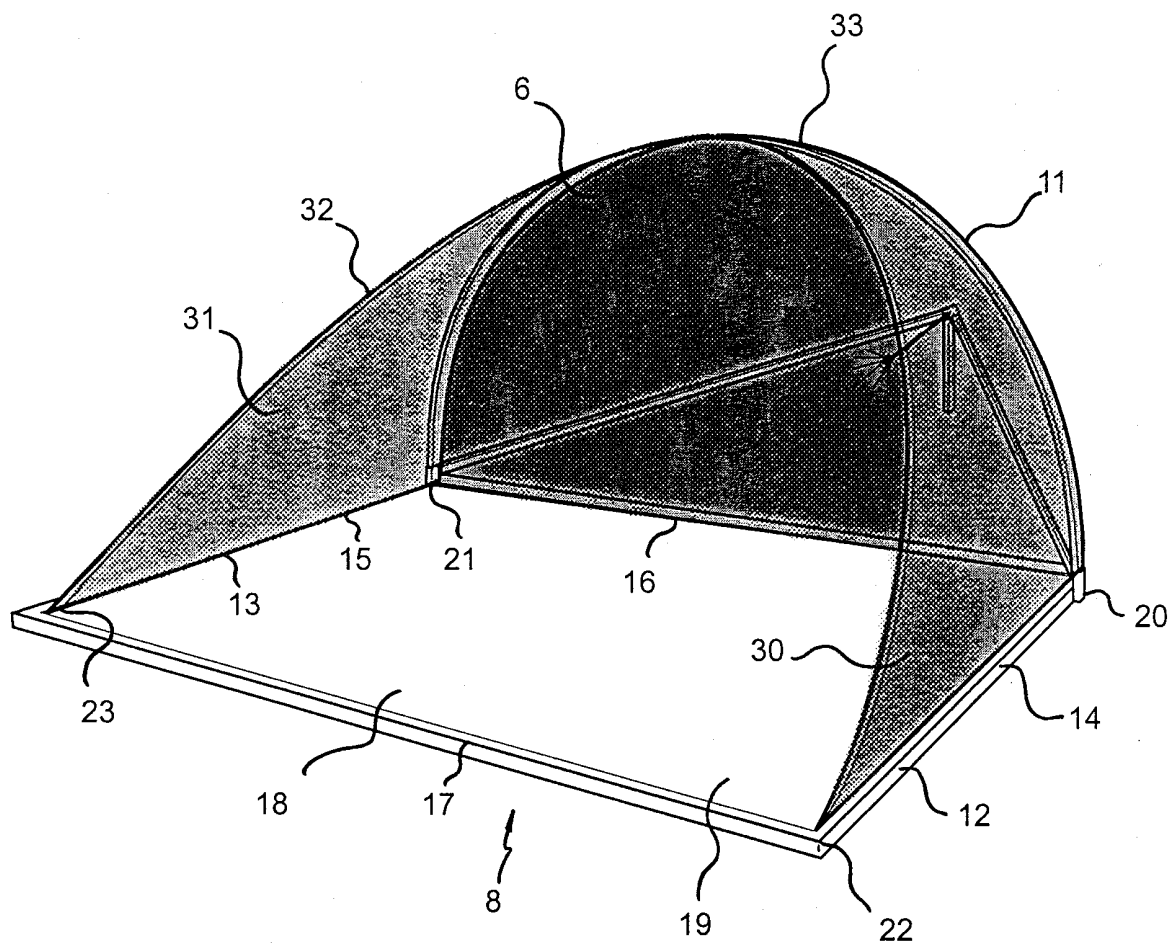


Fig. 2

3/9

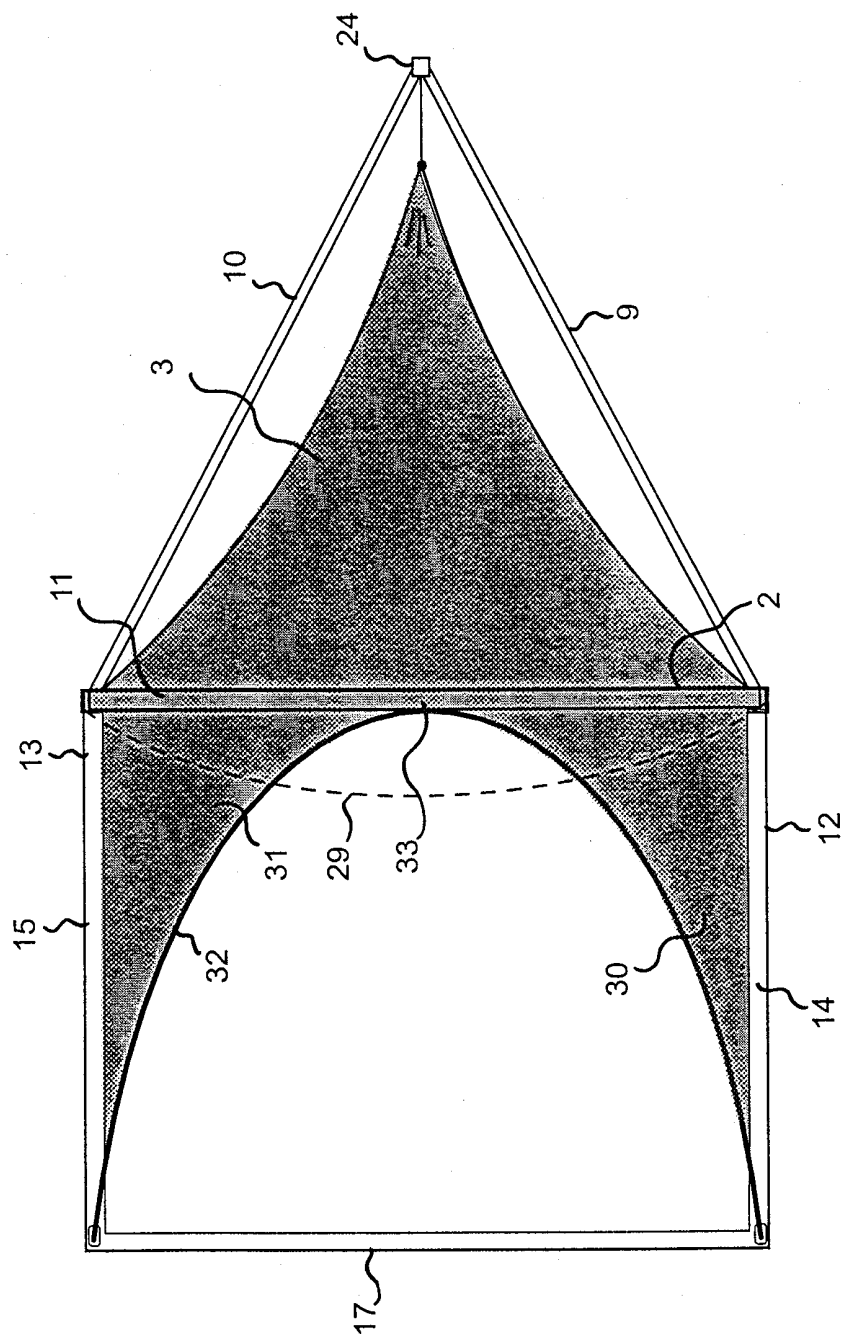


Fig. 3

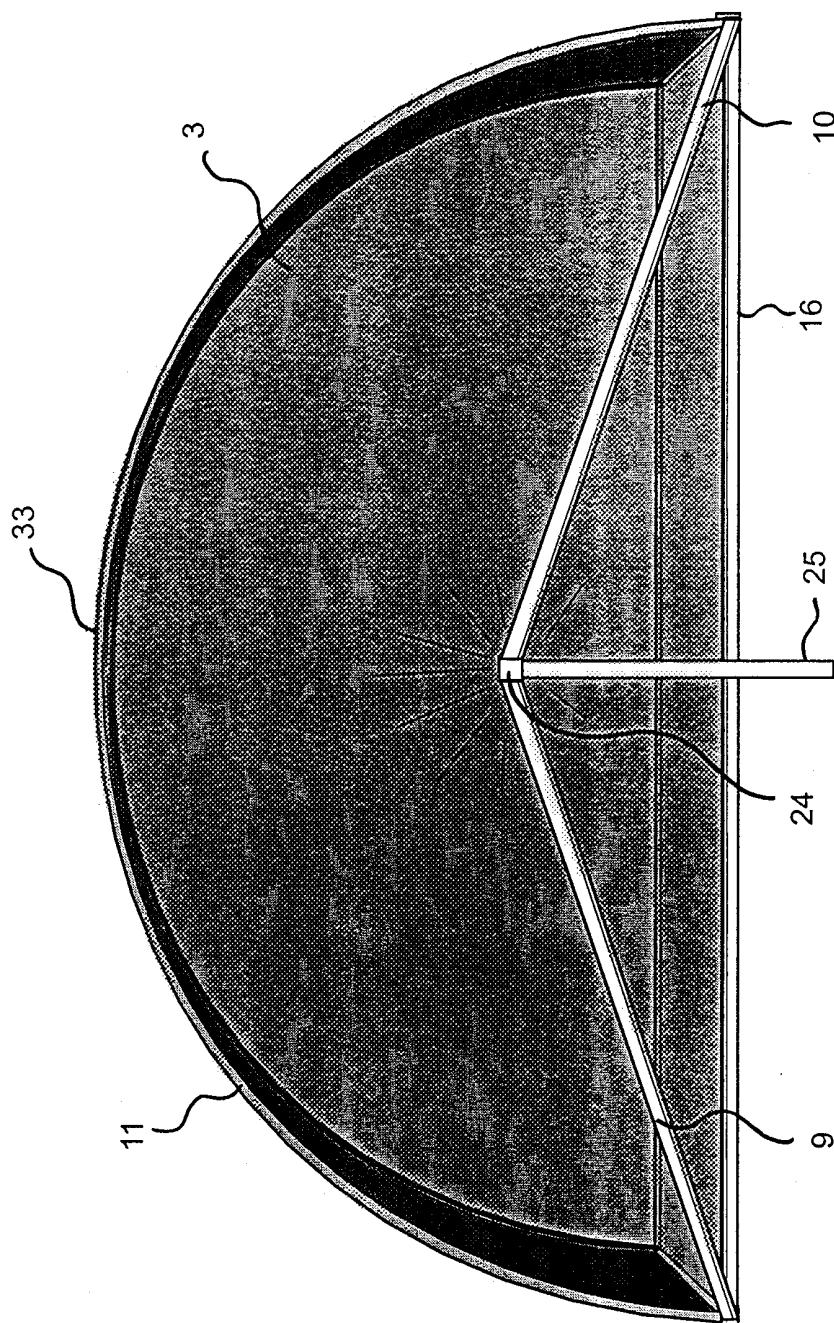


Fig. 4

5/9

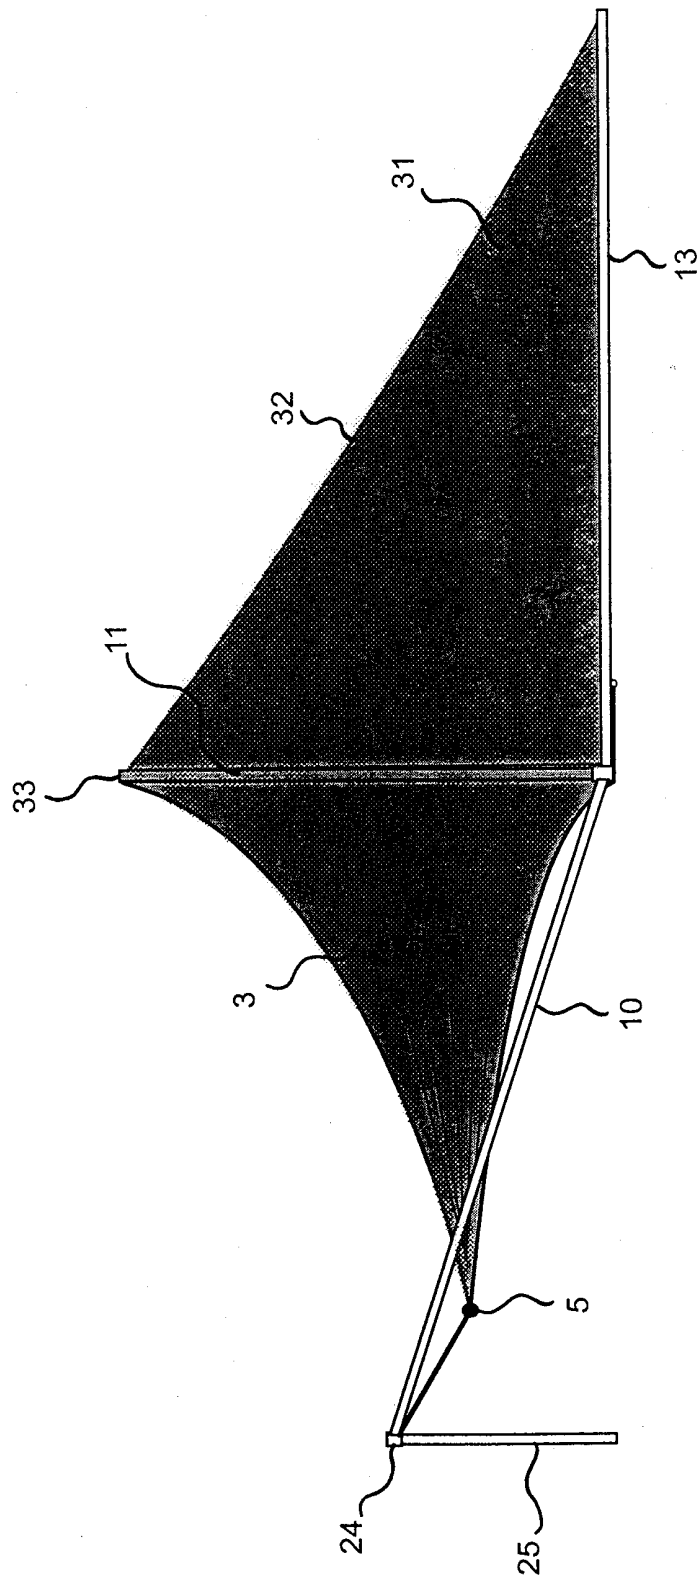


Fig. 5

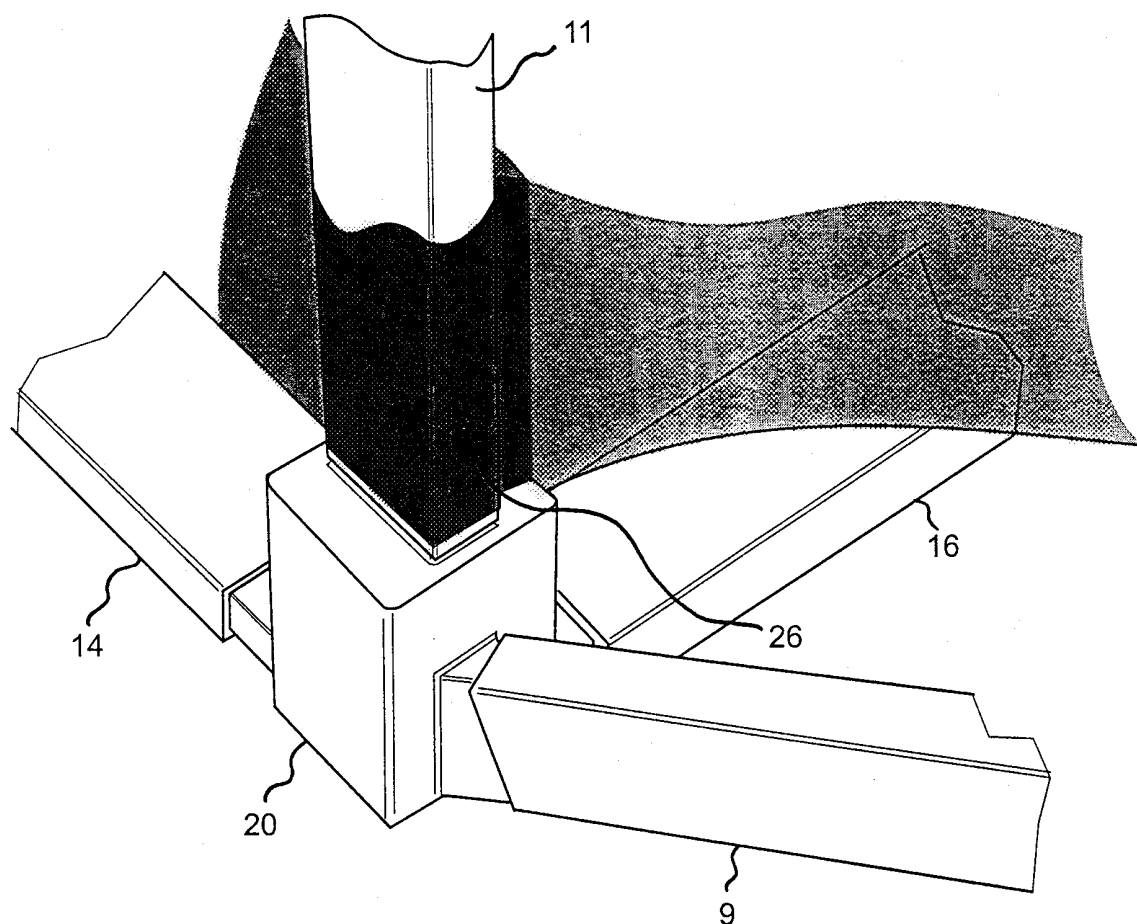


Fig. 6

7/9

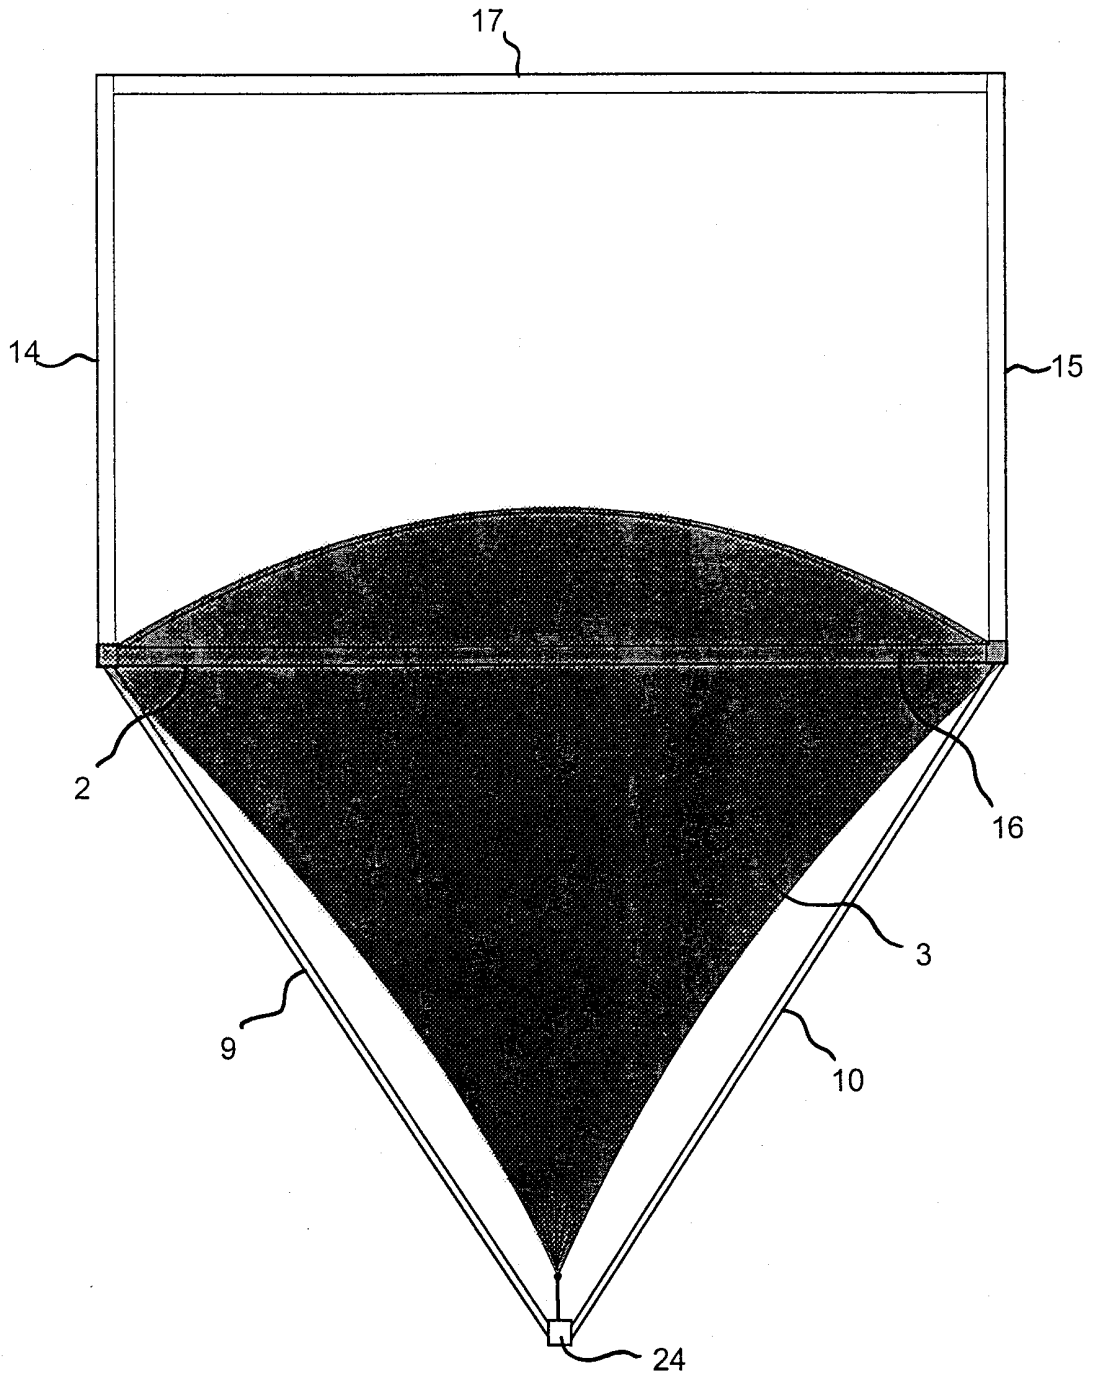


Fig. 7

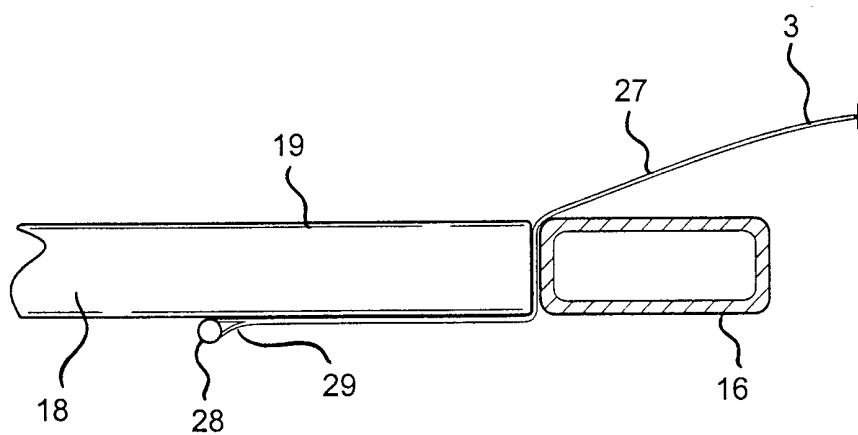


Fig. 8

9/9

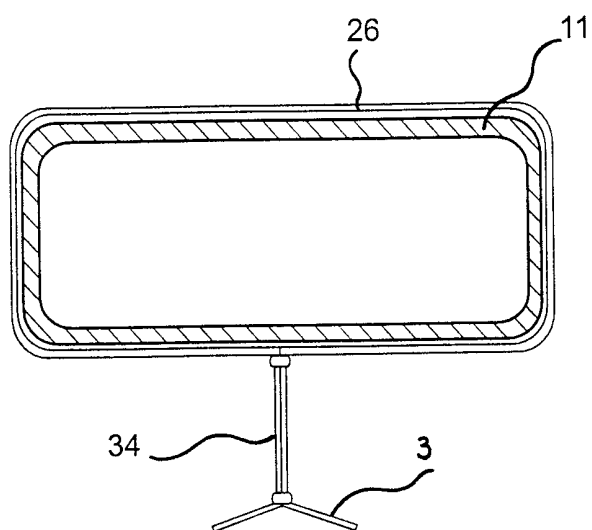


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 99/00553

A. CLASSIFICATION OF SUBJECT MATTER

Int Cl⁶: A63B 69/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: A63B 57/00, 63/00, 69/36

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AU 37488/85 A (PETTERSEN) 20 June 1985	1 - 17
X	AU 79403/91 A (SULLIVAN) 9 January 1992	1 - 17
X	GB 2140311 A (COLLINGS et al) 28 November 1984	1 - 17

☒ Further documents are listed in the
continuation of Box C

☒ See patent family annex

<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>		<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	--	---

Date of the actual completion of the international search
28 July 1999

Date of mailing of the international search report
2 Aug 1999

Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200
WODEN ACT 2606
AUSTRALIA
Facsimile No.: (02) 6285 3929

Authorized officer

J.W. THOMSON
Telephone No.: (02) 6283 2214

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/00553

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3895809 A (SHOCKLEY) 22 July 1975	1 - 17
X	US 5018731 A (DOYLE) 28 May 1991	1 - 17
X	US 5244213 A (ARMELL) 14 September 1993	1 - 17
X	US 5433433 A (ARMELL) 18 July 1995	1 - 17
P,X	US 5823885 A (STEMPFER) 20 October 1998	1 - 17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/AU 99/00553

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
AU	37488/85	EP	200727	WO	8502549		
US	5433433	BR	9507820	CA	2191765	EP	766582
		JP	10-501158	WO	9533531		
END OF ANNEX							