



(51) International Patent Classification: **G06T 7/00** (2006.01)

(21) International Application Number: PCT/IB2014/066499

(22) International Filing Date: 2 December 2014 (02.12.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 61/912,602 6 December 2013 (06.12.2013) US

(71) Applicant: **KONINKLIJKE PHILIPS N.V. [NL/NL]**; High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(72) Inventors: **GOSHEN, Liran**; High Tech Campus 5, NL-5656 AE Eindhoven (NL). **GRINGAUZ, Asher**; High Tech Campus 5, NL-5656 AE Eindhoven (NL).


(74) Agents: **STEFFEN, Thomas** et al.; High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BONE SEGMENTATION FROM IMAGE DATA

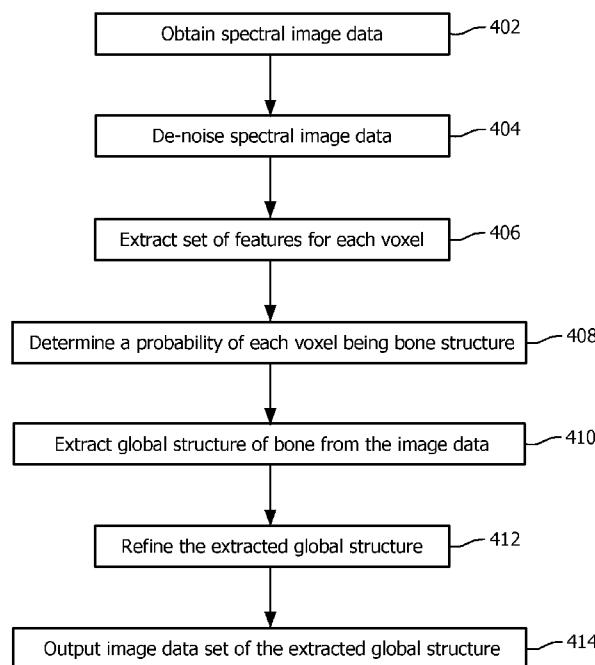

(57) **Abstract:** A method for segmenting bone in spectral image data is described herein. The spectral image data includes at least a first set of image data corresponding to a first energy and second set of image data corresponding to a second different energy. The method includes obtaining the spectral image data. The method further includes extracting a set of features for each voxel in spectral image data. The method further includes determining, for each voxel, a probability that each voxel represents bone structure based on the set of features. The method further includes extracting bone structure from the spectral image data based on the probabilities.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))* — *with international search report (Art. 21(3))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

BONE SEGMENTATION FROM IMAGE DATA

The following generally relates to image data processing and more particularly to bone segmentation from image data, and is described with particular application to computed tomography (CT). However, the following is also amenable to other imaging modalities.

5 A CT scanner includes an x-ray tube mounted on a rotatable gantry opposite a detector array and across an examination region. The rotatable gantry and the x-ray tube rotate around the examination region. The x-ray tube emits radiation that traverses the examination region and is detected by the detector array. The detector array generates and outputs a signal indicative of the detected radiation. The signal is reconstructed to generate 10 three dimensional volumetric image data. The volumetric image data includes voxels that are represented in terms of gray scale intensity values corresponding to relative radiodensity.

The gray scale values reflect the attenuation characteristics of the scanned subject, and show anatomical structures within the scanned subject. The absorption of a photon by a material is dependent on the energy of the photon traversing the material, thus 15 the detected radiation also includes spectral information, which provides additional information indicative of the elemental or material composition (e.g., atomic number) of the scanned material of the subject and/or object. Unfortunately, conventional CT image data does not reflect the spectral characteristics as the signal output by the detector array is proportional to the energy fluence integrated over the energy spectrum.

20 Spectral CT captures the above-noted spectral characteristics. Generally, a spectral CT scanner may include multiple x-ray tubes configured to emit radiation having different mean spectrums, a single x-ray tube configured to be controllably switched between at least two different emission voltages (e.g., 80 kVp and 140 kVp) during scanning, a single broad spectrum x-ray tube, and/or an energy-resolving detector array with energy-resolving 25 detectors (e.g., with photon counting detectors, at least two sets of photodiodes with different spectral sensitivities, etc.) and discrimination electronics.

Dual-energy CT utilizes two attenuation values acquired simultaneously at two photon energies to solve the photoelectric and Compton contribution that consists of the mass attenuation coefficient of a material, and thus to identify an unknown material by its

value of photoelectric and Compton contribution. Because any two linearly independent sums of two basis functions span the entire attenuation coefficient space, any material can be represented by a linear combination of two other materials, so called basis materials, such as water and iodine.

5 Clinical applications often require segmentation of bone structures in CT image data. Segmentation approaches, for example, are based on time consuming and tedious semi-automatic methods like atlas based methods followed by interactive editing tools to correct the results or faster methods with no need for interactivity, which lack in precision. In general, simple density or gradient operators do not allow precise and reliable
10 bone segmentation due to the fact that different tissues, e.g. bones and vessels, possess the same density range and may lie in close spatial proximity.

15 Performing quality bone segmentation, even with spectral CT, is a very challenging task, as the bone has a complex structure and has a heterogeneous material composition. An underlying challenge is that some bone structures have attenuation and spectral characteristic that is very similar to other structures in the body, e.g., contrast enhanced organs. In addition, spectral CT studies suffer from an inherently significant noise issue that further enhances the challenge. As a result, bone segmentation algorithms that are based mostly on spectral information deliver poor results.

20 Aspects described herein address the above-referenced problems and others.
The following describes a fast, automatic and robust bone segmentation algorithm for spectral CT. The bone segmentation algorithm includes removal of spectral noise with an approach that preserves the underlying object structure and spectral information, followed by extraction of a set of features for each voxel in the dataset, determination of a probability of each voxel belonging to bone structure, segmentation of
25 global structure of bone of the image data, and optional visual enhancement of the segmented bone structure.

30 In one aspect, a method for segmenting bone in spectral image data is described herein. The spectral image data includes at least a first set of image data corresponding to a first energy and second set of image data corresponding to a second different energy. The method includes obtaining the spectral image data. The method further includes extracting a set of features for each voxel in spectral image data. The method further includes determining, for each voxel, a probability that each voxel represents bone structure based on the set of features. The method further includes extracting bone structure from the spectral image data based on the probabilities.

In another aspect, a computing system includes computer readable storage medium that stores a bone segmentation algorithm and a computer processor that executes the bone segmentation algorithm, which causes the computer processor to: extract bone structure from spectral image data based on a probability that each voxel in the spectral 5 image data represents bone structure.

In another aspect, a computer readable storage medium is encoded with computer readable instructions. The computer readable instructions, when executed by a processor, cause the processor to: obtain spectral image data, wherein the spectral image data includes at least a first set of image data corresponding to a first energy and second set 10 of image data corresponding to a second different energy, de-noise the spectral image data, wherein the set of features is extracted from the de-noised spectral image data, extract a set of features for each voxel in de-noised spectral image data, determine, for each voxel, a probability that each voxel represents bone structure based on the set of features, extract bone structure from the spectral image data based on the probabilities, and visually refine 15 the extracted bone.

The invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating the preferred embodiments and are not to be construed as limiting the invention.

20 FIGURE 1 schematically illustrates an example imaging system in connection with a computing system with a bone segmentation algorithm.

FIGURE 2 schematically illustrates an example of the bone segmentation algorithm.

25 FIGURE 3 schematically illustrates an example of the spectral noise remover of the segmentation algorithm.

FIGURE 4 illustrates an example method for segmenting bone from image data.

FIGURE 1 schematically illustrates an imaging system 100 such as a computed tomography (CT) scanner. The imaging system 100 includes a generally 30 stationary gantry 102 and a rotating gantry 104. The rotating gantry 104 is rotatably supported by the stationary gantry 102 and rotates around an examination region 106 about a longitudinal or z-axis ("Z").

A radiation source 108, such as an x-ray tube, is rotatably supported by the rotating gantry 104 and rotates with the rotating gantry 104 and emits poly-energetic

radiation that traverses the examination region 106. In the illustrated embodiment, the radiation source 108 includes a single broad spectrum x-ray tube. In a variation, the radiation source 108 is configured to be controllably switched between at least two different emission voltages (e.g., 80 kVp, 140 kVp, etc.) during scanning. In yet another variation, the radiation source 108 includes two or more x-ray tubes configured to emit radiation with different mean spectrums. In another variation, the radiation source 108 includes a combination of the above.

A radiation sensitive detector array 110 subtends an angular arc opposite the radiation source 108 across the examination region 106. The array 110 includes one or more rows of detectors arranged with respect to each other along a z-axis direction, detects radiation traversing the examination region 106, and generates signals indicative thereof. The illustrated array 110 includes a dual-energy detector with at least two scintillators having different x-ray energy sensitivities and at least two corresponding photosensors having corresponding optical sensitivities. An example is described in serial number 11/912,673, filed October 26, 2007, and entitled "Double Decker Detector for Spectral CT," the entirety of which is incorporated herein by reference. In a variation, the radiation sensitive detector array 110 includes a direct conversion detector (e.g., CdTe, CdZnTe, etc.).

A reconstructor 112 reconstructs the signals output by the detector array 110. This may include decomposing the signal into various energy dependent components. An example decomposition approach is described in application serial number PCT/IB2007/055105, filed on December 14, 2007, filed on December 20, 2006, which is incorporated in its entirety herein by reference. The reconstructor 112 reconstructs the energy dependent components, generating one or more images corresponding to one or more different energies. The reconstructor 112 may also combine the energy dependent components, generating non-spectral image data.

A subject support 113, such as a couch, supports an object or subject in the examination region. A general purpose computer serves as an operator console 114. The console 114 includes a human readable output device such as a monitor or display and an input device such as a keyboard and mouse. Software resident on the console 114 allows the operator to interact with the scanner 100 via a graphical user interface (GUI) or otherwise. This interaction may include selecting a spectral imaging protocol or a non-spectral imaging protocol, initiating scanning, etc.

A computing system 116, such as computers, includes input/output (I/O) 118 that facilitates communication with the imaging system 100, an output device(s) 120 such as

a display monitor, a filer, etc., and an input device(s) 122 such as a mouse, keyboard, etc. The computing system 116 further includes at least one processor 124 (e.g., a central processing unit or CPU, a microprocessor, or the like) and a computer readable storage medium 126 (which excludes transitory medium), such as physical memory and/or other non-transitory memory. The computer readable storage medium 126 stores computer readable instructions 128 and data 130. The at least one processor 124 executes the computer readable instructions 128. The at least one processor 126 can also execute computer readable instructions carried by a signal, carrier wave, and other transitory (i.e., non-computer readable storage) medium.

10 The computer readable instructions 128, in the illustrated embodiment, include at least a bone segmentation algorithm 132. As described in greater detail below, the bone segmentation algorithm 132 includes removal of spectral noise from spectral image data with an approach that preserves the underlying object structure and spectral information, followed by extraction of a set of features for each voxel in the dataset, determination of a 15 probability of each voxel belonging to bone structure, segmentation of global structure of bone of the image data, and optional visual refinement of the segmented global structure. The spectral image data includes at least a first set of image data corresponding to a first energy and second set of image data corresponding to a second different energy.

20 In the illustrated embodiment, the spectral image data is obtained from the imaging system 100. In a variation, the spectral image data is obtained from a different imaging system. In another variation, the spectral image data is obtained from a data repository such as a picture archiving and communication system (PACS), a radiology information system (RIS), a hospital information system (HIS), an electronic medical record (EMR), a database, a server, an imaging system, a computer and/or other data repository. 25 With this embodiment, the spectral image data is generated with the imaging system 100, different imaging system, etc. The data can be transferred to the computing system 116 via Digital Imaging and Communications in Medicine (DICOM), Health Level 7 (HL7), and/or other formats.

FIGURE 2 shows an example of the bone segmentation algorithm 132.

30 The bone segmentation algorithm 132 includes a spectral noise remover 202. The spectral noise remover 202 removes noise and artifacts from the image data while preserving the underlying object structure and spectral information. An example of the spectral noise remover 202 is schematically illustrated in FIGURE 3.

In FIGURE 3, a reference structure selector 302 selects a local reference dataset. The local reference dataset is selected to provide a reference dataset that can be used to derive underlying local object structures. A noise modeler 304 analyzes the selected reference dataset and models its noise pattern.

5 A noise remover 306 removes the noise. This includes estimating the underlying local structure from the reference dataset. This further includes propagating the estimated structure to the target dataset and utilizing it as additional constraints for a restoration. Some of the removed texture and/or noise can be added back. This provides control over the final image appearance. Another example of spectral noise removal is
10 described in patent application serial number 60/767,300, filed on February 21, 2013, and entitled “STRUCTURE PROPAGATION RESTORATION FOR SPECTRAL CT,” which is incorporated herein by reference in its entirety.

15 In general, in dual energy image data, each of a specific energy image is usually based on roughly half of the radiation dose of a corresponding non-spectral conventional scan. In addition, the estimate of the material decomposition is based on projections between two vectors that the angle between them is narrow. The combination of these two factors, i.e., large noise and narrow angle, amplifies significantly the noise in the estimated material decomposition. The noise remover 306 reduces this noise.

20 Returning to FIGURE 2, the bone segmentation algorithm 132 further includes a feature extractor 204. The feature extractor 204 extracts a set of features for each voxel in the dataset. The features are based on the local spectral and the local structure/geometry around the voxel. The set of features characterize the voxel and enable subsequent classification.

25 Examples of suitable features include, but are not limited to: 1) a Hounsfield unit (HU) of the lower energy image data, where the low energy image data can be either lower kVp image data or lower keV virtual monochromatic image data; 2) an HU of the higher energy image data, where higher energy image data can be either higher kVp image data or higher keV virtual monochromatic image data; 3) a Difference of Gaussians (DOG) of the lower energy image data; 4) a DOG of the higher energy image data, and a
30 “surfaceness” metric.

The lower and higher energy image data correspond, in this example, to the two energies in a dual-energy scan. The DOG of the lower energy image data represents, for example, iodine, and the higher energy image data represents, for example, calcium. The DOGs may provide an enhancement where there is a small amount of iodine or calcium in

the image data. The “surfaceness” metric, for example, indicates how well the local structure fit to structure of the surface. An example approach for computing the “surfaceness” metric is shown in EQUATION 1:

5

EQUATION 1:

$$\text{Surfaceness} = \frac{|\lambda_1 - \lambda_3|}{\lambda_2^2},$$

where $|\lambda_1| \geq |\lambda_2| \geq |\lambda_3|$ are the eigenvalues of the local structure tensor. The set of features in this example represents a vector of features.

10

The bone segmentation algorithm 132 further includes a voxel probability determiner 206. The voxel probability determiner 206 determines a probability of each voxel belonging to bone structure. The voxel probability determiner 206 determines the probability based on the extracted features, for example, the local spectral and the local structure around the voxel. The utilization of both spectral and structural/geometrical properties within a unified estimator can enhance the performance of the estimator.

15

An example of determining a probability is shown in EQUATION 2:

EQUATION 2:

$$P(V_i \in \text{Bone} | X_i) = \frac{1}{1 + e^{-\beta \cdot X_i}},$$

20

which is a multivariate logistic regression approach, which determines the probability that voxel, V_i , belongs to a bone structure, where X_i is the vector of features for voxel V_i , X_0 is an additional explanatory pseudo-variable with a fixed value of 1, and β is a parameter vector of the logistic regression.

25

The bone segmentation algorithm 132 further includes a segmentor 208. The segmentor 208 extracts the global structure of bone of the image data. In one instance, the segmentor 208 applies a segmentation model over the results of the voxel probability determiner 206. The model, for example, is a globally convex segmentation model. The globally convex segmentation model can be used to obtain reliable and robust results based on the fast numerical method.

30

An example of a suitable segmentation model is shown in EQUATION 3:

EQUATION '3:

$$\text{Min}_{0 \leq s \leq 1} \int |\nabla s| + \lambda((c_1 - p)^2 - (c_2 - p)^2)s,$$

5 where the segmentation, s , is obtained by optimization (e.g., minimization in this example), $\int |\nabla s|$ represents total variation, λ is a parameter that controls the strength of the regularization, p is local estimator results and the rest of the parameters are segmentation parameters. In one non-limiting instance, c_1 is set to a numerical value of one (1) and c_2 is set to a numerical value of zero (0). In a variation, at least one of c_1 or c_2 is a different
10 value.

Other suitable segmentation algorithms are described in Shi et al., "Normalized cuts and image segmentation," Pattern Analysis and Machine Intelligence, IEEE Transactions on 22.8 (2000): 888-905, Goldstein et al., "Geometric applications of the split Bregman method: segmentation and surface reconstruction," Journal of Scientific
15 Computing 45.1-3 (2010): 272-293, and/or other segmentation algorithms.

A refiner 210 visually refines the extracted global structure of the bone. For example, bone consists of different types of tissue – cortical (compact) bone and trabecular (porous) bone. As such, the probability for all the bone in the image data may not be the same. As a consequence, the extracted bone may have holes or darker regions for voxels
20 where the probability is lower than the voxels representing other regions of the bone. The refiner 210 fills in the holes, producing a more uniform representation of the extracted bone. In one instance, this results in an intensity of trabecular bone in the extracted bone being approximately a same intensity as an intensity of cortical bone in the extracted bone.

FIGURE 4 illustrate an example method for segmenting bone structure from
25 image data.

It is to be appreciated that the ordering of the acts in the method is not limiting. As such, other orderings are contemplated herein. In addition, one or more acts may be omitted and/or one or more additional acts may be included.

At 402, spectral image data, including a plurality of images corresponding to
30 different energy bins, is obtained. As discussed herein, in one non-limiting instance the spectral image data can be generated by a multi-source imaging system, fast kVp switching, and/or a multi-layer detector. Alternatively, the input images can include virtually monochromatic images.

At 404, the spectral image data is de-noised. As described herein, in one non-limiting instance this includes employing an algorithm that removes noise and artifacts from the spectral image data while preserving the underlying object structure and spectral information.

5 At 406, a set of features is extracted for each voxel in the dataset. As described herein, in one non-limiting instance this includes extracting features based on the local spectral and the local structure/geometry around the voxel that characterize the voxel for classification.

10 At 408, a probability of each voxel belonging to a bone structure is estimated. As described herein, in one non-limiting instance this includes estimating the probability based on the extracted features, i.e., local spectral and local structure around the voxel.

15 At 410, global structure of bone is extracted from the image data. As described herein, in one non-limiting instance this includes applying a segmentation model over the probability.

At 412, the extracted global structure of bone is visually refined. As described above, this may include filling in darker regions corresponding to trabecular bone.

20 At 414, an image data set of the segmented or extracted global structure of bone is output. This may include visually displaying the segmented bone and/or conveying the segmented bone to another device. Again, this algorithm provides a fast, automatic and robust bone segmentation algorithm for spectral CT.

25 The above provides a fast, automatic and robust bone segmentation algorithm for spectral CT. The algorithm is well suited for applications such as trauma, vessel and orthopedic applications. The algorithm also can be utilized to enhance spectral results such as iodine map, virtual non-contrasted (VNC) (and therefore facilitate reducing radiation), enhancement of perfusion analysis (based on iodine map), etc. Furthermore, the algorithm can be utilized also in the image reconstruction chain, e.g., enhance beam hardening correction and virtual monochromatic image reconstruction.

30 The above acts may be implemented by way of computer readable instructions, encoded or embedded on computer readable storage medium, which, when executed by a computer processor(s), cause the processor(s) to carry out the described acts. Additionally or alternatively, at least one of the computer readable instructions is carried by a signal, carrier wave or other transitory medium.

The invention has been described with reference to the preferred embodiments. Modifications and alterations may occur to others upon reading and understanding the preceding detailed description. It is intended that the invention be constructed as including all such modifications and alterations insofar as they come within
5 the scope of the appended claims or the equivalents thereof.

CLAIMS:

1. A method for segmenting bone in spectral image data, which includes at least a first set of image data corresponding to a first energy and second set of image data corresponding to a second different energy, the method comprising:
 - obtaining the spectral image data;
 - extracting a set of features for each voxel in spectral image data;
 - determining, for each voxel, a probability that each voxel represents bone structure based on the set of features; and
 - extracting bone structure from the spectral image data based on the probabilities.
2. The method of claim 1, further comprising:
 - visually refining the extracted bone so that an intensity of trabecular bone in the extracted bone is approximately a same intensity as an intensity of cortical bone in the extracted bone.
3. The method of claim 1, wherein the extracted bone structure is at least one of visually displayed, applied as a mask for other image data, employed to enhance an iodine map or virtual non-contrasted image data, beam hardening correction, and virtual monochromatic image reconstruction.
4. The method of any of claims 1 to 3, further comprising:
 - de-noising, prior to extracting the set of features, the spectral image data, wherein the set of features is extracted from the de-noised spectral image data.
5. The method of any of claims 1 to 3, wherein the extracted set of features is based on local spectral and local structure around each of the voxels.
6. The method of any of claims 1 to 5, wherein the first energy is lower than the second energy, and the set of features includes at least a Hounsfield unit of the first energy

image data; a Hounsfield unit of the second energy image data; a difference of Gaussians of the first energy image data; a difference of Gaussians of the second energy image data, and a surfaceness metric.

7. The method of claim 6, further comprising:

computing the surfaceness metric based on: $\frac{|\lambda_1||\lambda_3|}{\lambda_2^2}$, where $|\lambda_1| \geq |\lambda_2| \geq |\lambda_3|$ are

eigenvalues of a local structure tensor.

8. The method of any of claims 1 to 7, wherein the probability is determined based on the extracted features.

9. The method of any of claims 1 to 8, further comprising:

computing the probability based on: $P(V_i \in Bone | X_i) = \frac{1}{1 + e^{-\beta \cdot X_i}}$, where V_i

is a probability that a voxel belongs to a bone structure, X_i is a vector of features for voxel V_i , X_0 is a pseudo-variable with a fixed value of 1, and β is a parameter vector of a logistic regression.

10. The method of any of claims 1 to 6, wherein extracting the bone structure includes applying a segmentation model over the probabilities.

11. The method of claim 10, wherein the segmentation model includes a globally convex segmentation model.

12. The method of any of claims 1 to 11, wherein the segmentation is based on:

$\text{Min}_{0 \leq s \leq 1} \int |\nabla s| + \lambda((c_1 - p)^2 - (c_2 - p)^2)s$, where s represents the segmentation, $\int |\nabla s|$

represents total variation, λ is a parameter that controls the strength of the regularization, p is the probability, c_1 is set to a numerical value of one (1), and c_2 is set to a numerical value of zero (0).

13. A computing system (116), comprising:

computer readable storage medium (126) that stores a bone segmentation

algorithm (132); and

a computer processor (124) that executes the bone segmentation algorithm, which causes the computer processor to: extract bone structure from spectral image data based on a probability that each voxel in the spectral image data represents bone structure.

14. The computing system of claim 13, wherein the computer processor: de-noises the spectral image data; extracts a set of features for each voxel in de-noised spectral image data; determines, for each voxel, the probability based on the set of features, and extracts the bone structure from the spectral image data based on the probabilities.

15. The computing system of claim 14, wherein the computer processor: visually refines the extracted bone.

16. The computing system of any of claims 14 to 15, wherein the extracted set of features is based on local spectral and local structure around each of the voxels.

17. The computing system of any of claims 14 to 16, wherein the set of features includes at least a Hounsfield unit of lower energy image data; a Hounsfield unit of higher energy image data; a difference of Gaussians of the lower energy image data; a difference of Gaussians of the higher energy image data, and a surfaceness metric.

18. The computing system of claim 17, wherein the surfaceness metric indicates how well local structure fit to structure of a surface.

19. The computing system of any of claims 13 to 18, wherein the computer processor at least one of visually displays the extracted bone structure or one or more of applies the extracted bone structure as a mask for other image data, to enhance an iodine map or virtual non-contrasted image data, in a beam hardening correction, or with a virtual monochromatic image reconstruction.

20. A computer readable storage medium encoded with one or more computer executable instructions, which, when executed by a processor of a computing system, causes the processor to:

obtain spectral image data, wherein the spectral image data includes at least a

first set of image data corresponding to a first energy and second set of image data corresponding to a second different energy;

de-noise the spectral image data, wherein the set of features is extracted from the de-noised spectral image data;

extract a set of features for each voxel in de-noised spectral image data;

determine, for each voxel, a probability that each voxel represents bone structure based on the set of features;

extract bone structure from the spectral image data based on the probabilities; and

visually refine the extracted bone.

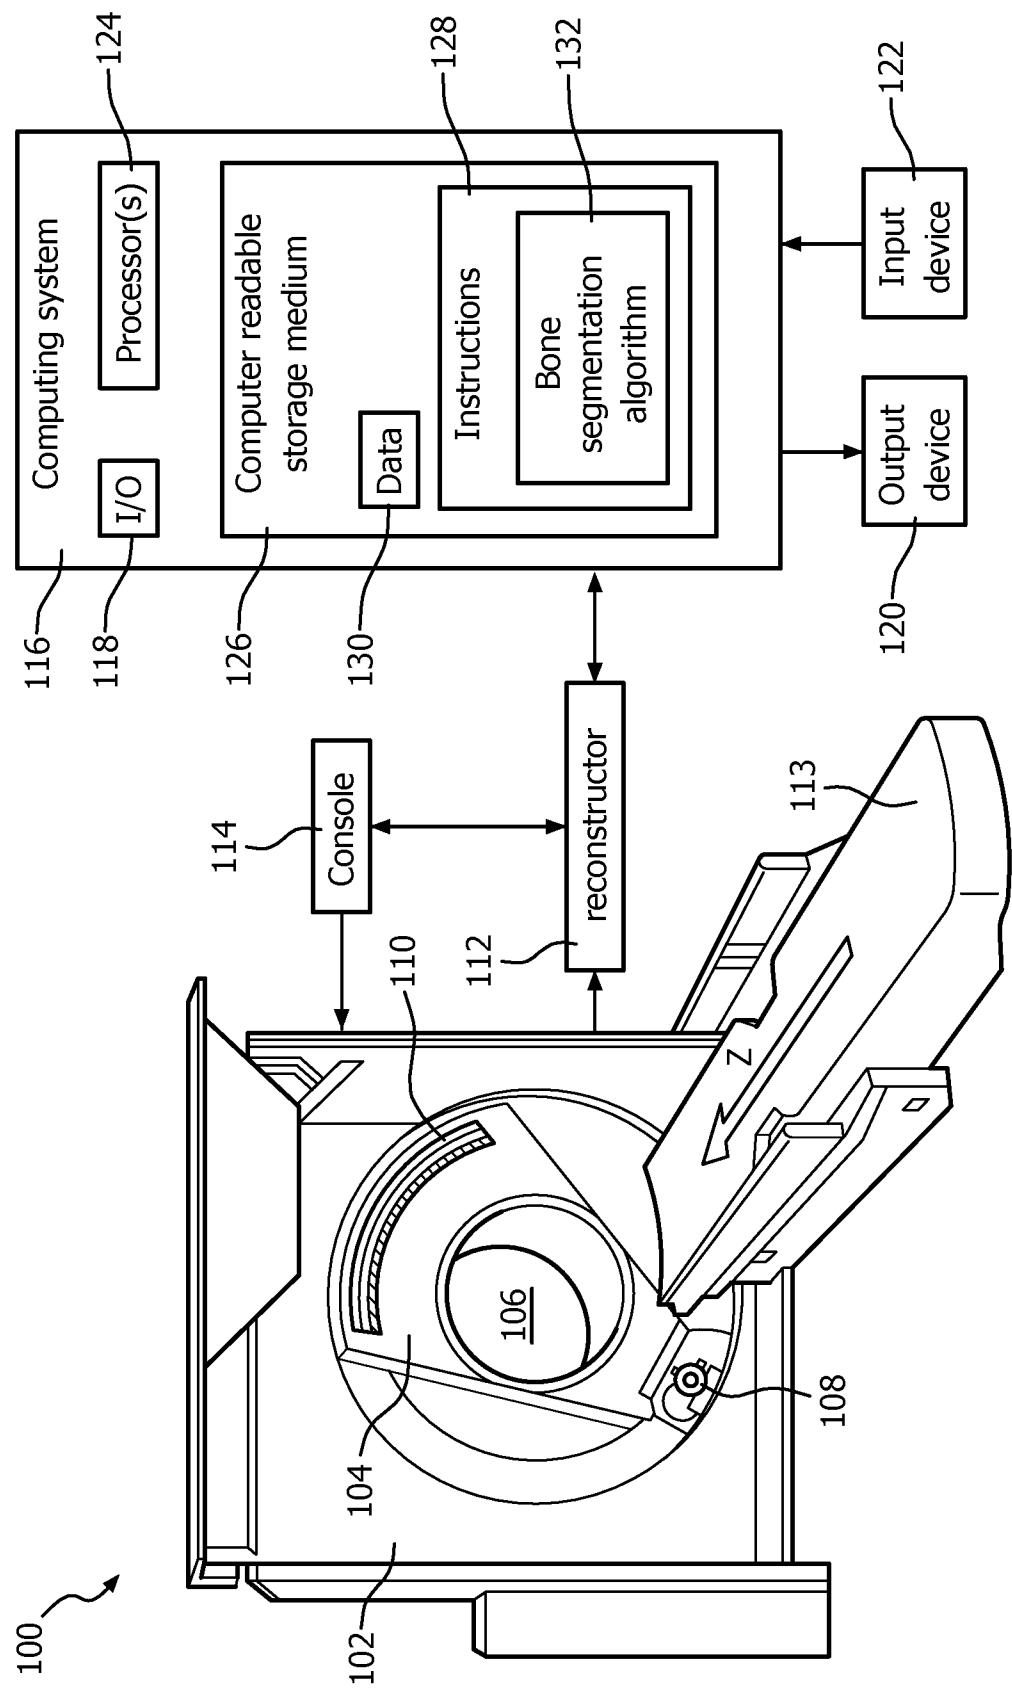


FIG. 1

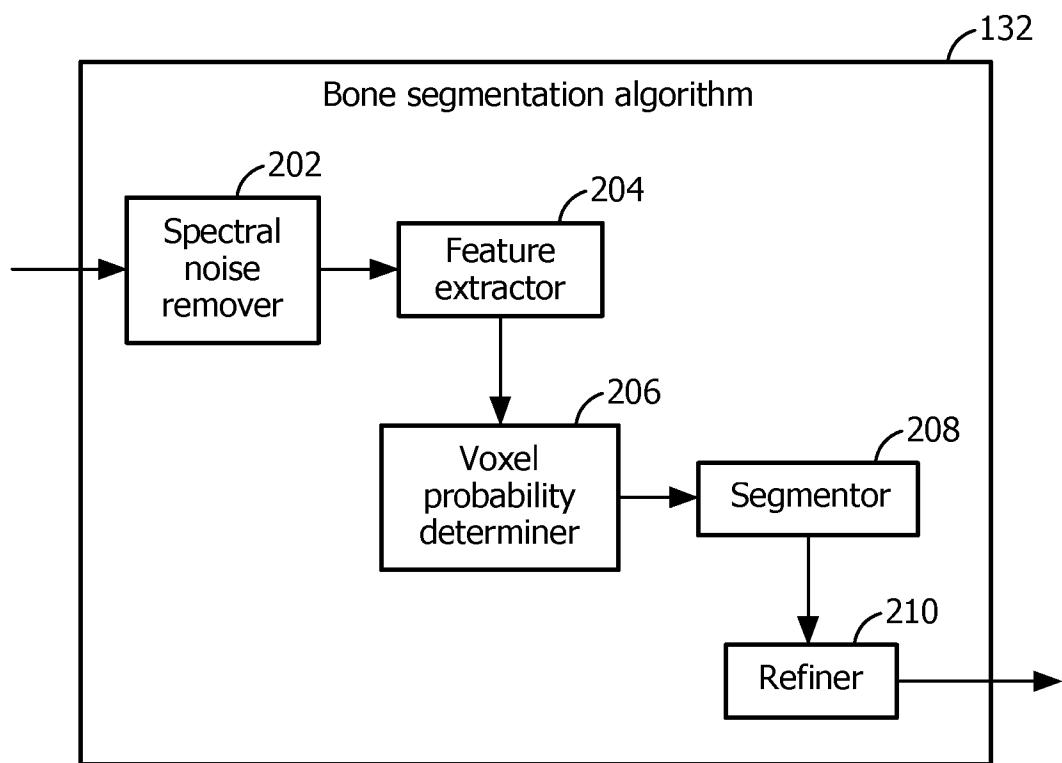


FIG. 2

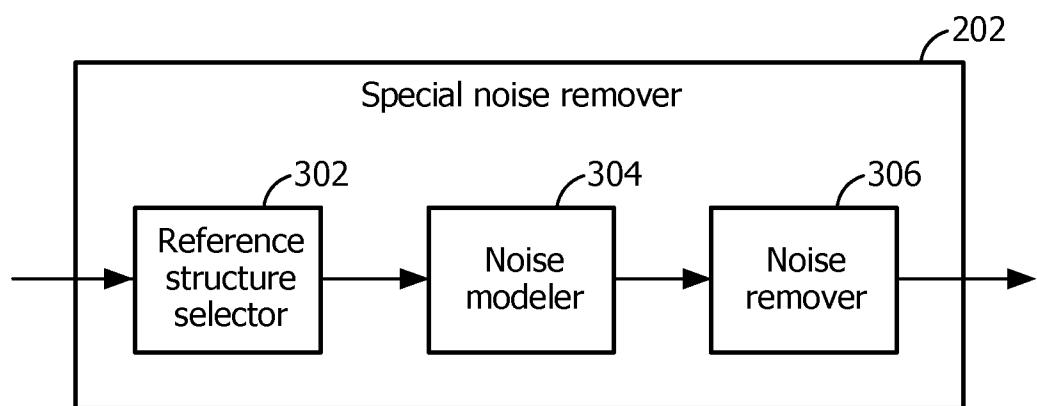
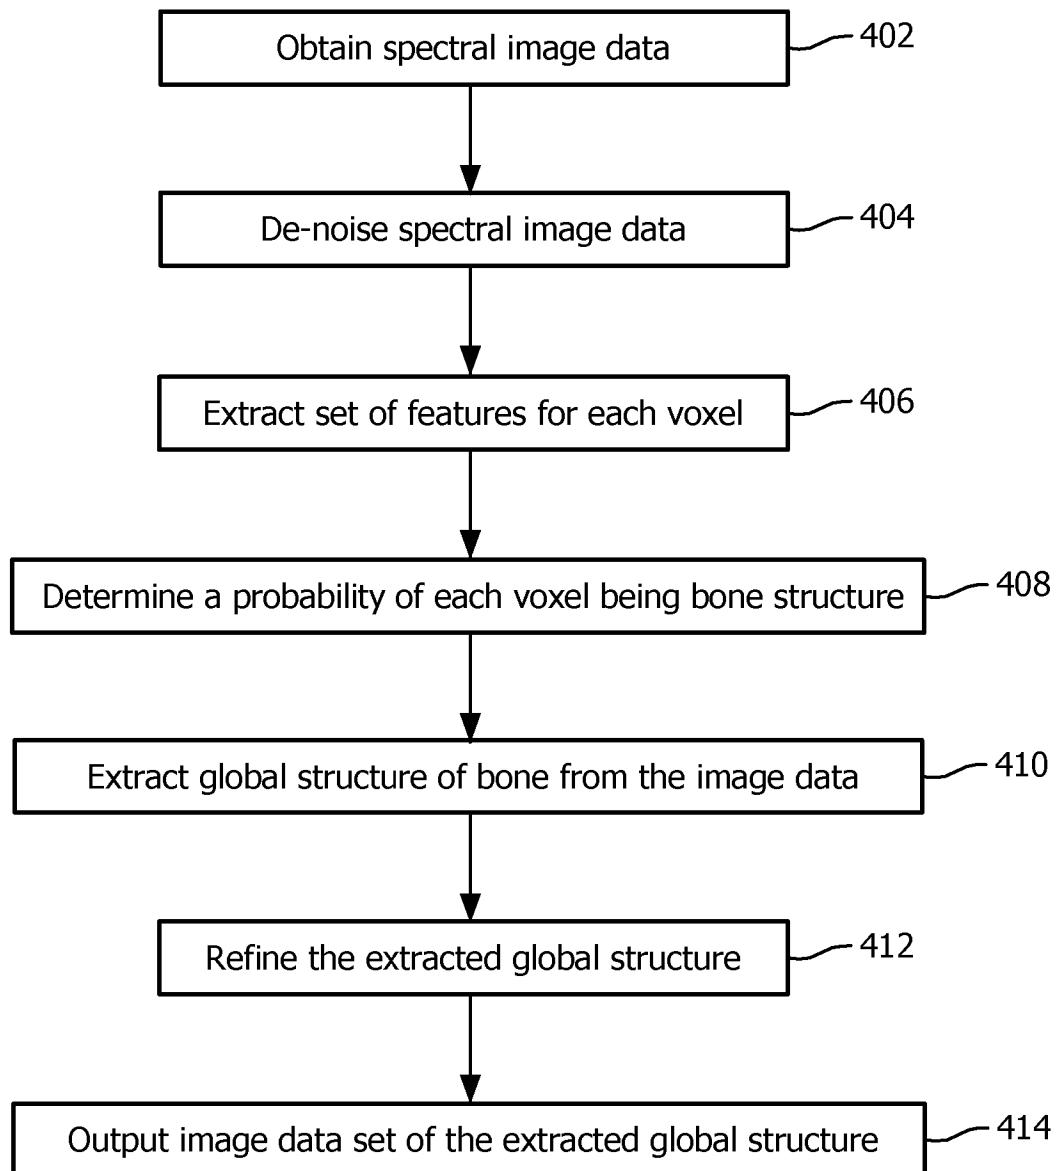


FIG. 3

**FIG. 4**

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/066499

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06T7/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/092127 A1 (GRASRUCK MICHAEL [DE] ET AL) 26 April 2007 (2007-04-26)	1-3, 5-13, 15-19
Y	paragraph [0020] - paragraph [0056] figure 4 -----	4,14,20
X	US 2011/033099 A1 (KADOMURA TAKAYUKI [JP] ET AL) 10 February 2011 (2011-02-10)	1-3,5-8, 10-13, 15-19
A	paragraph [0084] - paragraph [0131] -----	4,9,14, 20
A	JP 3 258233 B2 (TEIJIN LTD) 18 February 2002 (2002-02-18) paragraph [0027] ----- -/-	2,15,20

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
2 February 2015	10/02/2015

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Celik, Hasan
--	--

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2014/066499

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2013/011418 A2 (KONINKL PHILIPS ELECTRONICS NV [NL]; GOSHEN LIRAN [IL]) 24 January 2013 (2013-01-24) page 6, line 26 - page 7, line 4 -----	4,14,20
A	CHOI WOOK-JIN ET AL: "Automated pulmonary nodule detection based on three-dimensional shape-based feature descriptor", COMPUTER METHODS AND PROGRAMS IN BIOMEDICINE, vol. 113, no. 1, 7 September 2013 (2013-09-07), pages 37-54, XP028777205, ISSN: 0169-2607, DOI: 10.1016/j.cmpb.2013.08.015 2.2.1. Eigenvalue decomposition of Hessian matrix; page 41 - page 43 -----	5,16
A	VAHID TAVAKOLI ET AL: "A survey of shaped-based registration and segmentation techniques for cardiac images", COMPUTER VISION AND IMAGE UNDERSTANDING, vol. 117, no. 9, 1 September 2013 (2013-09-01), pages 966-989, XP055166319, ISSN: 1077-3142, DOI: 10.1016/j.cviu.2012.11.017 3.2.2. Geometric active contours; page 979 - page 980 -----	10-12
A	TONY F CHAN ET AL: "Active Contours Without Edges", IEEE TRANSACTIONS ON IMAGE PROCESSING, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 10, no. 2, 1 February 2001 (2001-02-01), XP011025732, ISSN: 1057-7149 II. Description of the model; page 267 - page 270 -----	10,12
A	TONY F. CHAN ET AL: "Algorithms for Finding Global Minimizers of Image Segmentation and Denoising Models", SIAM JOURNAL ON APPLIED MATHEMATICS, vol. 66, no. 5, 17 September 2004 (2004-09-17), pages 1632-1648, XP055166580, ISSN: 0036-1399, DOI: 10.1137/040615286 abstract ----- -/-	10,11

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/066499

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010/328313 A1 (ZAMYATIN ALEKSANDR [US] ET AL ZAMYATIN ALEXANDER [US] ET AL) 30 December 2010 (2010-12-30) figures 4a,4b,4c paragraph [0006] - paragraph [0065] -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2014/066499

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2007092127	A1	26-04-2007	CN 101025823 A DE 102005049602 B3 JP 2007111526 A US 2007092127 A1	29-08-2007 19-04-2007 10-05-2007 26-04-2007
US 2011033099	A1	10-02-2011	JP 5329534 B2 US 2011033099 A1 WO 2009131109 A1	30-10-2013 10-02-2011 29-10-2009
JP 3258233	B2	18-02-2002	JP 3258233 B2 JP H09262232 A	18-02-2002 07-10-1997
WO 2013011418	A2	24-01-2013	CN 103649990 A EP 2732431 A2 JP 2014522693 A US 2014133729 A1 WO 2013011418 A2	19-03-2014 21-05-2014 08-09-2014 15-05-2014 24-01-2013
US 2010328313	A1	30-12-2010	NONE	