

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3317546 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **F 15 C 1/22 (2006.01)** **B 05 B 1/08 (2006.01)** **F 02 M 61/18 (2006.01)**
F 15 B 21/12 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2020-12-07**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2020-09-09**
- (86) Europæisk ansøgning nr.: **16798135.6**
- (86) Europæisk indleveringsdag: **2016-11-16**
- (87) Den europæiske ansøgnings publiceringsdag: **2018-05-09**
- (86) International ansøgning nr.: **EP2016077864**
- (87) Internationalt publikationsnr.: **WO2017085129**
- (30) Prioritet: **2015-11-18 DE 102015222771** **2016-07-29 DE 202016104170 U**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **FDX Fluid Dynamix GmbH, Rohrdamm 88, 13629 Berlin, Tyskland**
- (72) Opfinder: **BOBUSCH, Bernhard, Lothar Bucherstrasse 9A, 12157 Berlin, Tyskland**
KRUEGER, Oliver, Thorwaldsenstrasse 25, 12157 Berlin, Tyskland
WINTERING, Jens, Grellstrasse 58, 10409 Berlin, Tyskland
- (74) Fuldmægtig i Danmark: **Chas. Hude A/S, H.C. Andersens Boulevard 33, 1780 København V, Danmark**
- (54) Benævnelse: **FLUIDKOMPONENT**
- (56) Fremdragne publikationer:
EP-A2- 1 472 966
US-A1- 2004 251 315
US-A1- 2007 295 840
US-A1- 2013 240 644

The invention relates to a fluidic component in accordance with the preamble of claim 1 and to a cleaning appliance which comprises a fluidic component of this kind. The fluidic component is provided for the purpose of producing a moving fluid jet. Exemplary fluidic components are disclosed for example by US 2013/240644 A1, EP 1 472 966 A2, US 2007/295840 A1 and US 2004/251315 A1.

For the production of a fluid jet with a high speed or high momentum, the prior art contains nozzles which are designed to subject the fluid jet to a pressure which is higher than the ambient pressure. By means of the nozzle, the fluid is accelerated and/or directed or concentrated. In order to produce a movement of a fluid jet, the nozzle is generally moved by means of a device. To produce a moving fluid jet, an additional device is thus required apart from the nozzle. This additional device comprises moving component parts, which easily wear. The costs associated with production and maintenance are correspondingly high. Another disadvantage is the fact that a relatively large installation space is required overall owing to the moving component parts.

Fluidic components are furthermore known for the production of a moving fluid flow (or fluid jet). The fluidic components do not comprise any moving component parts serving to produce a moving fluid flow. As a result, in comparison with the nozzles mentioned at the outset, they do not have the disadvantages resulting from the moving component parts. However, a steep pressure gradient often occurs within the fluidic components in the case of the known fluidic components, and therefore cavitation, i.e. the formation of cavities (bubbles), can occur within the components as the liquid fluid flow flows through the fluidic components. As a result, there can be a massive reduction in the life of the components or failure of the fluidic components may be caused. Moreover, the known fluidic components are more suitable for the wetting of surfaces than for the production of a fluid jet with a high speed or a high momentum. Thus, a fluid flow emerging from a known fluidic component has

the spray characteristic of a fan nozzle, which produces a finely atomized jet.

It is the underlying object of the present invention to provide a fluidic component which is designed to make available a moving fluid jet with a high speed or high pressure, wherein the fluidic component has high failure resistance and a correspondingly lower maintenance cost.

According to the invention, this object is achieved by a fluidic component having the features of claim 1. Embodiments of the invention are given in the dependent claims.

Accordingly, the fluidic component comprises a flow chamber allowing a fluid to flow through. The fluid flow can be a liquid flow or a gas flow. The flow chamber comprises an inlet opening and an outlet opening, through which the fluid flow enters the flow chamber and reemerges from the flow chamber. The fluidic component furthermore comprises at least one means for changing the direction of the fluid flow at the outlet opening in a controlled manner, wherein, in particular, the means is designed to generate a spatial oscillation of the fluid flow at the outlet opening. The flow chamber has a main flow channel, which interconnects the inlet opening and the outlet opening, and at least one auxiliary flow channel as the at least one means for changing the direction of the fluid flow at the outlet opening in a controlled manner.

The fluidic component is distinguished by the fact that the inlet opening has a larger cross-sectional area than the outlet opening or that the inlet opening and the outlet opening have cross-sectional areas that are equal in size. Here, the cross-sectional areas of the inlet opening and of the outlet opening should each be taken to mean the smallest cross-sectional areas of the fluidic component through which the fluid flow passes when it enters the flow chamber and reemerges from the flow chamber.

This ensures that a fluid jet which oscillates in space (and time) emerges from the fluidic component, said jet having a high

speed or a high momentum. The emerging fluid jet is furthermore compact, that is to say that the fluid jet fans out spatially or spreads apart only at a late stage (a long way downstream), not directly at the outlet opening.

In the arrangement according to the invention, it is possible to dispense with moving component parts for the production of an oscillating jet, and therefore costs and effort arising therefrom do not occur. Moreover, dispensing with moving component parts means that the generation of vibration and noise by the fluidic component according to the invention is relatively low.

Moreover, the occurrence of cavitation within the fluidic component (and the disadvantages resulting therefrom) is avoided through the choice according to the invention of the size ratio of the inlet opening to that of the outlet opening. Contrary to the prevailing opinion, the formation of the oscillating fluid jet is not impaired by the fact that the outlet opening has a smaller cross-sectional area than the inlet opening.

Owing to its compactness and high speed, the spatially oscillating fluid jet which emerges from the fluidic component according to the invention has a high removal and cleaning power when it is directed at a surface. The fluidic component according to the invention can therefore be employed in cleaning systems, for example. The fluidic component according to the invention is also relevant to mixing systems (in which two or more different fluids are supposed to be mixed with one another) and manufacturing systems (e.g. waterjet cutting). Thus, for example, the effectiveness of waterjet cutting can be increased with a pulsating fluid jet emerging from the fluidic component according to the invention.

In principle, the cross-sectional area of the inlet opening can be equal in size to or larger than the cross-sectional area of the outlet opening. The size ratio can be chosen in accordance with the desired characteristics (speed or momentum, compactness, oscillation frequency) of the emerging jet.

However, other parameters, e.g. the size (e.g. the volume and/or component depth, component width, component length) of the fluidic component, the shape of the fluidic component, the type of fluid (gas, low-viscosity liquid, high-viscosity liquid), the level of the pressure at which the fluid flow enters the fluidic component, the entry speed of the fluid and the volume flow, can also influence the choice of size ratio. The oscillation frequency can be between 0.5 Hz and 30 kHz. A preferred frequency range is between 3 Hz and 400 Hz. The inlet pressure can be between 0.01 bar and 6000 bar above ambient pressure. For some applications, (referred to as) low-pressure applications, e.g. for washing machines or dishwashers, the inlet pressure is typically between 0.01 bar and 12 bar above ambient pressure. For other applications (referred to as high-pressure applications), e.g. for cleaning (vehicles, semifinished products, machines or stables) or mixing two different fluids, the inlet pressure is typically between 5 bar and 300 bar.

According to a preferred embodiment, the cross-sectional area of the inlet opening can be larger by a factor of up to 2.5 than the cross-sectional area of the outlet opening. According to a particularly preferred embodiment, the cross-sectional area of the inlet opening can be larger by a factor of up to 1.5 than the cross-sectional area of the outlet opening.

Moreover, the cross-sectional area of the outlet opening can have any desired shape, e.g. square, rectangular, polygonal, round, oval etc. A corresponding statement applies to the cross-sectional area of the inlet opening. In this case, the shape of the inlet opening can correspond to the shape of the outlet opening or differ therefrom. A round cross-sectional area of the outlet opening can be chosen, for example, in order to produce a particularly compact/concentrated fluid jet. Such a fluid jet can be used, in particular, in high-pressure cleaning systems or in waterjet cutting.

According to one embodiment, both the inlet opening and the outlet opening have a rectangular cross section. In this case,

the inlet opening can have a greater width than the outlet opening.

In this case, the width of the inlet and outlet openings is defined in relation to the geometry of the fluidic component. For example, the fluidic component can be of substantially cuboidal design and, accordingly, can have a component length, a component width and a component depth, wherein the component length determines the distance between the inlet opening and the outlet opening, and the component width and component depth are each defined perpendicularly to one another and to the component length and wherein the component width is greater than the component depth. Thus, the component length extends substantially parallel to the main direction of extent of the fluid flow, which moves from the inlet opening to the outlet opening in accordance with the intended purpose. If the inlet and outlet openings are situated on an axis which extends parallel to the component length, the distance between the inlet and outlet openings corresponds to the component length. If the inlet and outlet openings are arranged offset relative to one another, that is to say said axis extends at an angle unequal to 0° relative to the component length, the component length and the offset between the inlet and outlet openings determine the distance between the inlet and outlet openings along the axis. In the case of a substantially cuboidal fluidic component, the ratio of component length to component width can be $1/3$ to 5 . The ratio is preferably in the range of $1/1$ to $4/1$. The component width can be in the range between 0.15 mm and 2.5 m. In a preferred variant embodiment, the component width is between 1.5 mm and 200 mm. Said dimensions depend, in particular, on the application for which the fluidic component is to be used.

By definition, the abovementioned width of the inlet and outlet openings extends parallel to the component width. According to one embodiment, a substantially cuboidal fluidic component can have a rectangular outlet opening with a width which corresponds to $1/3$ to $1/50$ of the component width and a rectangular inlet opening with a width which corresponds to $1/3$ to $1/20$ of the component width. According to a preferred embodiment, the width

of the outlet opening can correspond to $1/5$ to $1/15$ of the component width, and the width of the inlet opening can correspond to $1/5$ to $1/10$ of the component width. The ratio of the component depth to the width of the inlet opening can be $1/20$ to 5 . This ratio is also referred to as the aspect ratio. A preferred aspect ratio is between $1/6$ and 2 . The size ratios mentioned also depend, in particular, on the application for which the fluidic component is to be used.

According to another embodiment, the fluidic component has a component depth which is constant over the entire component length. As an alternative, the component depth can decrease from the inlet opening toward the outlet opening (continuously (with or without a constant rise) or in steps). By means of the decreasing component depth, the fluid jet is pre-concentrated within the fluidic component, ensuring that a compact fluid jet emerges from the fluidic component. Expansion or spreading apart of the fluid jet can thus be delayed and therefore does not take place directly at the outlet opening but only further downstream. This measure is advantageous, for example, in cleaning systems or in waterjet systems. According to another alternative, the component depth can increase from the inlet opening toward the outlet opening, wherein the component width decreases in such a way that the cross-sectional area of the outlet opening is smaller than or equal in size to the cross-sectional area of the inlet opening.

As a means for changing the direction of the fluid flow at the outlet opening in a controlled manner, the flow chamber has at least one auxiliary flow channel. Part of the fluid flow, the auxiliary flow, is allowed to flow through the auxiliary flow channel. That part of the fluid flow which does not enter the auxiliary flow channel but emerges from the fluidic component is referred to as the main flow. There is at least one auxiliary flow channel can have an inlet which is situated in proximity to the outlet opening and an outlet which is situated in proximity to the inlet opening. When viewed in the fluid flow direction (from the inlet opening to the outlet opening), the at least one auxiliary flow channel can be arranged at the side of (not after

or before) the main flow channel. In particular, it is possible to provide two auxiliary flow channels, which extend at the side of the main flow channel (when viewed in the main flow direction), wherein the main flow channel is arranged between the two auxiliary flow channels. According to a preferred embodiment, the auxiliary flow channels and the main flow channel are arranged in a row along the component width and each extend along the component length. Alternatively, the auxiliary flow channels and the main flow channel can be arranged in a row along the component depth and each extend along the component length.

The at least one auxiliary flow channel is preferably separated from the main flow channel by a block. This block can have various shapes. Thus, the cross section of the block can taper when viewed in the fluid flow direction (from the inlet opening toward the outlet opening). As an alternative, the cross section of the block can taper or increase centrally between its end facing the inlet opening and its end facing the outlet opening. An enlargement of the cross section of the block with increasing distance from the inlet opening is also possible. Moreover, the block can have rounded edges. Sharp edges can be provided on the block, in particular in the vicinity of the inlet opening and/or the outlet opening.

According to one embodiment, the at least one auxiliary flow channel can have a greater or smaller depth than the main flow channel. It is thereby possible to exercise an additional influence over the oscillation frequency of the emerging fluid jet. Reducing the component depth in the region of the at least one auxiliary flow channel (in comparison with the main flow channel) reduces the oscillation frequency if the other parameters remain substantially unchanged. Accordingly, the oscillation frequency rises if the component depth is increased in the region of the at least one auxiliary flow channel (in comparison with the main flow channel) and the other parameters remain substantially unchanged.

Another possibility for influencing the oscillation frequency of the emerging fluid jet can be created by means of at least one

separator, which is preferably provided at the inlet of the at least one auxiliary flow channel. The separator assists the splitting of the auxiliary flow from the fluid flow. Here, a separator should be taken to mean an element which projects into the flow chamber (transversely to the flow direction prevailing in the auxiliary flow channel) at the inlet of the at least one auxiliary flow channel. The separator can be provided as a deformation (in particular an inward protrusion) of the auxiliary flow channel wall or as a projection designed in some other way. Thus, the separator can be of (circular) conical or pyramidal design. The use of such a separator makes it possible not only to influence the oscillation frequency but also to vary the "oscillation angle". The oscillation angle is the angle which the oscillating fluid jet covers (between its two maximum deflections). If a plurality of auxiliary flow channels is provided, a separator can be provided for each of the auxiliary flow channels or only for some of the auxiliary flow channels.

According to one embodiment, an outlet channel can be provided directly upstream of the outlet opening. The outlet channel can have a shape of the cross-sectional area which is constant over the entire length of the outlet channel and corresponds to the shape of the cross-sectional area of the outlet opening (square, rectangular, polygonal, round etc.). As an alternative, the shape of the cross-sectional area of the outlet channel can change over the length of the outlet channel. In this case, the size of the cross-sectional area of the outlet opening can remain constant (and this is then also the size of the outlet opening) or can vary. In particular, the size of the cross-sectional area of the outlet channel can decrease in the fluid flow direction from the inlet opening to the outlet opening. According to another alternative, the shape and/or size of the cross-sectional area of the main flow channel can vary from the inlet opening toward the outlet opening. Thus, in particular, the shape of the cross-sectional area (of the outlet channel or of the main flow channel) can change from rectangular to round (in the fluid flow direction from the inlet opening to the outlet opening). As a result, the fluid jet can be pre-concentrated already in the fluidic component, thus enabling the compactness

of the emerging fluid jet to be increased. Furthermore, the size of the cross-sectional area of the outlet channel can vary, in particular can decrease in the fluid flow direction from the inlet opening to the outlet opening.

The shape of the outlet channel influences the oscillation angle of the emerging fluid jet and can be chosen in such a way that a desired oscillation angle is established. Apart from the abovementioned constant or variable shape of the cross-sectional area of the outlet channel, it is possible as a further feature for the outlet channel to be of rectilinear or curved design.

The parameters of the fluidic component (shape, size, number and shape of the auxiliary flow channels, (relative) size of the inlet and outlet openings) can be set in many ways. These parameters are preferably chosen in such a way that the pressure at which the fluid flow enters the fluidic component via the inlet opening is substantially dissipated at the outlet opening. Here, a slight pressure reduction in comparison with that at the outlet opening can take place already in the fluidic component (upstream of the outlet opening).

According to another embodiment, the fluidic component has two or more outlet openings. These outlet openings can be formed by arrangement of a flow divider directly upstream of the outlet openings. The flow divider is a means for splitting the fluid flow into two or more subsidiary flows. In order to achieve the effects, mentioned at the outset, of the fluidic component according to the invention with just one outlet opening, even in the embodiment with two or more outlet openings, each outlet opening can have a smaller cross-sectional area than the inlet opening, or all the outlet openings and the inlet opening can each have cross-sectional areas that are equal in size. Alternatively, it is also possible for just one of the two / of the plurality of outlet openings to have a smaller cross-sectional area than or a cross-sectional area of the same size as the inlet opening. A fluidic component with two or more outlet openings is suitable for producing two or more fluid jets which emerge from the fluidic component in a pulsed manner with respect

to time. Here, a (minimal) local oscillation can occur within a pulse.

The flow divider can have various shapes but common to all of them is that they widen downstream in the plane in which the emerging fluid jet oscillates and transversely to the longitudinal axis of the fluidic component. The flow divider can be arranged in the outlet channel (if present). Moreover, the flow divider can extend deeper into the fluidic component, e.g. into the main flow channel. In this case, the flow divider can be arranged in such a symmetrical way (with respect to an axis which extends parallel to the component length) that the outlet openings are identical in shape and size. However, other positions are also possible, and these can be chosen in accordance with the desired pulse characteristic of the emerging fluid jets.

According to another embodiment, the fluidic component comprises a fluid flow guide, which is arranged downstream adjoining the outlet opening. The fluid flow guide is substantially tubular (e.g. with a cross-sectional area of constant size and a constant shape of the cross-sectional area) and can be moved by the fluid flow as said flow changes direction. The cross-sectional area of the fluid flow guide can correspond to the cross-sectional area of the outlet opening. No influence is exercised over the direction of the emerging fluid flow by means of the movement of the fluid flow guide. The fluid flow guide merely forms a means (passive construction element) for the additional concentration of the oscillating emerging fluid jet. The fluid flow concentrated in this way fans out or spreads apart only further downstream than a fluid flow which emerges from a fluidic component without a fluid flow guide. Particularly in cleaning systems, this property can be desired.

In order to avoid influencing the emerging oscillating fluid jet, a bearing arrangement, by means of which the fluid flow guide is secured movably on the outlet opening, can be provided, for example. Various joint configurations that can be used in principle are known in practice. For example, a ball joint or a

solid body joint is possible. As an alternative, the fluid flow guide and/or the bearing arrangement can be manufactured from a flexible material.

It is also possible for the cross-sectional area of the outlet opening of the fluid flow guide to be implemented differently. The outlet opening of the fluid flow guide is the opening from which the fluid flow emerges from the fluid flow guide (and thus from the fluidic component). Thus, shapes for the cross-sectional area of the outlet opening of the fluid flow guide which have been described in the context of the outlet opening of the fluidic component without a fluid flow guide are possible. It is also possible for the shape of the cross-sectional area of the fluid flow guide to vary over the length of the fluid flow guide. Thus, a rectangular cross-sectional area in the region of the bearing arrangement (i.e. at the inlet of the fluid flow guide) can be provided which merges downstream into a round cross-sectional area.

According to another embodiment, the fluidic component has a widened outlet portion, which adjoins the outlet opening downstream of the outlet opening. In particular, the widened outlet portion immediately (directly) adjoins the outlet opening downstream of the outlet opening. The widened outlet portion can be of funnel-shaped design, for example. In particular, the widened outlet portion can have a cross-sectional area (perpendicularly to the fluid flow direction), the size of which increases downstream of the outlet opening. In this case, the outlet opening can form the point with the smallest cross-sectional area between the flow chamber and the widened outlet portion.

The widened outlet portion can be used to concentrate a fluid jet which undergoes a high pressure reduction at the outlet opening and hence spreads apart at the outlet opening. The widened outlet portion can therefore (at least partially) counteract the spreading apart of the fluid jet. By means of the concentration of the fluid jet, it is possible to achieve an

increase in the removal or cleaning power of the fluidic component.

According to one embodiment, the widened outlet portion can have a width which increases (continuously) downstream of the outlet opening. In this case, the width is the extent of the widened outlet portion which lies in the plane in which the emerging fluid flow oscillates. In this case, the depth of the widened outlet portion can be constant. The depth of the widened outlet portion is the extent of the widened outlet portion which is oriented substantially perpendicularly to the plane in which the emerging fluid flow oscillates. Depending on the area of application of the fluidic component, the depth of the widened outlet portion can increase or decrease downstream (in comparison with the component depth at the outlet opening). By means of a downstream-oriented reduction in component depth in the region of the widened outlet portion, it is possible to achieve further focusing of the emerging fluid jet.

According to one embodiment, the widened outlet portion can be delimited by a wall which encloses an angle in the plane in which the emerging fluid jet oscillates within an oscillation angle, wherein the angle of the widened outlet portion is 0° to 15° , preferably 0° to 10° , larger than the oscillation angle. Thus, the widened outlet portion does not influence the magnitude of the oscillation angle but merely the spreading apart of the emerging fluid jet. This angle magnitude is appropriate, for example, for fluidic components which, without a widened outlet portion, produce a uniform distribution of the fluid on the surface to be sprayed. The selected angle of the widened outlet portion can also be smaller than the oscillation angle, e.g. if, without a widened outlet portion, the fluidic component produces a nonuniform distribution of the fluid on the surface to be sprayed or if the oscillation angle is to be reduced.

Downstream of the outlet opening it is possible to provide an outlet channel, the boundary walls of which enclose an angle in the plane in which the emerging fluid jet oscillates, wherein the angle of the outlet channel can be larger than the

oscillation angle and also larger than the angle of the widened outlet portion. The angle of the outlet channel is preferably larger at least by a factor of 1.1 than the angle of the widened outlet portion. According to a particularly preferred embodiment, the angle of the outlet channel is in a range extending from 1.1 times the angle of the widened outlet portion to 3.5 times the angle of the widened outlet portion.

The invention furthermore relates to an injection system and to a cleaning appliance which each comprise the fluidic component according to the invention. The injection system is provided for the purpose of injecting a fuel into a combustion engine, e.g. an internal combustion engine or a gas turbine, which is used in motor vehicles, for example. In particular, the cleaning appliance is a dishwasher, a washing machine, an industrial cleaning system or a high-pressure cleaner.

The invention is explained in greater detail below by means of illustrative embodiments in conjunction with the drawings, in which:

Figure 1 shows a cross section through a fluidic component according to one embodiment of the invention;

Figure 2 shows a section through the fluidic component from figure 1 along the line A'-A'';

Figure 3 shows a section through the fluidic component from figure 1 along the line B'-B'';

Figure 4 shows three snapshots (images a) to c)) of an oscillation cycle of a fluid flow intended to illustrate the flow direction of the fluid flow which flows through a fluidic component according to another embodiment of the invention; a section (image d)) of the fluidic component from images a) to c) intended to illustrate the dimensions of said component;

Figure 5 shows a flow simulation for the three snapshots from figure 4 intended to illustrate the respective speed distribution of the fluid;

Figure 6 shows an illustration of the pressure distribution of the fluid for the snapshot b) from figure 5;

Figure 7 shows an illustration of the fluid flow emerging from a fluidic component as a function of the pressure of the fluid flow at the inlet of the fluidic component, at a) 0.5 bar, b) 2.5 bar and c) 7 bar; a section (image d)) through the fluidic component from images a) to c) intended to illustrate the dimensions of said component;

Figure 8 shows a cross section through a fluidic component according to another embodiment of the invention, wherein the view corresponds to that from figure 3;

Figure 9 shows a cross section through a fluidic component according to another embodiment of the invention, wherein the view corresponds to that from figure 3;

Figure 10 shows a cross section through a fluidic component having two outlet openings;

Figure 11 shows a cross section through a fluidic component having two outlet openings according to another embodiment;

Figure 12 shows a cross section through a fluidic component having a fluid flow guide;

Figure 13 shows the fluidic component from figure 12 having a flow guiding body;

Figure 14 shows a cross section through a fluidic component according to another embodiment; and

Figure 15 shows a cross section through a fluidic component having a cavity;

Figure 16 shows a cross section through a fluidic component according to another embodiment of the invention;

Figure 17 shows a section through the fluidic component from figure 16 along the line A'-A'';

Figure 18 shows a section through the fluidic component from figure 16 along the line B'-B''; and

Figure 19 shows a cross section through a fluidic component according to another embodiment of the invention.

A fluidic component 1 according to one embodiment of the invention is illustrated schematically in figure 1. Figures 2 and 3 show a section through said fluidic component 1 along the lines A'-A'' and B'-B'' respectively. The fluidic component 1 comprises a flow chamber 10 allowing a fluid flow 2 to flow through (figure 4). The flow chamber 10 is also referred to as an interaction chamber.

The flow chamber 10 comprises an inlet opening 101, via which the fluid flow 2 enters the flow chamber 10, and an outlet opening 102, via which the fluid flow 2 leaves the flow chamber 10. The inlet opening 101 and the outlet opening 102 are arranged on two opposite sides of the fluidic component 1. The fluid flow 2 moves substantially along a longitudinal axis A of the fluidic component 1 in the flow chamber 10 (said longitudinal axis connecting the inlet opening 101 and the outlet opening 102 to one another) from the inlet opening 101 to the outlet opening 102.

The longitudinal axis A forms an axis of symmetry of the fluidic component 1. The longitudinal axis A lies in two planes of symmetry S1 and S2 which are perpendicular to one another, relative to which the fluidic component 1 is mirror-symmetrical.

As an alternative, the fluidic component 1 can be of non-(mirror-)symmetrical construction.

To change the direction of the fluid flow in a controlled manner, the flow chamber 10 has not only a main flow channel 103 but also two auxiliary flow channels 104a, 104b, wherein the main flow channel 103 is arranged between the two auxiliary flow channels 104a, 104b (when viewed transversely to the longitudinal axis A). Immediately behind the inlet opening 101, the flow chamber 10 divides into the main flow channel 103 and the two auxiliary flow channels 104a, 104b, which are then combined again immediately ahead of the outlet opening 102. The two auxiliary flow channels 104a, 104b are arranged symmetrically with respect to axis of symmetry S2 (figure 3). According to an alternative (not shown), the auxiliary flow channels are arranged non-symmetrically.

The main flow channel 103 connects the inlet opening 101 and the outlet opening 102 to one another substantially in a straight line, with the result that the fluid flow 2 flows substantially along the longitudinal axis A of the fluidic component 1. Starting from the inlet opening 101, the auxiliary flow channels 104a, 104b each extend initially at an angle of substantially 90° to the longitudinal axis A in opposite directions in a first section. The auxiliary flow channels 104a, 104b then bend, with the result that they each extend substantially parallel to the longitudinal axis A (in the direction of the outlet opening 102) (second section). In order to recombine the auxiliary flow channels 104a, 104b and the main flow channel 103, the auxiliary flow channels 104a, 104b change direction once again at the end of the second section, with the result that they are each oriented substantially in the direction of the longitudinal axis A (third section). In the embodiment in figure 1, the direction of the auxiliary flow channels 104a, 104b changes at the transition from the second to the third section by an angle of about 120° . However, it is also possible for angles other than that mentioned here to be chosen for the change in direction between these two sections of the auxiliary flow channels 104a, 104b.

The auxiliary flow channels 104a, 104b are a means for influencing the direction of the fluid flow 2 which flows through the flow chamber 10. For this purpose, the auxiliary flow channels 104a, 104b each have an inlet 104a1, 104b1, which is formed substantially by that end of the auxiliary flow channels 104a, 104b which faces the outlet opening 102, and each have an outlet 104a2, 104b2, which is formed substantially by that end of the auxiliary flow channels 104a, 104b which faces the inlet opening 101. Through the inlets 104a1, 104b1, a small part of the fluid flow 2, the auxiliary flows 23a, 23b (figure 4), flows into the auxiliary flow channels 104a, 104b. The remaining part of the fluid flow 2 (essentially the "main flow" 24) emerges from the fluidic component 1 via the outlet opening 102 (figure 4). The auxiliary flows 23a, 23b emerge from the auxiliary flow channels 104a, 104b at the outlets 104a2, 104b2, where they can exert a lateral impulse (transverse to the longitudinal axis A) on the fluid flow 2 entering through the inlet opening 101. In this case, the direction of the fluid flow 2 is influenced in such a way that the main flow 24 emerging at the outlet opening 102 oscillates spatially, more specifically in a plane in which the main flow channel 103 and the auxiliary flow channels 104a, 104b are arranged. The plane in which the main flow 24 oscillates corresponds to plane of symmetry S1 or is parallel to plane of symmetry S1. Figure 4, which shows the oscillating fluid flow 2, will be explained in greater detail below.

The auxiliary flow channels 104a, 104b each have a cross-sectional area which is virtually constant over the entire length of the auxiliary flow channels 104a, 104b (from the inlet 104a1, 104b1 to the outlet 104a2, 104b2). As an alternative, the size and/or shape of the cross-sectional area can vary over the length of the auxiliary flow channels. In contrast, the size of the cross-sectional area of the main flow channel 103 increases continuously in the flow direction of the main flow 23 (i.e. in the direction from the inlet opening 101 to the outlet opening 102), wherein the shape of the main flow channel 103 is mirror-symmetrical with respect to the planes of symmetry S1 and S2.

The main flow channel 103 is separated from each auxiliary flow channel 104a, 104b by a block 11a, 11b. In the embodiment from figure 1, the two blocks 11a, 11b are identical in shape and size and arranged symmetrically with respect to mirror plane S2. In principle, however, they can also be of different design and not oriented symmetrically. In the case of non-symmetrical orientation, the shape of the main flow channel 103 is also non-symmetrical with respect to mirror plane S2. The shape of the blocks 11a, 11b, which is shown in figure 1, is merely illustrative and can be varied. The blocks 11a, 11b from figure 1 have rounded edges.

Separators 105a, 105b in the form of inward protrusions (of the boundary wall of the flow chamber 10) are furthermore provided at the inlet 104a1, 104b1 of the auxiliary flow channels 104a, 104b. In this case, an inward protrusion 105a, 105b projects at the inlet 104a1, 104b1 of each auxiliary flow channel 104a, 104b beyond a section of the circumferential edge of the auxiliary flow channel 104a, 104b into the respective auxiliary flow channel 104a, 104b and changes the cross-sectional shape thereof at this point, reducing the cross-sectional area. In the embodiment in figure 1, the section of the circumferential edge is chosen in such a way that each inward protrusion 105a, 105b is (inter alia also) directed at the inlet opening 101 (oriented substantially parallel to the longitudinal axis A). As an alternative, the separators 105a, 105b can be oriented differently. By means of the separators 105a, 105b, the separation of the auxiliary flows 23a, 23b from the main flow 24 is influenced and controlled. By means of the shape, size and orientation of the separators 105a, 105b it is possible to influence the volume which flows out of the fluid flow 2 into the auxiliary flow channels 104a, 104b and to influence the direction of the auxiliary flows 23a, 23b. This, in turn, leads to influencing of the exit angle of the main flow 24 at the outlet opening 102 of the fluidic component 1 (and hence to influencing of the oscillation angle) and to influencing of the frequency at which the main flow 24 oscillates at the outlet opening 102. Through the choice of the size, orientation and/or shape of the separators 105a, 105b, the profile of the main flow

24 emerging at the outlet opening 102 can thus be influenced in a controlled manner. As an alternative, it is also possible for a separator to be provided only at the inlet of one of the two auxiliary flow channels.

In the embodiment from figure 1, the separators 105a, 105b each have a shape which describes a circular arc in plane of symmetry S1. On the one hand, this circular arc merges tangentially into the (linear) boundary wall of the outlet channel 107. On the other hand, this circular arc merges tangentially into another circular arc 104a3, 104b3, which delimits the inlet 104a1, 104b1 of the auxiliary flow channel 104a, 104b. In this case, the circular arc of the separator 105a, 105b has a smaller radius than the circular arc 104a3, 104b3 of the inlet 104a1, 104b1 of the auxiliary flow channel 104a, 104b. The circular arc 104a3, 104b3 of the inlet 104a1, 104b1 of the auxiliary flow channel 104a, 104b furthermore merges tangentially into the boundary wall 104a4, 104b4 of the auxiliary flow channel 104a, 104b. In particular, the transition between the separators 105a, 105b and the auxiliary flow channels 104a, 104b, on the one hand, and the outlet channel 107, on the other hand, is of continuous design, without steps.

The separators 105a, 105b are formed in the boundary wall of the flow chamber 10, substantially opposite that end of the blocks 11a, 11b which faces the outlet opening 102. In particular, the separators 105a, 105b can be arranged at a distance from plane of symmetry S2 which is within the average width of the blocks 11a, 11b. The average width of a block 11a, 11b is the width which the block 11a, 11b has over half its length (when viewed in the flow direction).

Arranged upstream of the inlet opening 101 of the flow chamber 10 is a funnel-shaped extension 106, which tapers in the direction of the inlet opening 101 (downstream). The length (along the fluid flow direction) of the funnel-shaped extension 106 can be greater by a factor of at least 1.5 than the width b_{IN} of the inlet opening 101. The funnel-shaped extension 106 is preferably larger by a factor of at least 3 than the width b_{IN}

of the inlet opening 101. The flow chamber 10 also tapers, namely in the region of the outlet opening 102. The taper is formed by an outlet channel 107, which extends between the separators 105a, 105b and the outlet opening 102. In this case, the funnel-shaped extension 106 and the outlet channel 107 taper in such a way that only the width thereof, i.e. the extent thereof in plane of symmetry $S1$ perpendicularly to the longitudinal axis A , decreases downstream in each case. The taper has no effect on the depth, i.e. the extent in plane of symmetry $S2$ perpendicularly to the longitudinal axis A , of the extension 106 and of the outlet channel 107 (figure 2). As an alternative, the extension 106 and the outlet channel 107 can also each taper in width and in depth. Furthermore, it is possible for only the extension 106 to taper in depth or in width, while the outlet channel 107 tapers both in width and in depth, or vice versa. The extent of the taper of the outlet channel 107 influences the directional characteristic of the fluid flow 2 emerging from the outlet opening 102 and thus the oscillation angle thereof. The shape of the funnel-shaped extension 106 and of the outlet channel 107 are shown purely by way of example in figure 1. Here, the width thereof in each case decreases in a linear manner downstream. Other shapes of the taper are possible.

The inlet opening 101 and the outlet opening 102 each have a rectangular cross-sectional area. These each have the same depth (extent in plane of symmetry $S2$ perpendicularly to the longitudinal axis A , figure 2) but differ in their width b_{IN} , b_{EX} (extent in plane of symmetry $S1$ perpendicularly to the longitudinal axis A , figure 1). In particular, the outlet opening 102 is less wide than the inlet opening 101. Thus, the cross-sectional area of the outlet opening 102 is smaller than the cross-sectional area of the inlet opening 101. As an alternative, the width of the inlet opening 101 and the outlet opening 102 can be the same, while the outlet opening 102 is less deep than the inlet opening 101. In another alternative variant, both the width and the depth of the outlet opening 102 can be less than the width and depth of the inlet opening 101. In each case, the dimensions of the width and depth should be chosen so that the cross-sectional area of the outlet opening 102 is smaller than

or equal in size to the cross-sectional area of the inlet opening 101.

For cleaning applications which typically operate with inlet pressures of over 14 bar, the fluidic component 1 can have an outlet width b_{EX} of 0.01 mm to 18 mm. The outlet width b_{EX} is preferably between 0.1 mm and 8 mm. The ratio of the width b_{IN} of the inlet opening 101 to the width b_{EX} of the outlet opening 102 can be 1 to 6, preferably between 1 and 2.2. In this case, the dimensions of the component depth in the region of the inlet opening 101 and of the outlet opening 102 should be chosen so that the cross-sectional area of the outlet opening 102 is smaller than or equal in size to the cross-sectional area of the inlet opening 101. The component width b can be greater by a factor of at least 4 than the outlet width b_{EX} . The component width b is preferably greater by a factor of 6 to 21 than the outlet width b_{EX} . The component length l can be greater by a factor of at least 6 than the outlet width b_{EX} . The component length l is preferably greater by a factor of 8 to 38 than the outlet width b_{EX} . The widest point of the main flow channel (the largest distance between the blocks 11a, 11b when viewed along the width of the fluidic component 1) can be greater by a factor of 2 to 18 than the outlet width b_{EX} . This factor is preferably between 3 and 12.

In figure 4, three snapshots of a fluid flow 2 are shown for the purpose of illustrating the flow direction (streamlines) of the fluid flow 2 in a fluidic component 1 during an oscillation cycle (images a) to c)). In particular, the fluidic component 1 from figure 4 differs from the fluidic component 1 from figures 1 to 3 in that no separators are provided and that the ends of the blocks 11 which face the inlet opening 101 are less rounded. The component length l of the fluidic component 1 from figure 4 is 18 mm and the component width b is 20 mm (image d)). The width b_{IN} of the inlet opening 101 and the width b_N of the auxiliary flow channels 104a, 104b are the same and are each 2 mm. The outlet width b_{EX} is 0.9 mm. The component depth is constant in this illustrative embodiment and is 0.9 mm. The main flow channel 103 has a maximum width b_H between the blocks 11a, 11b of 8 mm.

The fluid flowing through the fluidic component 1 has a pressure of 56 bar at the inlet opening 101, wherein the fluid is water. However, the fluidic component 1 illustrated is also suitable in principle for gaseous fluids.

Images a) and c) illustrate the streamlines for two deflections of the emerging main flow 24, which correspond approximately to the maximum deflections. The angle which the emerging main flow 24 covers between these two maxima is the oscillation angle α (figure 7). Image b) shows the streamlines for a position of the emerging main flow 24 which lies approximately in the center between the two maxima from images a) and c). The flows within the fluidic component 1 during an oscillation cycle are described below.

First of all, the fluid flow 2 is passed via the inlet opening 101 into the fluidic component 1 at an inlet pressure of 56 bar. In the region of the inlet opening 101, the fluid flow 2 undergoes virtually no pressure loss since it is allowed to flow unhindered through into the main flow channel 103. Initially, the fluid flow 2 flows along the longitudinal axis A in the direction of the outlet opening 102.

By introducing a one-time random or selective disturbance, the fluid flow 2 is deflected sideways in the direction of the side wall of one block 11a which faces the main flow channel 103, with the result that the direction of the fluid flow 2 deviates to an increasing extent from the longitudinal axis A until the fluid flow has been deflected to the maximum extent. By virtue of the "Coanda effect", the majority of the fluid flow 2, the "main flow" 24, adheres to the side wall of one block 11a and then flows along this side wall. A recirculation zone 25b forms in the region between the main flow 24 and the other block 11b. In this case, the recirculation zone 25b grows the more the main flow 24 adheres to the side wall of one block 11a. The main flow 24 emerges from the outlet opening 102 at an angle relative to the longitudinal axis A which varies with respect to time. In figure 4a), the main flow 24 adheres to the side wall of one block 11a and the recirculation zone 25b is at its maximum size.

Moreover, the main flow 24 emerges from the outlet opening 102 with approximately the greatest possible deflection.

A small part of the fluid flow 2, referred to as the auxiliary flow 23a, 23b, separates from the main flow 24 and flows into the auxiliary flow channels 104a, 104b via the inlets 104a1, 104b1 thereof. In the situation illustrated in figure 4a), (owing to the deflection of the fluid flow 2 in the direction of block 11a) that part of the fluid flow 2 which flows into the auxiliary flow channel 104b which adjoins block 11b, to the side wall of which the main flow 103 does not adhere, is significantly larger than that part of the fluid flow 2 which flows into the auxiliary flow channel 104a which adjoins block 11a, to the side wall of which the main flow 103 adheres. In figure 4a), therefore, auxiliary flow 23b is significantly greater than auxiliary flow 23a, which is virtually negligible. In general, the deflection of the fluid flow 2 into the auxiliary flow channels 104a, 104b can be influenced and controlled by means of separators. The auxiliary flows 23a, 23b (in particular auxiliary flow 23b) flow through the auxiliary flow channels 104a and 104b to their respective outlets 104a2, 104b2 and thus impart a momentum to the fluid flow 2 entering the inlet opening 101. Since auxiliary flow 23b is greater than auxiliary flow 23a, the momentum component which results from auxiliary flow 23b is the predominant component.

The main flow 24 is therefore pressed against the side wall of block 11a by the momentum (of auxiliary flow 23b). At the same time, the recirculation zone 25b moves in the direction of the inlet 104b1 of auxiliary flow channel 104b, thereby disturbing the supply of fluid to auxiliary flow channel 104b. The momentum component which results from auxiliary flow 23b therefore decreases. At the same time, the recirculation zone 25b shrinks, while another (growing) recirculation zone 25a forms between the main flow 24 and the side wall of block 11a. During this process, the supply of fluid to auxiliary flow channel 104a also increases. The momentum component which results from auxiliary flow 23a therefore increases. The momentum components of the auxiliary flows 23a, 23b continue to come closer and closer

together until they are equal and cancel each other out. In this situation, the entering fluid flow 2 is not deflected, and therefore the main flow 24 moves approximately centrally between the two blocks 11a, 11b and emerges without deflection from the outlet opening 102. Figure 4b) does not show precisely this situation but shows a situation shortly before it.

As the situation progresses, the supply of fluid to auxiliary flow channel 104a increases more and more, and therefore the momentum component which results from auxiliary flow 23a exceeds the momentum component which results from auxiliary flow 23b. As a result, the main flow 24 is forced further and further away from the side wall of block 11a, until it adheres to the side wall of the opposite block 11b owing to the Coanda effect (figure 4c)). During this process, recirculation zone 25b disappears, while recirculation zone 25a grows to its maximum size. The main flow 24 now emerges from the outlet opening 102 with a maximum deflection, which has the opposite sign from that in the situation from figure 4a).

The recirculation zone 25a will then move and block the inlet 104a1 of auxiliary flow channel 104a, with the result that the supply of fluid will fall again here. Subsequently, auxiliary flow 23b will supply the dominant momentum component, with the result that the main flow 24 will once again be forced away from the side wall of block 11b. The changes described now take place in the reverse order.

Owing to the process described, the main flow 24 emerging at the outlet opening 102 oscillates about the longitudinal axis A in a plane in which the main flow channel 103 and the auxiliary flow channels 104a, 104b are arranged, with the result that a fluid jet that sweeps backward and forward is produced. In order to achieve the effect described, a symmetrical construction of the fluidic component 1 is not absolutely necessary.

For each of the three snapshots a), b) and c) from figure 4, figure 5 shows a corresponding transient flow simulation in order to visualize the velocity field of the fluid flow 2 inside and

outside the fluidic component 1. Here, figure 5a) corresponds to the snapshot from figure 4a) etc. The scale depicted in figure 5 converts the gray shades in which the fluid flow 2 is depicted into a speed in m/s of the fluid flow. Here, the speed is coded logarithmically with a color code. According to this, black corresponds to a fluid speed of 0 m/s, while white corresponds to a fluid speed of 150 m/s. The lighter the shade in which the fluid is depicted at a particular point, the higher is its speed at this point. Images a) to c) show that the main flow 24 emerges at the outlet opening 102 with a speed which is always higher than the speed at which the fluid flow 2 enters at the inlet opening 101. This is attributable to the fact that the outlet opening 102 has a smaller cross-sectional area than the inlet opening 101. In this example, the speed of the emerging main flow 24 is around 150 m/s. Thus, a fluid jet with a high speed or high momentum is produced. Despite the high speed of the emerging fluid jet, the oscillation mechanism is maintained.

Figure 6 shows the corresponding pressure field of the fluid flow 2 for the snapshot from figure 4b) (figure 5b)). The pressure is coded logarithmically with a color code. The scale depicted ranges from 1 bar (white) to 60 bar (black). Upstream of the inlet opening 101, the pressure of the fluid is 56 bar. The ambient pressure is 1 bar (white). Figure 6 shows clearly that the pressure of the fluid in said fluidic component 1 is high and corresponds substantially to the pressure before entry to the fluidic component 1 through the inlet opening 101. Only at the outlet opening 102 does the pressure of the fluid fall abruptly to the ambient pressure. In the context of figure 5b), it can be seen that the fluid is accelerated at this point where the fluid pressure drops.

Figures 7a) to c) show three individual recordings of a fluid jet emerging from a fluidic component 1 intended to illustrate the spray characteristic. The fluidic component 1 has a component length l of 22 mm, a component width of 23 mm and a component depth of 3 mm. The inlet opening 101 has a width b_{IN} of 3 mm, and the outlet opening 102 has a width b_{EX} of 2.5 mm. Separators 105a, 105b are provided at the inlets of the auxiliary flow

channels 104a, 104b. The auxiliary flow channels 104a, 104b each have a constant width b_N of 4 mm. The main flow channel 103 is 9 mm wide at its widest point (b_H). Water flows through the fluidic component 1 as the fluid, wherein the pressure of the water at the inlet opening 101 is 0.5 bar in figure 7a), 2.5 bar in figure 7b) and 7 bar in figure 7c). As the pressure of the water at the inlet opening 101 rises, the oscillation frequency f of the emerging fluid jet increases, wherein the oscillation angle α remains substantially the same.

Cross sections through two further embodiments of the fluidic component 1 are illustrated in figures 8 and 9. The section in figures 8 and 9 corresponds to that in figure 3. Thus, figures 8 and 9 each show a section through the fluidic component 1 transversely to the longitudinal axis A and hence a section through the main flow channel 103 and the auxiliary flow channels 104a, 104b transversely to the flow direction. The fluidic components from figures 8 and 9 correspond to the fluidic component 1 from figures 1 to 3 and differ therefrom only in the cross-sectional shapes of the main flow channel 103 and of the auxiliary flow channels 104a, 104b. Whereas, in the embodiment from figure 3, these are in each case rectangular, they are in each case oval in the embodiment from figure 8 and in each case rectangular with rounded corners in the embodiment from figure 9. The shapes illustrated should be taken to be purely illustrative. Other shapes or hybrid shapes are also possible. In this context, hybrid shapes should be taken to mean that the main flow channel 103 and the auxiliary flow channels 104a, 104b can have two or more different cross-sectional shapes, rather than the same shape. In this case, the auxiliary flow channels 104a, 104b can also have a triangular, polygonal or round cross-sectional area. However, the cross-sectional area of the main flow channel 103 generally has a shape, the extent of which along the component width b is greater than along the component depth t .

Figures 10 and 11 show two further embodiments of the fluidic component 1. These two embodiments differ from that in figure 1, in particular in that a flow divider 108 is provided in the

outlet channel 107, but no separator is provided at the inlets 104a1, 104b1 of the auxiliary flow channels 104a, 104b. The shape of the blocks 11a, 11b is also different. However, the fundamental geometric properties of these two embodiments correspond to those of the fluidic component 1 from figure 1.

The flow divider 108 in each case has the form of a triangular wedge. The wedge has a depth which corresponds to the component depth t . (The component depth t is constant over the entire fluidic component 1.) Thus, the flow divider 108 divides the outlet channel 107 into two subordinate channels with two outlet openings 102 and divides the fluid flow 2 into two subordinate flows, which emerge from the fluidic component 1. Owing to the oscillation mechanism described in the context of figure 4, the two subordinate flows emerge from the two outlet openings 102 in a pulsed manner. The two outlet openings 102 each have a smaller width b_{EX} than the inlet opening 101.

In the embodiment from figure 10, the flow divider 108 extends substantially in the outlet channel 107, while, in the embodiment from figure 11, it projects into the main flow channel 103. In principle, the shape and size of the flow divider 108 is freely selectable according to the desired application. Moreover, a plurality of flow dividers can be provided (adjacent to one another along the component width) in order to divide the emerging fluid jet into more than two subordinate flows.

Figures 10 and 11 also show two further embodiments of the blocks 11a, 11b. However, these shapes are only illustrative and are not intended to be provided exclusively in the context of the flow divider 108. Likewise, the blocks 11a, 11b can be of different design when a flow divider 108 is used. The blocks from figure 10 have a substantially trapezoidal basic shape which tapers downstream (in width) and from the ends of which a triangular projection protrudes into the main flow channel 103 in each case. The blocks 11a, 11b from figure 11 are similar to those from figure 1 but do not have rounded edges.

Figure 12 shows the fluidic component 1 from figure 1, which additionally has a fluid flow guide 109. The fluid flow guide 109 is a tubular extension, which is arranged at the outlet opening 102 and extends downstream from the outlet opening 102. The fluid flow guide 109 serves to concentrate the emerging fluid flow without affecting the oscillation mechanism in the process. The fluid flow guide 109 is arranged movably at the outlet opening 102 and is moved concomitantly by the movement of the emerging fluid flow. This is illustrated in figure 12 by the double arrow. In figure 12, one of the two maximum deflections of the fluid flow guide 109 is shown as a solid line and the other of the two maximum deflections of the fluid flow guide 109 is shown as a dotted line.

Another embodiment of the fluidic component 1 having the fluid flow guide 109 from figure 12 is illustrated in figure 13. The fluidic component 1 additionally has a flow guiding body 110, which is attached to the fluid flow guide 109 by means of a holder 111. The flow guiding body 110 serves to assist the deflection of the fluid flow emerging from the outlet opening 102 and hence also to assist the movement of the fluid flow guide 109 by exploiting the fluid dynamics in the flow chamber 10. Here, the holder 111 is configured in such a way that it does not disturb the oscillation mechanism of the emerging fluid flow. In particular, the holder has a small cross section and hence a negligible flow resistance. The holder 111 forms a rigid connection between the flow guiding body 110 and the fluid flow guide 109. The fluid guiding body 110 is therefore not movable relative to the fluid flow guide 109 but can only be moved together with the fluid flow guide 109. The shape of the flow guiding body 110 can be configured in different ways. In particular, the flow guiding body 110 can be streamlined in shape. The rectangular shape, illustrated in figure 13, of the flow guiding body 110 is only a schematic illustration.

The flow guiding body 110 described with reference to figure 13 is not restricted to the fluidic component 1 illustrated in figure 13 but can also be used in other fluidic components 1 that have a fluid flow guide 109. The fluid flow guide 109 can

also be used in other fluidic components, apart from those in figures 12 and 13.

Figure 14 shows a fluidic component 1 which corresponds substantially to the fluidic component 1 from figure 1. The fluidic component 1 from figure 14 differs from that from figure 1 in that the cross-sectional area of the auxiliary flow channels 104a, 104b is not constant over the length thereof. The component depth of the fluidic component 1 from figure 14 is constant over the entire fluidic component 1. The cross-sectional area of the auxiliary flow channels 104a, 104b is accordingly achieved by means of a change in the width thereof.

Thus, auxiliary flow channel 104a has a greater width at the inlet 104a1 thereof and at the outlet 104a2 thereof than in a section between the inlet 104a1 and the outlet 104a2. For the widths b_{Na1} , b_{Na2} , b_{Na3} of auxiliary flow channel 104a which are illustrated in figure 14, $b_{Na1} > b_{Na2}$ and $b_{Na3} > b_{Na2}$. In this case, $b_{Na3} > b_{Na1}$ but it can also be the case that $b_{Na3} = b_{Na1}$ or $b_{Na3} < b_{Na1}$.

Auxiliary flow channel 104b has a greater width at the inlet 104b1 thereof than at the outlet 104b2 thereof. For the widths b_{Nb1} , b_{Nb2} of auxiliary flow channel 104b which are illustrated in figure 14, $b_{Nb1} > b_{Nb2}$. As an alternative (depending on the application), the inlet width can be less than the outlet width.

In figure 14, the width of the auxiliary flow channels 104a, 104b changes differently over the length thereof. This is achieved by virtue of the fact that the two blocks 11a, 11b are of different design in respect of shape and size and are not oriented symmetrically relative to mirror plane S2. As a result, the shape of the main flow channel 103 is also not symmetrical relative to mirror plane S2. However, both auxiliary flow channels 104a, 104b can be the same in respect of the change in their width.

By means of the change in the cross-sectional area of the auxiliary flow channels 104a, 104b, the production process

(casting, sintering) of the fluidic component 1 can be simplified since foreign matter can be removed easily from the fluidic component during manufacture. Moreover, the finished fluidic component can be cleaned more easily, this being significant, for example, when the fluidic component is used with a fluid that is laden with foreign matter (particles). In the variant in which the cross section increases from the outlet of the auxiliary flow channel toward the inlet of the auxiliary flow channel, the fluidic component is self-flushing during operation. In the variant in which the cross section increases from the inlet of the auxiliary flow channel toward the outlet of the auxiliary flow channel, the fluid drains completely from the fluidic component when the fluidic component is switched off (i.e. when no more fluid is passed into the fluidic component). It is thus possible to avoid the accumulation of fluid in the fluidic component after it has been switched off and the proliferation of pathogens (e.g. legionella) present in the fluid or the deposition of mold, soap residues, limescale or other dirt. Draining of the fluidic component after switching off can be promoted by dispensing with separators.

However, the variable width of the auxiliary flow channels 104a, 104b which is described with reference to figure 14 is not restricted to the fluidic component 1 illustrated in figure 14. On the contrary, the variable width of the auxiliary flow channels / of the auxiliary flow channel can also be applied to other shapes of fluidic components having one or more auxiliary flow channels.

Figure 15 illustrates a fluidic component 1 which has a cavity 112 downstream of the outlet opening 102. In other respects, it corresponds to the fluidic component from figure 4d). The cavity 112 is an annular widened portion of the outlet channel 107 adjoining the outlet opening 102, said portion extending over a section of the outlet channel 107 (when viewed in the flow direction of the emerging fluid flow). An annular widened portion should be taken to mean a widened portion which has a continuous round, polygonal or oval contour or a continuous contour of some other shape. In figure 15, the cavity is arranged directly at

the outlet opening 102. However, it can be arranged further downstream. The cavity 112 reduces the boundary layer depth of the fluid flow emerging from the outlet opening 102. This increases the compactness of the emerging fluid flow, i.e. the extent of the emerging fluid flow transversely to the flow direction. The cavity 112 can be provided for a very wide variety of embodiments of a fluidic component 1 and is not restricted to the fluidic component from figure 15.

The shapes of the fluidic components 1 in figures 1 to 15 are merely illustrative. The invention can also be applied to already known fluidic components.

A fluidic component 1 according to another embodiment of the invention is illustrated schematically in figure 16. Figures 17 and 18 show a section through this fluidic component 1 along the lines A'-A'' and B'-B'' respectively. The fluidic component 1 from figures 16 to 18 corresponds substantially to the fluidic component from figures 1 to 3. In particular, the fluidic component 1 from figures 16 to 18 differs from the fluidic component from figures 1 to 3 in that a widened outlet portion 12 is provided. The widened outlet portion 12 adjoins the outlet opening 102 downstream. Thus, the fluid flow 2 moves from the outlet opening 102 through the widened outlet portion 12 before the fluid flow 2 emerges from the fluidic component 1.

If the cross-sectional area of the outlet opening 102 is smaller than the cross-sectional area of the inlet opening 101, the pressure within the fluidic component 1 can increase and thus reduce the tendency for cavitation. As a result, the input pressure, which can be higher than 14 bar (above ambient pressure) but can also be over 1000 bar and is preferably between 20 bar and 500 bar, is dissipated essentially only at the outlet opening 102. Owing to the large pressure decrease directly at the outlet opening 102, the emerging fluid jet can tend to spread apart (in all directions). This spreading apart can be counteracted (at least partially) by means of the widened outlet portion 12. By means of the widened outlet portion 12, it is possible to achieve concentration of the emerging fluid jet

(perpendicularly to the planes of symmetry S1 and S2). By means of this concentration of the fluid jet, an increase in the removal or cleaning power of the fluidic component 1 can be achieved.

The widened outlet portion 12 is of funnel-shaped design and has a cross-sectional area which increases in the fluid flow direction (from the inlet opening 101 to the outlet opening 102), starting from the outlet opening 102. In this case, the depth of the widened outlet portion 12 is constant, while the width of the widened outlet portion 12 increases in the fluid flow direction. According to figure 16, the width increases in linear fashion. However, some continuous increase other than the linear increase of the width is also possible. The outlet opening 102 forms the point with the smallest cross-sectional area between the flow chamber 10 and the widened outlet portion 12.

The walls delimiting the widened outlet portion 12 enclose an angle γ in the plane in which the emerging fluid jet oscillates. In the embodiment from figure 16, the angle γ corresponds to the oscillation angle α of the emerging fluid jet which would form without the widened outlet portion 12. The angle γ can also be larger than the corresponding oscillation angle α . In the case of a fluidic component 1 which produces a uniform distribution of the fluid on the surface to be sprayed (also known as a histogram) without a widened outlet portion 12, it is advantageous if the angle γ is up to 10° larger than the oscillation angle α . In the case where a fluidic component 1 without a widened outlet portion 12 produces a nonuniform distribution of the fluid on the surface to be sprayed (e.g. more fluid in the center than in the edge regions) or in the case where a smaller spray angle or oscillation angle α is desired, a widened outlet portion 12, the angle γ of which corresponds to the desired reduced oscillation angle α , can be provided. On the one hand, this produces a smaller oscillation angle α and, on the other hand, it produces more uniform distribution of the fluid on the surface to be sprayed or in the histogram.

The walls delimiting the outlet channel 107 enclose an angle β in the plane in which the emerging fluid jet oscillates. The angle β of the outlet channel 107 can be larger than the oscillation angle α and also larger than the angle γ of the widened outlet portion 12. The angle β of the outlet channel 107 is preferably larger than the angle γ of the widened outlet portion 12 by a factor of at least 1.1. According to a particularly preferred embodiment, $1.1 \cdot \gamma \leq \beta \leq 3.5 \cdot \gamma$.

The widened outlet portion 12 has a length l_{out} which adjoins the component length l . The length l_{out} of the widened outlet portion 12 can correspond at least to the width b_{EX} of the outlet opening 102. The length l_{out} of the widened outlet portion 12 can preferably be greater by a factor of at least 1.25 than the width b_{EX} of the outlet opening 102. The length l_{out} of the widened outlet portion 12 can preferably be greater by a factor of 1 to 32 than the outlet width b_{EX} , in particular preferably by a factor of 4 to 16. At this ratio, a fluid jet of high jet quality can be produced.

The separators 105a, 105b are formed by an inward protrusion of the wall of the auxiliary flow channels 104a, 104b. In this case, the inward protrusion has a shape which describes a circular arc in plane of symmetry S1. The radius of the circular arc can vary. For example, the radius of the circular arc can be 0.0075 to 2.6 times, preferably 0.015 to 1.8 times and, in particular, preferably 0.055 to 1.7 times the outlet width b_{EX} .

In the illustrative embodiment in figures 16 to 18, the component depth t is constant over the entire widened outlet portion 12 and corresponds to the component depth at the outlet opening 102. Depending on the area of application of the fluidic component 1, the depth t of the widened outlet portion 12 can increase or decrease downstream (in comparison with the component depth at the outlet opening 102). By means of a downstream decrease in the component depth in the region of the widened outlet portion 12, further focusing of the emerging fluid jet can be achieved.

A fluidic component 1 according to another embodiment of the invention is illustrated schematically in figure 19. This fluidic component 1 too, like the fluidic component 1 from figure 16, has a widened outlet portion 12. The shapes of the auxiliary flow channels 104a, 104b, of the blocks 11a, 11b and of the separators 105a, 105b are similar to the shapes of the fluidic component 1 from figure 7d). The basic shape of the fluidic component 1 from figure 19 is substantially rectangular. The blocks 11a and 11b have a substantially rectangular basic shape, adjoining which at the end thereof facing the inlet opening 101 is a triangular projection, which projects into the main flow channel. The blocks 11a and 11b can be sharp-edged or slightly rounded at the intersection points of the rectilinear sections, as illustrated in figure 19.

The auxiliary flow channels 104a, 104b each extend initially at an angle of substantially 90° to the longitudinal axis A in opposite directions in a first section, starting from the inlet opening 101. The auxiliary flow channels 104a, 104b then bend (substantially at a right angle), with the result that they each extend substantially parallel to the longitudinal axis A (in the direction of the outlet opening 102) (second section). A third section adjoins the second section. The change in direction at the transition from the second to the third section is substantially 90° .

In contrast to the fluidic component 1 from figure 16, the separators 105a, 105b are not formed by an inward protrusion of the wall of the auxiliary flow channels 104a, 104b but by the transition of the rectilinear third section of the auxiliary flow channels 104a, 104b (which extends substantially perpendicularly to the longitudinal axis A and to plane of symmetry S2) to the wall of the outlet channel 107, which encloses an angle of less than 90° with the longitudinal axis A (and plane of symmetry S2). The separators 105a, 105b are accordingly formed by an edge. As an alternative, the separators 105a, 105b can have a shape which describes a circular arc in plane of symmetry S1 (as in the embodiment from figures 16 to 18). In the embodiment according to figure 19, the third section

of the auxiliary flow channels 104a, 104b extends substantially perpendicularly to plane of symmetry S2, but the angle can also differ from 90° . The separators 105a, 105b can preferably be arranged at a distance from plane of symmetry S2 which is within the average width of the blocks 11a, 11b.

The shape of the fluidic components 1 having a widened outlet portion 12 is shown purely by way of example in figures 16 to 19. The widened outlet portion 12 can also be provided in combination with other embodiments of the fluidic component 1 according to the invention.

Patentkrav

1. Fluidkomponent (1) med et strømningskammer (10) der tillader en fluidstrøm (2) at strømme igennem, hvilken fluidstrøm kommer ind i strømningskammeret (10) gennem en indløbsåbning (101) af strømningskammeret (10) og kommer
5 ud af strømningskammeret (10) gennem en udløbsåbning (102) af strømningskammeret (10), og hvilket strømningskammer omfatter mindst et middel til at ændre retningen af fluidstrømmen (2) ved udløbsåbningen (102) på en målrettet måde, især for at generere en rumlig svingning af fluidstrømmen (2) ved udløbsåbningen (102), hvilket strømningskammer (10) omfatter en hovedstrøms-
10 kanal (103), som forbinder indløbsåbningen (101) og udløbsåbningen (102), og mindst en sidestrømskanal (104a, 104b) som et middel til målrettet at ændre retningen af fluidstrømmen (2) ved udløbsåbningen (102),

kendetegnet ved, at

indløbsåbningen (101) omfatter et større tværsnitsareal end udløbsåbningen
15 (102), eller at indløbsåbningen (101) og udløbsåbningen (102) omfatter tværsnitsarealer, der er ens i størrelse, hvilket tværsnitsareal af indløbsåbningen og hvilket tværsnitsareal af udløbsåbningen hver er det mindste tværsnitsareal af fluidkomponenten, gennem hvilken fluidstrømmen passerer, når den kommer ind i strømningskammeret henholdsvis kommer ud af strømningskammeret
20 igen.

2. Fluidkomponenten (1) ifølge krav 1,

kendetegnet ved, at tværsnitsarealet af indløbsåbningen (101) er større med en faktor på op til 2,5 end tværsnitsarealet af udløbsåbningen (102), fortrinsvis
25 større med en faktor på op til 1,5 end tværsnitsarealet af udløbsåbningen (102).

3. Fluidkomponent (1) ifølge krav 1 eller 2,

kendetegnet ved, at fluidkomponenten (1) omfatter en komponentlængde (1), en komponentbredde (b) og en komponentdybde (t), hvilken komponentlængde
30 (1) bestemmer afstanden mellem indløbsåbningen (101) og udløbsåbningen (102), og komponentbredden (b) og komponentdybden (t) er hver defineret vinkelret på hinanden og på komponentlængden (1), hvilken komponentbredde (b) er større end komponentdybden (t), og at udløbsåbningen (102) omfatter en

bredde (b_{EX}), der er $1/3$ til $1/50$ af komponentbredden (b), fortrinsvis $1/5$ til $1/15$ af komponentbredden (b), hvilken indløbsåbning (101) omfatter en bredde (b_{IN}), der er $1/3$ til $1/20$ af komponentbredden (b), fortrinsvis $1/5$ til $1/10$ af komponentbredden (b).

5

4. Fluidkomponenten (1) ifølge krav 3,

kendetegnet ved, at komponentdybden (t) er konstant over den samlede komponentlængden (1) eller falder fra indløbsåbningen (101) mod udløbsåbningen (102).

10

5. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at** den mindst ene sidestrømskanal (104a, 104b) omfatter en større eller mindre dybde end hovedstrømskanalen (103).

15 6. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at** en separator (105a, 105b) er tilvejebragt ved indløbet (104a1, 104b1) i den mindst ene sidestrømskanal (104a, 104b), hvilken separator (105a, 105b) især er udformet som et indadvendt fremspring, som rager ind i strømningskammeret (10) på tværs af strømningsretningen, der er fremherskende i sidestrømskanalen.

20

7. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at** tværsnitsarealet af udløbsåbningen (102) er rektangulært, polygonalt eller rundt.

25

8. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at** en udløbskanal (107), hvis tværsnitsareal ændrer sig i form i retning af udløbsåbningen (102), især fra rektangulær til rund, er tilvejebragt direkte opstrøms for udløbsåbningen (102), hvilken fluidkomponent (1) især omfatter et hulrum (112), der er udformet som en udvidelse af udløbskanalen (107), og som, når den ses i strømningsretningen af den udgående fluidstrøm, strækker sig omkring den samlede udløbskanal (107) over en sektion af udløbskanalen (107) og på tværs af strømningsretningen for den udgående fluidstrøm.

30

9. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at** fluidstrømmen (2) kommer ind i fluidkomponenten (1) via indløbsåbningen (101) under et tryk og at trykket reduceres væsentligt ved udløbsåbningen (102).

10. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at** fluidkomponenten (1) omfatter to eller flere udløbsåbninger (102), der er dannet ved indretning af en strømningsdel (108) direkte opstrøms for udløbsåbningerne (102), hvilke udløbsåbninger (102) hver omfatter et mindre tværsnitsareal end indløbsåbningen (101), eller udløbsåbningerne (102) og indløbsåbningen (101) omfatter hver tværsnitsarealer, der er ens i størrelse.

15 11. Fluidkomponent (1) ifølge et hvilket som helst af de foregående krav, **kendetegnet ved, at**
en fluidstrømstyring (109) som er bevægelig af fluidstrømmen (2), der ændrer sin retning uden at påvirke fluidstrømningsretningen (2), er forbundet nedstrøms for udløbsåbningen (102), hvor det især er tilvejebragt, at fluidstrømningsstyringen (109) er stift forbundet med et strømningsførende legeme (110), der er anbragt opstrøms for udløbsåbningen (102) og kan bevæges ved at fluidstrømmen (2) skifter sin retning.

25 12. Fluidkomponent (1) ifølge et hvilket som helst af kravene 1 til 9, **kendetegnet ved, at** en udløbsudvidelse (12) følger nedstrøms for udløbsåbningen (102), hvor især tværsnitsarealet af udløbsudvidelsen øges nedstrøms for udløbsåbningen (102), og hvor udløbsudvidelsen (12) især omfatter en bredde, der øges nedstrøms for udløbsåbningen (102).

30 13. Fluidkomponenten (1) ifølge krav 12,
kendetegnet ved, at udløbsudvidelsen (12) afgrænses af en væg, der omslutter en vinkel γ i et plan, i hvilket den udgående fluidstråle svinger inden for en

oscillationsvinkel α , hvilken vinklen γ af udløbsudvidelsen (12) er 0° til 15° , fortrinsvis 0° til 10° , større end svingningsvinklen α .

- 5 **14.** Rengøringsapparat med en indretning til at fremstille en fluidstråle, hvilken rengøringsapparat især er en opvaskemaskine, et industrielt rengøringsystem, en vaskemaskine eller en højtryksrenser,

kendetegnet ved, at

indretningen er en fluidkomponent (1) ifølge et hvilket som helst af de foregående krav.

10

- 15.** Indsprøjtningssystem til indsprøjtning af et brændstof i en forbrændingsmotor med en indretning til at fremstille en fluidstråle,

kendetegnet ved, at

indretningen er en fluidkomponent (1) ifølge et hvilket som helst af kravene 1 til

15 13.

FIG 1

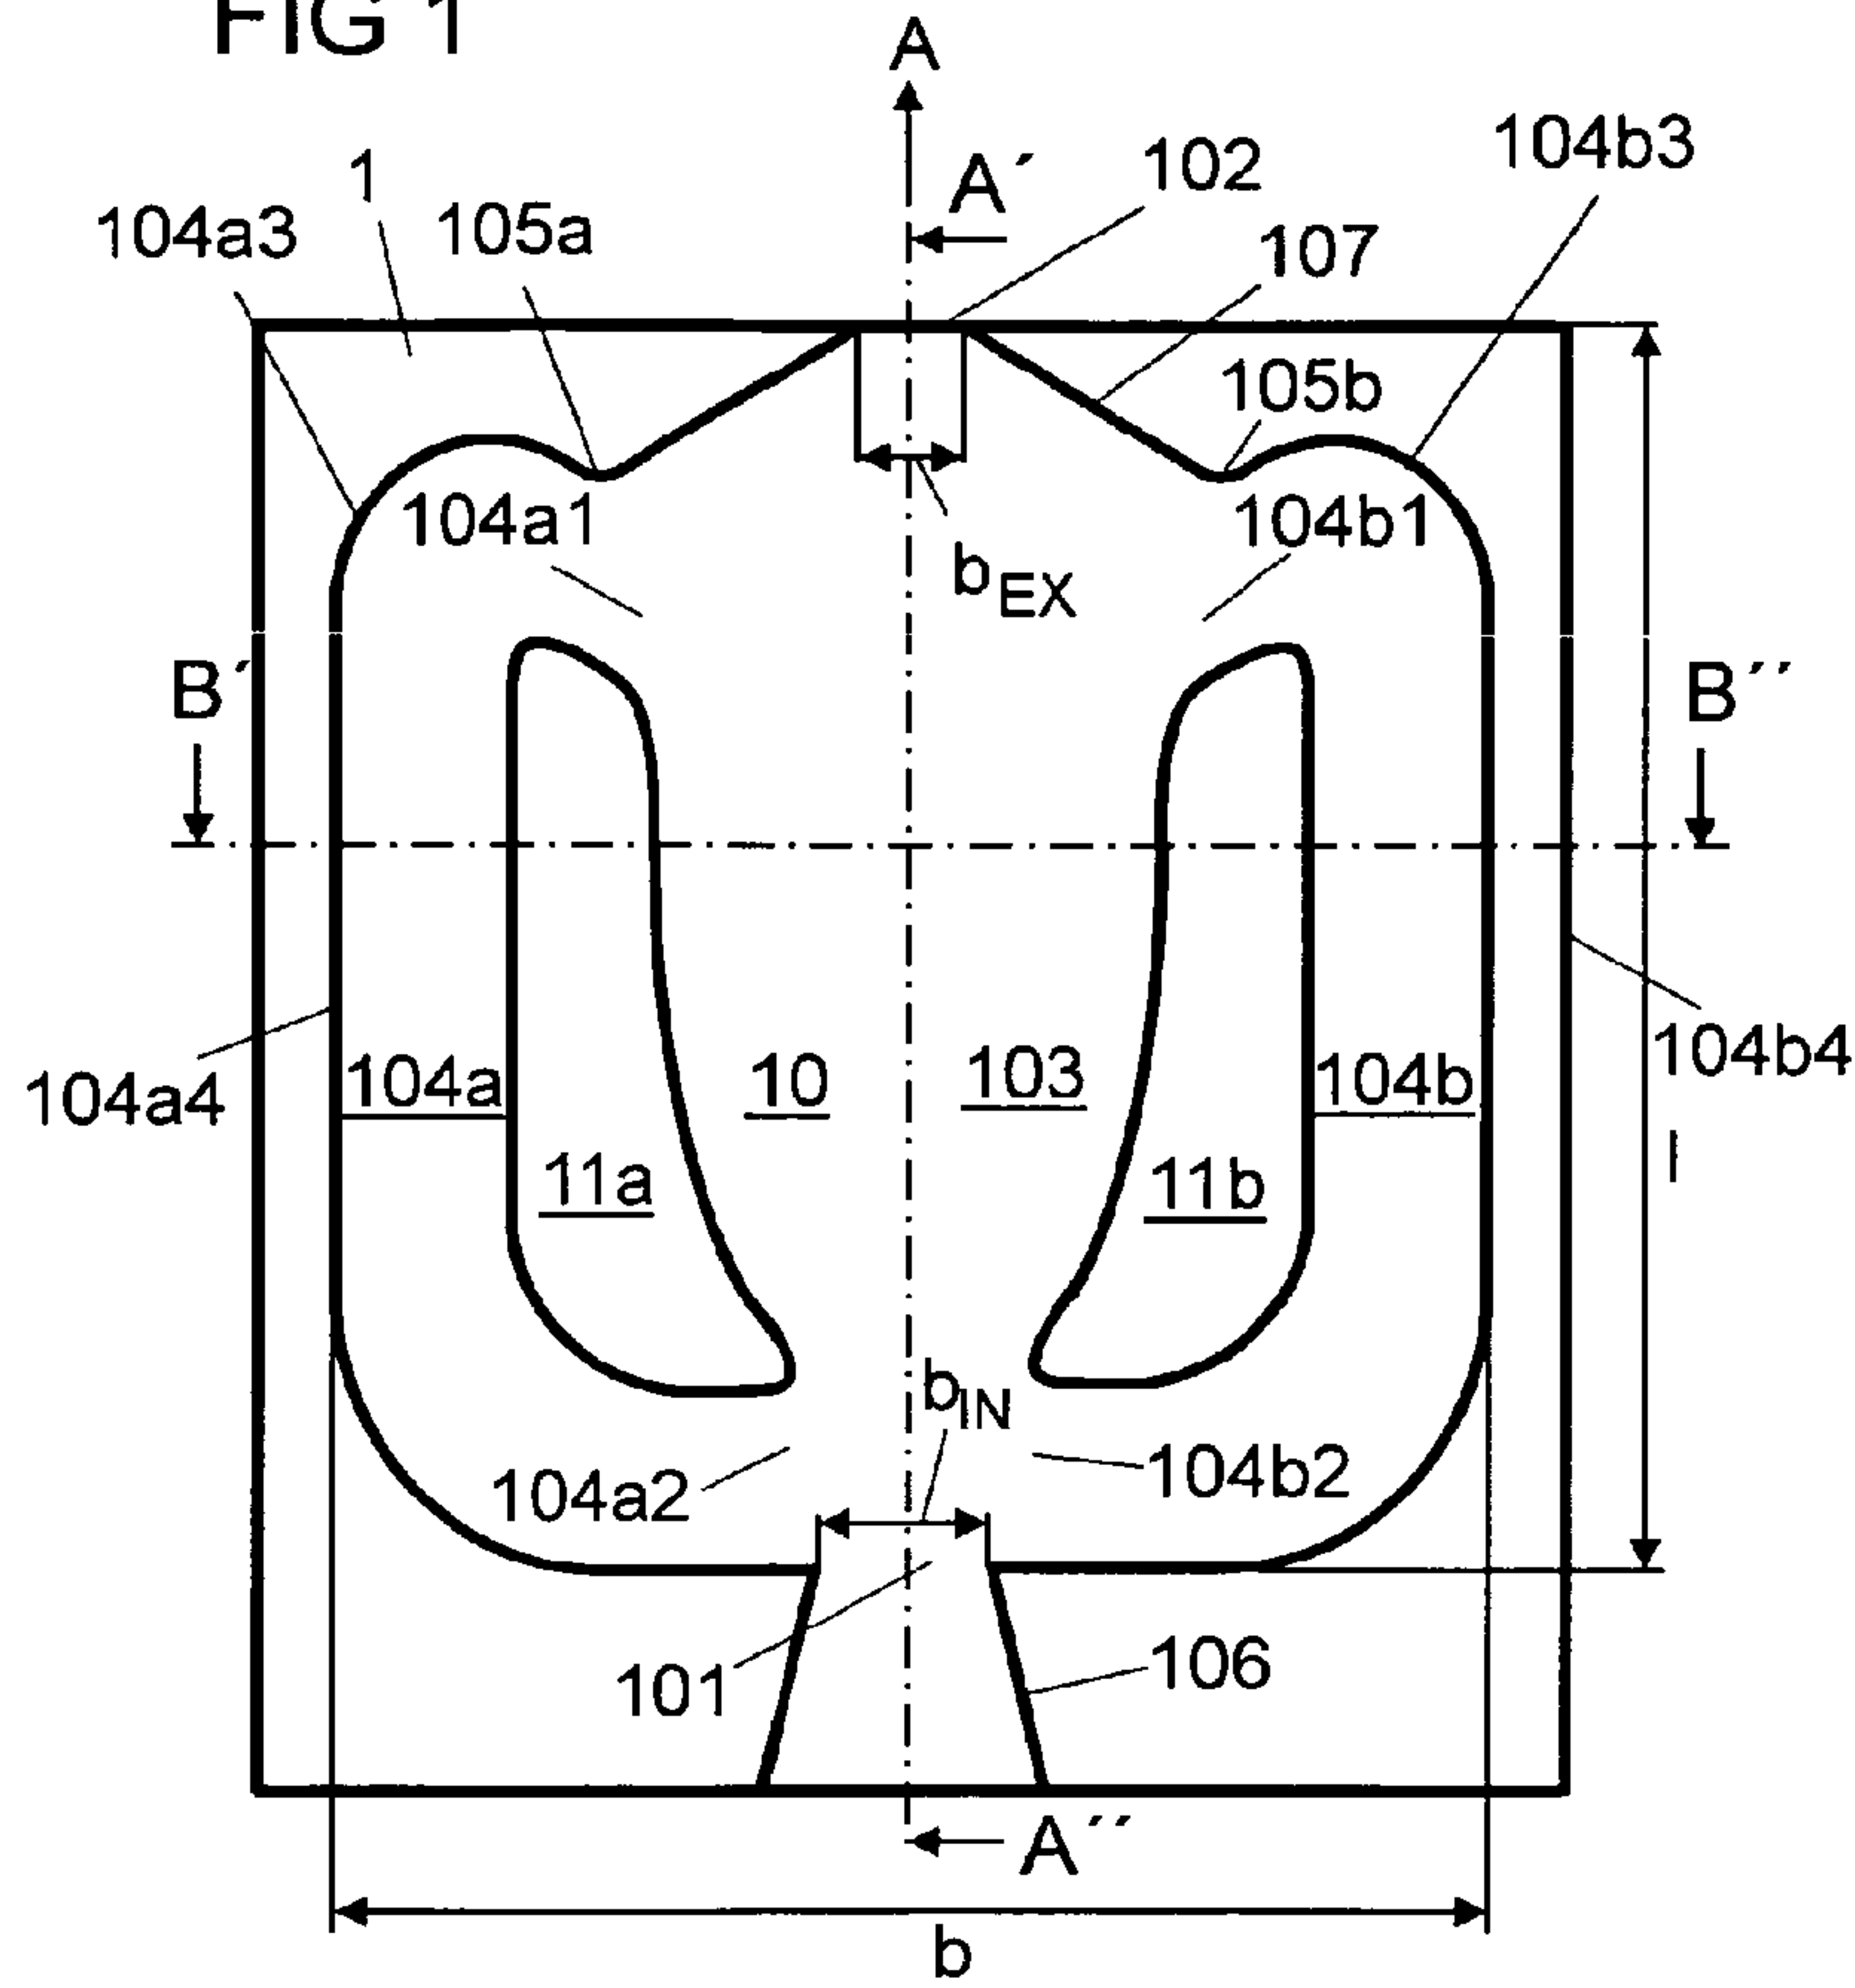


FIG 2

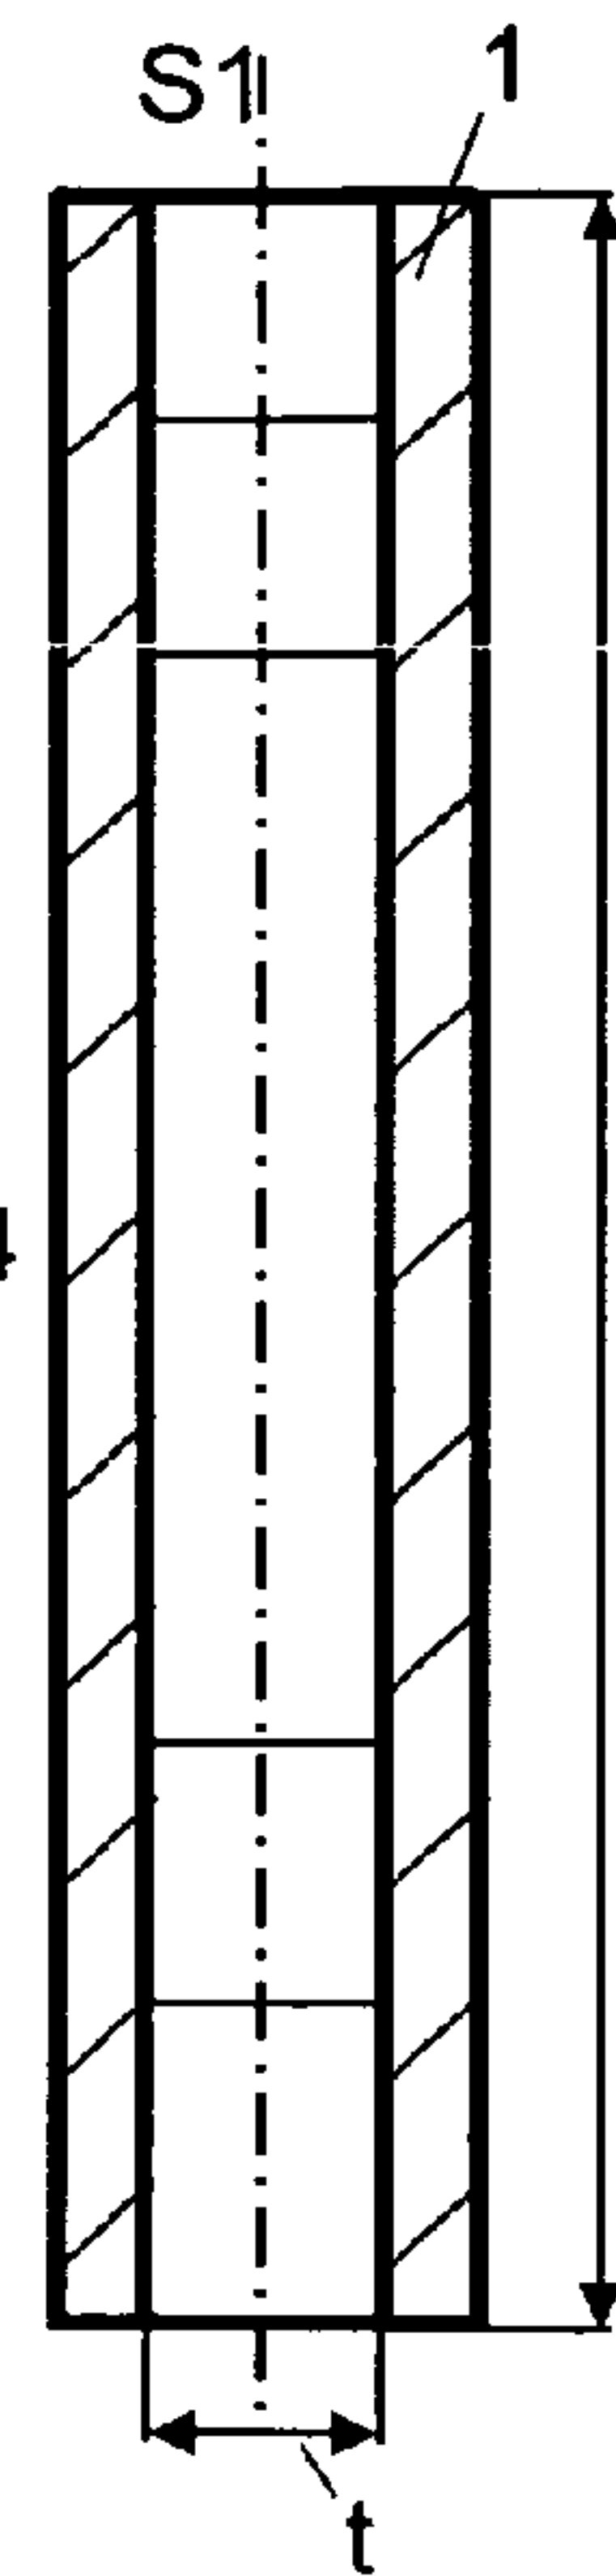


FIG 3

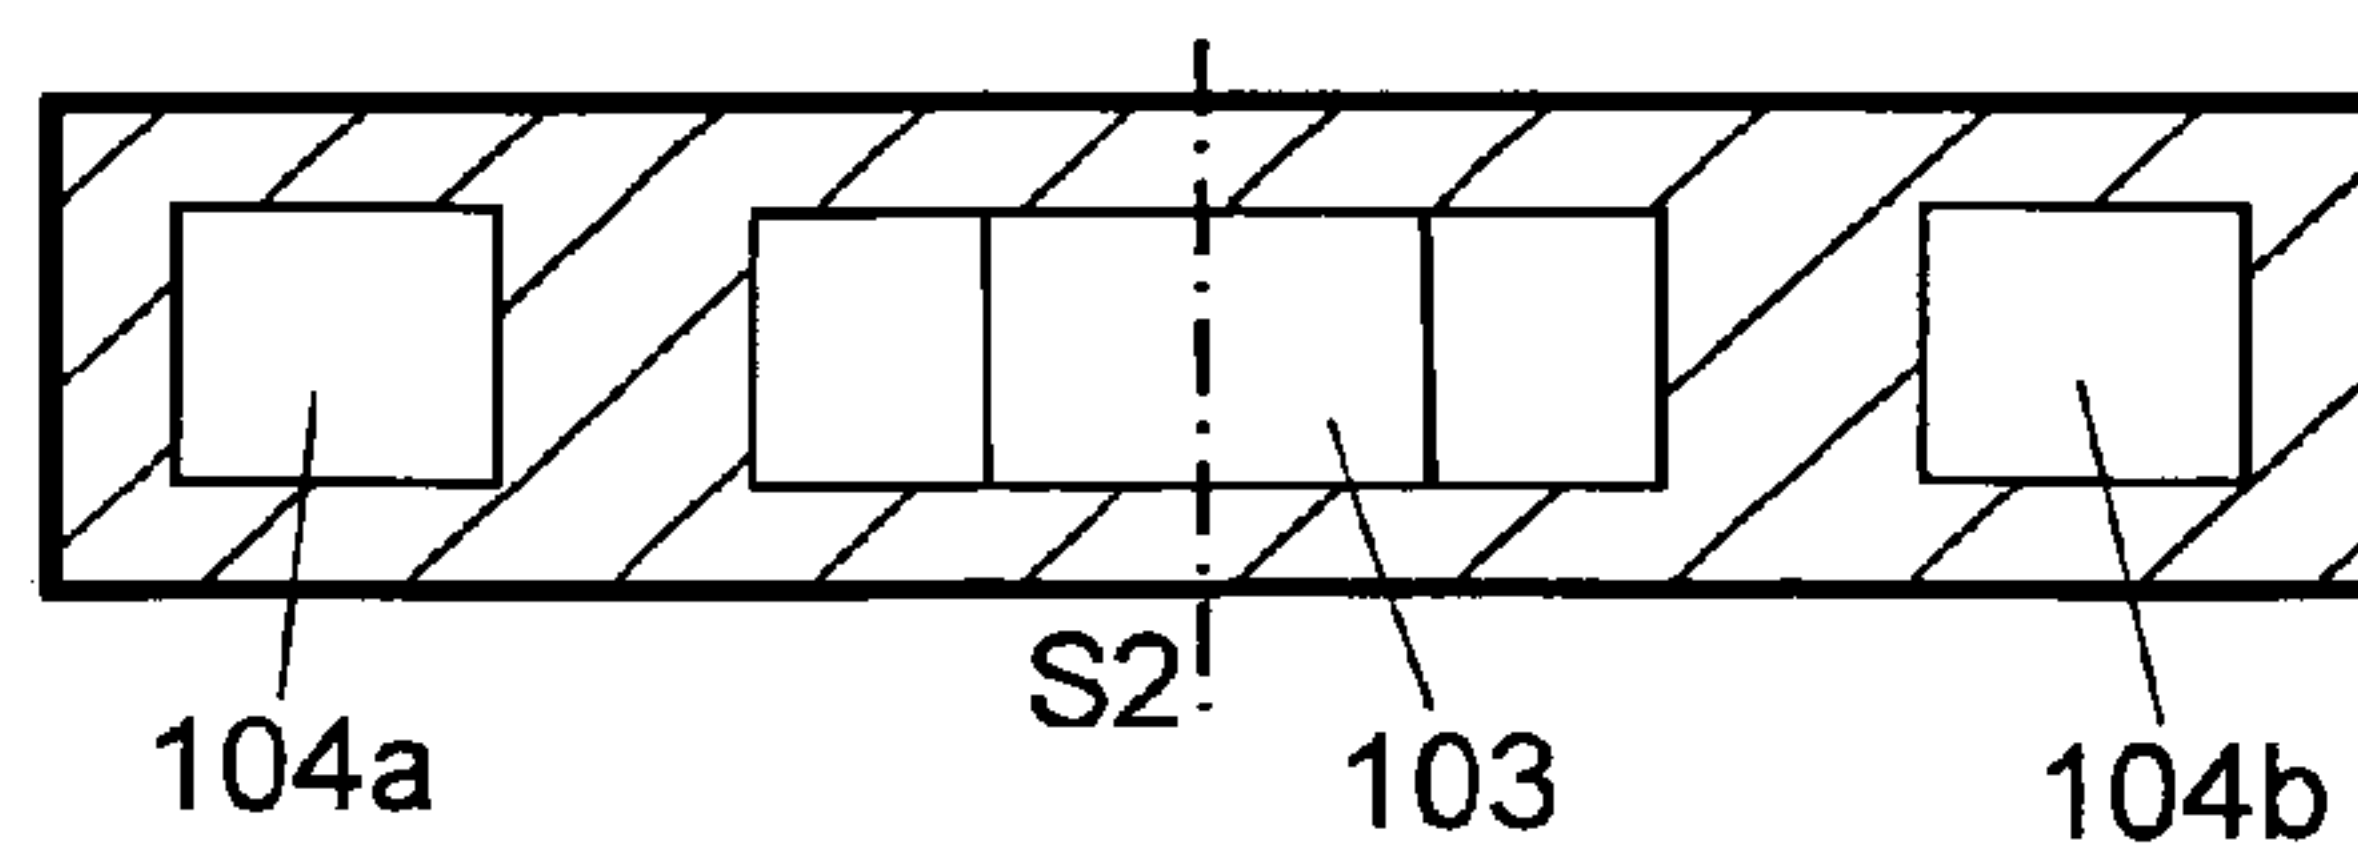


FIG 4

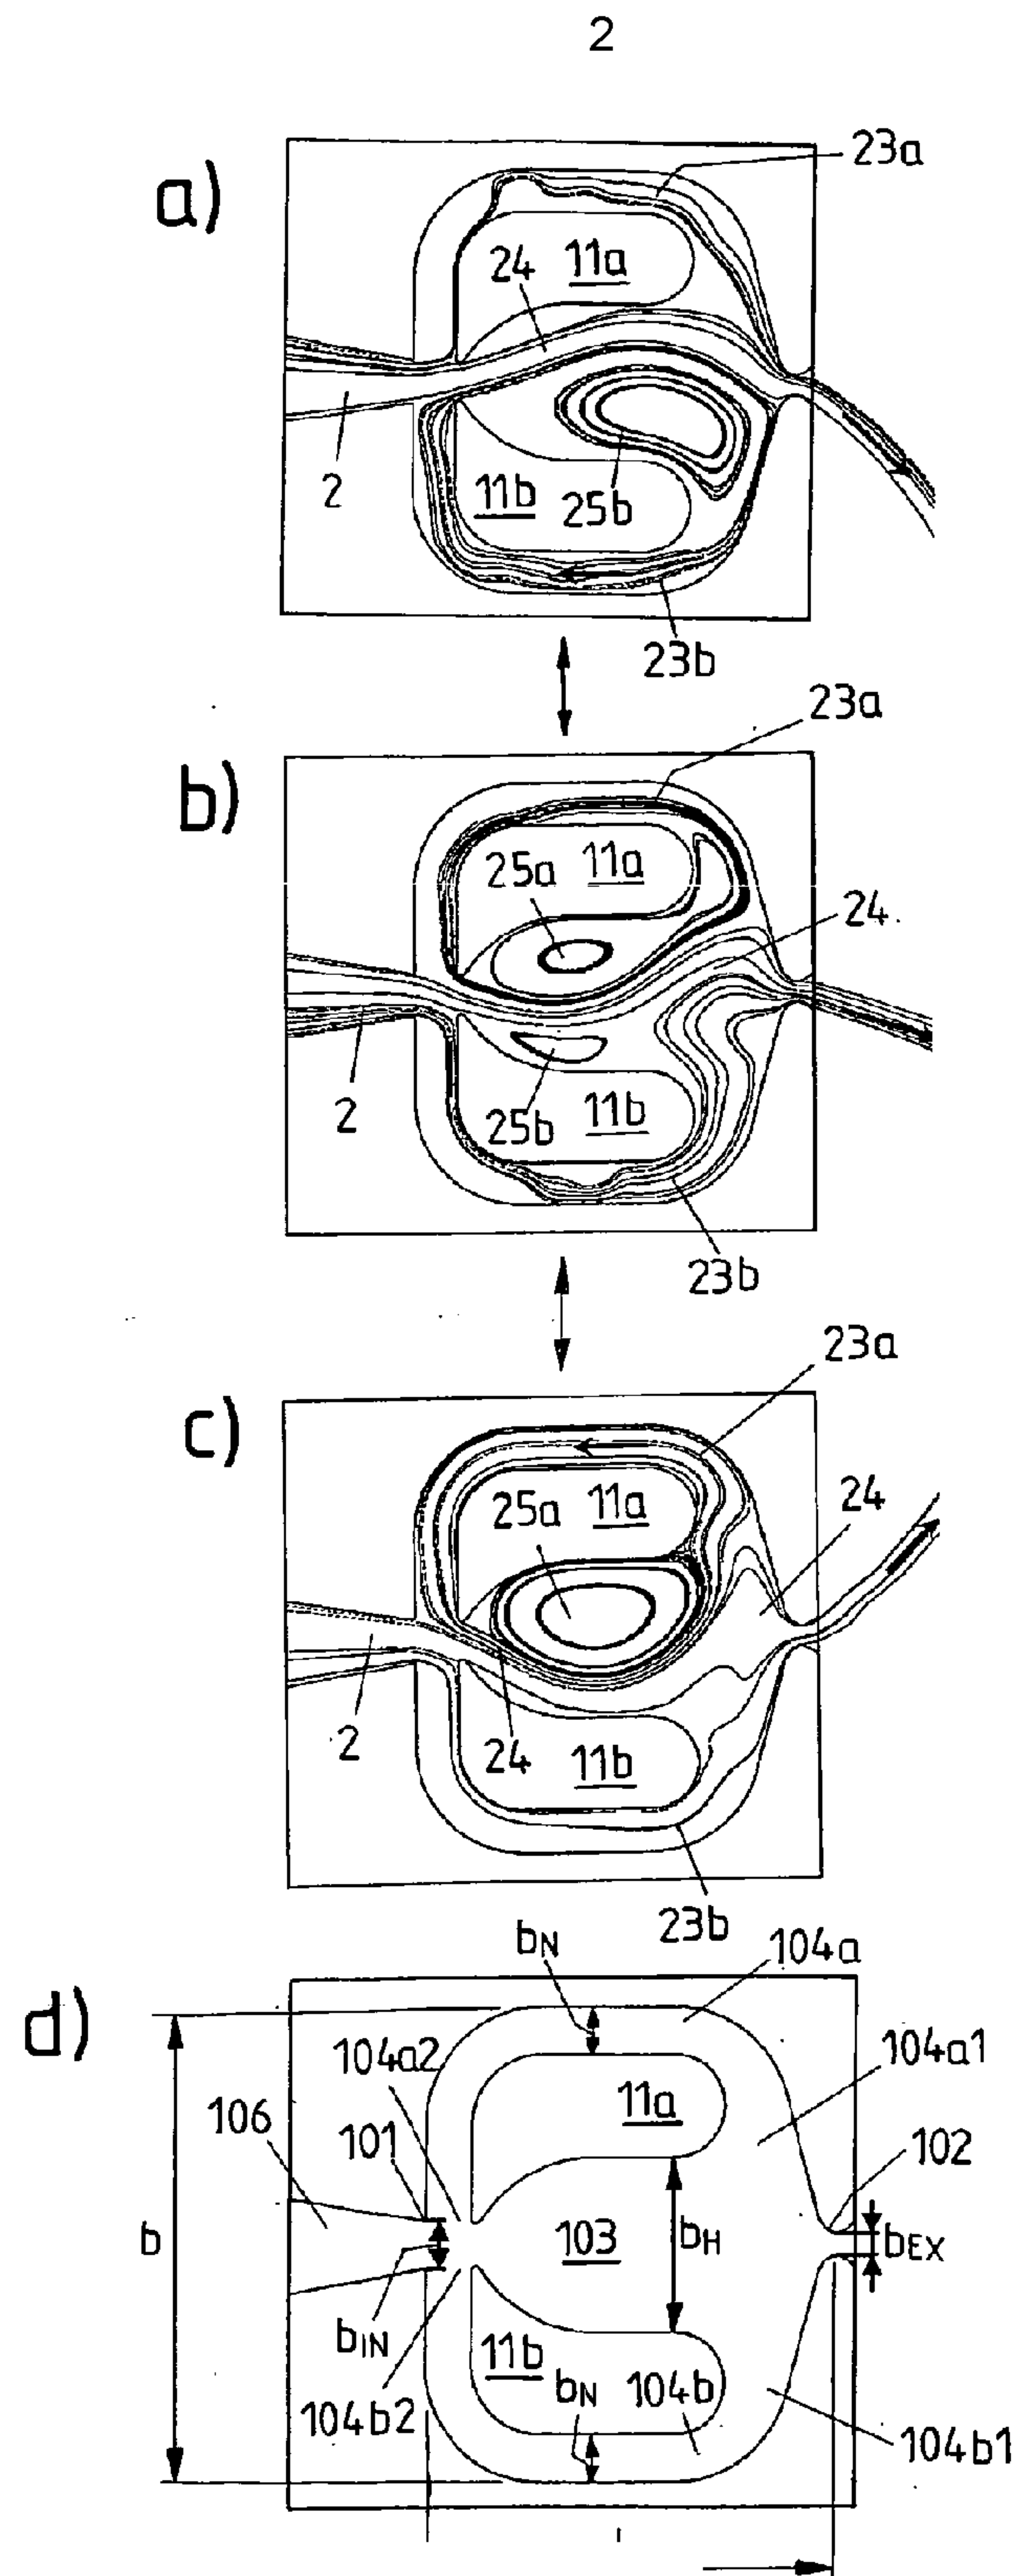


FIG 5



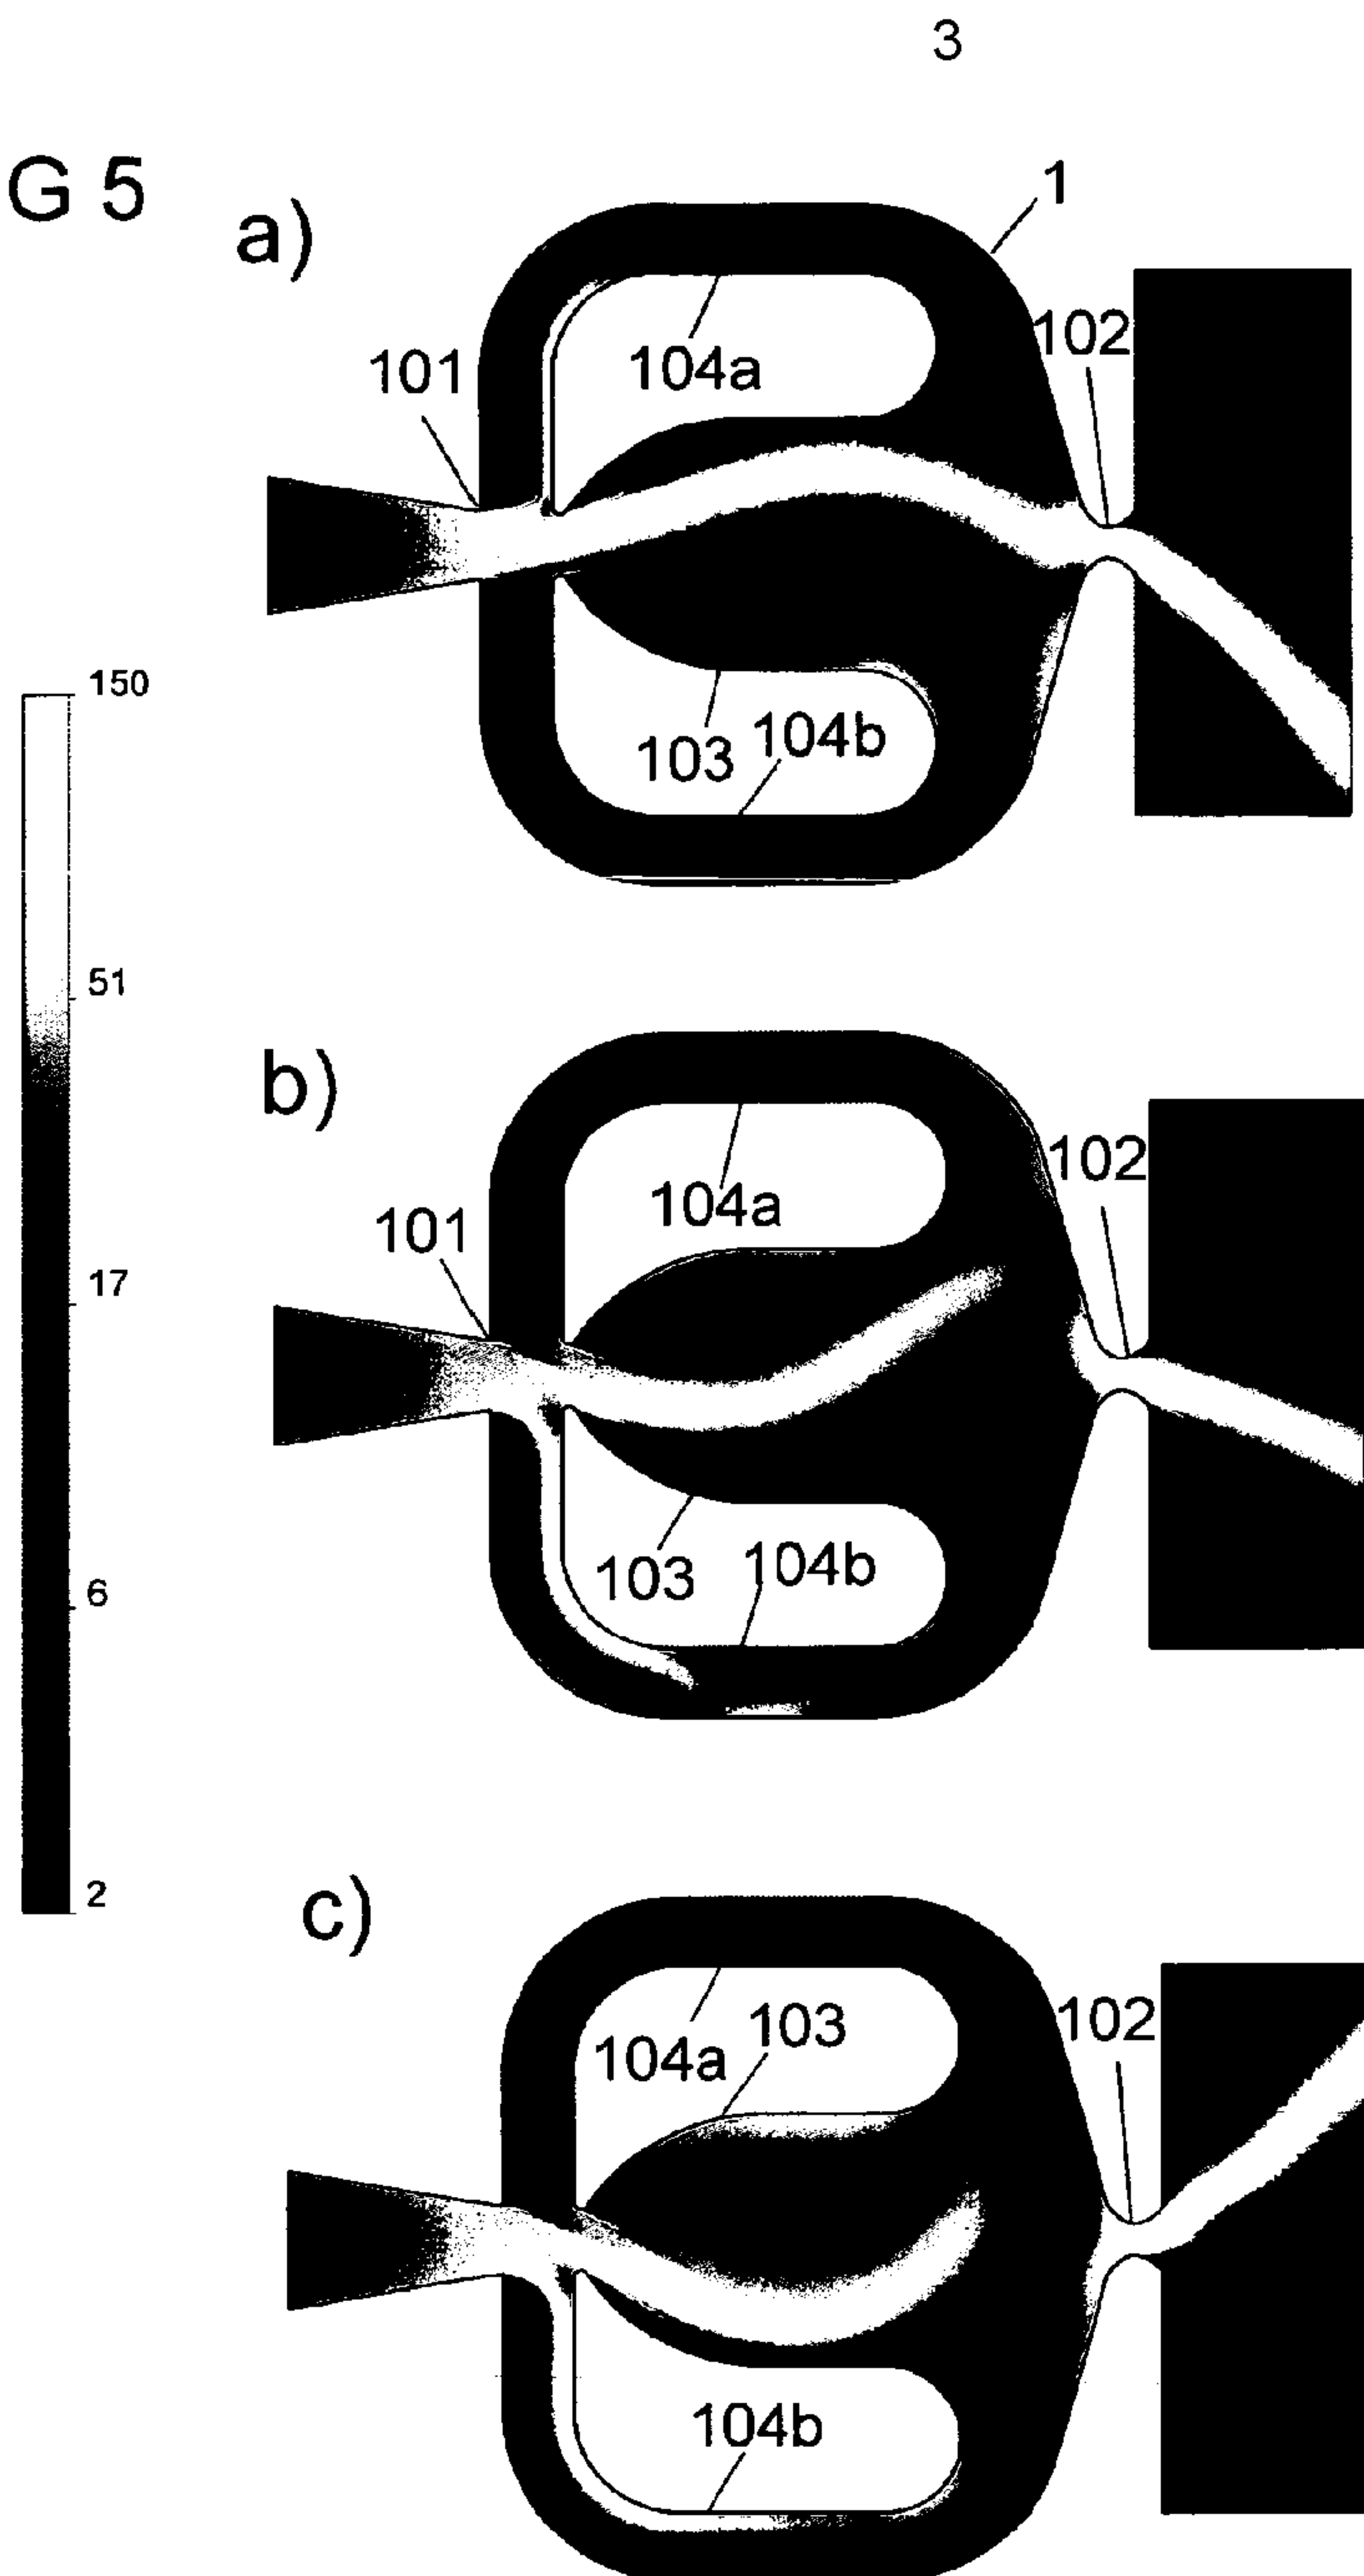


FIG 6

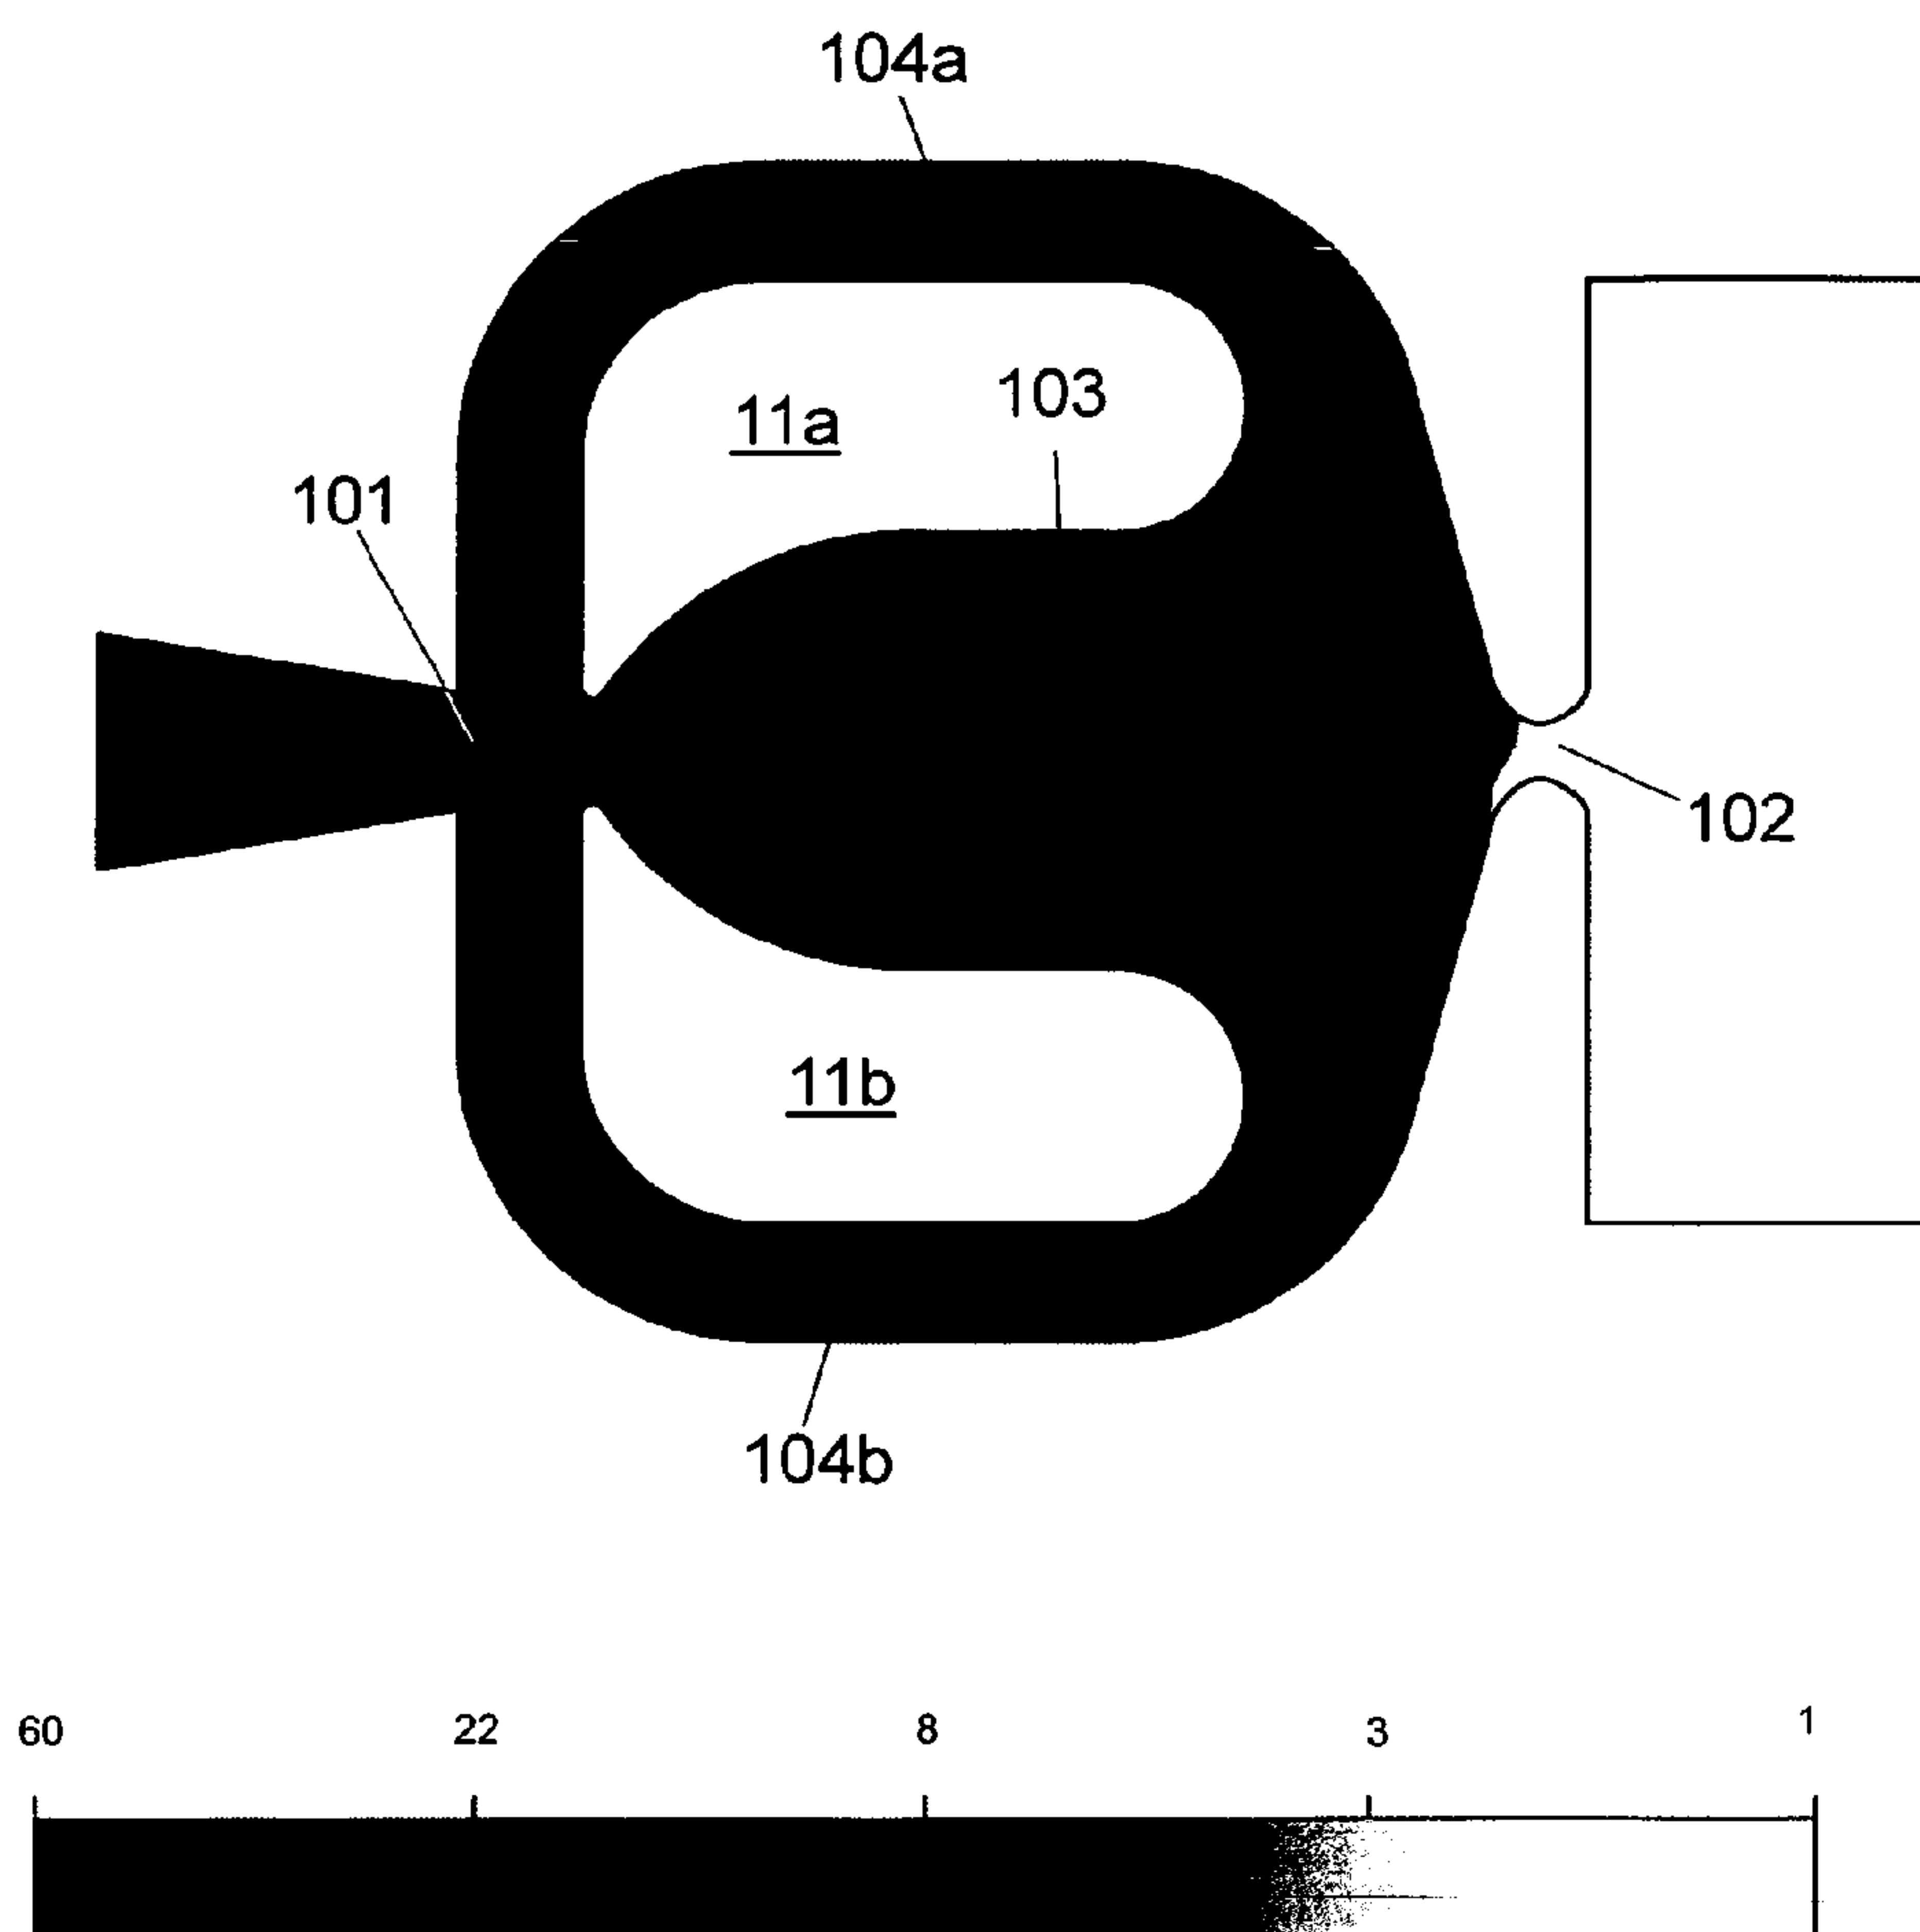

5

FIG 7

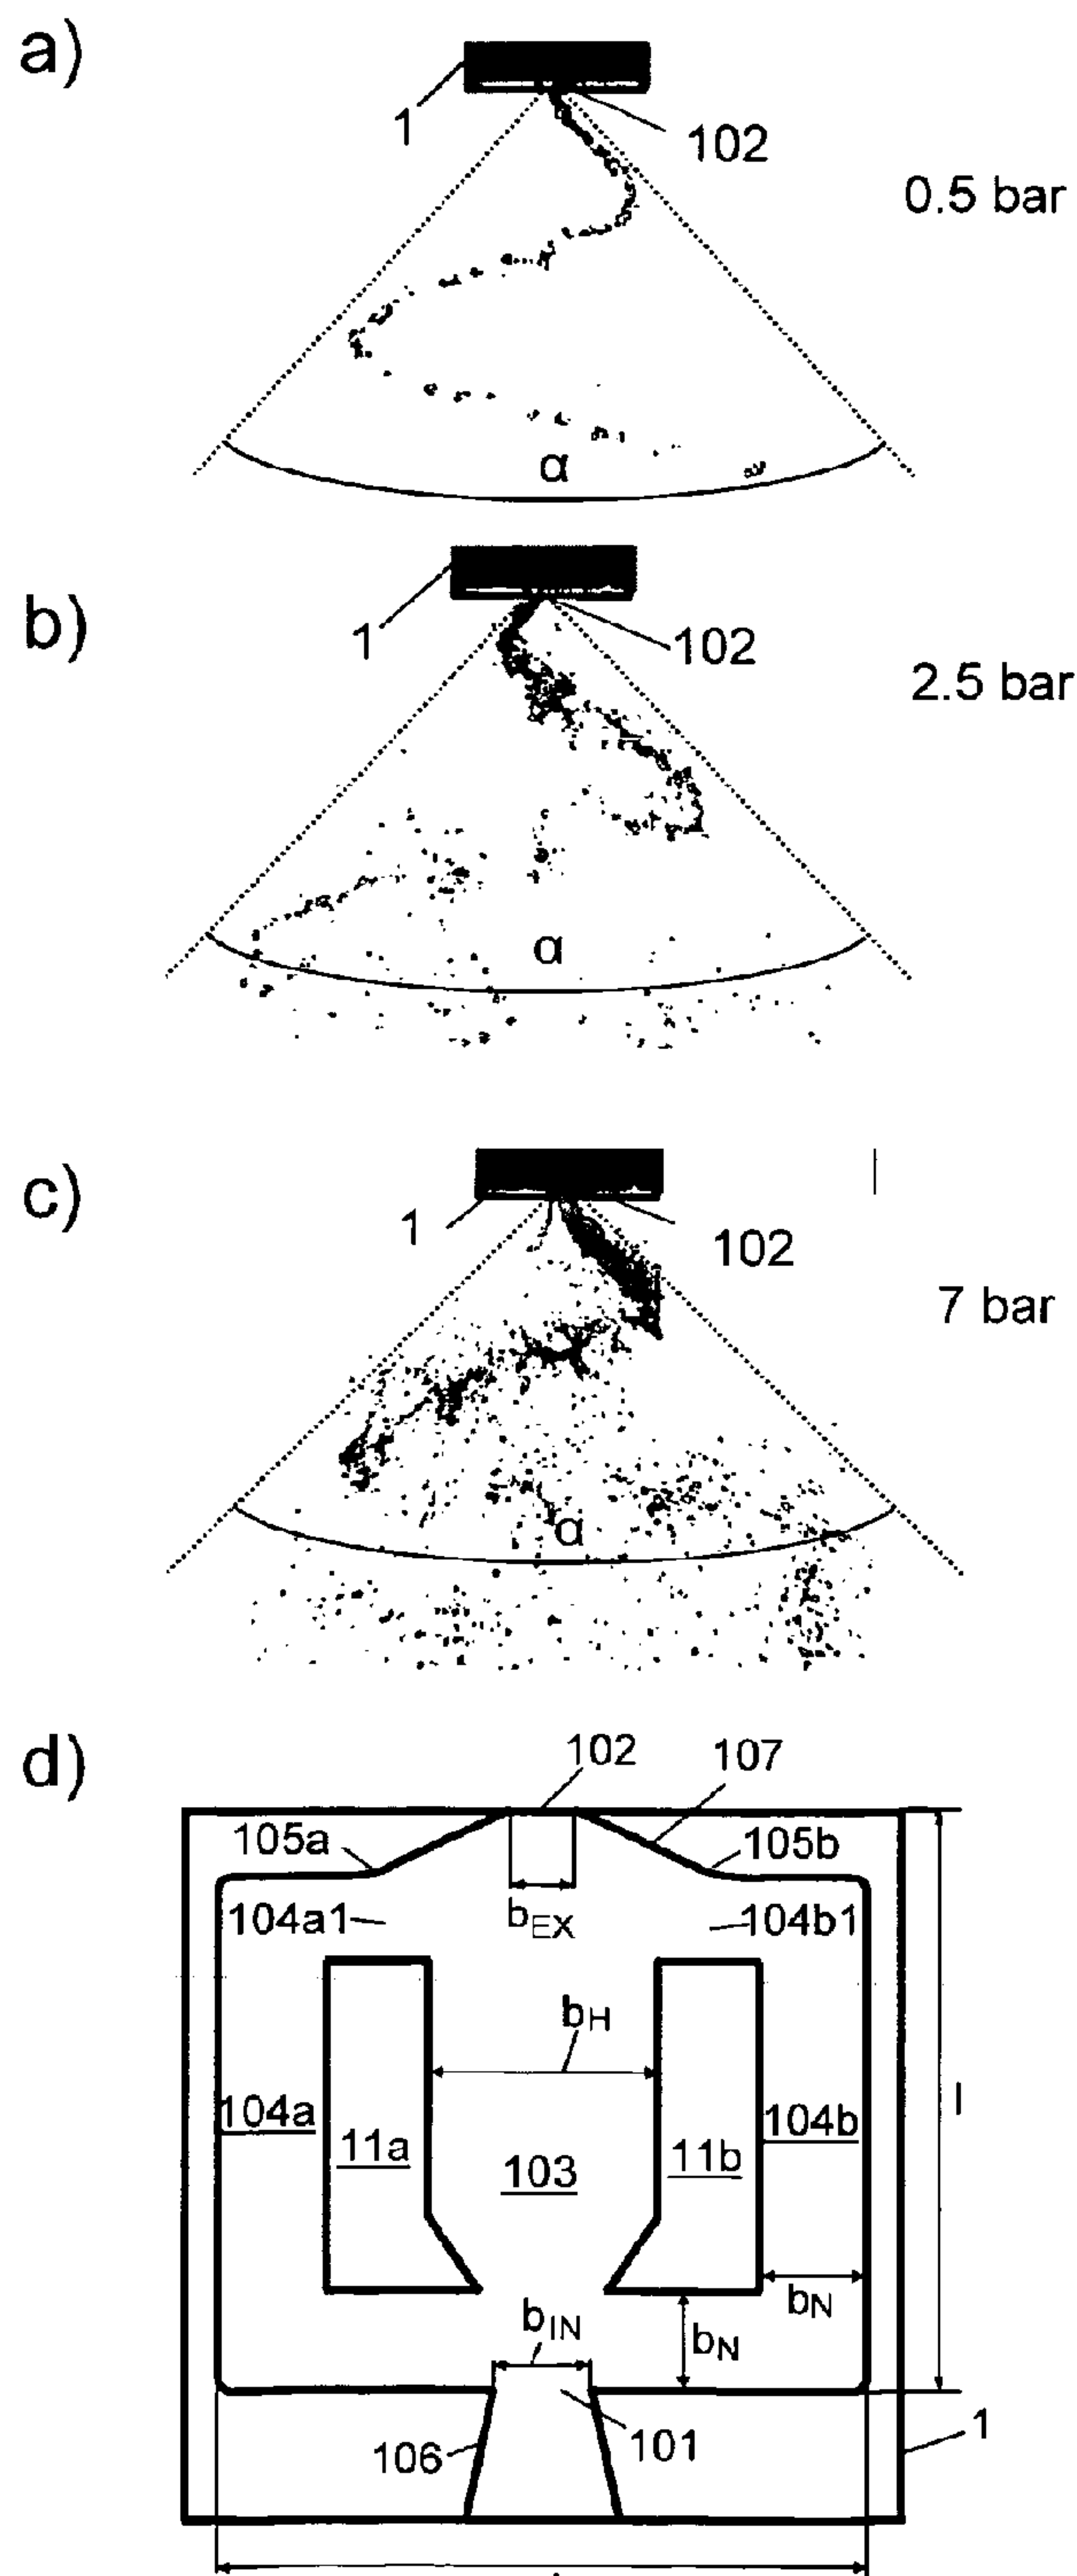

6

FIG 8

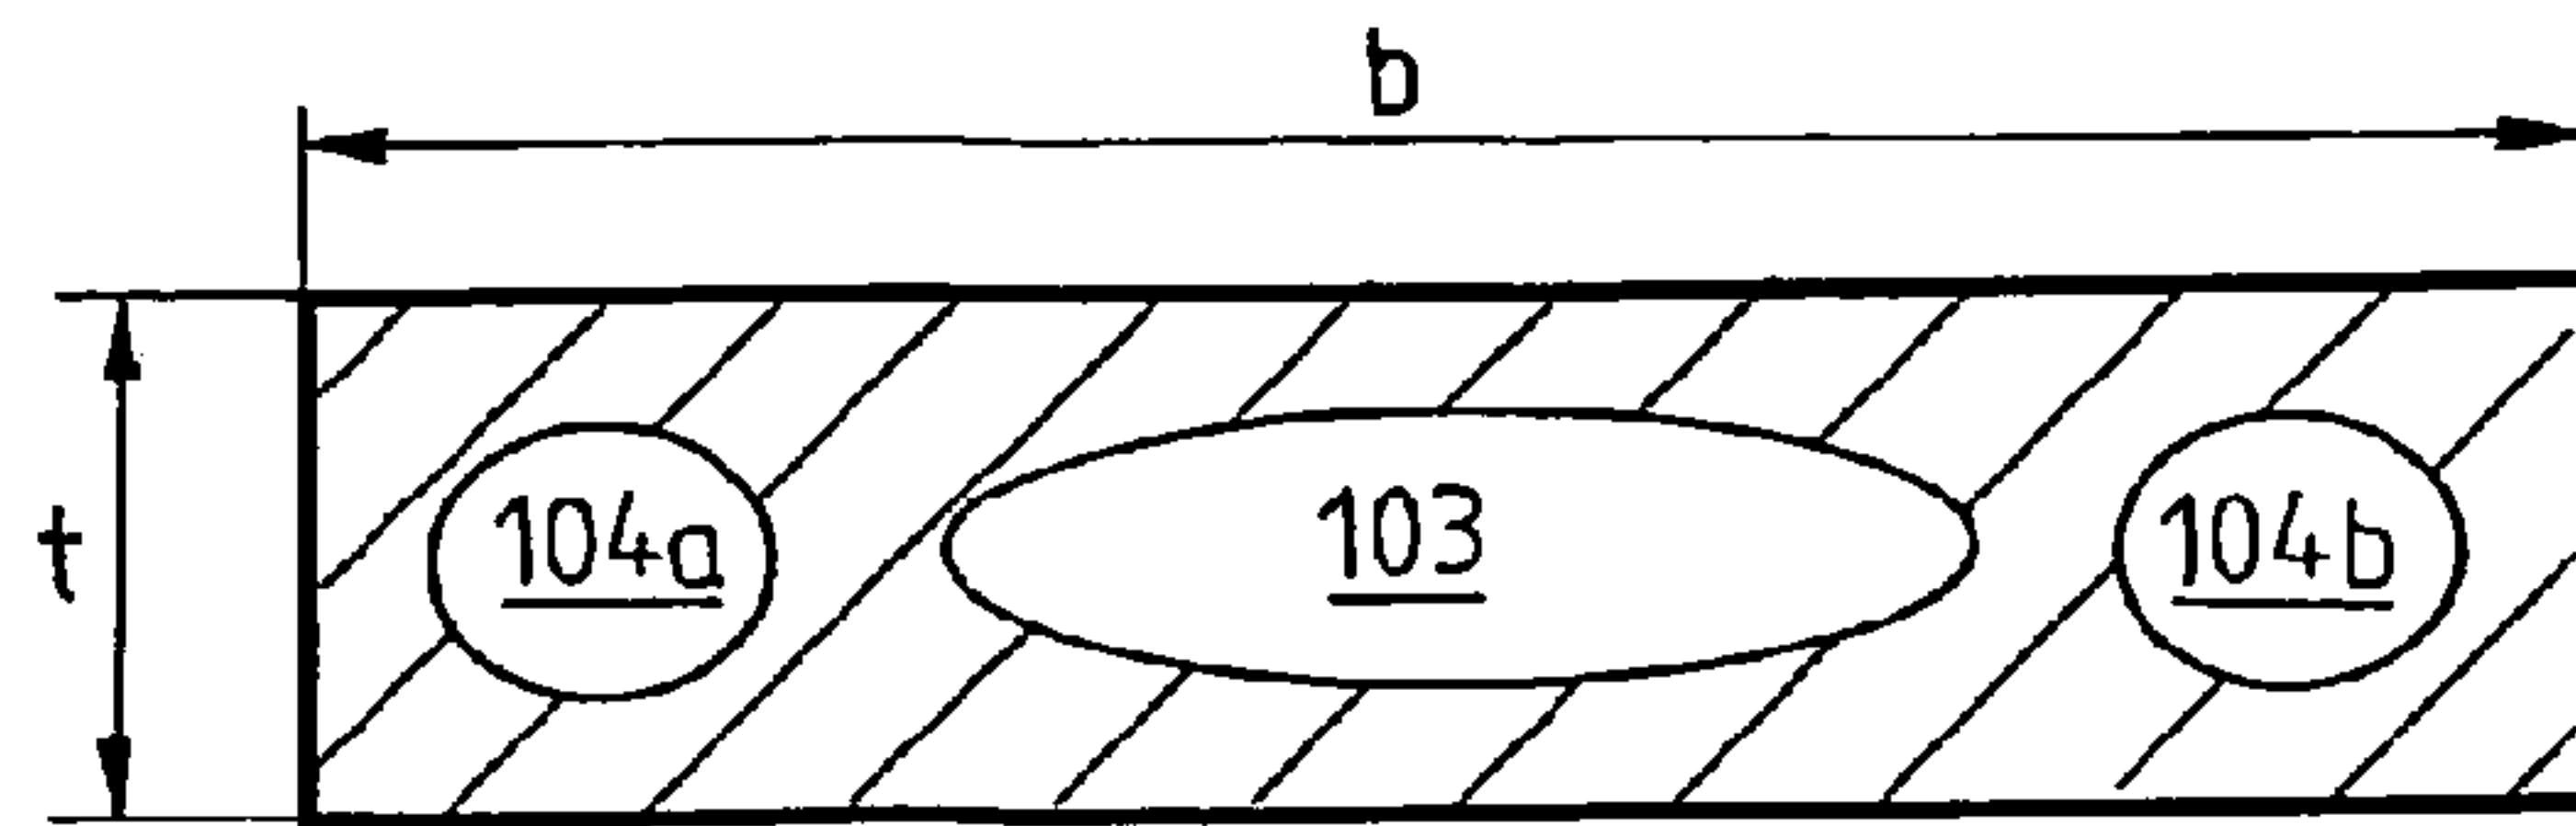


FIG9

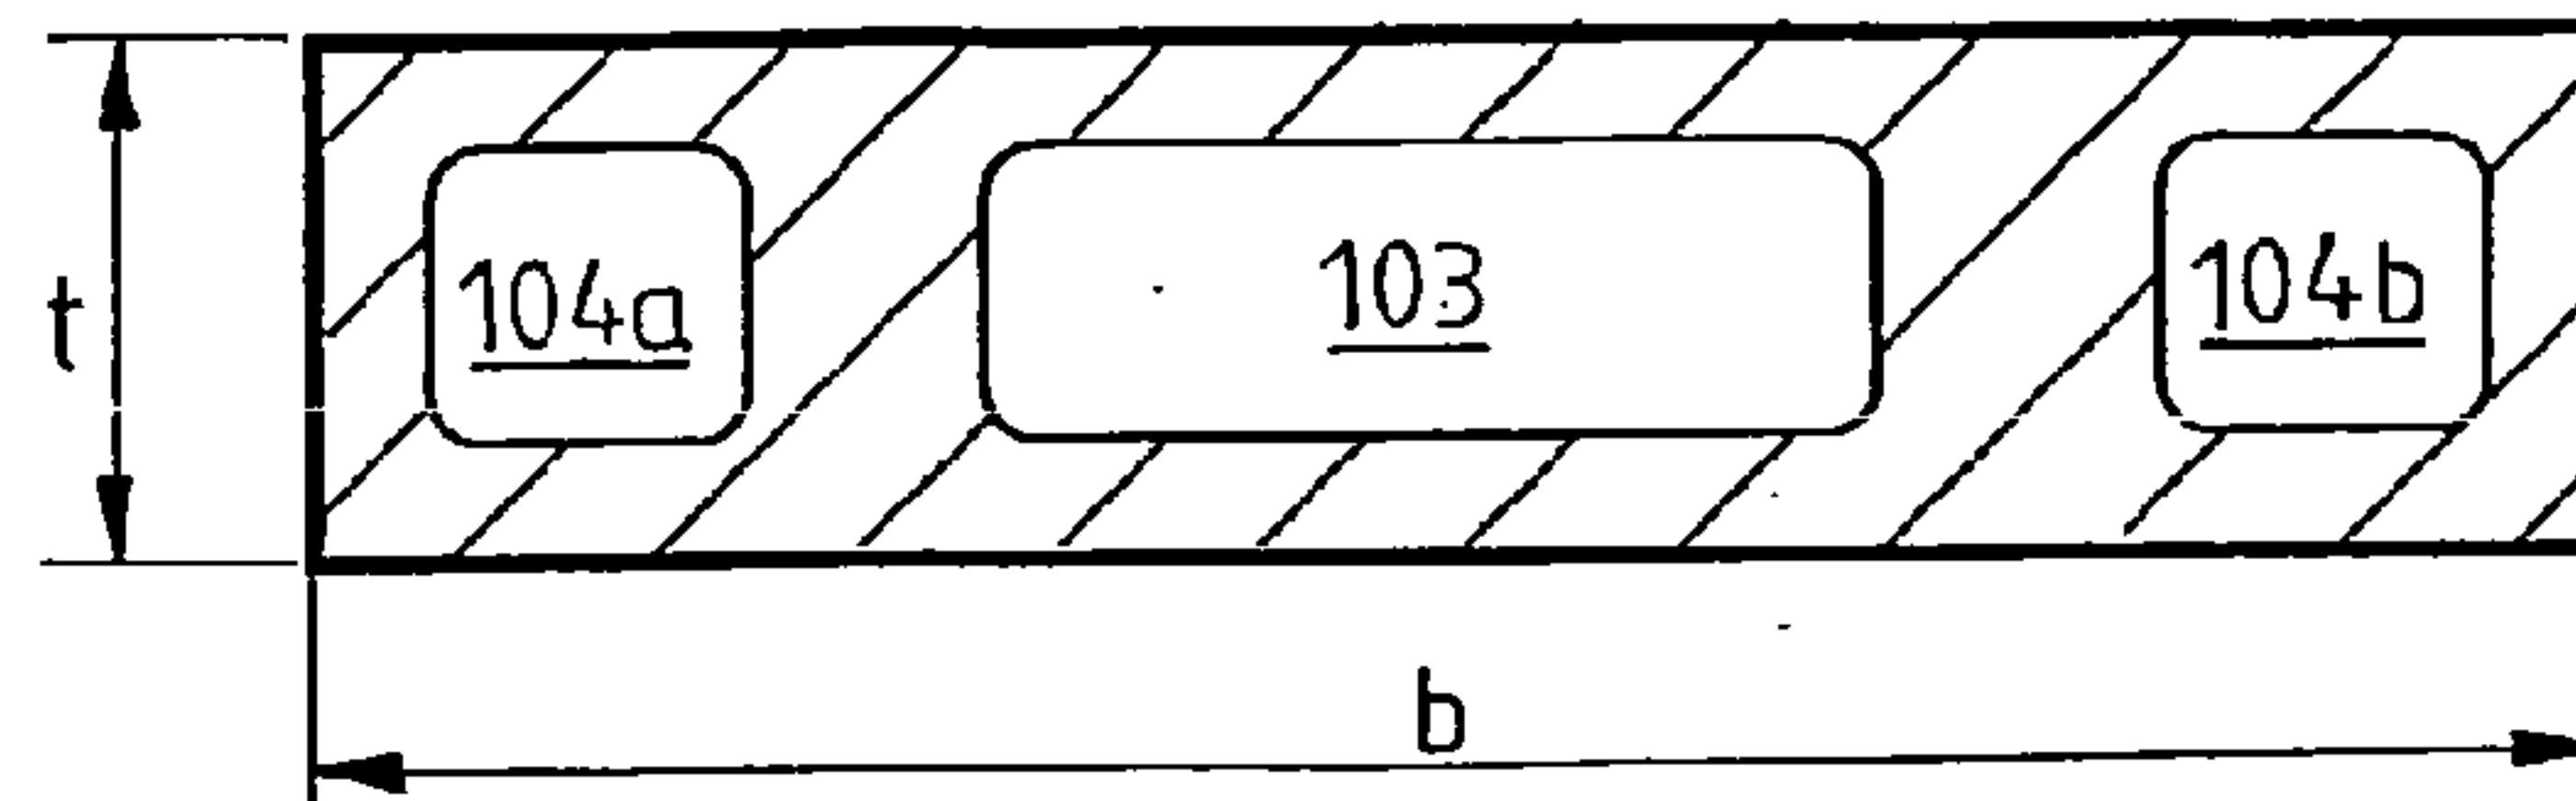


FIG 10

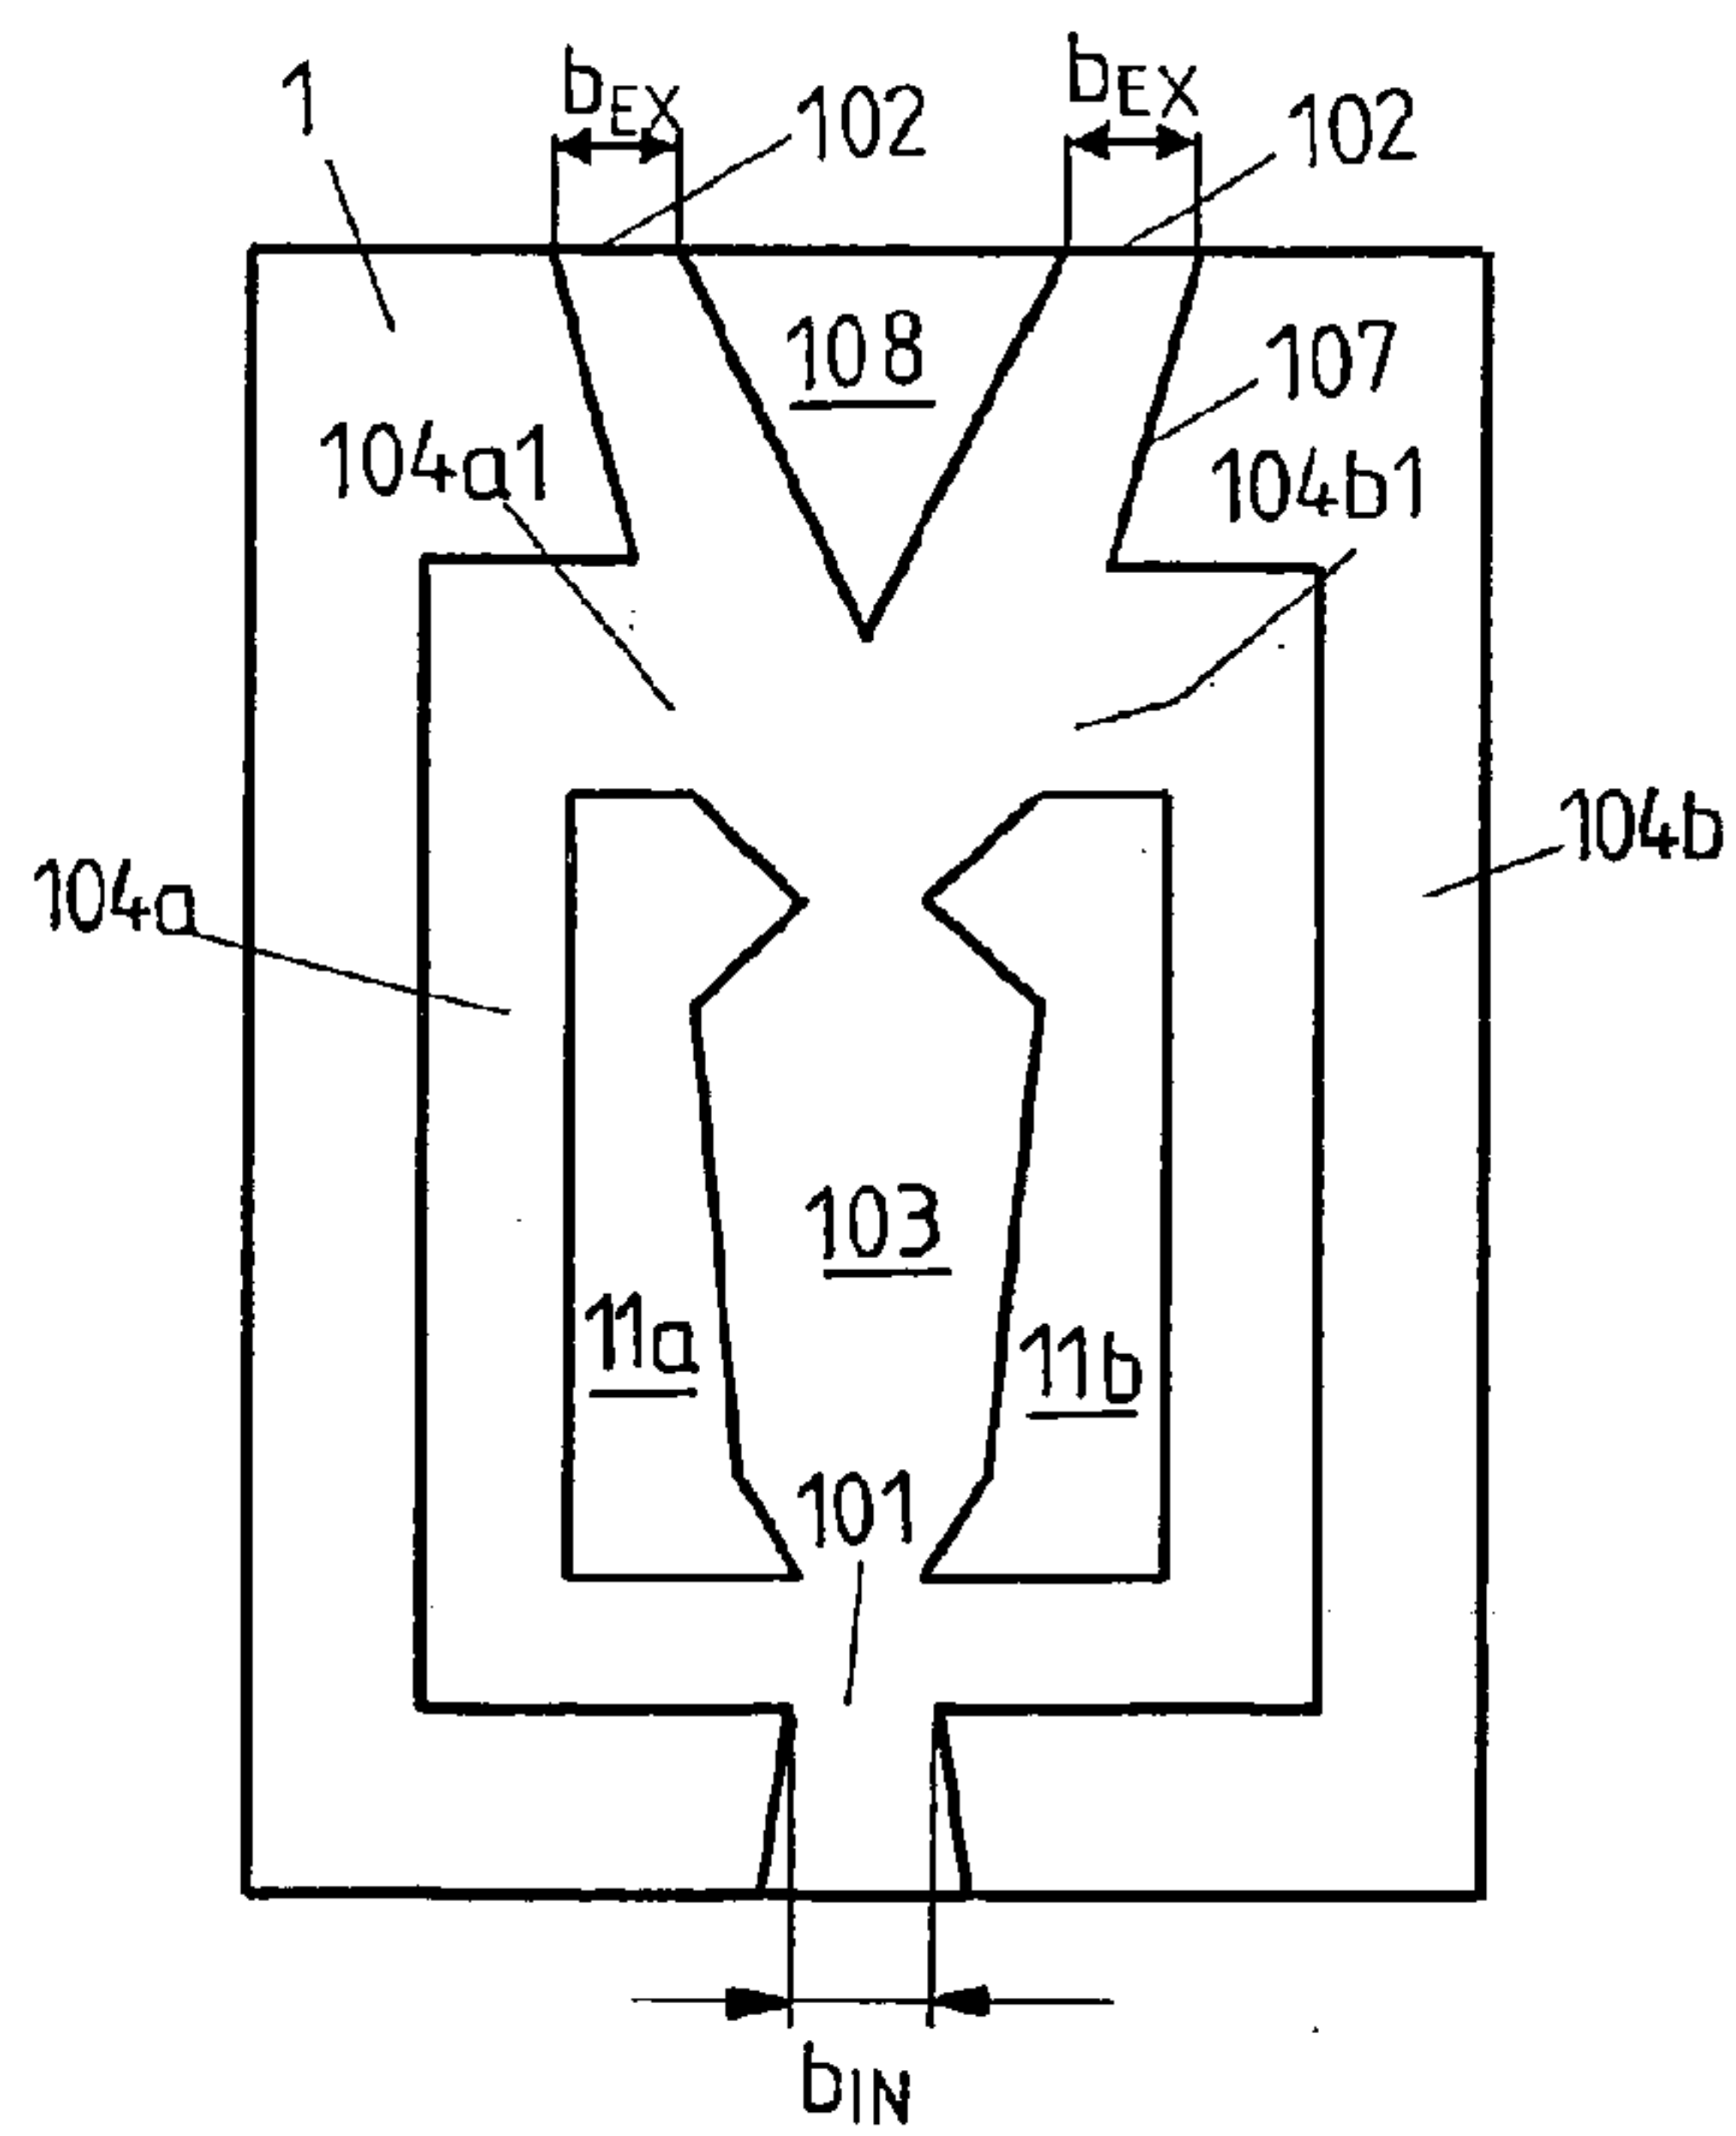


FIG 11

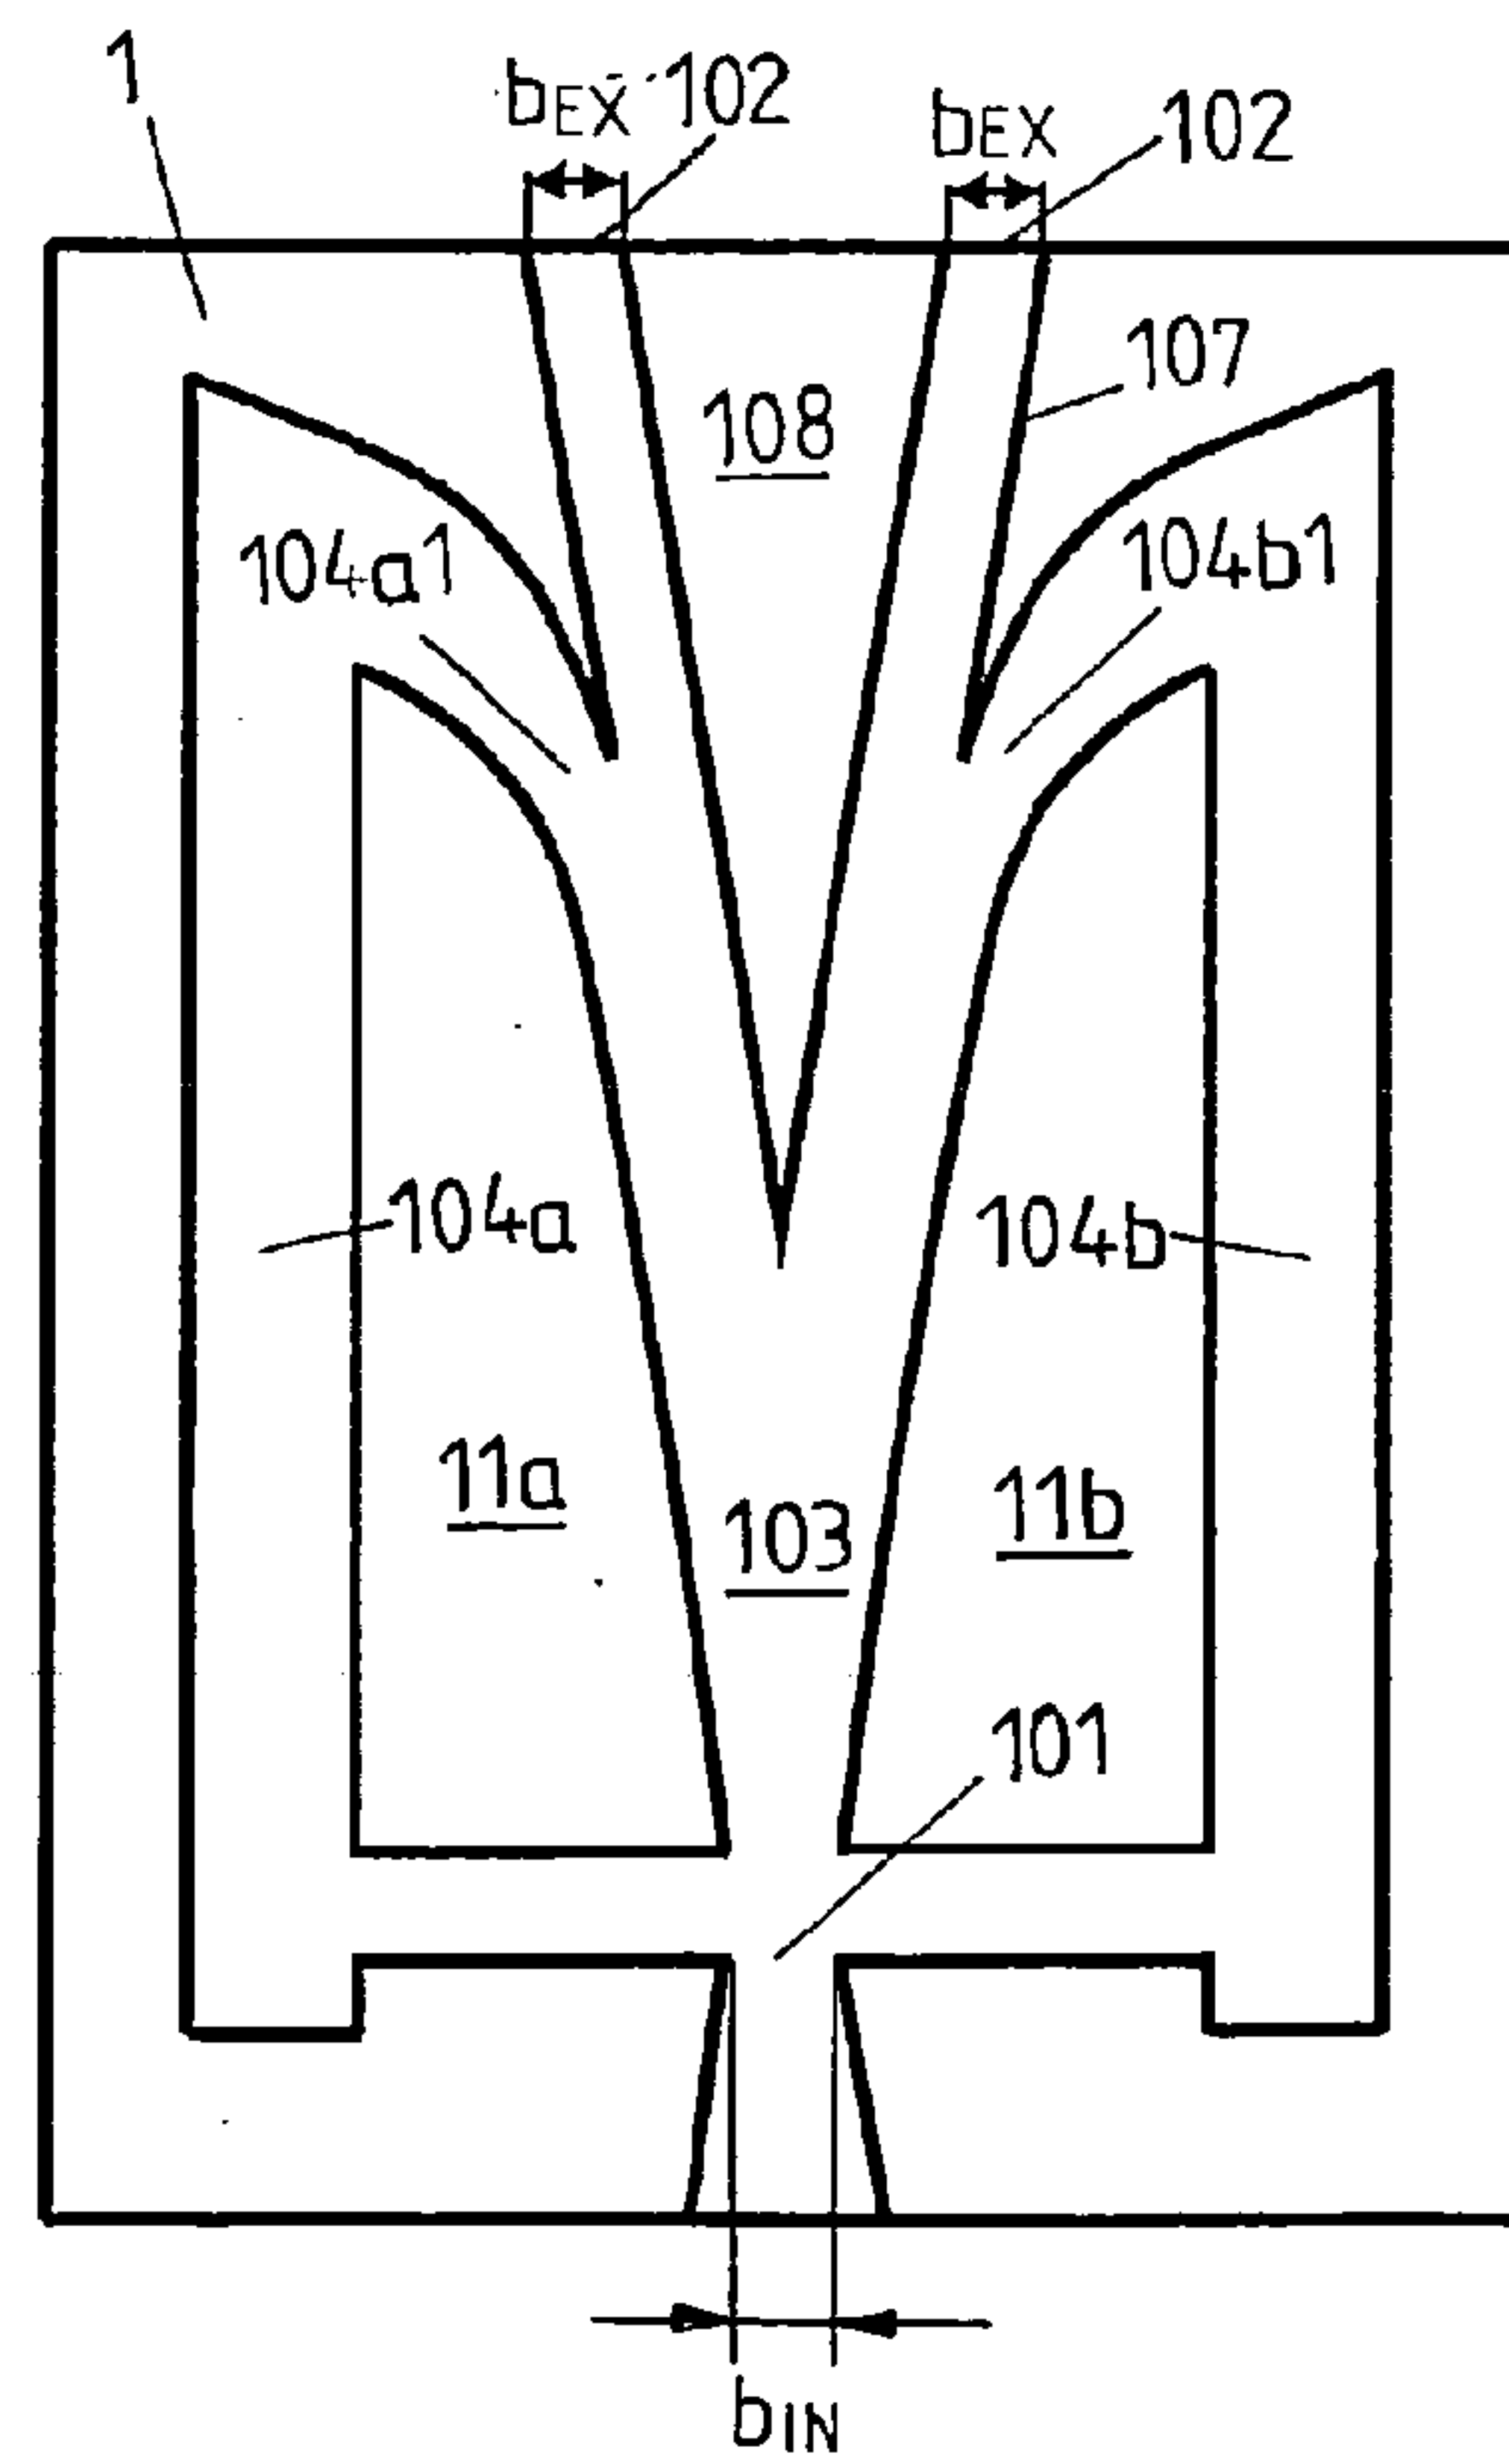


FIG 12



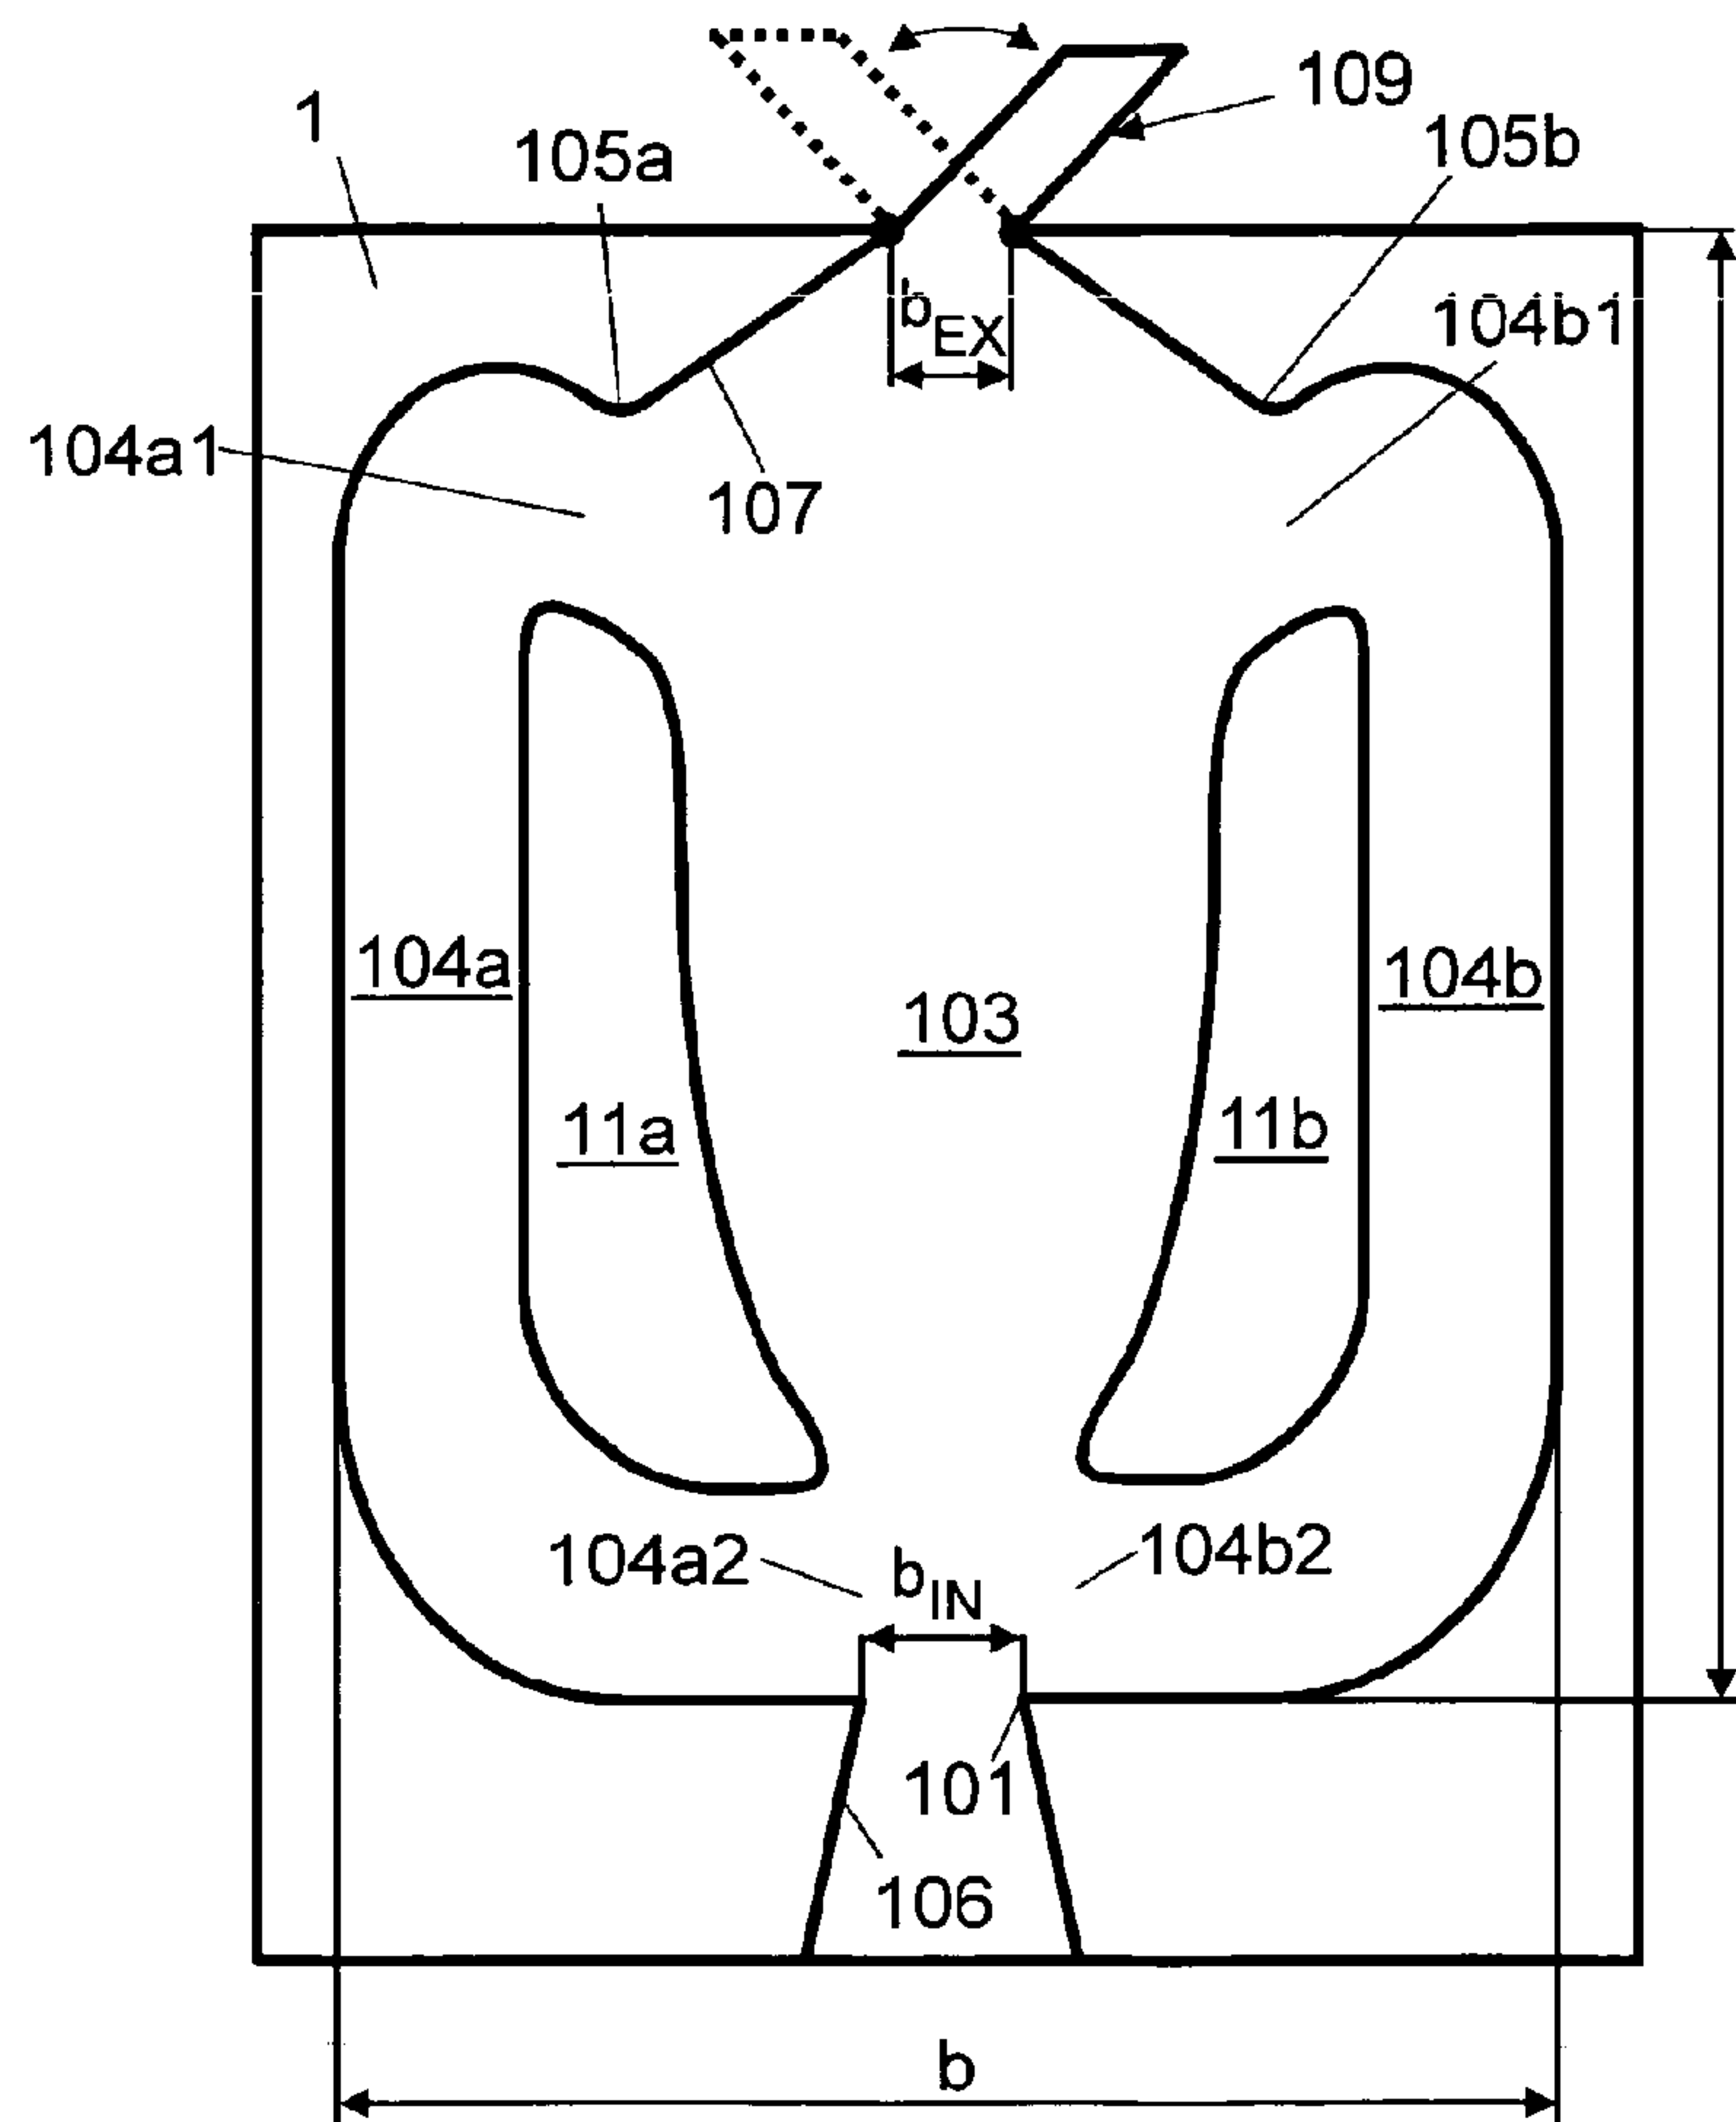


FIG 13

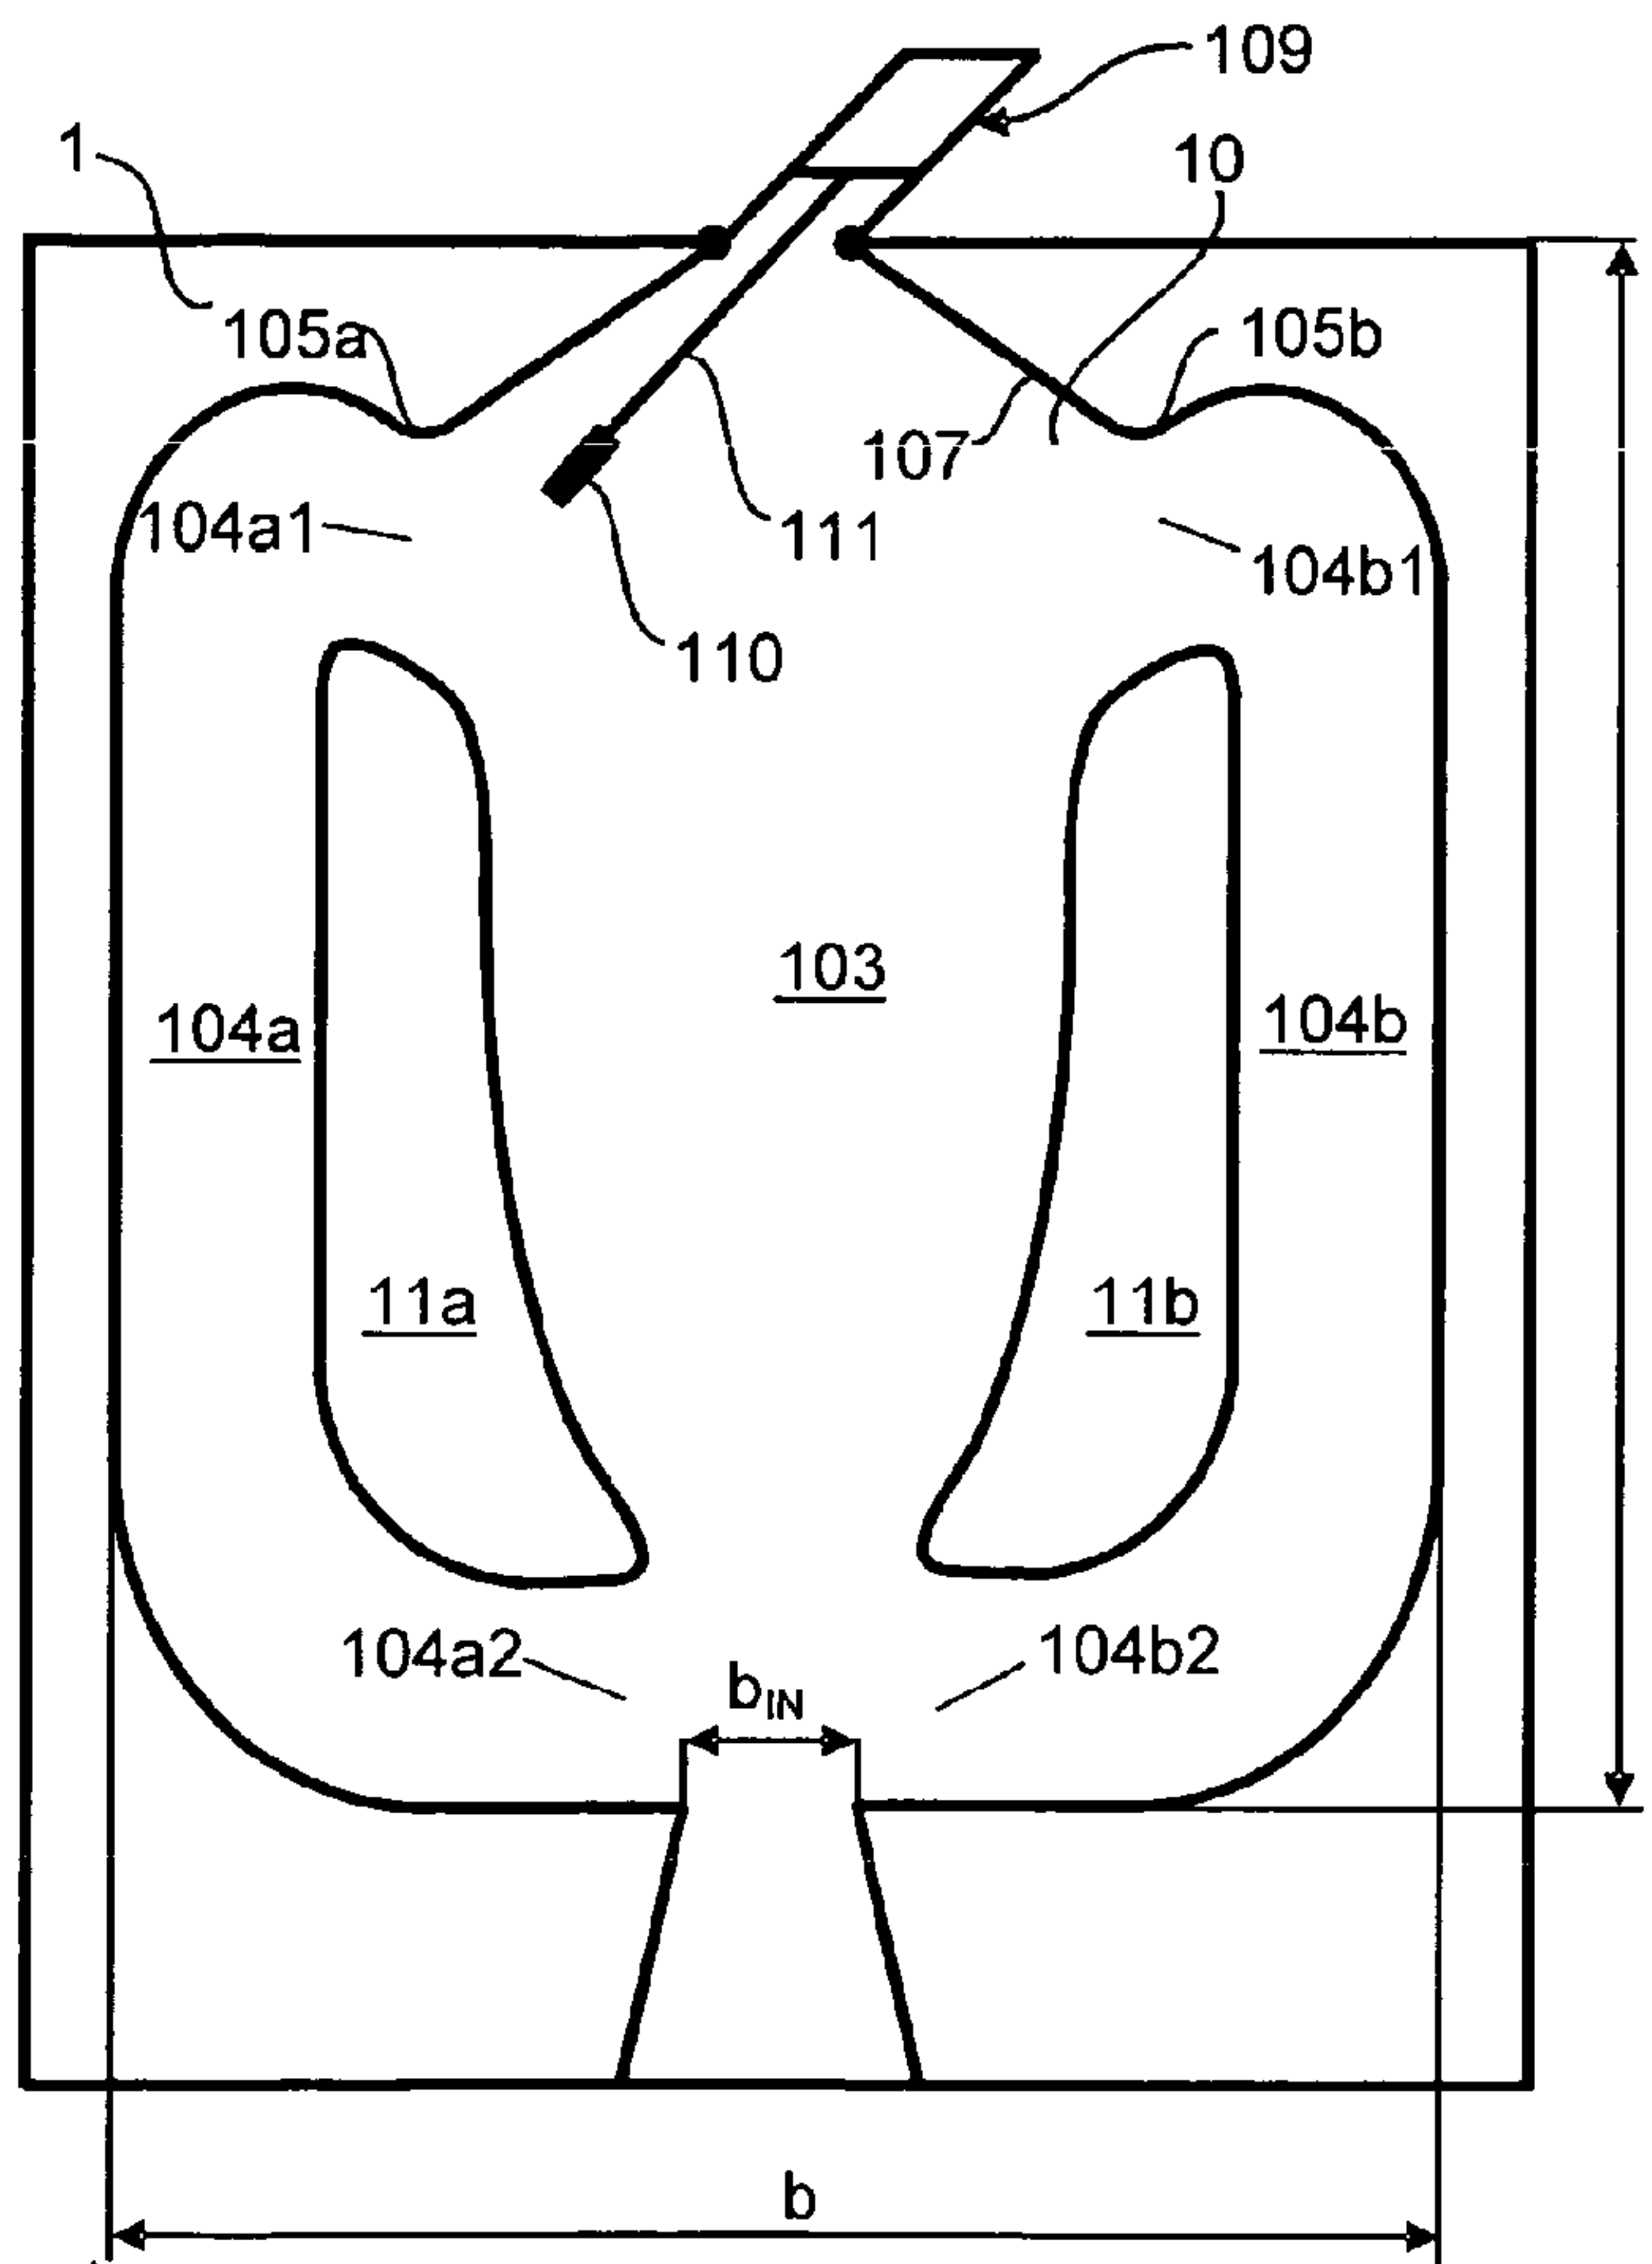

10

FIG 15

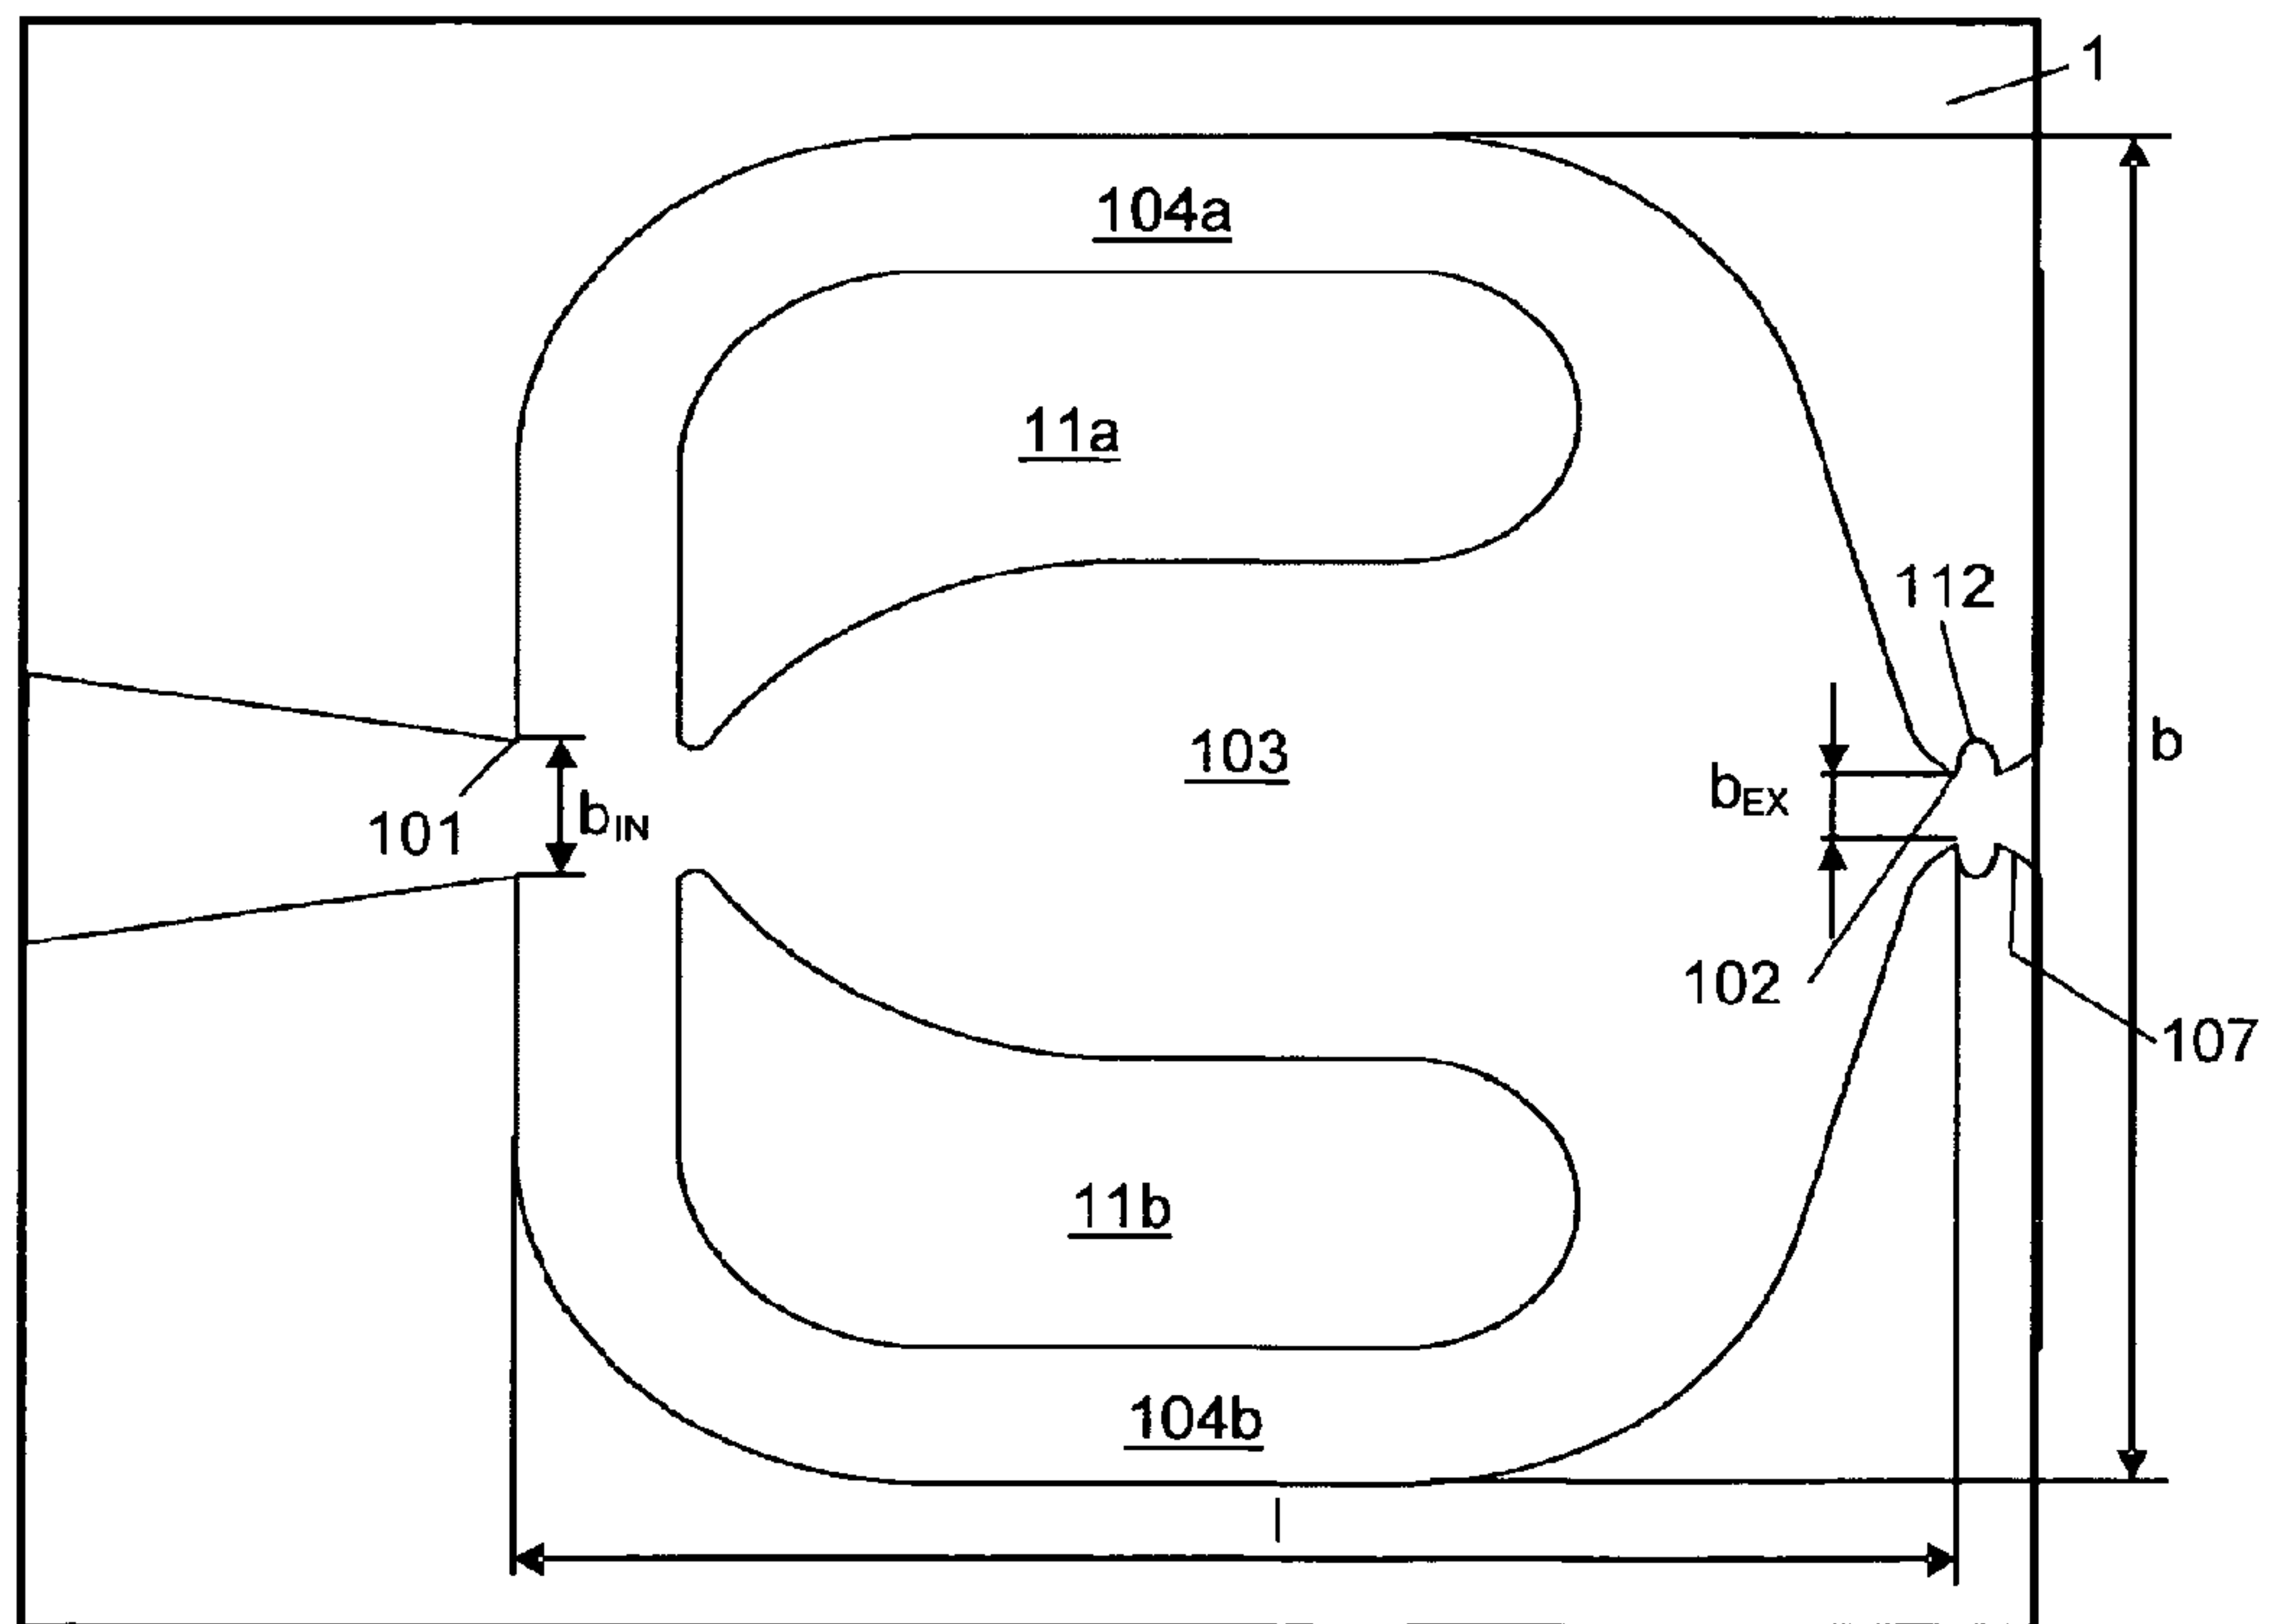

11

FIG 16

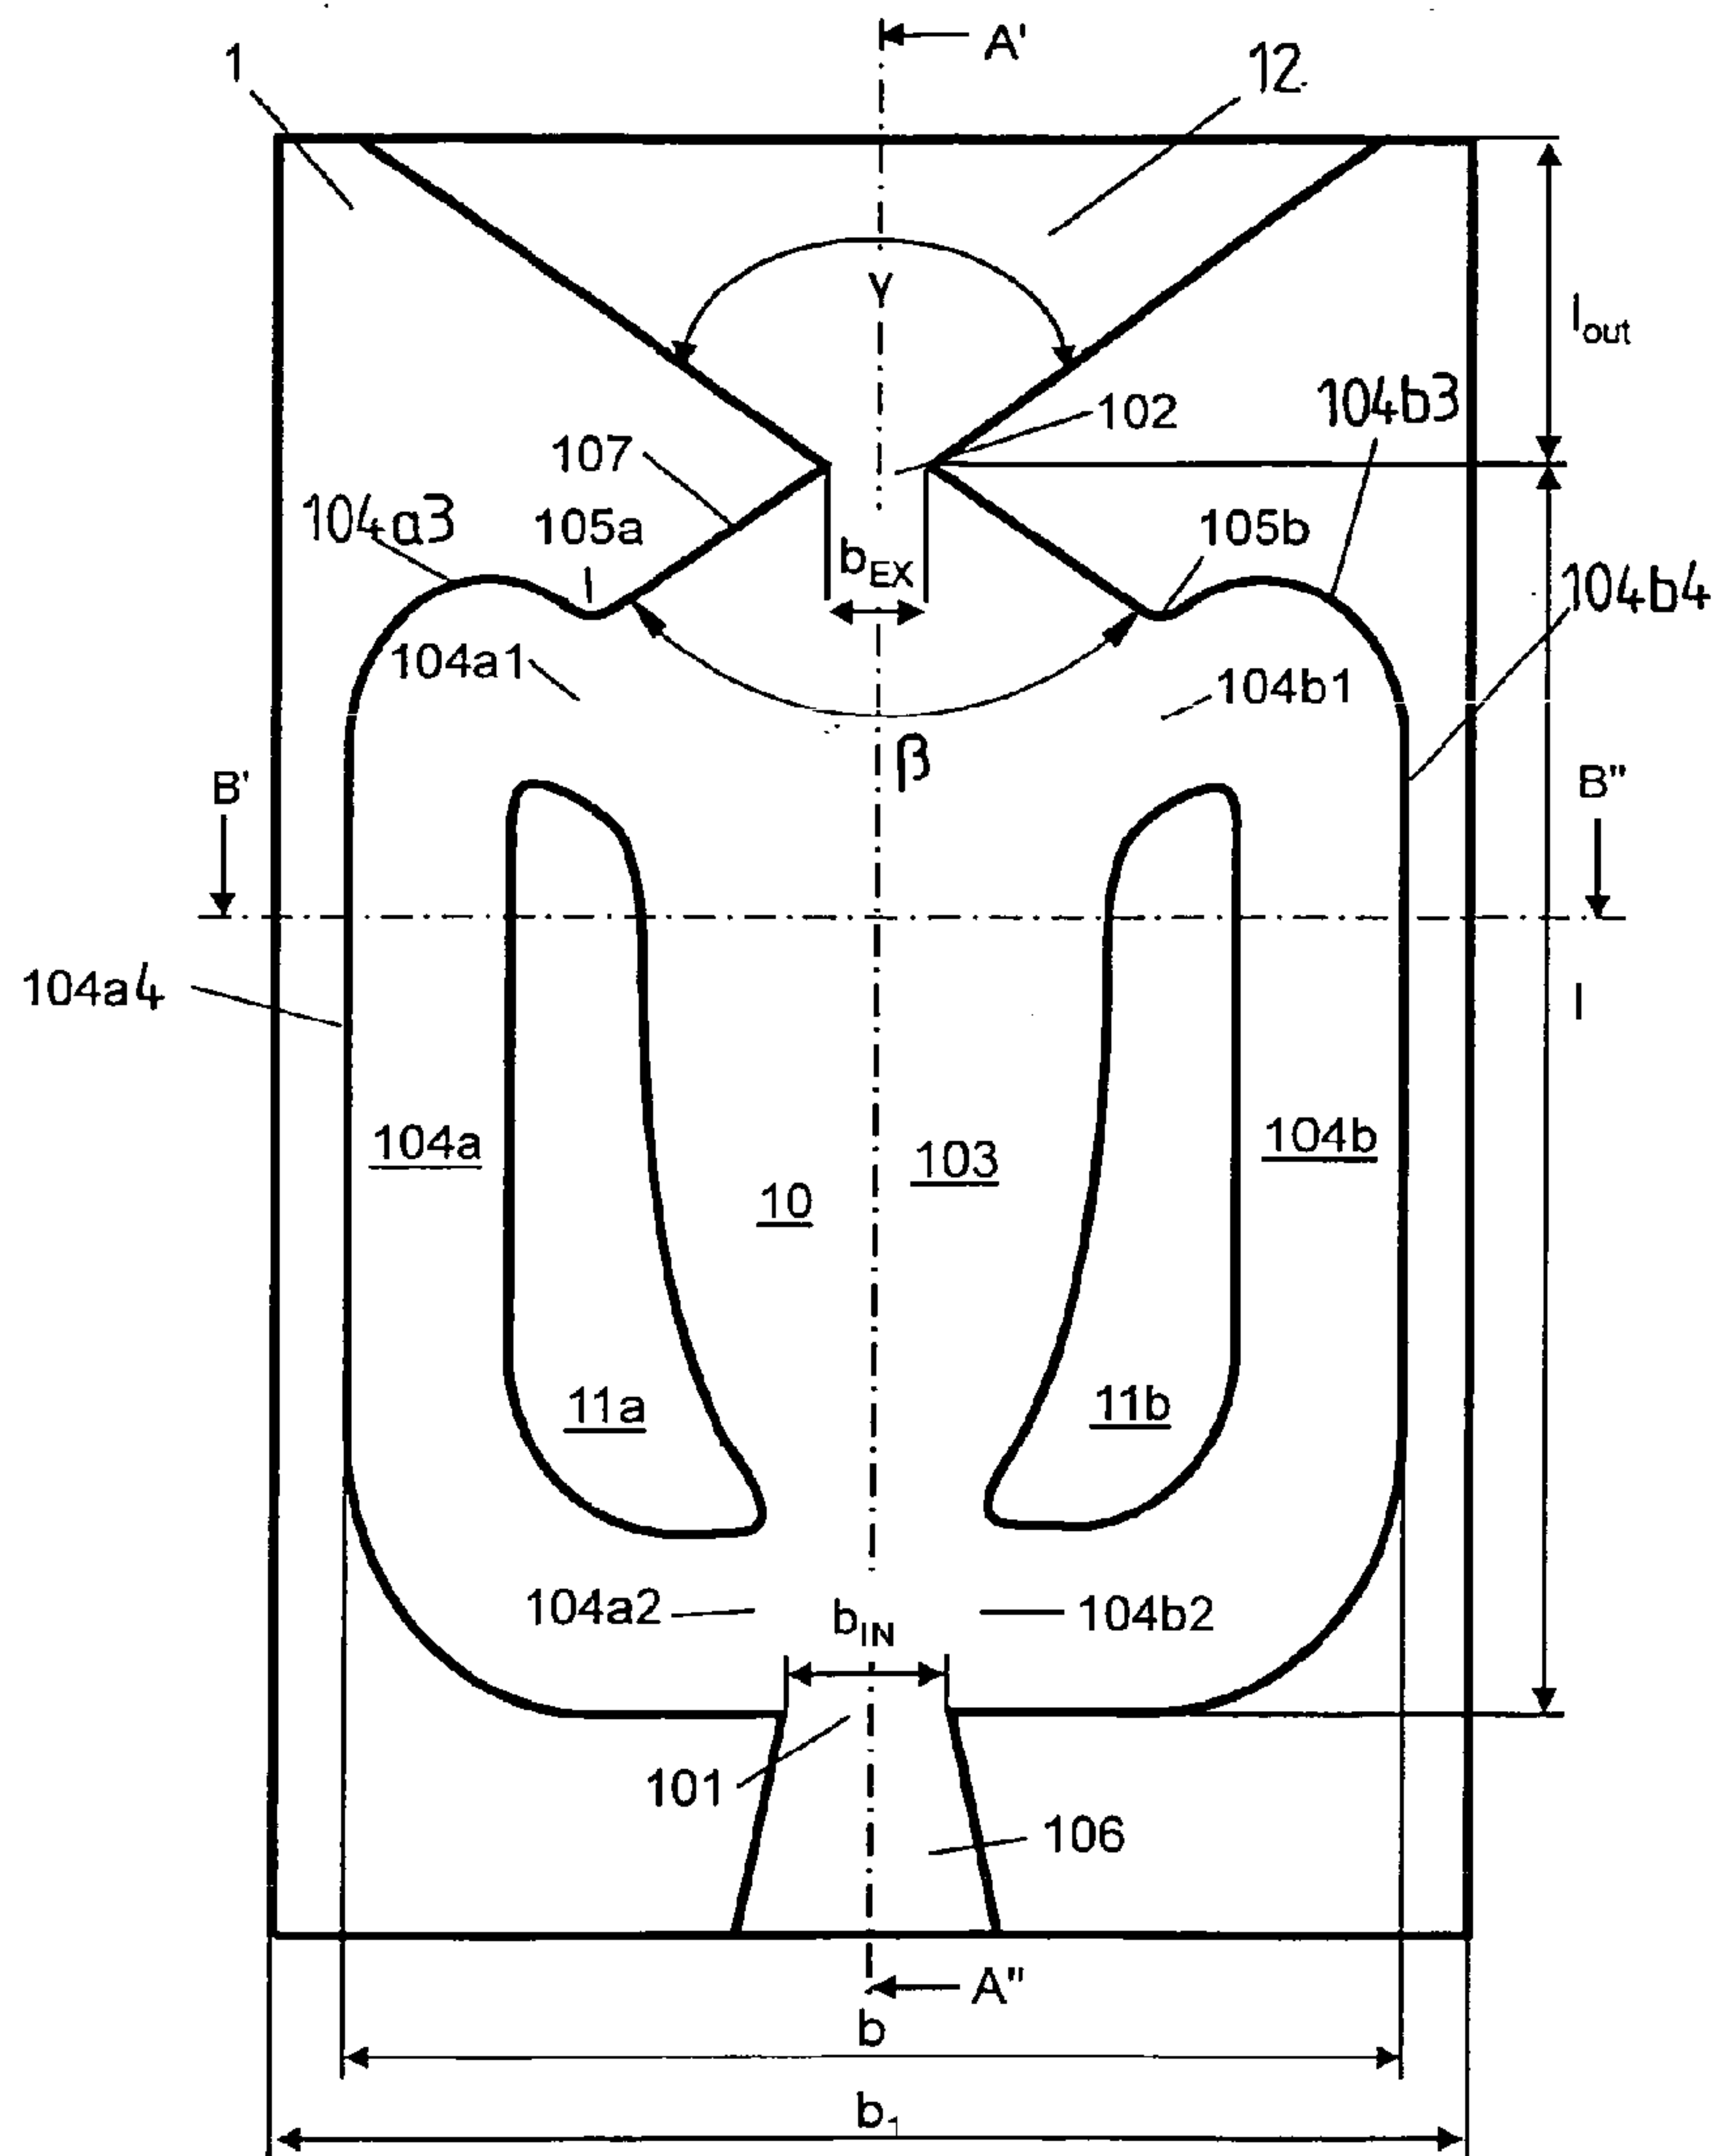


FIG 17


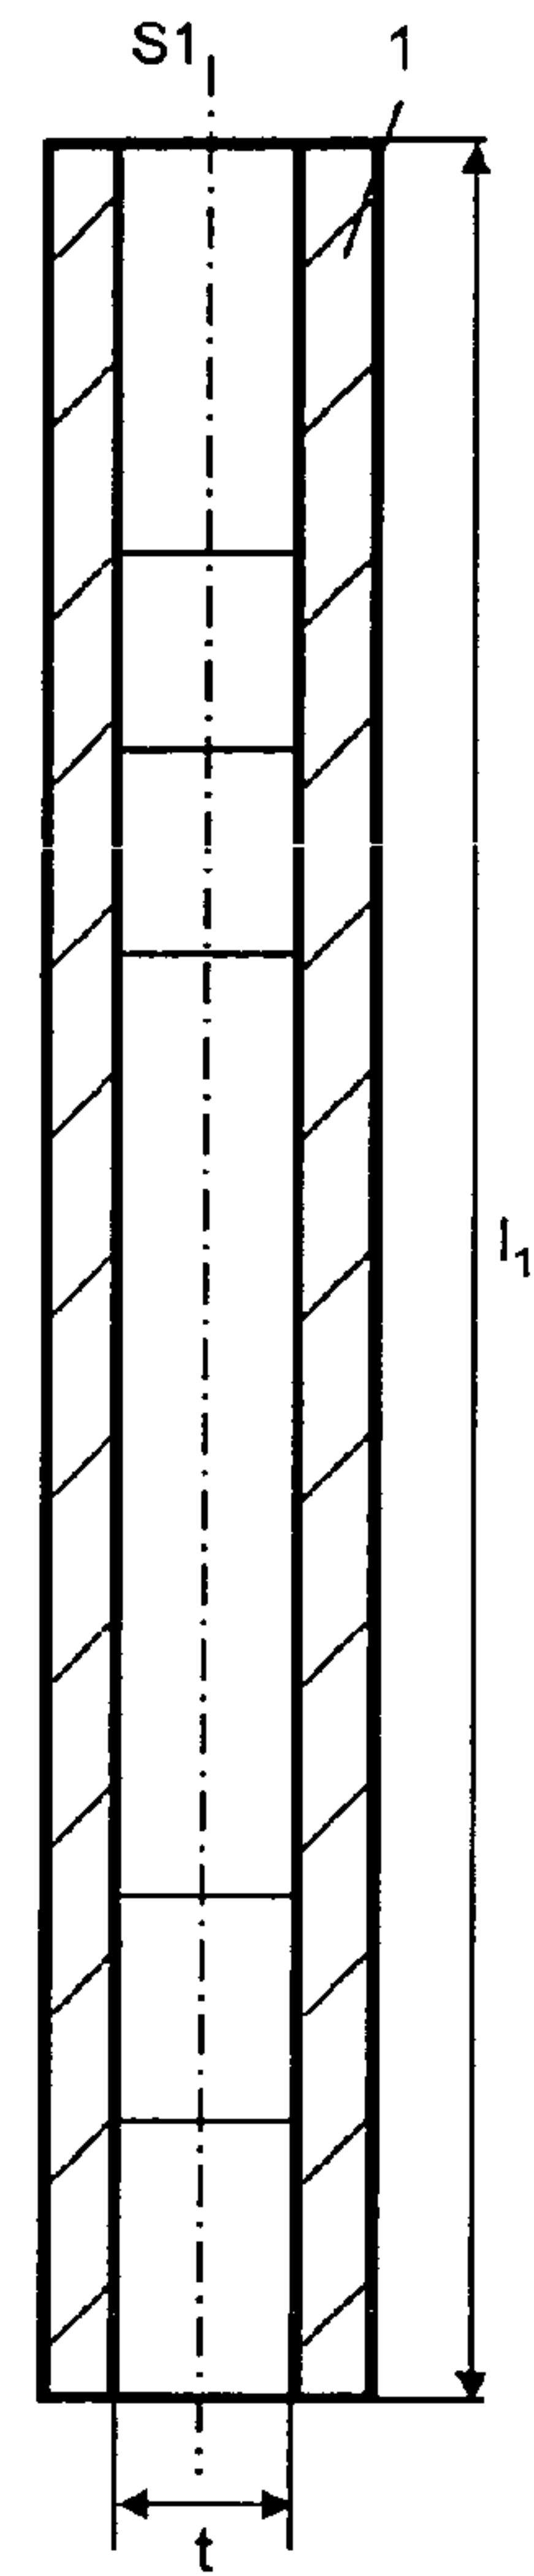


FIG 18



12

FIG 19

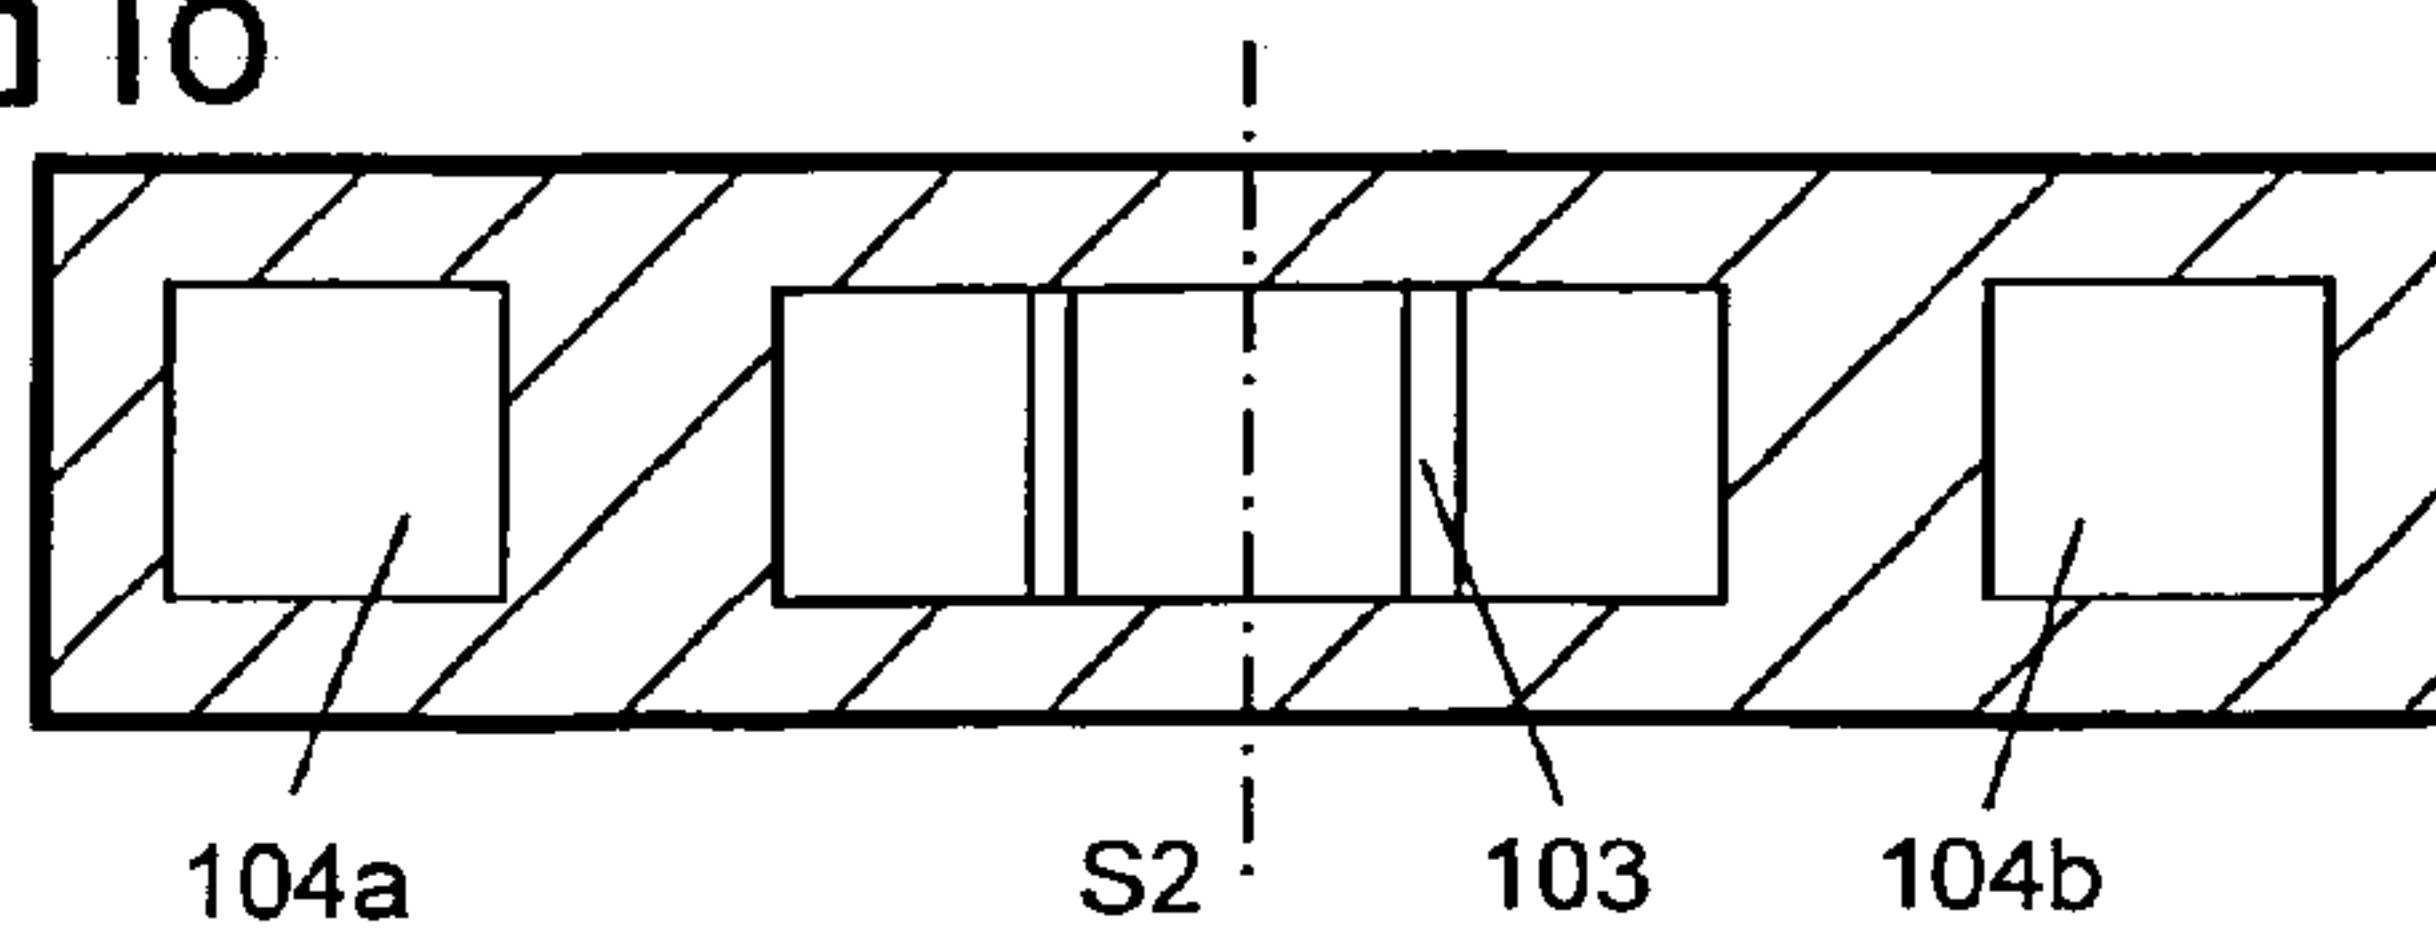