



(51) International Patent Classification:
A61F 13/15 (2006.01) A61F 13/56 (2006.01)

(21) International Application Number:
PCT/IB2011/050524

(22) International Filing Date:
8 February 2011 (08.02.2011)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
TO2010A000113 16 February 2010 (16.02.2010) IT

(71) Applicant (for all designated States except US):
FAMECCANICA.DATA S.P.A. [IT/IT]; Via Alessandro Volta, 10, I-65129 Pescara (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SABLONE, Gabriele
[IT/IT]; Via Sagittario, 6, I-66015 Montesilvano
(Pescara) (IT).


(74) Agent: BOSOTTI, Luciano; Buzzi, Notaro & Antonielli
d'Oulx S.r.l., Via Maria Vittoria 18, I-10123 Torino (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: PROCESS FOR PRODUCING SANITARY ARTICLES THAT CAN BE WORN AS A PAIR OF PANTS, AND CORRESPONDING ARTICLE

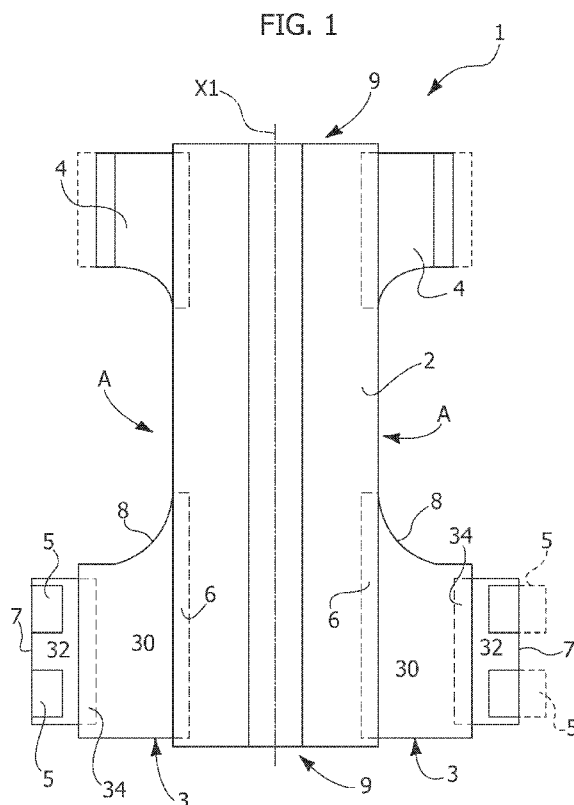

(57) Abstract: Sanitary articles (1) that can be worn as a pair of pants, said articles (1) comprising a central body (2), which can be set around the crotch region of the user, said central body (2) extending in a longitudinal direction (X1) between two opposite ends, and at least one pair of side panels (3), which are connected to one of the ends of the central body (2) and extend on opposite sides of said central body (2) to define at least in part the waistband of the article (1). The side panels (3) are connected to the central body (2) whilst they are in a folded condition. The aforesaid panels are preferentially obtained in a folded condition, with the distal edge (7) set in the proximity of the proximal edge (6).



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, —
GW, ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

"Process for producing sanitary articles that can be worn as a pair of pants, and corresponding article"

TEXT OF THE DESCRIPTION

5 Field of the invention

The present description relates to the production of sanitary articles that can be worn as a pair of pants.

10 In particular, the description relates to the production of sanitary articles comprising a central body, connected to which is, at one end at least, a pair of side panels.

Description of the prior art

15 Documents such as, for example, EP-A-1 941 853 describe processes for manufacturing sanitary articles that can be worn as a pair of pants and comprise:

20 - a central body, which can be set around the crotch region of the user, said central body extending in a longitudinal direction between two opposite ends; and

25 - at least one pair (and possibly two pairs) of side panels connected to one (and possibly to each) of the ends of said central body and extending on opposite sides of said central body to define at least in part the waistband of the article.

Said sanitary articles can be absorbent products that comprise, set in the central body, an absorbent element (core).

30 The side panels can also comprise an elasticated material, which is quite costly (or in any case of high quality) and of which it is in the interest of the manufacturer to minimize the waste.

35 The sanitary articles in question are designed both for use by newborn babies and small children, and - to an ever-increasing extent - for use by incontinent

adults.

In the context of use cited last, the requirements of production of so-called "bariatric" sanitary articles, i.e., ones designed for obese adults, are
5 assuming increasing importance. In these cases, the articles are of considerable size: for instance, a central body of approximately one metre in length and approximately 90 cm in width, so as to reach
10 circumferences of the waistband of the finished article even in the region of 180 cm.

In the production and packaging of articles such as ones designed for adults, the dimensions of the articles are such as to render critical execution of various operations of manipulation, for instance,
15 application and folding of the side panels.

In addition to this, given the same geometry of the article, the possible waste of material is proportional to the dimensions of the article itself; consider, by way of example, the waste that may derive
20 from the operation of cutting of the openings for passage of the user's legs: waste that is tolerable in articles of small dimensions may no longer be tolerable in articles of large dimensions, where the overall amount of material discarded can become significant and
25 no longer acceptable in the case of costly or in any case high-quality materials.

The considerations set forth above must also be weighed in the light of the very high production rates (hundreds of articles per minute) that it is in any
30 case desired to maintain.

Also at the level of the article in itself, in the case of articles of small dimensions, adaptation to the size of the user can be achieved with modest dimensional adjustments (for example, at the level of a
35 slight variation of the position of fixing of the

closing formations); in the case of articles of large dimensions, adaptation to the size of the user can instead require much larger dimensional adjustments (for example, at the level of variation of several
5 centimetres), with the dual requirement of:

- on the one hand, making available, for instance, in the side panels, material such as to render optionally larger the article worn; and
- on the other hand, preventing, in an article
10 worn that is more adherent, the possibility of there remaining tabs, creases, folds, etc. such as to prove bothersome for the person wearing the article.

Object and summary of the invention

The object of the present invention is to provide
15 a solution that will be able to overcome the critical aspects outlined above.

According to the invention, said object is achieved thanks to a process having the characteristics recalled in the ensuing claims.

20 The invention also regards an article that can be obtained following the aforesaid process.

The claims form an integral part of the technical teaching provided herein in relation to the invention.

Various embodiments apply not only to articles for
25 incontinent adults, to which explicit reference has been made previously, but also to articles for newborn babies and small children.

Various embodiments envisage connecting the side panels to the central body of the article with the side
30 panels in a folded condition.

Various embodiments envisage formation of the side panels in a folded condition.

In various embodiments, in the aforesaid folded condition the side panels have their distal edge
35 situated in the proximity of the proximal edge.

Brief description of the annexed drawings

The invention will now be described purely by way of non-limiting example, with reference to the annexed drawings, in which:

- 5 - Figures 1 and 2 illustrate an example of sanitary article according to one embodiment, represented in an unfolded position and stretched out;
- Figures 3 and 4 illustrate successive steps of a process according to one embodiment;
- 10 - Figures 5 to 12 further illustrate the execution of various steps of a process according to one embodiment; and
- Figure 13 illustrates an example of sanitary article according to one embodiment, represented in a closed position.

Detailed description of embodiments

15 Illustrated in the ensuing description are various specific details aimed at an in-depth understanding of the embodiments. The embodiments can be produced without one or more of the specific details, or with other methods, components, materials, etc. In other cases, known structures, materials or operations are not illustrated or described in detail herein so as not to render various aspects of the embodiments obscure.

25 The reference to "an embodiment" or "one embodiment" in the framework of the present description is intended to indicate that a particular configuration, structure, or characteristic described in relation to the embodiment is comprised in at least one embodiment. Hence, phrases such as "in an embodiment" or "in one embodiment" that may be present in different points of the present description, do not necessarily refer to one and the same embodiment. Furthermore, particular conformations, structures, or characteristics can be adequately combined in one or

more embodiments.

The references used herein are provided merely for convenience and hence do not define the sphere of protection or the scope of the embodiments.

5 In particular, as used herein, expressions such as "connect, connected" refer to the joining, connection, attachment, sealing, etc. of two elements. Two elements are herein considered connected together when they are joined together directly or indirectly in a permanent
10 way, as in the case where each element is directly connected to intermediate elements.

Figure 1 of the annexed drawings is a schematic representation of a sanitary article 1 that can be worn as a pair of pants. By way of reference, and without
15 any intention of limiting the possible sphere of application, the article 1 can be an absorbent article for incontinent adults.

The article 1 is represented herein in a condition where it is unfolded and stretched out in a plane and,
20 according to a general configuration in itself known, comprises:

- a central body 2 (which, as will emerge more clearly in what follows, can be constituted by a topsheet permeable to liquids and by an impermeable
25 backsheet, which are joined together with interposition of an absorbent structure), which can be set according to a general concave conformation around the crotch region of the user: the central body 2 extends in a longitudinal direction (main longitudinal axis X1 of the article 1) between two opposite ends;

- two (first) side panels 3 extending laterally on opposite sides from one of the ends of the central body 2; and

- two (second) side panels 4 extending laterally
35 on opposite sides from the other end of the central

body 2.

The side panels 3, 4 are connected to the central body 2 and are to define the waistband 9 of the article 1 when the latter is worn as a pair of pants, as may be appreciated more fully from Figure 13.

In various embodiments the main body 2 can comprise:

- a so-called topsheet permeable to body fluids, which is to come into contact with the body of the user;
- a so-called backsheet, which is to be positioned towards the outside of the article, i.e., in contact with the garments of the user; and
- an element of absorbent material (core) set between the topsheet and the backsheet, which can be connected to one another with adhesive.

The article 1 can be worn with the main body or central body 2 wrapped to form a U around the crotch region of the user, with the end from which the side panels 4 extend situated on the front of the user and the end from which the side panels 3 extend set in a position corresponding to the small of the back of the user.

The side panels 3 can then extend on the sides of the user so as to be connectable, for example, via adhesive formations 5 or hook-and-loop formations (commonly referred to as "Velcro") to the side panels 4.

In various embodiments, the side panels 4 may be absent, and in this case the side panels 3 are connected directly to the front end of the central body 2.

Again, the relative position of the side panels 3 and of the side panels 4 can be reversed and, in this perspective, the terms "front" and "rear" are used

herein only to distinguish the two pairs of side panels 3, 4 (if both are present), without this being understood as in any way limiting the modalities with which the article 1 is worn.

5 As has already been said, the side panels 4 may even be absent, in which case the distal edges of the side panels 3 are to be connected to the end of the central body 2 opposite thereto and, even though this solution is seldom adopted, the side panels 3 could be
10 localized at the end of the central body that is to be set on the front of the user.

 Furthermore, in the case of sanitary articles of the pre-fastened type it is envisaged that the article 1 is packaged and made available to the user in a
15 closed condition, i.e., with the side panels 3 (and 4, if present) already connected along the waistband of the article 1 according to the same arrangement illustrated in Figure 13.

 In the same way, as is well known to persons
20 skilled in the sector, in addition to the aforesaid elements explicitly indicated herein, the article 1 can comprise numerous accessory elements, such as elastics elements, layers for acquisition of body fluids (the so-called "acquisition layers"), lateral
25 formations for containing faeces (the so-called "cuffs"), etc. This applies also as regards the details of embodiment of the topsheet, of the backsheet, and of the absorbent core, which can be produced according to a practically infinite range of possible embodiments
30 amply documented in the literature, including patent literature.

 As has already been said, the connection
 formations 5 can be of an adhesive type or else
 produced so as to make a microhook or hook-and-loop
35 (Velcro) connection with the panels 4 (or with the

central body 2, in the absence of the panels 4) whether on account of the presence of complementary formations (not illustrated) on the panels 4 or on the surface of the body 2 or simply by exploiting, for the purposes of the microhook connection, the loop formations constituted by fibres provided by the outer layer of the panels 4 or else of the body 2.

The sequel of the present description will for simplicity of exposition refer to connection formations constituted by systems of connection or "labels" of an adhesive type initially turned over towards the inside of the side panels and then designed during use to be unfolded outwards (see the representation with a dashed line in the right-hand part of Figure 1 or in Figure 2) so that they can be applied against the outer surface of the side panels 4 (if present) or on the surface of the opposite end of the central body 2.

It will be noted that the individual panels 3 (and 4, if present) are to be applied in pairs of "twin" elements connected to opposite sides of the main body 2 in a condition of specular symmetry with respect to the main longitudinal axis X1 of the article 1.

In various examples of embodiment considered herein, the panels 3 have a tapered conformation, of which the proximal edges 6 and distal edges 7 form, respectively, the major base and the minor base. In the example of embodiment considered herein, the aforesaid tapered conformation envisages the presence of:

- an "outer" side (i.e., facing the outside of the article 1) of the approximately rectilinear configuration, orthogonal to the longitudinal axis X1; and

- an "inner" side (which faces the inside of the article 1 and is hence to define part of the boundary of one of the openings A provided for passage of the

user's legs), which is also oriented in a direction as a whole transverse to the longitudinal axis X1 and comprises a curved proximal stretch 8 and a rectilinear distal stretch, which is orthogonal to the longitudinal axis X1.

In the example of embodiment considered herein, what has been said above applies substantially also to the side panels 4.

Possible other configurations of the panels 3 (and 4) can be inferred from EP-A-1 941 853 or from some of the documents cited in the corresponding research report.

Figure 2 illustrates in greater detail the structure of the side panels 3 according to various embodiments, in which each panel 3 comprises:

- an internal portion 30, connected to the central body 2 at the proximal edge 6; and
- an external portion 32, which carries the closing means 5 (adhesive formations, formations of a hook-and/or-loop type, etc.).

The internal portion 30 and the external portion 32 are connected together along an intermediate region 34 of the panel 3.

The internal portion 30 can be fixed to the central body 2 according to any of the techniques commonly used for fixing the side panels 3 (or 4) to the central body 2 of an article 1 of the type considered herein.

For instance, in various embodiments, the proximal edge 6 of the internal region 30 can be set between the topsheet and the backsheet of the central body 2 and fixed thereto with different techniques, such as gluing, heat-sealing, ultrasound sealing (possibly used in a combined way, for example, by gluing to either one between the backsheet and the topsheet and heat-sealing

or ultrasound sealing to the other between the backsheet and the topsheet).

Similar considerations apply to the connection of the internal portion 30 and of the external portion 32 in the region 34, which, as may be appreciated in the figures, has an elongated shape aligned to the direction of the main axis X1 of the article 1.

In various embodiments, the internal region 30 and the region 32 can differ from one another both as regards the shape and as regards the materials used for their production.

As regards the shape, in the example of embodiment considered herein, the external portion 32 has a rectangular shape, in which it is in general possible to distinguish two sides with rectilinear configuration, oriented in a direction orthogonal to the longitudinal axis X1, hence to the distal edge 7 of the panel 3, said sides being, respectively, external and internal if reference is made to the general arrangement with respect to the development of the article 1.

In various embodiments, the internal portion 30 has an outer side with respect to the article that has the rectilinear configuration substantially aligned to the outer side of the external portion 32, hence with orientation orthogonal to the longitudinal axis X1 and hence to the distal edge 7. The inner side 8 of the portion 30 (also in this case the terms "outer side" and "inner side" refer to the general arrangement with respect to the development of the article 1) has, instead, a curved configuration corresponding to the generically arched boundary that it is intended to impart on the openings A of the article 1 provided for the passage of the user's legs.

As regards the materials, in various embodiments

the internal region 30 can be produced with a nonwoven-fabric material of the type widely used in the manufacture of sanitary articles, and the outer region 32 can be made of a similar material.

5 In various embodiments, the outer region 32 can present characteristics of extensibility of an elastic type, being obtained, for instance, with the solution described in the document No. US-B-6 572 595 or the document No.US-B-6 994 761, so as to present also
10 characteristics of "breathability".

 The closing formations 5 can be connected to the external portion 32 of the panels 3 with different solutions in themselves known, for example, according to the characteristics of the formations 5 themselves.
15 For instance, in the case of formations in the form of adhesive labels, it is possible to resort to one of the numerous solutions documented in the literature, also at a patent level, for application of the adhesive closing formations of the most widely used sanitary
20 articles. In the case where the formations 5 are constituted by elements of a hook-and/or-loop type or a microhook closing type, it is possible to apply said formations on the panel 3 via adhesive.

 Figures 3 and 4 illustrate schematically the
25 layout of a production plant and consequently a possible sequence of operations of treatment to which it is possible to resort for producing an article 1 of the type illustrated in the figures. In this regard, it will be appreciated that the individual steps of
30 treatment and the corresponding equipment mentioned with reference to Figures 3 and 4 correspond to technical solutions to be deemed in themselves individually known, which renders superfluous any further detailed description thereof herein.

35 Figure 3 regards a sequence of operations to which

it is possible to resort in order to provide the external portions 32 of the panels 3.

In the diagram of Figure 3, the reference 100 designates as a whole a station in which applied on a web 320, for example, of nonwoven fabric, i.e., of an elasticated and/or "breathable" material, as described for instance, in the documents Nos. US-B-6 572 595 or US-B-6 994 761, already cited previously, are the closing formations 5 of the type already described previously (adhesive, microhook means, etc.).

The application of said formations 5 is made according to criteria in themselves known, which do not require any further detailed description herein. In the case where a (non-limiting) example of formations 5 in the form of adhesive formations is considered, said formations can be applied on the opposite sides of the web 320 that advances along an axis X320 via two stations of application 1002 (for example, of the "cut & slip" type), which receive web material T1, T2 constituting the formations 5 from supply reels (not visible in the drawings), apply adhesive thereon, and segment the aforesaid web material to form the individual formations, which are then applied aligned to one another (or staggered) with a desired application pitch on opposite sides of the web 320. Said application pitch is chosen, for instance, according to the fact that in an article 1 of quite considerable dimensions, on the distal edge 7 of the side panels 3, there can be applied not just one but a number of closing formations 5 (for example, two in number in the example illustrated herein).

It will be appreciated that, even though they are represented staggered in the left-hand part of Figure 3, the two stations 1002 can be in effect set in pairs in positions specularly symmetrical with respect to the

central axis X320 of the web 320.

Downstream of the stations 1002, the web 320 that has received the formations 5 advances towards a folding device 1004, which completes the operation of application of the formations 5 by re-folding the formations 5 themselves according to a general V-shaped configuration so as to bring them to embrace the opposite sides of the web 320. This is the folded condition starting from which the formations 5 can then be unfolded (see the representation with a dashed line, for example, in Figures 1 and 2) to perform their function. The connection of the formations 5 on the opposite sides of the web 320 is then reinforced by an operation of pressing performed in a pressing station 1006.

It will be appreciated that Figures 3 to 11 attached hereto refer to an example of a sequence of operations that are to be performed in a condition of substantial symmetry so as to generate and apply simultaneously on opposite sides of the central body 2 two side panels 3 (and two side panels 4). This solution presents characteristics of evident functionality from the standpoint of implementation but must not on the other hand be considered of an imperative nature, in the sense that all the operations described herein could in themselves be performed independently even on just one side of the panel of the central body 2.

Once again it is recalled that the modalities of formation and application of the closing formations 5 on the outer parts 32 of the side panels 3 are in general dictated by the characteristics of the closing formations used. For instance, in the case where the closing formations 5 are formations of a hook-and/or-loop type of a microhook closing means, the station 100

will not comprise the folding device 1004 and may possibly do without even the pressing unit 1006.

Located downstream of the station for application of the closing formations 5 (station designated as a whole by 100 and comprising the devices designated by 1002, 1004 and 1006) is a folding device 200 (of a known type), the function of which is that of imparting on the web 320 that continues to advance along the axis X320 a general C-shaped configuration such as to bring the external edges of the web 320 with the closing formations 5 applied thereon to be turned over in 321 (Figure 6) according to a general V-shaped configuration towards the median axis X320 of the web 320. This folded configuration is maintained subsequently by the web 320 and by the external portions 32 that are to be obtained therefrom according to the modalities described more clearly in what follows.

Downstream of the folding device 200 a unit 202 can be set with the function of providing between each of the external edges of the web 320 folded in 321 towards the median axis X320 and the central part of the web 320 an action of sealing such as to cause the web 320 (and the portions 32 subsequently obtained therefrom) to maintain the same folded configuration subsequently.

For this purpose, the unit 202 can carry out (according to known criteria) a so-called "technical sealing" implemented, for instance, via a relatively bland action of heat-sealing or ultrasound sealing, or else via the application of a so-called "green" glue. Adhesives that are able to perform such a technical-sealing function are comprised, for example, in the production of the firm Savaré of Milan.

In the right-hand part of Figure 3, the reference

204 then designates a cutting unit (for example, a cutter with vertical blade - see the right-hand part of Figure 6), which, by operating along the axis X320 of the web 320, divides the aforesaid folded web C in the station 200 into two sub-webs, designated, respectively, by W1 and W2.

Each of the webs W1 and W2 is to give rise, according to the modalities described more fully in what follows, to the external portions 32 of the side panels 3 that are to be applied on one side of the central body 2.

Figure 4 is a schematic illustration of a sequence of operations that lead in the first place to the formation of the internal parts 30 of the side panels 3 (and, in the non-limiting example of embodiment illustrated herein, to the panels 4).

Starting from a web 300, for instance, of a material such as a nonwoven fabric, which advances along its longitudinal axis X300, in a folding station 400 a general C-shaped configuration is imparted on the web 300 by turning over the external edges of the web 300, towards the aforesaid axis X300 according to a general V-shaped configuration along folding lines 301 (see Figure 7).

In a station 402 substantially similar to the station 202, the C-shaped fold of the web 300 along the folding lines 301 is stabilised with a technical sealing (bland heat-sealing/ultrasound sealing or application of "green" glue) in such a way that the web 300 maintains the folded C-shaped configuration during the subsequent operations of treatment described in what follows.

The reference 500 designates an application station 500 (for example, of the cut-&-slip type), which, in addition to the web 300, receives also the

two webs W1 and W2, the formation of which has been previously described with reference to Figure 3 and to the sequence of Figures 5 and 6.

As schematically represented in Figure 8, the station 500 applies - on the side of the web 300 on which in 301 the external edges of the web itself are turned over - lengths of the two webs W1 and W2 oriented in such a way that the folding lines 321 formed in the unit 200 face the centre line (longitudinal axis) X300 of the web, whilst the "straight" (i.e., non-folded) edges of the two webs W1 and W2, corresponding to the action of cutting performed by the unit 204 at the axis X320, face the edges of the web 300 folded along the lines 301.

As more clearly illustrated in Figure 4, associated to the device 500 is a station for applying glue 501, which enables spreading of strips of adhesive on the webs W1 and W2 at the external edges of the webs W1 and W2, in other words at the edges generated by the action of cutting performed with the unit 204. This adhesive seals the external edges of the web 300 (folded along the line 301) to the "straight" edges of the lengths of web W1 and W2 so as to give rise to the regions of connection 34 that are to connect together the internal portion 30 and the external portion 32 of each side panel 3.

In various embodiments, the lengths of web W1 and W2 are applied not contiguous to one another, but leaving, instead, between two successive lengths (and this explains why in various embodiments the station 500 is a station of a cut-&-slip type, such as to enable relative sliding of the lengths of web W1 and W2 with respect to the web 300 that advances along the axis X300) a free stretch 304, which, as will be appreciated more fully in what follows, enables

production of the panels 4. Of course, in various
embodiments in which the panels 4 are not envisaged,
the application of the lengths of web W1 and W2 on the
web 300 can be made in positions that are even strictly
5 contiguous.

Downstream of the station 500 there may be present
a station 502 (once again, as in the case of the
stations 202 and 402, this may be a heat-
sealing/ultrasound-sealing station or a station for
10 application of "green" glue), which carries out a
technical sealing, establishing a connection between
the edges of the lengths of web W1, W2 folded along the
lines 321 with the central part of the web 300,
preventing undesirable accidental unfolding of the
15 ensemble just formed.

There is then present a further station for
longitudinal cutting 504, such as a cutter (at the top
of Figure 8), designed to act along the median
longitudinal axis X300 of the web 300 so as to divide
20 into two the web itself, on which the lengths of web W1
and W2 that define the external portions 32 of the side
panels are applied.

The two sub-webs thus formed are fed to a station
506, which is entrusted with a dual function:

25 - sectioning/segmentation into successive lengths
the two half-webs obtained from the web 300, which
carries applied thereon the external portions 32, with
a cutting station 509; and

- application of said lengths on the opposite
30 sides of the central body 2, according to the typical
modalities of manufacture of sanitary articles produced
in the form of a chain of articles that are to be
separated from one another with an operation of
longitudinal cutting implemented after completion of
35 the formation of the articles themselves, by means of

an operation of repitching performed with a repitching unit 510 and an operation of sealing to the central body 2 (or to a portion thereof) with a sealing unit 508.

5 The sequence of Figures 9 and 10 refers to the production of articles 1, in which (also) the side panels 4 are present.

Consequently, the segmentation of the (half)webs in question occurs according to lines of transverse
10 cutting a and b that are designed:

- in the case of the lines a, to separate a length of (half)web with an external length/portion 32 of panel 3 applied thereon from a stretch 304 of the same (half)web that has the original configuration in so far
15 as it is designed to form the side panels 4; and

- in the case of the lines b, to separate a stretch of (half)web that has the original configuration from a length of (half)web with an external length/portion 32 of panel 3 applied thereon.

20 In the case where the panels 4 are not envisaged, the operation of segmentation is performed between successive portions of (half)web, on which respective lengths of web W1 and W2 are applied, which form respective external portions 32.

25 In addition to the operation of segmentation of the web 300, within the station 506 there is performed also an operation of repitching of the lengths thus obtained such as to lead to the application on the central body 2 of the successive lengths of web applied
30 in conditions where they are set apart from one another.

In various embodiments, on each stretch of central body 2 that is to correspond to one of the articles 1 there can be applied, on each of the two sides of the
35 central body 2:

- a first length of (half)web 300, which corresponds to a stretch 304 and is to form one of the front panels 4; said length is applied at the stretch of the central body 2 that is to define one of the ends (for instance, the front end) of the article 1; and
- a second length of (half)web 300, which carries an external portion 32 applied thereon and is to form one of the rear panels 3; said length is applied at the stretch of the central body 2 that is to define the other end (for instance, the rear end) of the article 1.

In various embodiments, it is also possible to consider performing the operations of cutting along the lines a and b one after the other, performing first just one of said cutting operations (for example, the one along the line b) and applying, on each side of the central body 2, after repitching, hence with a pitch equal to the length of the articles 1 that it is desired to produce, lengths of web 30 comprising:

- a first part of length of (half)web 300, which carries an external portion 32 applied thereon and is to form one of the rear panels 3; and
- a second part of length of (half)web 300, which corresponds to a stretch 304 and is to form one of the front panels 4.

The next further cutting operation (with reference to the example considered herein, i.e., the one along the lines a), which can be obtained using the same blade that segments the individual articles 1 (final cutting), separates the two parts of length in question, thus separating, on each side of the central body 2, the rear panel 3 of a first article 1 and the front panel 4 of an adjacent article in the production line of the articles 1.

It will be appreciated that the sequence of

performance of the cutting operations (first line b and then line a, or else first line a and then line b) depends upon whether it is desired to come out with the individual articles 1 from the production line with the panels 4 before the panels 3 or else with the panels 3 before the panels 4.

Whatever the embodiments, the openings A provided for passage of the user's legs are as a whole defined already just as a result of the spacing of the lengths of web formed in the station 506, without generating waste of any sort or with an extremely contained generation of waste S.

Figure 11 highlights the fact that, in various embodiments, it is envisaged to bestow upon the internal sides 30 of the side panels 3 (and of the panels 4, if present) a curved (or, in general "anatomic") profile, with an action that leads to the waste of just a small amount (designated by S in Figure 11) of material.

This operation can be performed once the panels 3 (and 4) have been applied on the central body 2. In various embodiments, it is, however, possible to envisage that the aforesaid curved profile will be bestowed by the blade that is to perform the cut along the line of cut b (for example in the station 509), for instance, thanks to the fact that said blade has a conformation characterized in that it has two arched cutting edges joined to a third blade perpendicular to the edges 301 and to the edges generated by the cutter 504.

In various embodiments, wherever the aforesaid cut according to a curved profile is made, it is obtained in such a way that:

- in the case of the panels 3, the cut involves only the internal portion 30; and

- both in the case of the internal portion 30 of the panels 3 and in the case of the panels 4 (if present), the curved cut involves only the proximal stretch, whereas in the distal stretch, where the flap
5 folded according to the line 301 is present, the cut is a rectilinear cut orthogonal to the main axis X1 (hence to the edges of the central body 2) so as to prevent shapes that may be bothersome such as, for instance, sharp edges facing the inside of the opening A for the
10 legs.

The fact that the cut (and the consequent generation of waste) can concern only the internal portion 30 of the side panel 3, excluding the external portion 32 from cutting, is particularly appreciable in
15 the case where the material constituting the external portions 32 is an elasticated material and/or material with features of "breathability": at least at the moment, this material is considered a material of rather high quality, of which it is desired to minimize
20 the amount of the waste. Various embodiments hence enable total elimination of the waste of this material.

According to known criteria, the application of the lengths of (half)web that form the internal portions 30 and carry the external portions 32 is
25 usually made before the central body 2 of the article 1 is completed as regards its formation.

For instance, in various embodiments, the lengths in question are applied on the central body 2 when the latter comprises only one of its external films (for
30 example, the backsheet) with possibly applied thereon - if envisaged - the cores that bestow characteristics of absorbency on the articles 1. For instance, in Figure 11 the panels 3 and 4 have their proximal edges still left partially uncovered by the central body 2. The
35 completion of the central body (for example, the

application of the cores - if they have not already been applied previously - and the application of the topsheet) can be carried out in the finishing station 508 downstream of which, according to known criteria, the chain of articles 1 thus formed is sent on to a station for transverse segmentation, which is to obtain, from the chain of articles, the individual articles 1, which have the characteristics represented schematically in Figure 12.

10 In any case, it will be appreciated that the side panels 3 are connected to the central body 2, whilst the panels 3 are in a folded condition. Rather, as has been seen, the aforesaid panels are produced (i.e., "formed") in a folded condition, by applying the portions 30 and 31 against one another with the distal edge 7 set in the proximity of the proximal edge 6.

15 Various embodiments enable execution of various operations of production and of manipulation of the article 1 to be rendered less critical, also as regards subsequent packaging thereof.

20 For instance, since the panels 3 are applied to the central body 2 in a folded condition (after being in effect manufactured in a folded condition), an article 1 that has, in the totally unfolded configuration of Figure 1, a width (distance between the distal edges 7 of the panels 3) of, for example, 82 cm can present, in the final condition of manufacture of Figure 12, a width of just 59 cm. It will be appreciated that said reduction in width involves also the front panels 4 (if present), which are also connected to the central body 2 with their distal edge folded (in 301, Figure 7).

30 As schematically illustrated with a dashed line in the top part of Figure 1, the distal edge of the panels 4 can be unfolded (by overcoming the resistance exerted

by the "technical" connection obtained in the station 400 of Figure 4) so as to widen further the waistband of the article 1, thus enabling the article as it is worn to be rendered optionally larger. At the same
5 time, by keeping the panels 4 in a folded condition, i.e., preventing complete unfolding of the distal edges, folded in 301, it is possible to wear the article so that it is more adherent, without giving rise to formations such as to prove troublesome for the
10 person wearing the article.

Finally, the possible waste of material is minimized and in effect limited to the "anatomic" shaping of the edges of the openings A for the passage the user's legs and not to the formation of said
15 openings as a whole.

Of course, without prejudice to the principle of the invention, the details of production and the embodiments may vary even significantly, with respect to what is illustrated herein purely by way of non-
20 limiting example, without thereby departing from the scope of the invention as defined by the annexed claims. In particular, whilst the description provided by way of example herein regards the mass production of articles according to the "machine direction" (MD)
25 mode, i.e., with the articles being formed that advance in the direction of their longitudinal axis X1, various embodiments are suited to the mass production of articles according to the "cross direction" (CD) mode, i.e., with the articles being formed that advance with
30 their longitudinal axis X1 oriented crosswise with respect to the direction of advance.

Again, whilst the examples illustrated herein envisage connecting the side panels 3 to the central body 2 in a condition folded like a book towards the
35 inside of the article 1 (i.e., with the fold 301 made

so as to overturn the external edge of the portion 30 on the surface of the portion 30 that is to face the inside of the article 1, i.e., to face the body of the user), various embodiments could envisage that the fold
5 301 is made in an opposite direction, towards the outside of the article 1 (i.e., downwards, as viewed in Figures 9 and 10), in which case the side panels 3 would be connected to the central body 2 in a condition folded like a book towards the outside of the article
10 1.

The examples illustrated herein envisage, in the framework of the individual panel 3, making the connection (in the region 34) between the internal portion 30 and the external portion 32 by folding
15 (along the line 301) the material constituting the internal portion 30 on itself. In various embodiments it is possible to adopt a complementary solution, providing the connection (in the region 34) between the internal portion 30 and the external portion 32 folding
20 the material constituting the external portion 30 on itself so that, when it is applied on the internal portion 30, at this point without the fold 301, the external portion 32 has, in addition to the fold 321 (the presence of which is not on the other hand
25 imperative) on its side that faces the axis X1, a homologous fold, which is specularly symmetrical, on its side that is to be opposite to the axis X1. All these embodiments and equivalent embodiments implement the solution of producing the side panels 3 and
30 connecting them to the central body 2 in a folded condition, whereas the solutions that are today most widespread envisage producing the side panels 3 and connecting them to the central body 2 in a plane unfolded condition and folding them only after their
35 connection to the central body 2.

CLAIMS

1. A method of producing sanitary articles (1) wearable as pants, the articles (1) including:
- 5 - a central body (2) to be arranged around the crotch portion of the user, said central body (2) extending in a longitudinal direction (X1) between two opposed ends, and
- 10 - at least one pair of side panels (3) connected to one of the ends of said central body (2) and extending from opposite sides of said central body (2) to define at least a portion of the waist line (9) of the article (1), the side panels (3) of said at least one pair having each a proximal edge (6) connected to
- 15 said central body (2) and a distal edge (7) carrying closure formations (5) for the article (1) at its waist line (9), the method including connecting the side panels (3) of said at least one pair to said central body (2) with said side panels (3) in a folded
- 20 condition.
2. The method of claim 1, including producing the side panels (3) of said at least one pair in a folded condition.
3. The method of claim 1 or claim 2, wherein, in
- 25 said folded condition, said side panels (3) have their distal edge (7) in proximity of said proximal edge (6).
4. The method of any of the previous claims, including:
- 30 - i) producing the side panels (3) of said at least one pair by providing:
- an inner portion (30) to connect to said central body (2) at said proximal edge (7), and
- an outer portion (32) carrying said closure means (2) at said distal edge (2), said inner portion
- 35 (30) and said outer portion (32) being connectable to

each other at an intermediate region (34) of the respective side panels (3),

- ii) folding over (301) one (30) of said inner portion (30) and said outer portion (32) to form an end pleat (301) at said intermediate region (34),

- iii) applying said outer portion (32) against said inner portion (30) by connecting them via said end pleat at said intermediate region (34), and

- iv) connecting said inner portion (30) to said central body (2) at said proximal edge (4), whereby the side panels (3) of said at least one pair are connected to said central body (2) in a folded condition.

5. The method of claim 4, including folding over (301) said inner portion (30) at said intermediate region (34) by forming said end pleat, wherein said end pleat is preferably folded towards the inside of the article (1).

6. The method of claim 4 or claim 5, including folding over (321) said outer portion (32) at said distal edge (7), preferably before connection to said inner portion (30) at said intermediate region (34).

7. The method of any of previous claims 4 to 6, preferably including:

- producing said inner portion (30) in the form of continuous web (300) having connected thereto the outer portions (32) of a plurality of respective side panels (3),

- subjecting said continuous web (300) to segmentation to form stubs each to produce one of said side panels (3) of said at least one pair.

8. The method of any of the previous claims, wherein the side panels (3) of said at least one pair have an inner side (8) with respect to the longitudinal development of the article (1), the method including providing at said inner side (8) a shaping cut (S) for

one of the side openings (A) for the legs of the user of the article (1).

9. The method of claim 4 and claim 8, including producing said shaping cut (S) exclusively at said inner portion (30), whereby the outer portion (32) connected thereto is exempt from being cut.

10. The method of any of the previous claims, including connecting to said central body (2) a further pair of side panels (4) connected to the end of said central body (2) opposed to the end to which said at least one pair of side panels (3) is connected, the panels of said further pair (4) having an end pleat (301) at the respective distal edge.

11. The method of claims 7 and claim 10, including:

- leaving, in said continuous web (300), separation zones (304) between said inner portions (32) connected to said continuous web (300), and
- producing the side panels (4) of said further pair from said separation zones (304) left in said continuous web (300).

12. The method of claim 10 or claim 11, wherein the side panels (4) of said further pair have an inner side with respect to the longitudinal development of the article (1), the method including providing at said inner side a shaping cut (S) of one of the side openings (A) for the legs of the user of the article (1).

13. The method of claim 8 or claim 12, wherein said shaping cut (S) includes:

- a proximal curved section, and
- a rectilinear distal section, orthogonal to the main axis (X1) of the article (1), preferably located at a pleat of the respective panel (3, 4).

14. A sanitary article (1) wearable as pants,

including:

- a central body (2) to be arranged around the crotch portion of the user, said central body (2) extending in a longitudinal direction (X1) between two
5 opposed ends, and

- at least one pair of side panels (3) connected to one of the ends of said central body (2) and extending from opposite sides of said central body (2) to define at least a portion of the waist line (8) of
10 the article (1), the side panels (3) of said at least one pair each having a proximal edge (6) connected to said central body (2) and a distal edge (7) having closure formations (5) for the article at its waist line,

15 wherein:

- i) the side panels (3) of said at least one pair include an inner portion (30) connected to said central body (2) at said proximal edge (7) and an outer portion (32) carrying said closure means (5) at said distal
20 edge (7), said inner portion (30) and said outer portion (32) being connected to each other at an intermediate region (34) of the respective side panel (3),

- ii) one (30) of said inner portion (30) and said
25 outer portion (32) is folded over at said intermediate region (34) to form an end pleat, and

iii) said outer portion (32) is applied against said inner portion (32) and connected thereto via said end pleat at said intermediate region (34).

30 **15.** The article of claim 14, wherein said end pleat is in said inner portion (34) and is folded towards the inside of the article (1).

16. The article of claim 14 or claim 15, including a further pair of side panels (4) connected to the end
35 of said central body (2) opposed to the end to which

said at least one pair of side panels (3) is connected, wherein the panels of said further pair (4) include respective selectively deployable, folded over distal edges (301).

1/9

FIG. 1

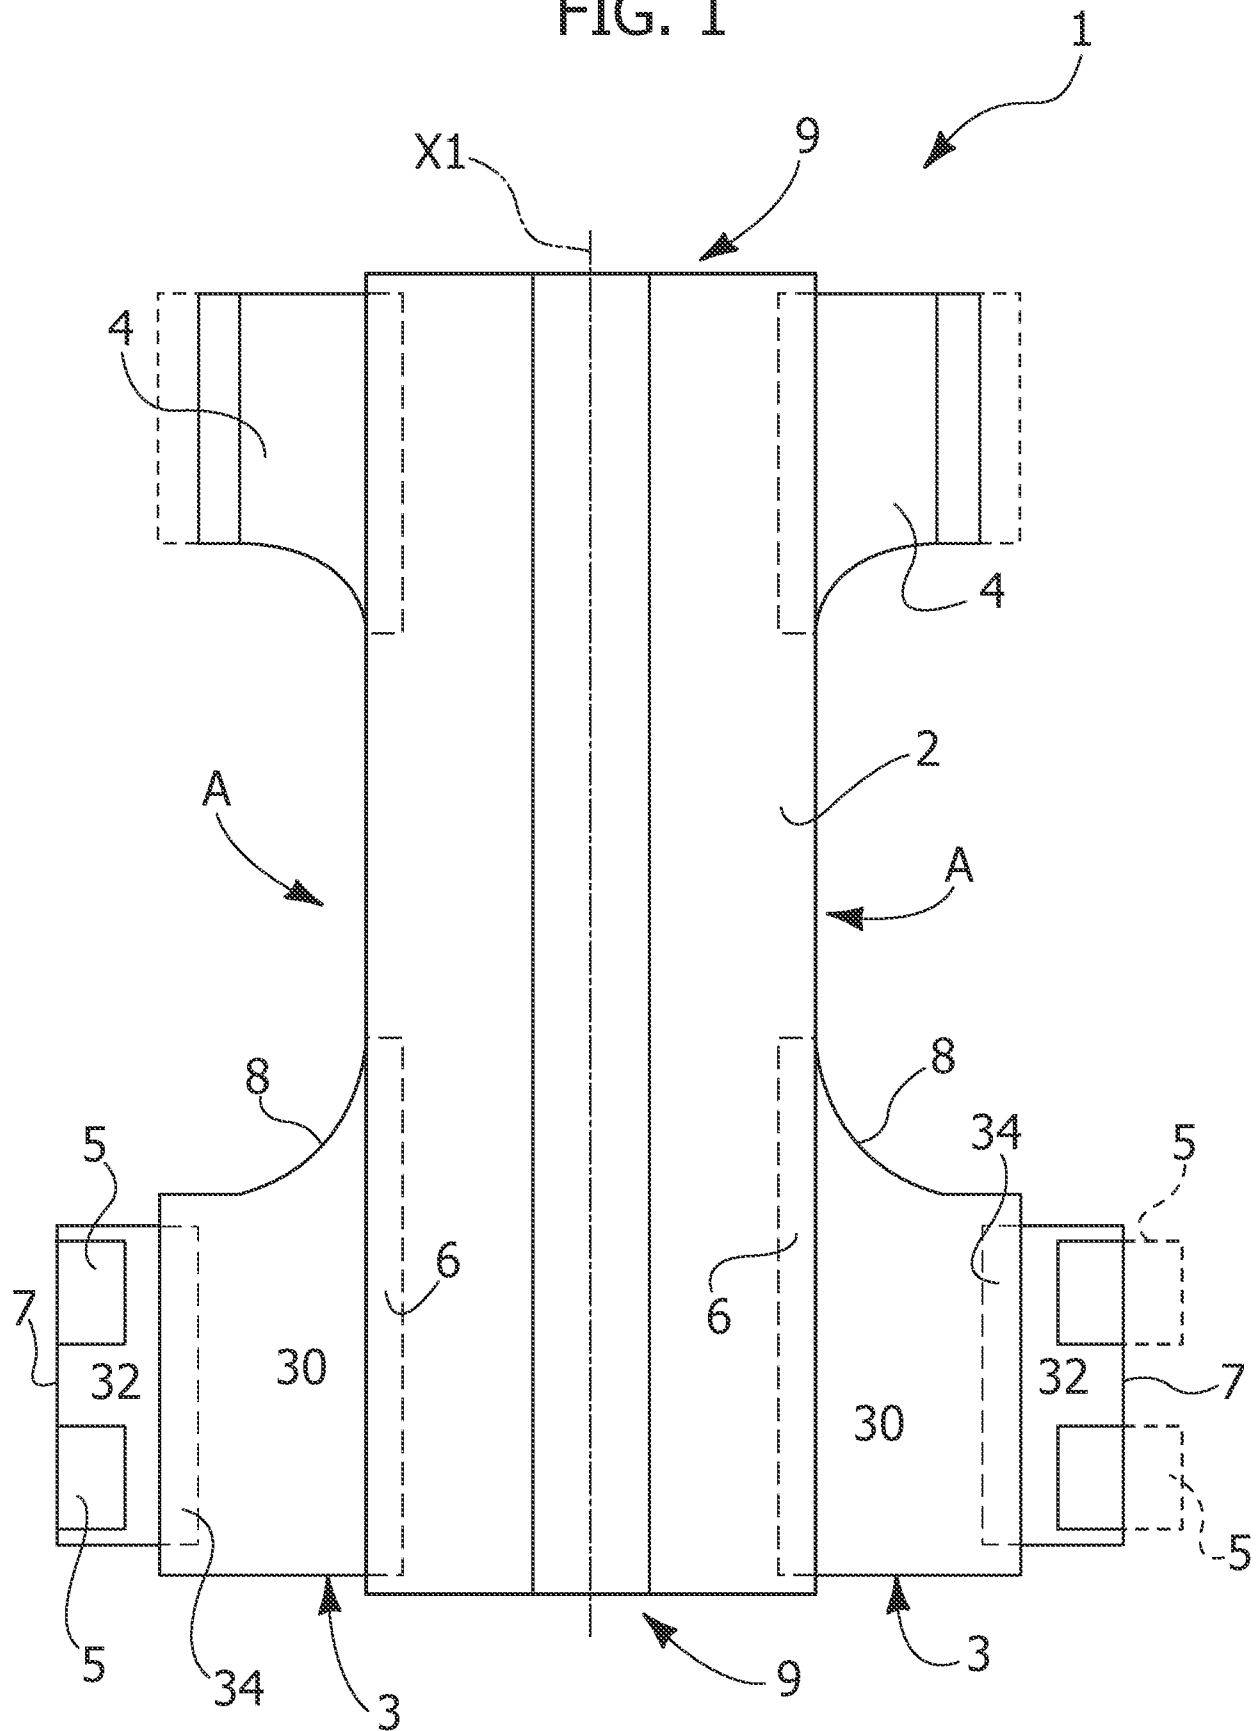


FIG. 2

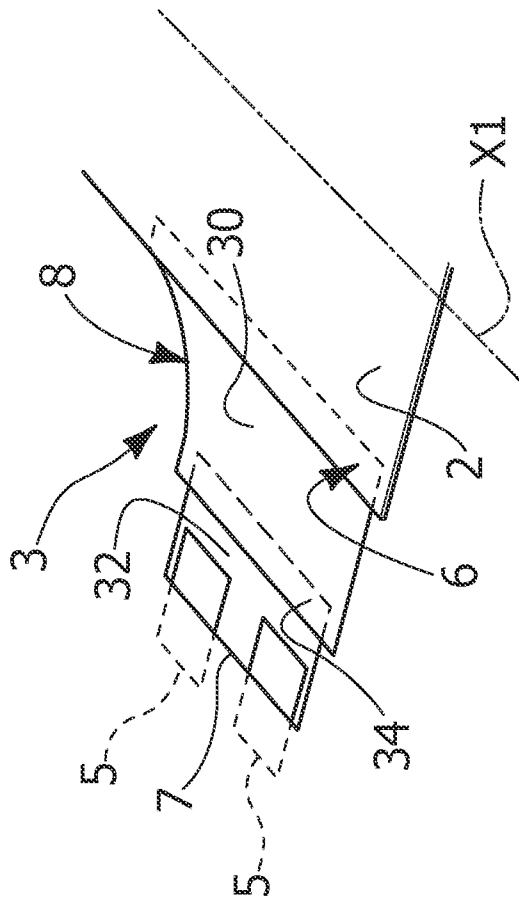


FIG. 3

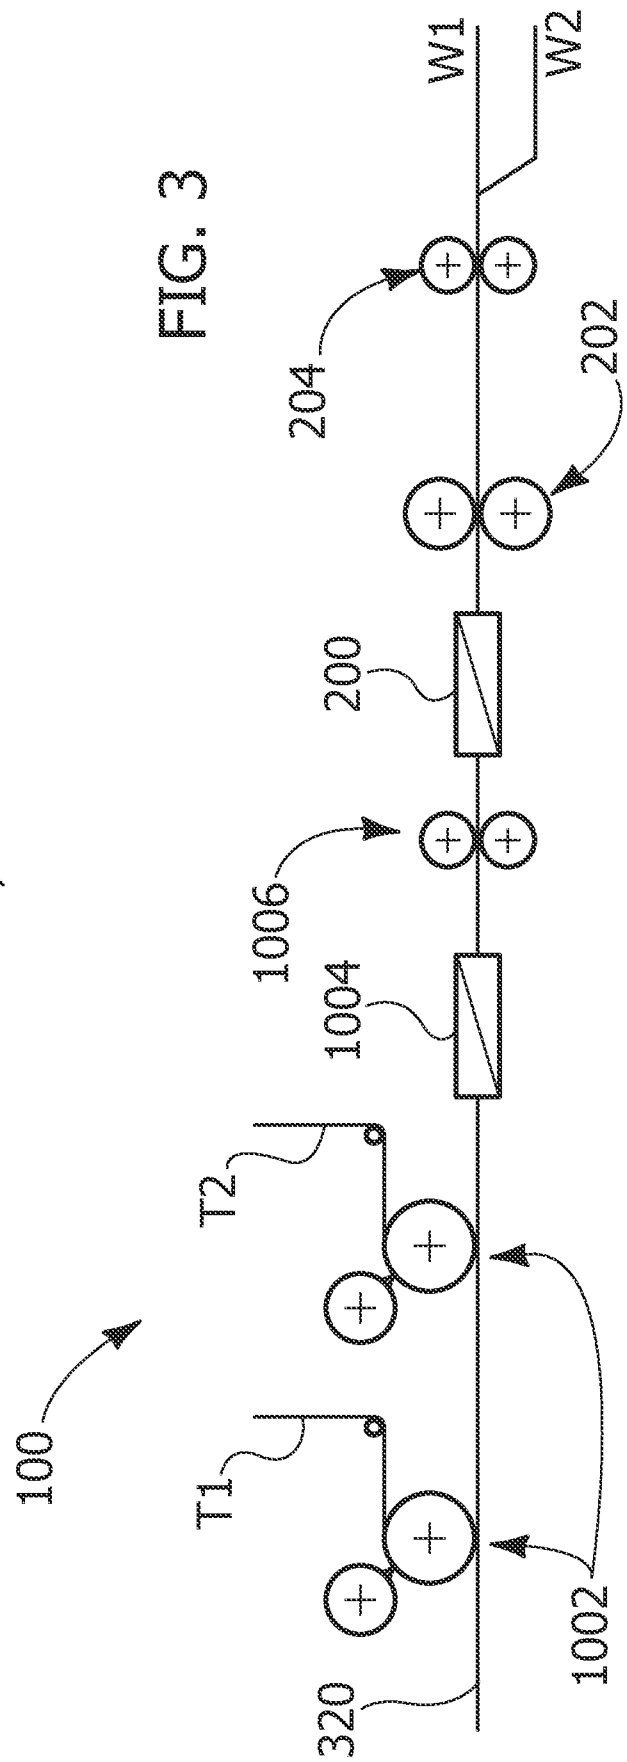


FIG. 4

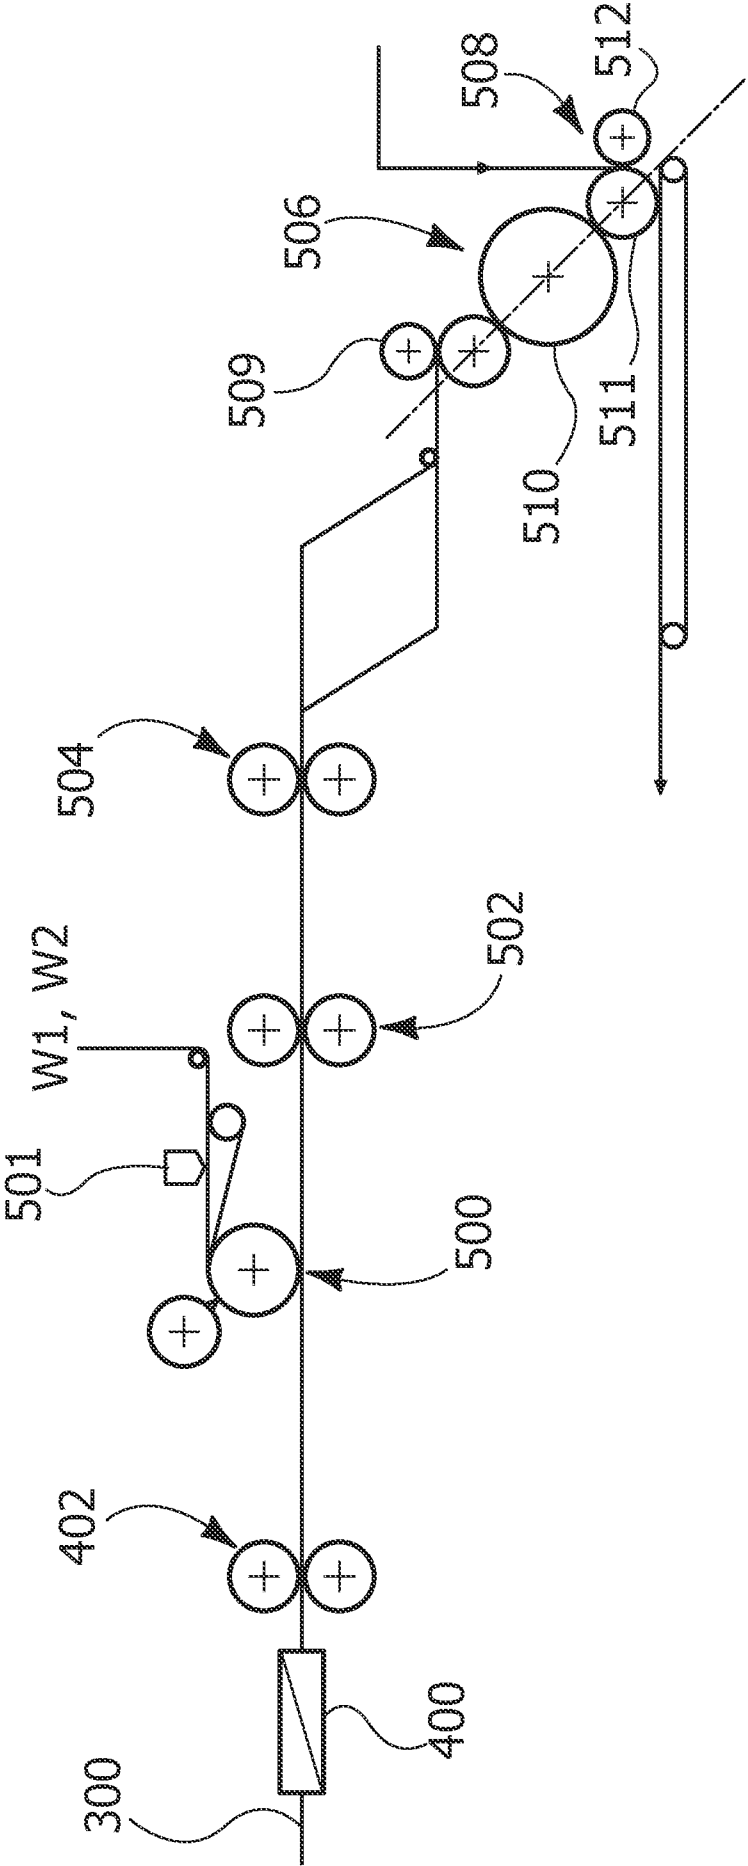


FIG. 5

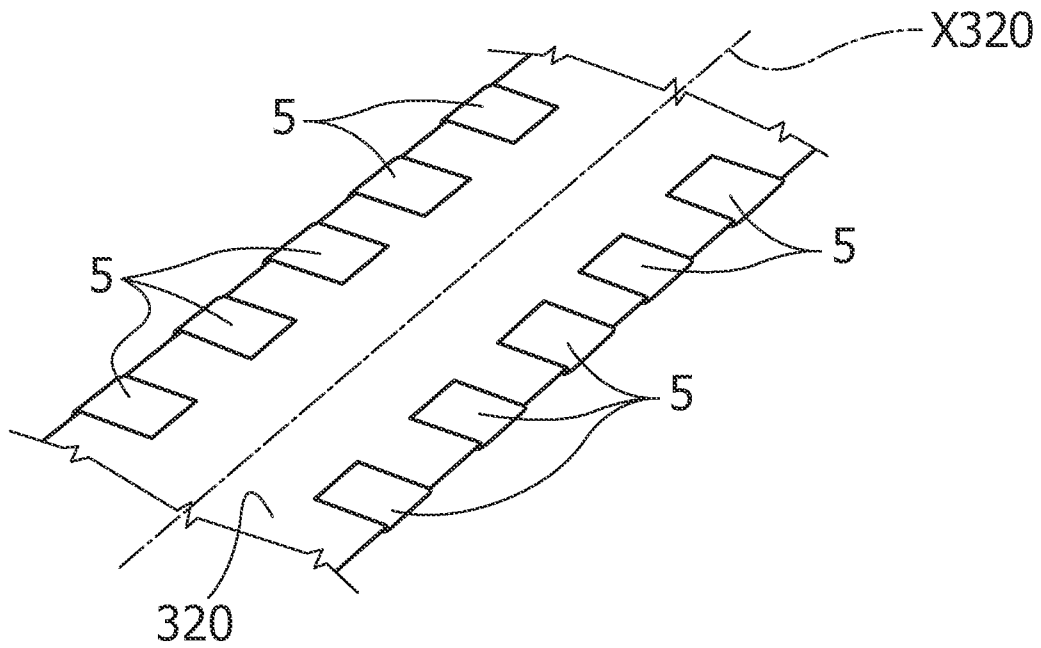


FIG. 6

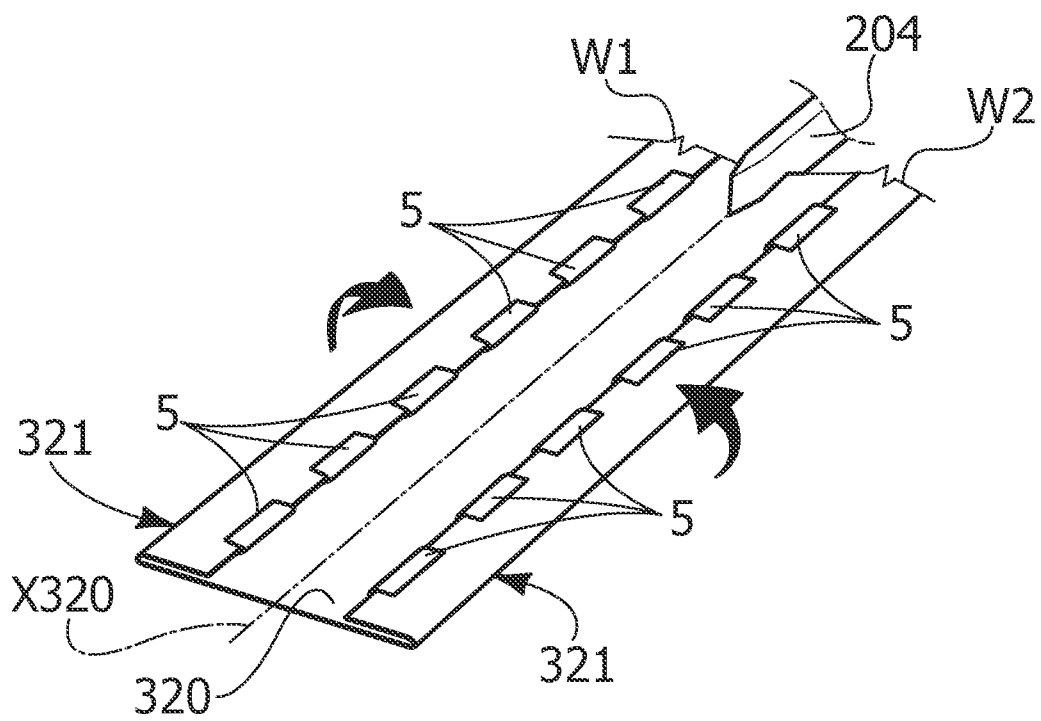


FIG. 7

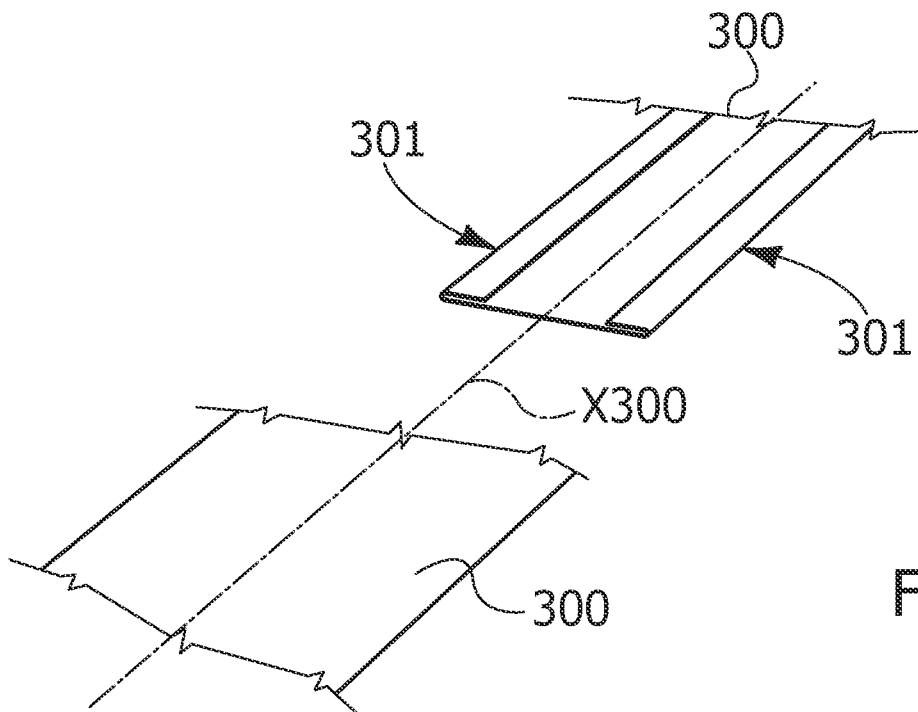


FIG. 8

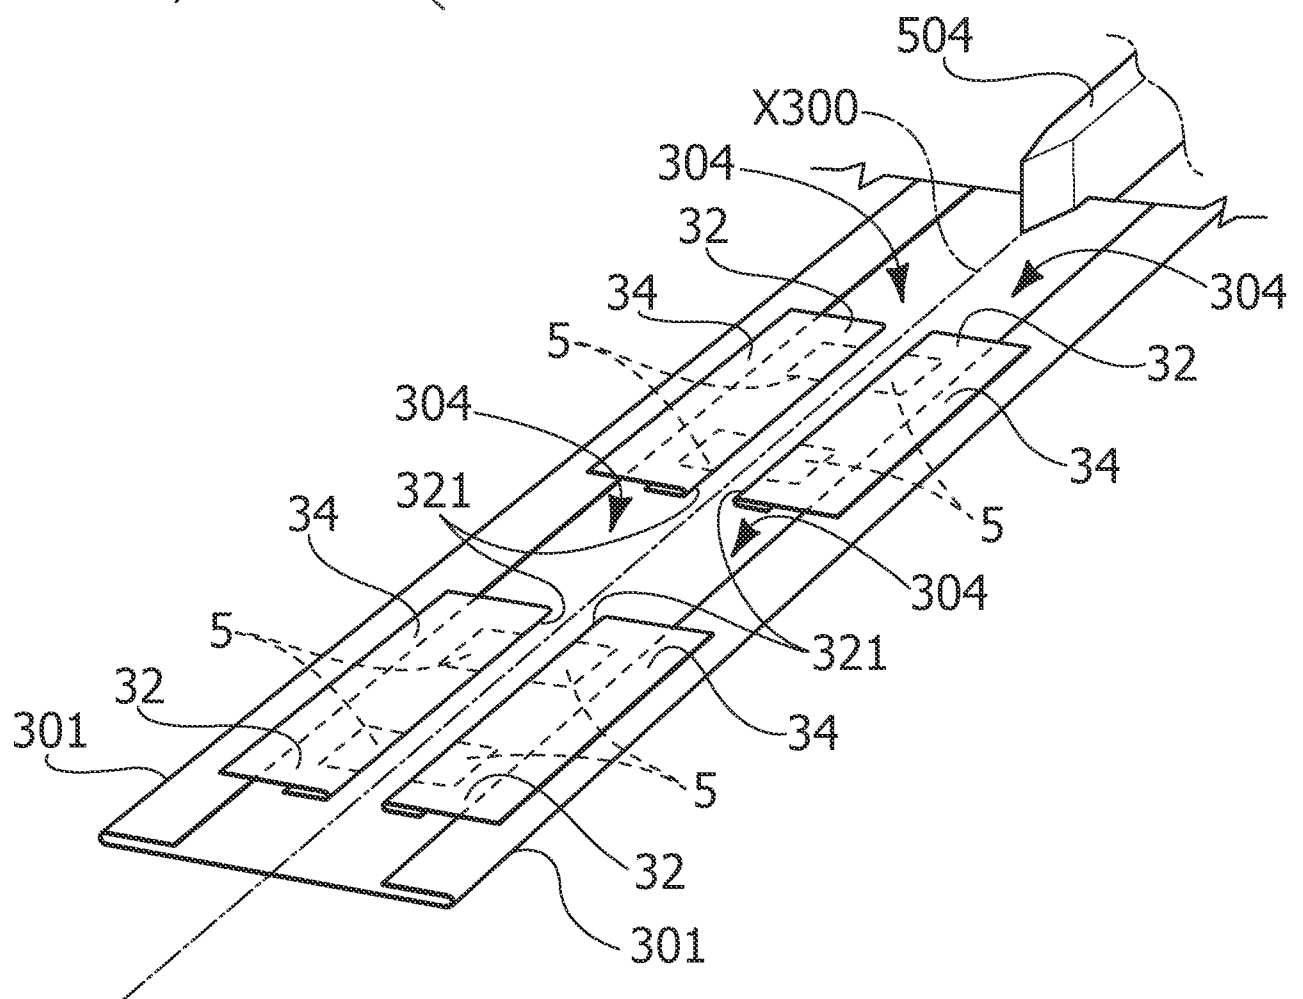


FIG. 10


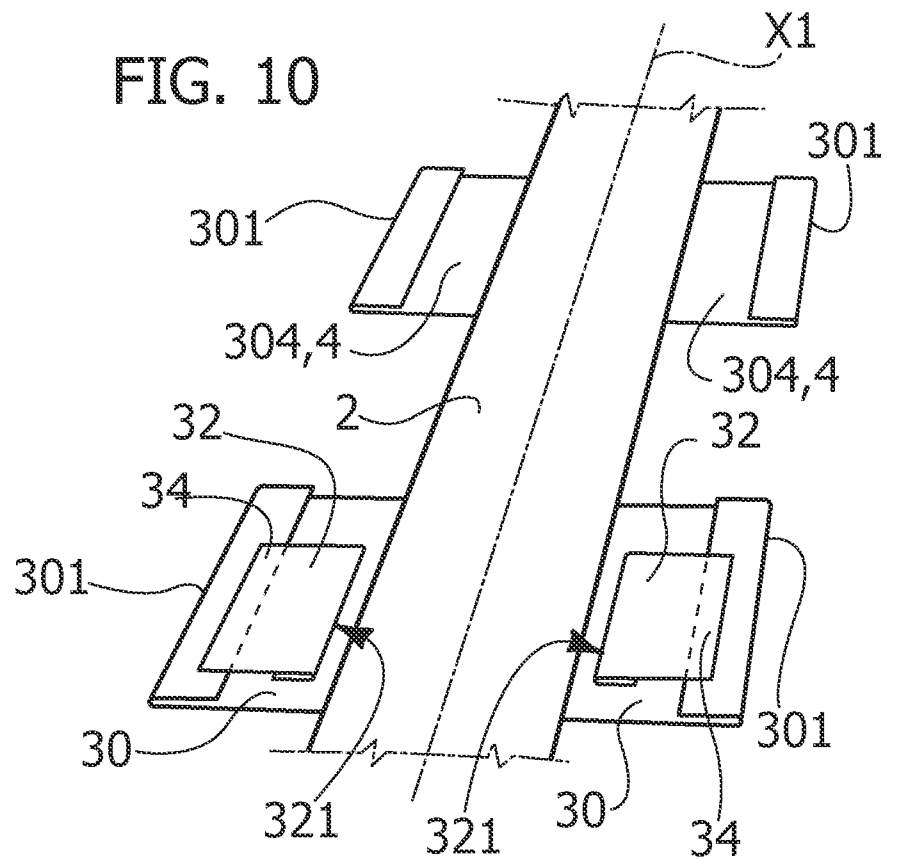


FIG. 9

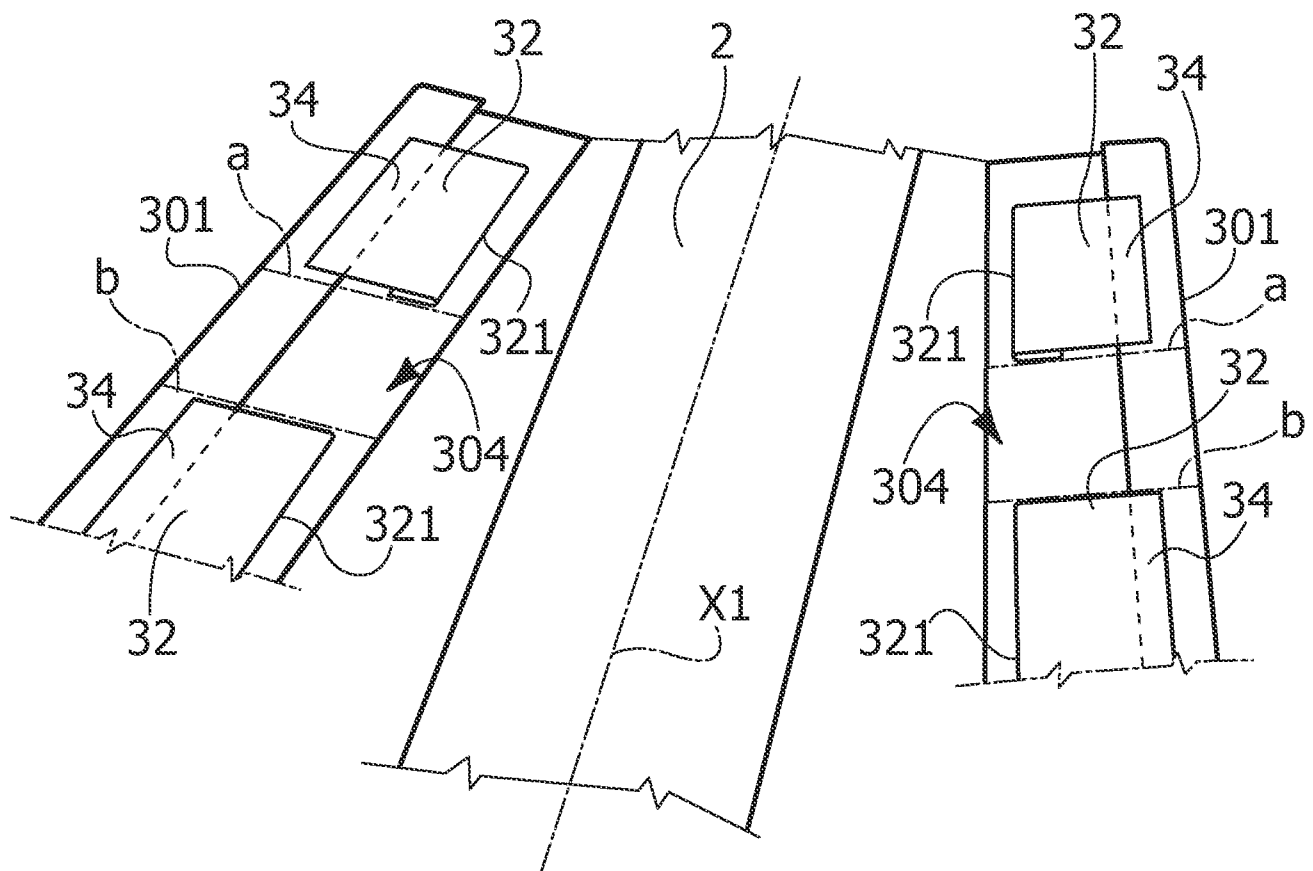

7/9

FIG. 11

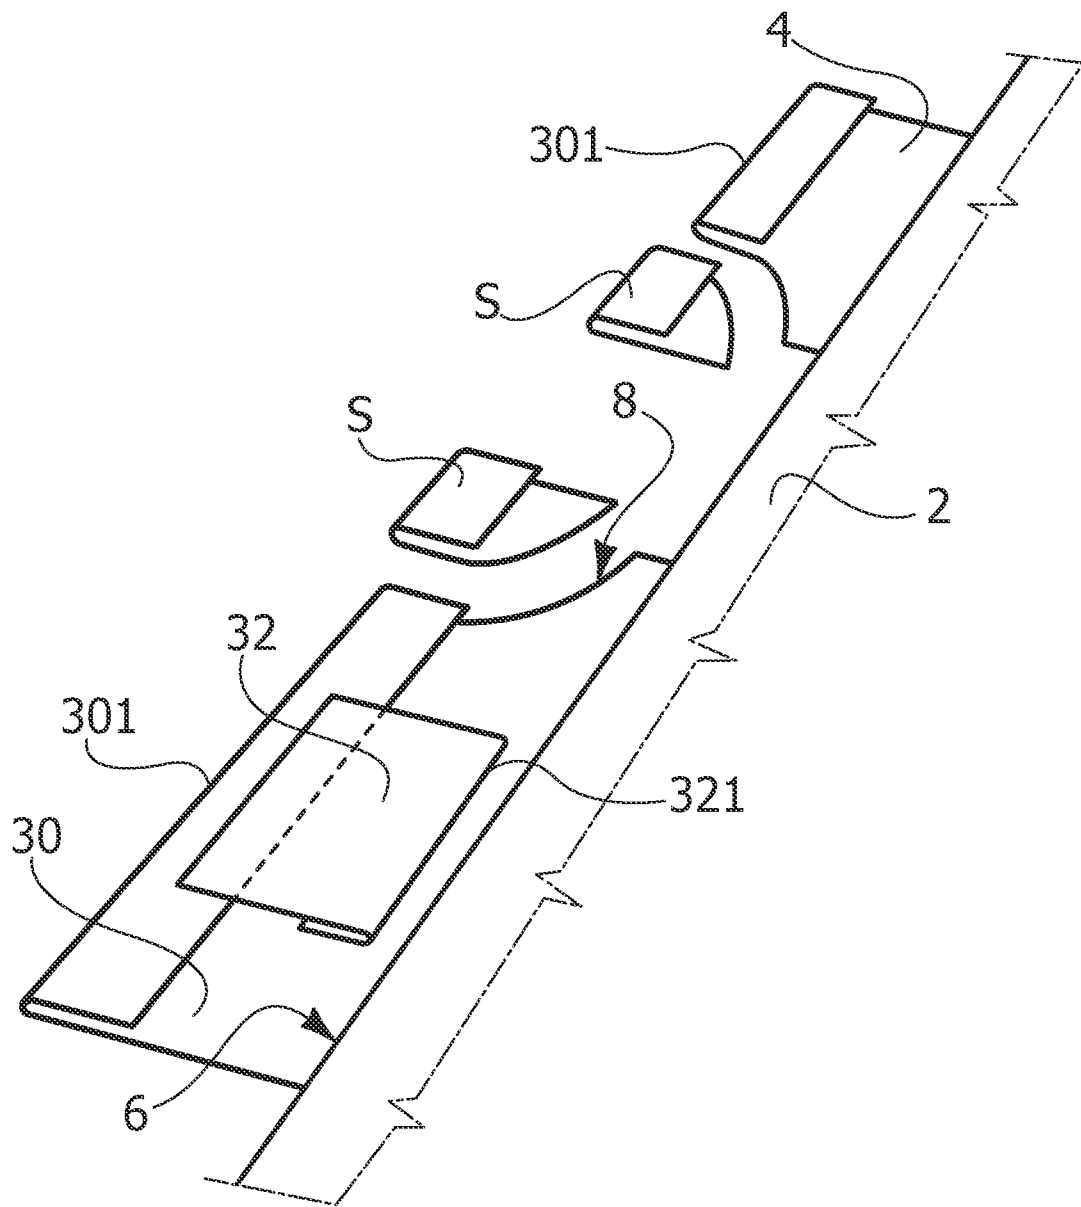


FIG. 12


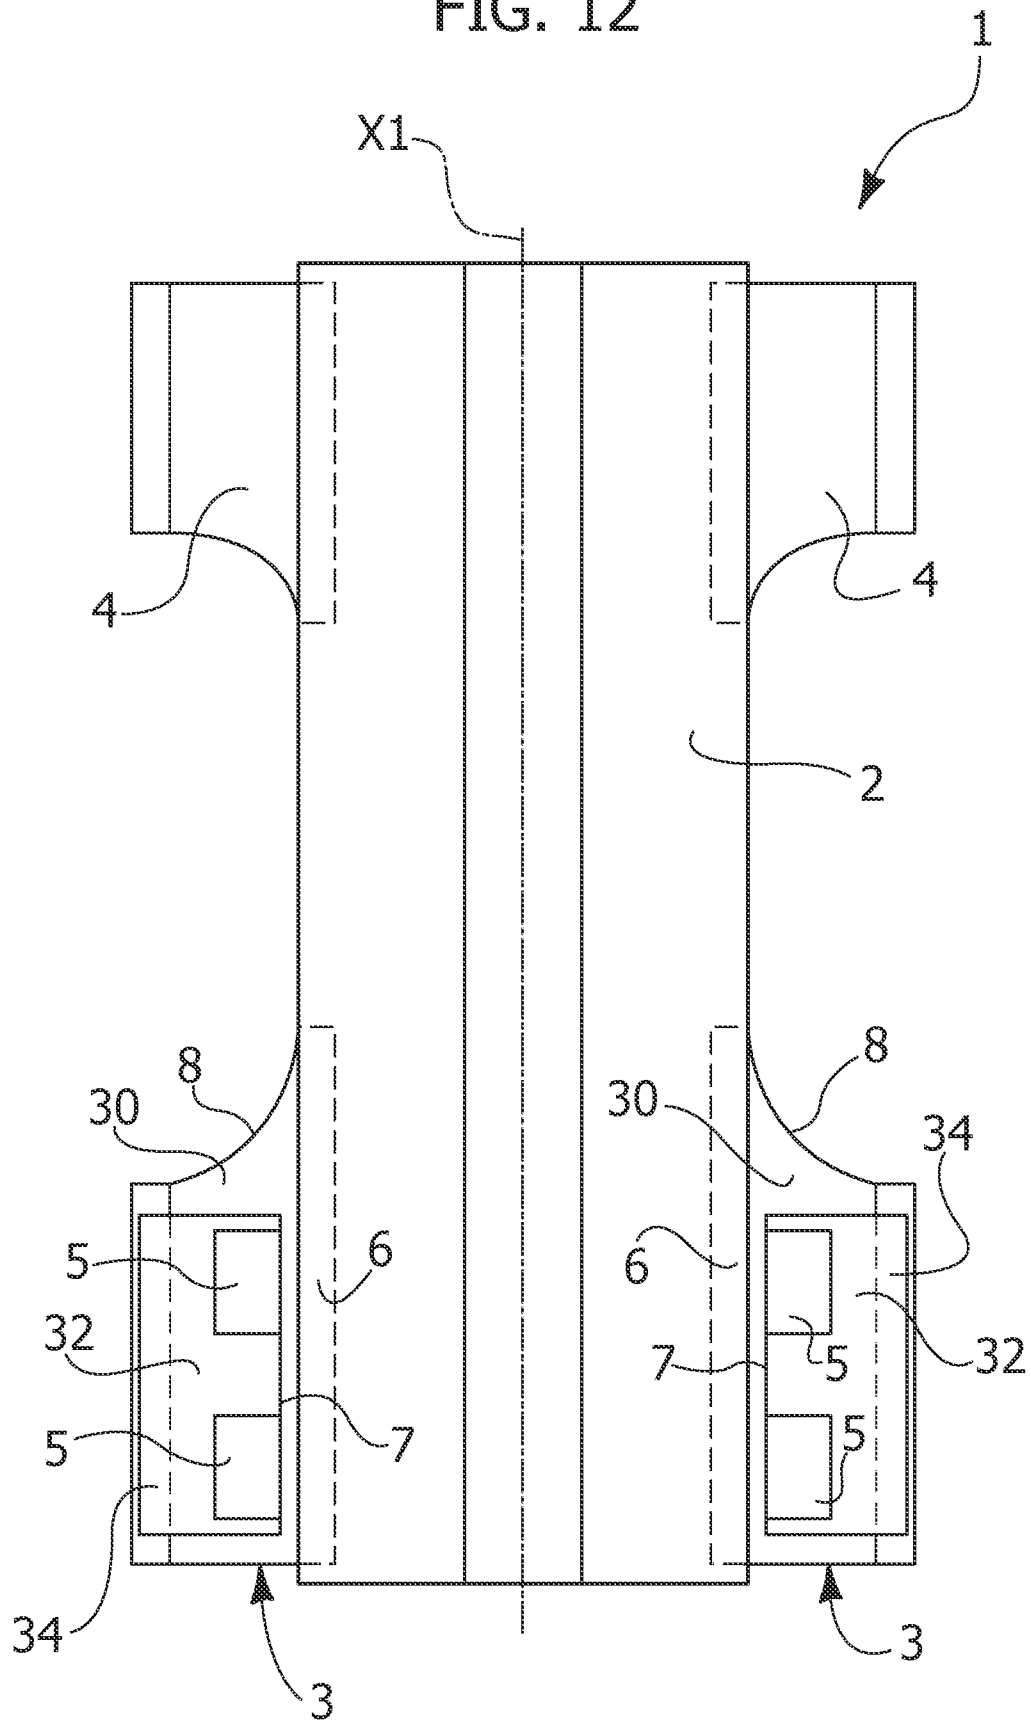


FIG. 13

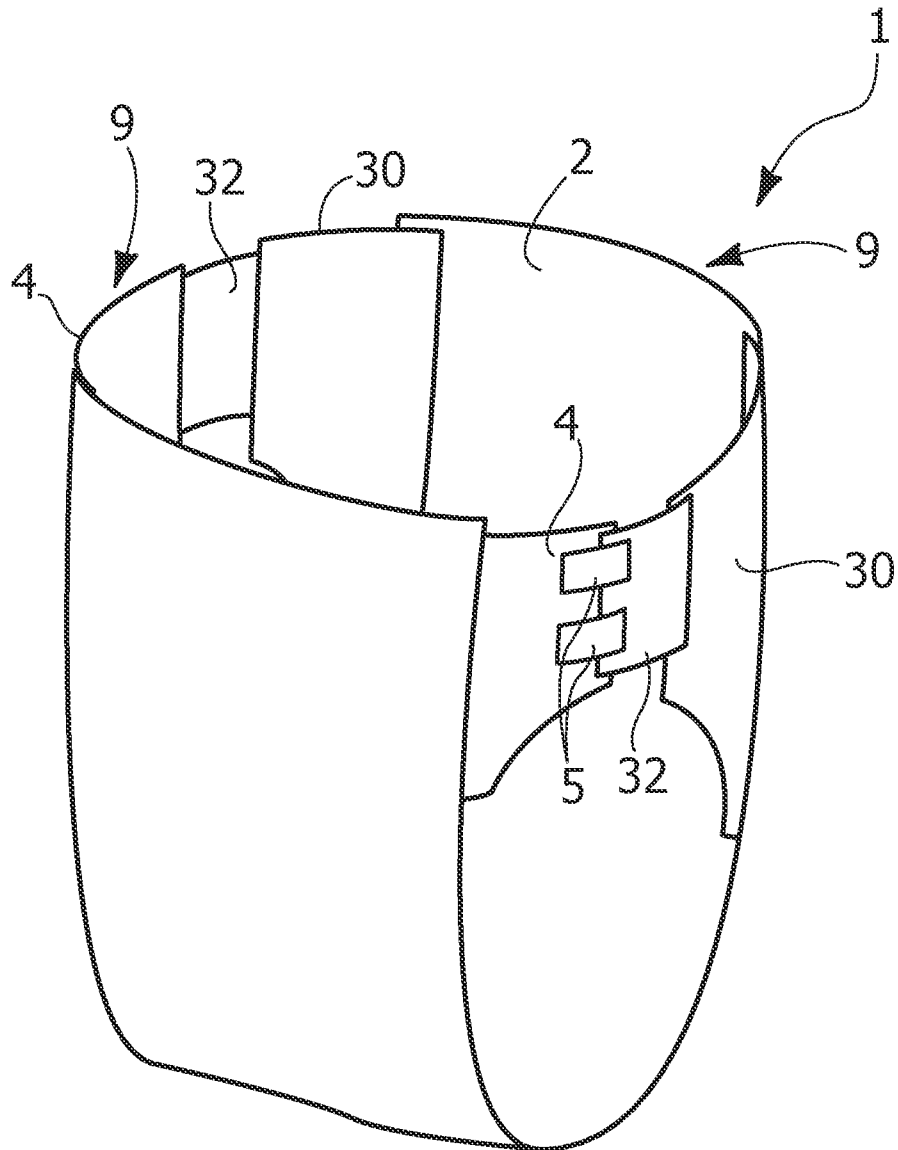

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2011/050524

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61F13/15 A61F13/56
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 2 057 975 A1 (FAMECCANICA DATA SPA [IT]) 13 May 2009 (2009-05-13) claims 12-14; figure 4	1-7,10, 11,14-16 8,9,12, 13
X	----- US 2008/009816 A1 (KENMOCHI YASUHIKO [JP] ET AL) 10 January 2008 (2008-01-10) paragraph [0038]; claim 1; figure 3	1,14
A	----- EP 1 941 853 A1 (FAMECCANICA DATA SPA [IT]) 9 July 2008 (2008-07-09) claim 17; figures 3-7 -----	1,14

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 June 2011

Date of mailing of the international search report

15/06/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gennari, Silvia

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2011/050524

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 2057975	A1	13-05-2009	AT 476163 T	15-08-2010
			CN 101854894 A	06-10-2010
			DK 2057975 T3	08-11-2010
			ES 2347890 T3	23-11-2010
			WO 2009063293 A1	22-05-2009
			JP 2011502609 T	27-01-2011
			US 2010016823 A1	21-01-2010

US 2008009816	A1	10-01-2008	AU 2007270573 A1	10-01-2008
			CA 2655926 A1	10-01-2008
			CN 101484116 A	15-07-2009
			EA 200900142 A1	30-06-2009
			EP 2039332 A1	25-03-2009
			JP 2008012115 A	24-01-2008
			WO 2008004425 A1	10-01-2008
			KR 20090038878 A	21-04-2009

EP 1941853	A1	09-07-2008	AT 447914 T	15-11-2009
			CN 101621975 A	06-01-2010
			DK 1941853 T3	29-03-2010
			ES 2336841 T3	16-04-2010
			WO 2008081237 A1	10-07-2008
			JP 2010514485 T	06-05-2010
			US 2008161766 A1	03-07-2008
