



- (51) International Patent Classification:
E04F 15/02 (2006.01) *E04F 15/04* (2006.01)
B32B 21/08 (2006.01)
- (21) International Application Number: PCT/SE2013/050837
- (22) International Filing Date: 1 July 2013 (01.07.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1250750-5 2 July 2012 (02.07.2012) SE
61/667,190 2 July 2012 (02.07.2012) US
- (71) Applicant: VÄLINGE FLOORING TECHNOLOGY AB [SE/SE]; Prästavägen 513, SE-263 65 Viken (SE).
- (72) Inventor: PERVAN, Darko; Bygatan 30, SE-263 61 Viken (SE).
- (74) Agent: VÄLINGE INNOVATION AB; ENGSTRAND, Ola, Prästavägen 513, SE-263 65 Viken (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: A BUILDING PANELS, A METHOD TO PRODUCE OF FLOOR PANELS AND A WOODEN BASED FLOOR PANEL, WITH REDUCED WEIGHT AND MATERIAL CONTENT

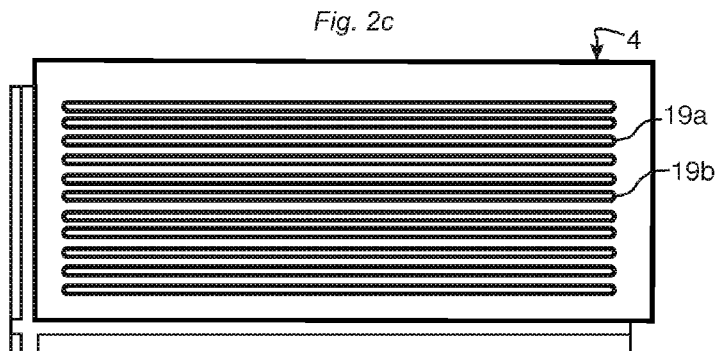

(57) Abstract: Building panels, especially laminated floor panels are shown, which are provided with a locking system and several core grooves at the rear side in order to save material and decrease weight.

A building panels, a method to produce of floor panels and a wooden based floor panel, with reduced weight and material content.

Technical field

The disclosure generally relates to the field of forming of panels, e.g. building panels. More particular, the disclosure relates to a method of forming floor
5 panels and floor panels produced by the method.

Field of Application of the Invention

Embodiments of the present invention are particularly suitable for use in floating floors, which are formed of floorboards which are joined mechanically with a locking system and are made up of one or more upper layers of laminated
10 decorative material, an intermediate core of wood-fibre-based material and a lower balancing layer on the rear side of the core. The following description of known technique, problems of known systems and objects and features of the invention will therefore, as a non-restrictive example, be aimed at this field of application and in particular at paper or powder based laminated floorings
15 formed as rectangular floorboards intended to be mechanically joined on both long sides and short sides. However, it should be emphasised that embodiments of the invention may be used in all floor types which are installed with mechanical locking systems such as for example solid wood floors, LVT floors with a plastic surface layer and in wood based building panels, for instance in
20 wall panels and furniture components

Background of the Invention

Traditional laminated panels, intended to be used for, e.g. flooring or furniture components, are produced by the following steps as shown in figures 1a – 1d. A decorative paper 2b and a wear resistant transparent overlay paper 2a are
25 impregnated with a thermosetting resin, such as melamine, and are applied on the upper part of a HDF core 3. A balancing paper 4 impregnated with a melamine resin, general called backing, is applied on the backside of a HDF core. The core 3 with the upper 2 and lower 4 layers is moved into a press 5 and

pressed under heat and pressure such that the thermosetting resins are cured and the layers are attached to the core as shown in figure 1b.

Typical press parameters are 40 bar pressure and a temperature of 160-200 C° with a pressing time of 12-30 seconds.

- 5 This production method and product produced by such methods are generally referred to as the DPL process and DPL products (Direct Pressure Laminate) The upper and lower surface layers have generally at thickness of 0,1 – 0,2 mm
- HDF (High density fibreboard) comprises wood fibre and a thermosetting resin that also is cured by heat and pressure to a board with a thickness of about 6 -
- 10 12 mm and a density of about 800 kg/m³.

The most common floor size is a rectangular panel of 1,3 * 0,2 m with a thickness of about 8 mm. The panels are packed and supplied in a packet that contains about 10 panels with a floor area of about 2 m². The weight of each packet is about 16 kg.

- 15 Recently new floor panels with a wood powder based surface and backing have been developed. The paper is replaced with a powder backing 4 comprising wood fibres and melamine particles that is scattered on one side of a core 3 and a powder based surface layer 2 comprising wood fibres, thermosetting resins, preferably melamine particles, aluminium oxide particles and colour pigments, is
- 20 scattered on the other side of the core that generally is a HDF board. The scattering is made by rollers and brushes and very accurate layers of about 100 – 800 gr/m² may be scattered with high precision on the HDF core material that generally has a thickness of about 7-10 mm. The surface 2, the core 3 and the backing 4 are pressed under heat and pressure in a continuous or discontinuous
- 25 press 5 to obtain a product with a paper free and solid surface layer and backing.

The pressed powder based layers may have a thickness of about 0,2 – 1,0 mm. Typical press parameters are similar to conventional laminate flooring and may be a pressure of 40 - 80 bar and a temperature of 160-200 C° with a pressing time of 10 - 40 seconds.

Such wood fibre based floors, generally referred to as WFF floors, have considerably better properties than traditional laminate floors since a thicker and more impact and wear resistant surface may be produced in a cost efficient way.

These two production methods may be combined.

- 5 A laminate floor with a paper based surface layer may have a powder based sub layer under the decorative paper in order to provide better impact resistance and deeper embossing. The paper backing may be replaced with a powder backing. The sub layer may be used to impregnate the decorative paper during pressing when the resins from the sub layer penetrate into the decorative paper.
- 10 WFF floor may also have several different layers on the upper side for example a high quality top layer 2a and a more cost efficient sub layer 2b under the top layer. The sub layer may comprise lower resin content and no aluminium oxide particles are needed.

15 A common feature for the paper or powder based surface layers, the paper or powder based backing layers and the HDF core is that all these materials comprise wood fibres and thermosetting binders, preferably melamine or urea, and that they are cured by heat and pressure. The wood fibres may be of the same type.

20 The layers are exposed to a first shrinking when the thermosetting resin in the upper and lower layer cures during pressing. The HDF core is also heated and becomes soft and easy to bend. The backing layer balances the tension that is created by the surface layer and the panel is substantially flat with a small convex backward bending when it leaves the press. The second temperature shrinking, when the panels is cooled from about 160-200°C to room temperature,

25 is also balanced by the backing layer and the panel 1 is essentially flat. A small convex backward bending is preferred since this counteracts upward bending of the edges in dry conditions when the relative humidity may go down to 20% or lower during wintertime.

30 This essentially flat pressed board comprises tension forces caused by the shrinking of the surface and balancing layers.

The board is generally cut and formed into several floor panels with locking systems on long and short edges as shown in figure 1c. The locking system comprises generally a tongue 10 and a tongue groove 9 for vertical locking and a strip 6 with a locking element 8 that cooperates with a locking groove 14 for horizontal locking.

The surface layer 2 has about the same length and width as the backing layer 4 as shown in figure 1d. The locking system may be formed in one piece with the core. Alternatively separate materials may be used to form for example the tongue 10 and/or the strip 6.

The prices for wood fibres and thermosetting resins are increasing and major increases are expected in the future due to shortage and the possibility to use wood fibres for energy production.

Several methods have been used to save material and to reduce costs. Such methods are mainly aiming to make thinner products that comprise a minimum of resins. Further cost savings are limited by minimum quality requirements related to the floor panel and the geometry of locking system.

It would be a major advantage if it would be possible to reduce the weight and material content. The problem with the present laminate and WFF floors is that they must have a high density core such as HDF that is needed for the stability, impact resistance and the strength which is needed to resist the heat and pressure from the pressing operation. Another problem is that the panels must have a minimum thickness and a core with high shear strength in order to allow the forming of a locking system with sufficient strength and geometry that allows easy installation.

It is known that grooves may be formed on the rear side of solid wood floors mainly in order to increase the flexibility of the panel. Such panels are easier to glue down to the sub floor. Grooves at the rear side of the panels are not used in laminate and WFF floors, which are installed with mechanical locking systems. The main reason is that such groove will have a negative impact on the stability of the panel and on the locking system since material will be removed from the balancing layer and the lower parts of the locking system.

Definition of some terms

In the following text, the visible surface of the installed floorboard is called "*front side*" or "*surface*", while the opposite side of the floorboard, facing the subfloor, is called "*rear side*". The starting board material that is used as a base material is called "*core*". When the core is coated with a surface layer closest to the front side and preferably also a balancing layer closest to the rear side, it forms a semi manufacture, which is called "*a board*" that in a subsequent operation generally is divided and machined into a plurality of "*floor panels*".

By "*horizontal plane*" is meant a plane, which extends parallel to the outer part of the surface layer. Immediately juxtaposed upper parts of two neighbouring joint edges of two joined floorboards together define a "*vertical plane*" perpendicular to the horizontal plane.

The outer parts of the floorboard at the edge of the floorboard between the front side and the rear side are called "*joint edge*". As a rule, the joint edge has several "*joint surfaces*" which may be vertical, horizontal, angled, rounded, beveled etc.

By "*locking system*" is meant co-acting connecting means, which connect the floor panel vertically and/or horizontally. By "*mechanical locking system*" is meant that joining may take place without glue.

By "*up or upward*" means toward the surface and by "*down or downward*" means toward the rear side. By "*inwardly*" is meant towards the centre of the floorboard and by "*outwardly*" means in the opposite direction.

By "*carving*" is meant a method to form a groove or a protrusion on an edge of a panel by carving a part of the edge to its final shape by one or several carving tool configurations comprising several non-rotating and fixed chip-removing surfaces located along the feeding direction

Summary of the invention

An objective of embodiments of the present invention is to provide laminated panels comprising thermosetting resins and a method to produce such panels

with the aim to reduce the weight and material content of such panels, especially floor panels, and to combine such cost saving and material reducing methods with a high quality locking systems and a core that provides sufficient stability which is needed in the pressing operation and when the floor is used. A further
5 objective is to provide solid wood floors with reduced weight and material content and increased stability.

A first aspect of the invention is building panels having a surface layer on the front side, an intermediate core and a backing layer on the rear side of the core, wherein the core and the layers all comprise wood fibres and thermosetting
10 resins. The panels are provided with a locking system for vertical and horizontal locking of a first edge of a first building panel to an adjacent second edge of a second building panel. The upper parts of the first and the second edge in a locked position together define a vertical plane perpendicular to a horizontal plane, which is parallel to the surface. Said locking system comprises a tongue
15 and a tongue groove configured to cooperate for vertical locking, and a strip, which is provided with a locking element and configured to cooperate for horizontal locking with a downwardly open locking groove formed in an adjacent edge. The backing layer and the core comprise several vertically extending core grooves with an opening towards the rear side. The area of the backing layer is
20 less than about 90% of the area of the surface layer.

The backing layer may comprise at least three core grooves spaced horizontally and inwardly from the locking system at one pair of opposite edges.

The area of the backing layer may be less than 80% of the area of the surface layer.

25 The entire parts of at least one core groove may be located inside the vertical plane VP at all edges.

The panels may be rectangular with long edges and short edges and the core grooves may be parallel with the long edges.

The core grooves may have a groove depth that is at least 0,3 times the floor
30 thickness.

The core grooves may comprise an opening that is large than an inner part of the grooves.

The backing layer may comprise essentially the same fibres as the core.

5 A second aspect of the invention is a method to produce a floor panels each having a surface layer on the front side, a intermediate core and a backing layer on the rear side of the core wherein the core and the layers all comprise wood fibres and thermosetting resins. The method comprises the steps of:

- creating wood fibre chips by forming core grooves in the rear side of previously produced panel;
- 10 • producing a mix by mixing the wood chips with thermosetting resin,
- scattering the mix of wood chips and thermosetting resin on the upper and/or lower side of the core,
- forming a board by curing the mix with heat and pressure,
- cutting the board into several floor panels, and
- 15 • forming a locking system at a first and a second panel edge, the locking system comprises a strip, a locking element and a locking grove for horizontal locking and a tongue and a tongue groove for vertical locking.

The mix may be scattered on the lower side of the core.

20 The mix may be scattered on the upper and lower side of the core.

The core may be HDF.

The core grooves may be formed prior to the forming of the locking system on long or short edges.

25 The core grooves may be formed by a jumping tool comprising several rotating saw blades or a carving tool.

The pressed board may be more convex than the floor panel.

The core grooves are used to create wood fibre material that may be used in a second step to form the upper or lower layers of the floor panel. The material that is removed from the core when forming the core grooves, reduces the weight of the panel in spite of the fact that the original panel thickness is maintained and that a panel which is thicker than the original core may be formed by using the chips from the forming of the core grooves. The whole floor panel including the upper and lower layers may be formed by materials comprising the material from the core.

10 The core and the layers may, as an alternative, comprise a thermoplastic material, such as PVC, PET or vinyl, preferably provided with a filler, and the chips created are, for this alternative embodiment, plastic chips.

The locking system may, as an alternative, comprise a protruding strip at the first or the second panel edge and a recess on a lower side of the other of said first or second panel edge. An upper surface of the protruding strip or a lower surface of the recess is preferably provided with an adhesive, such as an adhesive tape, preferably provided with a removable strip.

A third aspect of the invention is a wood based floor panel having an upper and a lower layer of solid wood. The lower layer comprises cavities and that the upper layer form an upper part of the cavities.

The panels may have a mechanical locking system at two opposite edges.

A fourth aspect of the invention is a method to produce essentially flat floor panels, each having a surface layer on a front side, a backing layer on a rear side, and an intermediate core, wherein the surface and backing layer comprise thermosetting resins and wherein the method comprises the steps of:

- forming a large board with convex pretension backwards by attaching the core, the surface layer and the backing layer with heat and pressure;
- dividing the board into several floor panels;

- forming core grooves at the rear side of the panels such that the convex pretension is at least partly released.

The core grooves may be formed after the dividing of the board into several floor panels.

- 5 The above objects are achieved wholly or partly by locking systems, floor panels and production methods according to embodiments of the invention.

Brief Description of the Drawings

The present invention will by way of example be described in more detail with reference to the appended schematic drawings, which shows embodiments
10 of the present invention.

- Figs 1a-d illustrate known technology.
- Figs 2a-d illustrate a floor panel according an embodiment to the invention.
- Figs 3a-e illustrate alternative embodiments of the invention.
- Figs 4a-d illustrate forming of a floor panel according to an embodiment of
15 the invention.
- Figs 5a-e illustrate embodiments of core grooves.
- Figs 6a-e illustrate balancing of a panel with core grooves and core grooves in a solid wood floor according to embodiments of the invention.
- 20 Figs 7a-c illustrate embodiments of tools to form core grooves.
- Figs 8a-c illustrate embodiments of cost efficient locking systems that may be combined with core grooves.

Description of Embodiments of the Invention

A first embodiment of floorboards provided with a mechanical locking
25 system according to the invention is shown in figures 2a - 2d. The floor panel

comprises a locking system on long 1a, 1b and short 1c, 1d edges. Figure 2a shows the front side with the surface layer 2 and figure 2b shows the rear side with the backing layer 4. The area of the surface layer A' is essentially the same as the area A of the backing layer 4. Figure 2c shows that essentially vertical core grooves 19a, 19b, with an opening toward the rear side or the panel, may be formed on the rear side in the backing layer 4 and into the core 3 that may be a wood based board such as for example HDF, chipboard or plywood. The core may also comprise plastic material. Such forming may be made with rotating saw blades 20a as shown in figure 2d. Carving may also be used. The panels are generally machined with the surface layer 2 pointing downwards. The jumping saw blade is displaced towards the panel 20a from above, or below if the surface layer 2 is pointing upwards, and away from the panel 20c when the panel moves relative the rotating saw blades. Several core grooves 19a, 19b are formed that in this preferred embodiment are located inwardly from the edges and preferably also inwardly from the vertical plane VP such that they do not intersect any part of the locking systems on the long and short edges. The grooves 19 may also be formed with fixed or jumping non-rotation carving tools.

The forming of the grooves creates wood chips 21 that according to embodiments of the invention may be milled and sieved to wood powder that may be mixed with thermosetting resin and scattered on a core to form the surface and/or backing layer. The core grooves are mainly used to provide wood fibre material that may be used in the upper 2 or lower 4 layers in order to save material. They may also be used to decrease the weight of the floor panel.

Figure 3a-3e show that the core grooves 19 may be formed with many different geometries and patterns. The core grooves 19 may have different widths as shown in figure 3b and the groove length may be smaller than the length BL of the backing layer. They may be discontinuous as shown in figure 3c and 3d and they may extend from one edge to the other edge as shown in figure 3e. The grooves may also be located mainly at the outer parts of the backing layer and there may be a middle area MA without any grooves. This may be used to increase the stability of the panel and to reduce the negative impact on the backing layer when parts of the backing layer are removed. The grooves may be

formed along the long sides and/or along the short sides. The panels may also be square.

The core grooves reduces the area A of the backing layer. The area A of the backing layer is in the shown embodiments about 60 % - 85 % of the area A' of the surface layer. This means that the balancing layer will lose 40 -15% of its strength. A thicker backing layer or increased resin content may compensate such reduced backing area.

It is possible to form core grooves that reduce the backing area A with more than 50% compared to the initial area after pressing and the area A' of the surface layer.

Figure 4a- 4d show forming of a floor panel 1 according to embodiments of the invention. A wood powder based sub layer 2b is applied on a core 3. Figure 4b shows that a surface layer 2 comprising a top layer 2a of wood powder or a decorative paper and overlay may be applied on the sub layer 2b. A powder backing layer 4 may be applied on the rear side of the core 3. Figure 4c shows the forming of a core groove 19 that creates chips 21. Such chips may be milled, sieved and mixed with thermosetting binders. This material may be scattered on the core to form the wood based top layer and/or sublayer and/or backing layer as shown in figure 4b. Finally the locking system 10, 9, 6, 8, 14 is formed as shown in figure 4d.

The milling or carving of the core grooves may be formed after pressing and prior to the sawing the large board into individual panels, after sawing but prior to the forming of the locking system, after the forming of the locking system on two opposite edges for example the long edges or as a final operation after the forming of the locking system. Such production steps may be combined and some grooves made be formed in several production steps.

The core grooves may easily provide sufficient wood fibre material for the various layers described above. The cured thermosetting resins from the chips are compatible with the melamine powder that is mixed into the wood powder and no separation of fibres and cured resins is needed. The backing and the surface may comprise new virgin thermosetting resins and already cured resins.

Figures 5a – e show different preferred geometries of the core grooves that may comprise a vertically extending groove depth GD of for example 0,1 – 0,5 times the floor thickness T, a groove width GW of about 0,5 – 1 times the floor thickness T and there may be a horizontally extending space S between the core grooves of about 0,2 – 1 times the floor thickness T as shown in figure 5a.

The core grooves may have different shapes and the inner core grooves 19b may be formed with a smaller groove depth GD than the outer grooves 19a in order to increase the stability of the panel. Core grooves 19c may also be formed with an undercut by for example a carving tool 20.

Core grooves with a groove depth GD of for example 0,8 times the panel thickness T may be formed in wall panels where the requirements on the impact resistance are much lower than in for floor panels.

Figures 5c – 5e show the core grooves 19 seen from the long edges. The panels have a fold down locking system on the short edges 1c, 1d with a flexible tongue 10 that allows locking with vertical folding. Figure 5c shows a core groove 19 with a groove length GL which is smaller than the distance between the locking systems at opposite short edges. Figure 5d shows that the core groove 10 is curved at one short edge 1d and parallel with the surface at the other edge 1c such that it intersects a part of the locking groove 14. Such embodiments allow that the jumping tool have to be displaced during forming only when the forming of the core grooves 19 starts or ends. Figure 5e shows a core groove 19 that is formed with a fixed tool and that intersects the locking strip 6 and the locking groove 14.

The core grooves may provide sufficient material to for example produce a 0,5 mm backing layer and a 0,5 mm sub layer. A 7 mm HDF core may be used to produce an 8 mm floor panel by using the material from the core to form the backing layer and preferably at least parts of the surface layers. This may result in a material saving and weight reduction of about 15 %.

An even larger material saving and weight reduction of about 20% may be reached if core grooves are formed such that they reduce the backing layer with

50% of the floor surface and with a groove depth GD of 40% of the floor thickness T.

The core grooves may be filled with material that preferably is cheaper than wood and/or that gives the floor other properties such as for example an increased sound reduction.

The chips may of course also be used completely or partly to create thermal energy. Embodiments of the invention may therefore also be used in floors that comprises a wood based core and where the core grooves are used for weight reduction and the chips for energy or as filler in various applications.

Forming of core grooves after pressing provides the advantage that the backing layer counteracts the shrinking of the top layer during pressing and cooling and the pressed board is at this production stage not effected by the core grooves that are formed in the floor panel after the pressing operation.

However, the forming of the core grooves removes a part of the balancing layer and this may result in that tension is released and that the panel edges bend upward after the forming of the grooves. Such a panel will not be completely flat and may be slightly concave along the length and the width.

Figures 6a - 6c show that such problems may be counteracted and completely eliminated if the large board is formed with a pre tension backwards that is adapted to the dimensional changes caused by the forming of the core grooves as shown in figure 6a. The pretension may be accomplished for example by a thicker backing layer that may comprise more resins and that may be cured at a higher temperature than the surface layer. Such a production method is characterized in that the board, when pressed and cooled, has a larger backwards bending than the final floor panel with core grooves on the rear side. Even a mechanical bending directly after the pressing when the board is still hot may be used to accomplish a plastic deformation and to stretch the surface layer such that an "over bending" backwards may be created that partly springs back to an essentially flat position when the core grooves 19 are formed. Figure 6b shows that part of the tension is released when the core grooves are formed and

the floor panel may be essentially flat when the grooves and the edges are formed as shown in figure 6c.

Figure 6c shows that the core grooves may be covered with a separate covering layer 23 for example a paper, a plastic foil, foam, cork or a wood veneer. This
5 may be used to hide the grooves, to provide a moisture sealing or to reduce sound. The core grooves according to embodiments of the invention may therefore also be used in veneered floors where an upper and lower wood veneer is glued to a wood based core such as plywood, HDF or a chipboard.

Figure 6d shows that the method to form core grooves 19 may also be used in
10 solid wood floors where core grooves 19 are formed in the solid wood body 3, preferably along the fibres 24 in the length direction of the panel. A wood veneer or a wood sheet may be used as a covering layer 23 to cover the opening 25 of the core grooves 19. Such wood based covering layer 23, that may have a thickness of for example 0,5 -1,0 mm or more, may also provide stability and
15 may counteract bending and warping. The moisture content of the veneer may be adapted to the moisture content of the solid wood body such that a tension is obtained when the veneer or the wood sheet shrinks.

Figure 6e shows a wood based floor panel having an upper 2 and a lower 4 layer
20 of solid wood. The layer may be made of different wood types that are glued to each other. The lower layer 4 comprises cavities 26. The upper layer may form an upper part 27 of such cavities. The cavities may also be formed in the upper layer and the lower layer may form a lower part of such cavities.

The different wood types that are glued to each other may have about the same thickness. The locking system may be formed partly or completely in the lower
25 layer 4. Core grooves 19 with an opening that points downwards may also be formed in the lower layer 4. The embodiment shown in fig 6e may comprise HDF boards, instead of the solid wood layers, that may be formed and glued together in the same manner as described above. Such a combination core may be laminated as a conventional solid HDF board. This method is particularly suitable
30 to be used for thicker laminated panels of a thickness of about 8-12 mm.

Core grooves or cavities formed in solid wood provide the advantages that the weight of the solid wood floor may be reduced and increased stability may be obtained.

5 The chips from the core grooves or cavities may be used for thermal energy or to produce wood fibres for other powder based floors or fibre based boards such as particleboards. It is also possible to mix the wood chips with a binder and to produce an artificial wood veneer that may be handled as a separate layer and glued against the opening of the core grooves.

10 The same technology may be used in a floor with a plywood based core and a veneered surface layer.

Figure 7a shows a tool 20 comprising several rotating saw blades that may be used to form core grooves 19.

15 Figure 7b shows a carving tool 20 with several carving teeth 20a-d that are offset horizontally. The carving tool is preferably fixed in the horizontal direction and the panel is displaced against the carving tool in the feeding direction FD against the tool. Each tooth may carve about 0,3 -0,5 mm in HDF material. The groove may be V or U shaped or even undercut with an inner part that has a larger horizontal extension perpendicular to the groove length than the opening.

20 Figures 8a -8c show that further cost savings may be reached with locking systems that are adapted to be separated from the large board with overlapping edges OL and with a non liner cut that preferably is made with carving tools 20a, 20b. Figure 8a shows a locking system, which comprises a protruding tongue 10 and a protruding strip 6 on the same edge. Such joint geometry may be used to accomplish a considerable reduction of the material waste W that is caused
25 when the panels are cut and when the locking systems are formed. Figure 8c shows that the rear side 6a of the strip 6 may be formed such that the rear side of the strip is inclined upwards and such that an outer part of the strip is closer to the surface than an inner part. All such forming and material waste may be used to provide wood fibres that may be used in in upper or lower layers of a panel.

Core grooves may be combined with non-linear separation and locking systems that make it possible to divide the board into several panels that have geometry such that they may be positioned in the same horizontal plane HP with overlapping edges.

- 5 It is possible to form the whole floor panel from the wood material obtained from the core of other floor panels. Only melamine powder has to be added into the mix. The upper layer may be harder than the core since a higher density may be created during the pressing of the powder mix. Such panels may be formed with embossed structures and may be painted, lacquered or digitally printed in the
- 10 factory or painted and/or lacquered after installation.

CLAIMS

1. Building panels (1, 1'), each having a surface layer (2) on a front side, a backing layer (4) on a rear side and an intermediate core (3), wherein the intermediate core and the surface and the backing layer all comprise wood fibres and thermosetting resins, said building panels are provided with a locking system for vertical and horizontal locking of a first edge of a first building panel (1) to an adjacent second edge of a second building panel (1'), wherein upper parts of the first and the second edge in a locked position together define a vertical plane (VP) perpendicular to a horizontal plane (HP), which is parallel to the surface layer (2), said locking system comprises a tongue (10) and a tongue groove (9) configured to cooperate for vertical locking, and at the first edge a strip (6) provided with a locking element (8), which is configured to cooperate for horizontal locking with a downwardly open locking groove (14) formed in the second edge, c h a r a c t e r i s e d in that the backing layer (4) and the intermediate core (3) comprise at least two vertically extending core grooves (19) with an opening towards the rear side, and that the area (A) of the backing layer is less than about 90% of the area (A') of the surface layer.

2. The building panels as claimed in claim 1, wherein the backing layer (4) comprises at least three core grooves (19) spaced horizontally and inwardly from the locking system at one pair of opposite edges.

3. The building panels as claimed in claim 1 or 2, wherein the area (A) of the backing layer is less than 80% of the area of the surface layer (A').

4. The building panels as claimed in any one of the claims 1 - 3, wherein the entire parts of at least one core groove (19) is arranged inside the vertical plane VP at all edges.

5. The building panels as claimed in any one of the preceding claims, wherein the building panels are rectangular with long edges (1a, 1b) and short edges (1c, 1d) and wherein the core grooves (19) are essentially parallel with the long edges.

6. The building panels as claimed any one of the preceding claims, wherein the core groove depth (GD) is at least 0,3 times the floor thickness (T).

7. The building panels as claimed in any one of the preceding claims, wherein the core grooves (19) comprises an opening with a groove width (GW) that is larger than an inner part of said groove.

8. The building panels as claimed in any one of the preceding claims, wherein the backing layer (4) comprises essentially the same types of fibres as the core (3).

9. A method to produce floor panels, each having a surface layer (2) on a front side, a backing layer (4) on a rear side and an intermediate core (3), wherein the core and the surface and backing layer all comprise wood fibres and thermosetting resins and wherein the method comprises the steps of:

- creating wood fibre chips (21) by forming core grooves (19) in a rear side of previously produced panel;
- producing a mix by mixing the wood fibre chips with a thermosetting resin;
- scattering the mix on the upper and/or lower side of a core;
- forming the core and the mix to a board by curing the mix with heat and pressure;
- cutting the board into several floor panels; and
- forming a locking system at a first and a second edge of the floor panels, the locking system comprises a locking groove (14) and a strip (6) with a locking element (8) for horizontal locking and a tongue (10) and a tongue groove (9) for vertical locking.

10. The method as claimed in claim 9 wherein the mix is scattered on the lower side of the core.

11. The method as claimed in claim 9 or 10, wherein the mix is scattered on the upper and lower side of the core (3).

12. The method as claimed in any one of the claims 9-11, wherein the core is HDF.

5 13. The method as claimed in any one of the claims 9-12, wherein the core grooves are formed prior to the forming of the locking system at long or short edges of the floor panels.

14. The method as claimed in any one of the claims 9-13, wherein the core grooves are formed by a jumping tool comprising several rotating saw
10 blades or a carving tool.

15. The method as claimed in any one of the claims 9-14, wherein the pressed board is more convex than the floor panels.

16. A wood based floor panel having an upper (2) and a lower (4) layer of solid wood, c h a r a c t e r i s e d in that the lower layer comprises cavities
15 (26) and that the upper layer (2) forms an upper part (27) of the cavities (26).

17. The floor panel as claimed in claim 16, wherein one pair of opposite panel edges comprises a mechanical locking system (9,10,6,8,14) for locking the floor panel to an adjacent essentially identical floor panel vertically and horizontally.

20 18. A method to produce essentially flat floor panels, each having a surface layer (2) on a front side, a backing layer (4) on a rear side and an intermediate core (3), wherein the surface and backing layer comprise thermosetting resins and wherein the method comprises the steps of:

- 25 • forming a board with convex pretension backwards by attaching the core, the surface layer and the backing layer with heat and pressure
- dividing the board into several floor panels;

- forming core grooves (19) at the rear side of the panels such that the convex pretension is at least partly released.

19. The method as claimed in claim 18, wherein the core grooves are formed after the dividing of the board into several floor panels.

- 5 20. The method as claimed in claims 18 or 19, wherein the core grooves are formed after the dividing of the board into several floor panels.

Fig. 1a

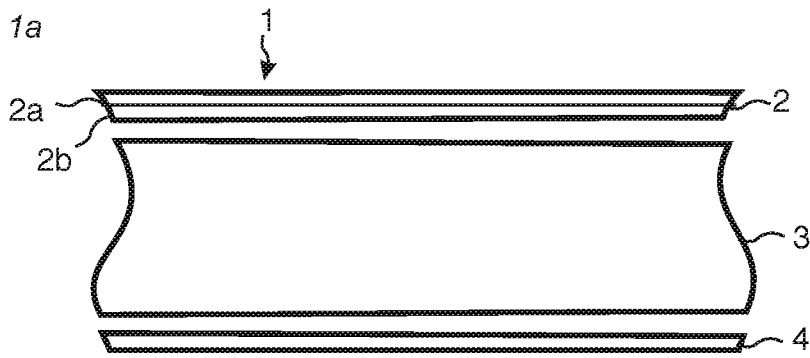


Fig. 1b

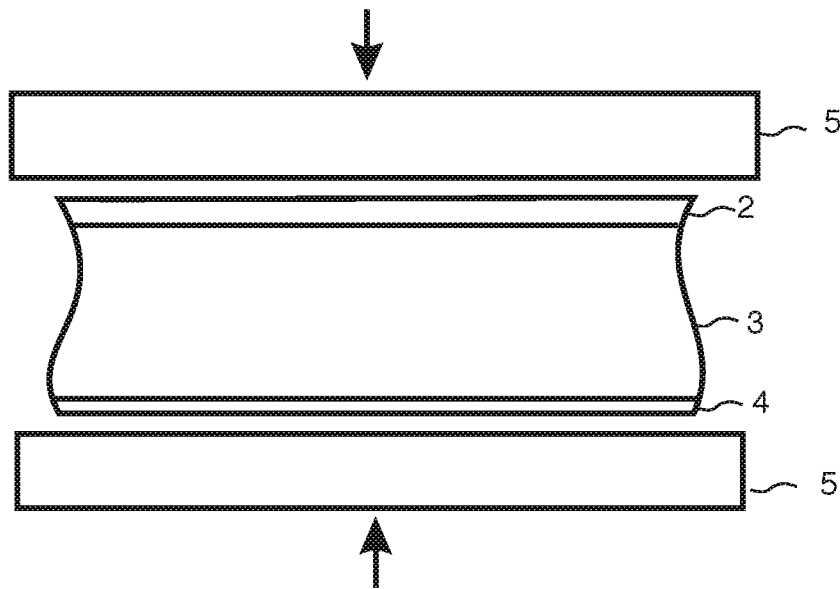


Fig. 1c


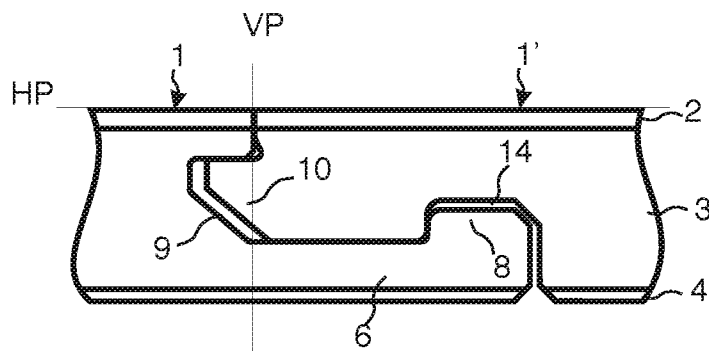


Fig. 1d

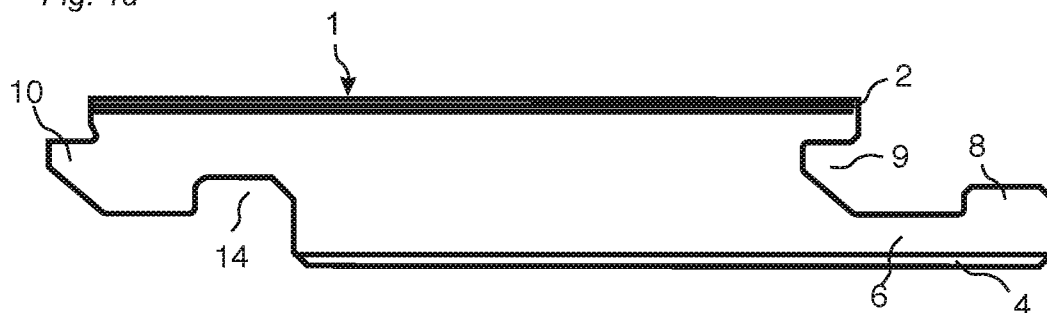

KNOWN TECHNOLOGY

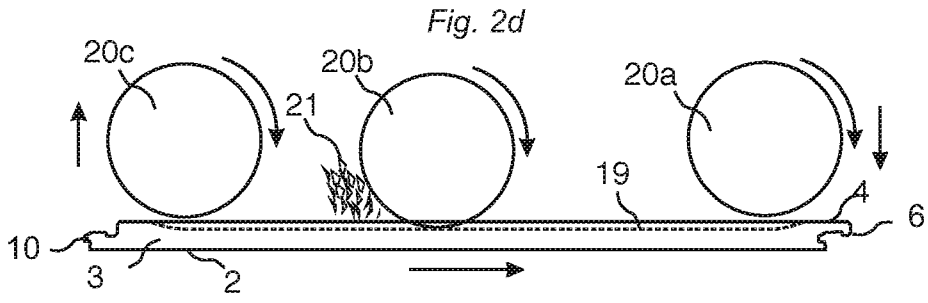
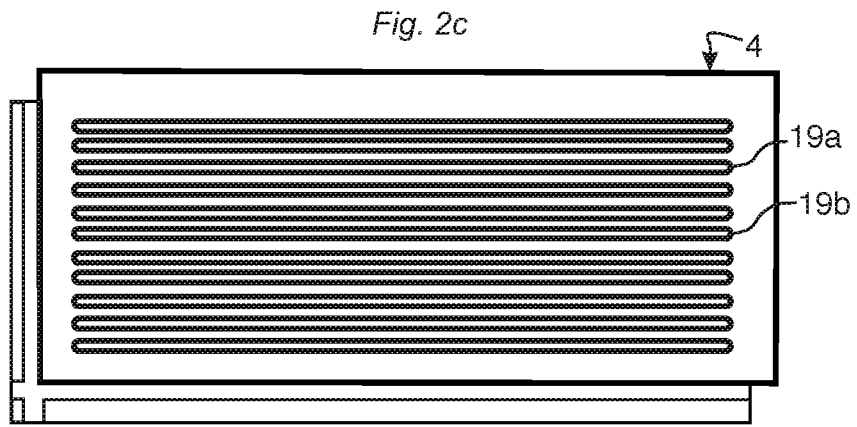
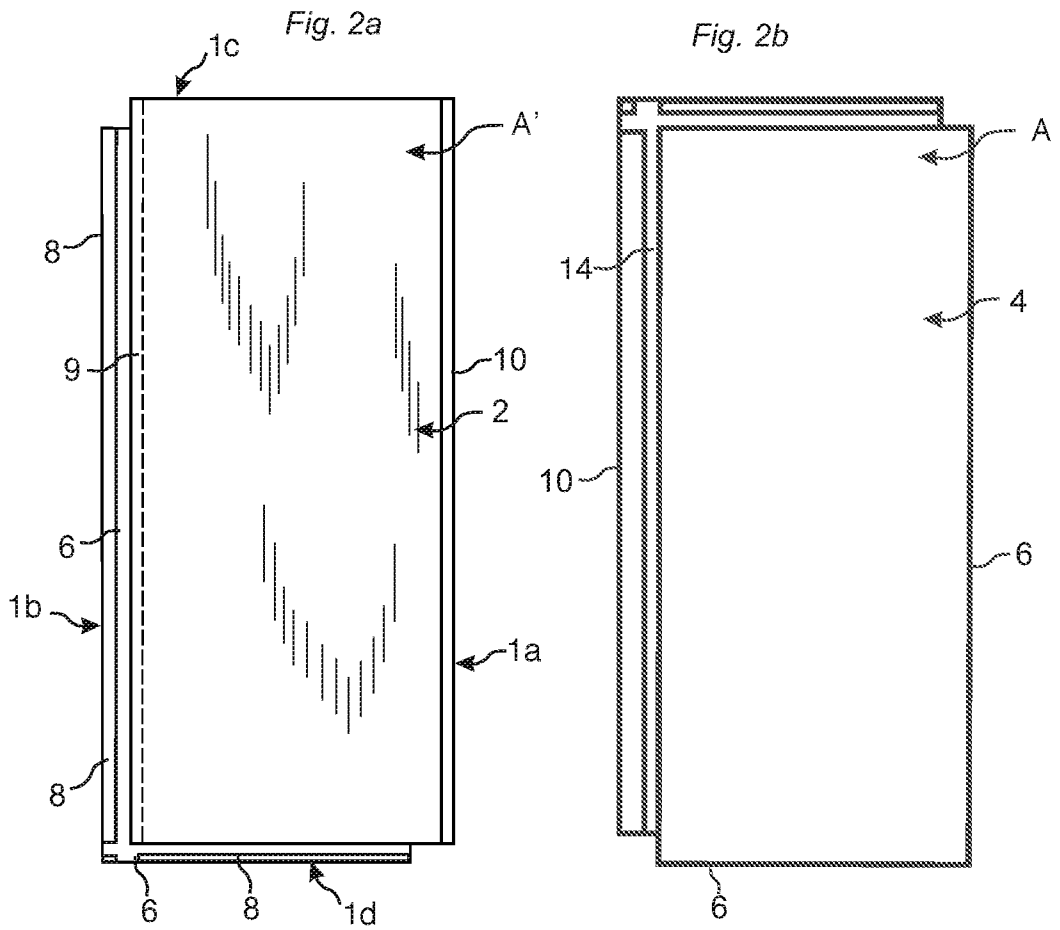


Fig. 3a

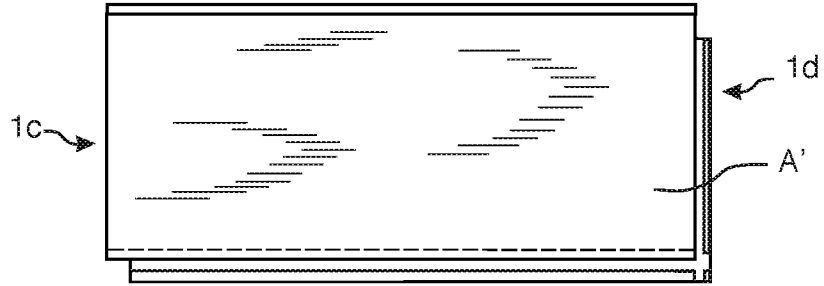


Fig. 3b

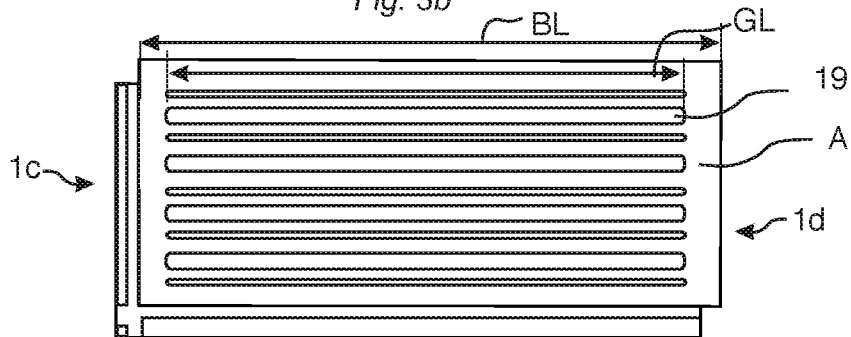


Fig. 3c

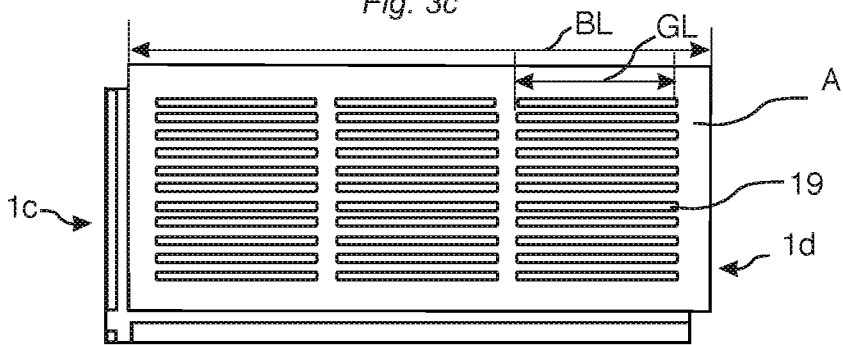


Fig. 3d

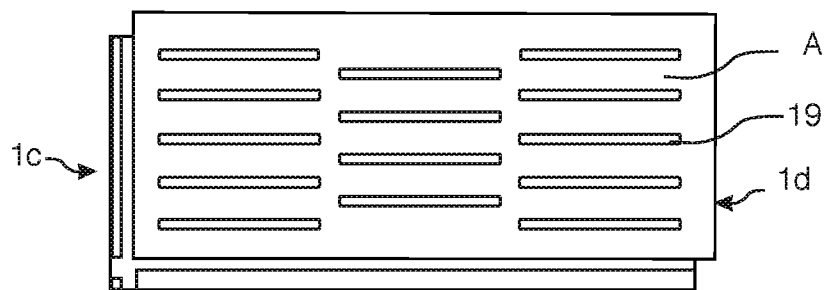


Fig. 3e

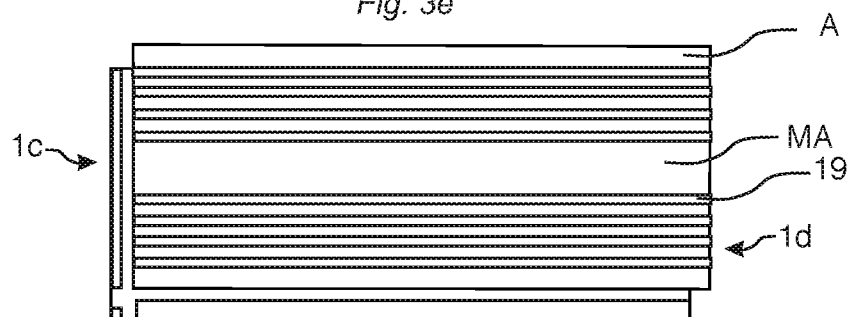


Fig. 4a



Fig. 4b

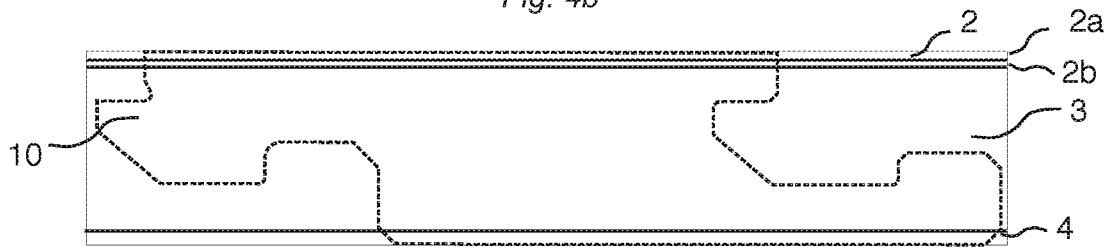


Fig. 4c

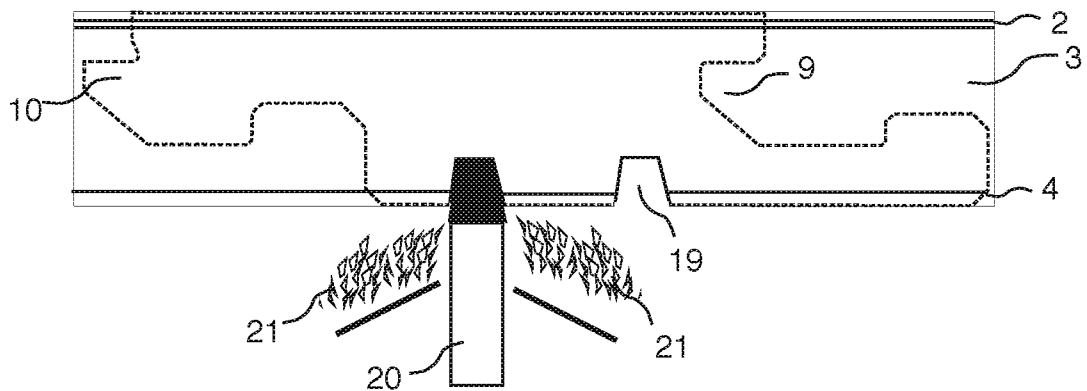
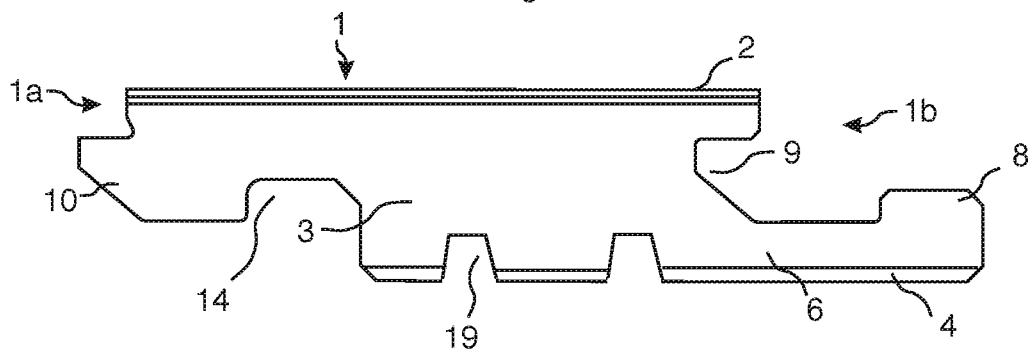


Fig. 4d



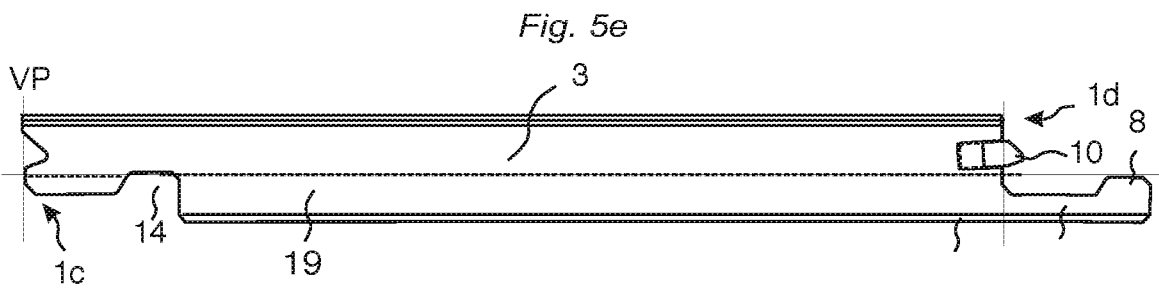
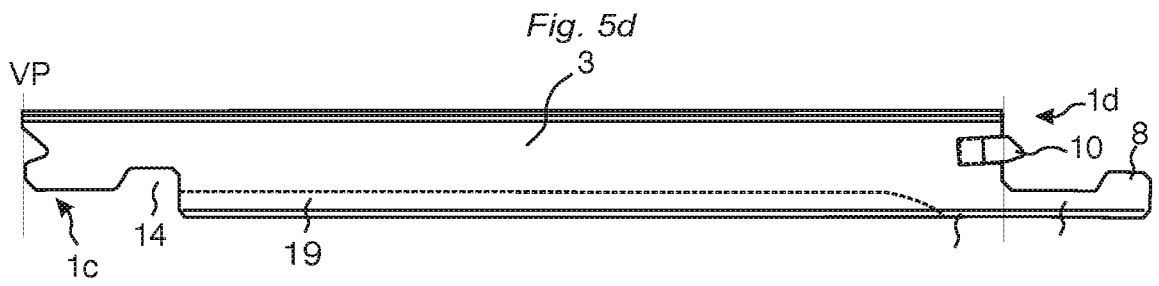
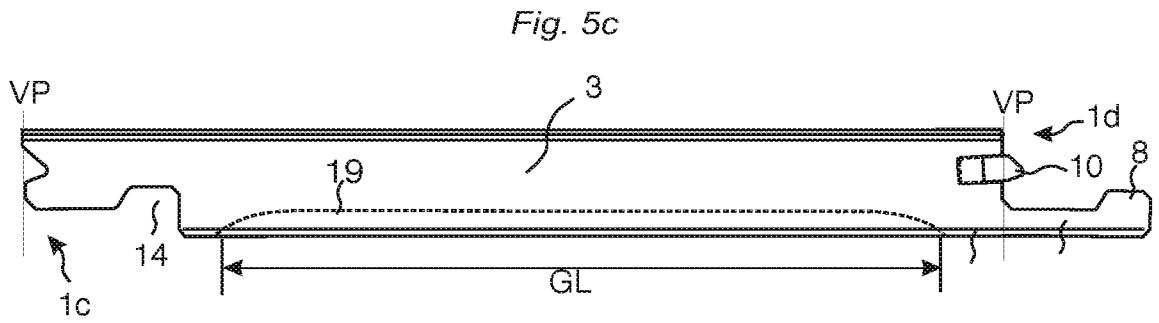
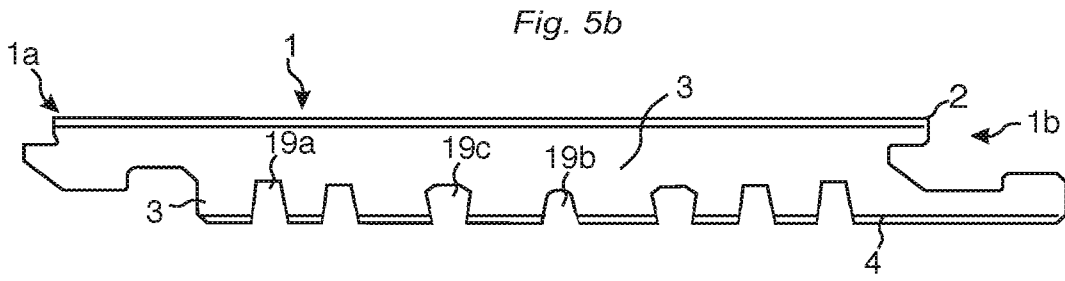
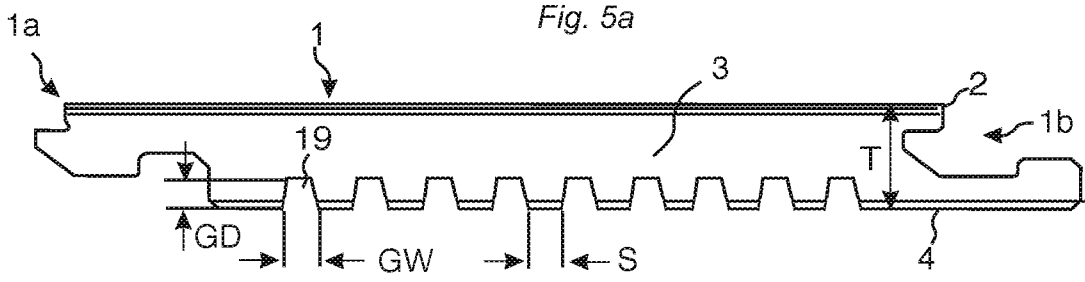


Fig. 6a

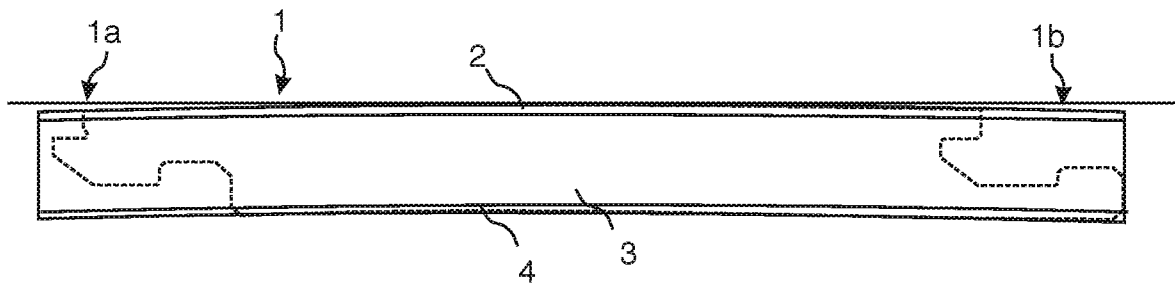


Fig. 6b

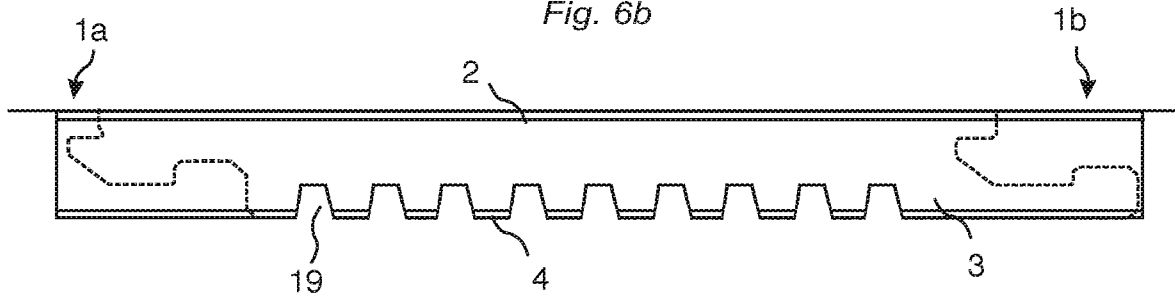


Fig. 6c

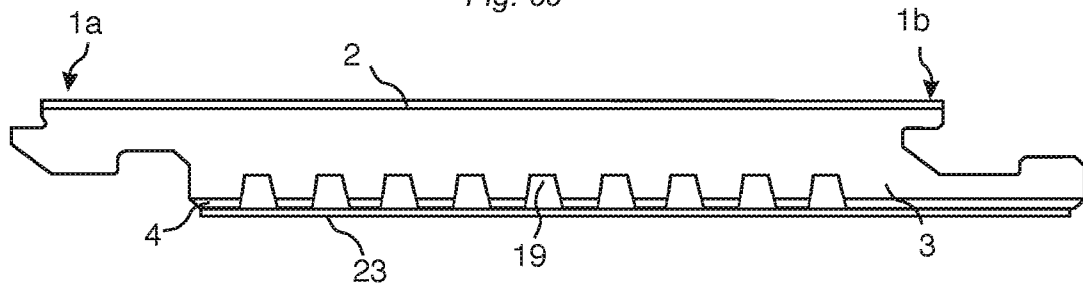


Fig. 6d

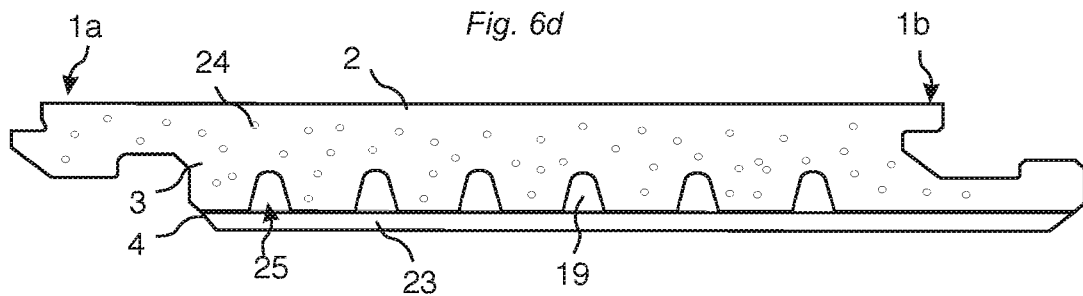


Fig. 6e

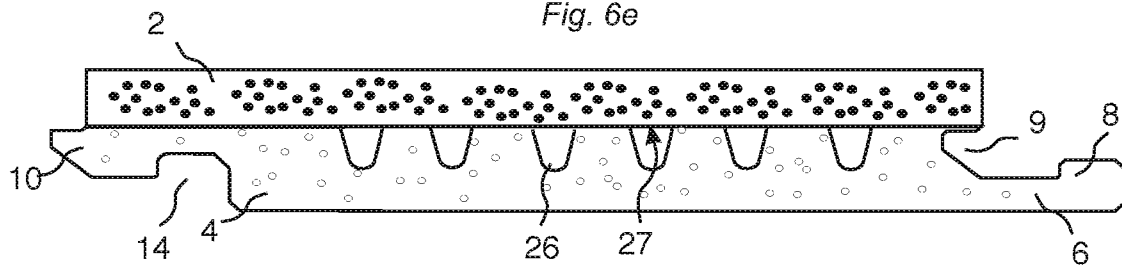


Fig.7a

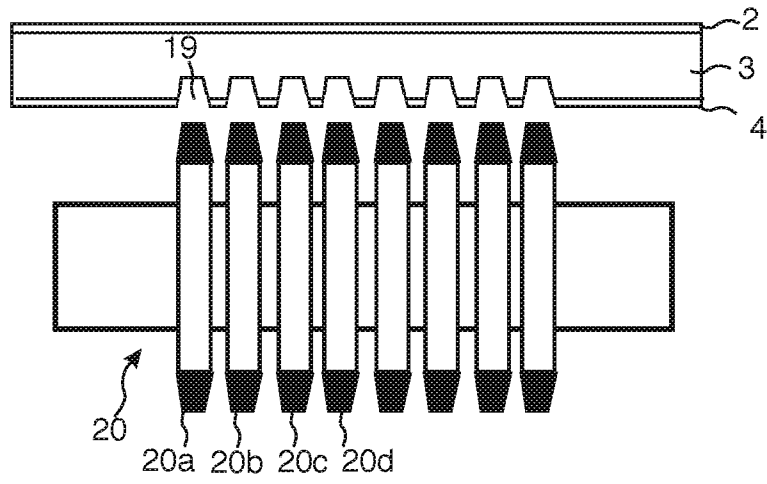


Fig.7b

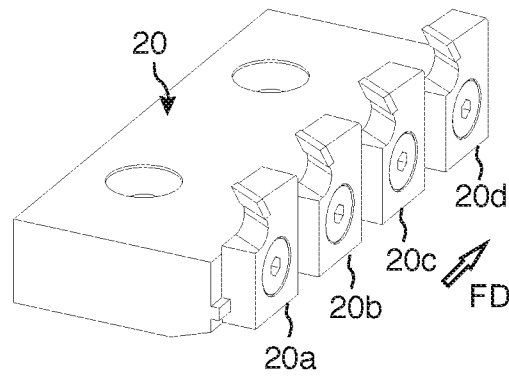


Fig.7c

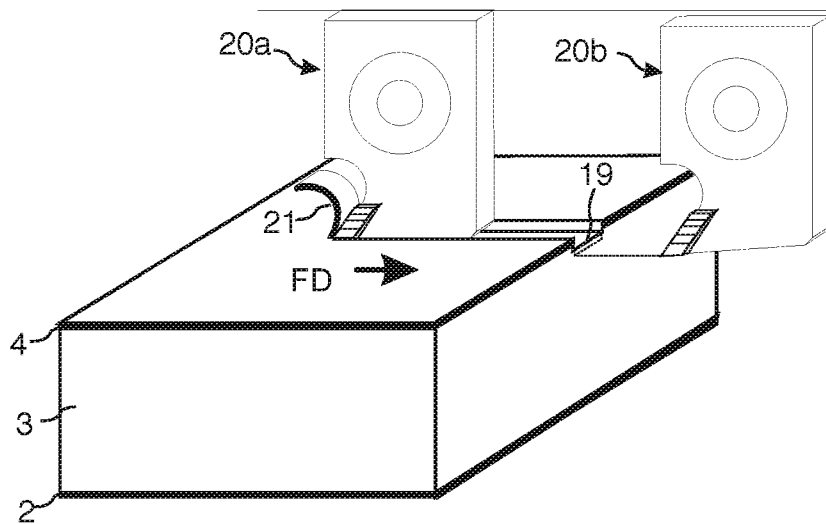


Fig. 8a

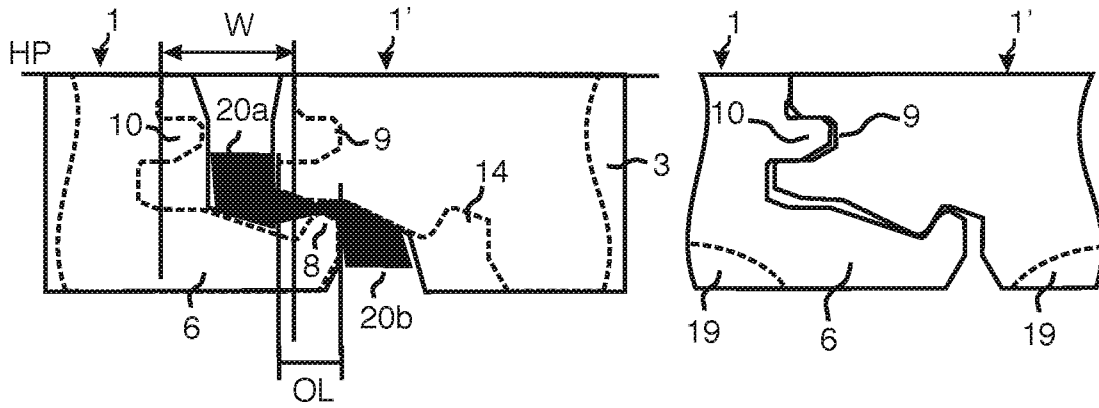


Fig. 8b


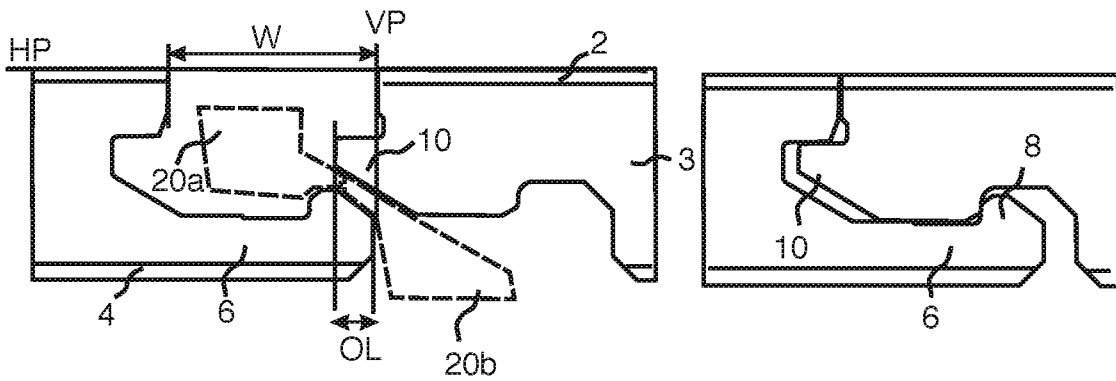


Fig. 8c

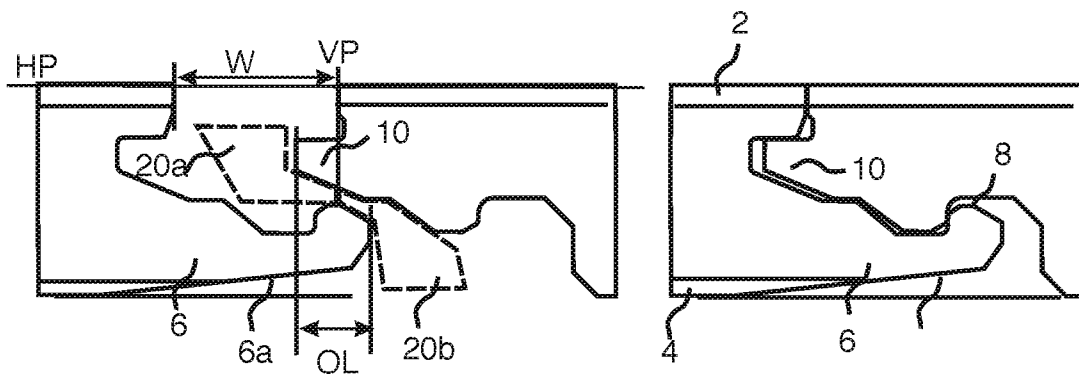

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2013/050837

A. CLASSIFICATION OF SUBJECT MATTER		
IPC: see extra sheet		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC: B27M, B32B, E04F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE, DK, FI, NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPO-Internal, PAJ, WPI data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2009065769 A2 (VAELINGE INNOVATION BELGIUM BV ET AL), 28 May 2009 (2009-05-28); page 29, line 1 - line 4; page 40, line 10 - line 22; page 41, line 4 - line 5; page 41, line 12 - line 13; page 42, line 2 - line 19; page 43, line 4 - line 6; page 45, line 15 - line 22; figures 8a-d; Example 1, Example 2 --	1-15
Y	Darco, Pervan, VA073a Zip Loc, September 13, 2011, ISSN 1533-0001, IPCOM000210869D. Retrieved from Epoqenet; Database XPIPCOM, Accession number XP013144910; page 16, line 34 - page 17, line 15; figure 14a --	1-15
Y	DE 10049172 A1 (HOCK DIETMAR), 11 April 2002 (2002-04-11); paragraph [0013]; figure 1; Detail 34 --	1-15
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
29-11-2013		29-11-2013
Name and mailing address of the ISA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. + 46 8 666 02 86		Authorized officer Örjan Nylund Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2013/050837

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, Y	US 20130047536 A1 (PERVAN DARKO), 28 February 2013 (2013-02-28); paragraphs [0011], [0012], [0015], [0017]; figures 14a,20a-b; Detail 19 --	1-15
X	GB 519198 A (HANS HAFELE), 19 March 1940 (1940-03-19); page 1, line 14 - line 17; page 1, line 70 - line 73 --	16, 17
A	JP H11324292 A (DANTANI PLYWOOD CO), 26 November 1999 (1999-11-26); abstract; figure 1c; Detail 11a --	1-17
A	JP 2000265652 A (DAIKEN TRADE & INDUSTRY), 26 September 2000 (2000-09-26); abstract; Detail 4 --	1-17
A	FI 21805 A (SVENSKA TAENDSTICKS AKTIEBOLAG), 10 January 1947 (1947-01-10); figures 4,5; Detail 18 -- -----	1-17

Continuation of: second sheet

International Patent Classification (IPC)

E04F 15/02 (2006.01)

B27M 3/04 (2006.01)

B32B 21/08 (2006.01)

E04F 15/04 (2006.01)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2013/050837

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

- 1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

- 2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

- 3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

The following separate inventions were identified:

1: Claims 1-8, 9-15, 16-17 directed to building panels (claims 1-8), a method to produce of floor panels (claims 9-15) and a wooden based floor panel (claims 16-17).

2: Claims 18-20 directed to a method to produce essentially flat floor panels.

- 1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
- 2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
- 3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
- 4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: **1-17**

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2013/050837

WO	2009065769 A2	28/05/2009	CN	101909836 A	08/12/2010
			EP	2242625 A2	27/10/2010
			JP	2011522138 A	28/07/2011
			KR	20100098414 A	06/09/2010
			NZ	586169 A	29/06/2012
			RU	2010125230 A	27/12/2011
			RU	2483867 C2	10/06/2013
			SG	186004 A1	28/12/2012
			US	8431054 B2	30/04/2013
			US	20100300030 A1	02/12/2010
DE	10049172 A1	11/04/2002	NONE		
US	20130047536 A1	28/02/2013	WO	2013032391 A1	07/03/2013
GB	519198 A	19/03/1940	NONE		
JP	H11324292 A	26/11/1999	NONE		
JP	2000265652 A	26/09/2000	NONE		
FI	21805 A	10/01/1947	NONE		