



(51) International Patent Classification:

H01L 21/768 (2006.01) *H01L 21/02* (2006.01)

(21) International Application Number:

PCT/US2018/021338

(22) International Filing Date:

07 March 2018 (07.03.2018)

(25) Filing Language:

English

(26) Publication Language:

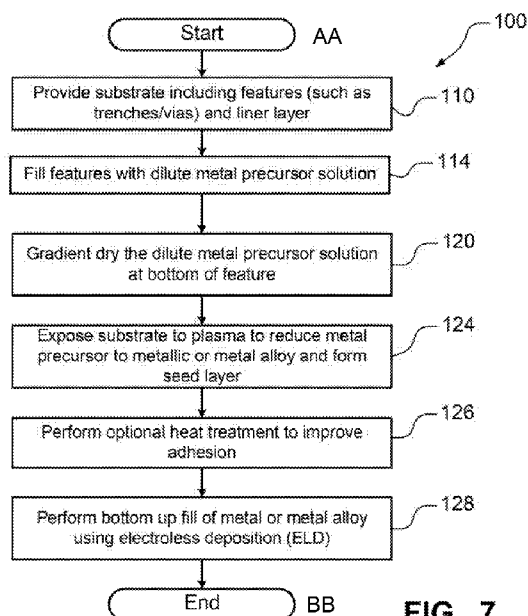
English

(30) Priority Data:

15/453,098 08 March 2017 (08.03.2017) US

(71) Applicant: **LAM RESEARCH CORPORATION**
[US/US]; 4650 Cushing Parkway, Fremont, California
94538 (US).(72) Inventors: **TAN, Samantha**; 5853 Tan Oak Drive, Fre-
mont, California 94555 (US). **VOLOSSKIY, Boris**; 5432
Bollinger Rd., San Jose, California 95129 (US). **KIM,****Taeseung**; 39224 Guardino Dr. #102, Fremont, California
94538 (US). **NALLA, Praveen**; 353 De Leon Ave., Fre-
mont, California 94539 (US). **TJOKRO, Novy**; 353 De
Leon Ave., Fremont, California 94539 (US). **KOLICS, Ar-
tur**; 9767 Reimers Way, Dublin, California 94568 (US).(74) Agent: **CHAPP, Jeffrey J.** et al.; HARNESS, DICKY &
PIERCE, P.L.C., P.O. Box 828, Bloomfield Hills, Michigan
48303 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: METHODS FOR WET METAL SEED DEPOSITION FOR BOTTOM UP GAPFILL OF FEATURES

**FIG. 7**

(57) **Abstract:** A method of depositing a metal seed for performing bottom-up gapfill of features of a substrate includes providing a substrate including a plurality of features; flowing a dilute metal precursor solution into the features, wherein the dilute metal precursor solution includes a metal precursor and a dilution liquid; evaporating the dilution liquid to locate the metal precursor at bottoms of the plurality of features; exposing the substrate to a plasma treatment to reduce the metal precursor to at least one of a metal or a metal alloy and to form a seed layer; performing a heat treatment on the substrate; and using a selective gapfill process to fill the features with a transition metal in contact with the seed layer.



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

METHODS FOR WET METAL SEED DEPOSITION FOR BOTTOM UP GAPFILL OF FEATURES

CROSS-REFERENCE TO RELATED APPLICATIONS

- 5 **[0001]** This application claims priority to U.S. Utility Application No. 15/453,098, filed on March 8, 2017. The entire disclosure of the above application is incorporated herein by reference.

FIELD

- 10 **[0002]** The present disclosure relates to substrate processing methods, and more particularly to substrate processing methods including wet metal seed deposition at bottoms of features of a substrate followed by bottom up gapfill of the features.

BACKGROUND

- 15 **[0003]** The background description provided here is for the purpose of generally presenting the context of the disclosure. Work of the presently named inventors, to the extent it is described in this background section, as well as aspects of the description that may not otherwise qualify as prior art at the time of filing, are neither expressly nor impliedly admitted as prior art against the present disclosure.
- 20 **[0004]** Substrates such as semiconductor wafers are produced by depositing, etching and patterning film layers. Deposition processes include physical vapor deposition (PVD), chemical vapor deposition (CVD) and atomic layer deposition (ALD). In some circumstances, a seed layer is deposited at bottoms of features such as trenches or vias. However, none of these deposition processes is able to
- 25 selectively deposit material on bottom surfaces of trenches or vias. These deposition processes can only perform conformal or non-selective seed deposition. Other disadvantages of these deposition processes include pinch-off at openings of the features and seams/roughness resulting from sidewall growth.

SUMMARY

[0005] A method of depositing a metal seed for performing bottom-up gapfill of features of a substrate includes providing a substrate including a plurality of features; flowing a dilute metal precursor solution into the features. The dilute metal precursor solution includes a metal precursor and a dilution liquid. The method includes evaporating the dilution liquid to locate the metal precursor at bottoms of the plurality of features; exposing the substrate to a plasma treatment to reduce the metal precursor to at least one of a metal or a metal alloy and to form a seed layer; performing a heat treatment on the substrate; and using a selective gapfill process to fill the features with a transition metal in contact with the seed layer.

[0006] In other features, the substrate includes a liner layer and the dilute metal precursor solution is applied to the liner layer. The liner layer is made of a material selected from a group consisting of titanium nitride (TiN), tungsten carbonitride (WCN), and tantalum nitride (TaN). The liner layer is made of a material selected from a group consisting of silicon dioxide, a metal, or a dielectric.

[0007] In other features, the transition metal is selected from a group consisting of nickel (Ni), cobalt (Co), copper (Cu), molybdenum (Mo), ruthenium (Ru), iridium (Ir), platinum (Pt), palladium (Pd) and tungsten (W). The at least one of the metal or the metal alloy is selected to catalytically react with the transition metal but not the liner layer. The selective gapfill process includes electroless deposition.

[0008] In other features, the dilution liquid comprises at least one of a carrier liquid and a solvent. The dilution liquid is water-free. The dilution liquid comprises a liquid selected from a group consisting of alcohol, ether, ester, perfluoro-ether. The dilution liquid comprises a liquid selected from a group consisting isopropyl alcohol (IPA) and ethyl alcohol (EtOH).

[0009] In other features, the features have openings having a width that is less than or equal to 10 nm. The features have openings having a width in a range from 7 to 9 nm. The features have openings having a width in a range from 4 to 7 nm. The seed layer has a thickness in a range from 2-4 nm. The heat treatment

comprises annealing at a temperature in a range from 200°C to 400°C. The heat treatment comprises annealing at a temperature in a range from 250°C to 350°C.

[0010] In other features, evaporating the dilution liquid includes exposing the substrate to a gradient dry process. The dilute metal precursor solution is at least one of deposited or condensed in the plurality of features using by capillary action.

[0011] Further areas of applicability of the present disclosure will become apparent from the detailed description, the claims and the drawings. The detailed description and specific examples are intended for purposes of illustration only and are not intended to limit the scope of the disclosure.

10 BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present disclosure will become more fully understood from the detailed description and the accompanying drawings, wherein:

[0013] FIG. 1 is a side cross-sectional view of an example of a substrate including features such as trenches or vias according to the present disclosure;

15 **[0014]** FIG. 2 is a side cross-sectional view of an example of the substrate of FIG. 1 with a liner layer according to the present disclosure;

[0015] FIG. 3 is a side cross-sectional view of an example of the substrate of FIG. 2 and a dilute metal precursor solution at least partially filling the features according to the present disclosure;

20 **[0016]** FIG. 4 is a side cross-sectional view of an example of the substrate of FIG. 3 after drying according to the present disclosure;

[0017] FIG. 5 is a side cross-sectional view of an example of the substrate of FIG. 3 after exposure to plasma according to the present disclosure;

25 **[0018]** FIG. 6 is a side cross-sectional view of an example of the substrate of FIG. 3 after bottom-up, selective gapfill of features according to the present disclosure; and

[0019] FIG. 7 is an example of an example of a flowchart for bottom up gapfill of features according to the present disclosure.

[0020] In the drawings, reference numbers may be reused to identify similar and/or identical elements.

DETAILED DESCRIPTION

[0021] Deposition methods described herein are used to deposit a metal seed layer at bottoms of features such as trenches or vias for subsequent selective metal gapfill. In some examples, the substrate includes a liner or barrier layer. As used herein, the term selective gapfill refers to deposition of metal on some exposed materials (such as on a metal seed layer) and not on other exposed layers (such as a liner layer or feature sidewalls). In some examples, the metal seed layer has a thickness in a range from of 2-4 nm localized at the bottoms of the features. In some examples, the metal seed layer is used to grow the transition metal by electroless deposition (ELD) or other selective gapfill processes can be used.

[0022] The method includes condensing or flowing a dilute metal precursor solution over the substrate to fill the features. In some examples, the features are filled by capillary action of liquids. The dilute metal precursor solution includes a metal precursor and a liquid carrier or solvent. Once the metal precursor solution is located in the features, the solvent or carrier liquid is removed by evaporation to allow the metal precursor to concentrate and deposit only at the bottoms of the features.

[0023] The substrate is exposed to plasma treatment in a plasma chamber to reduce the metal precursor to a metal or metal alloy and to form a seed layer. A heat treatment step may be used to improve precursor adhesion to an underlying barrier layer. In some examples, the heat treatment step includes annealing the substrate at a temperature in a range between 200° C and 400° C. In some examples, the heat treatment step includes annealing the substrate at a temperature in a range between 250° C and 350° C. In some examples, the heat treatment step is performed in a reducing atmosphere including a reducing gas mixture. In some examples, the reducing gas mixture includes molecular hydrogen (H₂), molecular hydrogen and molecular nitrogen (H₂/N₂), or molecular

hydrogen and ammonia (H₂/NH₃) to convert the metal precursor to the metallic form.

[0024] In some examples, the substrate with the activated metal/metal alloy seed layer located at the bottom of the features is transported to an electroless deposition (ELD) tool for a selective deposition process to achieve bottom-up gapfill in the features. The ELD process is selective since only the reduced precursor at the bottoms of the features is catalytically active for the plating process. In some examples, selective bottom-up fill can be performed using electrochemical plating (ECP), chemical vapor deposition (CVD) or other process.

[0025] The deposition method according to the present disclosure can be used for transition metals such as nickel (Ni), cobalt (Co), copper (Cu), molybdenum (Mo), ruthenium (Ru), iridium (Ir), platinum (Pt), palladium (Pd) and tungsten (W). In some examples, the deposition method is used for metal gapfill in contact holes and middle of line (MOL) and BEOL trenches/vias. In some examples, the liner layer includes titanium/titanium nitride (TiN), tungsten carbonitride (WCN), or tantalum/tantalum nitride (TaN). Alternately, the deposition process can be used with oxide sidewalls or with any other metal or dielectric barrier materials.

[0026] The solvent or carrier liquid that is selected will depend on the metal precursor that is used. In some examples, the solvent or carrier liquid for the metal precursor is water-free to minimize formation of metal oxide during the subsequent processing. In some examples, the solvent or carrier liquid has low surface tension and high solubility for the metal precursors, such as alcohols (e.g. isopropyl alcohol (IPA), ethyl alcohol (EtOH)), ethers, esters, perfluoro-ethers, etc.

[0027] In some examples, the metal precursor comprises a stable salt (inorganic or organometallic) at room temperature. In some examples, the metal precursor does not decompose or sublime when exposed to ambient temperatures and pressures. In some examples, the metal precursor is soluble in low boiling point organic solvents (< 80°C to 90°C). In some examples, the solvents have a low boiling point (e.g. less than 100°C), low surface tension to enable capillary filling of narrow trenches and holes (e.g. less than 10 nm in width, in a range from 7-9 nm or in a range from 4-7 nm, etc.) and no water or low water content. In some examples, a concentration of salt in the solvent does not exceed a solubility

constant (K_{sp}) of salt in the final 10-20% of volume in the trench to prevent early precipitation onto sidewalls.

5 **[0028]** In some examples, a gradient drying process is used to concentrate the organometallic or salt at bottoms of the features without leaving metallic deposits on the sidewalls. As used herein, the gradient dry process includes ramping or increasing temperature at one or more predetermined rates over a predetermined period. In some examples, a reduction process that is used to convert organometallic or salt to metal does not damage a liner/barrier/substrate material.

10 **[0029]** Referring now to FIGs. 1-3, processing of a substrate 50 is shown. In FIG. 1, the substrate 50 is shown to include features 52 such as trenches or vias. The features 52 are defined in a layer 56 that is arranged on one or more underlying layers 54. In some examples, the layer 56 may be made of silicon dioxide (SiO_2) or another suitable film material. In some examples, the features 52 have a width that is less than or equal to 10 nm.

15 **[0030]** In FIG. 2, a liner layer 60 is deposited on the layer 56. The liner layer 60 may be deposited on the layer 56 using any suitable approach including chemical vapor deposition (CVD), atomic layer deposition (ALD), plasma enhanced CVD (PECVD), plasma enhanced ALD (PEALD), or any other suitable process.

20 **[0031]** In FIG. 3, a dilute metal precursor solution 64 is used to fill the features 52. In some examples, the dilute metal precursor solution 64 includes a metal precursor that is mixed with a solvent or carrier liquid. In some examples, the metal precursor includes a metal precursor that is used to form a transition metal. In some examples, the dilute metal precursor solution 64 fills the features 52 by capillary action.

25 **[0032]** Referring now to FIGs. 4-6, additional processing of the substrate 50 is performed. In FIG. 4, the substrate 50 is subjected to heat or another process such as vacuum to evaporate the solvent or carrier liquid from the dilute metal precursor solution 64. In some examples, a gradient dry process is used. The gradient dry process involves slowly ramping up a temperature of the substrate to
30 cause evaporation of the dilution liquid and to slowly lower a meniscus and reduce metal buildup on sidewalls of the features. For example, with an isopropyl alcohol

(IPA) carrier, the temperature is slowly ramped up from room temperature to 60°C at a rate of 1-2°C/min to concentrate the metal precursor at the bottom of the feature.

[0033] After evaporation is complete, the metal precursor 68 remains at a bottom of the features. In FIG. 5, the substrate 50 is subjected to a reducing plasma process to reduce the metal precursor 68 to a metal or metal alloy and form a seed layer 70. In some examples, the reducing plasma process uses molecular hydrogen gas. In some examples, the plasma process includes a capacitively coupled plasma (CCP) process or an inductively coupled plasma (ICP) process. In another example, the reduction process can be moved to an annealing chamber with H₂/N₂ or NH₃/H₂ at 200°C to 400°C for a predetermined period. In some examples, the predetermined period is in a range from 2-20 minutes to completely convert the metal precursor to metallic form.

[0034] In some examples, the seed layer has a thickness in a range from 2 to 4 nm. In FIG. 6, electroless deposition (ELD) or another selective gapfill process is performed to fill the features with a transition metal 72.


[0035] Referring now to FIG. 7, a method 100 for forming a seed layer and bottom-up selective gapfill of features with a transition metal is shown. At 110, a substrate is provided that includes features such as trenches or vias. In some examples, the substrate includes a liner layer. At 114, the features of the substrate are filled with a dilute metal precursor solution.

[0036] At 120, the carrier liquid or solvent is evaporated. In some examples, a gradient dry process is used. At 124, the substrate is exposed to plasma to reduce the metal precursor to a metal or metal alloy and form a seed layer. At 126, an optional heat treatment such as annealing may be performed to improve adhesion.

[0037] At 128, selective bottom-up gapfill of the features is performed using electroless deposition (ELD) or another selective gapfill process is used. In some examples, an electroless deposition method described in U.S. Patent No. 9,287,183 is used to fill the features, although other electroless deposition methods may be used. In some examples, an electroless deposition tool shown

and described in U.S. Patent No. 8,906,446 or U.S. Patent No. 6,913,651 is used, although other electroless deposition tools may be used.

[0038] In one example, features such as trenches are defined in a silicon dioxide (SiO₂) layer. A tungsten carbonitride (WCN) liner layer is deposited. A cobalt salt precursor such as cobalt (II) chloride (CoCl₂) is diluted in isopropyl alcohol (IPA) and applied in the features by capillary action. The substrate is gradient dried from top surfaces thereof such that the IPA evaporates and the cobalt salt precursor condenses at bottoms of the features. The substrate is exposed to a plasma process using plasma gas including molecular hydrogen (H₂). The plasma reduces the cobalt salt precursor to cobalt metal and forms a seed layer in the following reaction:



Then, cobalt metal is deposited in the features using a bottom-up electroless fill process.

[0039] The foregoing description is merely illustrative in nature and is in no way intended to limit the disclosure, its application, or uses. The broad teachings of the disclosure can be implemented in a variety of forms. Therefore, while this disclosure includes particular examples, the true scope of the disclosure should not be so limited since other modifications will become apparent upon a study of the drawings, the specification, and the following claims. It should be understood that one or more steps within a method may be executed in different order (or concurrently) without altering the principles of the present disclosure. Further, although each of the embodiments is described above as having certain features, any one or more of those features described with respect to any embodiment of the disclosure can be implemented in and/or combined with features of any of the other embodiments, even if that combination is not explicitly described. In other words, the described embodiments are not mutually exclusive, and permutations of one or more embodiments with one another remain within the scope of this disclosure.

CLAIMS

What is claimed is:

1. A method of depositing a metal seed for performing bottom-up gapfill of features of a substrate, comprising:
 - 5 providing a substrate including a plurality of features;
flowing a dilute metal precursor solution into the features, wherein the dilute metal precursor solution includes a metal precursor and a dilution liquid;
evaporating the dilution liquid to locate the metal precursor at bottoms of the plurality of features;
 - 10 exposing the substrate to a plasma treatment to reduce the metal precursor to at least one of a metal or a metal alloy and to form a seed layer only at the bottoms of the plurality of features;
performing a heat treatment on the substrate; and
using a selective gapfill process to fill the features with a transition metal in
15 contact with the seed layer and not other exposed portions of the plurality of features.
2. The method of claim 1, wherein the substrate includes a liner layer and the dilute metal precursor solution is applied to the liner layer.
3. The method of claim 2, wherein the liner layer is made of a material
20 selected from a group consisting of titanium nitride (TiN), tungsten carbonitride (WCN), and tantalum nitride (TaN).
4. The method of claim 2, wherein the liner layer is made of a material selected from a group consisting of silicon dioxide, a metal, or a dielectric.
5. The method of claim 1, wherein the transition metal is selected from a
25 group consisting of nickel (Ni), cobalt (Co), copper (Cu), molybdenum (Mo), ruthenium (Ru), iridium (Ir), platinum (Pt), palladium (Pd) and tungsten (W).

6. The method of claim 2, wherein the at least one of the metal or the metal alloy is selected to catalytically react with the transition metal but not the liner layer.
7. The method of claim 1, wherein the selective gapfill process includes
5 electroless deposition.
8. The method of claim 1, wherein the dilution liquid comprises at least one of a carrier liquid and a solvent.
9. The method of claim 1, wherein the dilution liquid is water-free.
10. The method of claim 1, wherein the dilution liquid comprises a liquid
10 selected from a group consisting of alcohol, ether, ester, perfluoro-ether.
11. The method of claim 1, wherein the dilution liquid comprises a liquid selected from a group consisting isopropyl alcohol (IPA) and ethyl alcohol (EtOH).
12. The method of claim 1, wherein the features have openings having a width that is less than or equal to 10 nm.
- 15 13. The method of claim 1, wherein the features have openings having a width in a range from 7 to 9 nm.
14. The method of claim 1, wherein the features have openings having a width in a range from 4 to 7 nm.
15. The method of claim 1, wherein the seed layer has a thickness in a range
20 from 2-4 nm.
16. The method of claim 1, wherein the heat treatment comprises annealing at a temperature in a range from 200°C to 400°C.

17. The method of claim 1, wherein the heat treatment comprises annealing at a temperature in a range from 250°C to 350°C.

18. The method of claim 1, wherein evaporating the dilution liquid includes exposing the substrate to a gradient dry process.

5 19. The method of claim 1, wherein the dilute metal precursor solution is at least one of deposited or condensed in the plurality of features using by capillary action.

20. A method of depositing a metal seed for performing bottom-up gapfill of features of a substrate, comprising:

10 providing a substrate including a plurality of features;
 flowing a dilute metal precursor solution into the features, wherein the dilute metal precursor solution includes a metal precursor and a dilution liquid;
 evaporating the dilution liquid to locate the metal precursor at bottoms of the plurality of features;
15 exposing the substrate to a plasma treatment to reduce the metal precursor to at least one of a metal or a metal alloy and to form a seed layer;
 performing a heat treatment on the substrate; and
 using a selective gapfill process to fill the features with a transition metal in contact with the seed layer,
20 wherein evaporating the dilution liquid includes exposing the substrate to a gradient dry process.

21. The method of claim 20, wherein the substrate includes a liner layer and the dilute metal precursor solution is applied to the liner layer.

22. The method of claim 20, wherein the transition metal is selected from a
25 group consisting of nickel (Ni), cobalt (Co), copper (Cu), molybdenum (Mo), ruthenium (Ru), iridium (Ir), platinum (Pt), palladium (Pd) and tungsten (W).

23. The method of claim 20, wherein the selective gapfill process includes electroless deposition.

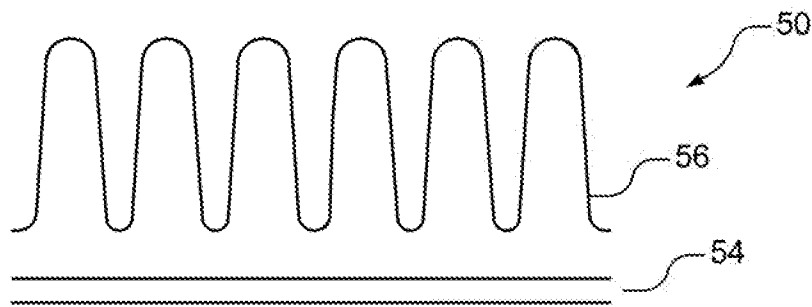
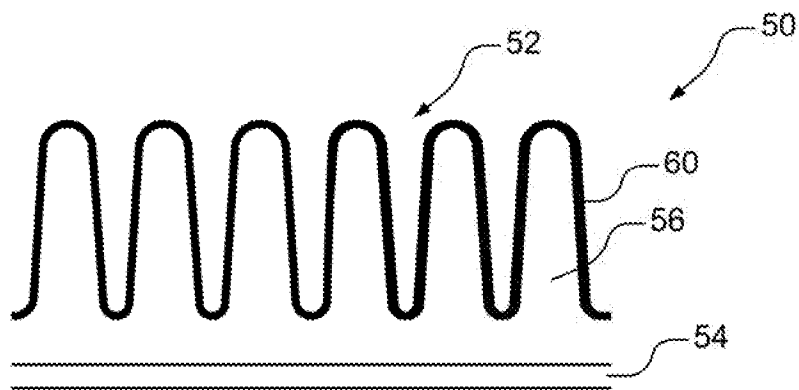
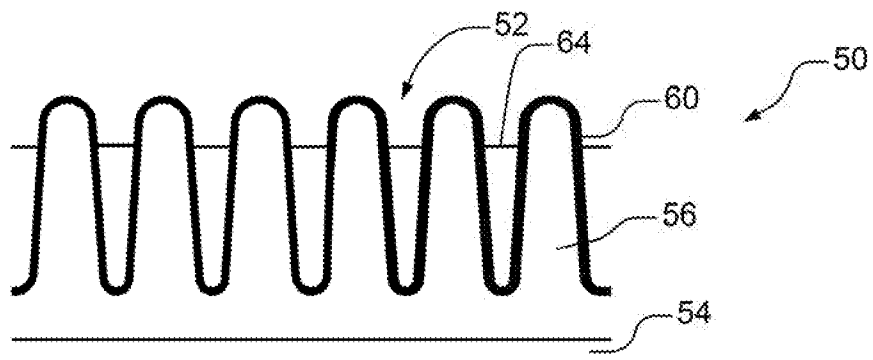
24. The method of claim 20, wherein the dilution liquid comprises at least one of a carrier liquid and a solvent.

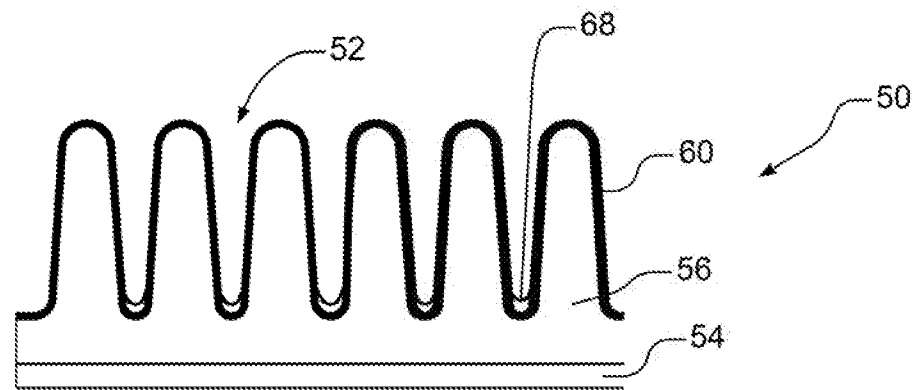
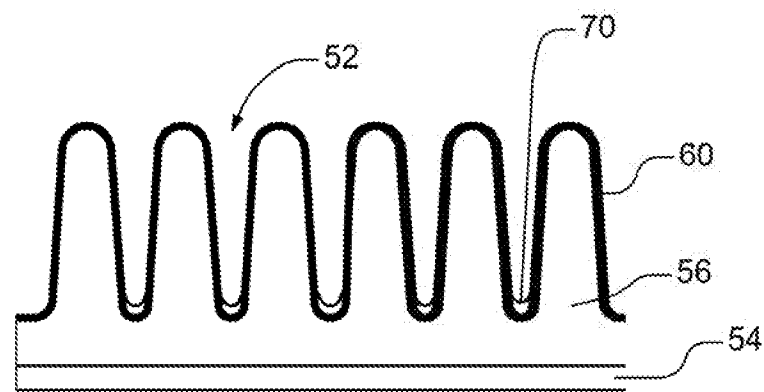
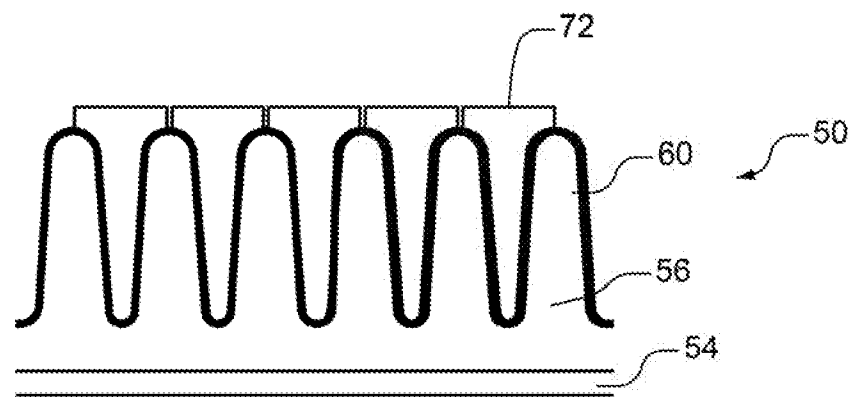
25. The method of claim 20, wherein the dilution liquid is water-free.

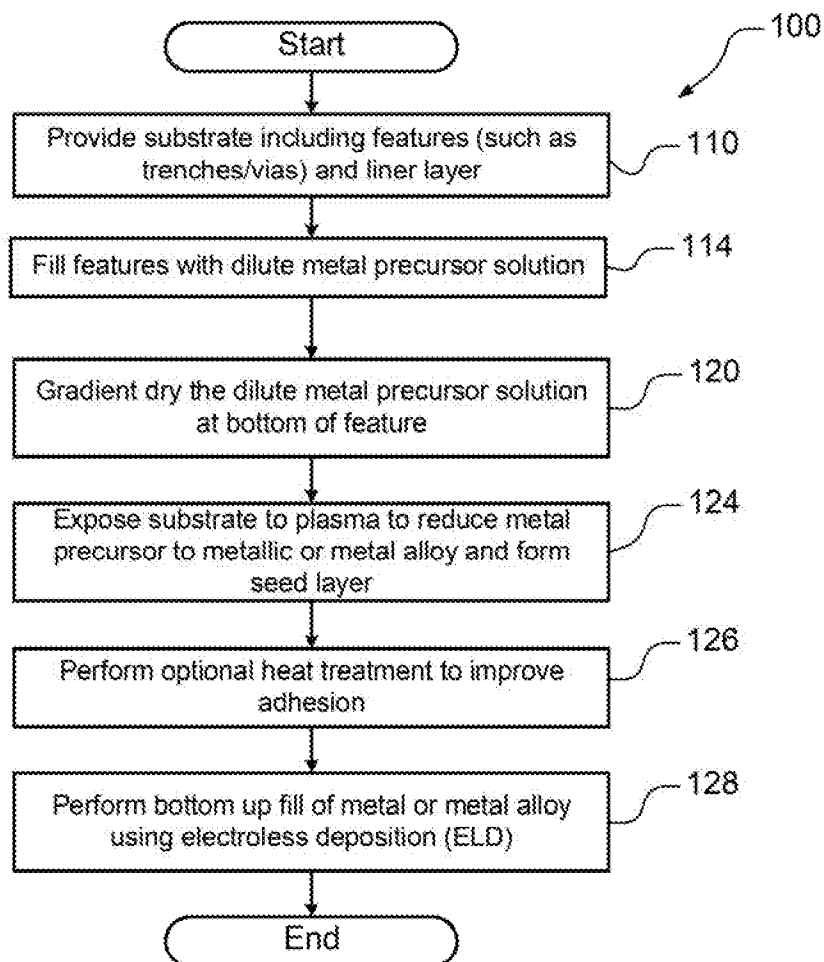
26. The method of claim 20, wherein the dilution liquid comprises a liquid
5 selected from a group consisting of alcohol, ether, ester, perflouro-ether.

27. The method of claim 20, wherein the dilution liquid comprises a liquid selected from a group consisting isopropyl alcohol (IPA) and ethyl alcohol (EtOH).

28. The method of claim 20, wherein the dilute metal precursor solution is at
10 least one of deposited or condensed in the plurality of features using by capillary action.

**FIG. 1****FIG. 2****FIG. 3**

**FIG. 4****FIG. 5****FIG. 6**

**FIG. 7**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/021338**A. CLASSIFICATION OF SUBJECT MATTER****H01L 21/768(2006.01)i, H01L 21/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
H01L 21/768; B32B 3/30; H01L 23/48; H01L 21/762; H01L 21/443; C23C 16/00; H01L 21/02Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & keywords: fill, transition metal, contact, seed layer, substrate trench**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015-0076711 A1 (NTHDEGREE TECHNOLOGIES WORLDWIDE INC.) 19 March 2015 See paragraphs [0052]-[0054] and figures 2-4.	1-28
A	US 2009-0226611 A1 (KENJI SUZUKI et al.) 10 September 2009 See paragraphs [0045]-[0048] and figure 3A.	1-28
A	US 2014-0199523 A1 (3M INNOVATIVE PROPERTIES COMPANY) 17 July 2014 See paragraph [0083] and figures 4A-4C.	1-28
A	US 2016-0190008 A1 (NOVELLUS SYSTEMS, INC.) 30 June 2016 See paragraphs [0063]-[0080] and figures 2-3B.	1-28
A	US 7074690 B1 (VISHAL GAURI et al.) 11 July 2006 See column 4, line 39 - column 6, line 53 and figures 1a-2.	1-28



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 June 2018 (20.06.2018)

Date of mailing of the international search report

20 June 2018 (20.06.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

PARK, Hye Lyun

Telephone No. +82-42-481-3463



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/021338

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0076711 A1	19/03/2015	US 2014-0138846 A1 US 8940627 B2 US 9123705 B2	22/05/2014 27/01/2015 01/09/2015
US 2009-0226611 A1	10/09/2009	CN 101965636 A JP 2011-513983 A JP 5702154 B2 KR 10-1553424 B1 KR 10-2010-0124807 A TW 200947559 A TW I545653 B US 8247030 B2 WO 2009-109934 A1	02/02/2011 28/04/2011 15/04/2015 15/09/2015 29/11/2010 16/11/2009 11/08/2016 21/08/2012 11/09/2009
US 2014-0199523 A1	17/07/2014	CN 102131958 A CN 102131958 B EP 2304078 A2 EP 2304078 B1 EP 2620523 A2 EP 2620523 A3 EP 2623632 A2 EP 2623632 A3 JP 2011-526844 A KR 10-2011-0049777 A US 2011-0111182 A1 US 8703232 B2 WO 2010-002679 A2 WO 2010-002679 A3	20/07/2011 25/12/2013 06/04/2011 15/04/2015 31/07/2013 18/01/2017 07/08/2013 18/01/2017 20/10/2011 12/05/2011 12/05/2011 22/04/2014 07/01/2010 03/06/2010
US 2016-0190008 A1	30/06/2016	CN 104272440 A CN 104272440 B CN 104272441 A JP 2011-035366 A JP 2015-029097 A JP 2015-512568 A JP 2015-514160 A JP 6195898 B2 JP 6273257 B2 KR 10-1327258 B1 KR 10-1340793 B1 KR 10-2011-0014069 A KR 10-2012-0005992 A KR 10-2013-0071447 A KR 10-2014-0141686 A KR 10-2014-0143202 A KR 10-2015-0013086 A SG 168490 A1 SG 190631 A1 TW 201105813 A	07/01/2015 22/02/2017 07/01/2015 17/02/2011 12/02/2015 27/04/2015 18/05/2015 13/09/2017 31/01/2018 08/11/2013 11/12/2013 10/02/2011 17/01/2012 28/06/2013 10/12/2014 15/12/2014 04/02/2015 28/02/2011 28/06/2013 16/02/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/021338

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7074690 B1	11/07/2006	TW 201405707 A	01/02/2014
		TW 201405781 A	01/02/2014
		TW 201519317 A	16/05/2015
		TW I495756 B	11/08/2015
		TW I602283 B	11/10/2017
		US 2011-0159690 A1	30/06/2011
		US 2012-0009785 A1	12/01/2012
		US 2012-0115329 A1	10/05/2012
		US 2013-0171822 A1	04/07/2013
		US 2013-0302980 A1	14/11/2013
		US 2013-0330926 A1	12/12/2013
		US 2015-0024592 A1	22/01/2015
		US 2015-0056803 A1	26/02/2015
		US 2016-0071764 A9	10/03/2016
		US 2017-0278749 A1	28/09/2017
		US 8119527 B1	21/02/2012
		US 8124531 B2	28/02/2012
		US 8435894 B2	07/05/2013
		US 8835317 B2	16/09/2014
		US 9034768 B2	19/05/2015
		US 9240347 B2	19/01/2016
		US 9548228 B2	17/01/2017
		US 9653353 B2	16/05/2017
		WO 2013-148444 A1	03/10/2013
		WO 2013-148880 A1	03/10/2013
		KR 10-2016-0028359 A	11/03/2016
		TW 201619428 A	01/06/2016
		US 2014-0017904 A1	16/01/2014
		US 2015-0004806 A1	01/01/2015
		US 7524735 B1	28/04/2009
		US 7582555 B1	01/09/2009
		US 7629227 B1	08/12/2009
		US 7888233 B1	15/02/2011
		US 7888273 B1	15/02/2011
		US 7915139 B1	29/03/2011
		US 8187951 B1	29/05/2012
		US 8481403 B1	09/07/2013
		US 8580697 B1	12/11/2013
		US 8809161 B2	19/08/2014
		US 9245739 B2	26/01/2016
		US 9257302 B1	09/02/2016