




(86) **Date de dépôt PCT/PCT Filing Date:** 2005/12/08
(87) **Date publication PCT/PCT Publication Date:** 2006/06/15
(45) **Date de délivrance/Issue Date:** 2017/02/14
(85) **Entrée phase nationale/National Entry:** 2007/05/17
(86) **N° demande PCT/PCT Application No.:** SE 2005/001877
(87) **N° publication PCT/PCT Publication No.:** 2006/062480
(30) **Priorité/Priority:** 2004/12/08 (SE0402998-9)

(51) **Cl.Int./Int.Cl. A61B 5/0484** (2006.01)
(72) **Inventeurs/Inventors:**
OLSSON, OLLE, SE;
NIELZEN, SOEREN, SE;
FRISTEDT NEHLSTEDT, SARA, SE;
KAELLSTRAND, JOHAN, SE
(73) **Propriétaire/Owner:**
SENSODETECT AKTIEBOLAG, SE
(74) **Agent:** G. RONALD BELL & ASSOCIATES

(54) **Titre : SYSTEME ET METHODE DE DIAGNOSTIC DE TROUBLES DU TRONC CEREBRAL**
(54) **Title: SYSTEM AND METHOD FOR DIAGNOSIS OF BRAINSTEM DISORDERS**

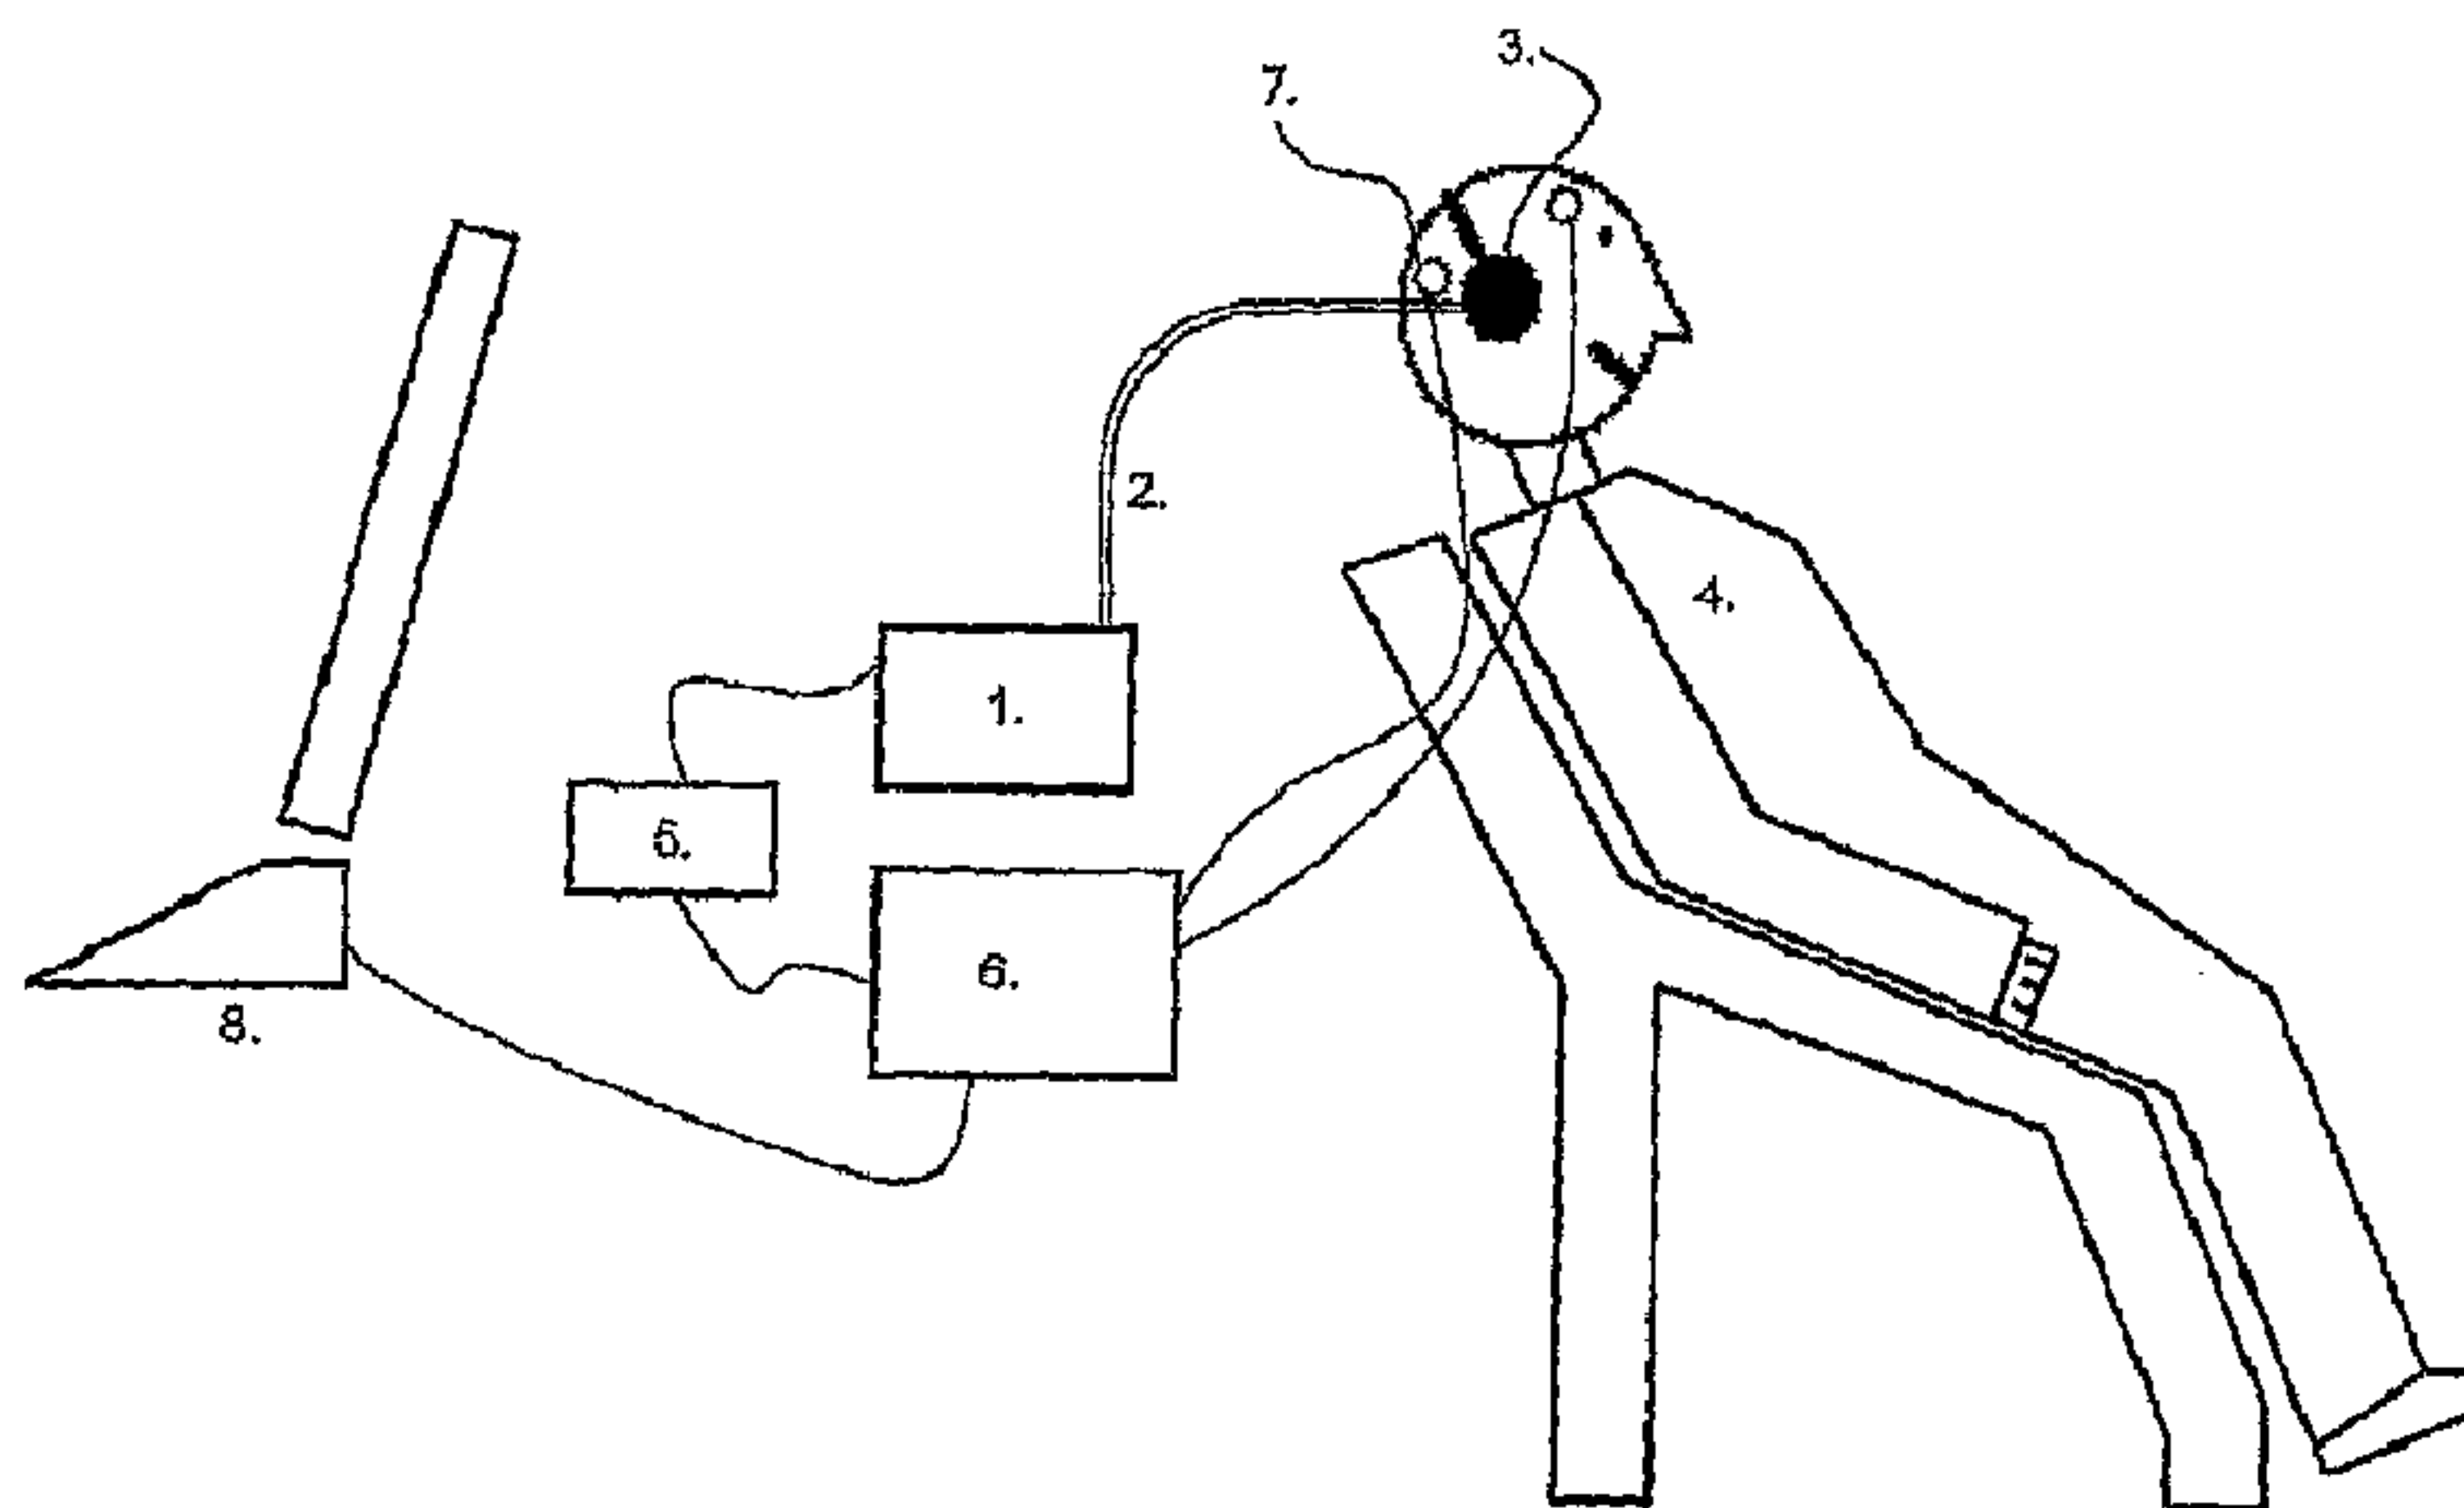

(57) **Abrégé/Abstract:**

A system and method for detection of a brainstem disorder, such as schizophrenia, by means of brainstem audiometry is disclosed. A subject's responses on the physical properties of sound; frequency, time and amplitude are being detected. Sound



(57) Abrégé(suite)/Abstract(continued):

stimuli are being presented, via a communication element through a hearing organ to the subject. Elements are attached to the subject for measurement of the subject's electrophysiological brain activity. Simultaneously, as the mentioned sound stimuli are presented to the subject a trig signal is sent out from the organ for generation of stimuli, via a trig box, further to an organ for registration of the electro-physiological brain activity in the subject, whereafter mentioned electrophysiological brain activity is stored and imaged, in computer equipment for determination of a brainstorm disorder in the subject.

ABSTRACT

A system and method for detection of a brainstem disorder, such as schizophrenia, by means of brainstem audiometry is disclosed. A subject's responses on the physical properties of sound; frequency, time and amplitude are being detected. Sound stimuli are being presented, via a communication element through a hearing organ to the subject. Elements are attached to the subject for measurement of the subject's electrophysiological brain activity. Simultaneously, as the mentioned sound stimuli are presented to the subject a trig signal is sent out from the organ for generation of stimuli, via a trig box, further to an organ for registration of the electro-physiological brain activity in the subject, whereafter mentioned electrophysiological brain activity is stored and imaged, in computer equipment for determination of a brainstorm disorder in the subject.

SYSTEM AND METHOD FOR DIAGNOSIS OF BRAINSTEM DISORDERS

FIELD OF THE INVENTION

The present invention pertains to a system for diagnosis of brainstem disorders, such as schizophrenia, and particularly to a method of using said system in respect of diagnosis of brainstem disorders, such as schizophrenia.

BACKGROUND OF THE INVENTION

Disorders of the nervous system are a growing concern. One area of nervous disorders are brainstem disorders. One such disorder is schizophrenia - a hereditary disease - which is a disruption in the nerve transmission within and between all systems in the nervous system which handle the electrical representation of the tactile sense, vision, hearing, thinking and motor functions. The origin of the disease is hitherto unknown.

Today there are no established, objective measures for determining schizophrenia. Clinical diagnostics, which means clinical observation and evaluation of the patient's symptoms is most commonly used to diagnose schizophrenia.

Psychological tests are being used, but these measure general functions which are not specific for schizophrenia. A vast number of visual and psychological tests of perception are described in the literature but these are solely of scientific interest and are not being used clinically. Furthermore, no tests available today have sufficiently predictive abilities regarding schizophrenia.

By using several psychological functioning tests a prediction for schizophrenia at below 70% can be achieved. This means that in 70% of the cases the schizophrenic-typical test results leads to a diagnosis later. Thus the specificity is still rather uncertain.

Diagnostic methods at hand today are very time consuming. Regarding forensic psychiatry a process of at least 30 working days and an investigation team comprising at least six professionals is needed to set a more reliable diagnosis. Admissions with months of observations and investigations are common procedure and sometimes the diagnosis can be established only after years of follow-ups in the non-institutional care. In conclusion, today diagnoses are established by means of traditional psychiatric observation, a time consuming process which leads to a much more severe disease. Thus, with today's diagnostic methods it is most frequently too late for efficient therapeutic treatment.

Organic alterations, today measurable by means of neuro-imaging techniques, reflect late physiological effects of the disease. The psychological cognitive tests that are being used in diagnostics measure frontal lobe dysfunction and word-tests indicate temporal

-2-

lobe dysfunction, which both are late processes too. Psychological tests are more aimed at diagnosing dementia than schizophrenia.

Electrophysiology can give some information for example by means of P300. P300 is a positive wave in the electroencephalogram (EEG) which correlates with a large number
5 of repeated stimuli presented through the hearing or visual modalities. It is claimed to be an expression of the nervous system's regulation of attentiveness . However, the variation within this measure obtained is far too large to obtain diagnostic reliability for schizophrenia and the need of more precise instruments for diagnostic purposes is acute. To obtain an objective measure on the early schizophrenia, specific stimulation and ascertained
10 correlation between the results and other diagnostic measures of the disease are needed. The majority of patents regarding schizophrenia are based on biochemical and genetic models and practically oriented clinical test is not disclosed.

In patent WO-AI-03026500 a psycho-physiological test for diagnosis of schizophrenia is disclosed. The document describes a device and method for measurement
15 of binocular rivalry. This psycho-physiological test demands the subject's active participation as reflected by decision-making and pushing a button, and thus it cannot be regarded being truly physiologically objective. This issue is of uttermost importance, since it might interfere with the perceptual process.

The state of the art refers to the usage of simple sound stimulation, such as click
20 trains, with identical click or pulse trains with isolated differing pulses, whereby the brain reaction to difference is recorded, to obtain electrophysiological brain (cortex) reading in respect of schizophrenia diagnosis. This is called MMN (MisMatch Negativity) . The time span used in MMN is in the interval 80 to 300 ms .

US 5,954,667 discloses a device for derivation of acoustically evoked brain
25 potentials. The triggering mentioned in US 5,954,667 concerns the generation of a sequence of clicks when the device is activated by a finger operable switching action. Therefore, the measurement of brain activity occurs during a longer time and not simultaneously as the sound stimulation. Every click sound in US 5,954,667 does not release a new reading of brain activity. Therefore, the device according to US 5,954,667 is
30 not capable of detecting, and diagnosing, brain disorders, such as schizophrenia, but only capable of controlling the hearing in subjects, such as a child, incapable of actively responding to sound stimuli.

Other documents disclosing the state of the art are the two articles; "Novelty-elicited mismatch negativity in patients with schizophrenia on admission and discharge", Journal

-3-

of Psychiatry & Neuroscience , vol 26, nr 3, 2001, pages 235 to 246; and Nisad, Schizophrenia Research, Research News, March 2003.

Hence, an improved system, and a method thereof, for diagnosis of brainstem disorders, such as schizophrenia, would be advantageous and in particular a system
5 allowing for a testing procedure that does not rely on any cognitive effort from the subject would be advantageous. Also, specificity and reliability of the diagnosis should be more advantageous.

SUMMARY OF THE INVENTION

10 Accordingly, the present invention preferably seeks to mitigate, alleviate or eliminate one or more of the above-identified deficiencies in the art and disadvantages such as the above-identified, but not limited to, singly or in any combination and solves the above mentioned issues such, but not exclusively limited to these issues, by providing systems, and methods according to the appended patent claims.

15 As an aspect of the present invention, there is provided a system, for detection of brainstem disorders in a subject, configured to detect the subject's response to sounds, comprising an apparatus for stimuli generation, configured to generate sound stimuli, a communication element, communicating sound stimuli from said apparatus for sound
generating device to the subject, detection elements attachable to the subject and
20 configured to detect electrophysiological brainstem activity in response to physical properties of said sound stimuli, an apparatus adapted for analysis and storage of the detected electrophysiological brainstem activity through said detection elements attachable to the subject, wherein said sound stimuli have varied physical properties in frequency, time and amplitude, and that said system comprises a triggering device, wherein said apparatus
25 for stimuli generation is communicatively connected to said triggering device, and said apparatus for stimuli generation is configured to transmit a triggering signal, via said triggering device to said apparatus for analysis and storage, of the detected electrophysiological brainstem activity, simultaneously as said sound stimuli is transmitted to the subject from the apparatus for stimuli generation, and wherein said system further
30 comprises a program, said program causes said apparatus for sound generating to conduct a test battery for detecting a brain stem disorder, said test battery comprising a plurality of tests presented to said subject in repeated sequences, and wherein each test of said test battery consists of a sequence of sound stimuli; and said detected electrophysiological brainstem activity response is compared to standardized brainstem responses from a
35 reference population.

-4-

As another aspect of the present invention, there is provided a method of detecting brainstem disorders in a subject by means of a system as defined herein, comprising detecting the subject's response to sounds, comprising generating a sound stimuli, communicating the sound stimuli to the subject, recording the subject's electrophysiological brain activity in response to physical properties of said sound stimuli through detection elements attached to the subject, wherein said sound stimuli having varied physical properties in frequency, time and amplitude, triggers said recording of the subject's electrophysiological brain activity simultaneously as said sound stimuli is communicated to the subject, conducting a test battery for detecting a brain stem disorder, said test battery comprising a plurality of tests presented to said subject in repeated sequences, and wherein each test of said test battery consists of a sequence of sound stimuli; and comparing brainstem responses from said triggered recording of brainstem activity to standardized responses from a reference population, and determining the presence of a brainstem disorder in the subject if the brainstem responses of the subject deviate from that of the reference population.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects, features and advantages of which the invention is capable of will be apparent and elucidated from the following description of exemplary embodiments of the present invention, reference being made to the accompanying drawings in which

Figure 1 is a schematic illustration of a system according to one embodiment of the present invention,

Figure 2 is a timing diagram that presents common features, as for instance for nine tests in one embodiment of the present invention, and

Figures 3, 4 and 5 are schematic illustrations and diagrams that further illustrate the nine test's sound stimuli according to one embodiment of the present invention.

Abbreviations used in Fig. 1 to 5 :

A = The amplitude of the sound stimuli

U = The voltage of the trigger pulse

Tt = Time between the trig pulses

Ts = The duration of sound stimuli

G = Number of repetitions of the stimuli for a test

Sssp = square-shaped sound pulse (fp)

B fbw = Butterworth filtered white noise

-5-

T isi = Time between square-shaped sound pulses for test 16

A fp = The amplitude variation for the square-shaped sound pulses for test 17

f = The frequency for the reference square-shaped sound pulse for test 18

f fp = The frequency variation for the square-shaped sound pulse for test 18

5 t fpd = The duration variation for the square-shaped sound pulse for test 19

PREFERRED EMBODIMENTS OF THE INVENTION

The present invention comprises a system and a method intended for diagnosis and/or therapeutic control of brains stem disorders, such as schizophrenia. In this aspect
10 the system and method thereof, comprise means of auditory brainstem audiometry.

The present invention is not intended to be limited to diagnosis and/or control of schizophrenia, even though schizophrenia is mentioned in the embodiments of the present invention. Rather, the present invention includes the diagnosis and/or therapeutic control of all disorders assignable to brainstem related disorders.

15 By using the physical properties of sound; frequency, time and amplitude, and the knowledge that these three properties, or combinations of these, is treated in different networks in the brain, a number of specific subtests have been created, which have been proven to separate schizophrenic subjects from psychiatrically healthy reference subjects. More specifically this is achieved by letting the subject undergo a test, comprised of a
20 number of subtests. During the test procedure electrophysiological signals from the brain stem are registered, which reflect the different sound stimuli and furthermore the results are stored, analyzed and interpreted. The final result is a profile of the brainstems audio-physiological functioning.

Both the composition of the sound stimuli and the method of analyzing the
25 schizophrenia-specific electrophysiological response pattern, are new methodological concepts which makes identification of the early stages in brains stem related diseases, such as schizophrenia, possible, which in turn facilitates efficient treatment with adequate therapeutic resources in time .

The present invention at hand does not rely on any cognitive effort from the subject
30 during the testing procedure. The test is automated, and does not need the active contribution of the test object. Furthermore, the technique has never before been used for psychiatric diagnostic purposes.

Audiometry has been used for examination and as a diagnostic instrument of organic conditions in the central nervous system, e.g. measurement of hearing thresholds in infants
35 and for subjects who not are able to be tested with routine audiogram. However, it has not

-6-

been use for diagnosing of brainstem related diseases. Brainstem audiometry is characterized by an electrophysiological imaging method of the brainstems coding during stimulation with different sound sequences.

In one embodiment, according to Fig. 1, the system according to the present
5 invention comprises an apparatus for generation of stimuli (1), such as a tone generator according to the present embodiment, by means of which the aforementioned sound stimuli are being presented, via a communication element (2), such as a plastic hose, cord or an electric cable, and a sound generating device (3) , such as a hearing phone, to a subject (4) . A plastic hose has the advantage that it does not generate electromagnetic fields near
10 the test subject, which may interfere with brainstem activity or the measurements thereof.

Simultaneously as the sound stimuli are being presented, a trig-pulse is being emitted from the system for generation of stimuli (1) to a triggering device (5), such as a trig-box, and further on to an apparatus for analysis and storage of information (6), such as brainstem activity, in which registration of electrophysiological brain activity from electrodes
15 (7) is initiated, whereafter the activity is imaged on an equipment (8), such as a computer equipment. The triggering of registration is hence initiated by each start of a stimuli.

This system may, in one embodiment of the present invention, be used to perform a test-battery for schizophrenia consisting of nine tests, in which each test comprises presentation of stimuli to a subject and registration of the response elicited by mentioned
20 sound stimuli. Common features for the nine tests are that the sound stimuli being presented to the subject are presented in repeated sequences; typically sound stimuli are repeated approximately 500-1500 times and the time between stimuli varies from approximately 150 to 500 ms . Hence, a complete test with high reliability is provided that takes some minutes, compared to weeks according to the prior art. Because of the fact that
25 each stimulation is registered when the trig-pulse initiates the imaging apparatus, the brain activity caused by the stimulation appears more significantly on a continuous basis in relation to other brainstem activity. In this way the brainstems specific responses to stimuli are registered. The recorded electrophysiological responses from the subject are thereafter compared with standardized responses from a reference population.

30 The present invention differs among other things from the prior art in that the apparatus for generation of stimuli (1) is configured to transmit, or send, a triggering signal, via and/or through the triggering device (5) , to the apparatus for analysis and storage of information (6) of the electrophysiological brain activity simultaneously as said sound stimuli is transmitted to the subject (4) from the apparatus for stimuli generation (1).

-7-

Therefore, the present invention uses according to some embodiments auditory brainstem response (ABR) to detect brain disorders, such as schizophrenia.

The term "auditory brainstem response" is commonly used to define electrophysiological measurement of the activity of the brainstem within a time span of 0 to 5 approximately 10 ms. Of course this time span may vary somewhat, but not principally deviate from this time span, while still be inside the scope of the present invention, according to the appended claims.

The present invention comprises triggering of brainstem reading in relation to complex sound sequences, which are specifically developed for diagnostic and detecting 10 purposes regarding brain disorders, such as schizophrenia. Hereby, the present invention comprises triggering in respect of sound experiencing mechanisms and not general neurological phenomena, such as detection of difference. Thus, the triggering according to the present invention is inseparable from the complex sound stimuli, presented herein.

Some of the tests in the present invention are based on auditory masking. Masking 15 is defined as the subjects reduced ability to hear one sound in the presence of another sound presented simultaneously, before or after the sound one are trying to hear. These processes are handled by general coding principles within the nervous system. Information is sorted and rudimentary parts of it are damped or filtered away. This is made out by feedback-mechanisms in the nervous system which facilitates or inhibits impulses. Said 20 sorting is handled by priority or down-regulation between different mechanisms, working more or less independently of each other.

Furthermore, directional hearing is investigated, which refers to the ability of spatial location of sounds. Both left/right -ability and coding of distance are investigated. Left/right -ability is most crucially determined by the time-difference between the sounds arrival to the 25 left and right ears. Perception of distance is based on neural analysis of spectral cues, which thus comprises more complex handling.

One group of tests examines how the neural coding of auditory input is influenced by time, amplitude and frequency. These tests aim at the different underlying structures in the brain that handle the specific aspects of stimuli. Time analysis for example demands 30 involvement from the brains feedback system in the frontal lobes; analysis of amplitude and modulation comprises mechanisms in different loci in the brainstem and coding of frequency is based on at least three different systems for detection. It is to be understood that modifications and alterations of said tests are possible while still being inside the scope of the present invention. Therefore, these tests are to be interpreted as examples of possible 35 tests, and not to limit the scope of protection of the present invention in any way.

-8-

Thus, in one embodiment of the present invention one group of tests or one example of a test battery are/is provided according to the tests 1 to 9 below.

Test 1 "Forward masking"

- 5 "Forward masking" (11) means the reduced ability to perceive one sound in the presence of another temporally preceding sound. In this test the stimuli consist of a Butterworth-filtered white noise (b fbw) which masks a subsequent square-shaped sound pulse (sssp) .

10 Test 2 "Backward masking"

"Backward masking" (12) means the reduced ability to perceive one sound in the presence of another temporally following sound. In this test the stimuli consist of a Butterworth-filtered white noise (b fbw) which masks a preceding square-shaped sound pulse (sssp) .

15

Test 3 "Binaural forward masking"

"Binaural forward masking" (13) is characterized by the reduced ability to perceive a sound in one ear in the presence of another temporally preceding sound presented in the other ear. In this test the stimuli consist of a Butterworth-filtered white noise (b fbw) in one
20 ear which masks a subsequent square-shaped sound pulse (sssp) in the other ear.

Test 4 "Directional hearing"

In the test "Directional hearing" (14) square-shaped sound pulses (sssp) are presented in separate steps from left to right in equidistant angle-steps. This test consists
25 of five subtests, each with its own specific angle (a-e) . In the first subtest the sound originates completely from left (e) . In subtest number two the pulse train are presented from an angle of 45° left (d) . Subtest number three consists of a pulse train from the front (c) . In the fourth subtest the pulse train are presented from 45° right (b) and finally subtest number five 90° right (a) .

30

Test 5 "Perception of distance in sounds"

The test "Perception of distance in sounds" (15) consist of a number of subtests. In the first of these a pulse train consisting of square-shaped sound pulses (sssp) is used as stimulus (g) . This subtest creates a reference value. In the second subtest (h) the square-
35 shaped .sound pulses have been altered through artificial treatment which makes them

-9-

being perceived as originating from a distant location. In the following subtests the square-pulses in the pulse trains are even more modulated and thus are perceived as being more distantly located.

5 Test 6 "Pulse train 1"

The test "Pulse train 1" (16) is comprised by a number of subtests. The subtests consists of pulse trains with specific time intervals (t_{isi}) between the included square-shaped pulses (f_p). In the first subtest the time interval has a constant value. In the other subtests the mentioned time interval is modified.

10

Test 7 "Pulse train 2"

The test "Pulse train 2" (17) is comprised by a number of subtests. In the first subtest the included square-shaped pulses have specified constant amplitudes. For the other subtests this value is modified (a_{fp}), and each subtests square-shaped pulses (f_p) have

15 their own specific constant amplitude.

Test 8 "Pulse train 3"

The test "Pulse train 3" (18) is comprised by a number of subtests. In the first subtest the included square-shaped pulses have specified constant frequencies. For the other
20 subtests this value is modified (f_{fp}), and each subtests square-shaped pulses (f_p) have their own specific constant frequency. The frequencies of the square-shaped pulses are obtained through filtering with a Butterworth-filter.

Test 9 "Pulse train 4"

25 The test "Pulse train 4" (19) is comprised by a number of subtests. In the first subtest the included square-shaped pulses have a specified constant duration. For the other subtests this value is modified (t_{fpd}), and each subtests square-shaped pulses (f_p) have their own specific constant duration.

30 The elements and components of an embodiment of the invention may be physically, functionally and logically implemented in any suitable way. Indeed, the functionality may be implemented in a single unit, in a plurality of units or as part of other functional units. As such, the invention may be implemented in a single unit, or may be physically and functionally distributed between different units.

-10-

The scope of the claims should not be limited by the preferred embodiments set forth in the description, but should be given the broadest interpretation consistent with the description as a whole.

In the claims and description above, the term "comprises/comprising" does not
5 exclude the presence of other elements or steps. Furthermore, although individually listed, a plurality of means, elements or method steps may be implemented. In addition, singular references do not exclude a plurality. The terms "a", "an", "first", "second" etc do not preclude a plurality. Reference signs in the claims are provided merely as a clarifying example and shall not be construed as limiting the scope of the claims in any way.

-11-

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A system, for detection of brainstem disorders in a subject, configured to detect the subject's response to sounds, comprising:

an apparatus for stimuli generation, configured to generate sound stimuli,
a communication element, communicating sound stimuli from said apparatus for sound generating device to the subject,

detection elements attachable to the subject and configured to detect electrophysiological brainstem activity in response to physical properties of said sound stimuli,

an apparatus adapted for analysis and storage of the detected electrophysiological brainstem activity through said detection elements attachable to the subject, wherein said sound stimuli have varied physical properties in frequency, time and amplitude, and that said system comprises a triggering device,

wherein said apparatus for stimuli generation is communicatively connected to said triggering device, and said apparatus for stimuli generation is configured to transmit a triggering signal, via said triggering device to said apparatus for analysis and storage, of the detected electrophysiological brainstem activity, simultaneously as said sound stimuli is transmitted to the subject from the apparatus for stimuli generation, and wherein said system further comprises a program, said program causes said apparatus for sound generating to conduct a test battery for detecting a brain stem disorder, said test battery comprising a plurality of tests presented to said subject in repeated sequences, and wherein each test of said test battery consists of a sequence of sound stimuli; and said detected electrophysiological brainstem activity response is compared to standardized brainstem responses from a reference population.

2. The system according to claim 1, further comprising an equipment with the purpose to image said electrophysiological brain activity, whereby the system is configured to image said electrophysiological brain activity in said equipment, when said triggering signal is transmitted.

3. The system according to claim 1 or 2, further comprising that the system is configured for brain stem audiometry, and configured to measure an auditory brainstem

-12-

response upon said trig-signal for measuring brainstem activity within a time span of 0 to approximately 10 ms after beginning of said sound stimuli.

4. The system according to any one of claims 1 to 3, wherein the system is configured to repeat mentioned sound stimuli 500-1500 times and the time between mentioned sound stimuli varies from 150 to 500 ms.

5. The system according to any one of claims 1 to 4, wherein the system is configured to reflect the specific responses of the brainstem to mentioned sound stimuli, since the sound stimulation is configured to stand out clearly in relation to other brainstem activity.

6. The system according to any one of claims 1 to 5, wherein said organ for stimuli generation comprises a tone generator.

7. The system according to any one of claims 1 to 6, wherein said communication element for presentation of sound stimuli comprises a plastic hose or cord.

8. The system according to any one of claims 1 to 7, wherein said hearing organ comprises a hearing phone.

9. The system according to any one claims 1 to 8, wherein the system is configured to reproduce and store the electrophysiological activity on computer equipment.

10. The system according to any one of claims 1 to 9, wherein the system is configured to detect brainstem disorders by means of brain stem audiometry, when the subjects response to the physical properties of sound, namely frequency, time and amplitude is detected by conducting a test comprising at least three subtests.

11. The system according to claim 1, wherein said test battery comprising nine subtests:

"Forward masking" - the reduced ability to perceive one sound in the presence of another temporally preceding sound; followed by "Backward masking" - the reduced ability to perceive one sound in the presence of another temporally following sound; followed by

-13-

"Binaural forward masking" - the reduced ability to perceive a sound in one ear in the presence of another temporally preceding sound presented in the other ear; followed by

"Directional hearing" - square-shaped sound pulses (sssp) presented in separate steps from left to right in equidistant angle-steps; followed by

"Perception of distance in sounds" - sounds in which the pulse trains have been modified by means of artificial treatment in order to make the sounds sound like they are being emitted distantly; followed by "Pulse train 1" - in which a number of subtests with pulse trains with specific inter stimulus intervals (tisi) between its square-shaped sound pulses (sssp) , followed by

"Pulse train 2" - in which a number of subtests comprised of pulse trains with different amplitudes in its square-shaped sound pulses (sssp) , followed by

"Pulse train 3" - which is comprised by a number of subtests differing in that its pulse trains have square-shaped sound pulses (sssp) with different frequencies, followed by

"Pulse train 4" - in which a number of subtests with pulse trains with different durations for its square- shaped sound pulses (sssp) .

12. The system according to any one of claims 1 to 11, wherein said brainstem disorder is schizophrenia.

13. A method of detecting brainstem disorders in a subject by means of a system according to any one of claim 1 to 12, comprising detecting the subject's response to sounds, comprising:

generating a sound stimuli,

communicating the sound stimuli to the subject,

recording the subject's electrophysiological brain activity in response to physical properties of said sound stimuli through detection elements attached to the subject,

wherein said sound stimuli having varied physical properties in frequency, time and amplitude, triggers said recording of the subject's electrophysiological brain activity simultaneously as said sound stimuli is communicated to the subject, conducting a test battery for detecting a brain stem disorder, said test battery comprising a plurality of tests presented to said subject in repeated sequences, and wherein each test of said test battery consists of a sequence of sound stimuli; and comparing brainstem responses from said triggered recording of brainstem activity to standardized responses from a reference

-14-

population, and determining the presence of a brainstem disorder in the subject if the brainstem responses of the subject deviate from that of the reference population.

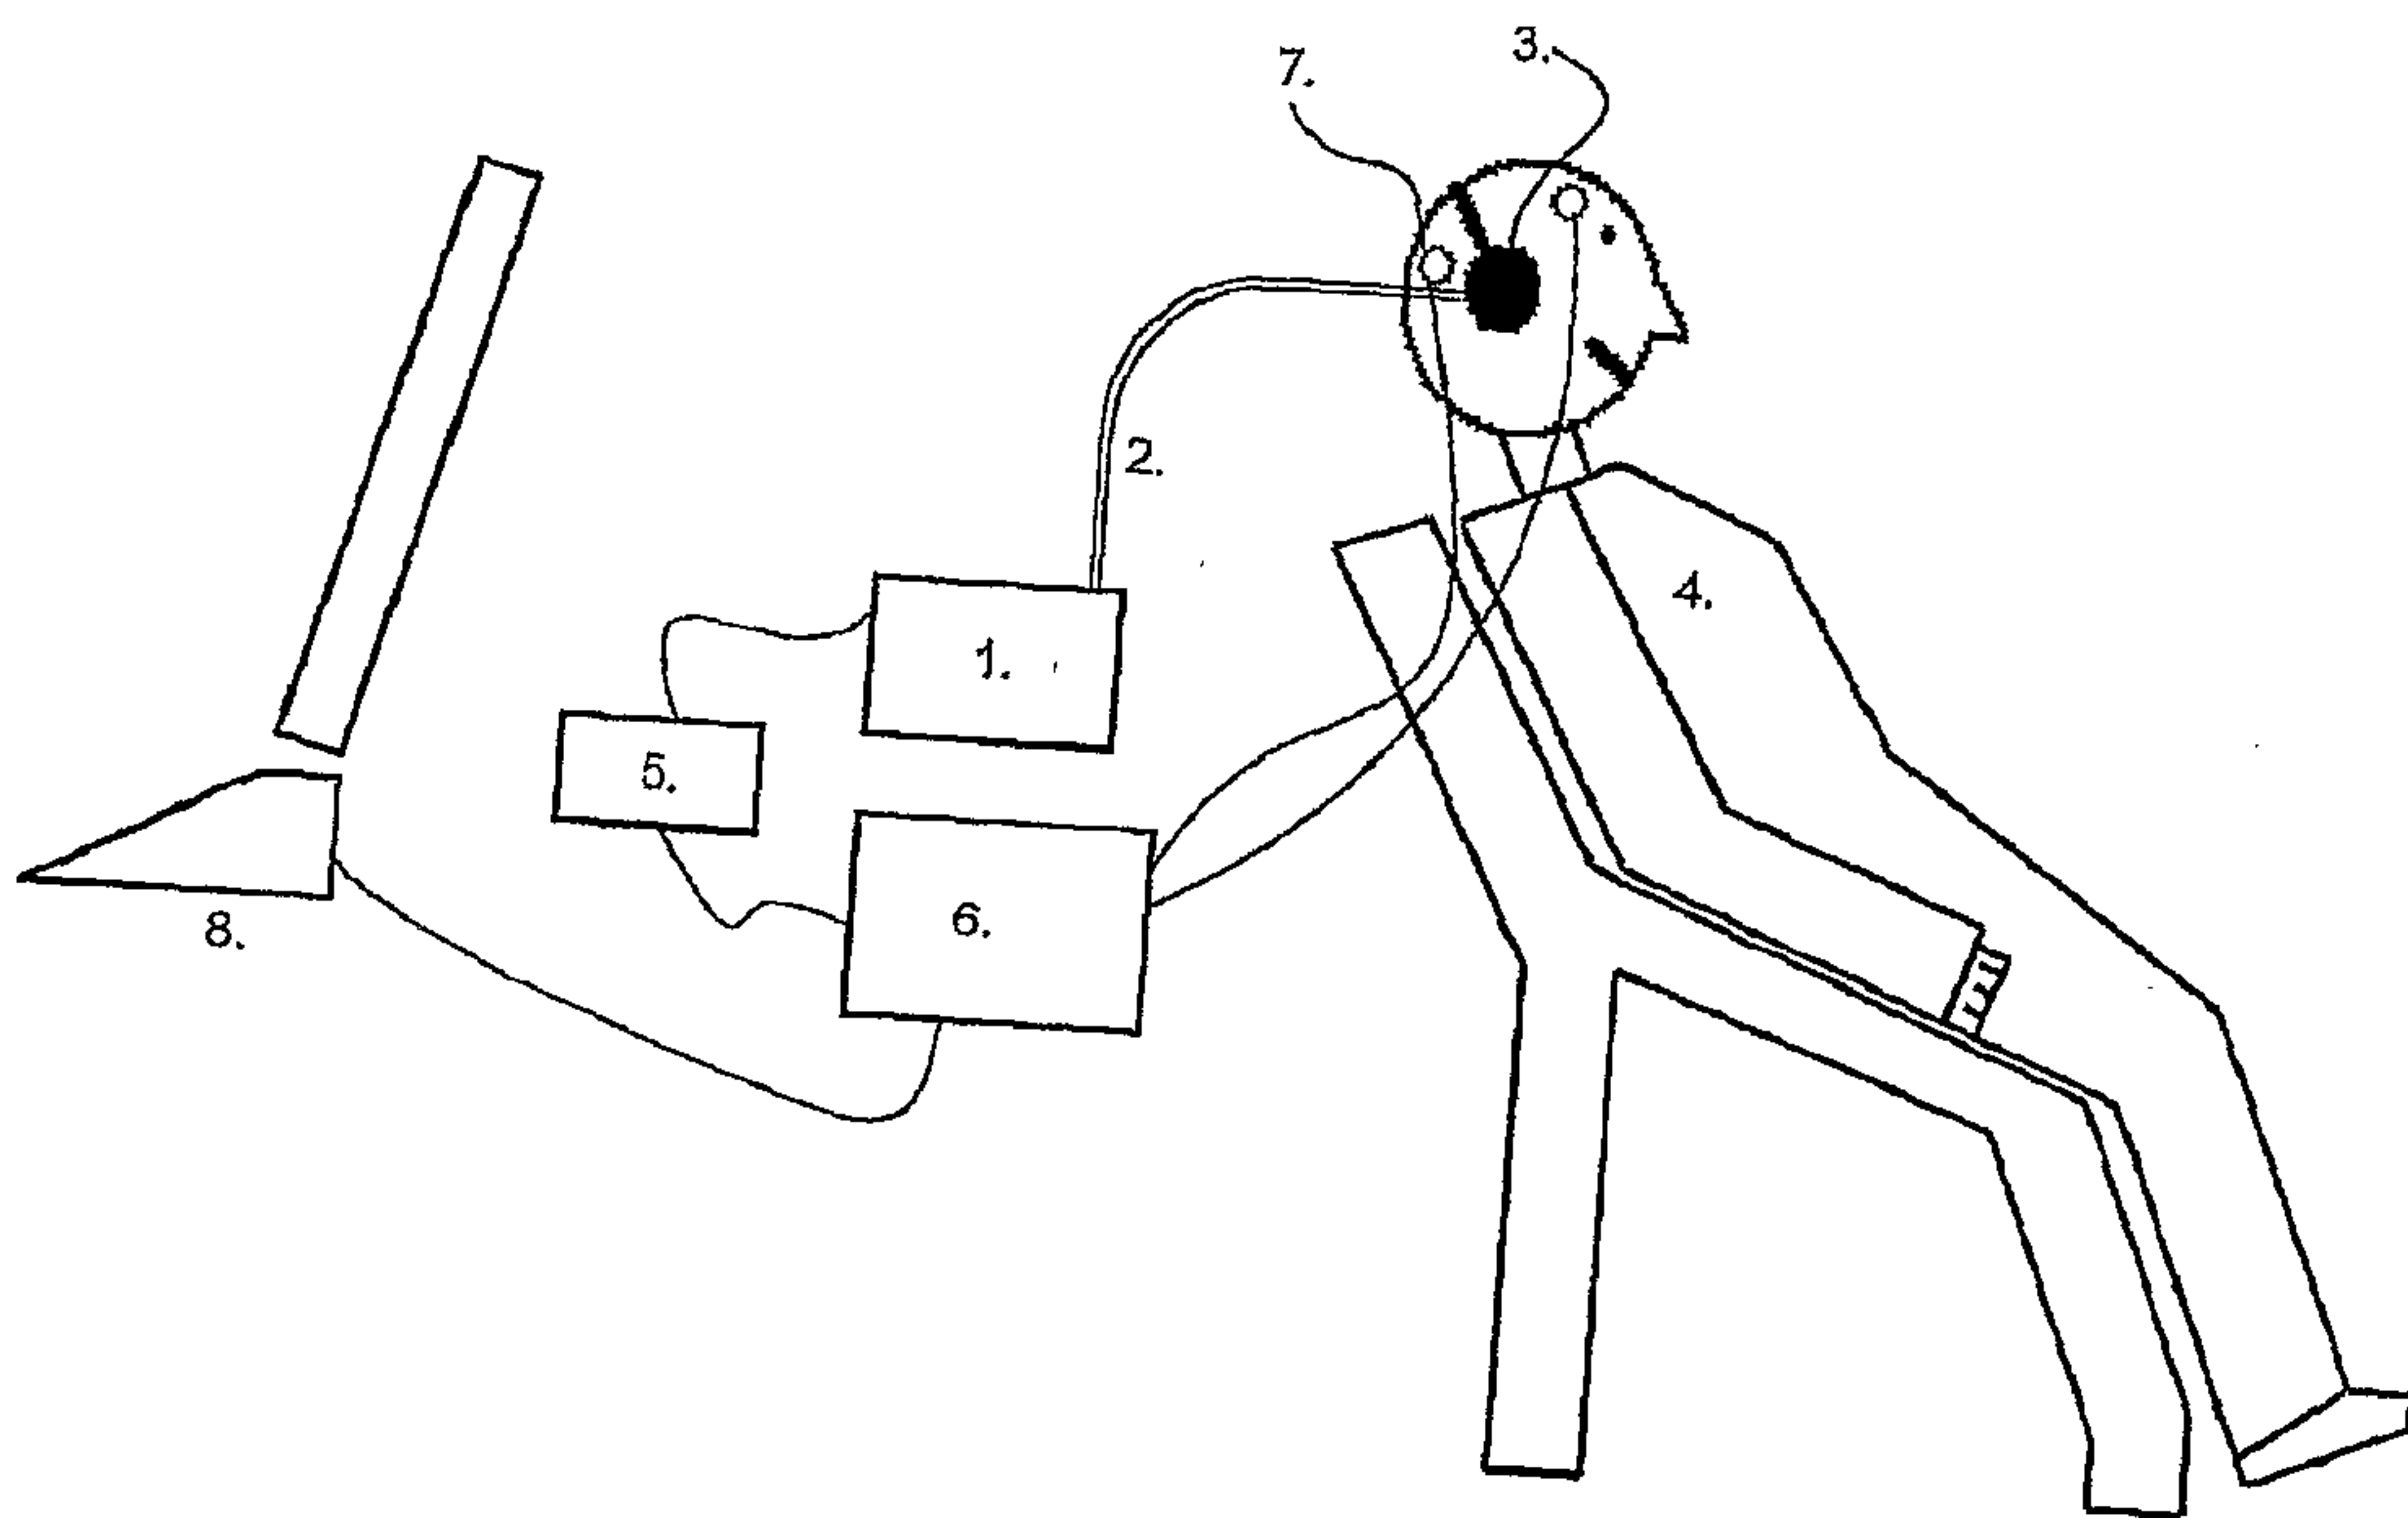


Fig. 1

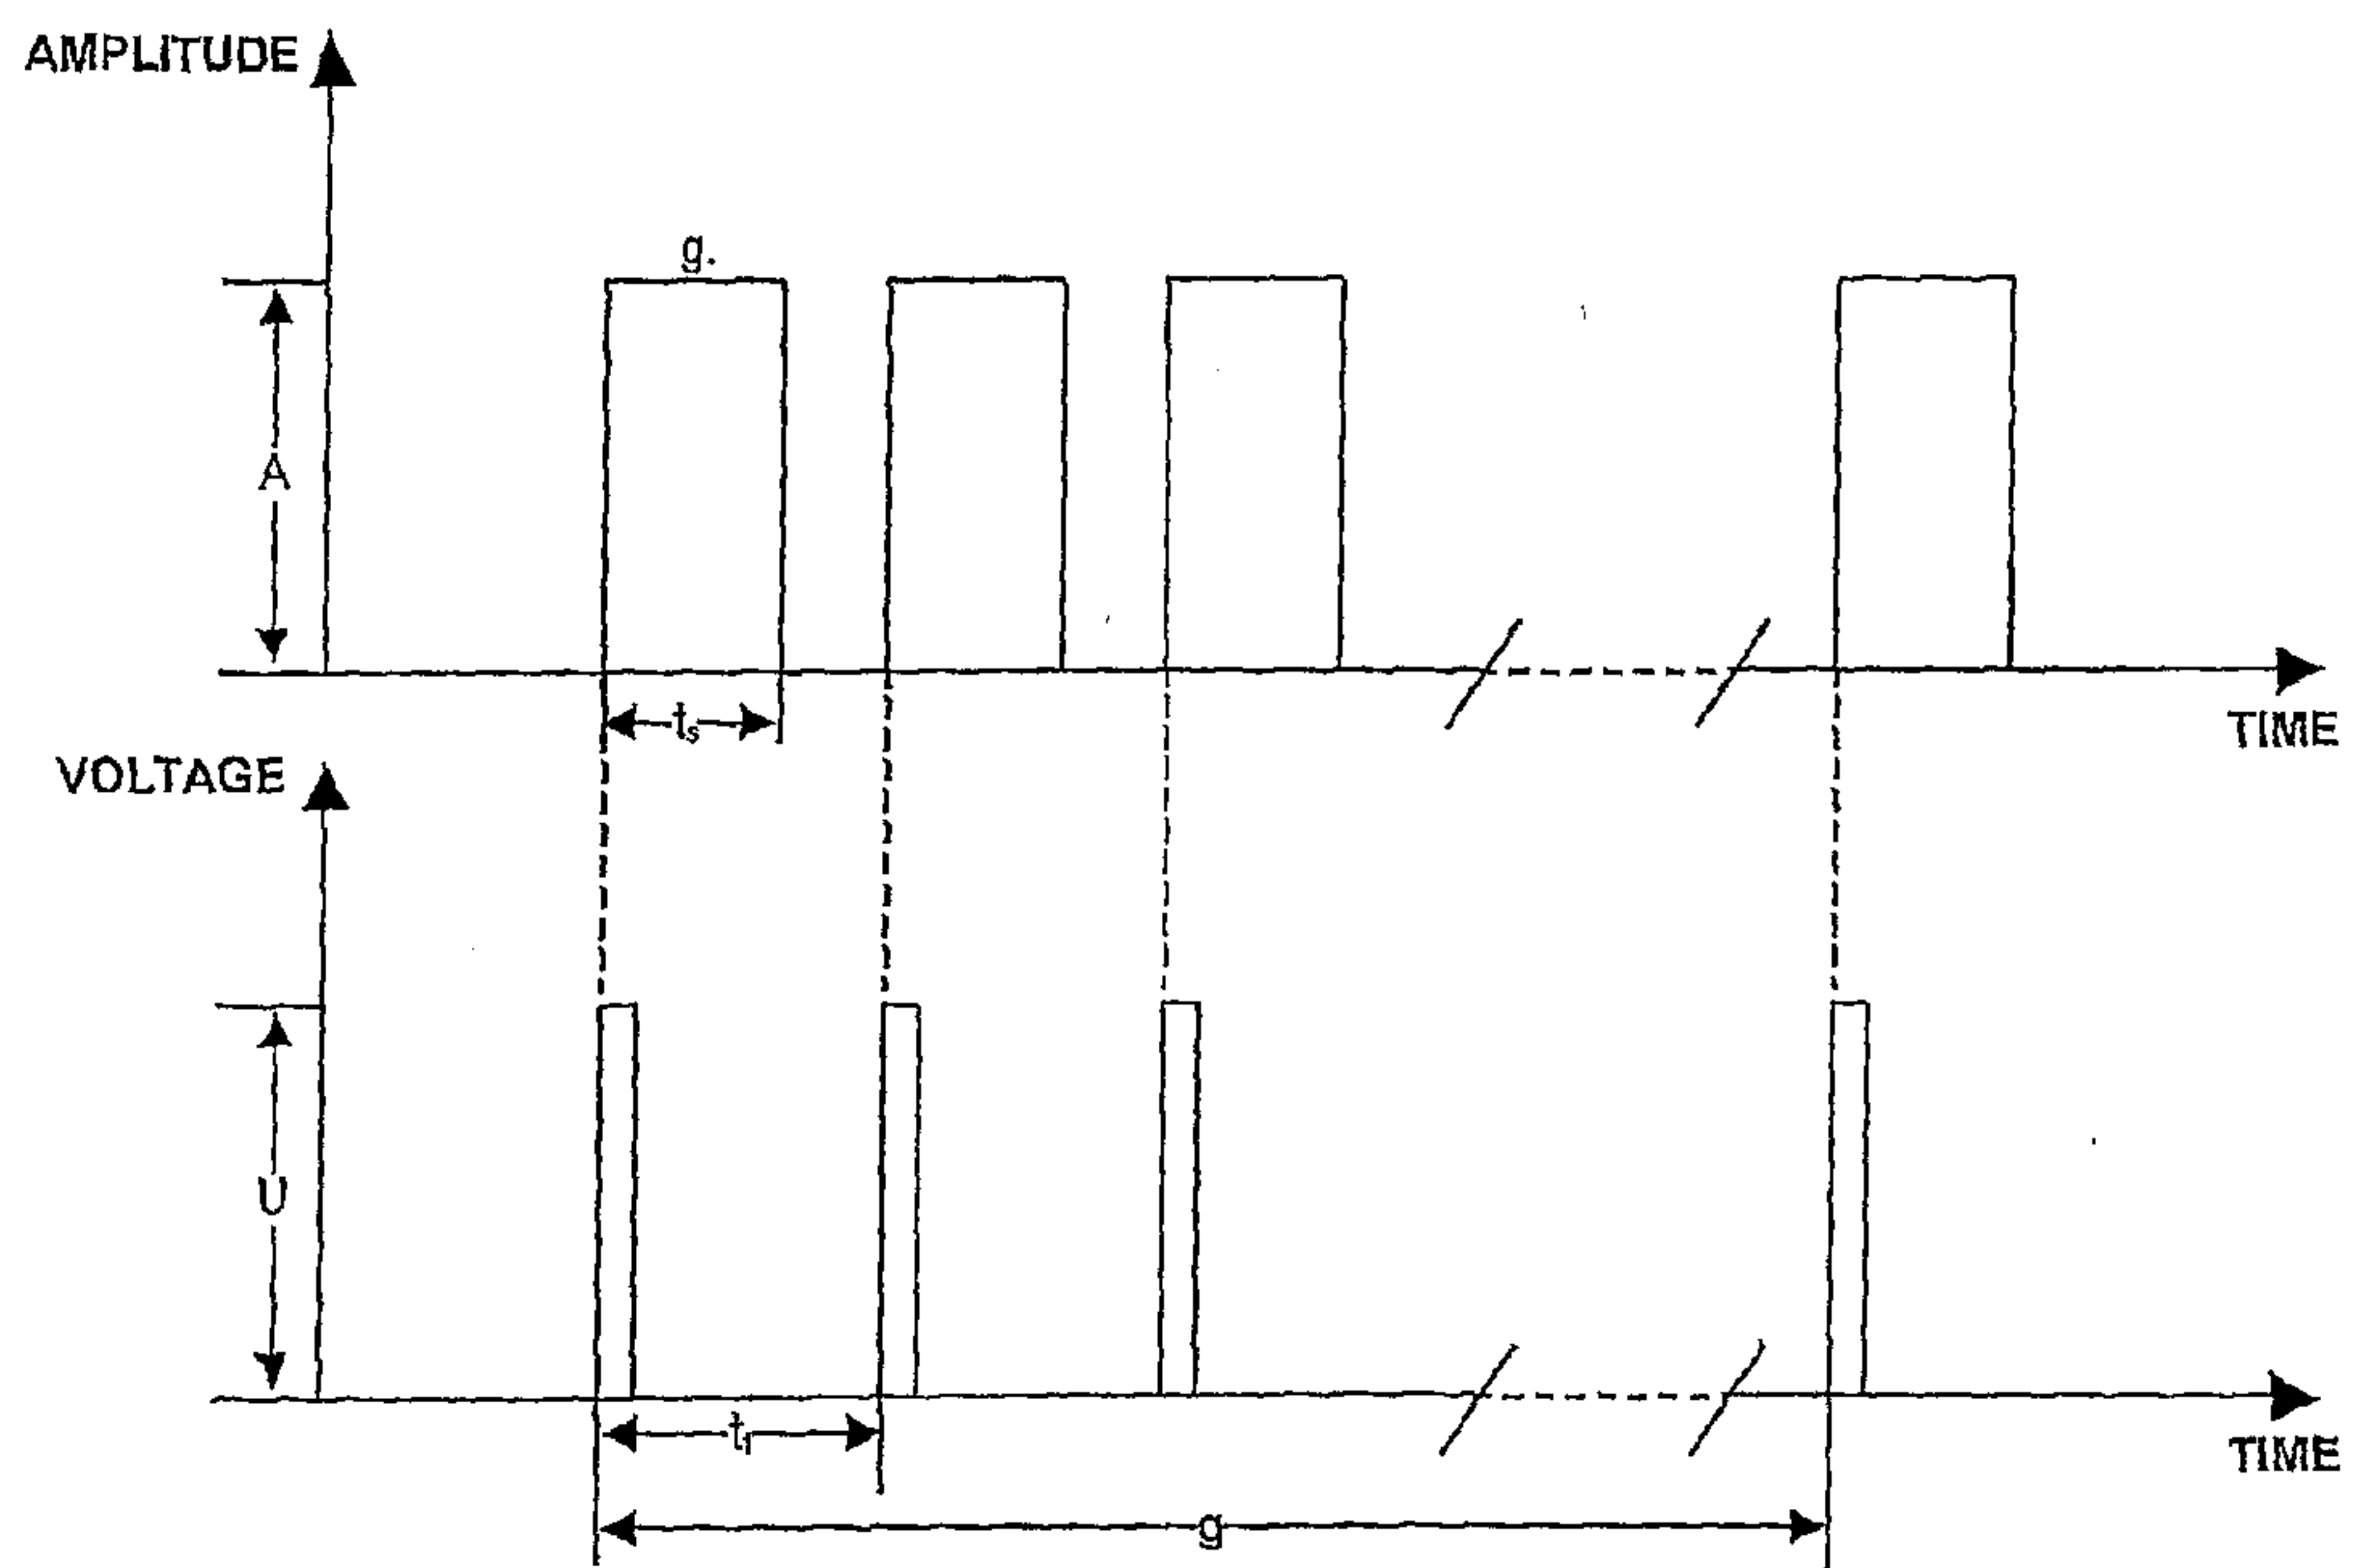


Fig. 2

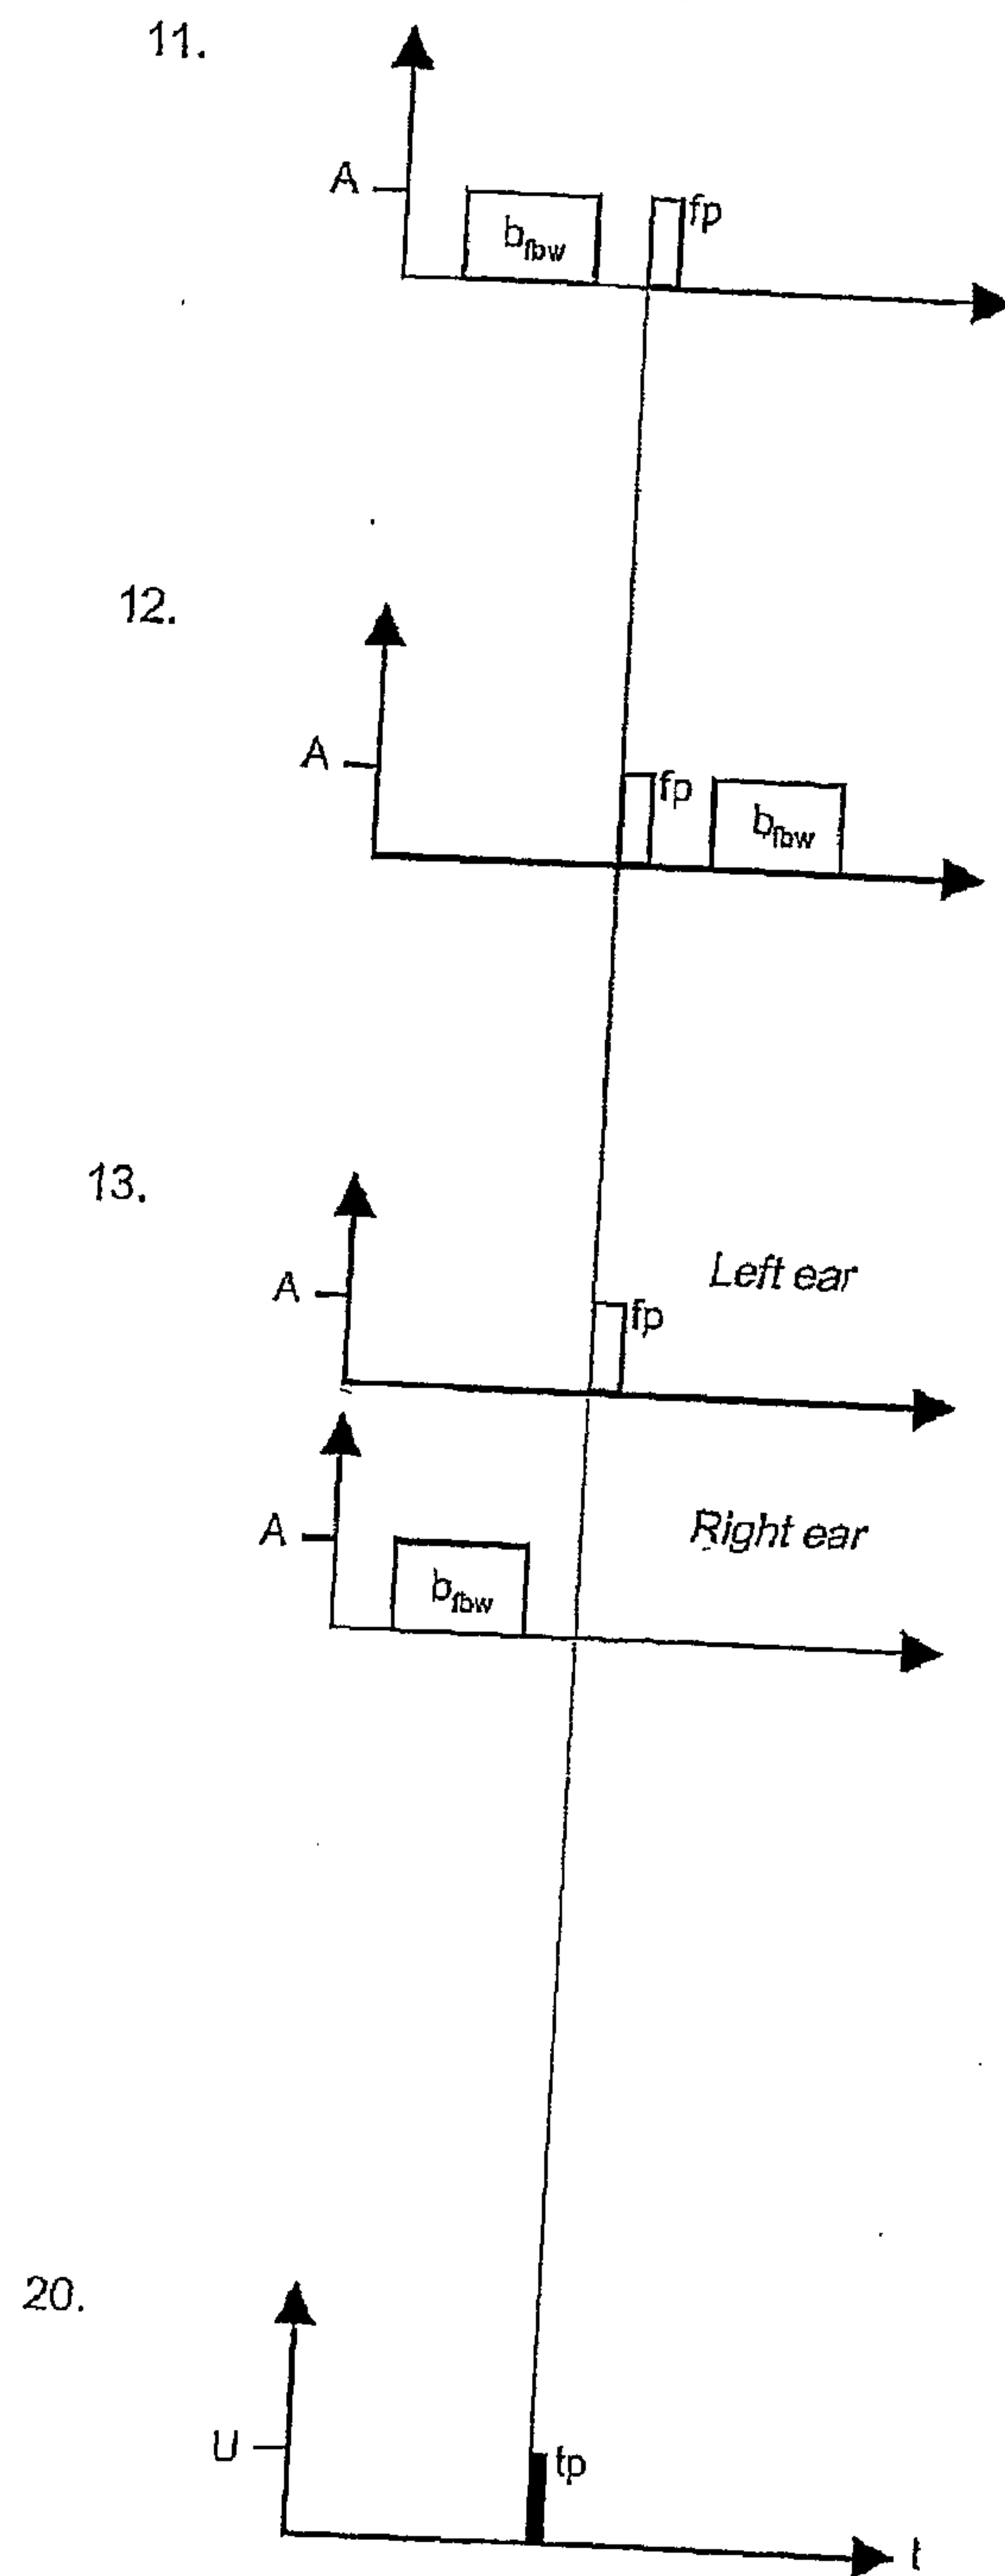


Fig. 3

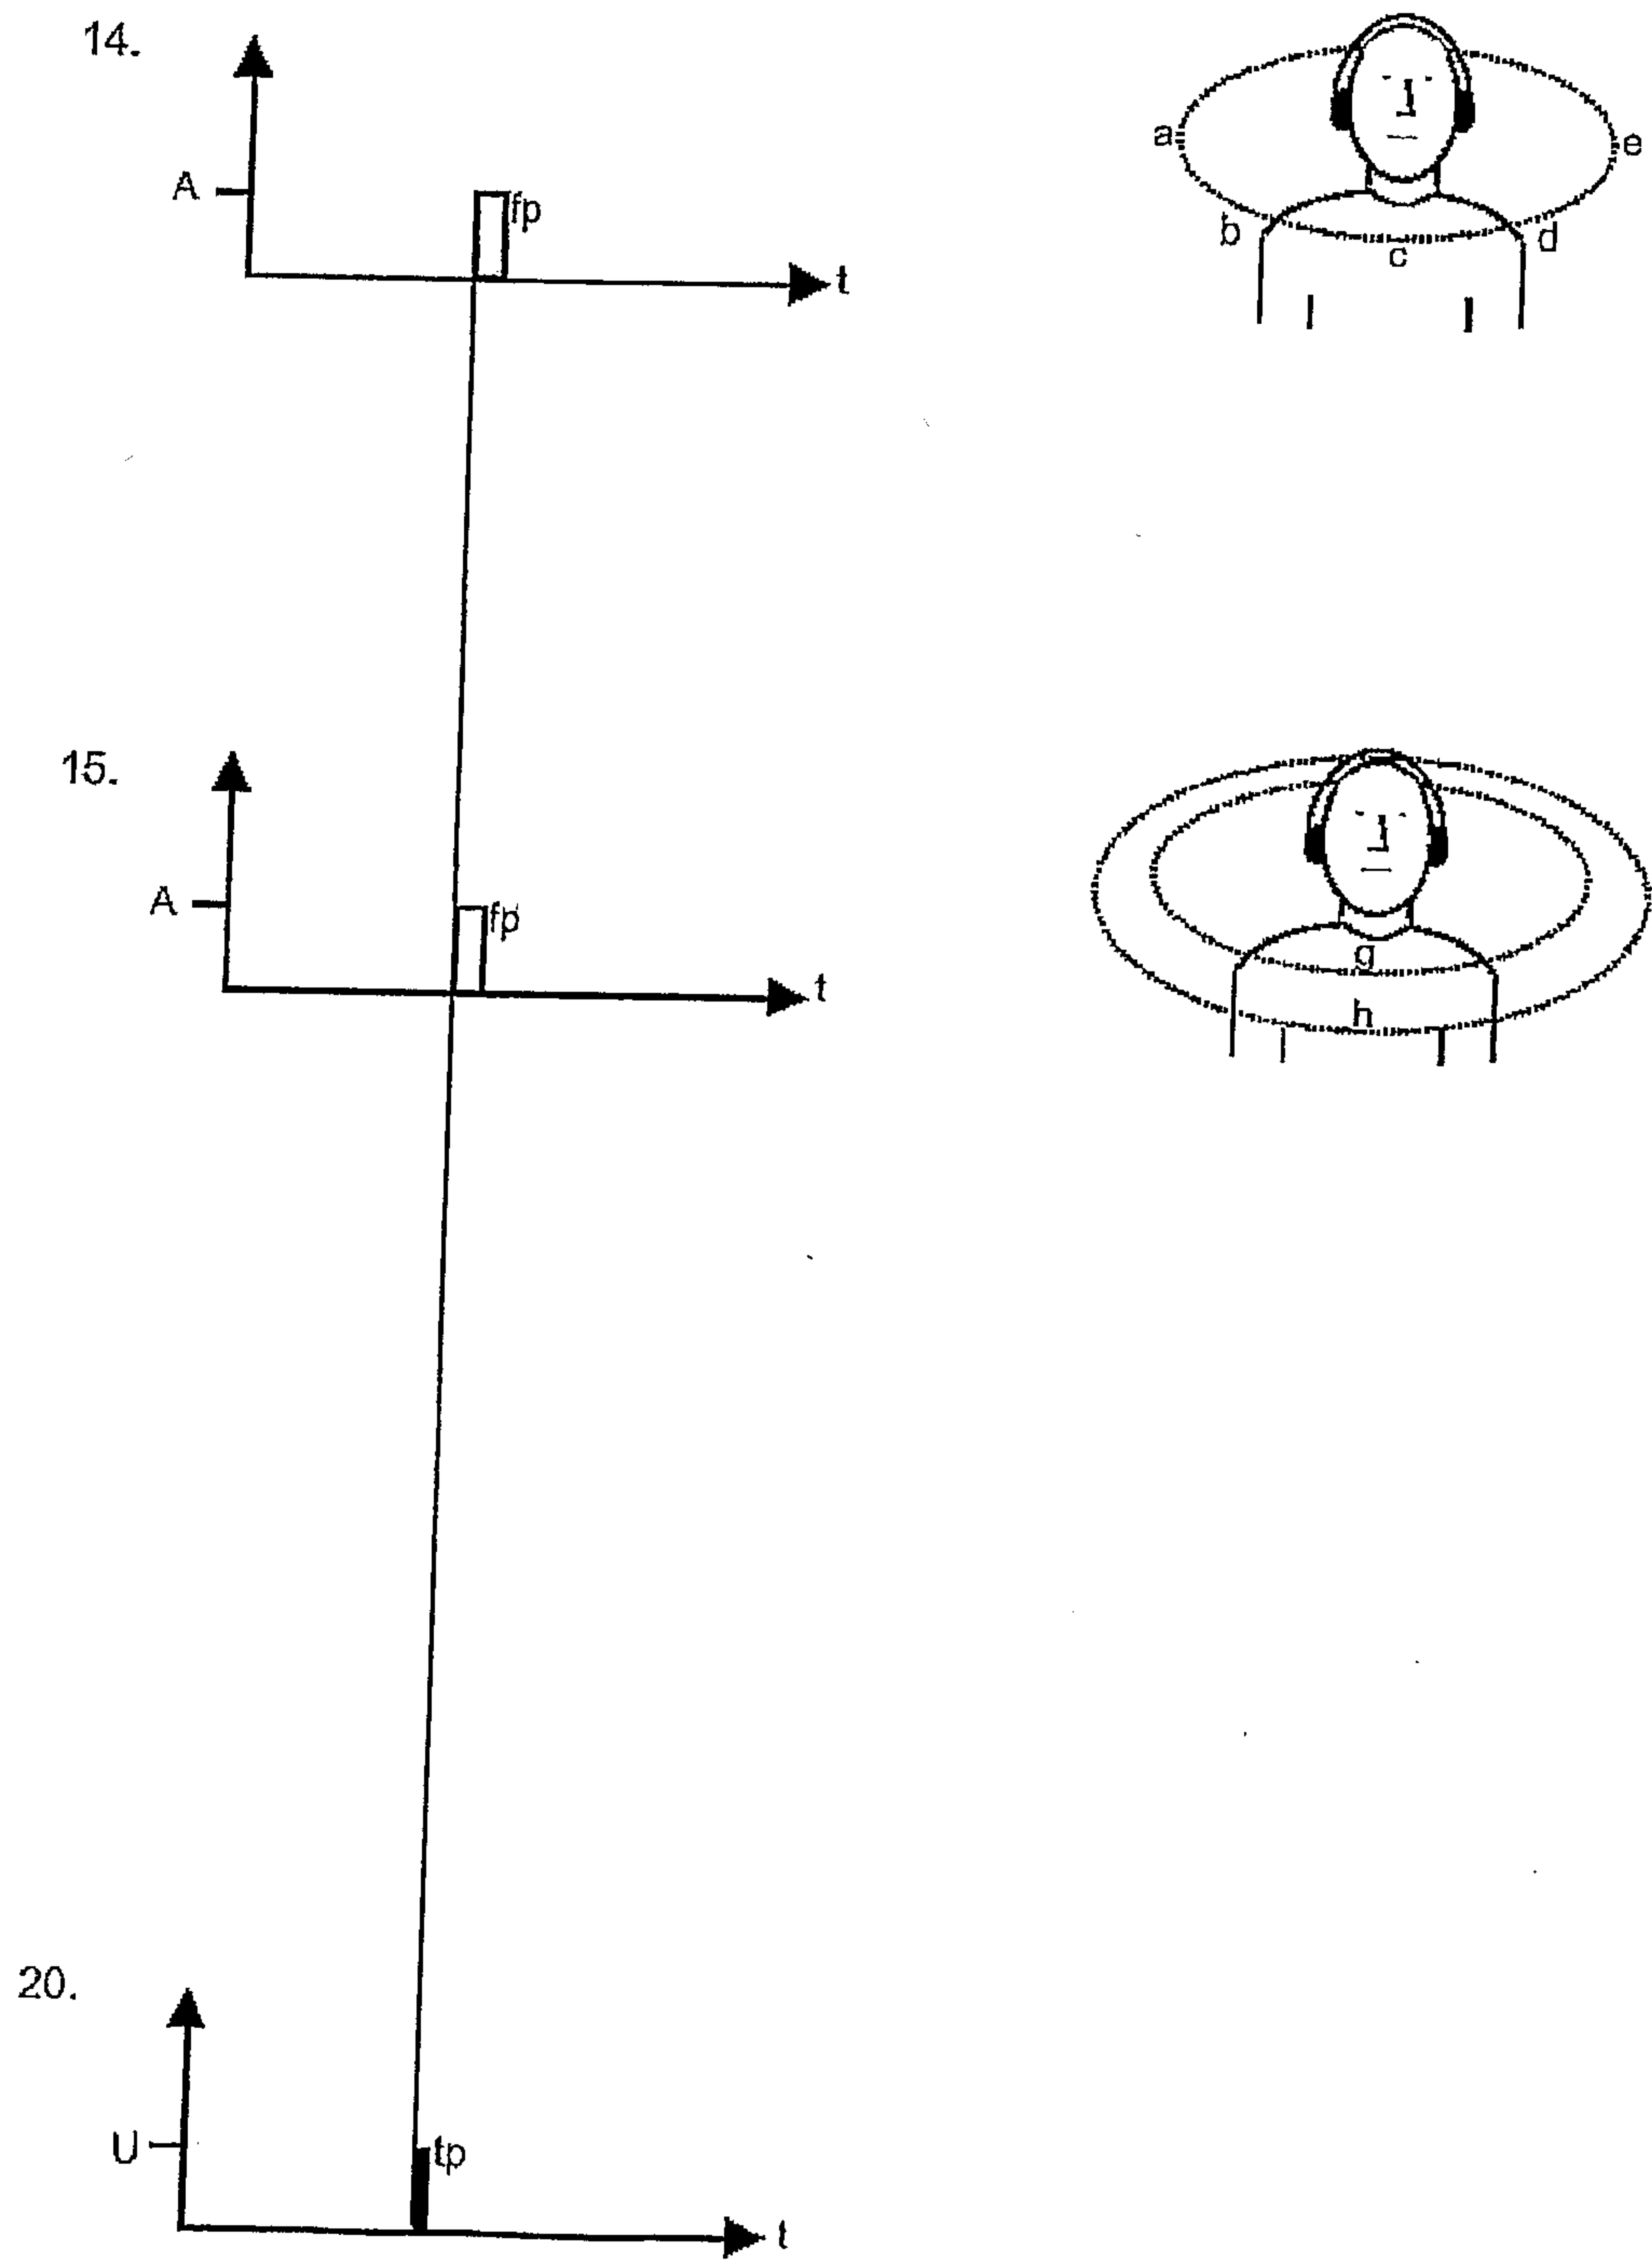


Fig. 4

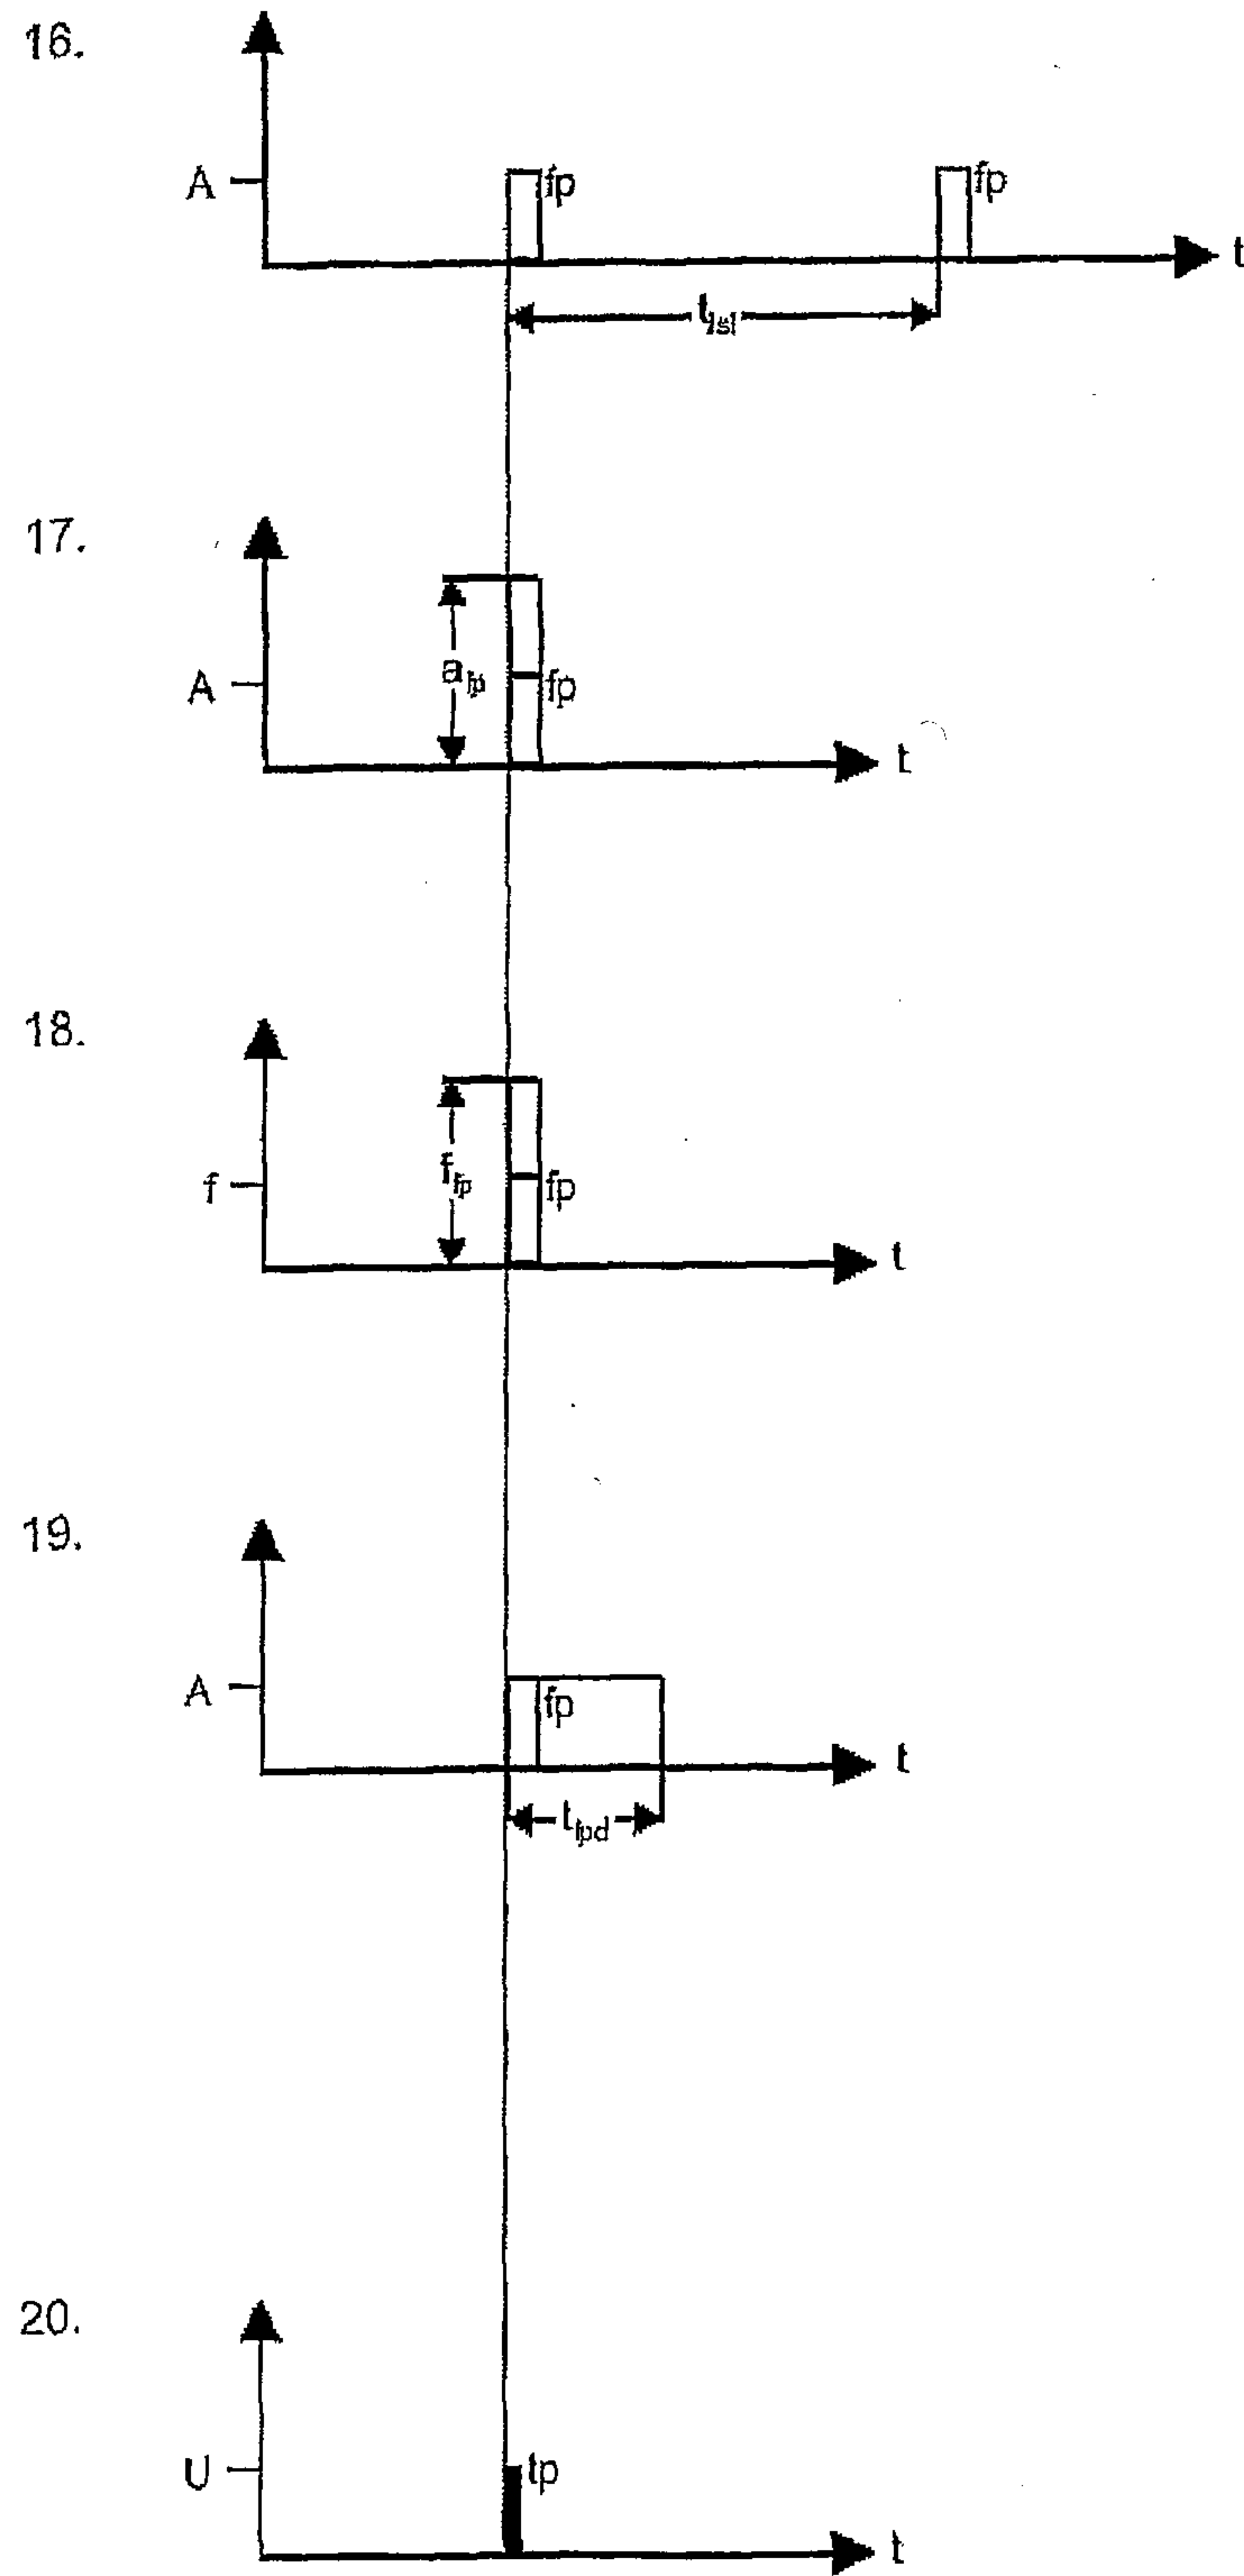


Fig. 5

