(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
13 October 2016 (13.10.2016)

WIPO | PCT

(10) International Publication Number
WO 2016/161498 A1

(51) International Patent Classification:
B05B 1/14 (2006.01)

(21) International Application Number:
PCT/CA2015/050291

(22) International Filing Date:
9 April 2015 (09.04.2015)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **NEX FLOW AIR PRODUCTS CORP.** [CA/CA]; 10520 Yonge Street, Unit 35B-220, Richmond Hill, Ontario L4C 3C7 (CA).

(72) Inventor: **SINGH, Amanjot**; 181 Mountainberry Road, Brampton, Ontario L6R 2L2 (CA).

(74) Agent: **RIDOUT & MAYBEE LLP**; 11 Holland Avenue, Suite 601, Ottawa, Ontario K1Y 4S1 (CA).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

[Continued on next page]

(54) Title: BLOWING NOZZLE

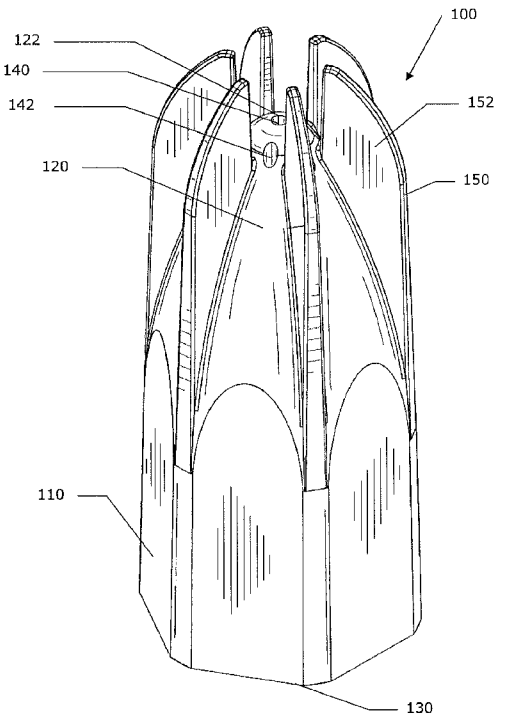


Figure 1

(57) Abstract: A blowing nozzle having a substantially parabolic blowing end is provided which entrains ambient gasses into the output flow. A plurality of outlets are arranged so as reduce turbulence within the flow. The substantially parabolic blowing end converges at an apex coaxial with a blowing axis. A central outlet is provided at the apex to generate a core stream of gas. First outlets surround the central outlet. Second outlets surround the first outlets and are angled inward toward the blowing axis. Fins and/or additional outlets may be provided.

WO 2016/161498 A1

Published:

— *with international search report (Art. 21(3))*

Blowing Nozzle

TECHNICAL FIELD

[0001] The present invention relates to the field of nozzles. More specifically, the present invention relates to a blowing nozzle for pressurized gasses.

BACKGROUND

[0002] Blowing nozzles are used in a large number of applications in various industries. For example, compressed air and other gasses emitted from blowing nozzles are typically used for cooling, cleaning, drying, liquid blowoff, material conveying, ejecting, and sorting tasks.

[0003] Although it is sometimes possible to use an open pipe to emit the compressed gasses, it is usually advantageous to use a nozzle to reduce noise, energy consumption, and to increase worker safety. A variety of blowing nozzles are known in the art.

[0004] In many applications, the blowing nozzle must provide a certain minimum force to fulfill its function. For example, in a cooling, cleaning, or drying application, the blowing nozzle must exert enough force to reach its intended target. In a liquid blowoff, material conveying, ejecting, or sorting task, the flow generated by the nozzle must have enough force to move the material in question. For many nozzles, force can be increased by supplying compressed gasses at increased pressures.

[0005] A frequent problem with blowing nozzles is gas consumption. The compression of air or other gasses to supply the blowing nozzle requires energy and so a reduction of gas consumption often translates to energy savings, which in turn lowers operating costs. However, reductions

in gas consumption are often accompanied by lower forces produced by the nozzle.

[0006] "Air amplifying" nozzles address gas consumption by entraining ambient air into the flow generated by the nozzle using the Coanda effect. This amplifies the flow produced by the nozzle. In some cases, the flow rate can be amplified by up to 25-fold by this effect. However, there is a persistent need to provide increased efficiencies with respect to the amount of ambient gasses that can be entrained into the output flow of the nozzle.

SUMMARY OF THE INVENTION:

[0007] It is an object of the invention to provide a blowing nozzle which efficiently entrains ambient gasses into the output flow so as to reduce the volume of compressed gasses consumed in its operation.

[0008] It is a further object of the present invention to provide a nozzle which generates a greater amount of force for a given amount of supply pressure.

[0009] The present invention provides a nozzle for blowing pressurized gas. The nozzle has an elongate nozzle body with a supply end for receiving a supply of compressed gas and a substantially parabolic blowing end for blowing compressed gas along a blowing axis. The blowing end converges at an apex coaxial with the blowing axis. The blowing end comprises a central outlet for generating a core stream of gas at the apex.

[0010] The blowing end further comprises at least three first outlets disposed at a first radius from the blowing axis. The first outlets are substantially parallel to the blowing axis and surround the core stream of gas. In some embodiments, the diameter of the first outlets is less than the diameter of the central outlet. In some embodiments, the total

discharge area of the first outlets is greater than the discharge area of the central outlet.

[0011] The blowing end further comprises at least three second outlets disposed at a second radius from the blowing axis. The second radius is greater than the first radius. The diameter of the second outlets is less than the diameter of the first outlets. In some embodiments, the total discharge area of the second outlets is less than the total discharge are of the first outlets. In further embodiments, the second outlets are offset relative to the first outlets.

[0012] The second outlets are angled inward toward the blowing axis, preferably at an angle between 0.25 and 5 degrees. In some embodiments, the angle is about 0.5 degrees, about 1 degree, about 1.5 degrees, or about 2 degrees. The slight inward angling of the holes encourages a more laminar flow pattern at the first and central outlets, which in turn prevents turbulence that otherwise reduces the force applied by the nozzle.

[0013] As a result of this arrangement, the first outlets draw gasses from the second outlets, which in turn draw ambient gasses along the substantially parabolic surface of the nozzle. The central outlet may in turn draw air from the first outlets into the blowing axis.

[0014] In some embodiments, the nozzle further comprises at least six fins parallel to the blowing axis and extending outwardly from the elongate nozzle body and along the blowing end thereof. These fins are believed to provide additional surfaces upon which to entrain ambient gasses via the Coanda effect. In some embodiments, each of the second outlets is positioned between a pair of the at least six fins to improve the rate at which ambient gasses are entrained into the flow by the second outlets.

[0015] The invention may also comprise additional rings of outlets between the first and second outlets or beyond the second outlet, positioned at various radial distances from the blowing axis and longitudinal distances from the apex. These rings are believed to provide additional amplification to the flow of the nozzle in a step-like manner, moving from the periphery of the nozzle toward the central blowing axis. Variations in relative outlet size and position are believed to enhance this effect.

[0016] In one embodiment, the nozzle comprises at least three third outlets disposed at a third radius from the blowing axis. The third radius is greater than the first radius but less than the second radius. The diameter of the third outlets is greater than the diameter of the first outlets. In some embodiments, the total discharge area of the third outlets is greater than the total discharge are of the first outlets. In further embodiments, the third outlets are offset relative to the first outlets.

[0017] In some embodiments, the nozzle comprises at least three further outlets disposed on the first radius and offset from the first outlets. The diameter of the further outlets is greater than the diameter of the first outlets and third outlets but less than the diameter of the central outlet. In some embodiments, the total discharge area of the further outlets is greater than the total discharge are of the first outlets.

[0018] In further embodiments, the nozzle comprises at least three fourth outlets at a fourth radius from the blowing axis. The fourth radius is greater than the second radius. The diameter of the fourth outlets is greater than the diameter of the second outlets. In some embodiments, the total discharge area of the fourth outlets is greater than the total discharge are of the second outlets. In further embodiments, the third outlets are offset relative to the second outlets.

[0019] In some embodiments, the second outlets are positioned at a second distance from the apex, in which the second distance is greater than the first distance. In further embodiments, the third outlets are positioned at a third distance from the apex, in which the third distance is less than the second distance and greater than the first distance. In yet further embodiments, the fourth outlets are positioned at a fourth distance from the apex, in which the fourth distance is greater than the first distance.

[0020] In some embodiments, the blowing end is comprised of a plurality of conical frustrum segments having increasing opening angles toward the apex. In other embodiments, the blowing end is a paraboloid.

[0021] In another broad aspect, the invention consists of a method of generating a flow of compressed gasses along a blowing axis from a nozzle having a substantially parabolic blowing end converging at an apex coaxial with the blowing axis. The method comprises the steps of: (a) supplying compressed gas to an inlet of the nozzle, (b) emitting a core stream of gas from a central outlet at the apex of the blowing end of the nozzle, (c) emitting a first concentric stream of gas from the blowing end which surrounds the core stream, the first stream having a higher pressure than the core stream, and (d) emitting a second concentric stream of gas from the blowing end which surrounds the first stream, the second stream angled inward toward the blowing axis and having a higher pressure than the first stream.

[0022] In another embodiment, the invention consists of a method further comprising emitting a third concentric stream of gas which surrounds the first stream and is surrounded by the second stream, the third stream having a lower pressure than the first stream and the second stream.

[0023] In yet another embodiment, the invention consists of a method further comprising emitting a fourth stream of gas which surrounds the second stream, the fourth stream having a lower pressure than the second stream.

[0024] In yet still another embodiment, the invention consists of a method wherein the nozzle further comprises at least six fins substantially parallel to the blowing axis and extending outwardly from the elongate nozzle body proximate to the second or fourth streams.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] FIGS 1 and 2 provide top and bottom perspective views, respectively, of a nozzle according to one embodiment of the present invention.

[0026] FIGS 3-7 provide a top (FIG 3), side (FIG 4), cross-sectional (FIG 5), rotated side (FIG 6), and bottom (Fig 7) view of the nozzle depicted in FIGS 1-2.

[0027] FIGS 8-9 provide top and bottom perspective views, respectively, of a nozzle according to a second embodiment of the present invention.

[0028] FIGS 10-14 provide a top (FIG 10), side (FIG 11), cross-sectional (FIG 12), rotated side (FIG 13), and bottom (Fig 14) view of the nozzle depicted in FIGS 8-9.

[0029] FIGS 15-16 provide top and bottom perspective views, respectively, of a nozzle according to a third embodiment of the present invention.

[0030] FIGS 17-21 provide a top (FIG 17), side (FIG 18), cross-sectional (FIG 19), rotated side (FIG 20), and bottom (Fig 21) view of the nozzle depicted in FIGS 15-16.

[0031] FIGS 22-23 provide top and bottom perspective views, respectively, of a nozzle according to a fourth embodiment of the present invention.

[0032] FIGS 24-28 provide a top (FIG 24), side (FIG 25), cross-sectional (FIG 26), rotated side (FIG 27), and bottom (Fig 28) view of the nozzle depicted in FIGS 22-23.

[0033] FIGS 29-30 provide top and bottom perspective views, respectively, of a nozzle according to a fifth embodiment of the present invention.

[0034] FIGS 31-35 provide a top (FIG 31), side (FIG 32), cross-sectional (FIG 33), rotated side (FIG 34), and bottom (Fig 35) view of the nozzle depicted in FIGS 29-30.

[0035] FIGS 36-37 provide top and bottom perspective views, respectively, of a nozzle according to a sixth embodiment of the present invention.

[0036] FIGS 38-42 provide a top (FIG 38), side (FIG 39), cross-sectional (FIG 40), rotated side (FIG 41), and bottom (Fig 42) view of the nozzle depicted in FIGS 31-35.

DETAILED DESCRIPTION

[0037] With reference to the above drawings, various examples will now be disclosed which illustrate, by way of example only, various embodiments of the invention contemplated herein.

[0038] FIG 1 provides a nozzle **100** in accordance with a first embodiment of the present invention. In general terms, the nozzle **100** consists of an elongate nozzle body **110** having a blowing end **120** and a supply end **130**. A series of outlets **140**, **142**, **146** are provided on the blowing end **120** for generating a flow of compressed gas along a blowing axis **112** (See FIG 5). An inlet **132** is provided on the supply end **130** for supplying compressed gasses to the nozzle **100**.

[0039] The supply end **130** and its inlet **132** can be seen in FIG 2. The inlet **132** may be connected to a source of compressed gas by various suitable means known in the art, such as NPT fittings, BSP fittings, threaded pipes, fasteners, welding, solvent welding, soldering, brazing, compression fittings, flare fittings, flange fittings, mechanical fittings, grooved pipe fittings, and crimped or pressed fittings, as appropriate for the particular application. In this embodiment, the inlet is a 0.25" NPT connector. Various compressed gasses may be supplied to the inlet **132**, including compressed air and inert gasses such as nitrogen. A variety of gas supply pressures may be used, although gas supply pressures of less than 250 psi are preferred.

[0040] The blowing end **120** is substantially parabolic and converges on an apex **122** positioned on the blowing axis **112**. In the embodiment shown in FIG 1, the blowing end **120** is a paraboloid (*i.e.* a three dimensional shape resulting from the rotation of a parabola along a central axis). In other embodiments, the blowing end **120** may have a less perfect (but still substantially parabolic) shape, such as a series of conical frustrums that progressively converge on the apex **122** (see for e.g. FIG 13).

[0041] The blowing end **120** thus provides a surface upon which ambient gasses, such as ambient room air, can be entrained from the periphery of the nozzle **100** toward the apex **122** via the Coanda effect. It is believed that the parabolic (or substantially parabolic) shape of the

blowing end **120** may increase the efficiency with which ambient gasses are entrained by the nozzle **100**, thereby amplifying the air flow along the blowing axis **112**.

[0042] As can be seen in FIGS 5 and 7, a central outlet **140** is provided at the apex **122** of the blowing end **120**. In operation, the central outlet **140** generates a core stream of gas along the blowing axis **112**.

[0043] As can be seen in FIG 7, at least three first outlets **142** are disposed along a first radius ($\mathbf{r_1}$) from the blowing axis **112**. As can be seen in FIG 6, this places the first outlets **142** at a first distance ($\mathbf{d_1}$) from the apex **122**. The nozzle **100** shown in FIG 1 has three first outlets **142.** In other embodiments, the number of first outlets **142** can be increased beyond three, particularly where the overall diameter of the nozzle body **110** increases.

[0044] As can be best seen in FIG 3, each of the first outlets **142** in the nozzle **100** of FIGS 1-7 has a diameter which is less than the diameter of the central outlet **140**. In this embodiment, the diameter of the first outlets is approximately 12 percent smaller than the diameter of the central outlet **140**. Nevertheless, as there are three first outlets **142**, the total discharge area of the plurality of first outlets **142** is still greater than the central outlet **140**.

[0045] The first outlets **142** are substantially parallel to the blowing axis **112**. The output from the first outlets **142** surrounds the core stream of gas generated by the central outlet **140**. It is believed that this effectively increases the diameter and volume of the core stream of gas generated by the central outlet **140**. This arrangement may also provide for a more laminar output flow as compared to merely increasing the discharge area of a singular central outlet **140** by an equivalent amount.

[0046] At least three second outlets **146** are also disposed at a second radius ($\mathbf{r_2}$) from the blowing axis **112** (See FIG 7). The second radius ($\mathbf{r_2}$) is larger than the first radius ($\mathbf{r_1}$). In this embodiment, the second radius ($\mathbf{r_2}$) is approximately 24 percent greater than the first radius ($\mathbf{r_1}$). As can be seen in FIG 6, the second outlets **146** in this embodiment are positioned at a second distance ($\mathbf{d_2}$) from the apex **122**. The second distance ($\mathbf{d_2}$) is greater than the first distance ($\mathbf{d_1}$).

[0047] The diameter of the second outlets **146** is also less than the diameter of the first outlets **142**. In this embodiment, the diameter of the second outlets **146** is approximately 15 percent smaller than the first outlets **142**. In the embodiment shown in FIG 1, the total discharge area of the second outlets **146** is less than the total discharge area of the first outlets **142**.

[0048] As best illustrated in FIG 5, the second outlets **146** are angled inward toward the blowing axis **112**. In this embodiment, the angle ($\boldsymbol{\theta}$) is about 0.5 degrees. In other embodiments the angle may range between 0.25 and 5 degrees, depending on the application. Specific angles ($\boldsymbol{\theta}$) include about 0.5 degrees, about 1.0 degrees, about 1.5 degrees, or about 2 degrees.

[0049] The configuration of the second outlets **146** helps to focus the output of the first and central outlets **142**, **140**. For example, the reduced diameter of the second outlets **146** increases the relative pressure of the output from the second outlets **146** and the inward angling of the second outlets **146** is believed to resist the tendency of the compressed gasses escaping the first and central outlets **142**, **140** to expand outward in a conical fashion. In some applications, this may result in a more laminar flow from the nozzle **100**, which in turn may increase the amount of force exerted by the nozzle **100** for a given gas supply pressure. It is also believed that the inward angling of the second outlets **142** may help entrain ambient gasses into the core stream of gas generated by the

central and/or first outlets **140**, **142**, thereby reducing consumption of compressed gas by the nozzle **100**.

[0050] Without committing to a particular theory, it is also believed that a progressive reduction in outlet diameter from the central outlet **140** to the first outlets **142** to the second outlets **146** may enhance the rate at which ambient gasses are entrained into the flow of the nozzle **100**. More specifically, a lower pressure / higher volume flow at the center of the nozzle may help convey ambient gasses from the periphery of the nozzle into the core stream of gas at the blowing axis **112**.

[0051] In the embodiment shown in FIG 1, the first and second outlets **142**, **146** exhibit substantial radial symmetry and are offset relative to one another. The resulting sequential offset arrangement allows the air flow generated by the second outlets **146** to interact with the spaces between the first outlets **142** above. Without committing to any particular theory, it is believed that offsetting successive rings of outlets may assist in entraining ambient gasses into the core stream of gas generated by the central and/or first outlets **140**, **142**, thereby reducing consumption of compressed gas.

[0052] In some embodiments, the nozzle may also include fins **150**. In the embodiment shown in FIG 1, the nozzle **100** is provided with six fins **150**. When present, the fins are substantially parallel to the blowing axis **112** and extend outwardly from the nozzle body **110** and along the surface of the blowing end **120**. The fins are believed to provide additional surfaces **152** upon which ambient gasses may travel via the Coanda effect, which may increase the amount of ambient gasses entrained into the output flow of the nozzle **100**. In some embodiments, the second outlets **146** are positioned between the fins **150**, which may increase the rate at which ambient gasses are entrained.

[0053] In some embodiments, such as the embodiment shown in FIG 1, the fins **150** may extend beyond the apex **122**, particularly where it is desirable to prevent people or objects from coming in contact with, or potentially obstructing, the outlets **140**, **142**, **146** of the nozzle **100**.

[0054] In operation, the inlet **132** of a nozzle according to the present invention is connected to a supply of compressed gas. The compressed gas is then ejected from the outlets to form a stream of gas. Ambient gasses, such as room air, are entrained into the flow of the nozzle, which increases the volume of the flow emitted from the nozzle. In some applications, the arrangement and angling of the outlets may also provide for more laminar flow, thereby greater forces at a given distance and supply pressure.

[0055] A number of variations can be made on the nozzle **100** described above.

[0056] FIGS 8-14 depict a nozzle **200** according to a second embodiment of the present invention. In general terms, the nozzle **200** consists of an elongate nozzle body **110** having a blowing end **120** and a supply end **130**. The blowing end **120** of the nozzle **200** is substantially parabolic. A series of outlets **140**, **142**, **244**, **146**, **248** are provided (See FIG 10) on the blowing end **120** for generating a flow of compressed gas along a blowing axis **112** (See FIG 12). An inlet **132** is provided on the supply end **130** for supplying compressed gasses to the nozzle **100**. In this embodiment, the inlet **132** is a 0.5" NPT connector.

[0057] Like the nozzle **100** in FIGS 1-7, the nozzle **200** in FIGS 8-14 has a central outlet **140** at an apex **122**, first outlets **142** disposed about the central outlets at a first distance ($\mathbf{d_1}$) and first radius ($\mathbf{r_1}$), and second outlets **146** positioned below the first outlets at a second distance ($\mathbf{d_2}$) and a second radius ($\mathbf{r_2}$). Each of these features are analogous to those described for nozzle **100** above.

[0058] In this embodiment, the first outlets **142** have a diameter which is approximately 24 percent smaller than the central outlet **140** and the diameter of the second outlets **146** is approximately 31 percent smaller than the first outlets **142**. Likewise, the second radius ($\mathbf{r_2}$) is approximately twice the size of the first radius ($\mathbf{r_1}$). The second outlets **146** are angled inward at an angle ($\boldsymbol{\theta}$) of 1.0 degrees. Fins **150** are also present on this embodiment, the surfaces **152** of which extend beyond the apex **122** of the nozzle **200**.

[0059] Unlike the nozzle **100** in FIGS 1-7, the nozzle **200** in FIGS 8-14 has two additional sets of outlets, referred to here as third and fourth outlets **244**, **248**.

[0060] As can be seen in FIG 14, at least three third outlets **244** are positioned at a third radius ($\mathbf{r_3}$) from the blowing axis **112**, with the third radius ($\mathbf{r_3}$) being greater than the first radius ($\mathbf{r_1}$) but less than the second radius ($\mathbf{r_2}$). In this embodiment, the third radius ($\mathbf{r_3}$) is approximately 44 percent larger than the first radius ($\mathbf{r_1}$) and the second radius ($\mathbf{r_2}$) is approximately 33 percent larger than the third radius ($\mathbf{r_3}$). As seen in FIG 13, the third outlets are positioned at a third distance ($\mathbf{d_3}$) from the apex **122** which is greater than the first distance ($\mathbf{d_1}$) but less than the second distance ($\mathbf{d_2}$). This results in a concentric arrangement, with the third outlets positioned between the first and second outlets.

[0061] Although there is still an overall reduction in outlet size as one moves from the blowing axis **112** to the periphery of the nozzle **200**, the diameter of the third outlets **244** is greater than the diameter of the first outlets **142**. In this embodiment, the diameter of the third outlets **244** are approximately 13 percent larger than the diameter of the first outlets **142**. Here, the third outlets **244** are substantially parallel to the blowing axis **112** and have a total discharge area which is greater than the total discharge area of the first outlets **146**.

[0062] In this embodiment, at least three fourth outlets **248** are also provided. The fourth outlets are positioned at a fourth radius ($\mathbf{r_4}$) from the blowing axis **112**, with the fourth radius ($\mathbf{r_4}$) being greater than the second radius ($\mathbf{r_2}$). In this embodiment, the fourth radius ($\mathbf{r_4}$) is approximately 33 percent larger than the second radius ($\mathbf{r_2}$). Likewise, the fourth outlets are positioned at a fourth distance ($\mathbf{d_4}$) from the apex **122** which is greater than the second distance ($\mathbf{d_2}$). This results in a concentric arrangement, with the fourth outlets **248** positioned outside of the second outlets **146**.

[0063] Again, although there is an overall reduction in outlet size as one moves from the blowing axis **112** to the periphery of the nozzle **200**, the diameter of the fourth outlets **248** is greater than the diameter of the second outlets **146**. In this embodiment, the diameter of the fourth outlets **248** is approximately 27 percent larger than the diameter of the second outlets **146**. Here, the fourth outlets **244** are substantially parallel to the blowing axis **112** and have a total discharge area which is greater than the total discharge area of the second outlets **146**.

[0064] Without committing to a particular theory, the introduction of third and fourth outlets **244**, **248** to the nozzle **200** is believed to enhance the rate at which ambient gasses are entrained into the flow generated by the nozzle **200**. More specifically, the addition of third and fourth outlets **244**, **248** is believed to draw ambient gasses toward the blowing axis **112** in stages, with each ring of outlets successively transferring gasses to a ring of outlets closer to the apex **122** in a step like manner (*i.e.* fourth outlets to second outlets to third outlets to first outlets to central outlet). Thus, each step reduces the distance to the apex **122** and the radius to the blowing axis **112**. The variation of the diameter of the outlets is believed to enhance this effect.

[0065] In the nozzle **200** shown in FIGS 8-14, the first, third, second and fourth outlets **142**, **244**, **146**, **248** are offset relative to one another, such that each outlet is positioned halfway between two outlets of the

previous, inner ring. A one-half sequential offset is preferred, however various other forms of offset are also contemplated, including 1/3 and 1/4 offsets.

[0066] FIGS 15-21 provide a nozzle **300** according to a third embodiment of the present invention. In this embodiment, the fourth outlets **248** are omitted.

[0067] In general terms, the nozzle **300** consists of an elongate nozzle body **110** having a blowing end **120** and a supply end **130**. The blowing end **120** of the nozzle **300** is substantially parabolic. A series of outlets **140**, **142**, **244**, **146** are provided (See FIG 17) on the blowing end **120** for generating a flow of compressed gas along a blowing axis **112** (See FIG 19). An inlet **132** is provided on the supply end **130** for supplying compressed gasses to the nozzle **100**. In this embodiment, the inlet **132** is a 0.75" NPT connector.

[0068] As with the other nozzles **100**, **200** described above, the nozzle **300** in FIGS 15-21 has a central outlet **140** at an apex **122**, first outlets **142** disposed about the central outlets at a first distance ($\mathbf{d_1}$) and first radius ($\mathbf{r_1}$), and second outlets **146** positioned below the first outlets at a second distance ($\mathbf{d_2}$) and a second radius ($\mathbf{r_2}$). Each of these features are analogous to those described for nozzle **100** above.

[0069] In this embodiment, the first outlets **142** have a diameter which is approximately 19 percent smaller than the central outlet **140** and the diameter of the second outlets **146** is approximately 23 percent smaller than the first outlets **142**. Likewise, the second radius ($\mathbf{r_2}$) is approximately 2.7-fold larger than the first radius ($\mathbf{r_1}$). The second outlets **146** are angled inward at an angle ($\boldsymbol{\theta}$) of 1.0 degrees. Fins **150** are also present on this embodiment, the surfaces **152** of which extend beyond the apex **122** of the nozzle **300**.

[0070] Third outlets **244** are also provided, which are largely analogous to those described above for nozzle **200** depicted in FIGS 8-14. In this embodiment, the third radius (r_3) is approximately 7 percent larger than the first radius (r_1) and the second radius (r_2) is approximately 1.6-fold larger than the third radius (r_3). The diameter of the third outlets **244** is also larger than the first outlets **142**, in this case by approximately 8 percent.

[0071] FIGS 22-28 provide a nozzle **400** according to a fourth embodiment of the present invention. In this embodiment, three further outlets **443** are provided on a further radius (r_f), which in this embodiment is equal to the first radius (r_1). In addition, both the second outlets **146** and the fourth outlets **248** are positioned between pairs of fins **150**.

[0072] In general terms, the nozzle **400** consists of an elongate nozzle body **110** having a blowing end **120** and a supply end **130**. The blowing end **120** of the nozzle **400** is substantially parabolic. A series of outlets **140**, **142**, **443**, **146**, **248** are provided (See FIG 24) on the blowing end **120** for generating a flow of compressed gas along a blowing axis **112** (See FIG 26). An inlet **132** is provided on the supply end **130** for supplying compressed gasses to the nozzle **100**. In this embodiment, the inlet **132** is a 1" NPT connector.

[0073] As with the other nozzles **100**, **200**, **300** described above, the nozzle **400** in FIGS 22-28 has a central outlet **140** at an apex **122**, first outlets **142** disposed about the central outlets at a first distance (d_1) and first radius (r_1), and second outlets **146** positioned below the first outlets at a second distance (d_2) and a second radius (r_2). Each of these features are analogous to those described for nozzle **100** above.

[0074] In this embodiment, the first outlets **142** have a diameter which is approximately 19 percent smaller than the central outlet **140** and the diameter of the second outlets **146** is approximately 12 percent

smaller than the first outlets **142**. Likewise, the second radius ($\mathbf{r_2}$) is approximately 1.5-fold larger than the first radius ($\mathbf{r_1}$). The second outlets **146** are angled inward at an angle ($\boldsymbol{\theta}$) of 1.0 degrees. Fins **150** are also present on this embodiment, the surfaces **152** of which extend beyond the apex **122** of the nozzle **400**.

[0075] As can best be seen in FIGS 24 and 28, a set of further outlets **443** is also provided in this embodiment. These further outlets **443** are disposed on a further radius ($\mathbf{r_f}$), which in this embodiment is equal to the first radius ($\mathbf{r_1}$). As a result, the further outlets **443** are also at a further distance ($\mathbf{d_f}$) which is equal to the first distance ($\mathbf{d_1}$). The further outlets **443** have a diameter which is greater than the first outlets **142** but still less than the central outlet **140**.

[0076] In this embodiment, there are three further outlets **443**, the diameter of which is approximately 8 percent larger than the first outlets **142** but approximately 14 percent smaller than the central outlet **140**. In this embodiment, the total discharge area of the further outlets **443** is greater than the total discharge area of the first outlets **142**. Here, the further outlets **443** are also positioned in a radially symmetric pattern along the first radius ($\mathbf{r_1}$) and are located between the first outlets **142**.

[0077] Without committing to a particular theory, the inventors believe that the further outlets **443** provide additional gas flow along the first radius ($\mathbf{r_1}$), which may be necessary to accommodate larger nozzle **400** diameters. Although similar results may be obtained in some cases by simply increasing the number of first outlets **142** as appropriate, the use of further outlets **443** that are larger in diameter than the third outlets **244**, is believed to increase the rate at which ambient gases are entrained into the gas flow.

[0078] In this embodiment, there are no third outlets; however, fourth outlets **248** are provided and are largely analogous to those described

above for nozzle **200** depicted in FIGS 8-14. In this embodiment, the fourth radius (r_4) is approximately 17 percent larger than the second radius (r_2). The diameter of the fourth outlets **248** is also larger than the second outlets **146**, in this case by approximately 30 percent.

[0079] The first, further, and fourth outlets **142**, **443**, **248** are all sequentially offset relative to one another, in this case by 1/2, and exhibit substantial radial symmetry.

[0080] FIGS 29-35 provide a nozzle **500** according to a fifth embodiment of the present invention. In this embodiment there are three first outlets **142**, three further outlets **443**, three third outlets **244**, but the fourth outlets **248** are omitted.

[0081] In general terms, the nozzle **500** consists of an elongate nozzle body **110** having a blowing end **120** and a supply end **130**. The blowing end **120** of the nozzle **500** is substantially parabolic. A series of outlets **140**, **142**, **443**,**244**, **146** are provided (See FIG 31) on the blowing end **120** for generating a flow of compressed gas along a blowing axis **112** (See FIG 33). An inlet **132** is provided on the supply end **130** for supplying compressed gasses to the nozzle **100**. In this embodiment, the inlet **132** is a 1.25" NPT connector.

[0082] As with the other nozzles described above, the nozzle **500** in FIGS 29-35 has a central outlet **140** at an apex **122**, first outlets **142** disposed about the central outlets at a first distance (d_1) and first radius (r_1), and second outlets **146** positioned below the first outlets at a second distance (d_2) and a second radius (r_2). The second outlets **146** are angled inward toward the blowing axis **112** at an angle (θ) of 1.0 degree. Each of these features are analogous to those described for nozzle **100** above.

[0083] As with nozzle **400** above, this embodiment also has further outlets **443** disposed on a further radius (r_f) and further distance (d_f)

equal to the first radius ($\mathbf{r_1}$) and first distance ($\mathbf{d_1}$). The further outlets **443** in nozzle **500** are analogous to those described in nozzle **400**. In this embodiment, the further outlets **443** are approximately 12.5% larger than the first outlets **142**. As with nozzle **400**, the further outlets **443** are once again positioned between the first outlets **142**, in a radially symmetric pattern.

[0084] Third outlets **244** are also provided, which are analogous to those described above for nozzle **200**. In nozzle **500**, the third radius ($\mathbf{r_3}$) is approximately 50 percent larger than the first radius ($\mathbf{r_1}$) and the second radius ($\mathbf{r_2}$) is approximately 17 percent larger than the third radius ($\mathbf{r_3}$). The diameter of the third outlets **244** is also larger than the first outlets **142**, in this case by approximately 8 percent.

[0085] As with other embodiments, a set of fins **150** is also provided on the blowing end **120** of the nozzle **500**. In this embodiment, the second and third outlets **146**, **244** are positioned between the fins **150**, which is believed to increase the rate at which ambient gasses are entrained into the flow emitted by the nozzle **500**.

[0086] FIGS 36-41 provide a nozzle **600** according to a fifth embodiment of the present invention. The large diameter of this embodiment results in a blowing end **120** that is more rounded in shape, but still substantially parabolic. As with the other nozzles, second outlets **146** are also provided, but in this case the inward angle is 2.0 degrees.

[0087] In general terms, the nozzle **600** consists of an elongate nozzle body **110** having a blowing end **120** and a supply end **130**. The blowing end **120** of the nozzle **600** is substantially parabolic. A series of outlets **140**, **142**, **443**,**244**, **146** are provided (See FIG 38) on the blowing end **120** for generating a flow of compressed gas along a blowing axis **112** (See FIG 40). An inlet **132** is provided on the supply end **130** for

supplying compressed gasses to the nozzle **100**. In this embodiment, the inlet **132** is a 1.5" NPT connector.

[0088] As with the other nozzles described above, the nozzle **600** in FIGS 36-41 has a central outlet **140** at an apex **122**, first outlets **142** disposed about the central outlets at a first distance ($\mathbf{d_1}$) and first radius ($\mathbf{r_1}$), and second outlets **146** positioned below the first outlets at a second distance ($\mathbf{d_2}$) and a second radius ($\mathbf{r_2}$). The second outlets **146** are angled inward toward the blowing axis **112** at an angle ($\boldsymbol{\theta}$) of 2.0 degrees. Each of these features are analogous to those described for nozzle **100** above.

[0089] As with nozzle **400** above, this embodiment also has further outlets **443** disposed on a further radius ($\mathbf{r_f}$) and further distance ($\mathbf{d_f}$) equal to the first radius ($\mathbf{r_1}$) and first distance ($\mathbf{d_1}$). The further outlets **443** in nozzle **600** are analogous to those described in nozzle **400**. In this embodiment, the further outlets **443** are approximately 10% larger than the first outlets **142**. As with nozzle **400**, the further outlets **443** are also positioned between the first outlets **142** in a radially symmetric pattern.

[0090] Third outlets **244** are also provided, which are analogous to those described above for nozzle **500**. In nozzle **600**, the third radius ($\mathbf{r_3}$) is approximately 50 percent larger than the first radius ($\mathbf{r_1}$) and the second radius ($\mathbf{r_2}$) is approximately 17 percent larger than the third radius ($\mathbf{r_3}$). The diameter of the third outlets **244** is also larger than the first outlets **142**, in this case by approximately 2.5 percent.

[0091] As with other embodiments, a set of fins **150** is also provided on the blowing end **120** of the nozzle **600**. In this embodiment, the second and third outlets **142**, **244** are positioned between the fins **150**, which is believed to increase the rate at which ambient gasses are entrained into the flow emitted by the nozzle **600**.

[0092] In operation, a nozzle according to the present invention is connected at the inlet **132** to a supply of compressed gases, such as air. A variety of gas supply pressures may be used, although gas supply pressures of between 20-40 and 80-120 psi are preferred. Compressed gasses are then emitted by the outlets to generate a flow of gas along the blowing axis **112**. Various outlets may be provided as described above to entrain ambient gasses into the flow of the nozzle. The positioning and angling of the outlets may also reduce turbulence within the flow emitted by the nozzle, which may increase the force emitted at a particular distance for a given supply pressure.

[0093] A variety of methods and materials can be used to construct a blowing nozzle according to the present invention. In some embodiments, the nozzle is CNC milled from a block of aluminum. In other embodiments, cast steel forms may be used to reduce costs, particularly if the outlets are drilled into the nozzle after casting. In still further other embodiments, the nozzle may be constructed from aluminum, steel, brass, stainless steel, plastic, zinc, or a magnesium-zinc alloy. Other suitable materials and methods of construction would be readily apparent to the person of skill in the art having regard the present disclosure.

[0094] The embodiments of the present disclosure are intended to be examples only. Those of skill in the art may effect alterations, modifications and variations to the particular embodiments without departing from the intended scope of the present application.

[0095] In particular, features from one or more of the above-described embodiments may be selected to create alternate embodiments comprised of a subcombination of features which may not be explicitly described above. In addition, features from one or more of the above-described embodiments may be selected and combined to create alternate embodiments comprised of a combination of features which may not be explicitly described above. Features suitable for such combinations and

subcombinations would be readily apparent to persons skilled in the art upon review of the present application as a whole. The subject matter described herein and in the recited claims intends to cover and embrace all suitable changes in technology.

CLAIMS:

1. A nozzle for blowing pressurized gas, the nozzle comprising:

an elongate nozzle body having a supply end for receiving a supply of compressed gas and a substantially parabolic blowing end for blowing compressed gas along a blowing axis, the blowing end converging at an apex coaxial with the blowing axis;

the blowing end comprising:

a central outlet for generating a core stream of gas at the apex;

at least three first outlets disposed at a first radius from the blowing axis, wherein:

the first outlets are substantially parallel to the blowing axis and surround the core stream of gas;

at least three second outlets disposed at a second radius from the blowing axis, wherein:

the second outlets are angled inward toward the blowing axis, and

the second radius is greater than the first radius.

2. The nozzle of claim 1, wherein the angle of the second outlets is between 0.25 and 5 degrees.

3. The nozzle of claim 2, wherein the angle of the second outlets is about 0.5 degrees, about 1 degree, about 1.5 degrees, or about 2 degrees.

4. The nozzle of any one of claims 1 to 3, wherein the diameter of the first outlets is less than the diameter of the central outlet.

5. The nozzle of any one of claims 1 to 4, wherein the total discharge area of the first outlets is greater than the discharge area of the central outlet .

6. The nozzle of claims 1 to 5, wherein the diameter of the second outlets is less than the diameter of the first outlets.

7. The nozzle of claims 1 to 6, wherein the total discharge area of the second outlets is less than the total discharge area of the first outlets.

8. The nozzle of any one of claims 1 to7, wherein the second outlets are offset relative to the first outlets.

9. The nozzle of any one of claims 1 to 8, wherein the nozzle further comprises at least six fins substantially parallel to the blowing axis and extending outwardly from the elongate nozzle body and along the blowing end thereof.

10. The nozzle of claim 9, wherein each of the second outlets is positioned between a pair of the at least six fins.

11. The nozzle of any one of claims 1 to 10, wherein the blowing end further comprises:

at least three third outlets disposed at a third radius from the blowing axis, wherein:

the third radius is greater than the first radius but less than the second radius, and

the diameter of the third outlets is greater than the diameter of the first outlets.

12. The nozzle of claim 11, wherein the total discharge area of the third outlets is greater than the total discharge area of the first outlets.

13. The nozzle of claim 11 or claim 12, wherein the third outlets are offset relative to the first outlets.

14. The nozzle of claim 11 or claim 12, wherein the blowing end further comprises at least three further outlets disposed on the first radius and offset from the first outlets, wherein the diameter the further

outlets is greater than the diameter of the first outlets and the third outlets but less than the diameter of the central outlet.

15. The nozzle of claim 14, wherein the total discharge area of the further outlets is greater than the total discharge area of the first outlets.

16. The nozzle of any one of claims 1 to 15, wherein the blowing end further comprises:

at least three fourth outlets disposed at a fourth radius from the blowing axis, wherein:

the fourth radius is greater than the second radius, and

the diameter of the fourth outlets is greater than the diameter of the second outlets.

17. The nozzle of claim 16, wherein the total discharge area of the fourth outlets is greater than the total discharge area of the second outlets.

18. The nozzle of claim 16 or claim 17, wherein the fourth outlets are offset relative to the second outlets.

19. The nozzle of any one of claims 1 to 18, wherein the first outlets are positioned at a first distance from the apex.

20. The nozzle of claim 19, wherein the second outlets are positioned at a second distance from the apex, the second distance being greater than the first distance.

21. The nozzle of claim 20, wherein the third outlets are positioned at a third distance from the apex, the third distance being less than the second distance and greater than the first distance.

22. The nozzle of claim 20, wherein the fourth outlets are positioned at a fourth distance from the apex, the fourth distance being greater than the second distance.

23. The nozzle of any one of claims 1 to 22, wherein the blowing end is comprised of a plurality of conical frustrum segments having increasing opening angles toward the apex.

24. The nozzle of any one of claims 1 to 22, wherein the blowing end is a paraboloid.

25. A method of generating a flow of compressed gasses along a blowing axis from a nozzle having a substantially parabolic blowing end converging at an apex coaxial with the blowing axis, the method comprising:

supplying compressed gas to an inlet of the nozzle;

emitting a core stream of gas from a central outlet at the apex of the blowing end of the nozzle;

emitting a first concentric stream of gas from the blowing end which surrounds the core stream, the first stream having a higher pressure than the core stream; and

emitting a second concentric stream of gas from the blowing end which surrounds the first stream, the second stream angled inward toward the blowing axis and having a higher pressure than the first stream.

26. The method of claim 25, further comprising emitting a third concentric stream of gas which surrounds the first stream and is surrounded by the second stream, the third stream having a lower pressure than the first stream and the second stream.

27. The method of claim 25 or 26, further comprising emitting a fourth stream of gas which surrounds the second stream, the fourth stream having a lower pressure than the second stream.

28. The method of any one of claims 25 to 27, wherein the nozzle further comprises at least six fins substantially parallel to the blowing axis and

extending outwardly from the elongate nozzle body proximate to the second or fourth streams.

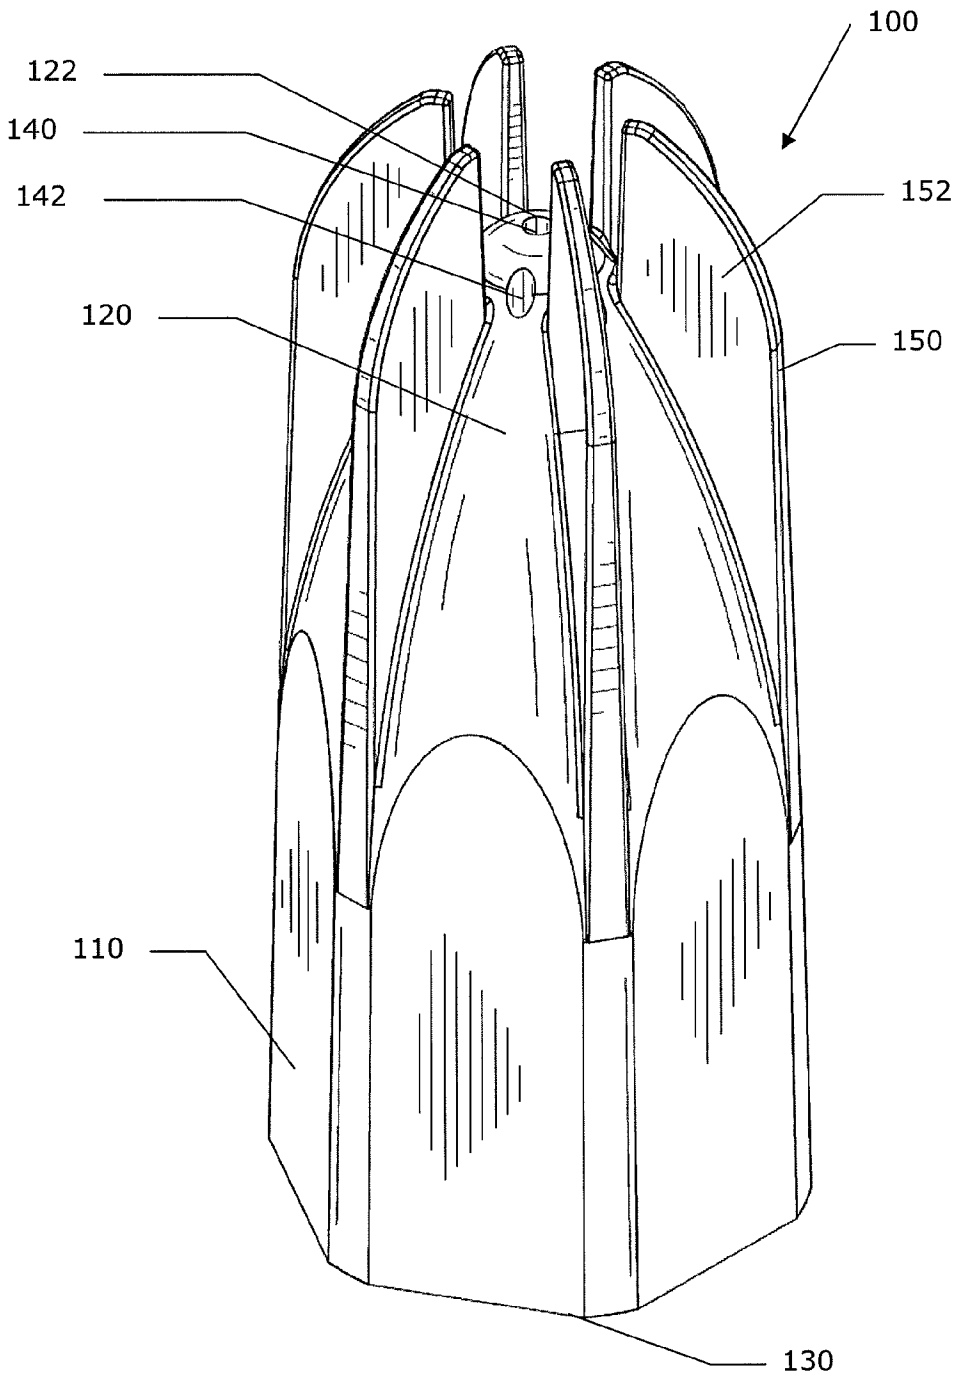


Figure 1

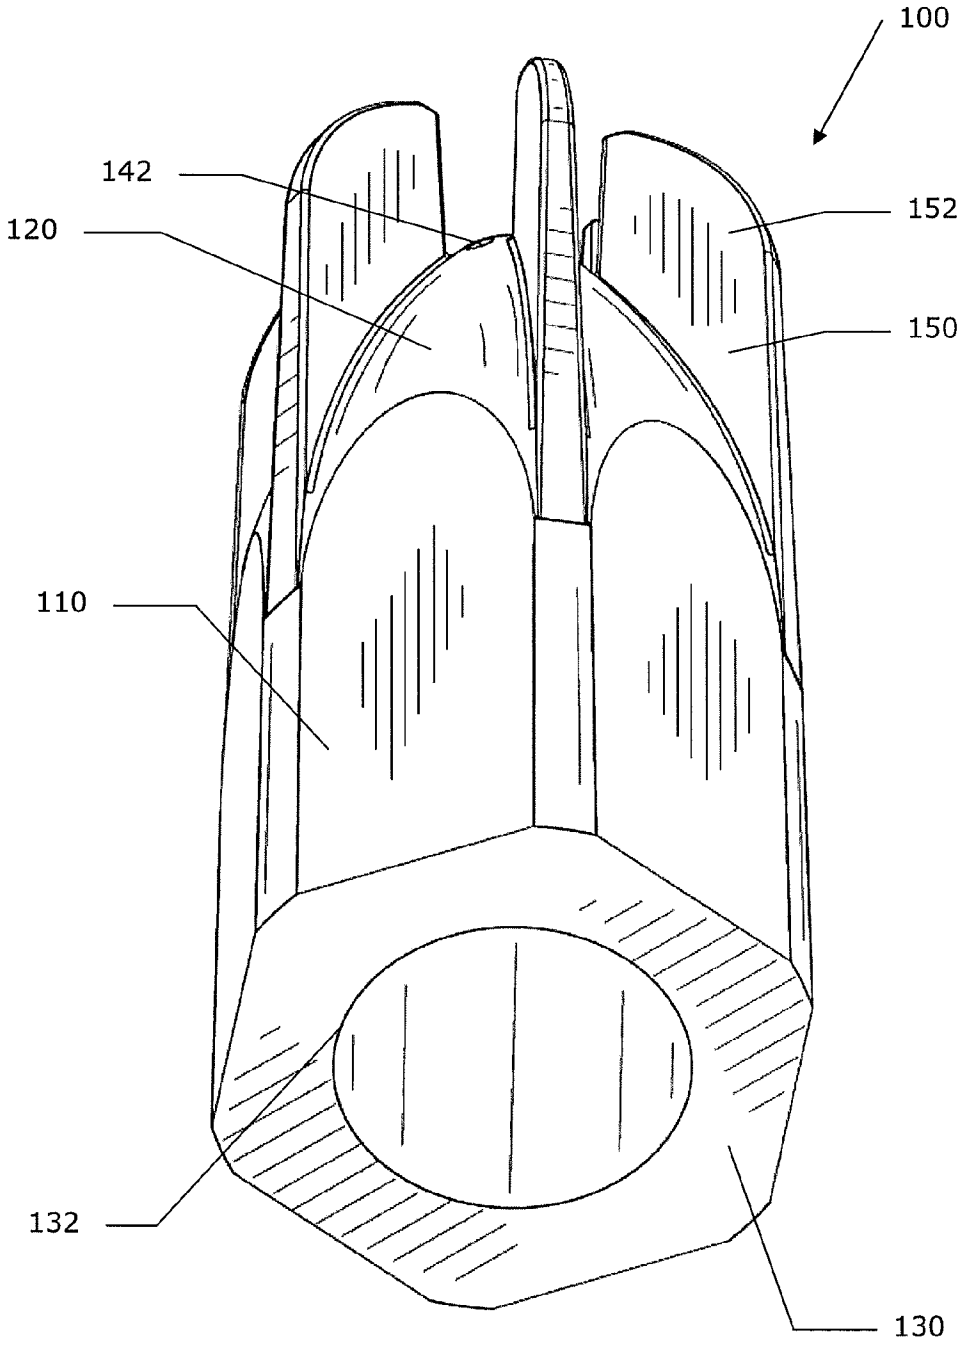


Figure 2

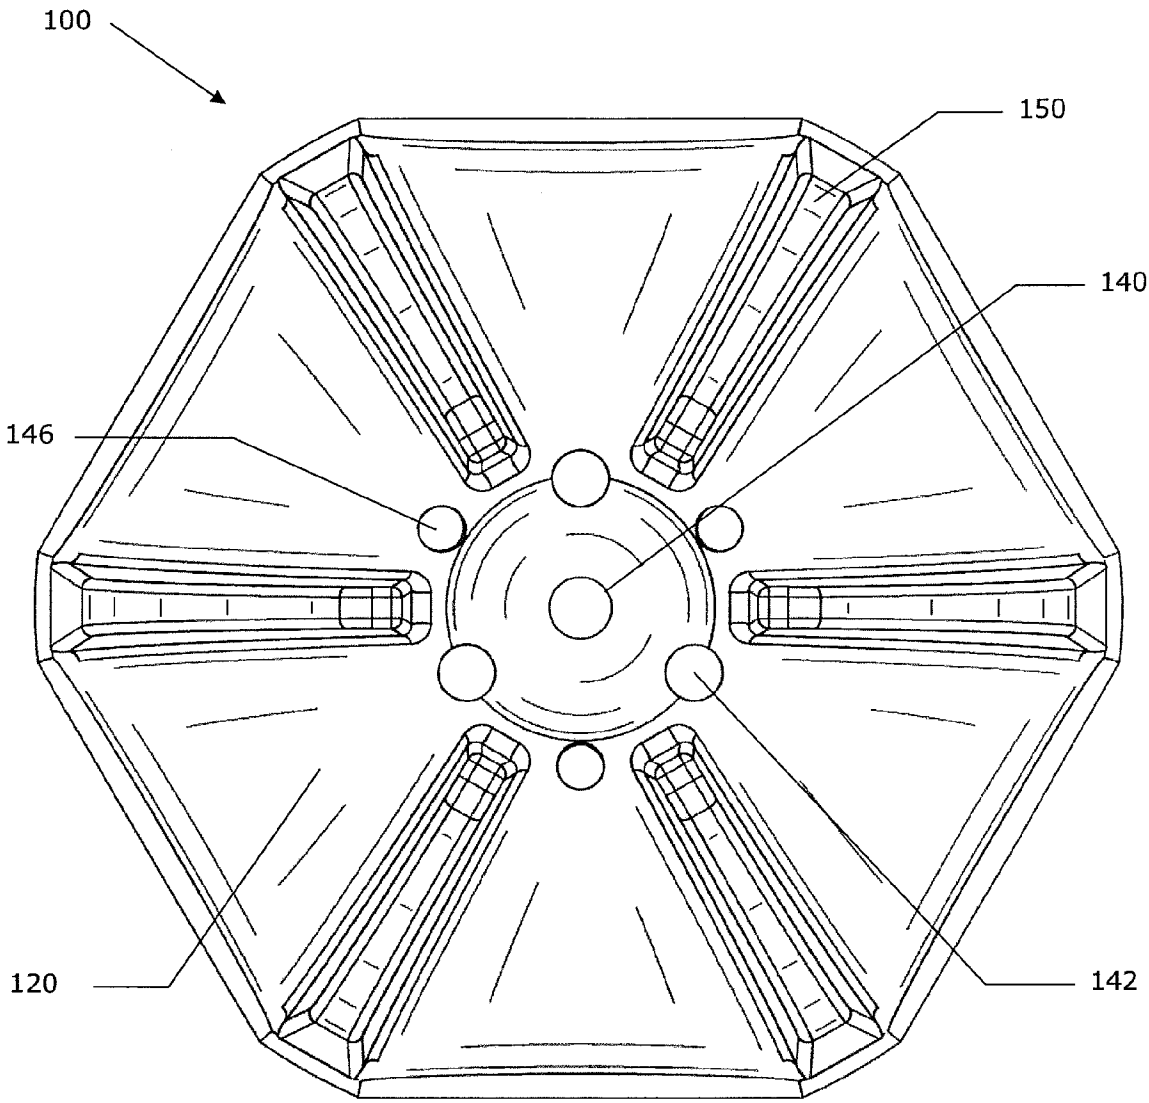


Figure 3

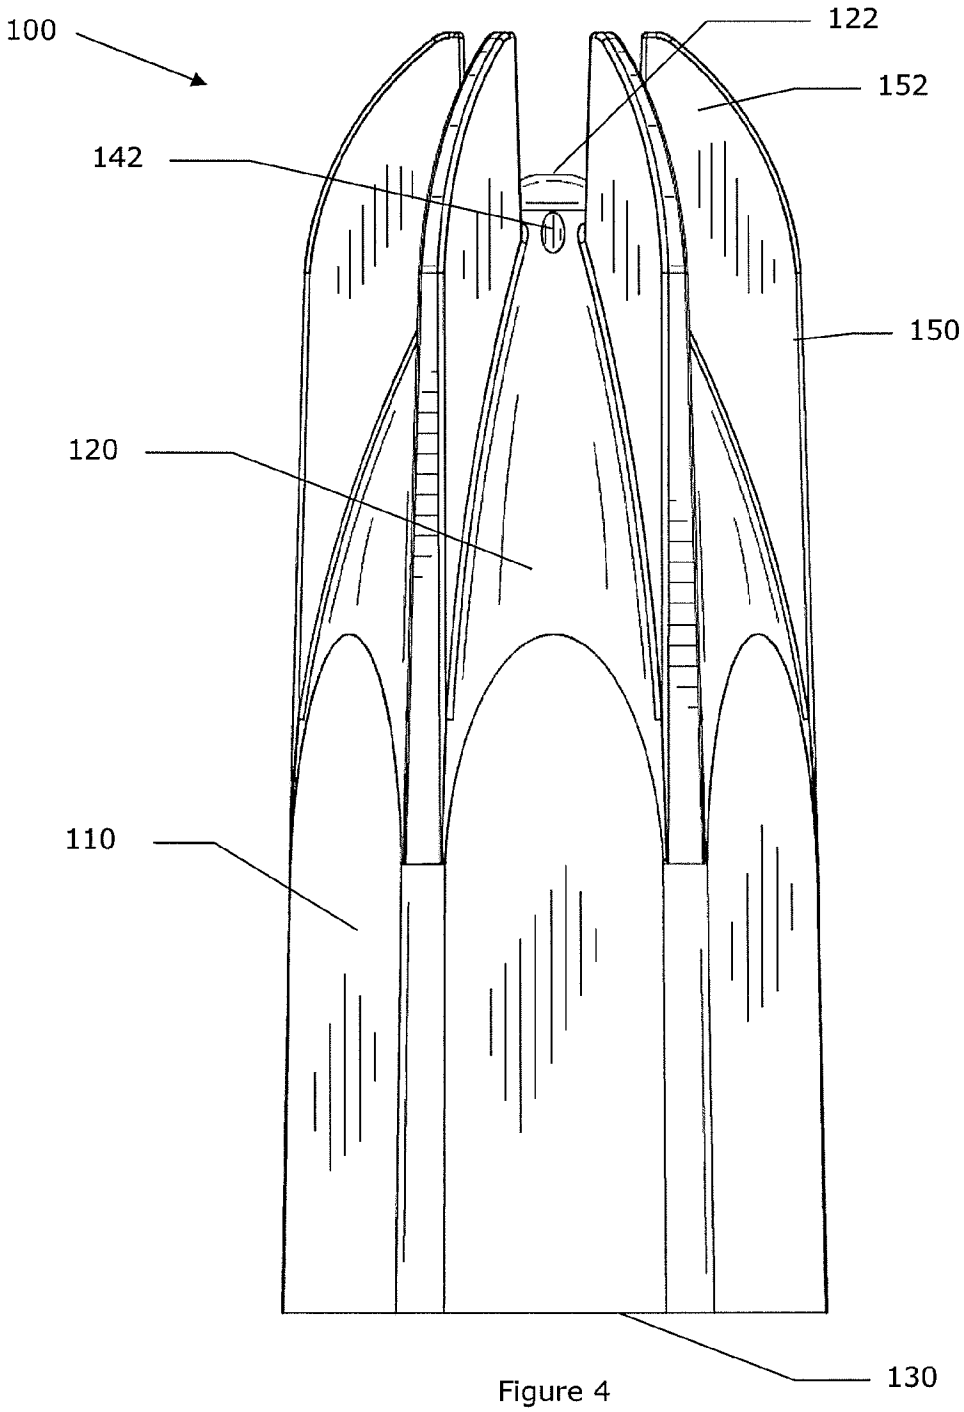


Figure 4

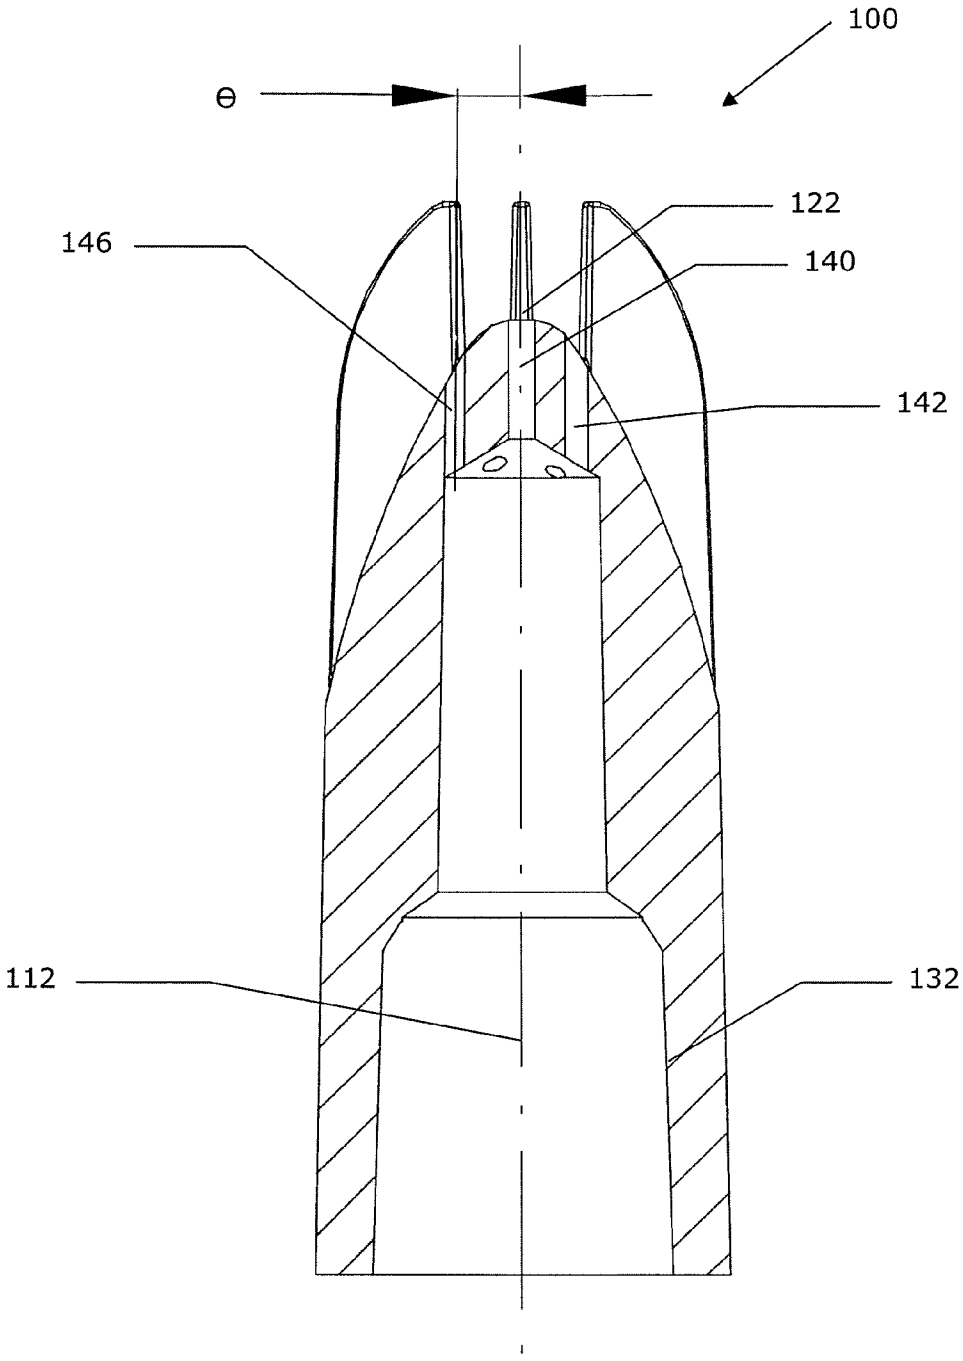


Figure 5

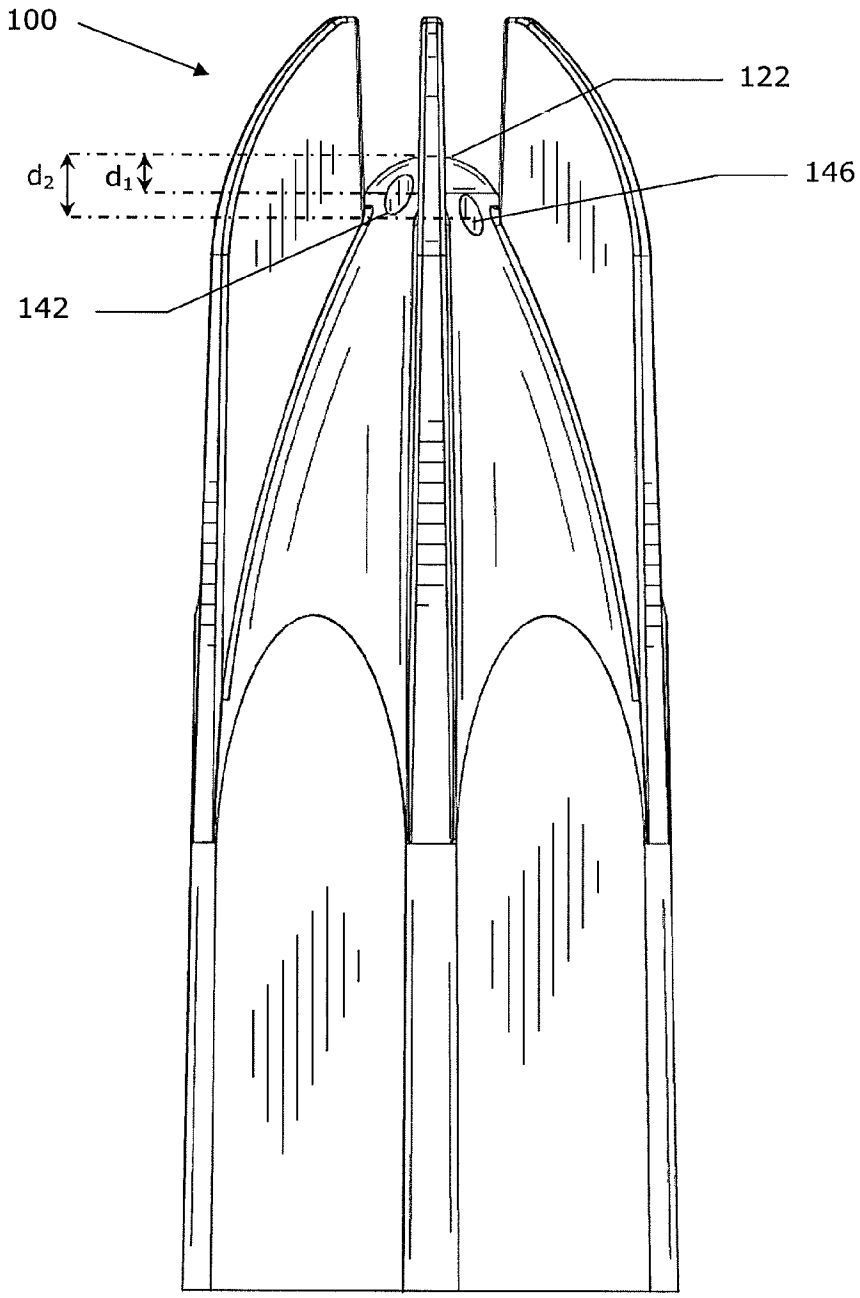


Figure 6

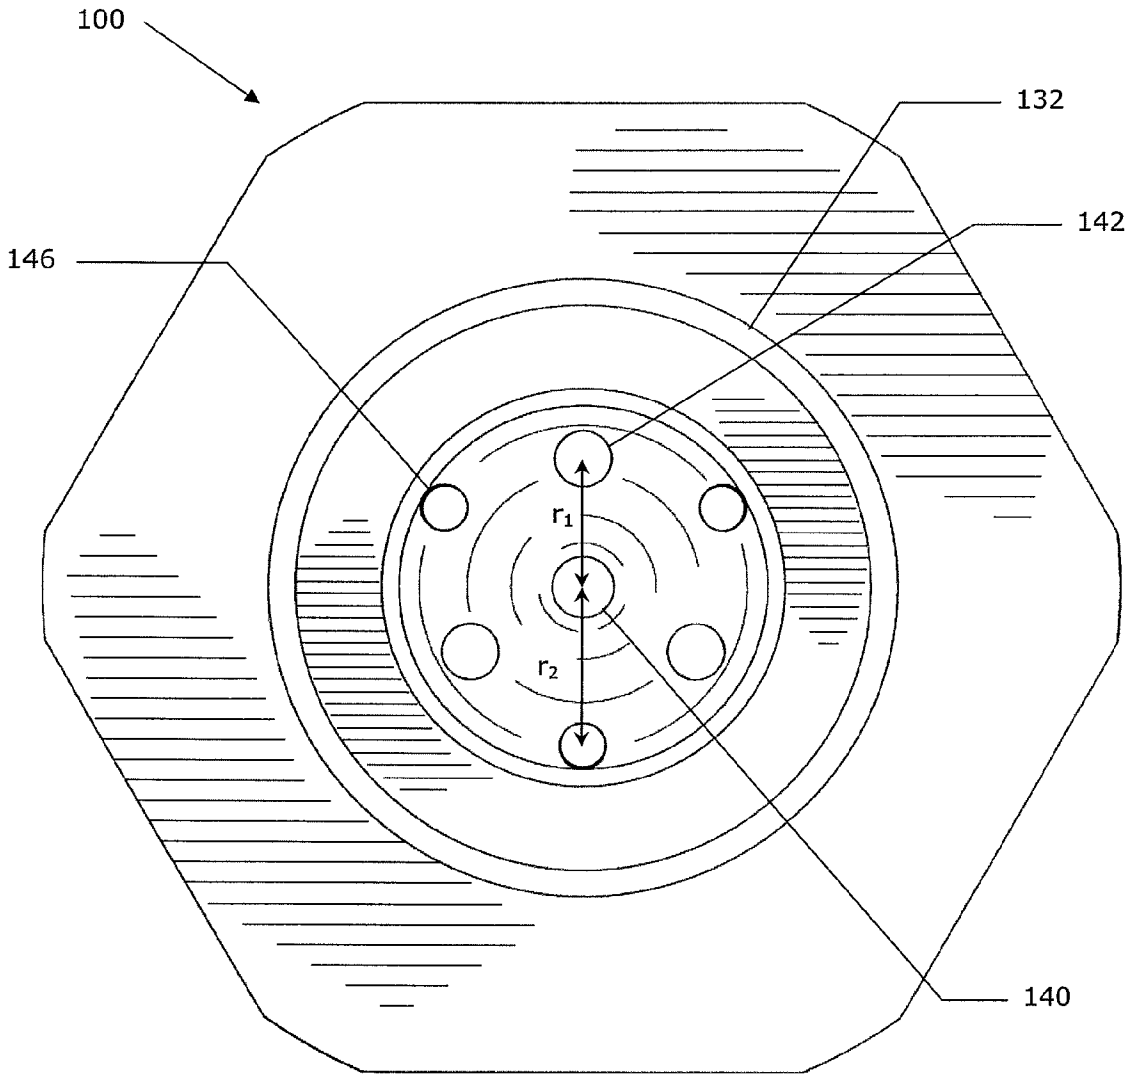


Figure 7

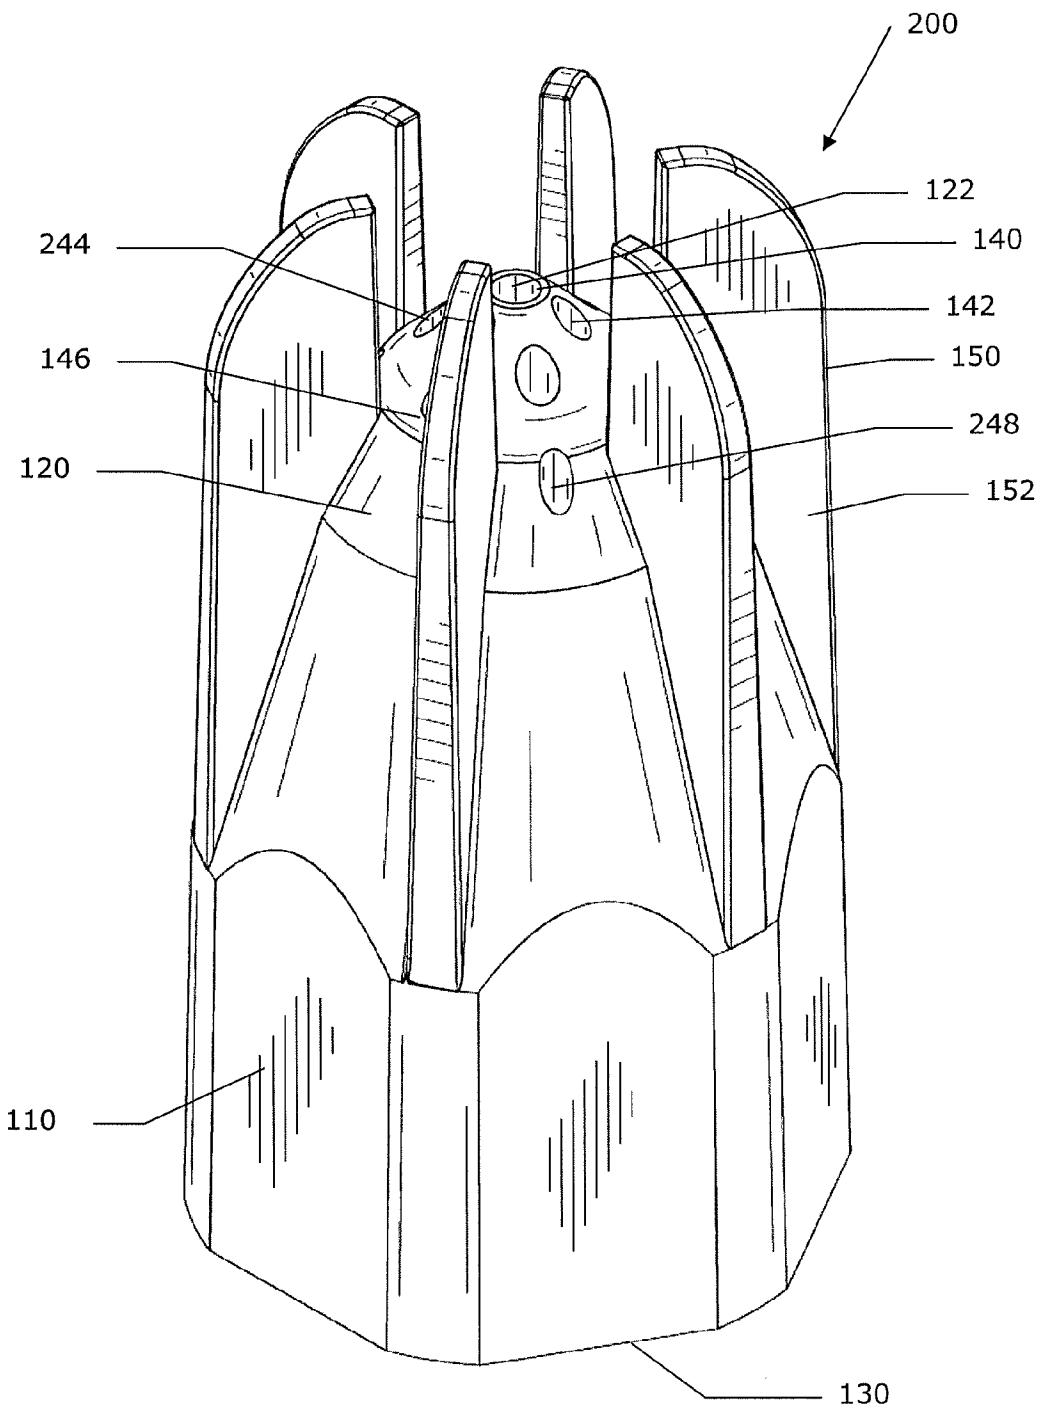


Figure 8

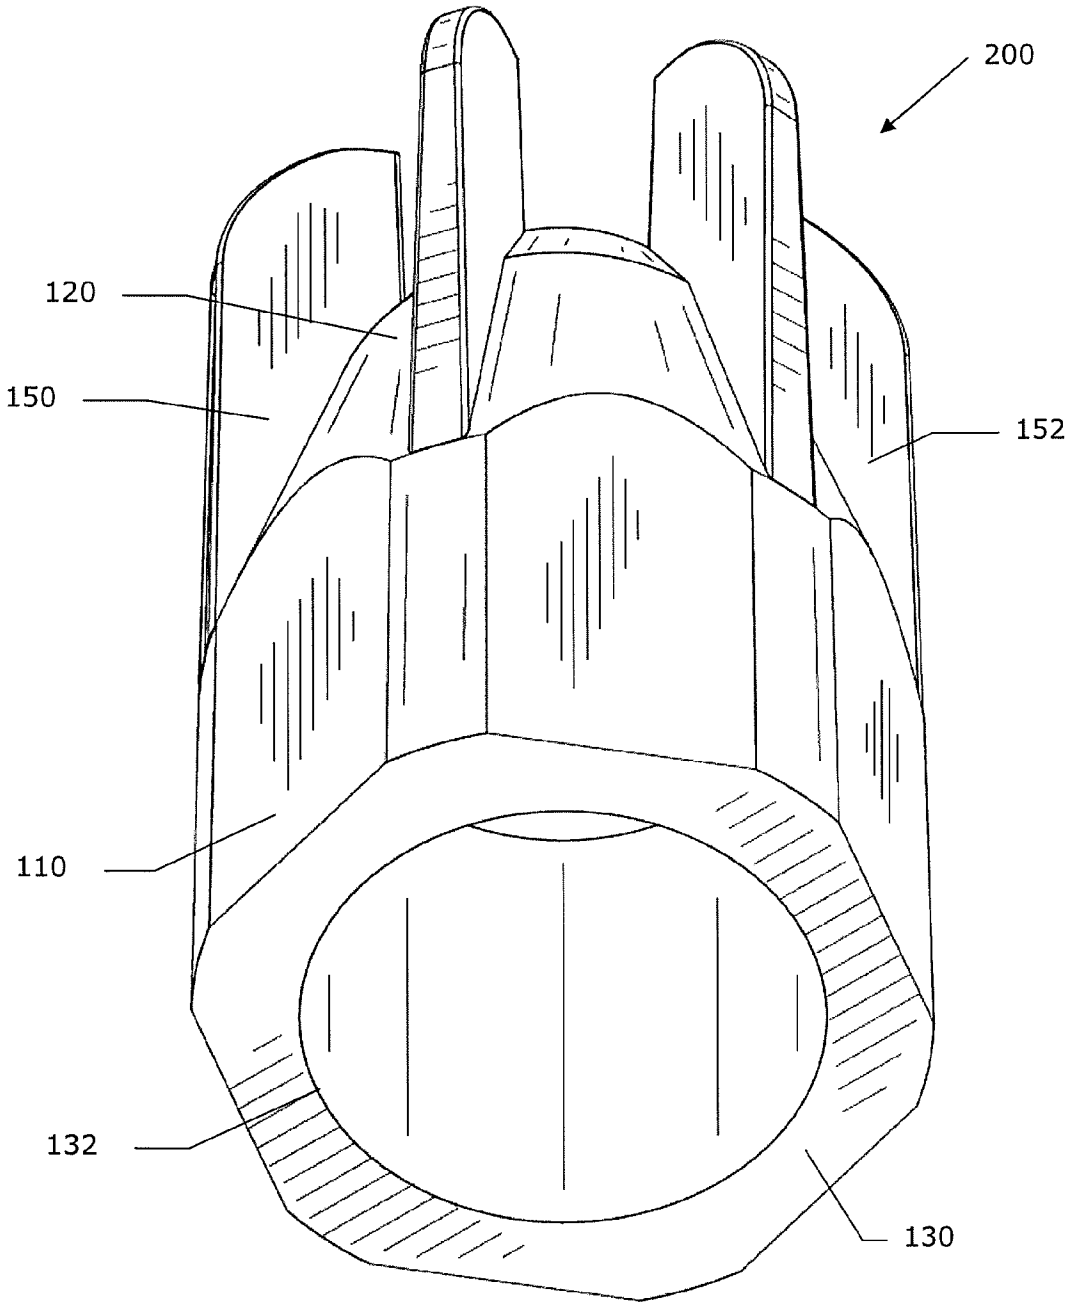


Figure 9

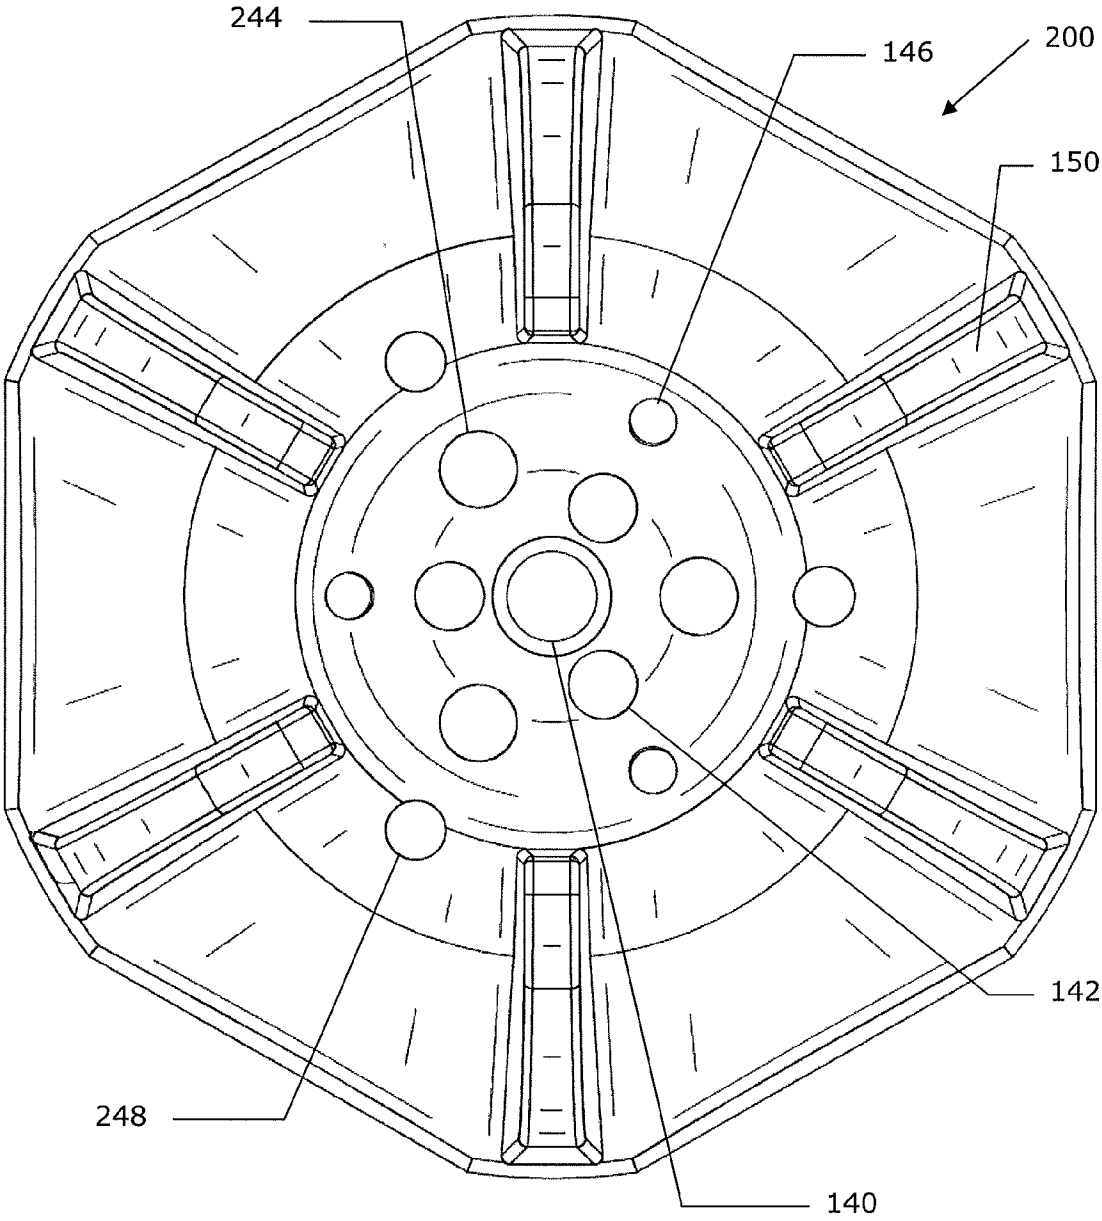


Figure 10

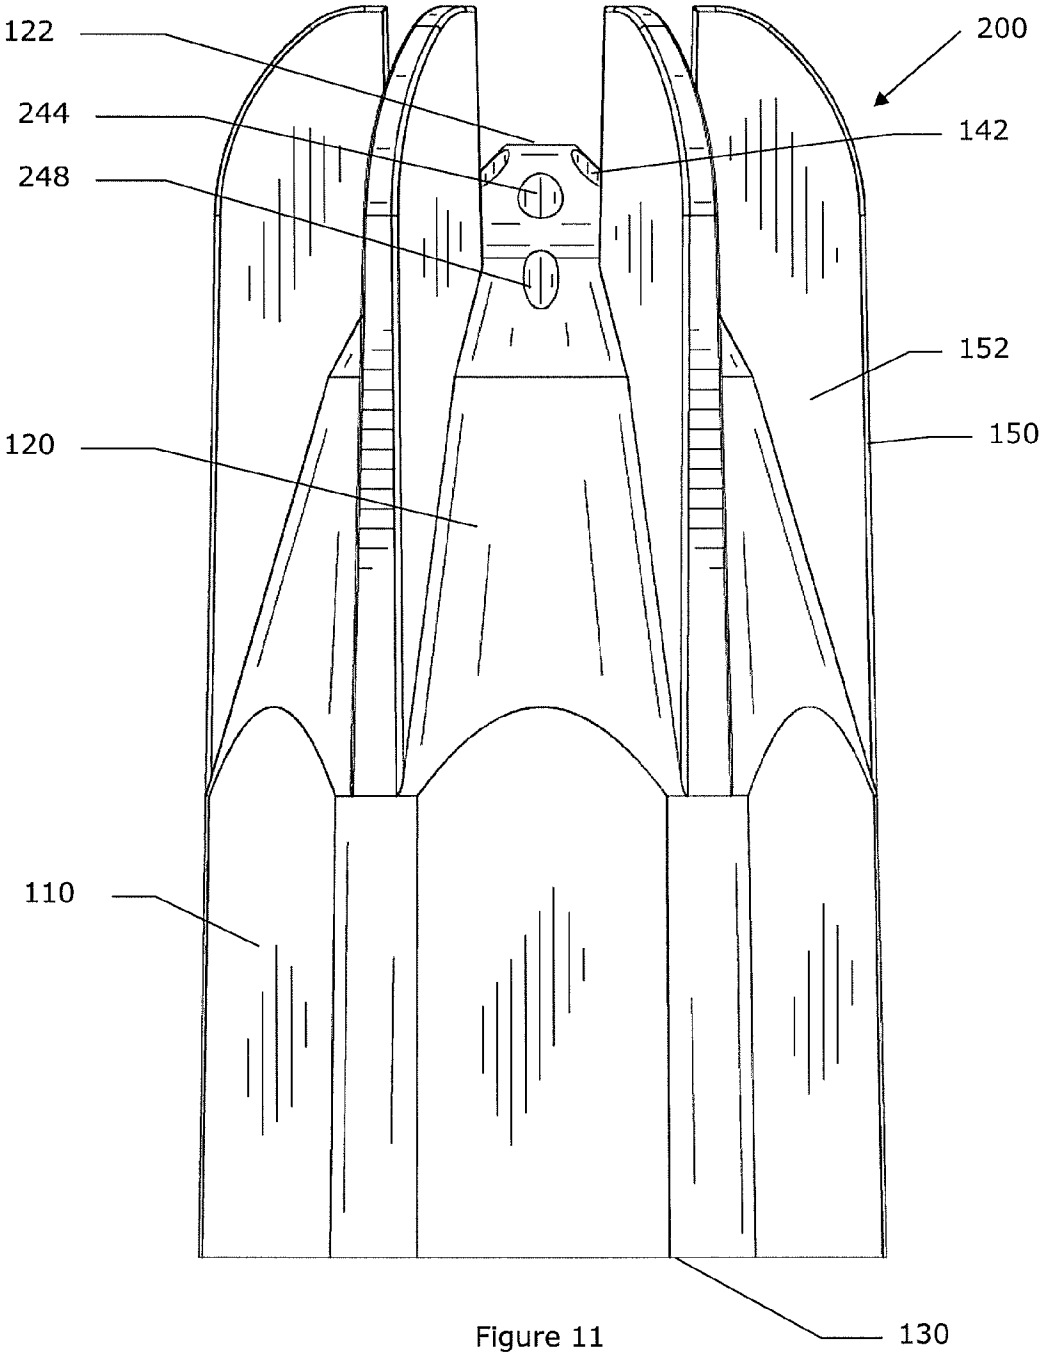


Figure 11

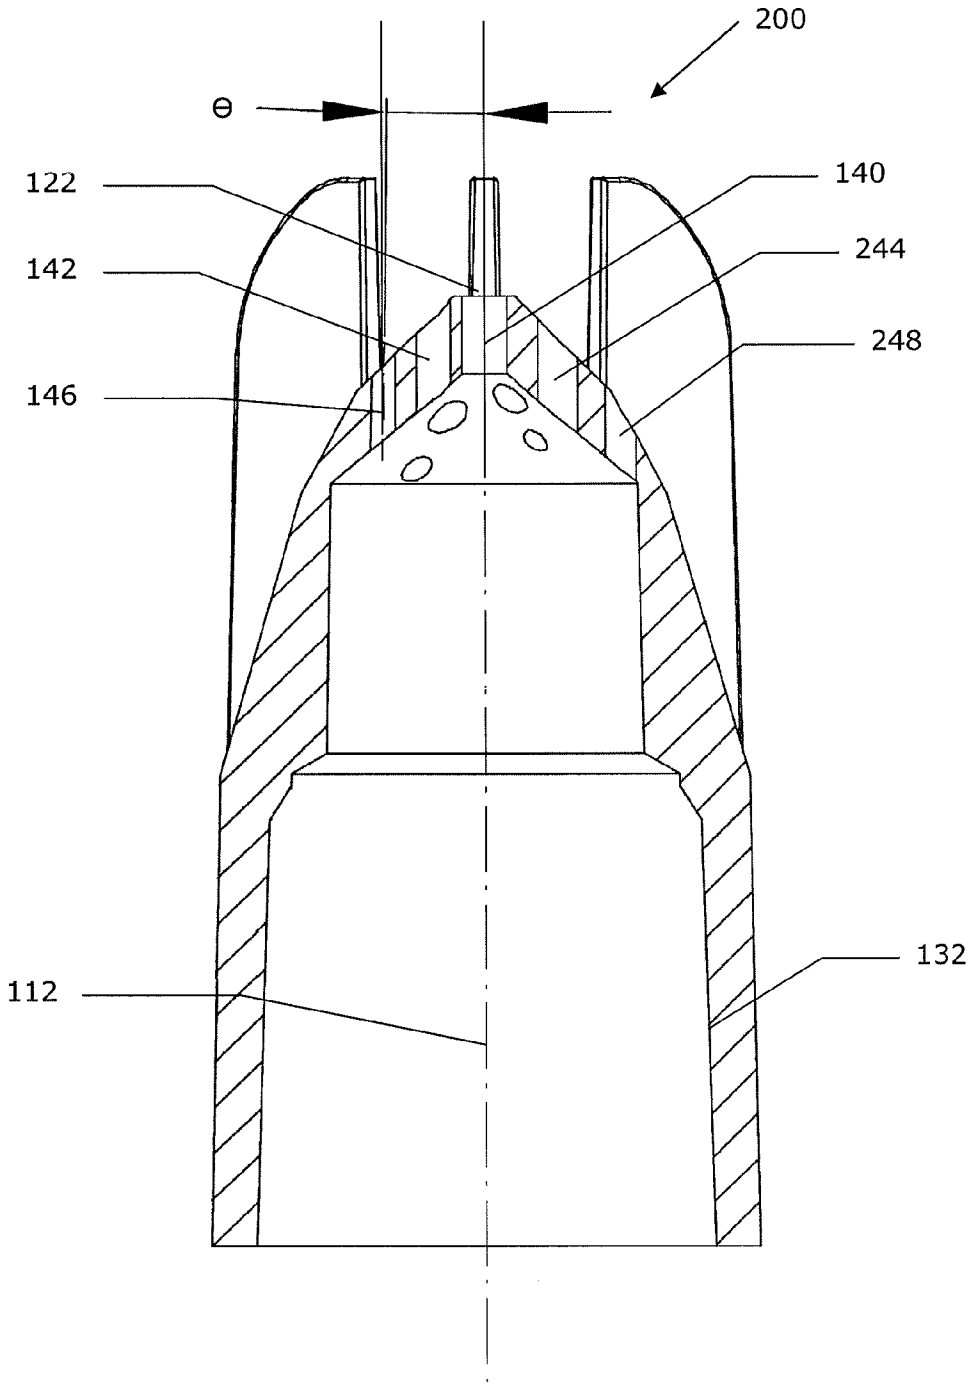


Figure 12

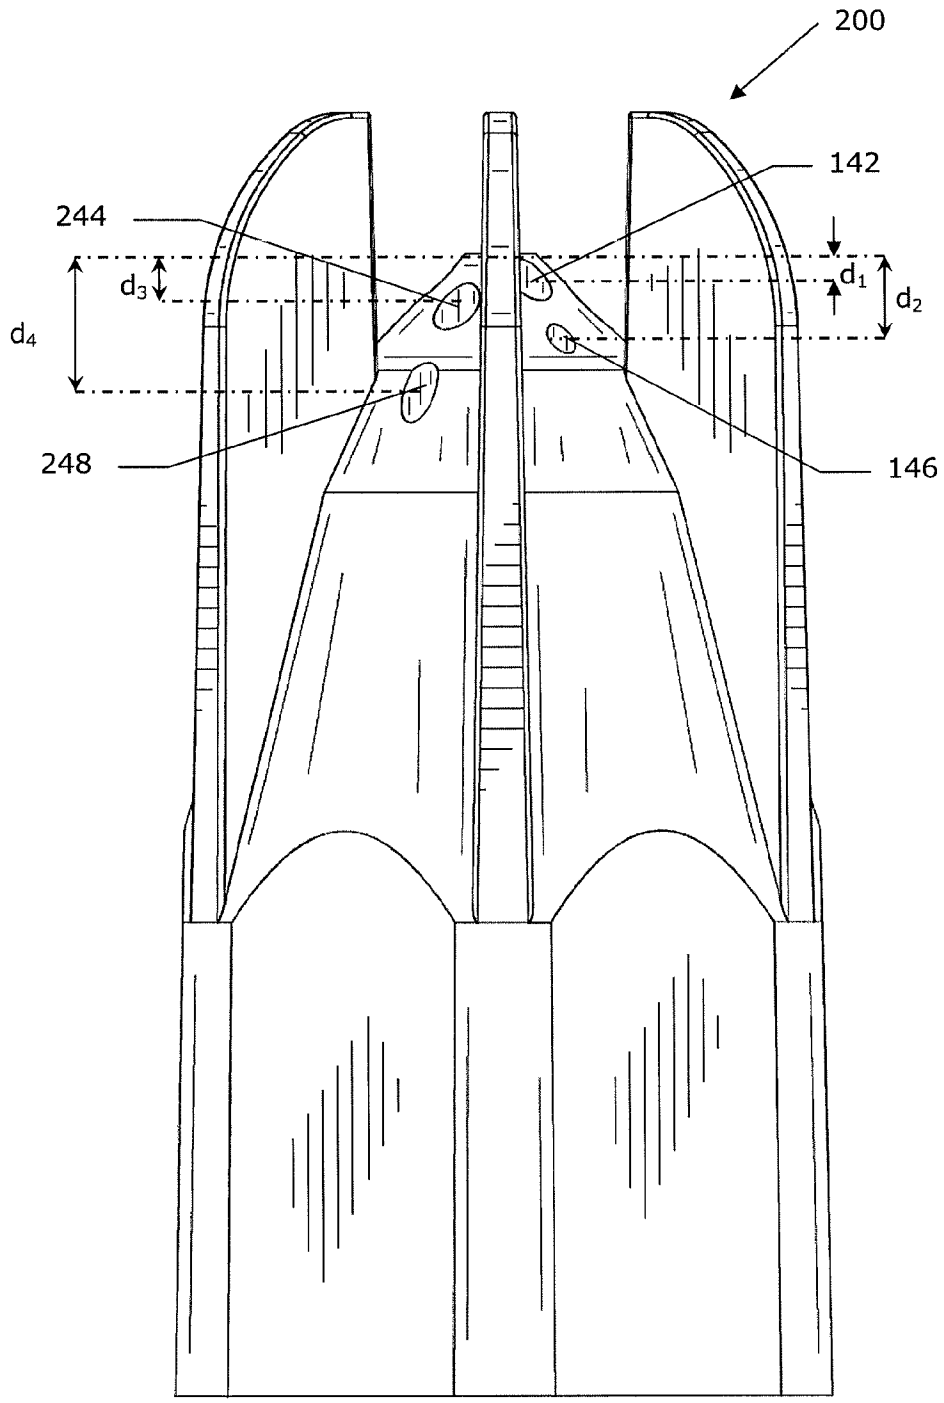


Figure 13

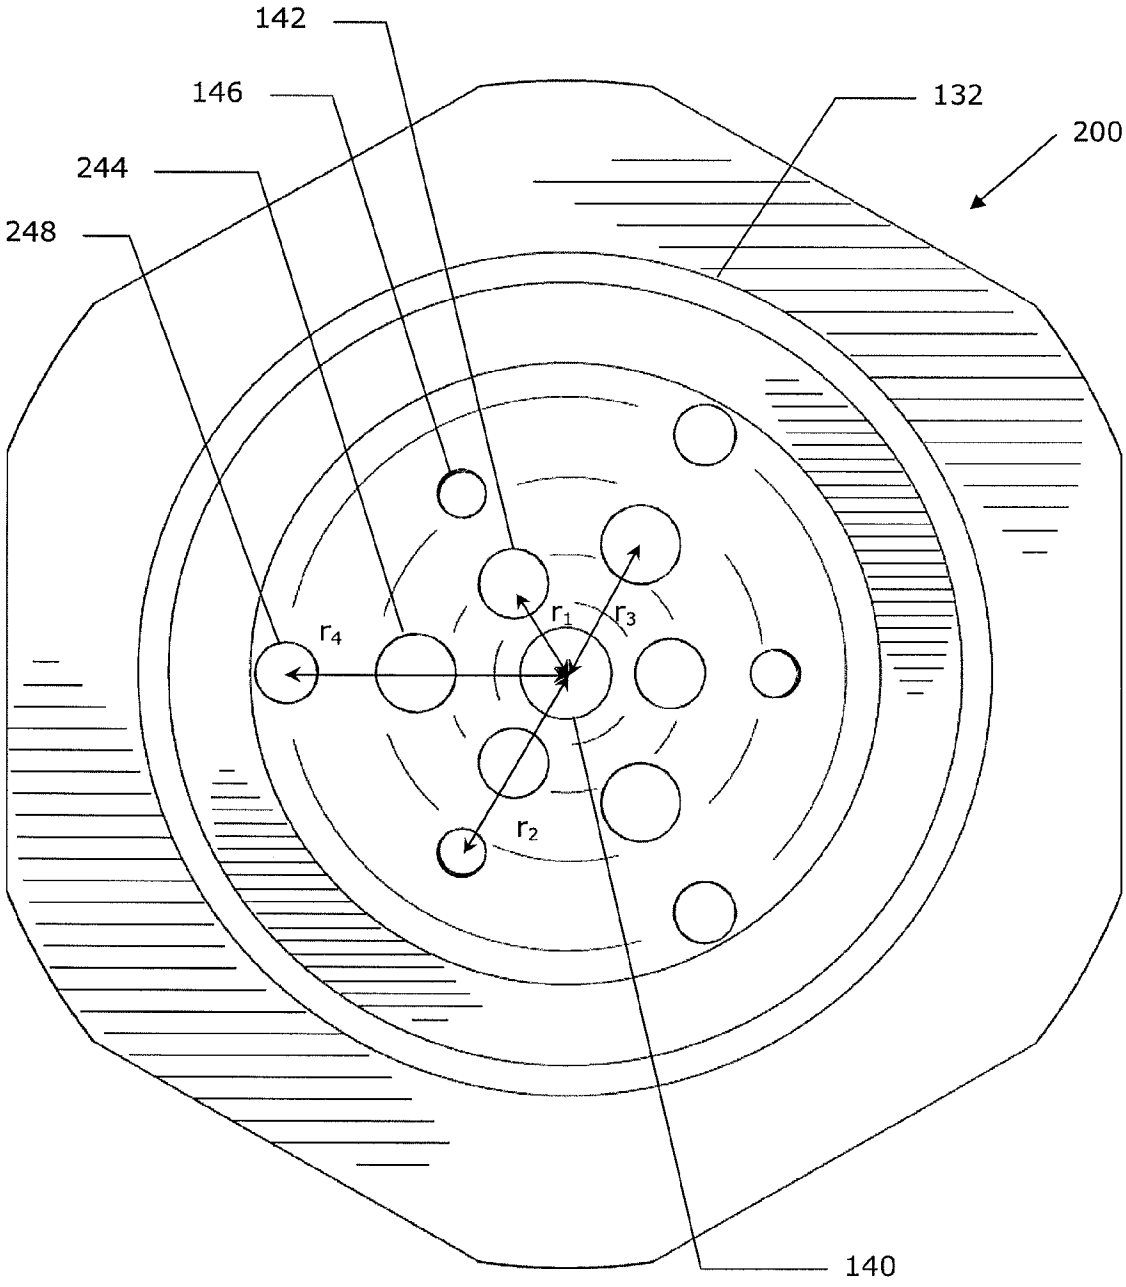


Figure 14

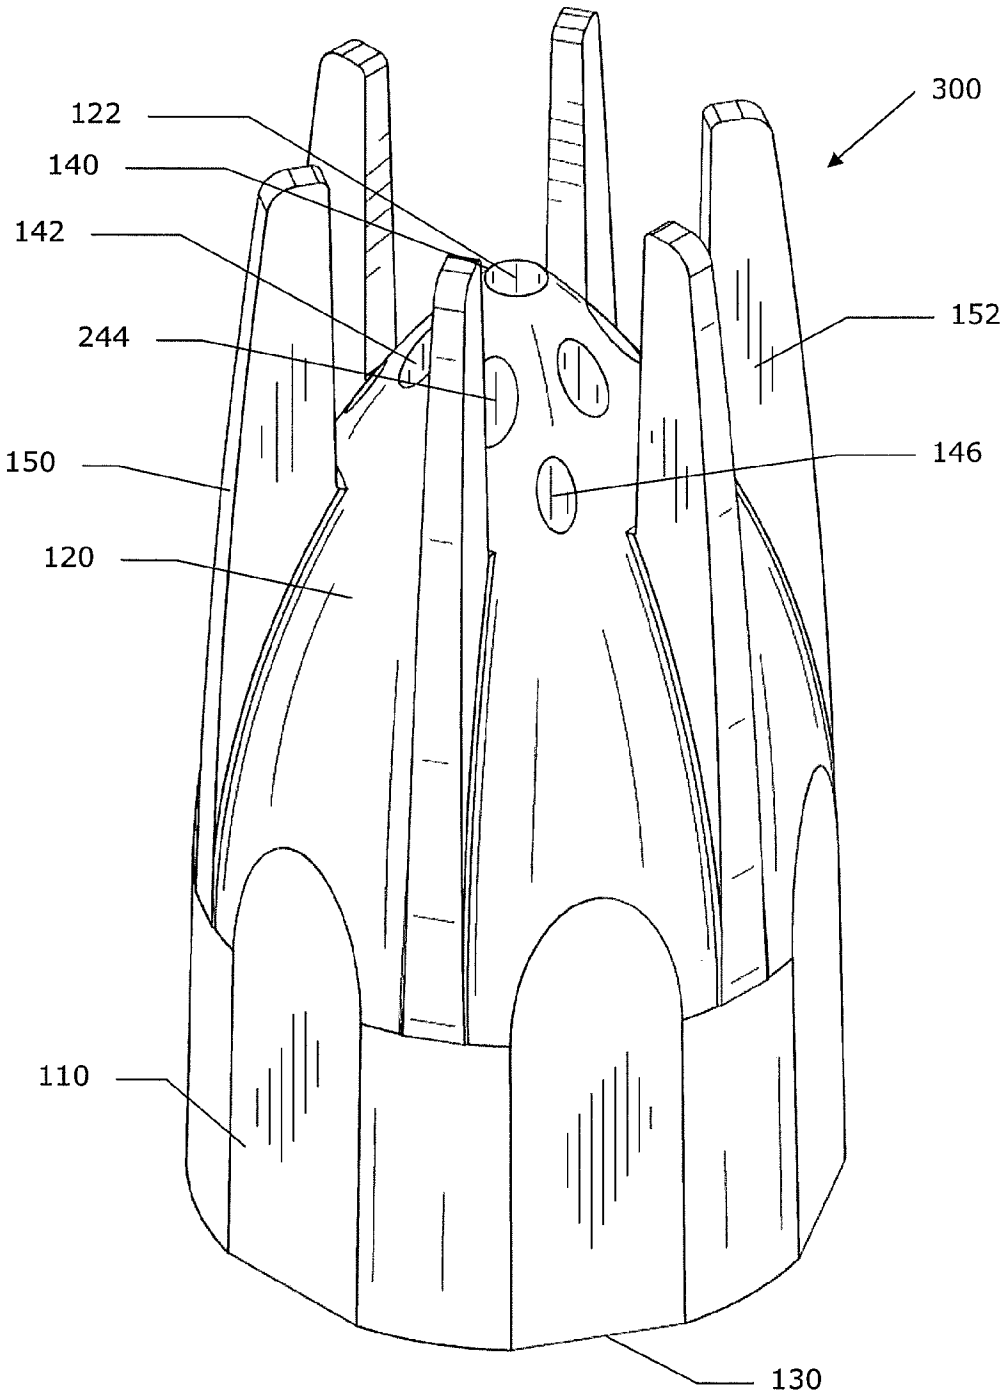


Figure 15

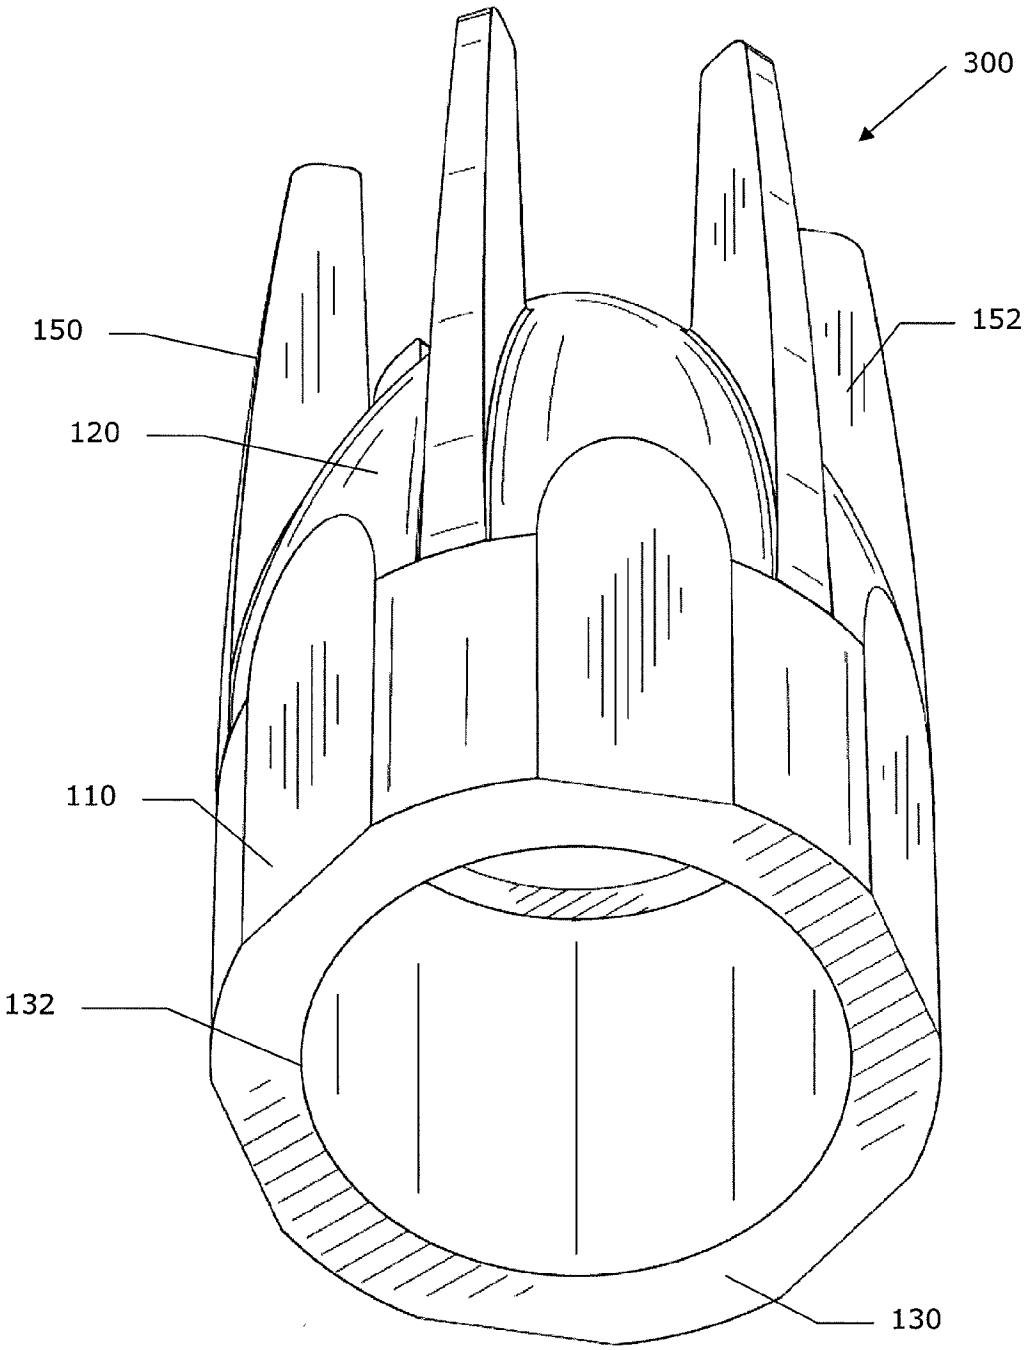


Figure 16

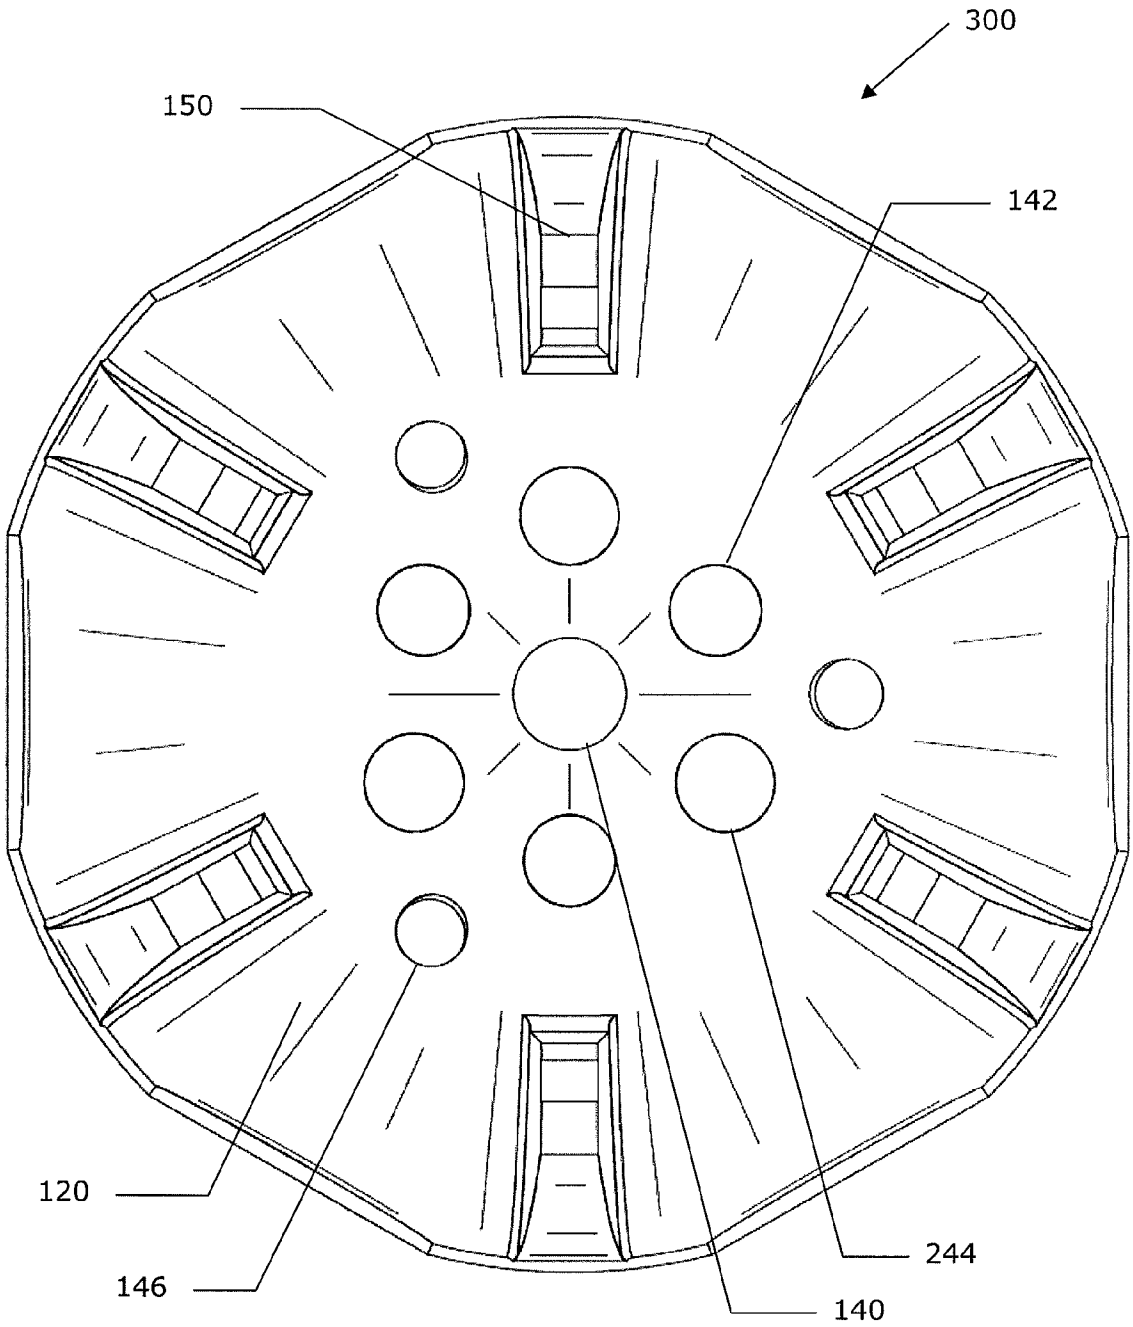


Figure 17

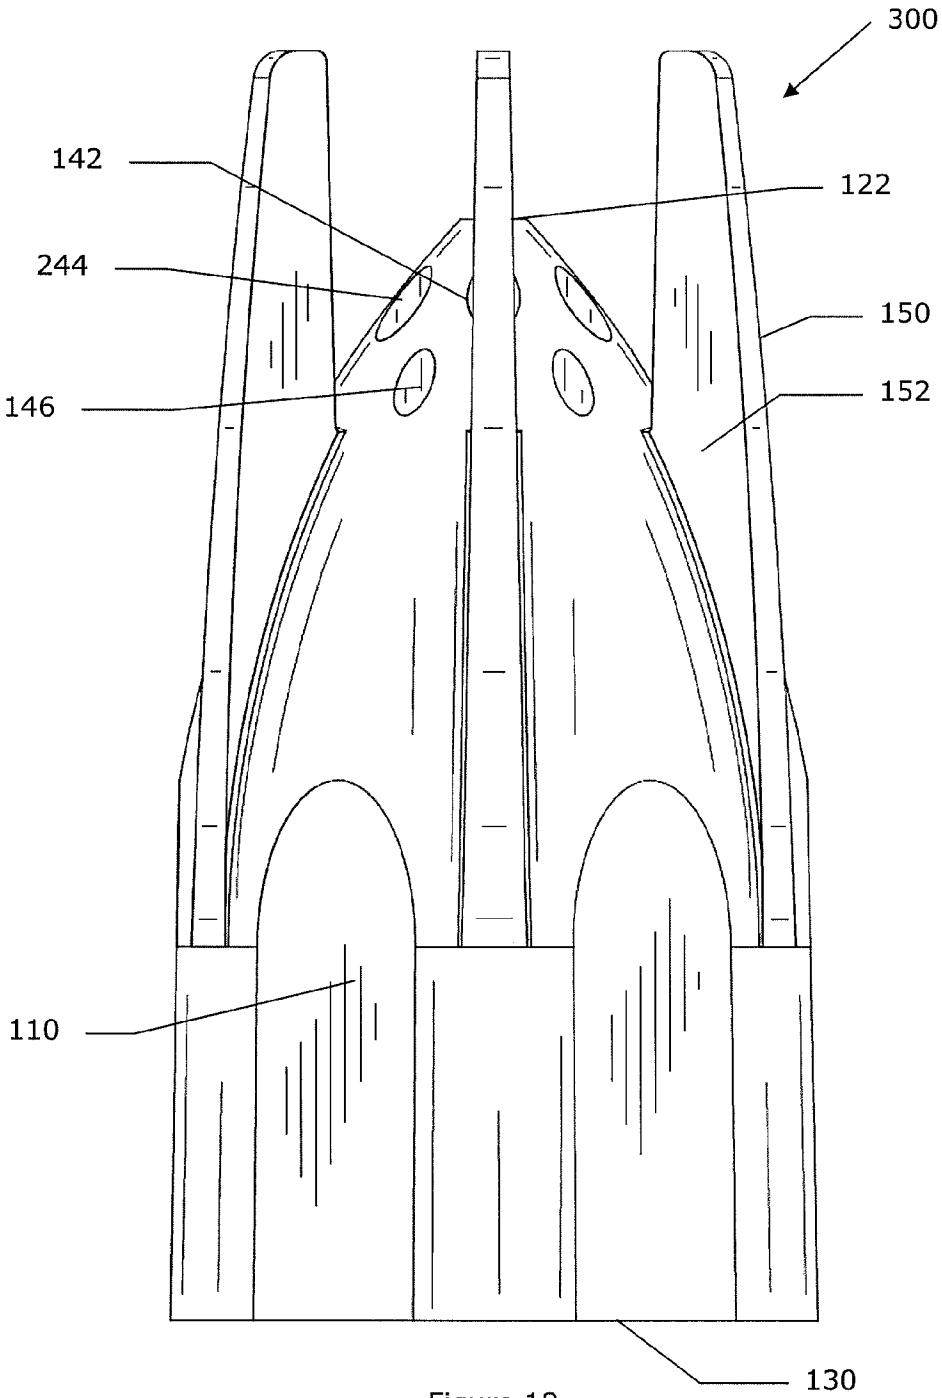


Figure 18

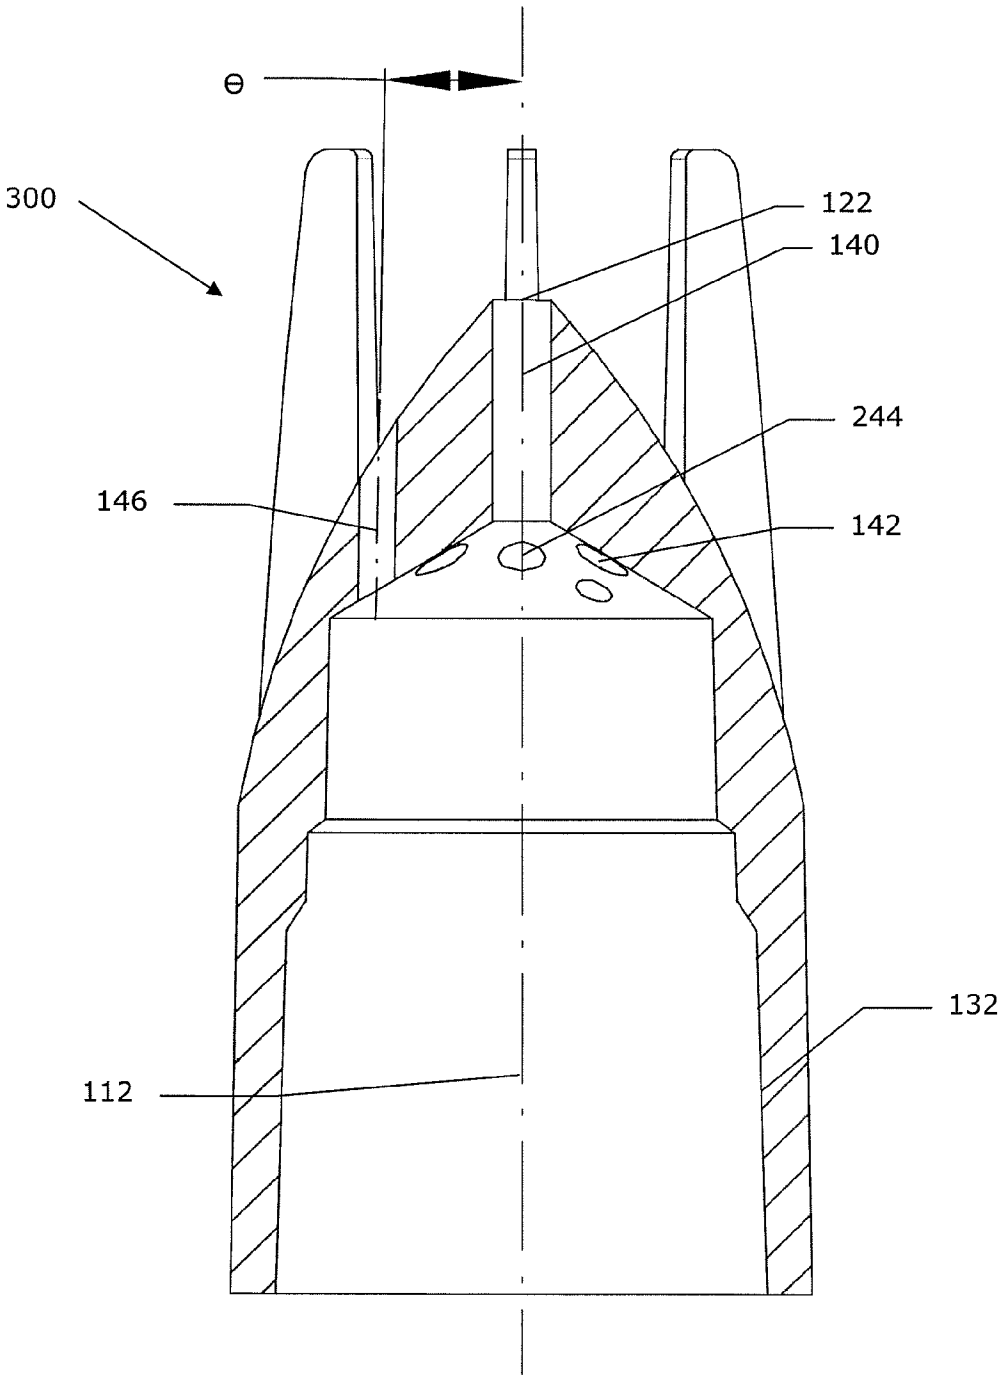


Figure 19

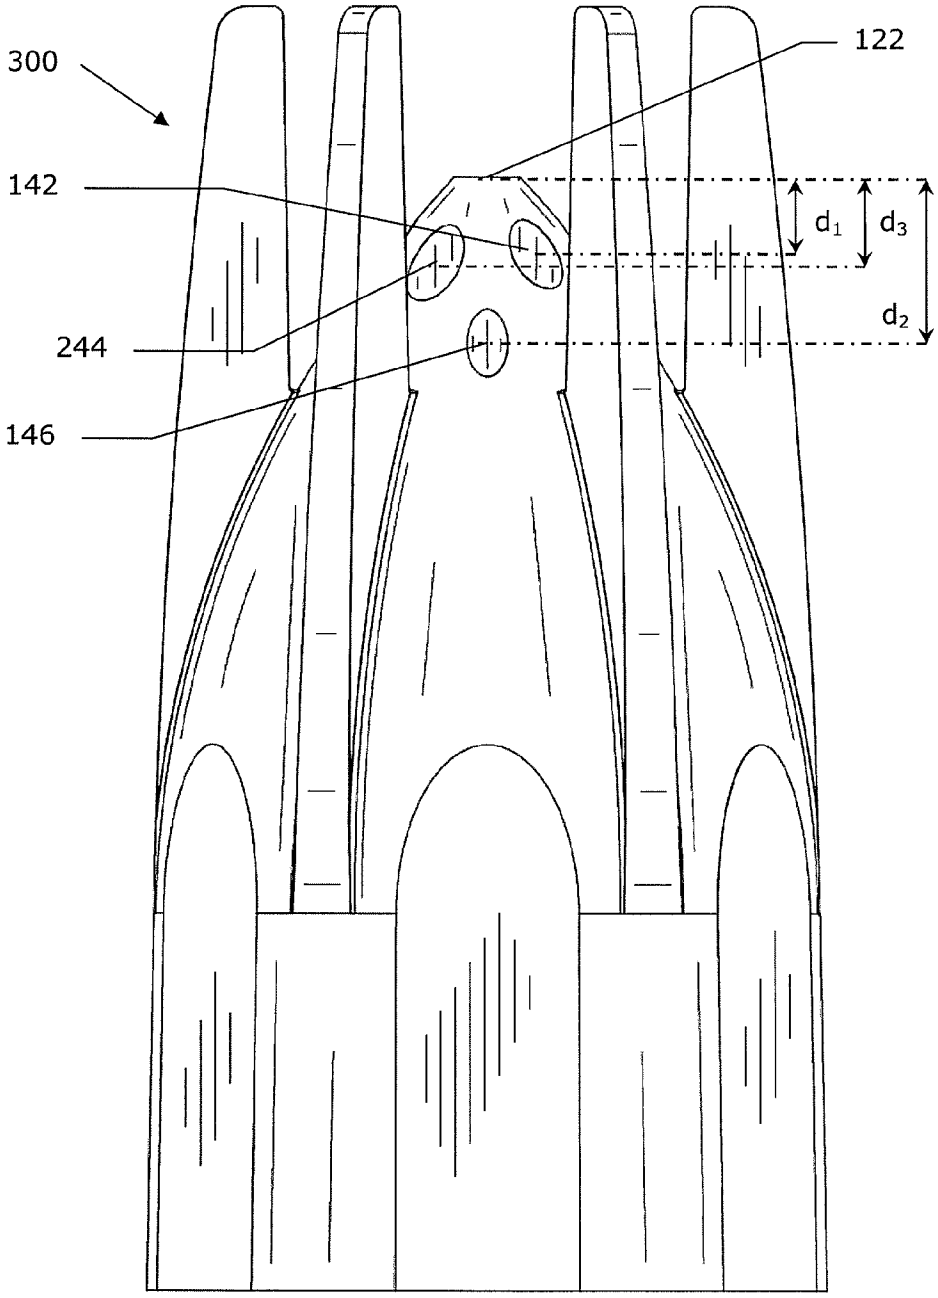


Figure 20

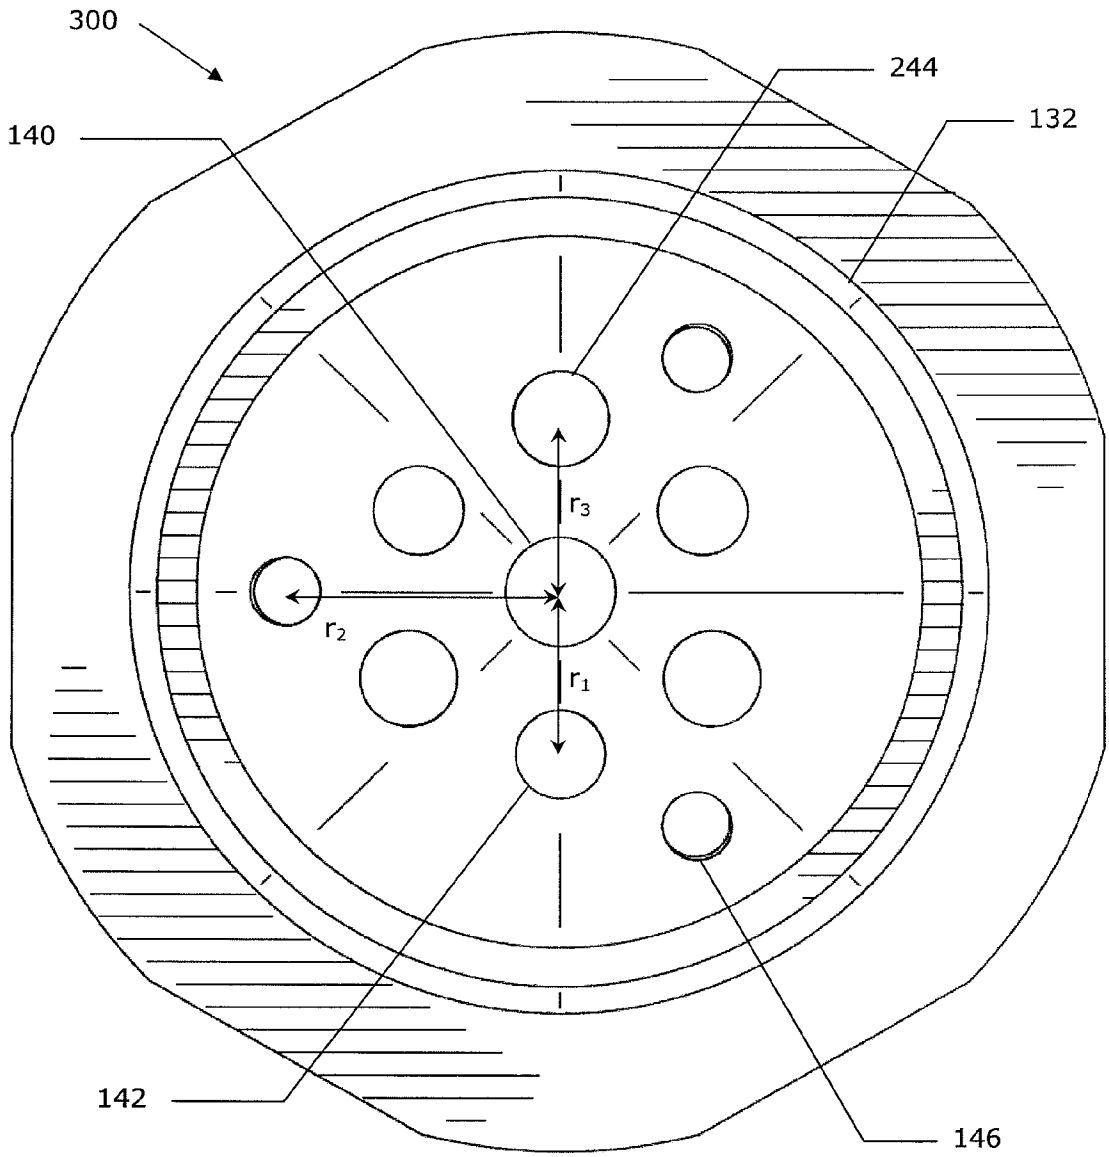


Figure 21

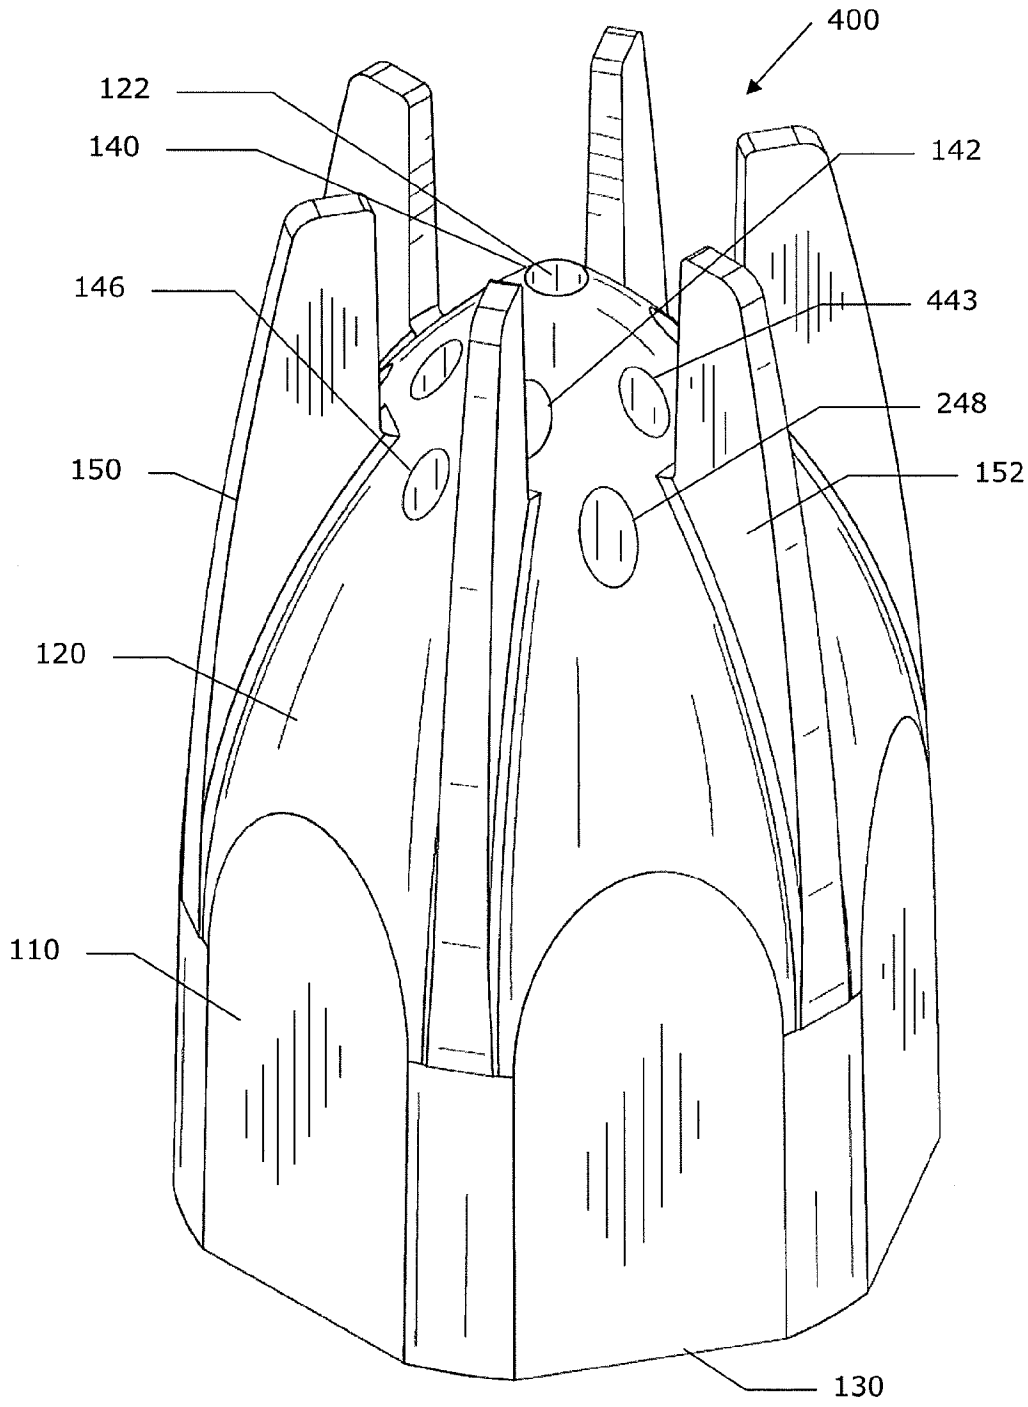


Figure 22

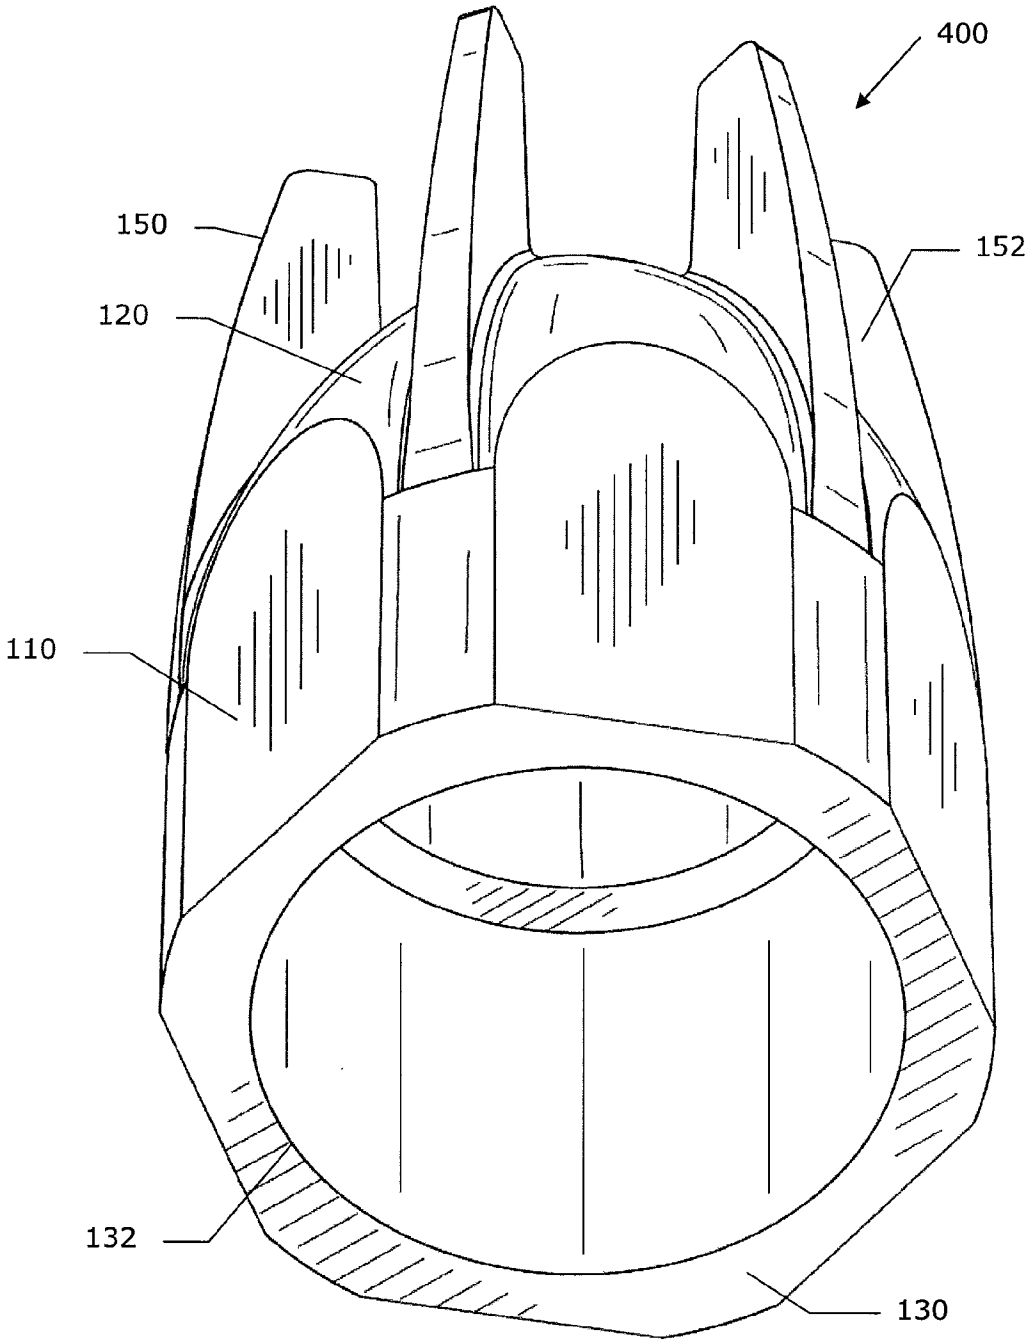


Figure 23

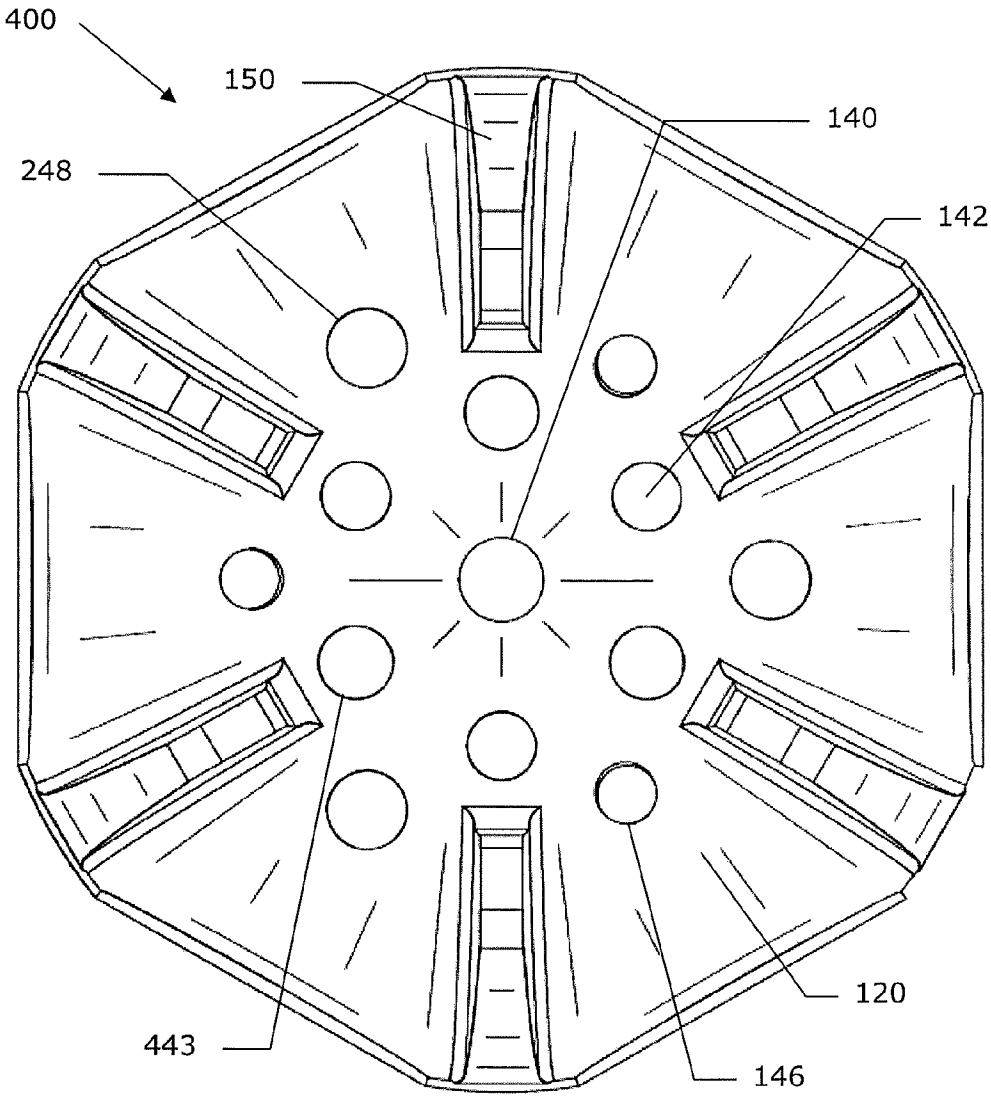


Figure 24

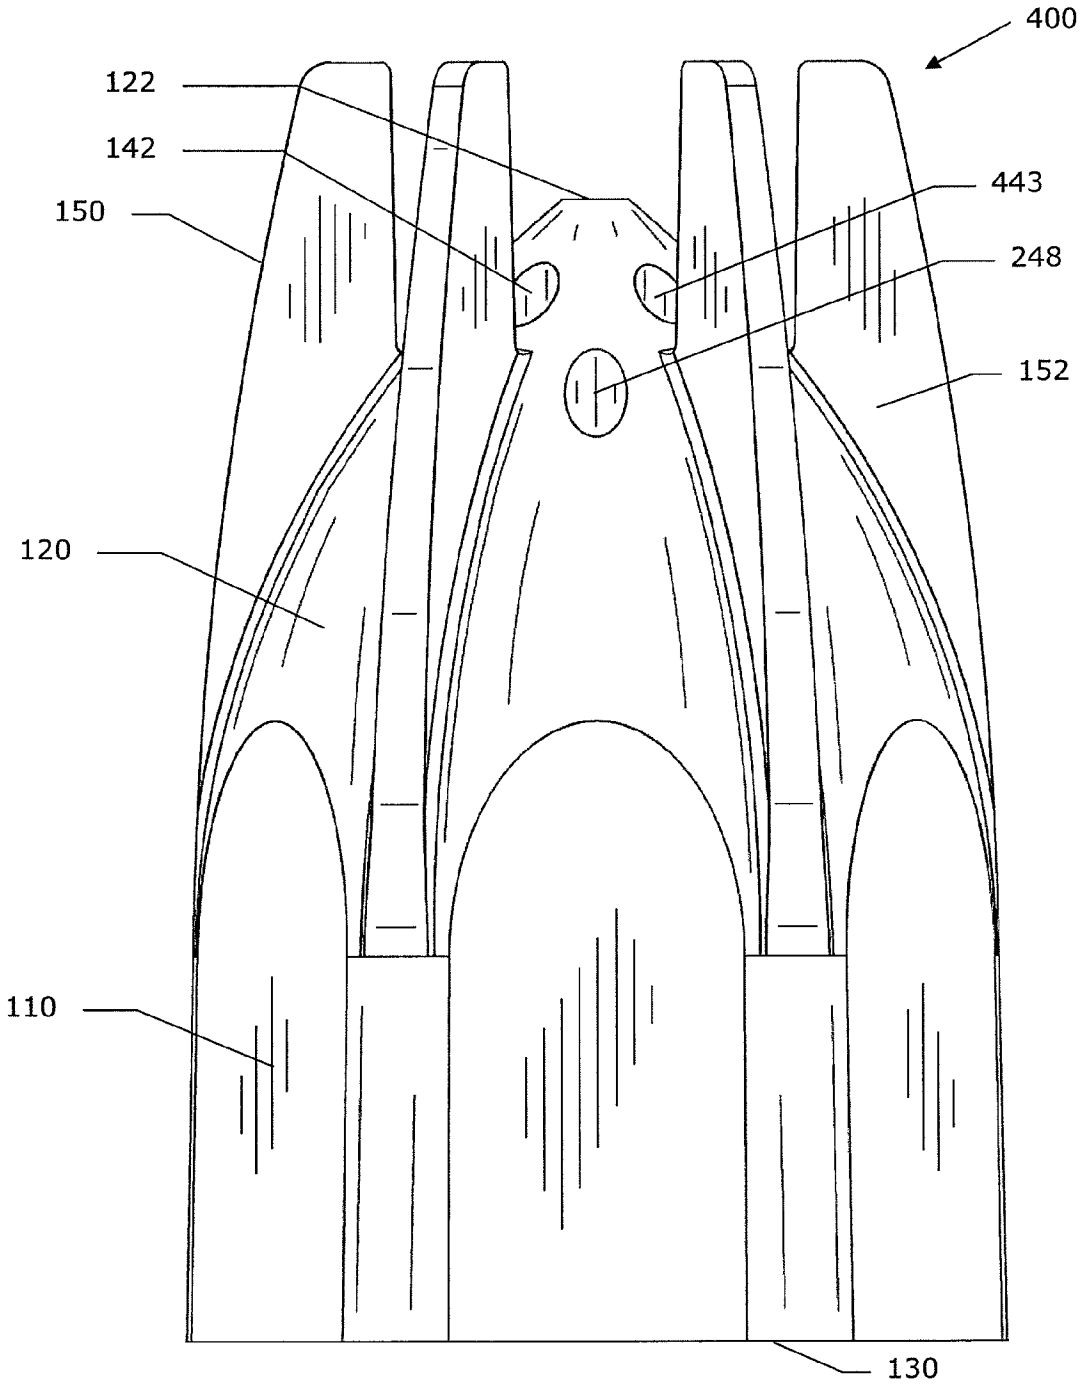


Figure 25

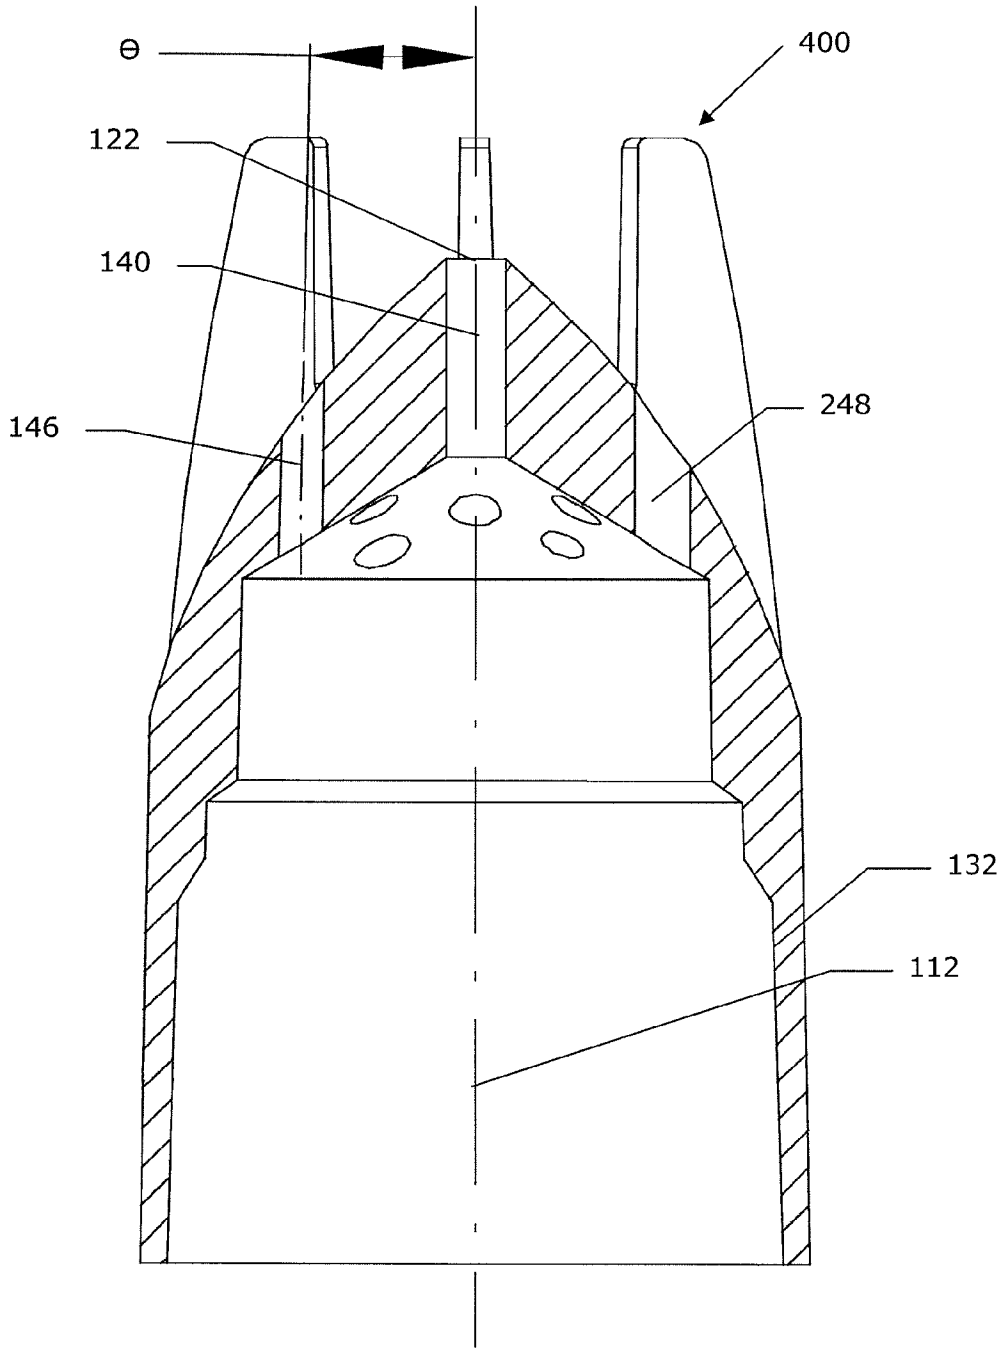


Figure 26

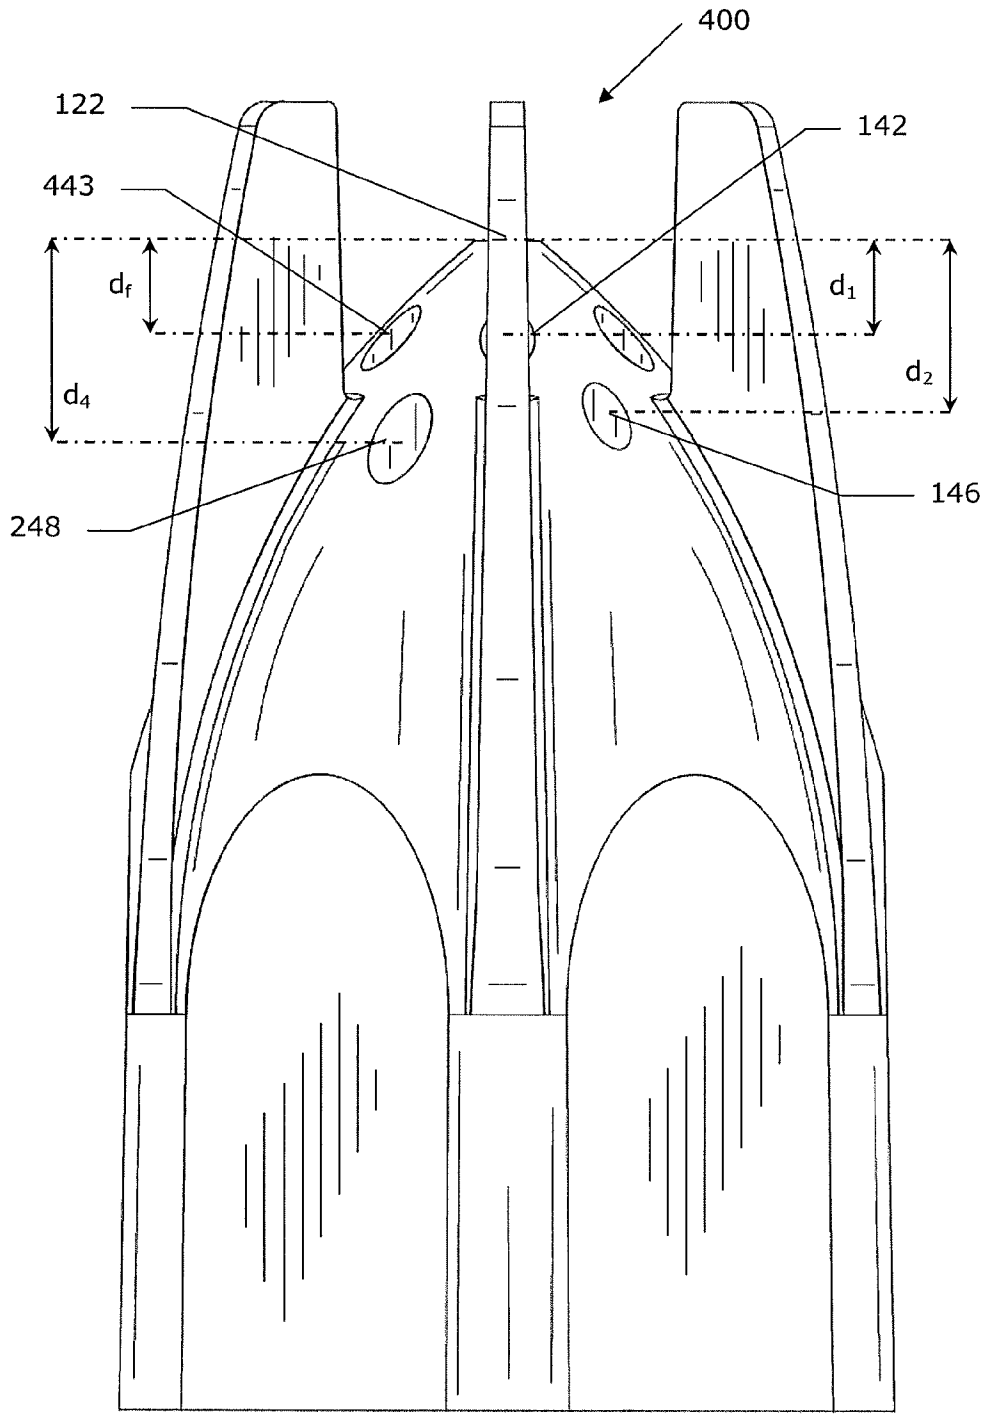


Figure 27

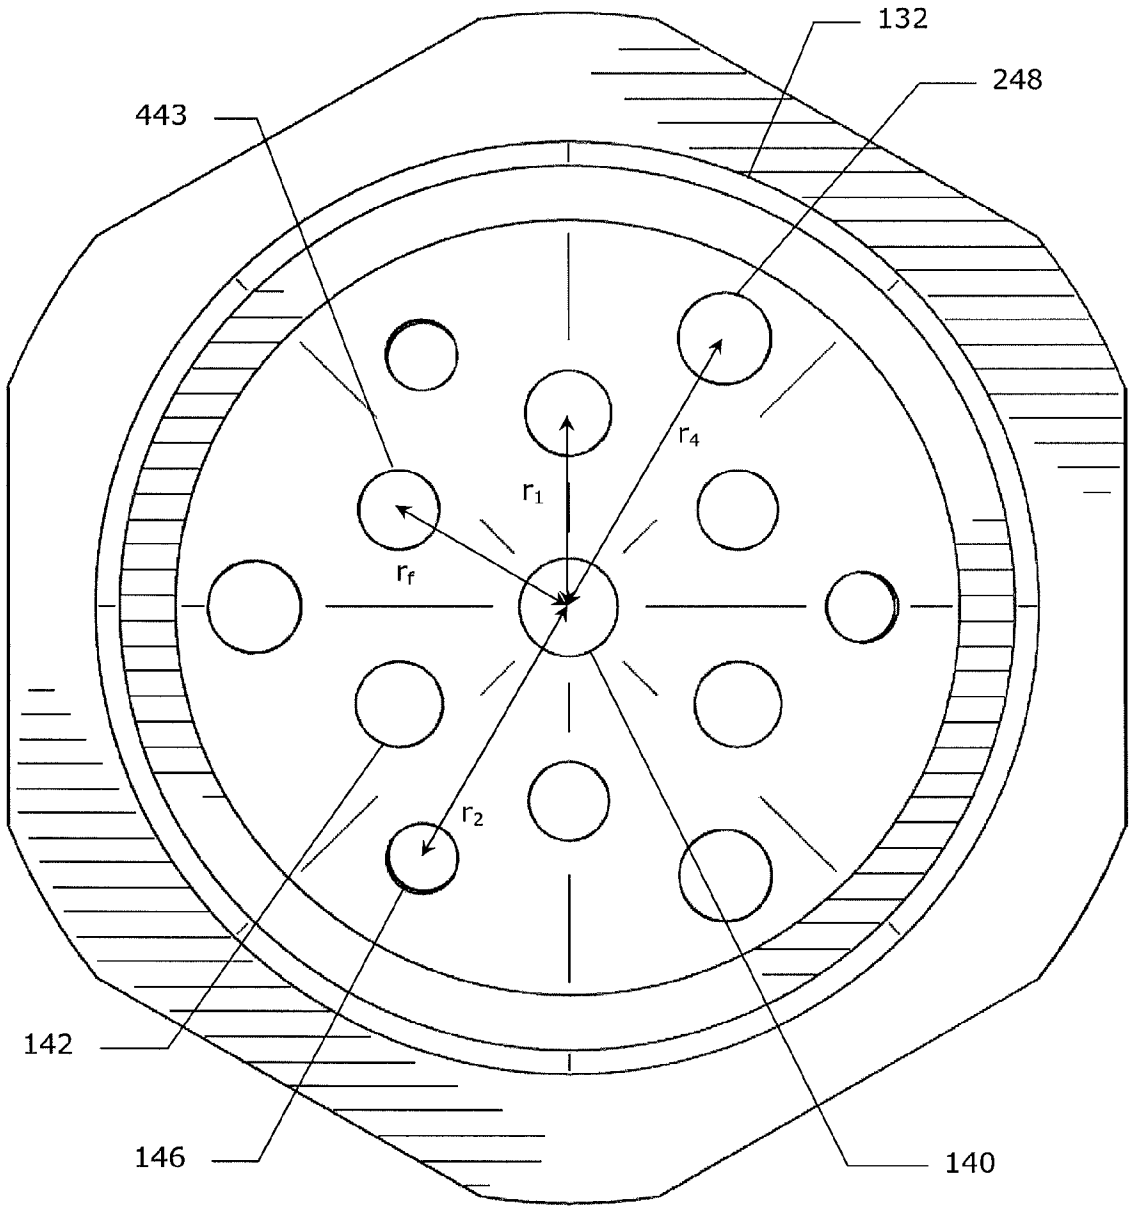


Figure 28

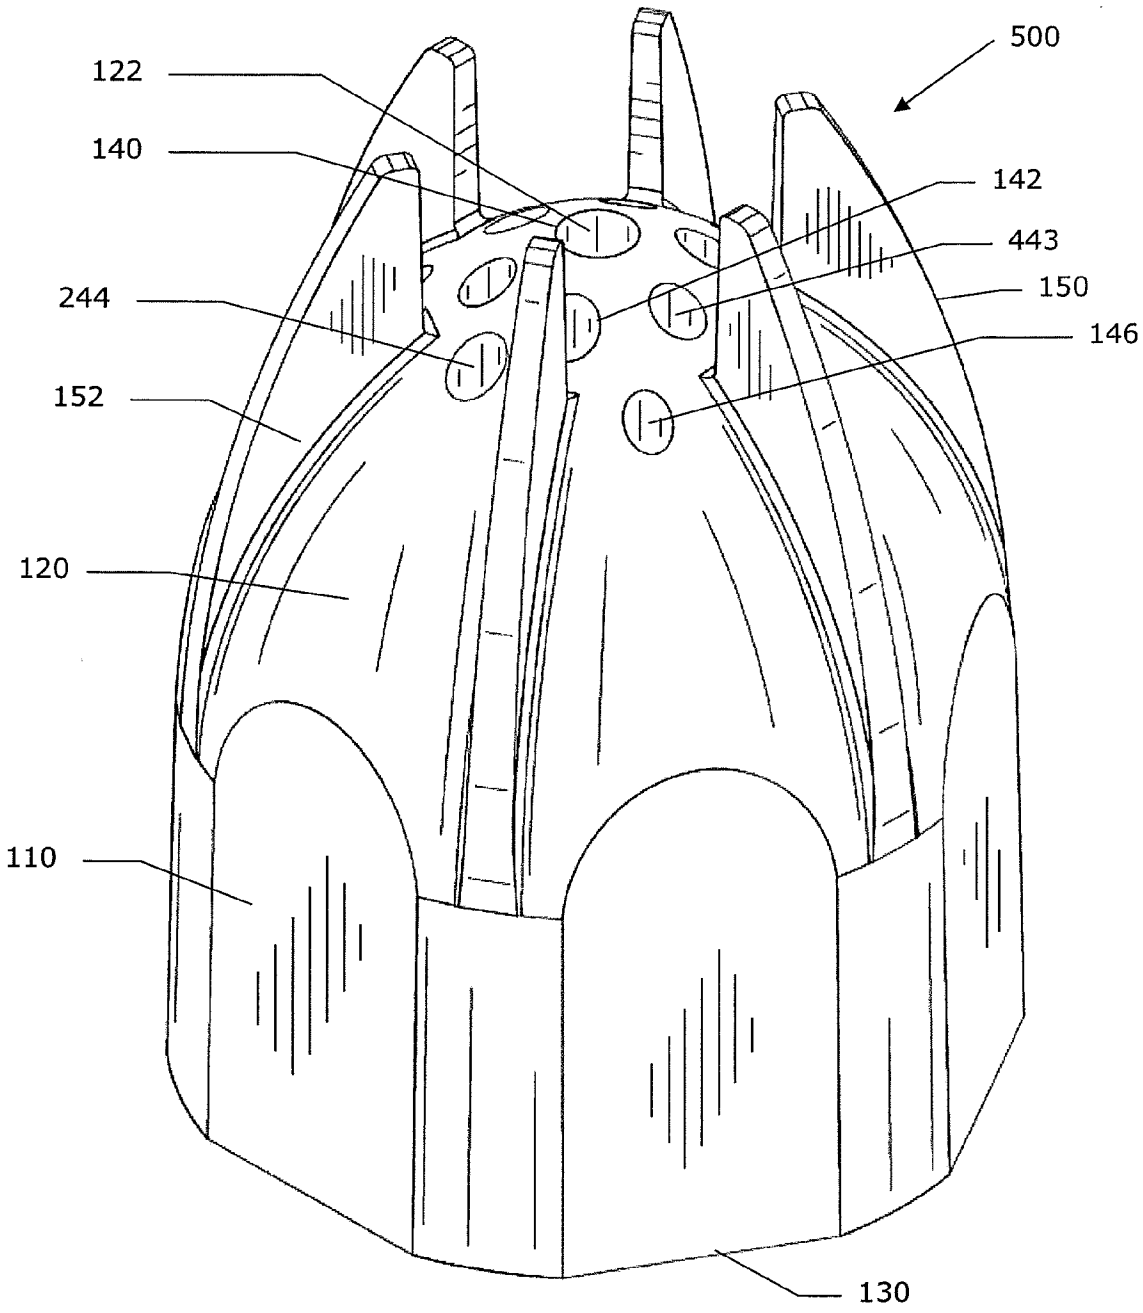


Figure 29

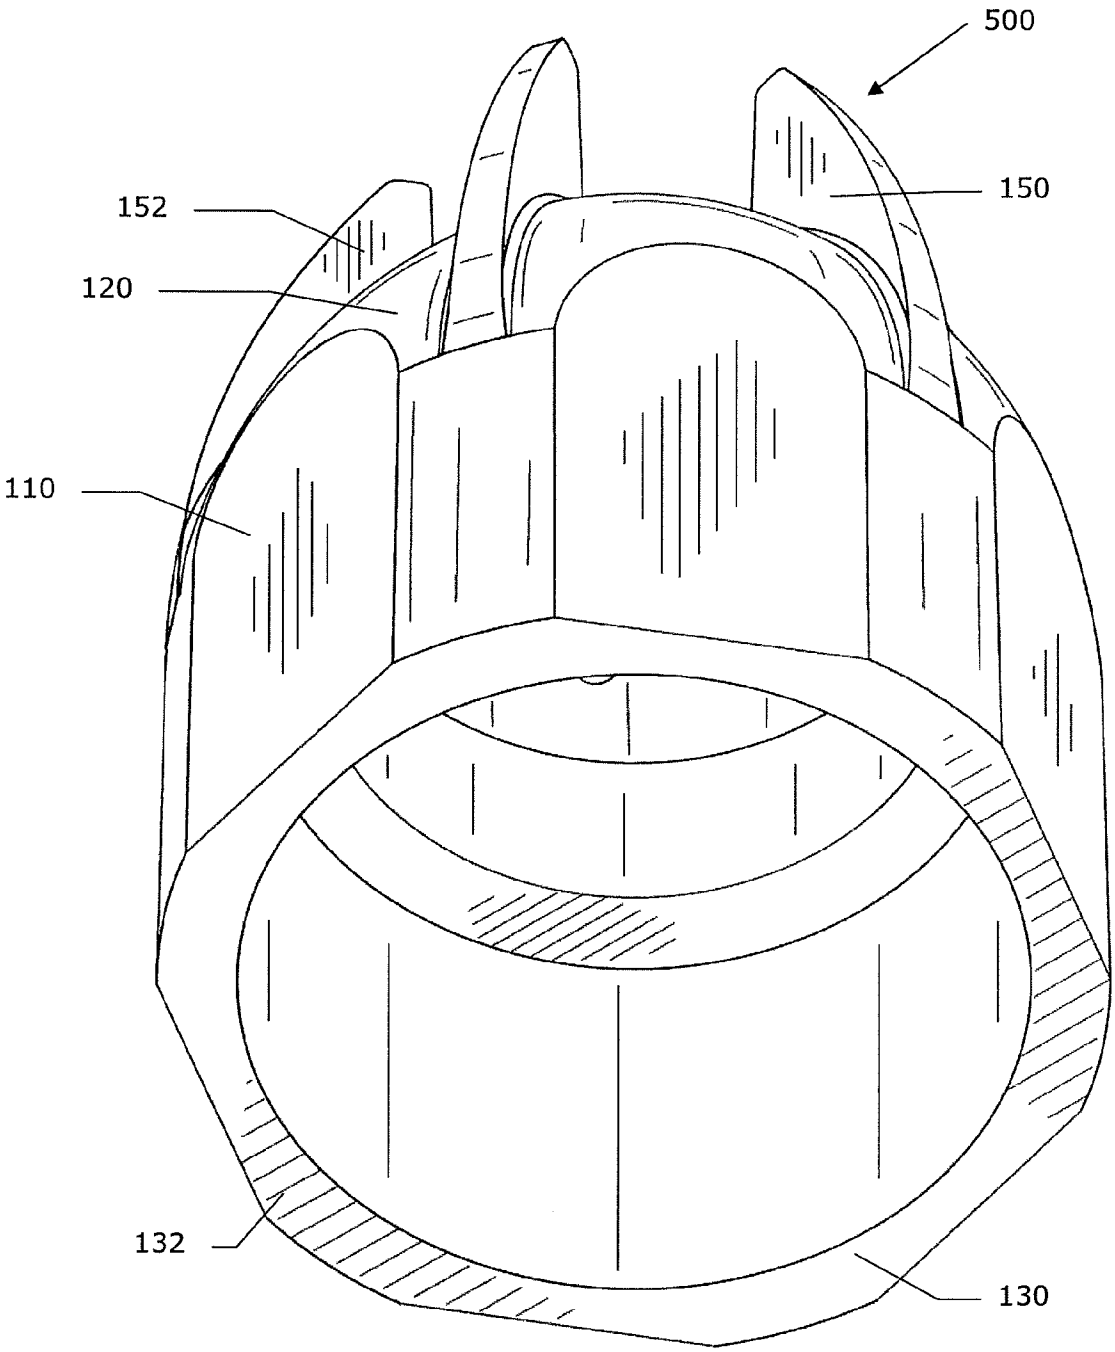


Figure 30

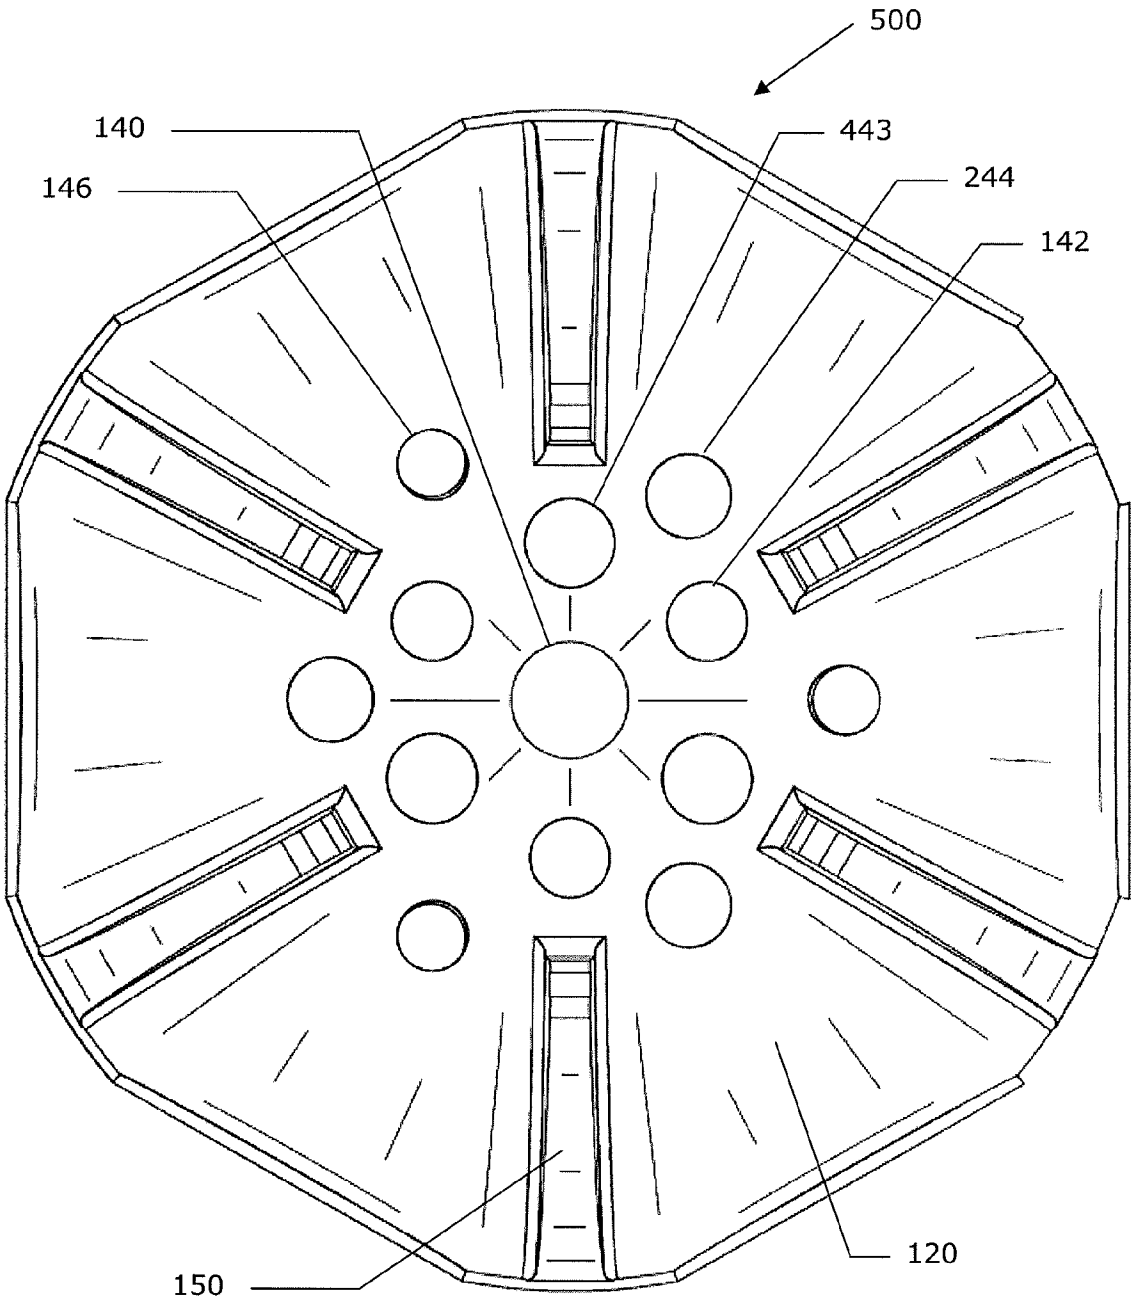


Figure 31

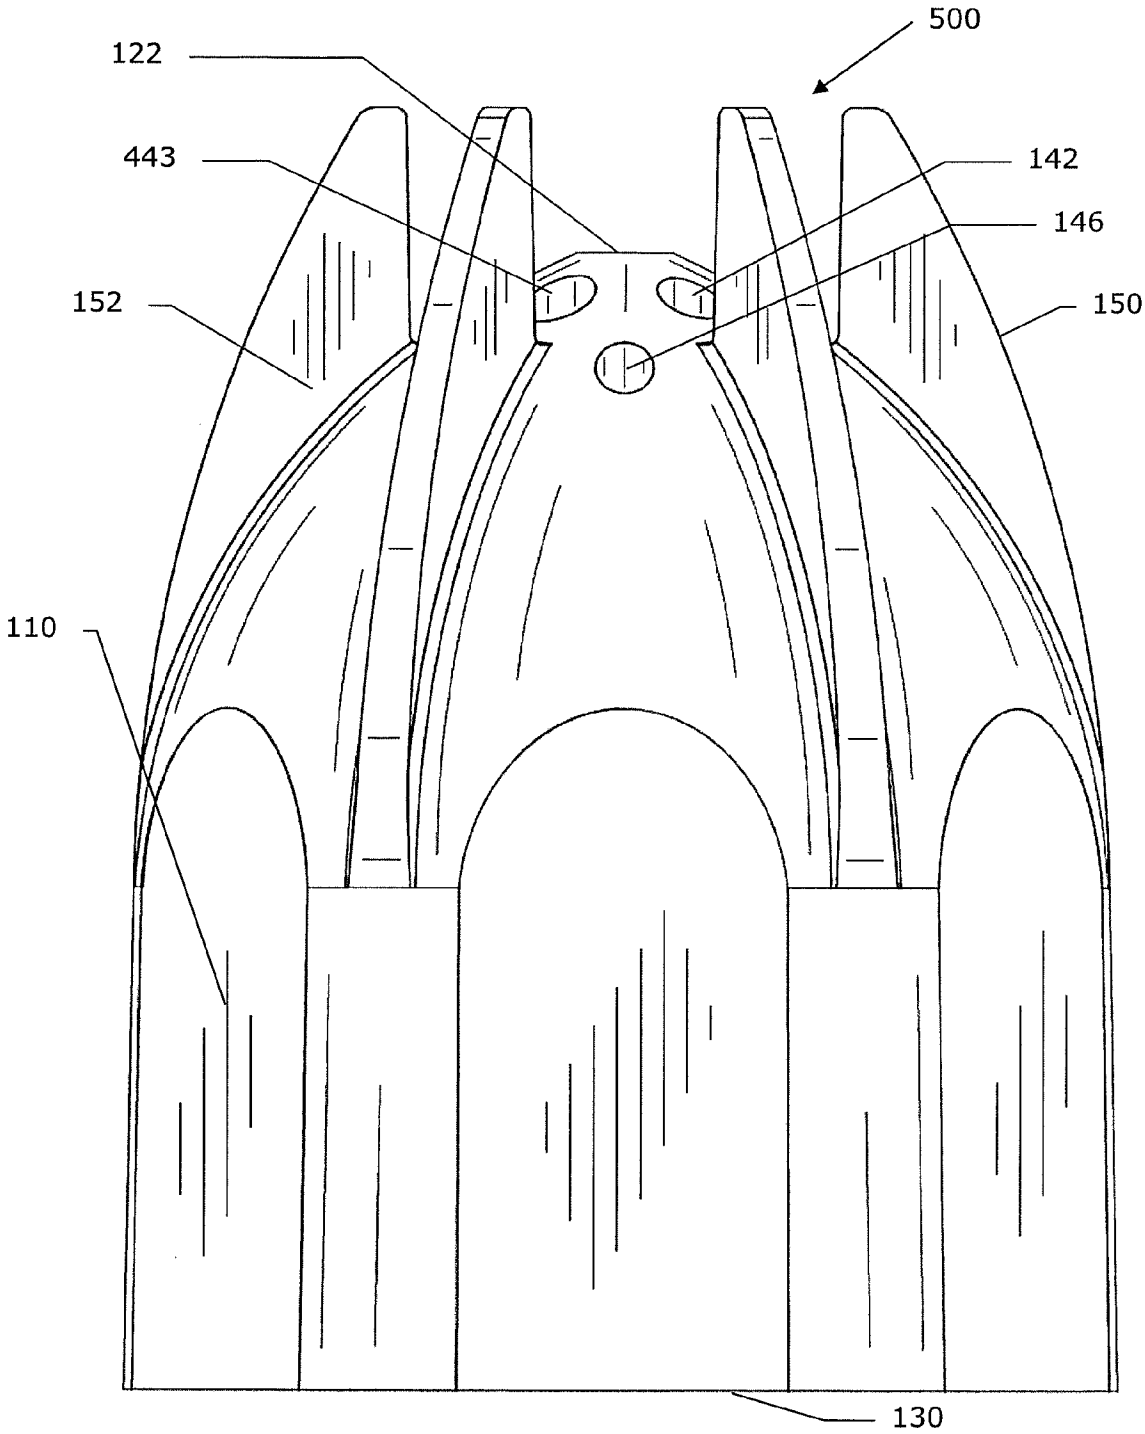


Figure 32

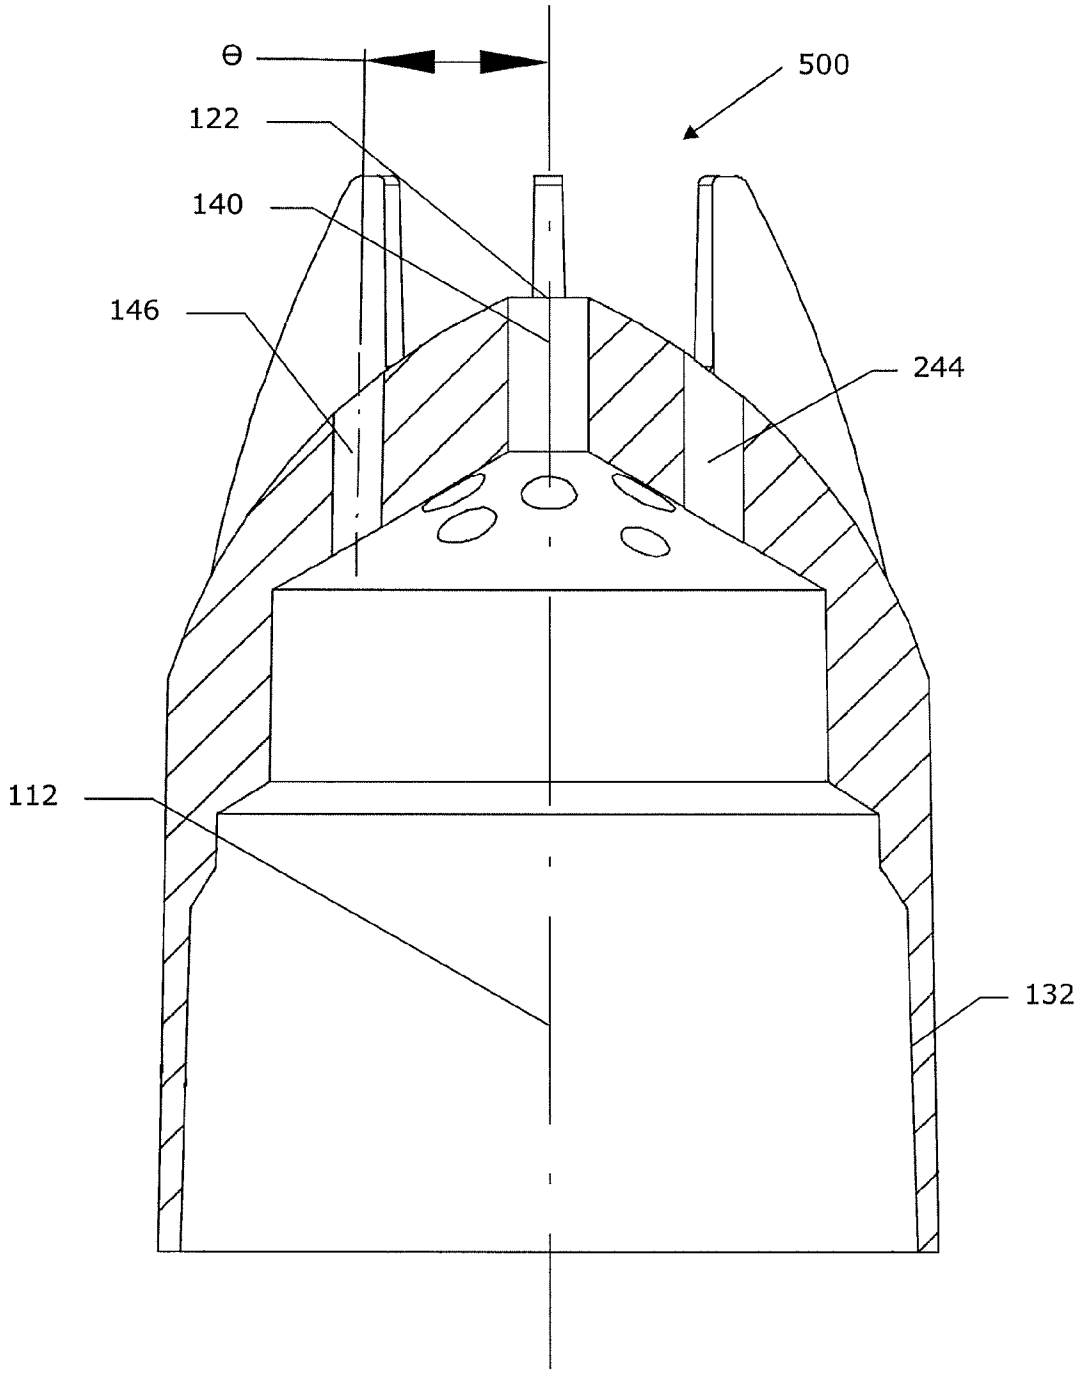


Figure 33

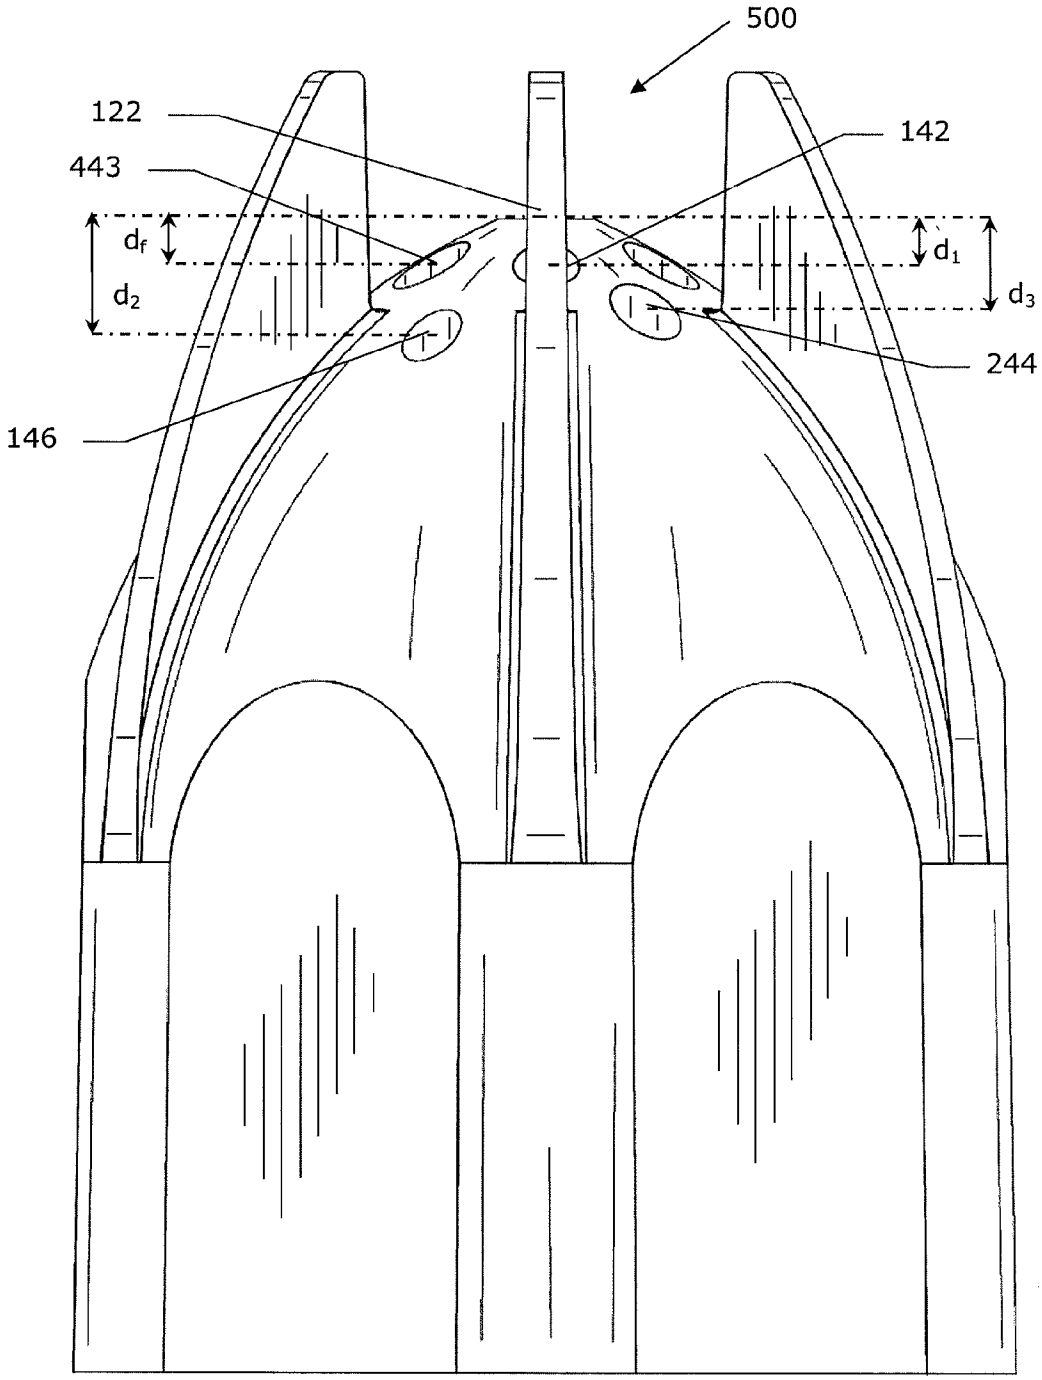


Figure 34

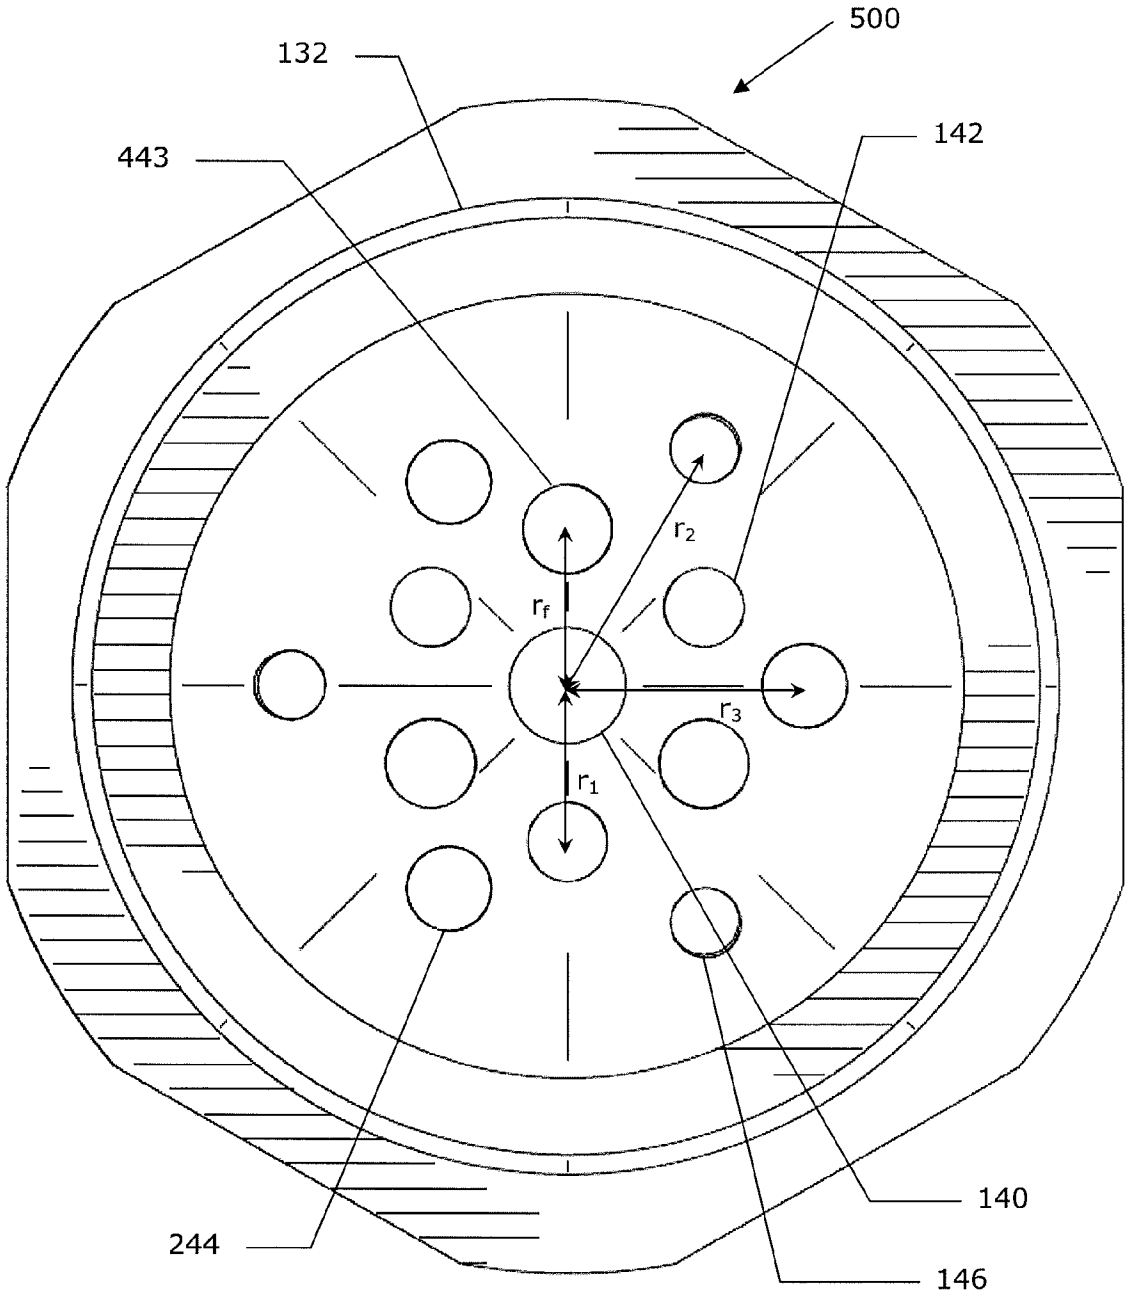


Figure 35

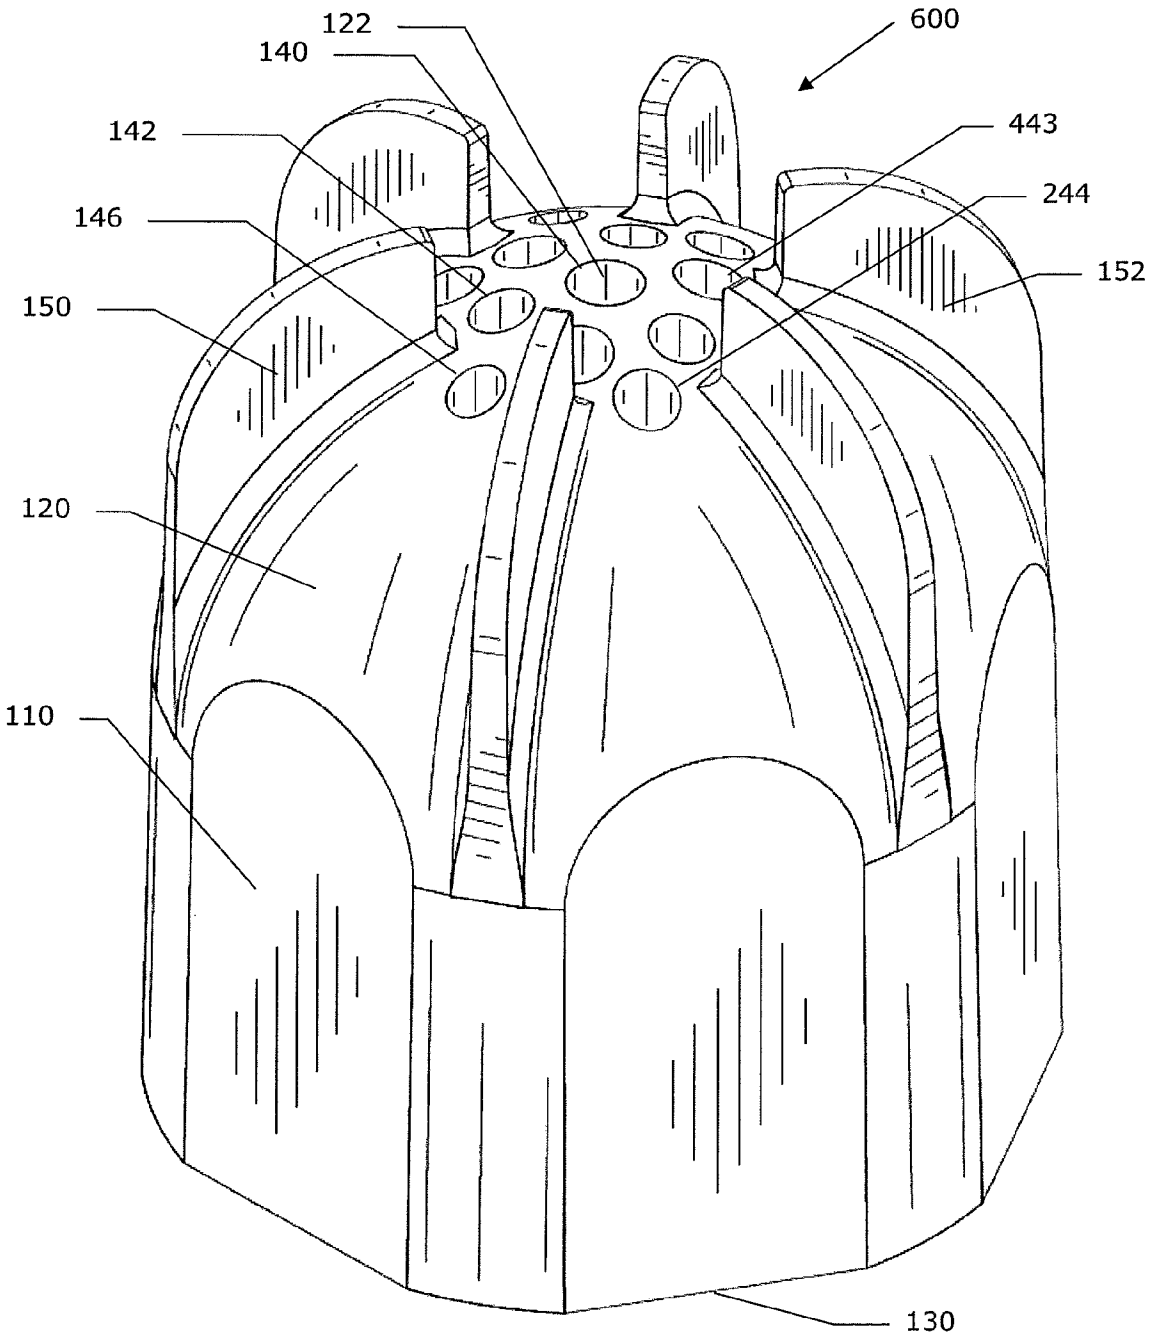


Figure 36

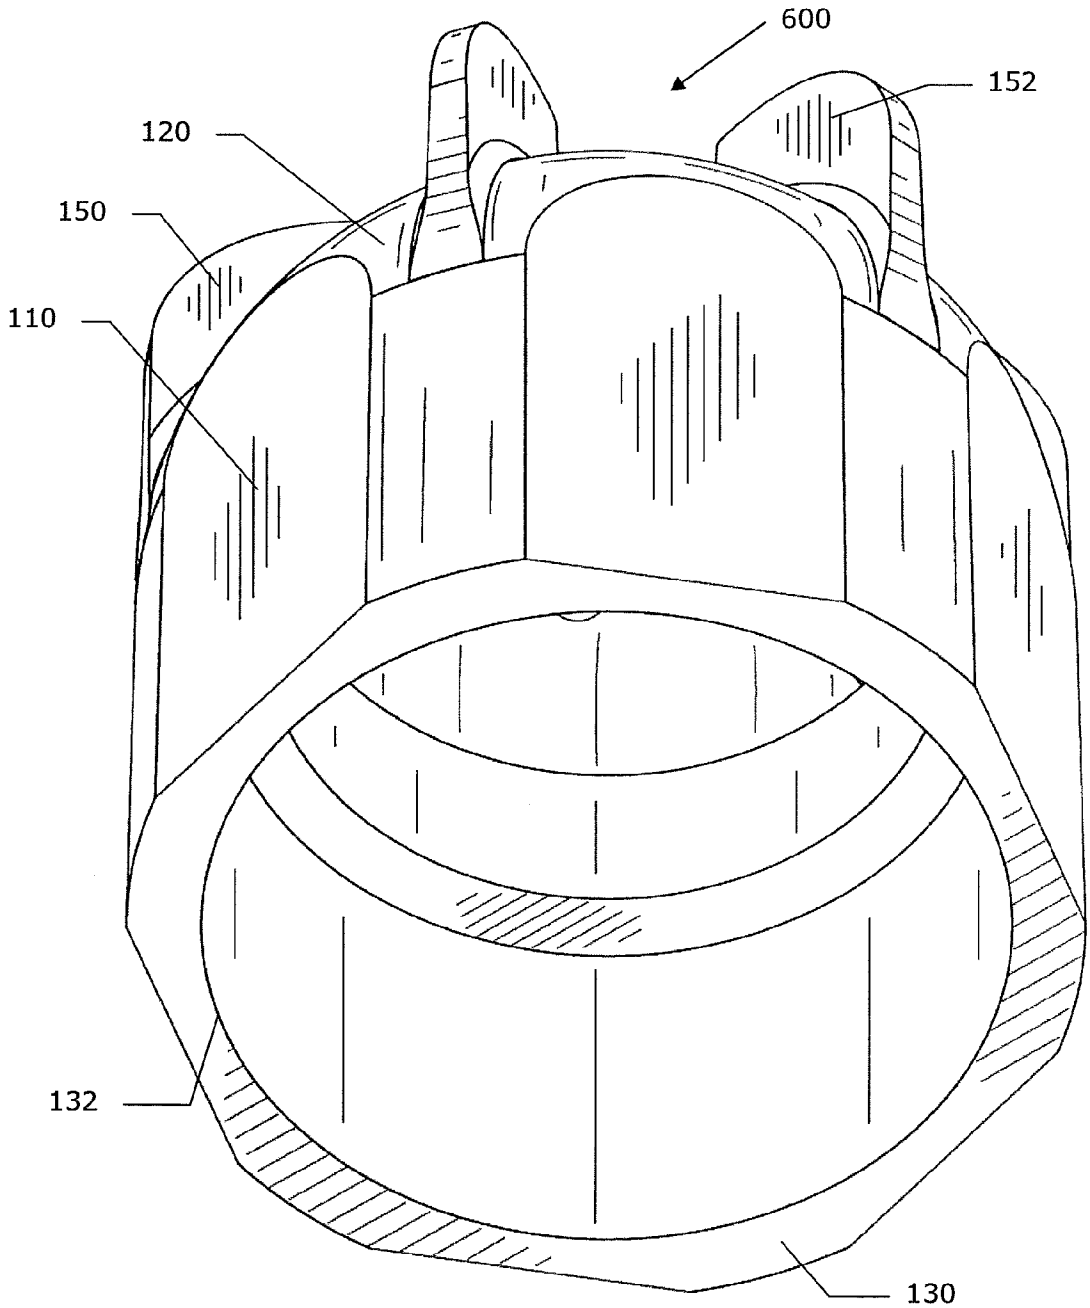


Figure 37

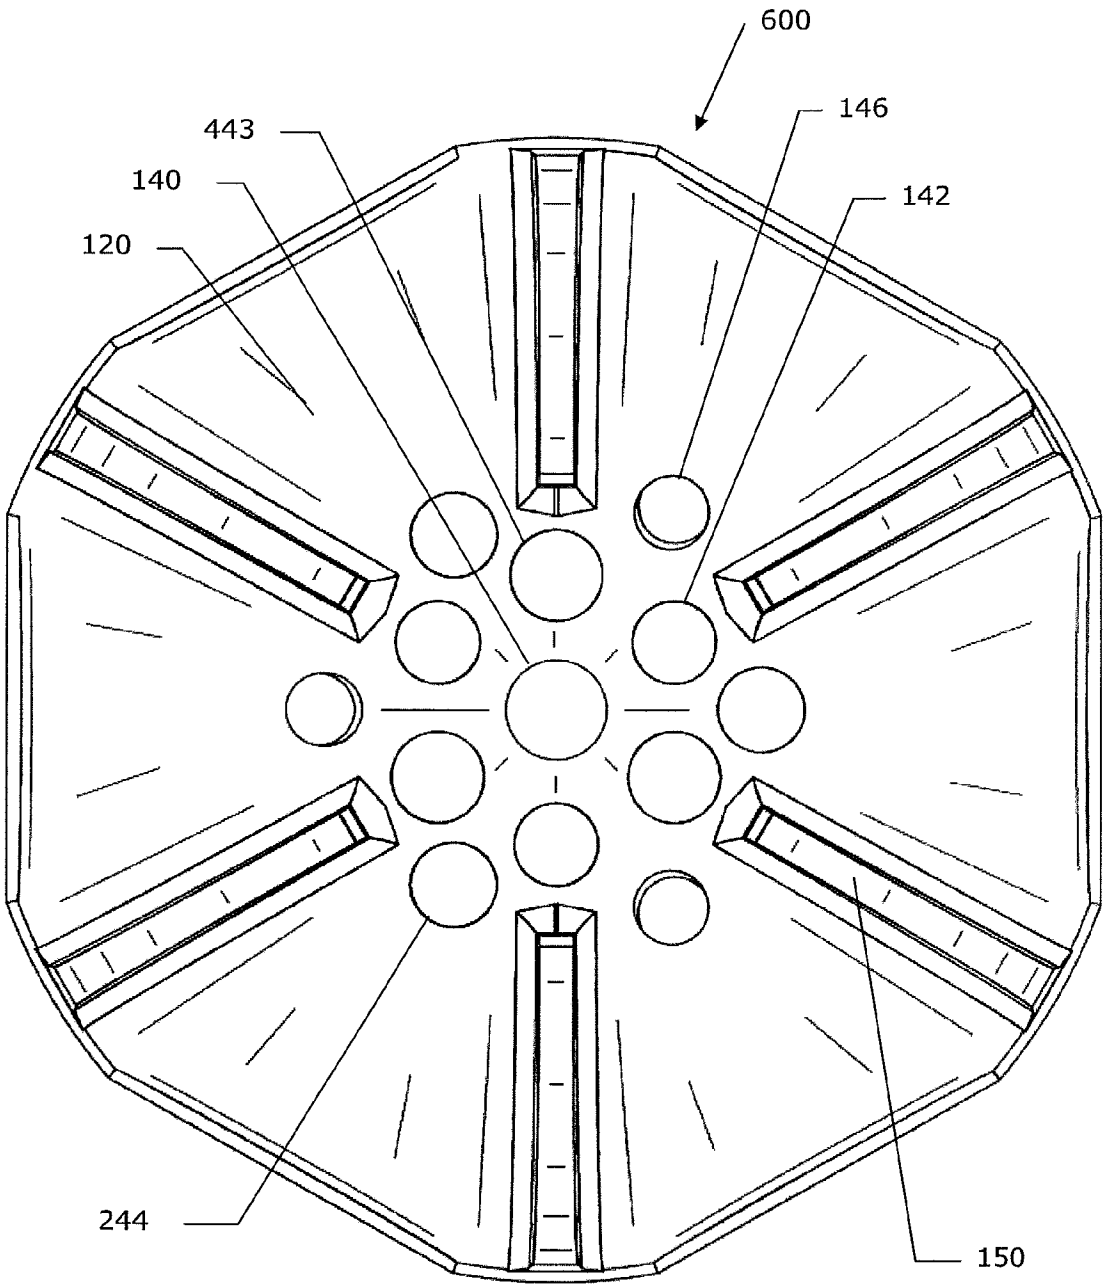


Figure 38

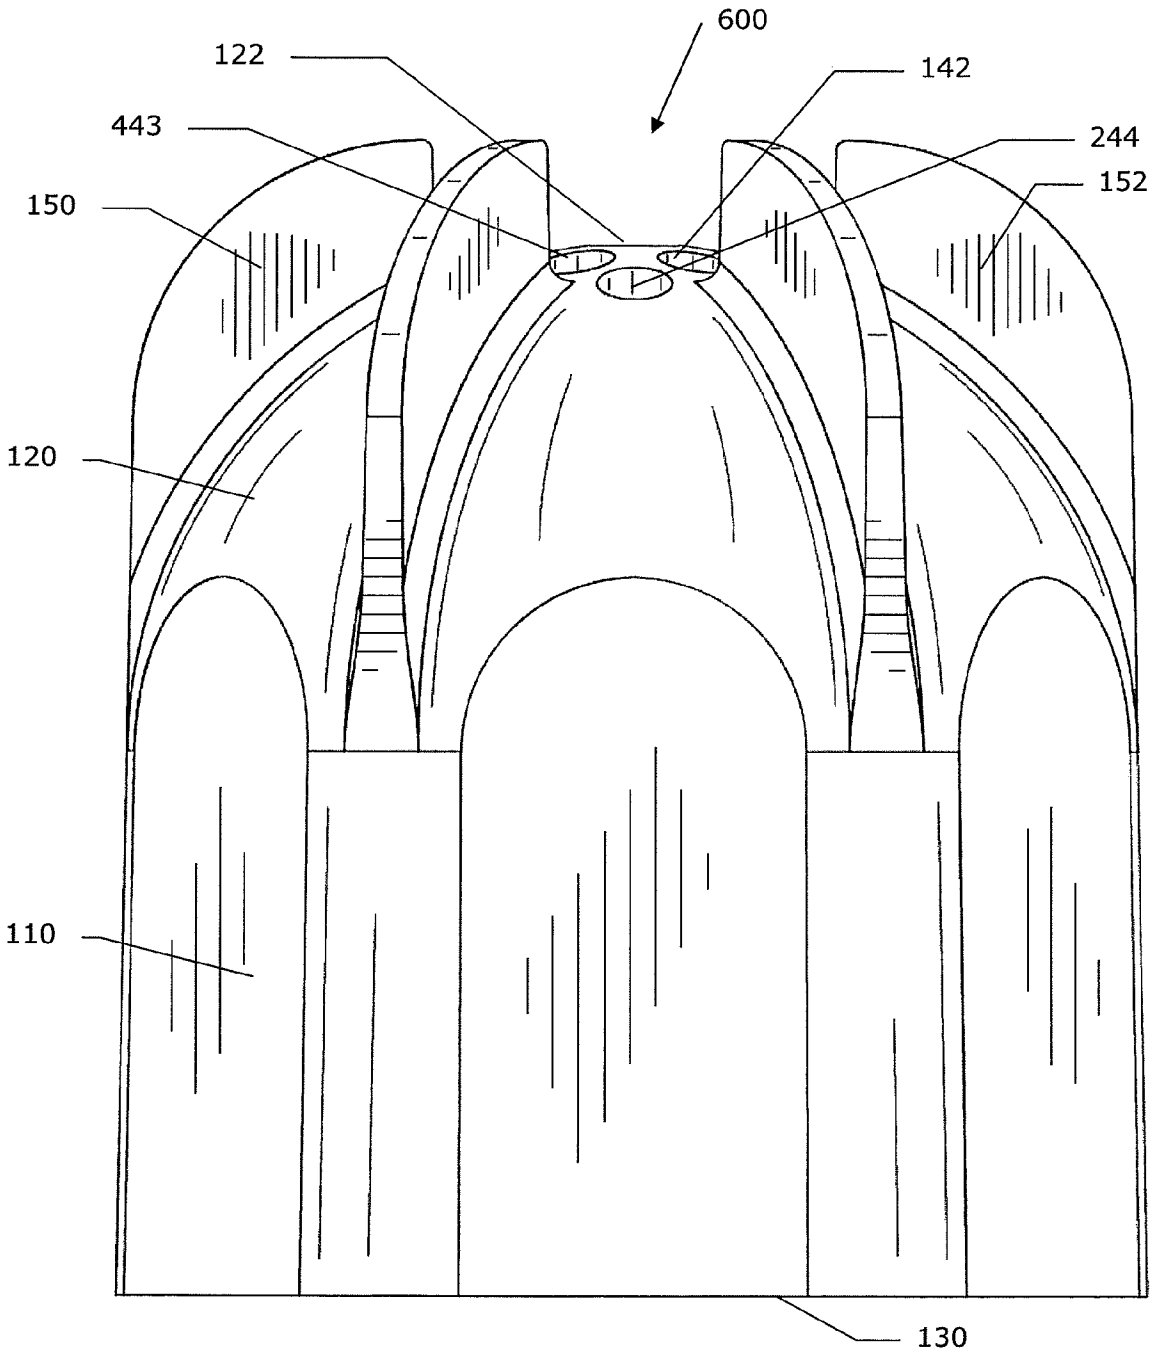


Figure 39

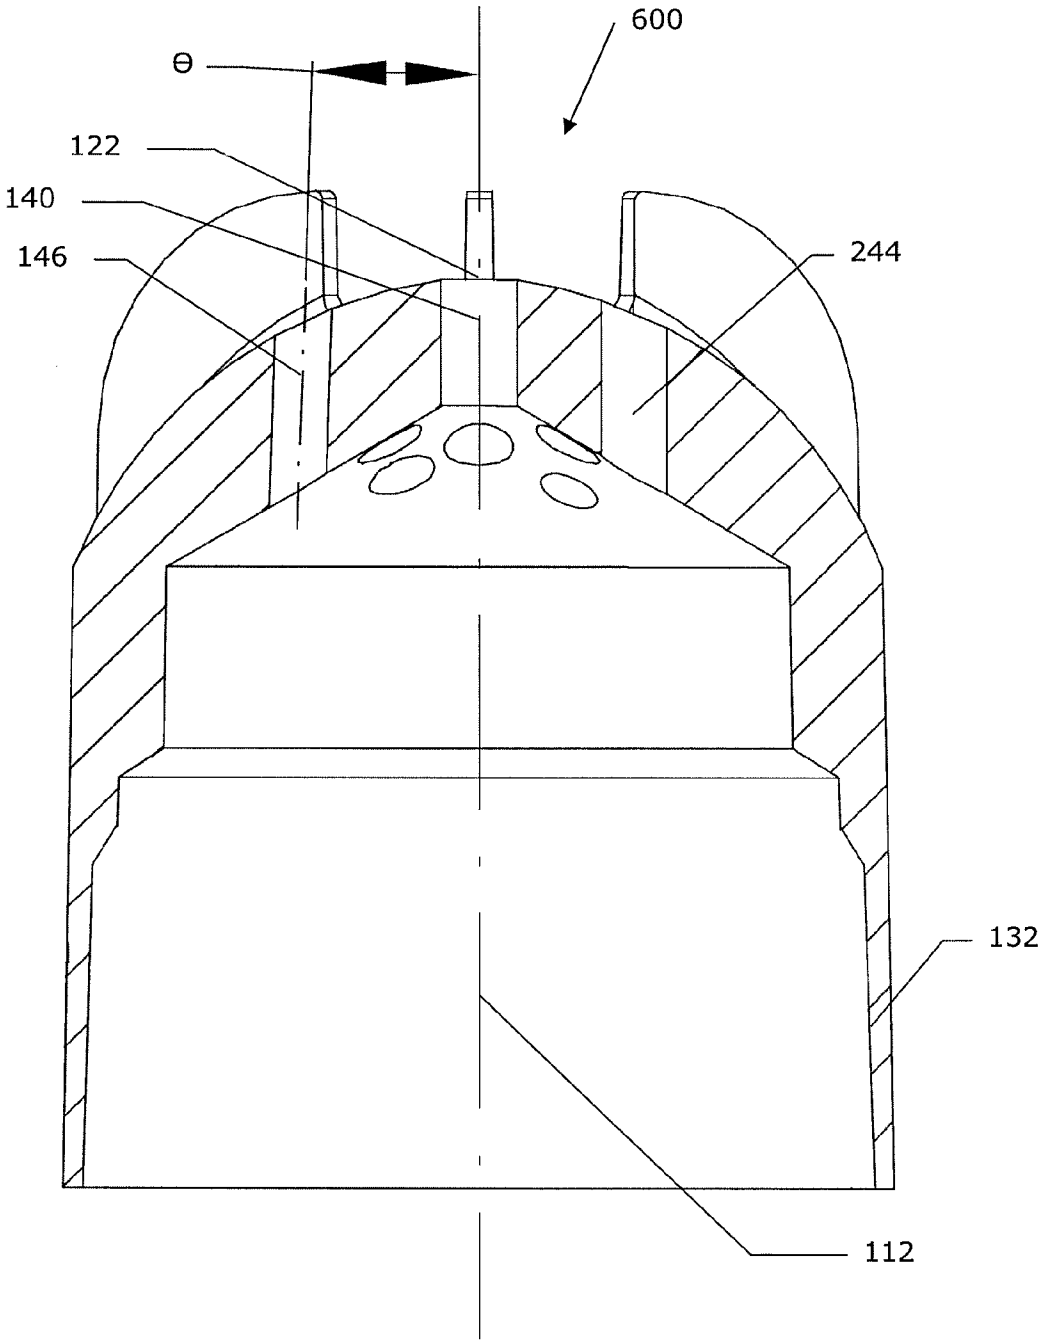


Figure 40

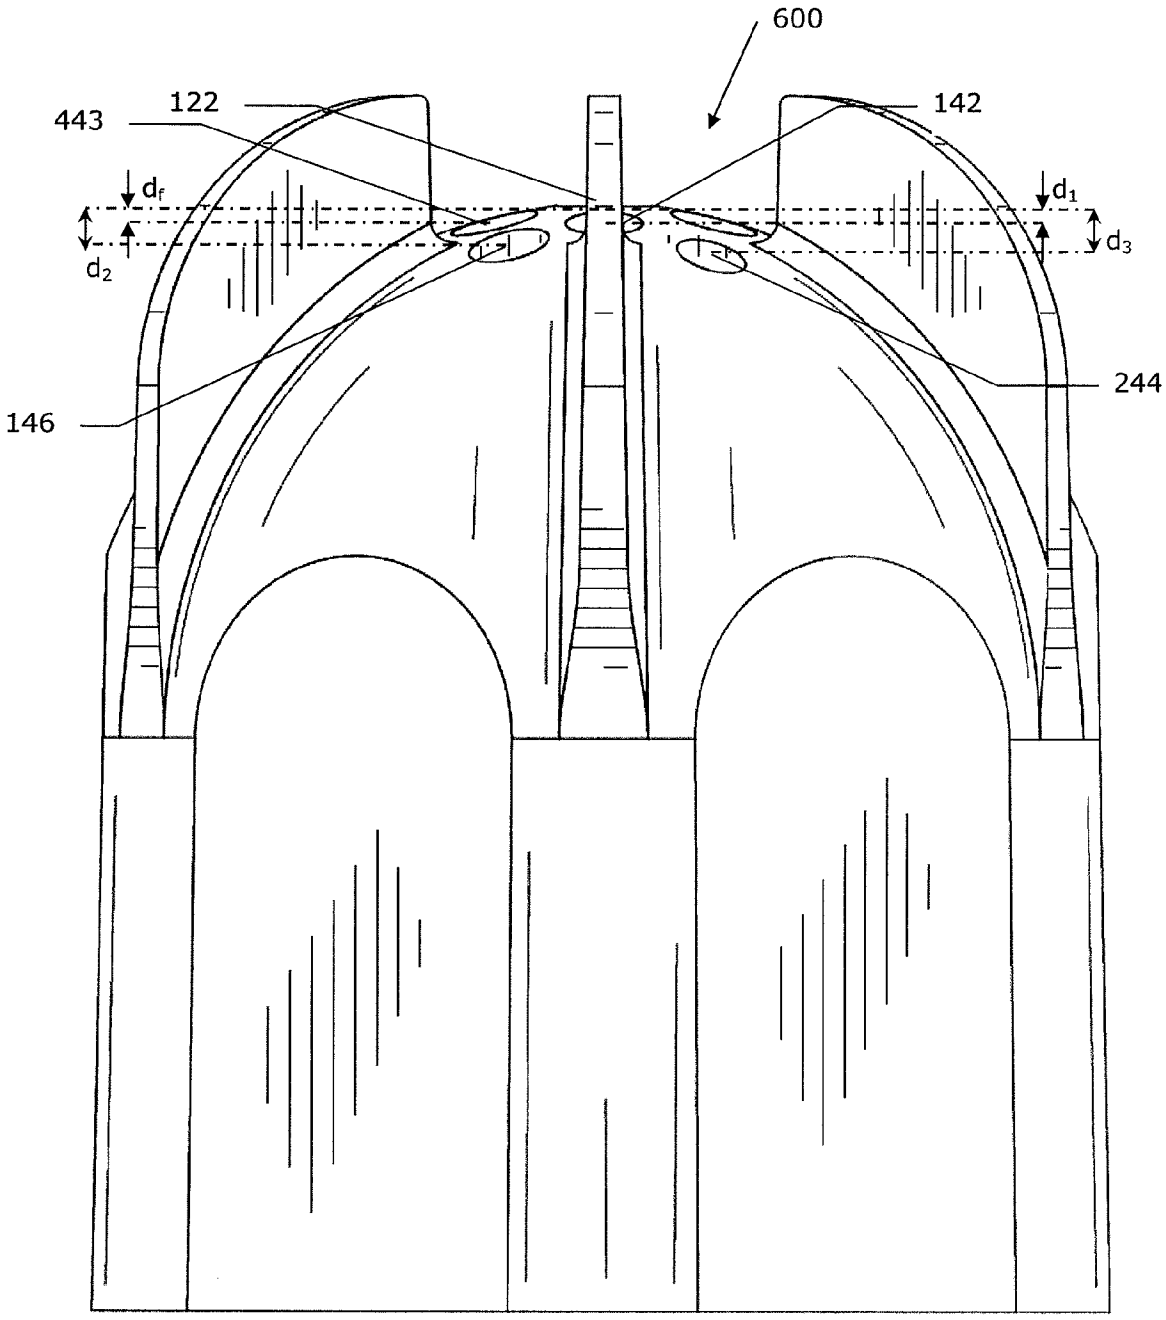


Figure 41

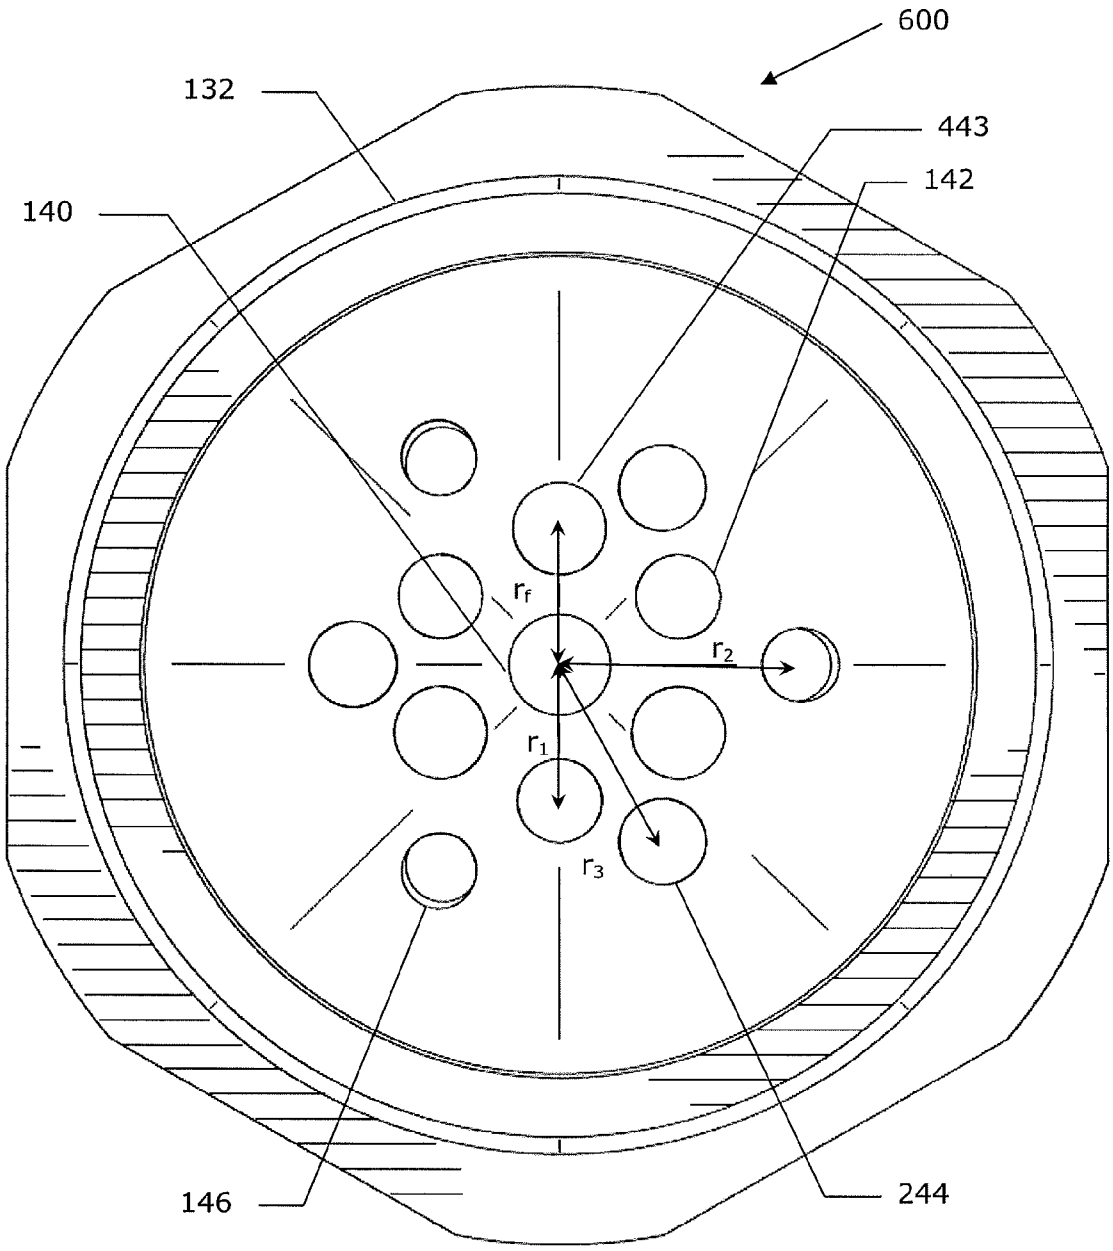


Figure 42

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2015/050291

A. CLASSIFICATION OF SUBJECT MATTER
IPC: ***B05B 1/14*** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B05B 1/14 (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
Questel Orbit and Google

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CA 1,032,577 (Frochaux) 06 June 1978 (06-06-1978) -- see the entire document	1 to 28
Y	US 6,415,991 B1 (Eriksson) 09 July 2002 (09-07-2002) -- see the entire document	1 to 28
Y	US 2006/0027679 A1 (Gratteau) 09 February 2006 (09-02-2006) -- see the entire document	1 to 28
Y	WO 81/01669 A1 (Karlsson et al.) 25 June 1981 (25-06-1981) -- see the entire document	1 to 28

☐ Further documents are listed in the continuation of Box C.

☑ See patent family annex.

*	Special categories of cited documents:
"A"	document defining the general state of the art which is not considered to be of particular relevance
"E"	earlier application or patent but published on or after the international filing date
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O"	document referring to an oral disclosure, use, exhibition or other means
"P"	document published prior to the international filing date but later than the priority date claimed
"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&"	document member of the same patent family

Date of the actual completion of the international search
26 November 2015 (26-11-2015)

Date of mailing of the international search report
14 December 2015 (14-12-2015)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 001-819-953-2476

Authorized officer

Steven N. Tupper (819) 997-2786

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2015/050291

Patent Document	Publication Date	Family Member	Publication Date
CA 1,032,577 A	06-06-1978	BR 7505345 A	03-08-1976
		DE 2537953 A1	11-03-1976
		FR 2282945 A1	26-03-1976
		FR 2282945 B1	26-03-1982
		GB 1509236 A	04-05-1978
		IT 1041501 B	10-01-1980
		JP S5146422 A	20-04-1976
		JP S5824182 B2	19-05-1983
		US B580921	13-01-1976
		US 3984054 A	05-10-1976
US 6,415,991 B1	09-07-2002	AU 4401099 A	06-12-1999
		DE 69918101 T2	07-07-2005
		EP 1078168 A1	28-02-2001
		EP 1078168 B1	16-06-2004
		ES 2223174 T3	16-02-2005
		JP 2002515337 A	28-05-2002
		SE 9801737 L	16-11-1999
		SE 512027 C2	17-01-2000
		WO 9960279 A1	25-11-1999
US 2006027679 A1	09-02-2006	none	
WO 8101669 A1	25-06-1981	AT 6406 T	15-03-1984
		AU 538248 B2	02-08-1984
		AU 6578881 A	06-07-1981
		DK 266581 A	25-06-1981
		DK 145655 B	17-01-1983
		DK 145655 C	18-07-1983
		EP 0030927 A1	24-06-1981
		EP 0030927 B1	29-02-1984
		FI 811809 A	13-06-1981
		FI 68769 B	31-07-1985
		FI 68759 C	11-11-1985
		JP S56501674 A	19-11-1981
		JP H0130540 B2	20-06-1989
		NO 812724 A	11-08-1981
		SE 8500454 L	01-02-1985
		SE 445016 B	26-05-1986
		SE 7910216 L	13-06-1981