



- (51) International Patent Classification:  
F21S 8/08 (2006.01) F21V 7/00 (2006.01)
- (21) International Application Number:  
PCT/US2012/060969
- (22) International Filing Date:  
19 October 2012 (19.10.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
201110342006.3 19 October 2011 (19.10.2011) CN
- (71) Applicant (for all designated States except US): **GE LIGHTING SOLUTIONS, LLC** [US/US]; 1975 Noble Road, Bldg. 338, Nela Park, East Cleveland, OH 44112 (US).
- (72) Inventors: **ZOU, Jiping**; 1800 Cailun Road, Zhangjiang High Tech Park, Shanghai, Shanghai, 201203 (CN). **JIAN, Yun**; 1800 Cailun Road, Zhangjiang High Tech Park, Shanghai, Shanghai, 201203 (CN). **PAN, Chao**; Zhongda International Mansion, No. 30 South Street, Room 807, Xian,shaanxi, 710002 (CN). **ZHOU, Cuijuan**;

1800 Cailun Road, Zhangjiang High Tech Park, Shanghai, Shanghai, 201203 (CN).

- (74) Agents: **DIMAURO, Peter, T.** et al.; General Electric Company, Global Patent Operation, 2 Corporate Drive, Suite 648, Shelton, CT 06484 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: REFLECTOR, ILLUMINATOR AND THE USE THEREOF

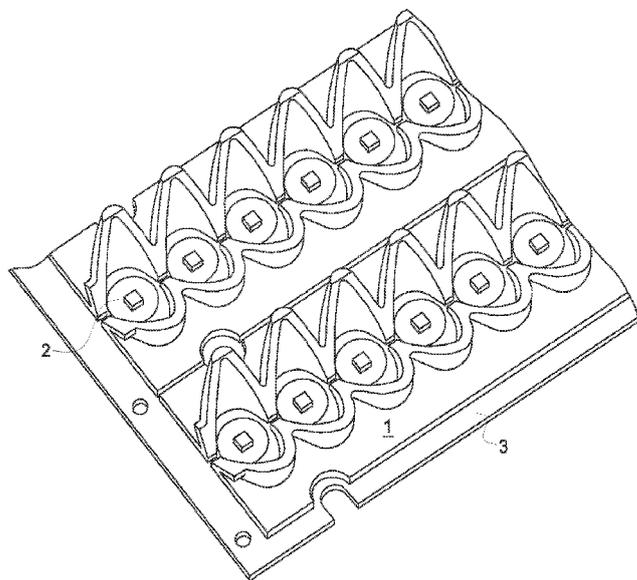


FIG. 1

(57) Abstract: The present invention provides a reflector (1), an illuminator and the use thereof. The reflector (1) comprises pairs of reflecting pieces, each pair of reflecting pieces comprise at least one reflecting unit, each reflecting unit including a first reflecting portion (100), a second reflecting portion (200), and a first fixing portion (120) and a second fixing portion (220) whose bottom ends are respectively connected to the first reflecting portion and the second reflecting portion. The first fixing portion is located on the side of the first reflecting portion that is opposed to an optical center of the reflecting unit, and the second fixing portion is located on the side of the second reflecting portion that is opposed to the optical center of the reflecting unit.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, **Published:**  
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, — *with international search report (Art. 21(3))*  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

---

## REFLECTOR, ILLUMINATOR AND THE USE THEREOF

### FIELD OF THE INVENTION

The present invention relates to the illumination field, and especially to a reflector, an illuminator and the use thereof.

### BACKGROUND OF THE INVENTION

LED illuminators have been used widely as they have the features of high luminous efficiency, energy saving, not needing high voltage, high safety and the like, and the performance thereof has exceeded majority of traditional light sources currently.

Chinese Invention Patent Application Publication No. CN101446404A discloses a LED street lamp and an irradiating light adjustment method of the LED street lamp. The street lamp comprises a lamp body and a LED luminotron, and the LED luminotron is mounted with a reflective cup through which the light emitted from the LED luminotron is reflected and then is concentrated and projected onto the road surfaces needing to be illuminated. The drawback is that more than 60% of the light from the LED light sources has to be reflected by the reflectors before they reach illuminated regions, resulting in the defect of low efficiency.

Chinese Patent of Utility Models Authorized Announcement No. CN201072071Y discloses a grid type LED street lamp reflector. The LED street lamp reflector comprises a reflection basal body whose edge is provided with a positioning hole, the reflection basal body is provided with one or more reflection grooves each of which has one or more LED light source hole sites, and reflection films are arranged on the reflector. The drawback is that the reflective surface profile of the grid type reflector is excessively simple, and the ability of controlling the direction

of reflective light is relatively weak, so that it is difficult to meet the technical requirements of many illumination application places.

Chinese Patent of Utility Models Authorized Announcement No. CN201246677Y discloses a LED street lamp reflective shade including at least two LED reflective grooves arranged side by side, wherein a LED mounting hole is disposed on the bottom of the reflective grooves, inner surfaces of both sides of the reflective grooves form reflective surfaces which is paraboloid-shaped and a reflecting plate having an inverse "V" shape is respectively disposed above the LED mounting hole corresponding to the both ends on the sidewalls of the LED reflective grooves. The drawback is that the surface profile of each reflecting surface is simple, and the ability of controlling the direction of reflective light is not strong, so that it is difficult to meet the technical requirements of many illumination application places.

#### SUMMARY OF THE INVENTION

In view of the above, the present invention provides a reflector and an illuminator for providing an illumination having a uniform illuminance and a uniform brightness.

The present invention provides the following technical solutions:

1. A reflector comprises pairs of reflecting pieces, each pair of reflecting pieces comprising at least one reflecting unit, each reflecting unit including a first reflecting portion, a second reflecting portion, and a first fixing portion and a second fixing portion whose bottom ends are respectively connected to the first reflecting portion and the second reflecting portion, the first fixing portion located on the side of the first reflecting portion that is opposed to an optical center of the reflecting unit, the second fixing portion located on the side of the second reflecting portion that is opposed to the optical center of the reflecting unit, the first reflecting portion and the second reflecting portion having the shape of an arc curved surface which taperedly extends from the bottom end thereof to

the top end and forming an opening, such that one part of light emitted from a light source located at the optical center inside the reflecting unit passes through the opening directly and the other part of light passes through the opening after reflected by the reflecting portions.

2. The reflector according to technical solution 1, wherein the arc curved surface shape is a free-form curved surface shape.

3. The reflector according to technical solution 2, wherein the free-form curved surface is formed by free-form curves on the plane groups through an optical axis, wherein the optical axis is the axis passing through the optical center of the reflecting unit.

4. The reflector according to technical solution 2, wherein the free-form curved surface is formed by straight lines on the plane groups through an optical axis, wherein the optical axis is the axis passing through the optical center of the reflecting unit and the straight lines are aligned along a free-form curve so as to form the free-form curved surface.

5. The reflector according to one of technical solutions 1 to 4, wherein each pair of reflecting pieces comprise a plurality of reflecting units, with the first fixing portions of the plurality of reflecting units connected with one another and the second fixing portions of the plurality of reflecting units connected with one another, and the plurality of reflecting units are arranged such that the light sources located at the optical centers of the reflecting units are arranged in a line.

6. The reflector according to one of technical solutions 1 to 4, wherein the reflector comprises a plurality pairs of reflecting pieces which are arranged such that the light sources located at the optical centers of the reflecting units are arranged in parallel lines or in a line.

7. The reflector according to one of technical solutions 1 to 4, wherein the openings of the reflecting portions can be any angle from 30° to 120°.

8. An illuminator comprises a heat sinking plate, a base plate, a light

source, and at least one reflector according to one of the aforesaid technical solutions, wherein

the heat sinking plate is fixed to the base plate, the first fixing portion and the second fixing portion are fixed to the heat sinking plate or the base plate, and

the light source is fixed to the heat sinking plate and located at the optical center of the reflecting unit, such that one part of light emitted from the light source passes through the opening directly and the other part of light passes through the opening after reflected by the first reflecting portion and the second reflecting portion.

9. The illuminator according to technical solution 8, wherein the illuminator further comprises a transparent casing which is fixed to the base plate or heat sinking plate for accommodating the light source and the reflector.

10. The illuminator according to technical solution 8 or technical solution 9, wherein the light source is a LED lamp.

11. A use of the illuminator according to one of the technical solutions 8-10, wherein the illuminator is used for road illumination, tunnel illumination and prolate shape region illumination.

The technical effects of the present invention lie in that: the optical efficiency is extremely high, the light distribution form is multiple, and the chip layout is deconcentrate and flexible, thereby being especially applicable to prolate shape illuminated regions. The light capable of irradiating illuminated regions directly can be emitted directly without via the reflector to the greatest extent; and the light incapable of irradiating illuminated regions directly can as far as possible reach illuminated regions just by being reflected one time. The direct light and the reflected light achieve flexible light distribution forms in accordance with different forms of overlap matching.

According to the present invention, the road illumination, tunnel illumination for various road surface materials and prolate shape region

illumination such as corridor illumination, shelf illumination, underground garage illumination and the like having a uniform illuminance and a uniform brightness can be achieved.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a structural schematic diagram of an illuminator according to the present invention;

Fig. 2 is a structural schematic diagram of a reflector;

Fig. 3 is an enlarged schematic diagram of a reflecting portion;

Fig. 4 is an enlarged schematic diagram of a light path of an reflecting unit according to the present invention;

Figs. 5A-5B are diagrams of a free-form curve projected onto the Y-Z plane;

Fig. 6A is a schematic diagram of the free-form curve;

Fig. 6B is a schematic diagram of another free-form curve;

Fig. 7 is a schematic diagram of an opening of the reflector according to the present invention;

Fig. 8 is an enlarged schematic diagram of another reflecting portion; and

Fig. 9 is a light distribution effect diagram of the illuminator according to the present invention.

#### DESCRIPTION OF THE INVENTION

Hereinafter, preferred embodiment(s) of the present invention will be described in detail in association with the accompanying drawings wherein like reference numbers indicate like elements.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the *singular* forms "a", "an" and "the" are intended to include the *plural* forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms

"comprises", "comprising" and the like when used in this specification, specify the presence of stated features, elements, and/or components, but do not preclude the presence or addition of one or more other features, elements, components, and/or groups thereof.

Fig. 1 is a structural schematic diagram of an illuminator according to the present invention. Fig. 2 is a structural schematic diagram of a reflector. Fig. 3 is an enlarged schematic diagram of a reflecting portion.

Hereinafter, the illuminator, the reflector and a reflecting piece of the present invention will be described in association with Figs. 1 and 2.

As illustrated in Figs. 1 to 3, the illuminator comprises a reflector 1, a light source 2, a heat sinking plate (not shown) and a base plate 3. The heat sinking plate is fixed to the base plate 3, the reflector 1 is fixed to the heat sinking plate or the base plate 3, and the light source 2 is fixed to the heat sinking plate and located at the optical center of a reflecting unit, such that one part of light emitted from the light source passes through an opening directly and the other part of light passes through the opening after reflected by the reflector 1. The light source 2 may be a LED lamp.

The reflector 1 comprises pairs of reflecting pieces, and each pair of reflecting pieces comprise at least one reflecting unit with each one including a first reflecting portion 100, a second reflecting portion 200, a first fixing portion 120, and a second fixing portion 220. The first fixing portion 120 is connected to the bottom end of the first reflecting portion 100, and the second fixing portion 220 is connected to the bottom end of the second reflecting portion 200. The first fixing portion 120 and the second fixing portion 220 are fixed to the heat sinking plate or the base plate 3, and the light source 2 is fixed to the heat sinking plate and located at the optical center of the reflecting unit.

The first fixing portion 120 is located on the side of the first reflecting portion 100 that is opposed to the optical center of the reflecting unit, and the second fixing portion 220 is located on the side of the second reflecting portion 200 that is opposed to the optical center of

the reflecting unit. The first reflecting portion 100 and the second reflecting portion 200 have the shape of an arc curved surface which taperedly extends from the bottom end thereof to the top end and form an opening, such that one part of light emitted from the light source 2 located at the optical center of the reflecting unit passes through the opening directly and the other part of light passes through the opening after reflected by the first and second reflecting portions 100 and 200.

As illustrated in Figs. 1 and 2, each pair of reflecting pieces comprise several reflecting units each of which has the respective first fixing portions 120 connected with one another and the respective second fixing portions 220 connected with one another. A plurality of reflecting units are arranged such that the light sources located at the optical centers of the reflecting units are arranged in a line. The present invention is not limited to the number shown in Figs. 1 and 2, and one skilled in the art may set the number of the reflecting units to one or more according to actual situations.

As illustrated in Fig. 1, the reflector 1 comprises two pairs of reflecting pieces which are arranged such that the light sources located at the optical centers of the reflecting units are arranged in parallel lines. It should be noted that although the reflecting pieces are arranged such that the light sources located at the optical centers of the reflecting units are arranged in parallel lines in Fig. 1, the reflecting pieces may also be arranged such that the light sources are arranged in a line.

It should be noted that although the illuminator shown in Fig. 1 comprises two reflectors, one skilled in the art may determine the number of the reflectors according to actual demands, such as comprising one reflector or more than one reflector.

As illustrated in Fig. 1, the shapes of the plurality of reflecting units may be the same. However, the shapes of the plurality of reflecting units in the present invention may be different.

As illustrated in Fig. 3, X axis, Y axis, Z axis and origin O are

defined in such a manner that the X axis, Y axis, Z axis are perpendicular to one another and the origin O is located at an optical center of the optical unit. The Y axis is the axis passing through the optical center of the reflecting unit, and the X-Y plane constitutes the bottom surface of the first reflecting portion 100 and the second reflecting portion 200.

Fig. 4 is an enlarged schematic diagram of a light irradiation of the reflecting unit according to the present invention. As shown in the diagram, on the X-Y plane and in the Z axis direction, light from part II is projected onto a region to be irradiated without any blocking at all, and light from parts I and III is projected onto the region to be irradiated uniformly after reflected by the first reflecting portion 100 and the second reflecting portion 200.

Therefore, the optical efficiency of the present invention is extremely high. The light capable of irradiating illuminated regions directly can be emitted directly without via the reflector to the greatest extent; and the light incapable of irradiating illuminated regions directly can reach illuminated regions just by being reflected.

The arc curved surface shape of the reflecting portions 100 and 200 is a free-form curved surface shape. Figs. 5A-5B are diagrams of a free-form curve projected onto the Y-Z plane. Fig. 6A is a schematic diagram of the free-form curve in Fig. 5A. Fig. 6B is a schematic diagram of another free-form curve.

As illustrated in Figs. 5A, 5B and 6A, the free-form curved surface is formed by free-form curves on the plane groups through the Y axis. As illustrated in Figs. 5A and 6A, the free-form curved surface is formed by free-form curves on the plane groups through the Y axis and the free-form curves are symmetric with respect to Z axis. Compared with Fig. 5A, the free-form curved surface shown in Fig. 5B is formed by free-form curves on the plane groups through the Y axis and the free-form curves are dissymmetric with respect to Z axis.

Fig. 6B is a schematic diagram of another free-form curve. As

illustrated in Fig. 6B, the free-form curved surface is formed by a plurality of straight lines on the plane groups through the Y axis, wherein the straight lines are aligned along a free-form curve so as to form the free-form curved surface.

Fig. 7 is a schematic diagram of an opening of the reflector according to the present invention, and those skilled in the art of the present invention may adjust the size of the opening according to actual demands (i.e. according to the ratio of road width to lamp stem height), in order to be adapted to the types I to IV of the light distribution. Wherein the type I of the light distribution is adapted to a narrower road where the road width is smaller than the lamp stem height; the type IV of the light distribution is adapted to a very wide road where the road width is larger more than 2.25 times the lamp stem height. As shown in the diagram, the openings of the reflecting portions 100 and 200 of the reflectors can be any angle from 30° to 120°.

Therefore, the light distribution form of the present invention is multiple. The direct output light and the reflected light achieve flexible light distribution forms which are adapted to light distributions for various road surfaces in accordance with different forms of overlap matching.

Alternatively, the first reflecting portion 100 and the first fixing portion 120 may shaped integrally, and the second reflecting portion 200 and the second fixing portion 120 may shaped integrally.

Alternatively, the reflecting portions 100 and 200 distribute at intervals. Although the reflecting portions are shown as distributed at equal intervals in the embodiment illustrated in the diagram, the present invention is not limited to this, they also can be distributed at unequal intervals. One skilled in the art may adjust intervals between the reflecting portions according to actual demands.

As illustrated in Fig. 1, the shape of the first reflecting portion 100 and the shape of the second reflecting portion 200 are different.

Alternatively, as illustrated in Fig. 2, the shape of the first reflecting portion 100 and the shape of the second reflecting portion 200 may also be the same.

Fig. 8 is another structural schematic diagram of reflecting portions. As shown in the diagram, the reflecting portions 100 and 200 are in mirror symmetry.

Alternatively, the illuminator according to the present invention may further comprise a transparent casing (not shown) which is fixed to the base plate or heat sinking plate for accommodating the reflector and the light source.

Fig. 9 is a light distribution effect diagram of the illuminator according to the present invention, showing a light intensity distribution of the illuminator. Generally, the optical efficiency of the illuminator according to the present invention has been proved to be 94.5-97.5% by practice (without considering the loss of the transparent casing). It makes an effective use of light emitted from light sources.

The illuminator according to the present invention can be used for, including but not limited to, road illumination, tunnel illumination and prolate shape region illumination. The prolate shape region includes but not limited to furniture, supermarket shelf, corridor, underground garage and rail.

In view of these teachings, other embodiments, combinations and modifications of the present invention will be apparent to those skilled in the present field. Therefore, the invention is only defined by the claims when reading in connection with the above description and drawings.

---

We Claim:

1. A reflector, comprising pairs of reflecting pieces, wherein each pair of reflecting pieces comprises at least one reflecting unit, each reflecting unit includes a first reflecting portion, a second reflecting portion, and a first fixing portion and a second fixing portion whose bottom ends are respectively connected to the first reflecting portion and the second reflecting portion, the first fixing portion is located on the side of the first reflecting portion that is opposed to an optical center of the reflecting unit, the second fixing portion is located on the side of the second reflecting portion that is opposed to the optical center of the reflecting unit, the first reflecting portion and the second reflecting portion have the shape of an arc curved surface which taperedly extends from the bottom end thereof to the top end and form an opening, such that one part of light emitted from a light source located at the optical center inside the reflecting unit passes through the opening directly and the other part of light passes through the opening after reflected by the reflecting portions.

2. The reflector according to Claim 1, wherein the arc curved surface shape is a free-form curved surface shape.

3. The reflector according to Claim 2, wherein the free-form curved surface is formed by free-form curves on the plane groups through an optical axis, wherein the optical axis is the axis passing through the optical center of the reflecting unit.

4. The reflector according to Claim 2, wherein the free-form curved surface is formed by straight lines on the plane groups through an optical axis, wherein the optical axis is the axis passing through the optical

center of the reflecting unit and the straight lines are aligned along a free-form curve so as to form the free-form curved surface.

5. The reflector according to one of Claims 1 to 4, wherein each pair of reflecting pieces comprise a plurality of reflecting units, with the first fixing portions of the plurality of reflecting units connected with one another and the second fixing portions of the plurality of reflecting units connected with one another, and the plurality of reflecting units are arranged such that the light sources located at the optical centers of the reflecting units are arranged in a line.

6. The reflector according to one of Claims 1 to 4, wherein the reflector comprises a plurality pairs of reflecting pieces arranged such that the light sources located at the optical centers of the reflecting units are arranged in parallel lines or in a line.

7. The reflector according to one of Claims 1 to 4, wherein the openings of the reflecting portions can be any angle from  $30^{\circ}$  to  $120^{\circ}$ .

8. An illuminator comprising a heat sinking plate, a base plate, a light source, and the reflector according to one of the aforesaid claims, wherein

the heat sinking plate is fixed to the base plate, the first fixing portion and the second fixing portion are fixed to the heat sinking plate or the base plate, and

the light source is fixed to the heat sinking plate and located at the optical center of the reflecting unit, such that one part of light emitted from the light source passes through the opening directly and the other part of light passes through the opening after reflected by the first reflecting portion and the second reflecting portion.

9. The illuminator according to Claim 8, wherein the illuminator further comprises a transparent casing which is fixed to the base plate or heat sinking plate for accommodating the light source and the reflector.

10. The illuminator according to Claim 8 or Claim 9, wherein the light source is a LED lamp.

11. A use of the illuminator according to one of claims 8-10, wherein the illuminator is used for road illumination, tunnel illumination and prolate shape region illumination.

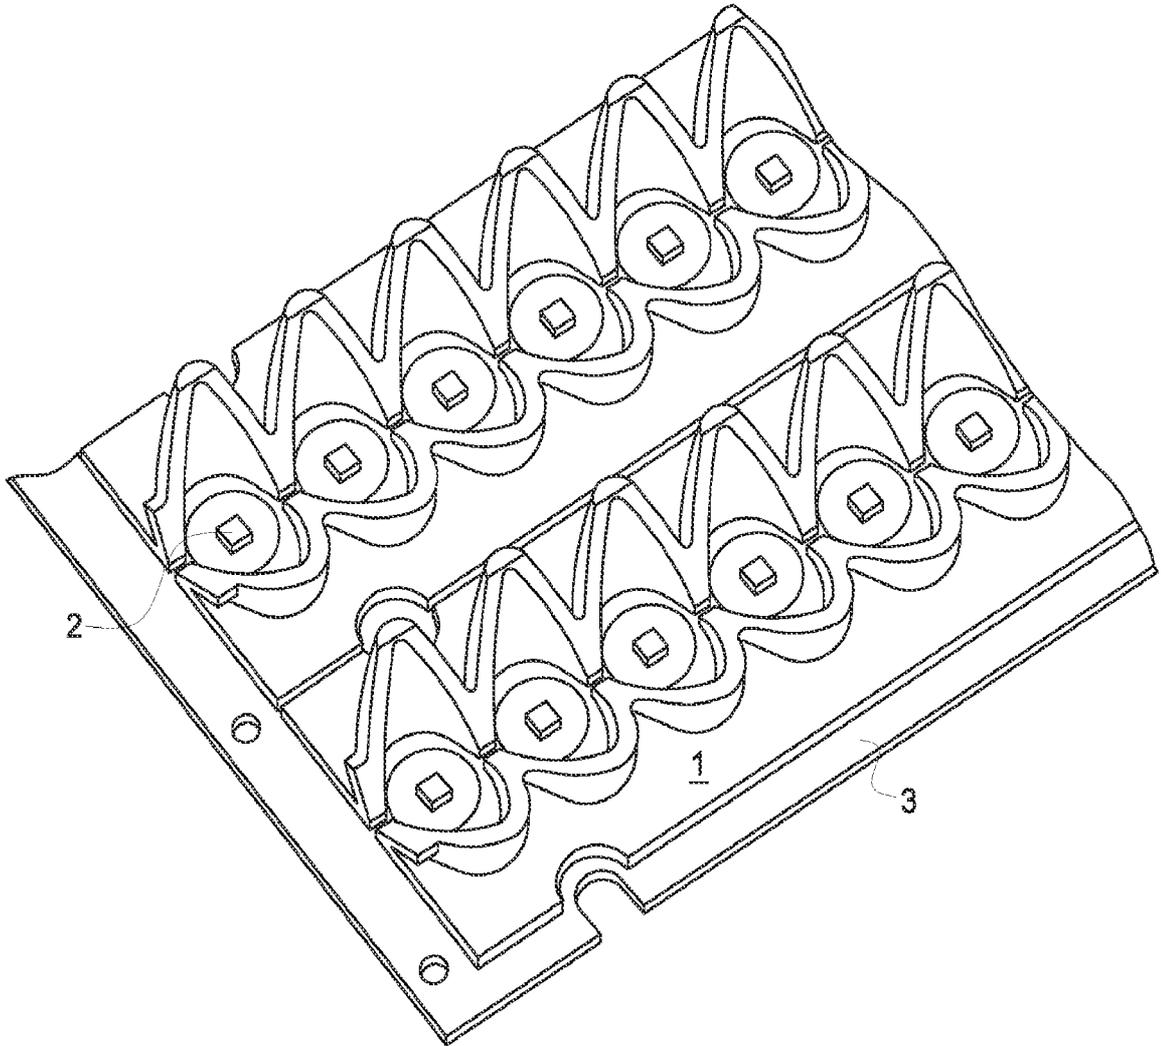


FIG. 1

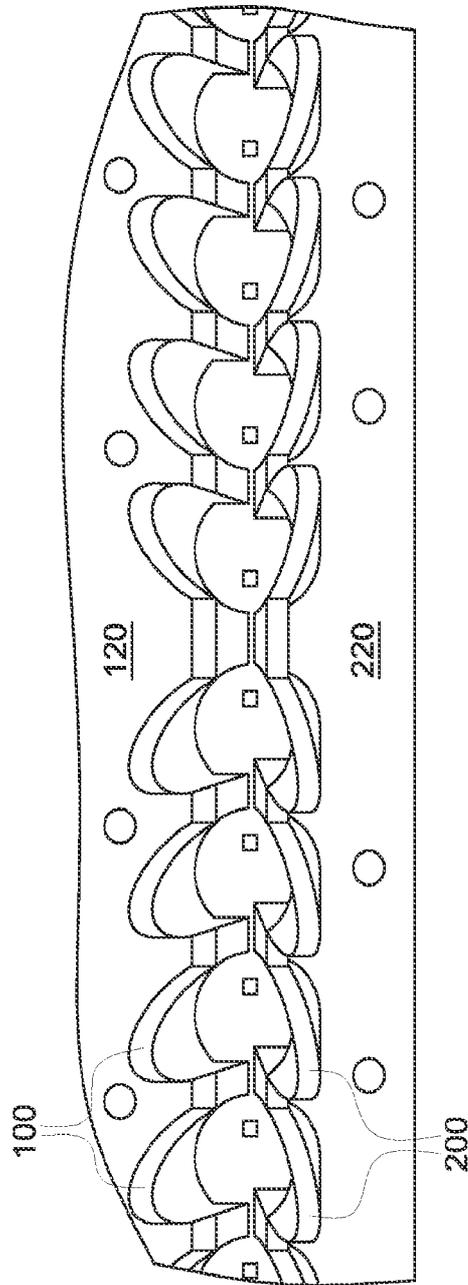


FIG. 2

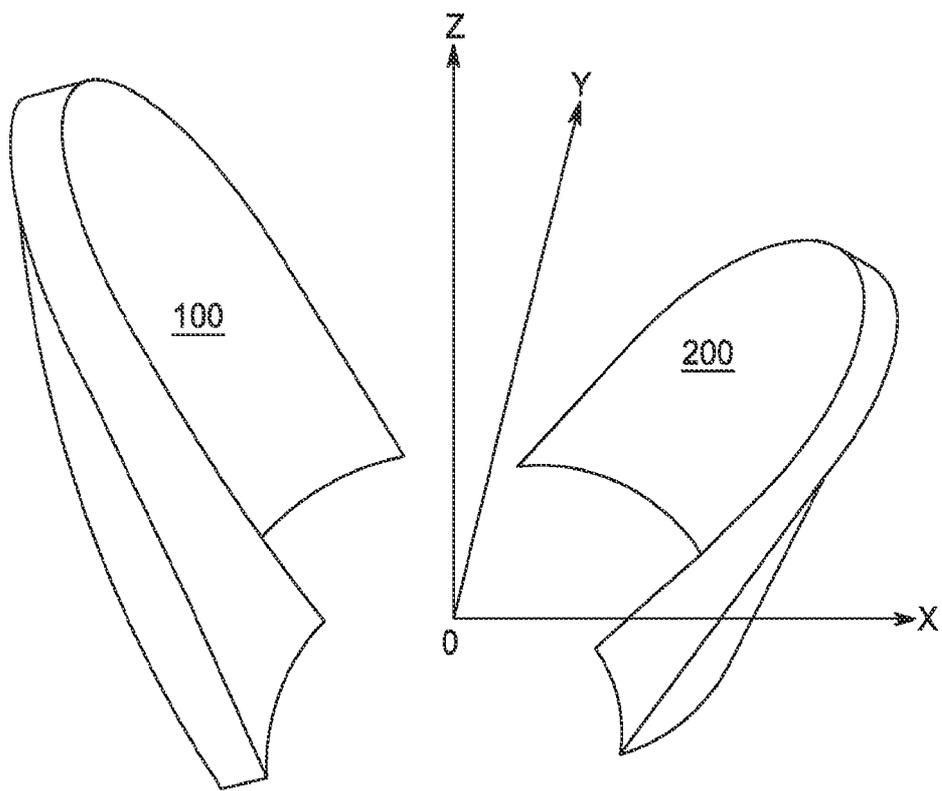


FIG. 3

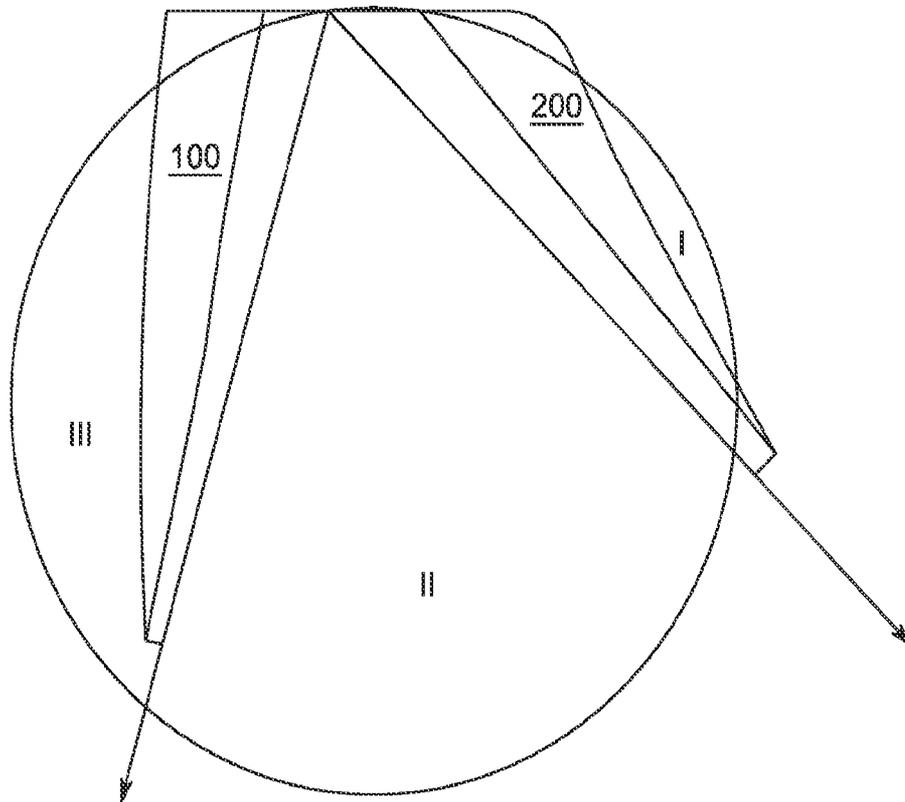


FIG. 4

5/10

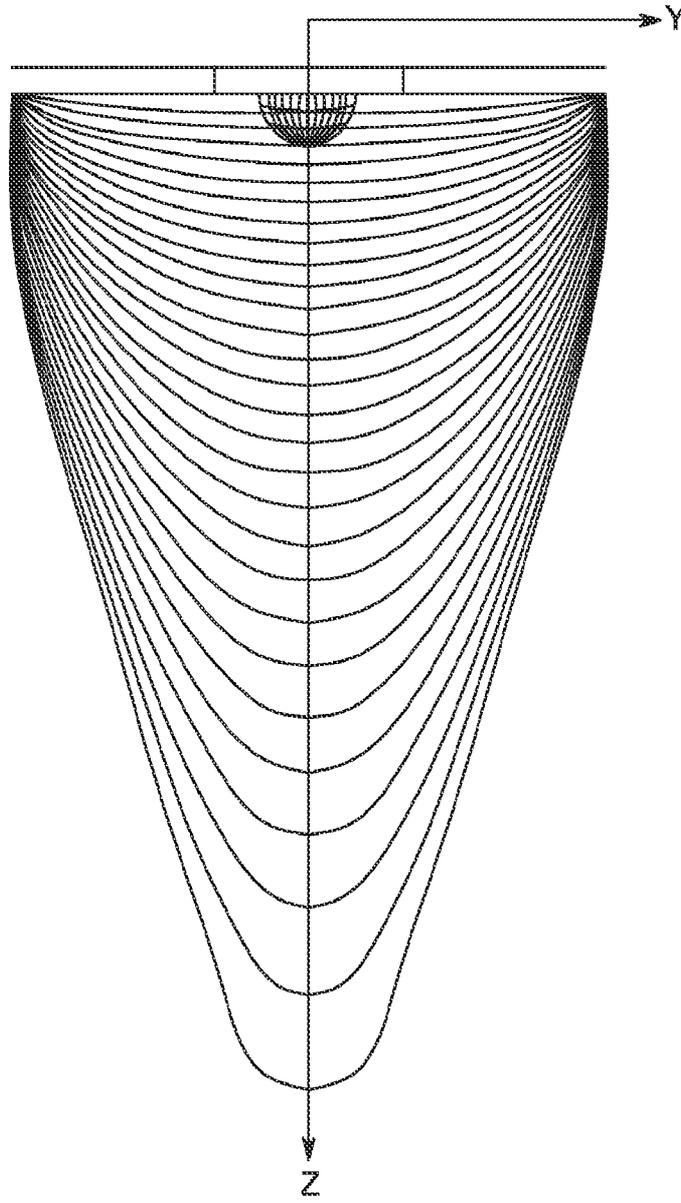


FIG. 5A

6/10

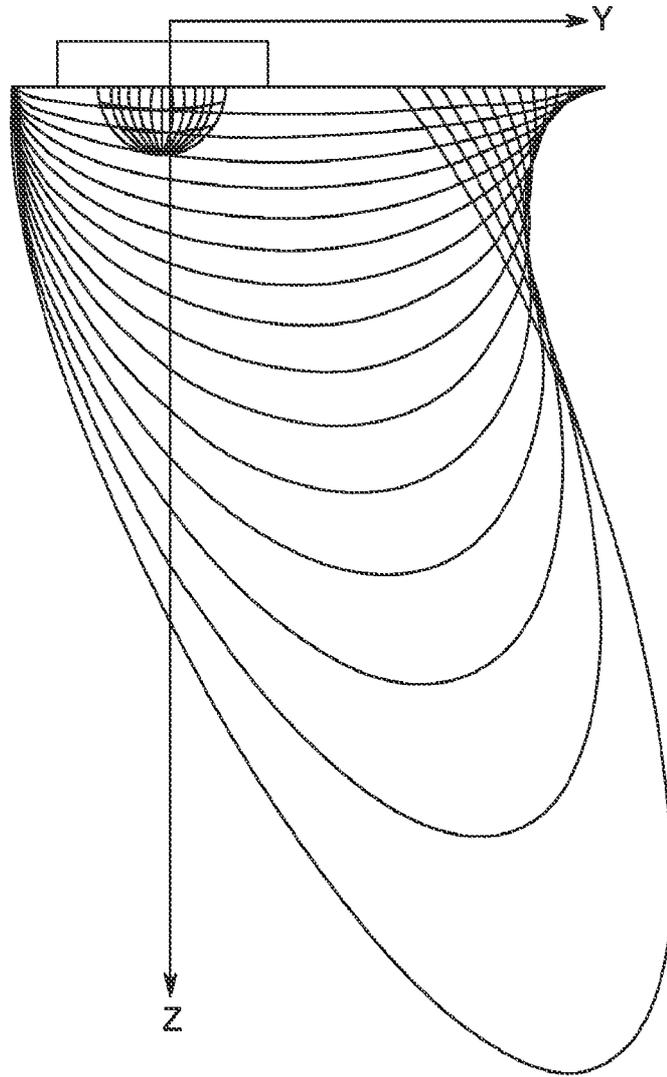


FIG. 5B

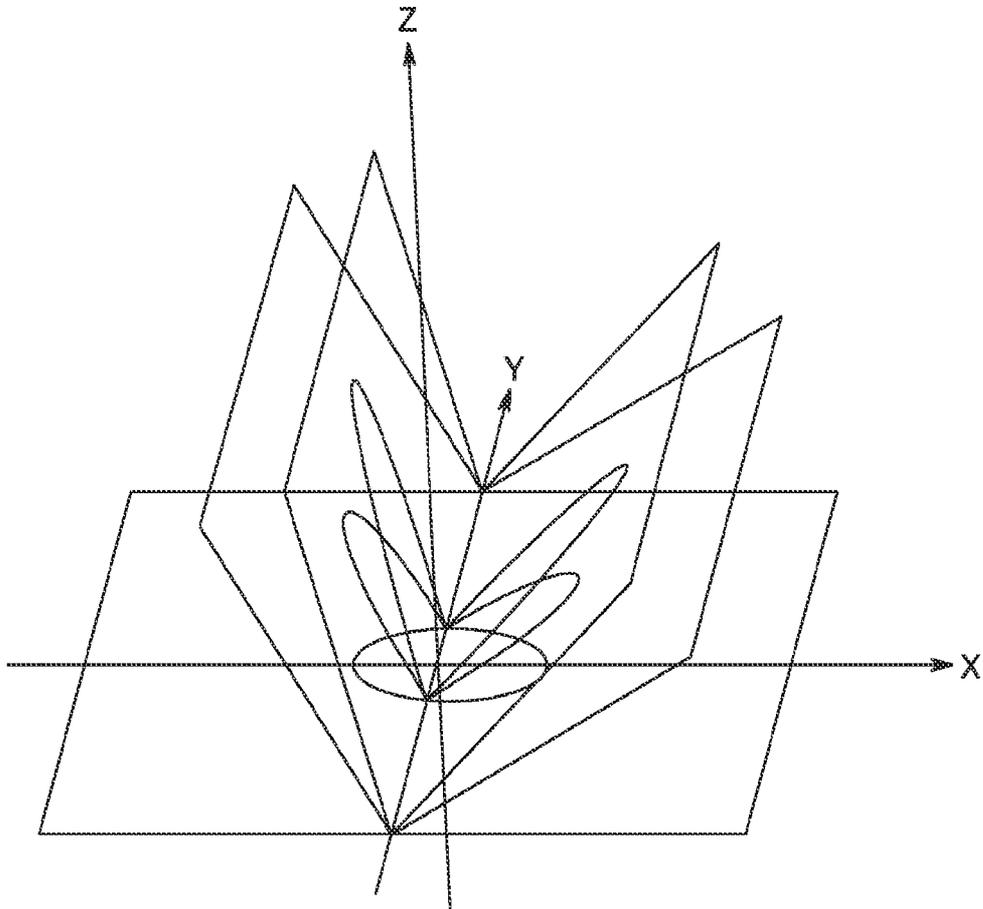


FIG. 6A

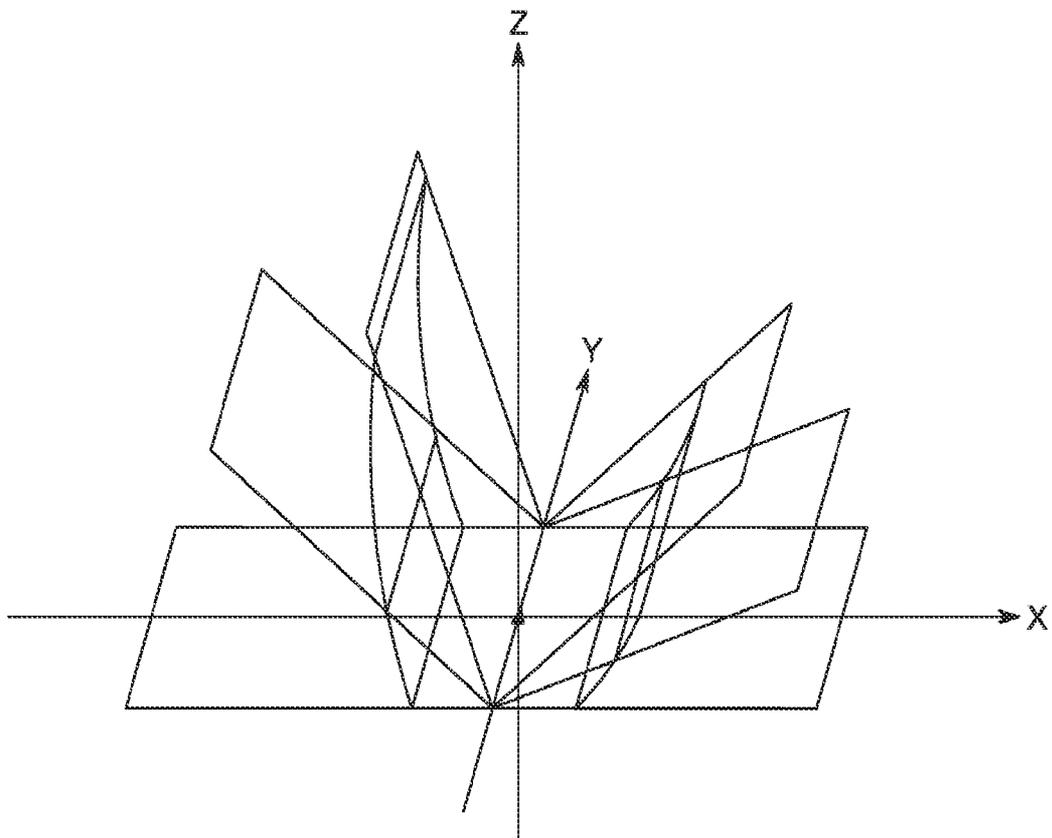


FIG. 6B

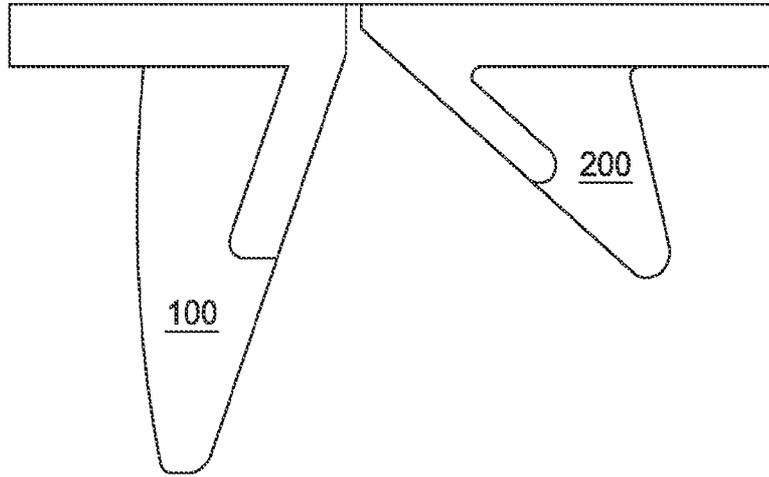


FIG. 7

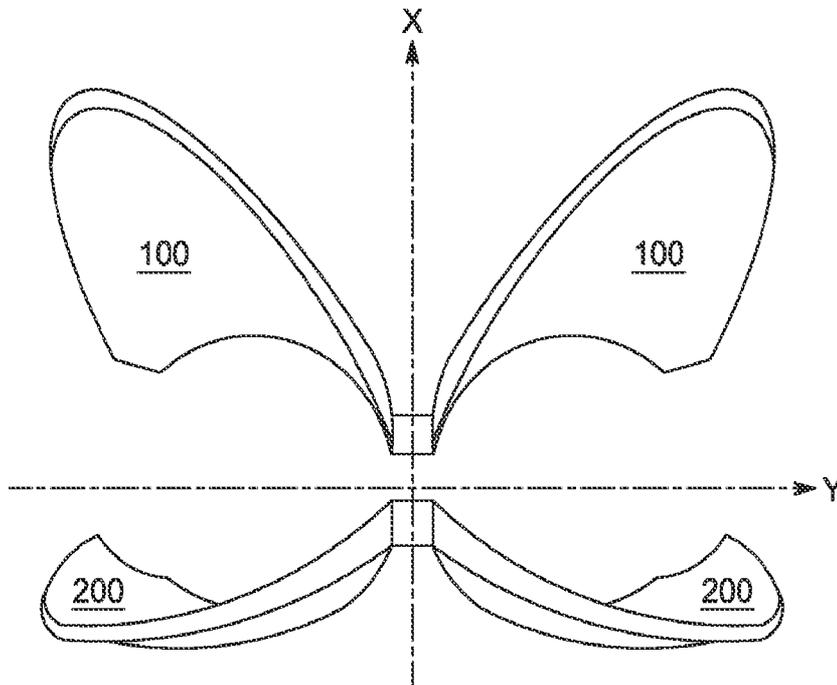


FIG. 8

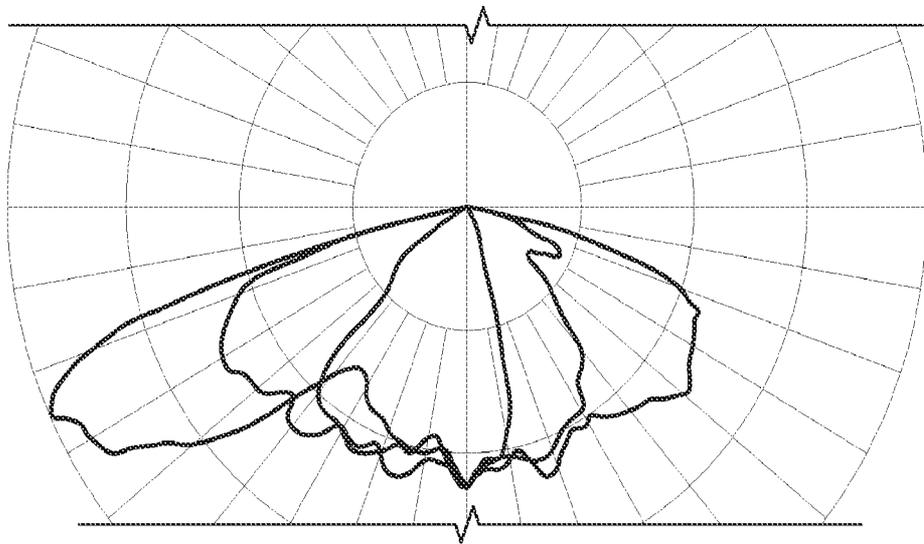


FIG. 9

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2012/060969

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. F21S8/08 F21V7/00  
 ADD.  
 According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
 Minimum documentation searched (classification system followed by classification symbols)  
 F21S F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 593 485 A (THILLAYS JACQUES C [FR]) 10 June 1986 (1986-06-10) column 1, line 29 - column 6, line 25; figures 1-4	1-11
A	----- EP 1 781 072 A2 (PENTAIR WATER POOL & SPA INC [US]) 2 May 2007 (2007-05-02) paragraph [0026] - paragraph [0067]; figures 1-4,12	1-11
A	----- US 2006/035511 A1 (MRAKOVICH MATTHEW [US] ET AL) 16 February 2006 (2006-02-16) paragraph [0026] - paragraph [0061]; figures 9-13	1-11

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  8 January 2013	Date of mailing of the international search report  23/01/2013
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Arboreanu, Antoniu
--	--

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/060969

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 4593485	A	10-06-1986	DE 3465667 D1	01-10-1987
			EP 0127239 A1	05-12-1984
			FR 2547087 A1	07-12-1984
			JP 59228690 A	22-12-1984
			US 4593485 A	10-06-1986
			-----	
EP 1781072	A2	02-05-2007	AT 454030 T	15-01-2010
			AU 2006235806 A1	10-05-2007
			CA 2565644 A1	26-04-2007
			EP 1781072 A2	02-05-2007
			NZ 571827 A	26-03-2010
			US 2007159833 A1	12-07-2007
			-----	
US 2006035511	A1	16-02-2006	AU 2006304207 A1	26-04-2007
			CN 101631989 A	20-01-2010
			EP 1949498 A2	30-07-2008
			US 2006035511 A1	16-02-2006
			US 2007190845 A1	16-08-2007
			WO 2007047398 A2	26-04-2007
-----				