




(86) Date de dépôt PCT/PCT Filing Date: 2003/04/28
(87) Date publication PCT/PCT Publication Date: 2003/11/13
(45) Date de délivrance/Issue Date: 2008/01/08
(85) Entrée phase nationale/National Entry: 2004/10/25
(86) N° demande PCT/PCT Application No.: US 2003/013139
(87) N° publication PCT/PCT Publication No.: 2003/094405
(30) Priorité/Priority: 2002/04/29 (US10/134,859)

(51) Cl.Int./Int.Cl. *H04Q 7/24* (2006.01),
H04L 12/28 (2006.01), *H04L 12/56* (2006.01)
(72) Inventeur/Inventor:
CAIN, JOSEPH BIBB, US
(73) Propriétaire/Owner:
HARRIS CORPORATION, US
(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : RESEAU AD-HOC MOBILE HIERARCHISE ET PROCEDES DE ROUTAGE SUR DEMANDE DANS CE
DERNIER AU MOYEN D'UN ACHEMINEMENT PAR SOURCE DYNAMIQUE (ASD)
(54) Title: HIERARCHICAL MOBILE AD-HOC NETWORK AND METHODS FOR PERFORMING REACTIVE ROUTING
THEREIN USING DYNAMIC SOURCE ROUTING (DSR)

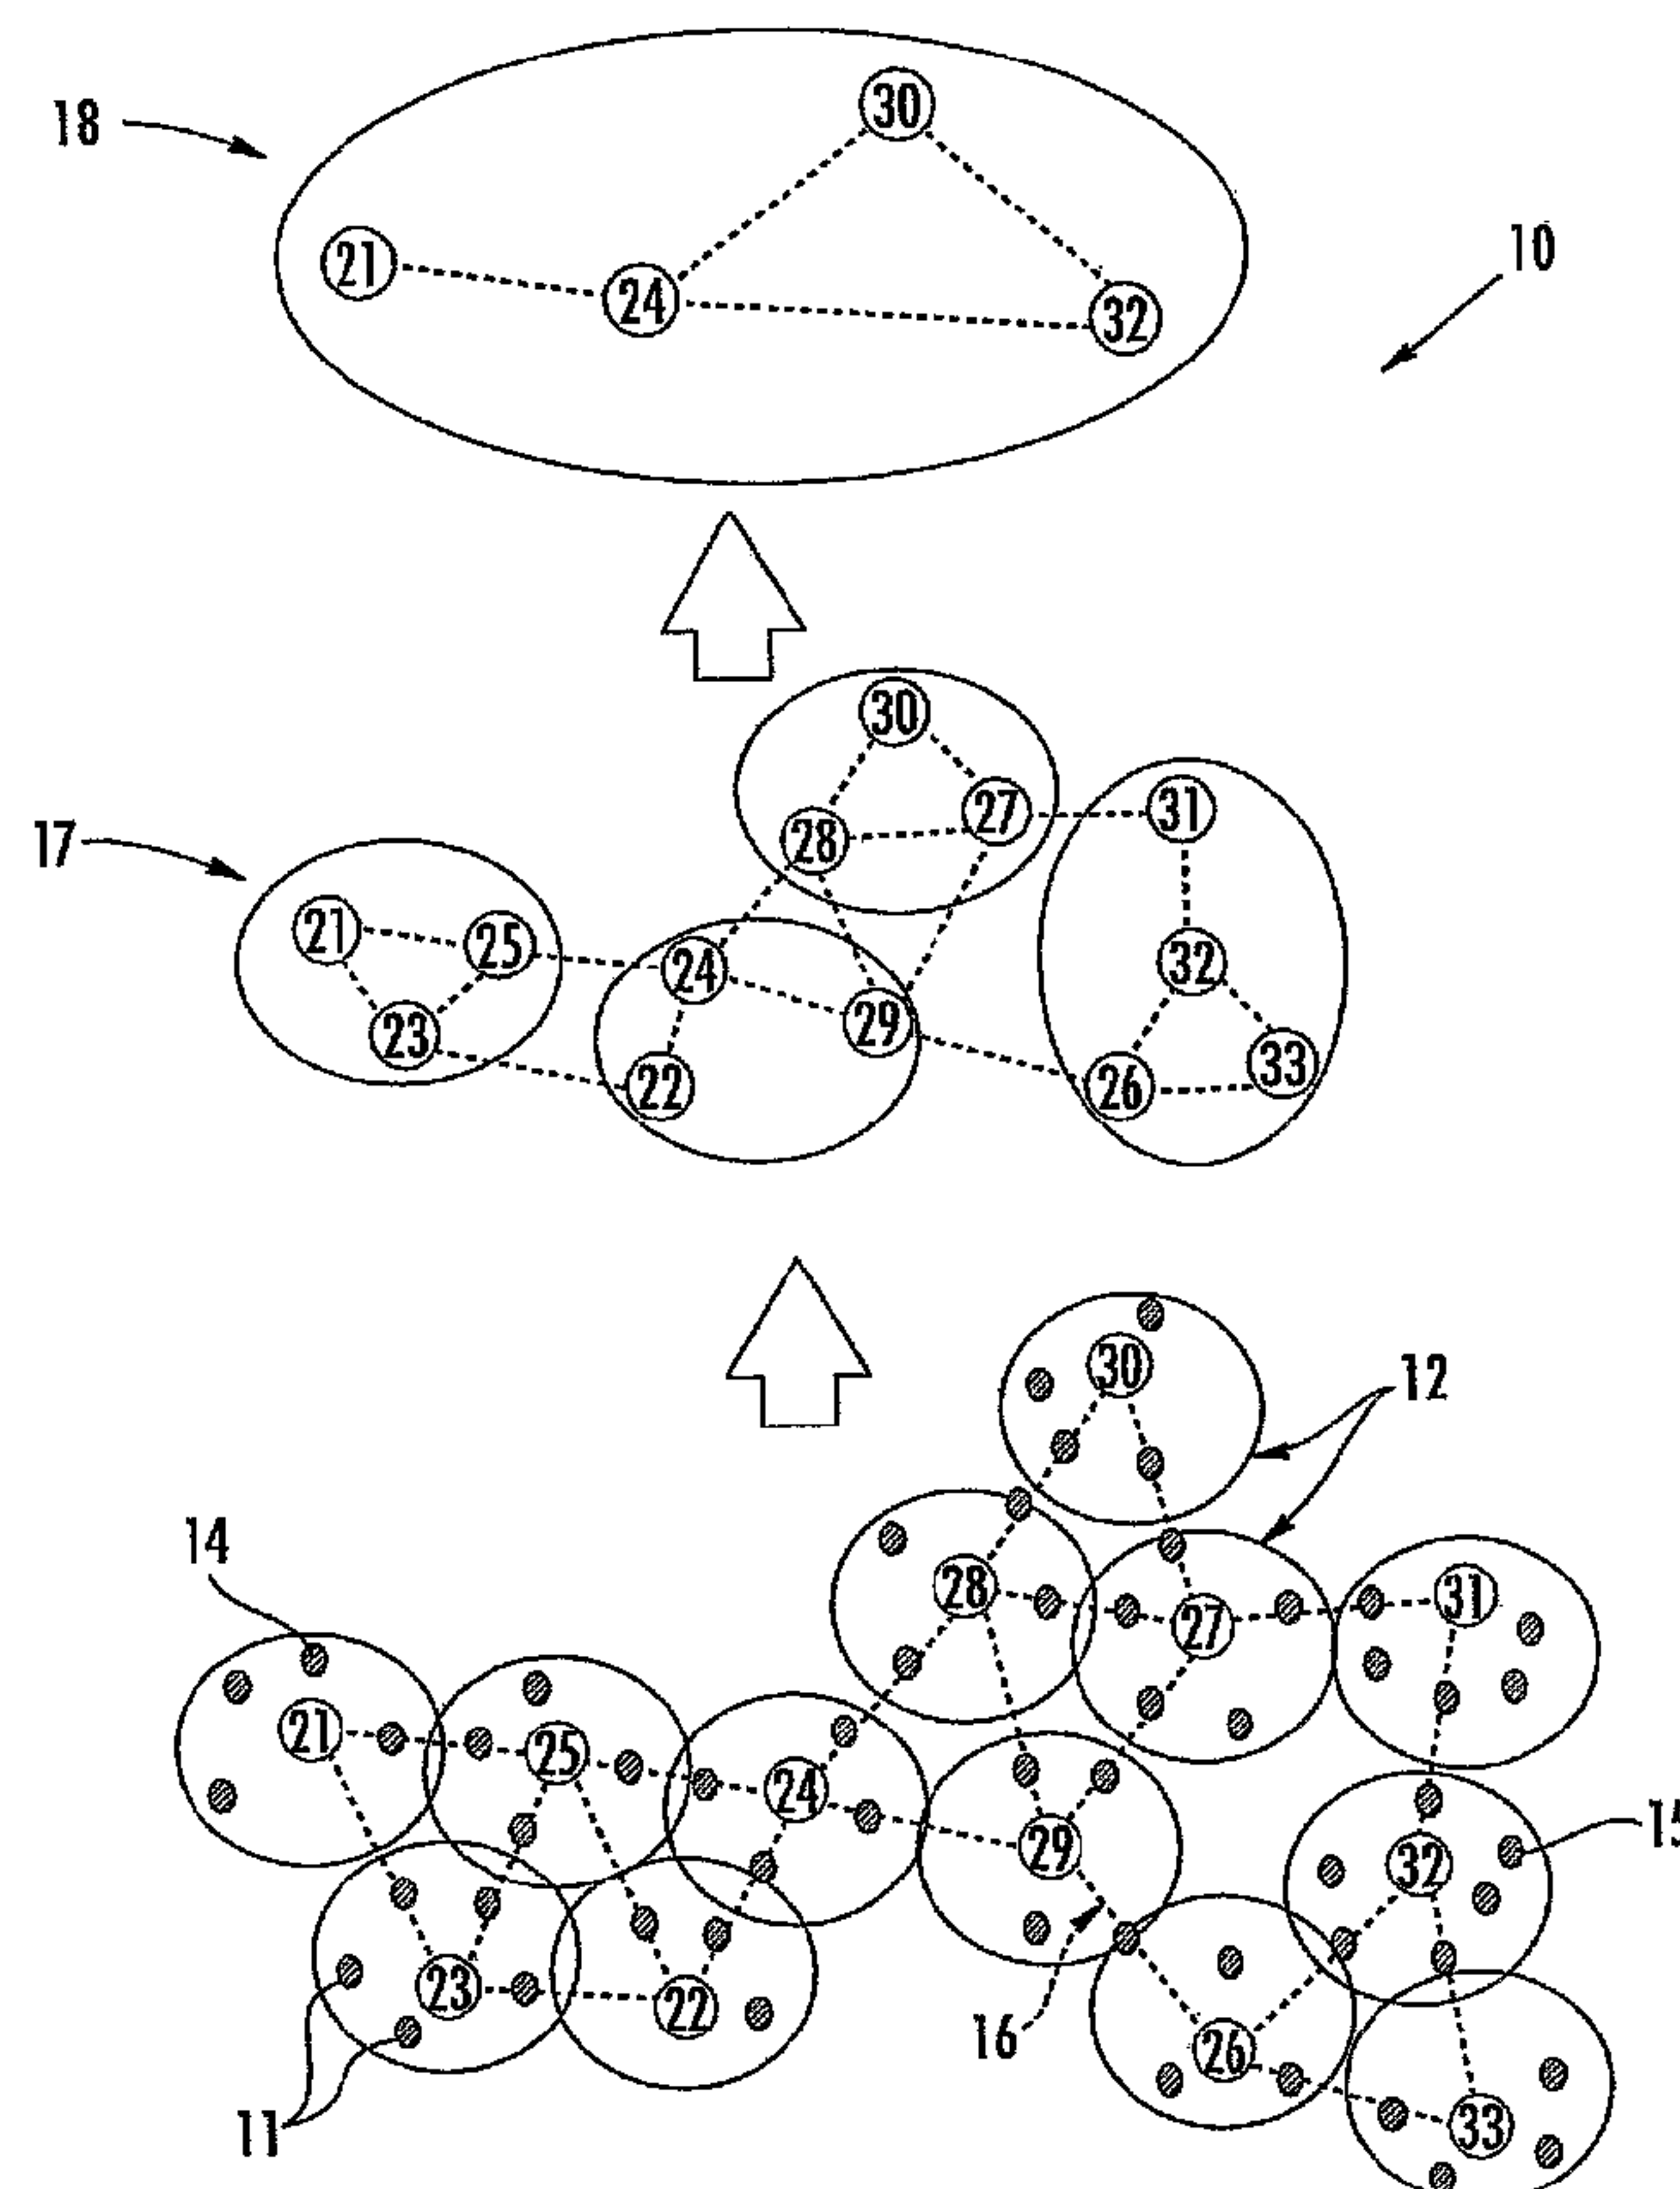

(57) Abrégé/Abstract:

A method is provided for sending data in a wireless ad-hoc network (10) including a plurality of nodes (11) grouped into clusters of nodes (12) and a plurality of wireless links (16) connecting the plurality of nodes (11), where each cluster node (11) has a



(57) **Abrégé(suite)/Abstract(continued):**

designated cluster leader node (21)-(23). The method may include sending a cluster-level route request from a source node of a source cluster to a cluster leader node of the source cluster, and determining a cluster level route between the source cluster and a destination cluster including a destination node responsive to the cluster-level route request and using a plurality of the cluster leader nodes. Furthermore, at least one cluster target node may be designated in a cluster along the cluster-level route, and a node-level route determined from the source node to the destination node including the at least one cluster target node.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number
WO 2003/094405 A3

(51) International Patent Classification⁷: **H04Q 7/24**

(21) International Application Number:
PCT/US2003/013139

(22) International Filing Date: 28 April 2003 (28.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/134,859 29 April 2002 (29.04.2002) US

(71) Applicant: **HARRIS CORPORATION** [US/US]; 1025 West NASA Blvd., Melbourne, FL 32919 (US).

(72) Inventor: **CAIN, Joseph, Bibb**; 200 Melbourne Avenue, Indialantic, FL 32903 (US).

(74) Agents: **YATSKO, Michael, S.** et al.; Harris Corporation, 1025 W. Nasa Blvd, Melbourne, FL 32919 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: HIERARCHICAL MOBILE AD-HOC NETWORK AND METHODS FOR PERFORMING REACTIVE ROUTING THEREIN USING DYNAMIC SOURCE ROUTING (DSR)

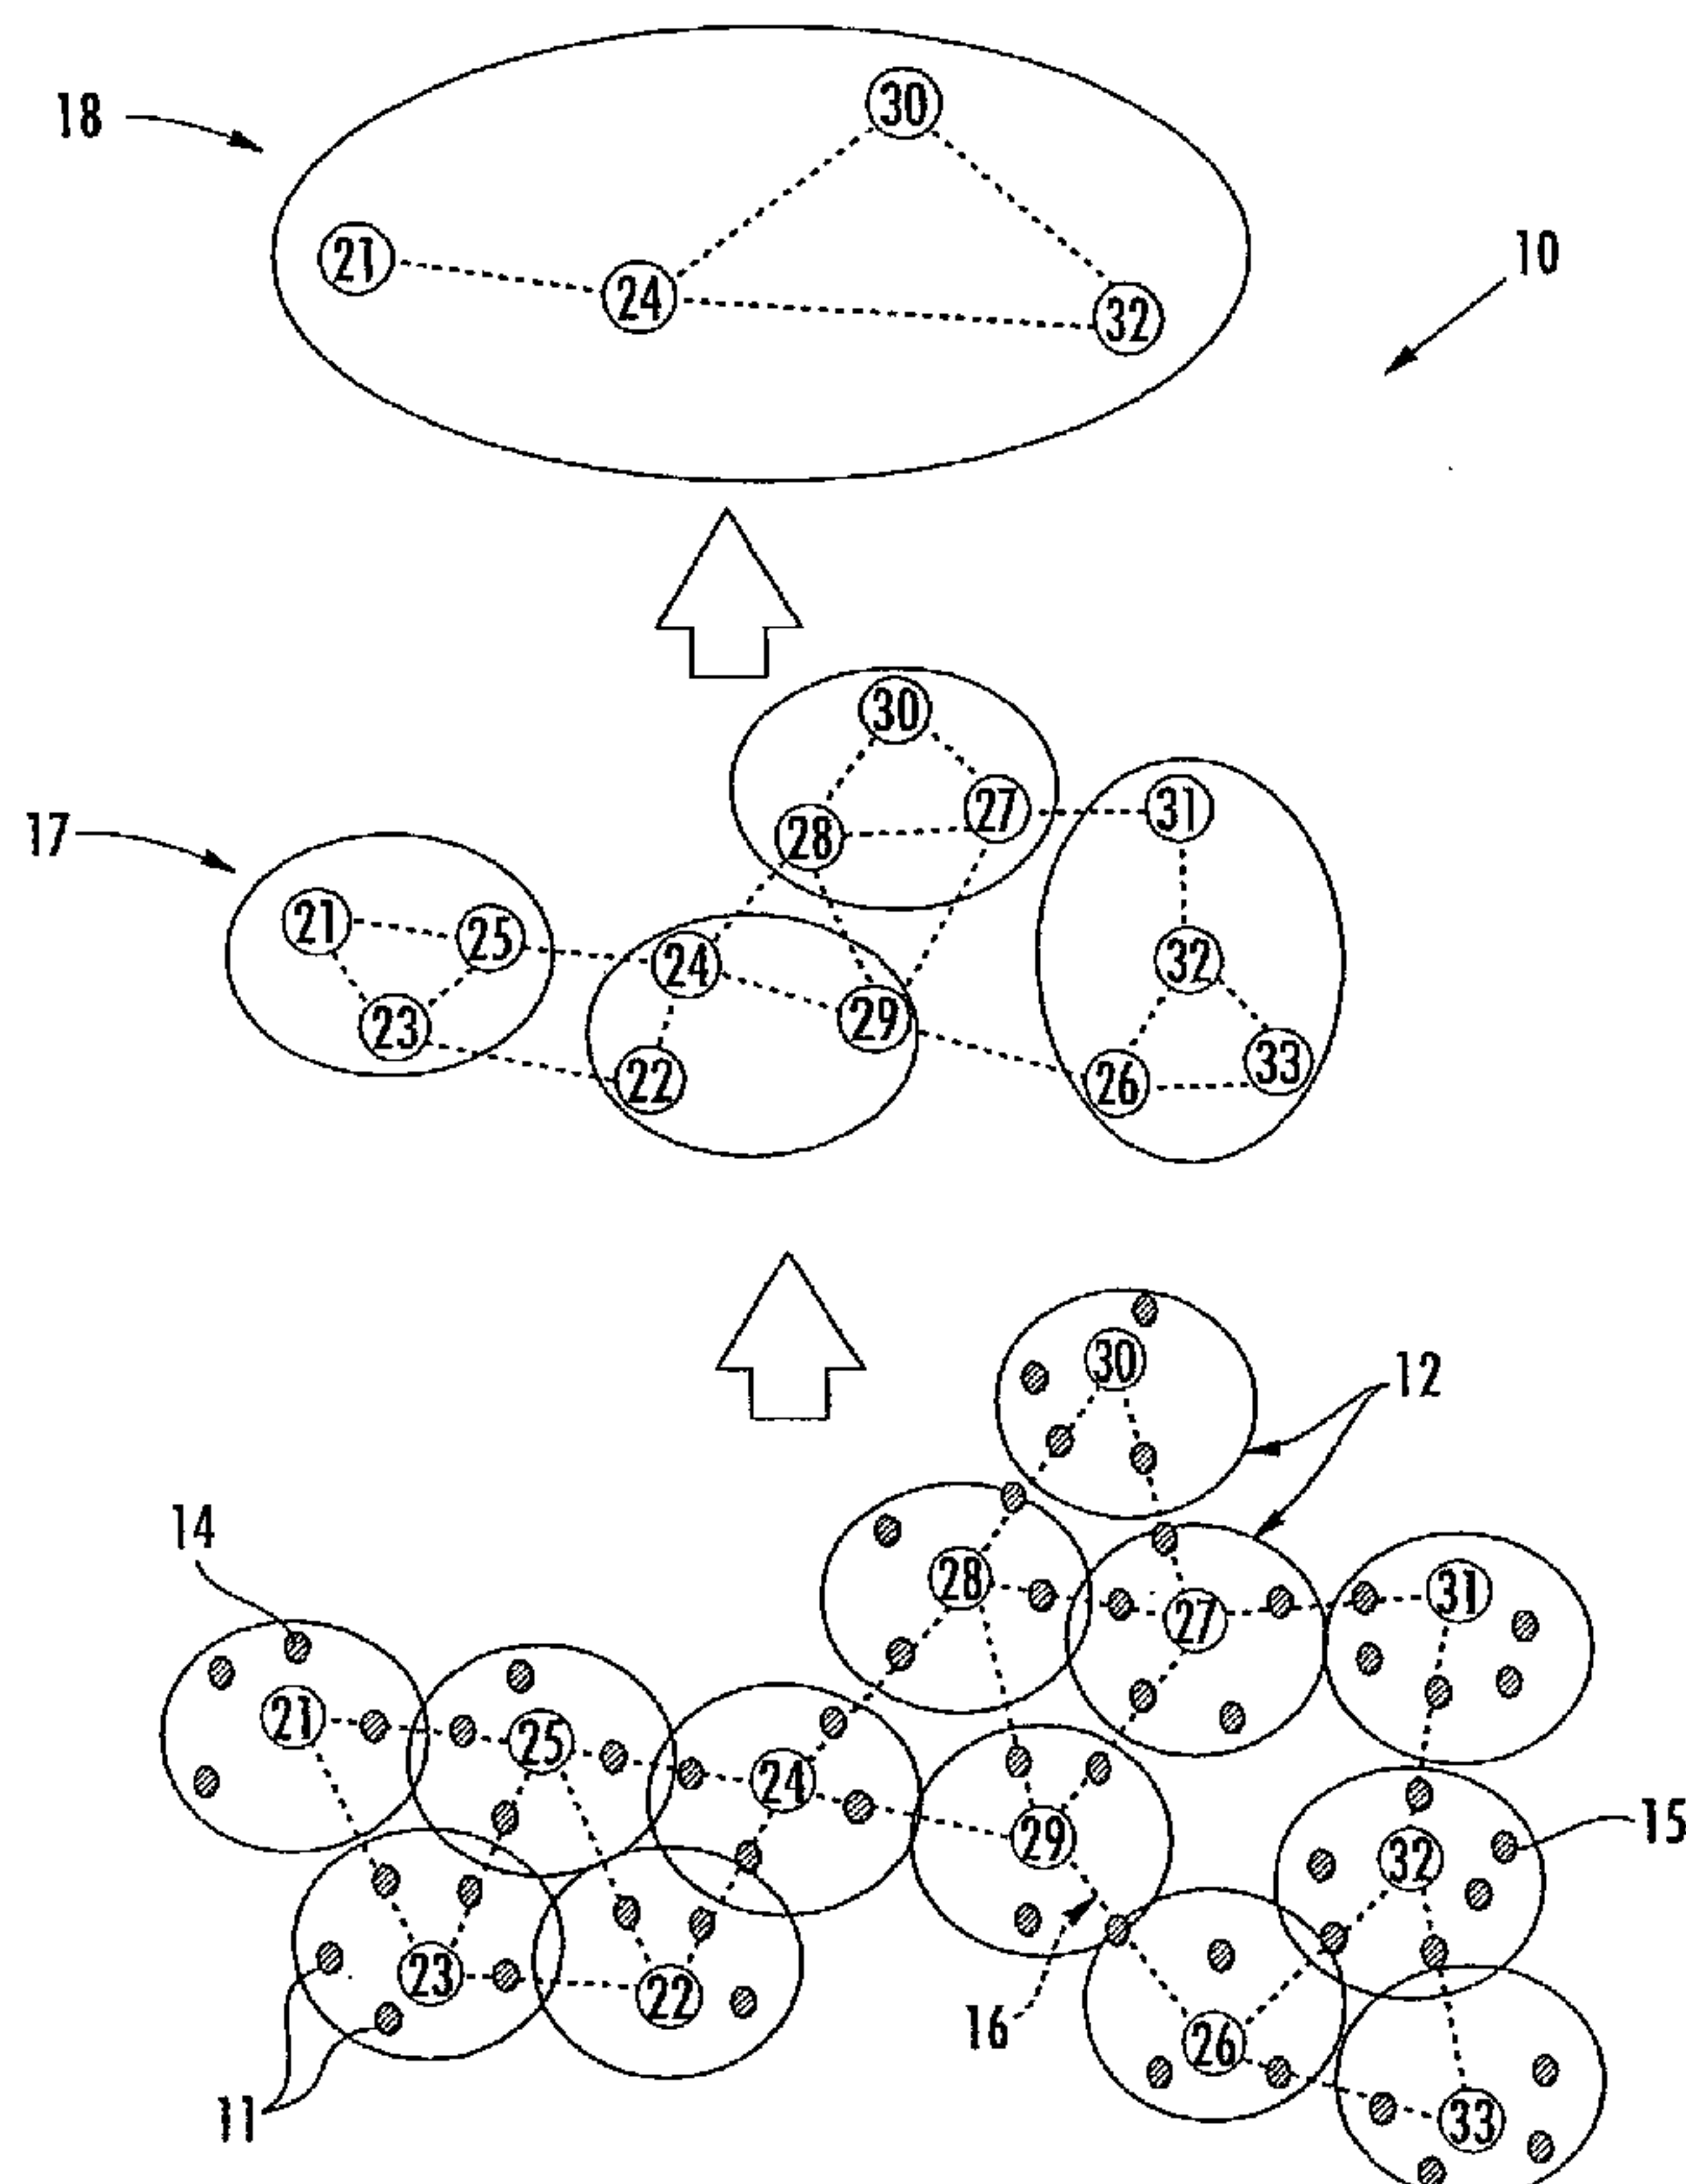

(57) Abstract: A method is provided for sending data in a wireless ad-hoc network (10) including a plurality of nodes (11) grouped into clusters of nodes (12) and a plurality of wireless links (16) connecting the plurality of nodes (11), where each cluster node (11) has a designated cluster leader node (21)-(23). The method may include sending a cluster-level route request from a source node of a source cluster to a cluster leader node of the source cluster, and determining a cluster level route between the source cluster and a destination cluster including a destination node responsive to the cluster-level route request and using a plurality of the cluster leader nodes. Furthermore, at least one cluster target node may be designated in a cluster along the cluster-level route, and a node-level route determined from the source node to the destination node including the at least one cluster target node.

WO 2003/094405 A3

WO 2003/094405 A3



(88) Date of publication of the international search report:
11 March 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**HIERARCHICAL MOBILE AD-HOC NETWORK AND
METHODS FOR PERFORMING REACTIVE ROUTING
THEREIN USING DYNAMIC SOURCE ROUTING (DSR)**

Field of the Invention

The present invention relates to the field of communication networks, and, more particularly, to mobile ad-hoc wireless networks and related methods.

Background of the Invention

5 Wireless networks have experienced increased development in the past decade. One of the most rapidly developing areas is mobile ad-hoc networks. Physically, a mobile ad-hoc network includes a number of geographically-distributed, potentially mobile nodes sharing a common radio
10 channel. Compared with other types of networks, such as cellular networks or satellite networks, the most distinctive feature of mobile ad-hoc networks is the lack of any fixed infrastructure. The network may be formed of mobile nodes only, and a network is created "on the fly" as the nodes
15 transmit with each other. The network does not depend on a particular node and dynamically adjusts as some nodes join or others leave the network.

 Because of these unique characteristics, routing protocols for governing data flow within ad-hoc networks
20 are required which can adapt to frequent topology changes. Two basic categories of ad-hoc routing protocols have emerged in recent years, namely reactive or "on-demand" protocols, and proactive or table-driven protocols. Reactive protocols collect routing information when a
25 particular route is required to a destination in response to a route request. Examples of reactive protocols include ad-hoc on demand distance vector (AODV) routing, dynamic source routing (DSR), and the temporally ordered routing algorithm (TORA).

On the other hand, proactive routing protocols attempt to maintain consistent, up-to-date routing information from each node to every other node in the network. Such protocols typically require each node to maintain one or more tables to store routing information, and they respond to changes in network topology by propagating updates throughout the network to maintain a consistent view of the network. Examples of such proactive routing protocols include destination-sequenced distance-vector (DSDV) routing, which is disclosed in U.S. Patent No. 5,412,654 to Perkins; the wireless routing protocol (WRP); and clusterhead gateway switch routing (CGSR). A hybrid protocol which uses both proactive and reactive approaches is the zone routing protocol (ZRP), which is disclosed in U.S. Patent No. 6,304,556 to Haas.

One challenge to the advancement of ad-hoc network development is that of extending such networks to encompass large numbers of nodes. One prior art attempt to do so utilizes "spine" routing, such as in the optimal spine routing (OSR) approach disclosed by Das et al. in "Routing in Ad-Hoc Networks using Minimum Connected Dominating Sets," *IEEE Int. Conf. On Commun. (ICC '97)*, 1997. In this approach, a spine or "virtual backbone" is defined such that each network node is no more than one hop from a spine node. Global topology (link state) is maintained at each spine node, and a link-state routing algorithm is run at each spine node to produce current routes to every destination.

Another related approach is clustered spine routing (CSR), which is disclosed by Das et al. in "Routing in Ad-Hoc Networks using a Spine," *IEEE Int. Conf. On Computer Commun. and Networks (IC3N '97)*, 1997. this approach is intended to extend the applicability of spine routing to larger network sizes by grouping the nodes in clusters and adding a second hierarchical level to the OSR approach. Yet another approach

is known as partial knowledge spine routing (PSR) which is disclosed by Sivakumar et al. in "The Clade Vertebrata: Spines and Routing in Ad-Hoc Networks," *IEEE Symposium On Computer and Commun.*, 1998.

5 One common characteristic of each of the above prior art cluster/spine approaches is that they each rely on proactive routing. One potential drawback of proactive routing is that it typically requires a significant amount of routing overhead to maintain optimal routes to all
10 destinations at all times. This problem may become particularly acute when applied to ad-hoc networks including a very large number of nodes.

Summary of the Invention

15 In view of the foregoing background, it is therefore an object of the present invention to provide a method for sending data in ad-hoc networks that is particularly well suited for networks having a relatively large number of nodes.

 This and other objects, features, and advantages
20 in accordance with the present invention are provided by a method for sending data in a wireless ad-hoc network including a plurality of nodes grouped into clusters of nodes and a plurality of wireless links connecting the plurality of nodes, where each cluster has a designated
25 cluster leader node. The method may include sending a cluster-level route request from a source node of a source cluster to a cluster leader node of the source cluster, and determining a cluster-level route between the source cluster and a destination cluster including a destination
30 node responsive to the cluster-level route request and using a plurality of the cluster leader nodes.

Furthermore, at least one cluster target node may be designated in a cluster along the cluster-level route, and a node-level route determined from the source node to the

destination node including the at least one cluster target node. In addition, the method may also include generating a mission data packet including an address of the destination node, an address of the at least one cluster
5 target node, the node-level route, and the cluster-level route. The data may be transferred from the source node to the destination node via the node-level route based upon the mission data packet.

More particularly, determining the at least one
10 cluster target node may include determining a respective cluster target node for each cluster along the cluster-level route. Further, determining the node-level route may include determining the node-level route from the source node to a cluster target node for a next adjacent cluster along the
15 cluster-level route, and a node-level route may be determined from each cluster target node to a next cluster target node along the cluster-level route. Also, generating the mission data packet may further include updating the mission data packet at each cluster target node along the cluster-level
20 route to include an address of the next cluster target node and the node-level route thereto.

The address of the at least one cluster target node and the cluster-level route may be equal to a predetermined value if the source cluster and the destination cluster are
25 the same cluster. The method may further include storing the address of the destination node along with an address of the respective cluster leader node therefor at the cluster leader node for the source cluster. Also, a hierarchical source route may be stored, at the source node, to the destination
30 node. The hierarchical source route may include the cluster-level route, the address of the at least one cluster target node, and the node-level route. Additionally, the cluster-level route may be stored at the cluster leader node for the source cluster.

Furthermore, the method may also include grouping a plurality of the cluster leader nodes including at least the source cluster leader node and the destination cluster leader node into a leader node cluster. A high-level route may be determined from the cluster leader node of the source cluster to the cluster leader node of the destination cluster within the leader node cluster. Also, the cluster-level route may include at least the clusters having respective cluster leader nodes along the high-level route.

10 Determining the cluster-level route may include determining designated communication links between the cluster leader nodes, and sending a cluster leader node route request from the cluster leader node of the source cluster to the remaining cluster leaders via the designated communication
15 links. Further, a cluster leader node route reply may be returned from the cluster leader node of the destination cluster to the cluster leader node of the source cluster along a delivery route of the cluster leader node route request.

More particularly, at least one of the designated
20 communications links may include a node that is not a cluster leader node. Further, each cluster leader node may store identities of adjacent cluster leader nodes, and sending the cluster leader node route request may include sending the cluster leader node route request from each cluster leader
25 node to its adjacent cluster leader nodes. Also, the adjacent cluster leader nodes may be periodically polled to maintain current addresses therefor. Furthermore, the delivery route may include a least number of cluster leader nodes between the cluster leader nodes of the source and destination clusters.
30 Other path metrics such as delay, link capacities, availability, etc., may also be useful in determining the best route.

A mobile ad-hoc network is also provided according to the present invention and may include a plurality of nodes

grouped into clusters of nodes, each cluster having a designated cluster leader node, and a plurality of wireless links connecting said plurality of nodes. The plurality of nodes may send data therebetween as briefly outlined above.

5

Brief Description of the Drawings

FIG. 1 is a schematic diagram of an ad-hoc network according to the present invention.

FIG. 2 is a schematic diagram of the ad-hoc network of FIG. 1 illustrating node-level routes therein along a cluster-level route.

FIG. 3 is a schematic diagram of the ad-hoc network of FIG. 1 illustrating multiple hierarchical levels.

FIG. 4 is a flow diagram illustrating a method for sending data within an ad-hoc network according to the present invention.

FIG. 5 is a flow diagram illustrating the cluster-level route discovery process of FIG. 5 in further detail.

FIG. 6 is a flow diagram illustrating the node-level route discovery process and data transfer of FIG. 5 in further detail.

FIG. 7 is a flow diagram illustrating an alternate embodiment of the method of FIG. 5 using dynamic source routing (DSR).

FIG. 8 is a flow diagram illustrating another alternate embodiment of the invention using ad-hoc on-demand vector (AODV) routing.

FIG. 9 is a flow diagram illustrating a method for route error recovery according to the present invention.

FIG. 10 is schematic diagram illustrating grouping of clusters and cluster leader node designation in accordance with the present invention.

Detailed Description of the Preferred Embodiments

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout, and prime and multiple prime notation is used to indicate similar elements in alternative embodiments.

Referring initially to FIG. 1, a mobile ad-hoc network **10** according to the present invention illustratively includes a plurality of nodes **11** connected by wireless communications links **13**. The nodes **11** may be any suitable type of wireless communications device capable of communicating within a wireless ad-hoc network, such as computers, personal data assistants (PDAs), etc. with wireless modems, as well as others, as will be appreciated by those of skill in the art. Of course, it will also be appreciated that certain of the nodes **11** may optionally be connected to a fixed communications infrastructure, if desired.

According to the invention, the nodes **11** are preferably grouped into clusters **12**, which are illustratively shown as circles surrounding respective groups of nodes in FIG. 1. Grouping of the nodes **11** into clusters **12** will be described in greater detail below. For each of the clusters **12**, one of the nodes **11** thereof is designated as a respective cluster leader node **21-33**. The process for designating the cluster leader nodes **21-33** and the function thereof will also be described further below. For clarity of explanation, when a cluster **12** is discussed individually herein, the particular

cluster will be referred to by the reference numeral of its respective cluster leader node. For example, the cluster leader node **21** is within the cluster **21**, etc.

A method for sending data within the ad-hoc network according to the invention will now be described with reference to the flow diagrams of FIGS. 4-6. The method begins (Block **40**) by grouping the nodes **11** into the clusters **12**, at Block **41**. Various approaches may be used for grouping the nodes **11** in the clusters **12**. Generally speaking, it is preferable that decisions for clustering and election of cluster leaders be based upon a generalized metric with parameters selected to meet specific network requirements, as will be appreciated by those skilled in the art.

By way of example, a node **11** may select a cluster **12** to join based upon a cluster association metric. This metric may be calculated for each of the potential clusters **12** that a node **11** may associate with, and it may be based upon how well the node "fits" with the cluster in question. The cluster association metric can be as simple as a hop count metric, where the hop count is calculated for the path to the cluster leader node. In this simple case a node would associate with the cluster leader node that is closest in hop count.

Other metrics may consider different measures such as the path metric to all cluster members within k_N hops, the number of cluster members within k_N hops, the path metric to the cluster leader, and/or the cluster leader metric, for example. There are several methods possible for combining these measures to create a unified metric for cluster association. One example is a weighted sum where a node calculates the metric M_m^{CA} for associating with cluster leader node m as:

$$M_m^{CA} = M_m^{CL} + a \cdot M_m^{PCL} + \frac{c}{(n_m)^b} \cdot \sum_i M_i^P, \quad (1)$$

where n_m is the number of nodes within a k_N -hop neighborhood that are in cluster m , M_i^P is the path metric to the i^{th} node in that neighborhood, M_i^{PCL} is the path metric to the cluster leader node m , M_m^{CL} is the cluster leader metric, and a , b , and
 5 c are parameters to be tailored to the network requirements. Of course, other suitable approaches may also be used, as will be appreciated by those of skill in the art.

The above parameters allow a compromise in the association between selecting the cluster leader node **21-33**
 10 with the minimum path metric versus selecting the cluster **12** with a minimum path metric to as many nodes **11** in the cluster as possible. The node **11** selects the cluster leader node **21-33** with which it has the smallest cluster association metric M_m^{CA} as the leader to join. In addition, a hop count limit may
 15 be established that requires a new cluster member to be within hops k_c of the cluster leader node, as well as a limit L_{CL} on the number of nodes per cluster.

Path metrics used in the above calculation may include as node or link metrics one or more components such as
 20 hop count, delay, available capacity, node durability, and/or link durability, for example, although other suitable methods may also be used, as will be appreciated by those of skill in the art. A path metric may also be calculated as a weighted sum of link and node metric components along the path.

25 If the above cluster association metric is not within certain bounds, then a node **11** may elect to attempt to become a cluster leader node and form a new cluster **12**, at Block **42**. In doing this it may contend with its k_N -hop neighbors for the election to cluster leader. Another metric,
 30 the cluster leader metric, may be used for this purpose. Generally speaking, the cluster leader metric is based upon how well the node **11** will perform the task of cluster leader node for its k_N -hop neighbors.

More specifically, the cluster leader metric may take one of several forms. It could be as simple as the number of nodes reachable in a k_N -hop neighborhood. However, additional components for the metric may be desirable in certain applications. The cluster leader should preferably be "durable" in terms of its operation as a cluster leader, i.e., rather than intermittently alternating between powered-up and sleeping modes. An intermittently operating cluster leader node **21-33** would likely cause disruptive dynamics in the hierarchical topology, as will be appreciated by those of skill in the art.

Thus, nodes **11** contending to be a cluster leader may calculate their cluster leader metric M_m^{CL} using one or more of components, such as the number of nodes reachable in a k_N -hop neighborhood, path metrics to these nodes, path metrics to neighbor cluster leader nodes **21-33**, total nodal link capacities, node durability, and node relative mobility, for example. Of course, other metric components which will be appreciated by those of skill in the art may also be used. For a given network application, the cluster leader metric can be formed as an appropriate combination of those components which are needed for that application in a manner similar to that illustrated in equation (1), above, for the cluster association metric, as will also be appreciated by those skilled in the art.

As will be discussed further below, each cluster leader node **21-33** broadcasts a cluster leader node announce (CLNANN) message periodically (with a propagation limit of n_{CL} hops, for example). The propagation limit of this message may be such that it can reach all cluster members as well as the cluster leader nodes of all adjacent clusters. This message will announce the node as a cluster leader node and include the cluster leader metric for that node. In addition, it may include placeholders to allow accumulation of a path metric

for any path over which it is propagated, as will be appreciated by those of skill in the art.

Several forms of the path metric are possible, and the path metric can be either accumulated as one or more components or as a vector with each node retransmitting the CLNANN message and adding its contribution to the vector metric, as will be appreciated by those of skill in the art. The path metric and the cluster leader metric allow any node to calculate a cluster association metric. It will also be appreciated that the procedures for joining or associating with a cluster and the procedures for electing a cluster leader node, although described separately herein for clarity of explanation, may in fact be so closely related that in some embodiments they are implemented in a single composite algorithm.

Operational details of cluster association and election of cluster leader nodes will now be discussed further with reference to FIG. 10, in which a scenario for the election of a new cluster leader node is schematically illustrated. Clusters **101** and **102** include designated cluster leader nodes **101** and **102**, respectively. For clarity of illustration and explanation, the same reference numeral used for a particular cluster leader node will also be used to designate its respective cluster. Using the example illustrated in FIG. 10, the operational details associated with periodic messaging, node power-up election and cluster association, cluster leader node election, link failure, node failure, and new link addition will now be discussed.

With respect to periodic messaging, two types of periodic messages may be used. The cluster leader nodes **101**, **102** issue periodic CLNANN messages, as briefly discussed above. This message announces the existence of the node as a cluster leader node. It is propagated for n_{CL} hops so that it reaches all nodes **11** in adjacent clusters and, more

particularly, the adjacent cluster leader nodes. This message may include the cluster leader metric and a placeholder for nodes re-broadcasting the message to accumulate a path metric for the path from the cluster leader node to any node along
 5 each of the paths traversed.

The cluster leader metric may also be used to notify other nodes in the cluster of this metric. This is so that any other node that can be a better cluster leader can determine if it should contend for leadership based upon this
 10 metric. Each ordinary node **11** may also broadcast a neighborhood HELLO message that is to be propagated for k_N hops so that it reaches all nodes in a k_N -hop neighborhood of the node. This allows all nodes in the k_N -hop neighborhood to gather path metric information to all nodes in their
 15 neighborhood. The path metrics obtained in this manner can be used in forming both cluster leader and cluster association metrics.

Regarding node power-up and cluster association, upon powering up a node **11** may perform the following steps.
 20 The node **11** may "listen" for the periodic CLNANN messages from cluster leader nodes in neighboring clusters to identify potential clusters that it may join. Further, it may listen for the periodic HELLO messages from nodes **11** in the k_N -hop neighborhood to gather path metric information to all nodes in
 25 its k_N -hop neighborhood. Additionally, it may broadcast periodic HELLO messages to all nodes in its k_N -hop neighborhood. A cluster association metric M_m^{CA} may then be formed for each adjacent cluster leader m and the cluster leader node m , may be selected with the minimum cluster
 30 association metric M_m^{CA} as the cluster to join.

The metric M_m^{CA} will preferably be less than a threshold T_J to indicate that the node to be considered is close enough to the cluster to join. If this threshold is

satisfied, then a cluster join message CLJOIN is sent to the cluster leader node m . If the cluster has less than the limit L_{CL} on the number of nodes per cluster, then the cluster leader node accepts the node in the cluster and sends the acceptance
5 message CLACCEPT to the node. If the cluster leader node cannot accept another member, then it sends a reject message CLREJECT to the node. Additionally, if the node is rejected, it may then select the next best cluster leader node as its backup and repeat the process to join that cluster.

10 A node **11** following the above processes will ordinarily become a member of a cluster **12** soon after powering up. In some cases, such as network initiation, for example, it will find no acceptable cluster leader node **21-33** with which to complete the association. In this case the node **11**
15 may decide to contend to become a cluster leader node.

 If an ordinary node **103** decides to contend to become a cluster leader node, it may initiate the following procedures. The node **103** may broadcast a special type of CLNANN message to all nodes **11** in its k_N -hop neighborhood that
20 announces its bid to become a cluster leader node, which this includes the cluster leader metric calculated by the node. For reliability purposes, each node **11** in the k_N -hop neighborhood will preferably respond to the CLNANN message. Any node **11** that does not respond may be sent a follow-up
25 CLNANN message via unicast, for example, as will be understood by those of skill in the art.

 A node **11** responding positively to the CLNANN message returns a CLNANN message indicating agreement that the node **103** can become a cluster leader node. It does this either
30 because it is not in a position to become a cluster leader node itself or it has a larger cluster leader metric than that received in the original CLNANN message. A node **11** responding negatively to the CLNANN message returns a CLNANN message that announces that it has a better cluster leader metric than that

received in the original CLNANN message and that it will make a better cluster leader. In the event of a cluster leader metric tie, the cluster leadership role may be awarded to the node with the lowest node ID, for example, though other
5 tiebreakers may also be used.

If all CLNANN message responses are positive, or if there is contention but the node **103** wins the cluster leader node role, then the node assumes the cluster leader node role. It then begins the periodic broadcast of regular CLNANN
10 messages to be propagated for n_{CL} hops to reach all nodes **11** in adjacent clusters **12** and the adjacent cluster leader nodes. Other nodes **11** may now begin to consider if they should join this new cluster. Yet, if another node wins the indicating agreement node role, then the node **103** will consider if it
15 should join the cluster of this new cluster leader node.

Link/node failures and route recoveries will be discussed in further detail below, but a brief discussion is appropriate at this point in the context of clustering and cluster leader node designation. More specifically, when a
20 node **11** loses a link to a neighboring node, it may perform certain actions. That is, it may test its path to its cluster leader node to determine if it can remain in the same cluster. If it cannot find a node level route to the cluster leader node, it may then associate with another cluster leader node.
25 On the other hand, if the node **11** determines it still has a path to the cluster leader node, it may then reevaluate the cluster association metrics to this cluster leader node and to the cluster leader nodes for adjacent clusters.

If the cluster association metric has increased to a
30 value above another threshold T_L , i.e., $M_m^{CA} > T_L > T_J$, then it will preferably leave the cluster and possibly find an adjacent cluster for which its cluster association metric meets the criteria for joining, as previously described above. Also, the node **11** may find that it has a better cluster

association metric than an adjacent cluster leader node. If its current association is with cluster leader node m and its best adjacent cluster leader node is node k , then if node k has a cluster association metric that is better by a specified
5 threshold the node may associate with the adjacent cluster. That is, if $M_m^{CA} - M_k^{CA} > \Delta_{CL}$, then it switches from cluster m to cluster k . In several cases, a node may find that it should attempt to form a new cluster and contend for cluster leadership using the procedures defined above, as will be
10 appreciated by those of skill in the art.

With respect to node failure, either an ordinary node or a cluster leader node **21-33** may experience a failure or shut down. The failure of an ordinary node (i.e., a node other than a cluster leader node **21-33**) may equate to
15 potentially several link failures as detected by the neighbors of the node. These nodes may each respond to this failure as if it were a link failure and proceed according to the procedures defined above. Another type of failure that is potentially more disruptive is a failure of a cluster leader
20 node. This failure may be detected by neighboring nodes by the link loss, and by other nodes in the cluster by the loss of the periodic CLNANN message broadcasts. Nodes in the same cluster may select an adjacent cluster leader with which they can associate if the cluster association metric is good enough
25 using the procedures defined above, for example.

Alternatively, one or more nodes may contend to become a cluster leader node **21-23** using the cluster leader election procedures defined above.

In addition to the topology dynamics induced by the
30 node and link failures discussed above, link additions may also induce topology changes. Link and node failures tend to make nodes **11** become further away topologically. Conversely, link additions tend to make nodes **11** become closer together topologically, thereby improving the path metrics. Traffic

dynamics can have a similar effect. This can have the effect of making nodes in one cluster eventually have a better cluster association metric with an adjacent cluster. The node **11** can use the same procedures defined above to determine if it should switch its cluster association, as will be understood by those skilled in the art. If the current association of the node is with cluster leader node m and its best adjacent cluster leader node is node k , then if node k has a cluster association metric that is better by a specified threshold, the node may associate with the adjacent cluster. That is, if $M_m^{CA} - M_k^{CA} > \Delta_{CL}$, then it switches from cluster m to cluster k .

Further, two cluster leader nodes may become very close to each other, making elimination of one of the cluster leader nodes a desirable outcome. If the path metric between two cluster leader nodes becomes less than a specified threshold value Δ_p , and if one of them can support the total number of cluster members for both clusters, then the best cluster leader node may be determined and the other node may relinquish its cluster leader node role. As cluster leader nodes move closer together, the ordinary nodes may use the cluster association metrics to naturally migrate to the best choice for them as the cluster leader node. Thus, the decision of which of the two nodes should be the remaining cluster leader node will be based upon the number of cluster members for each node and its cluster leader metric. After one of the nodes relinquishes its cluster leader node role, the ordinary nodes associated with it may choose to associate either with the remaining cluster leader node or any of their other adjacent cluster leader nodes.

When a particular source node **14** in a source cluster (in the illustrated example of FIG. 1, the cluster **21**) needs to send data to a destination node **15** in a destination cluster (here, the cluster **32**), the source node may advantageously

send a cluster-level route request (CLRR) to its respective cluster leader node (here, the node **21**), at Block **43**. The source cluster **21** then begins the process of determining a cluster-level route between the source cluster **21** and a destination cluster **32** responsive to the cluster-level route request, at Block **44**. That is, the cluster level route is established in a reactive fashion, as opposed to the proactive approaches used for spine/cluster routing of the prior art.

A cluster-level route is a particular sequence of clusters **12** in a route from the source cluster to the destination cluster. Referring more particularly to FIG. 5, the determination of the cluster-level route will now be described in further detail. This process begins (Block **50**) with determining (or establishing) designated communication links **16** between the cluster leader nodes **21-33**, at Block **51**. The designated communication links **16** are illustratively shown as dotted lines in FIG. 1 and may be conceptually thought of as "virtual" links between the cluster leader nodes **21-33**. Each designated communication link may include a single-hop or multi-hop path that connects the cluster leader nodes **21-33** in adjacent clusters **12**. That is, each of the designated links may include one or more intermediate nodes **11** which are not cluster leader nodes **21-33**, or there may be no such intermediate nodes therebetween.

The determination of the designated links **16** may include sending a cluster leader node announce (CLNANN) message via limited broadcast by a cluster leader node to announce to all adjacent clusters that it is a cluster leader node for a designated cluster. As used herein, "adjacent clusters" are two clusters **12** for which at least one node **11** in one of the clusters is directly connected to at least one node in the other cluster.

Once a cluster leader node **21-33** knows that another cluster leader node is present in an adjacent cluster, it

obtains a node-level route to that cluster leader node (i.e., the designated communication link **16** between the cluster leader nodes). These two cluster leader nodes maintain the designated communication links **16** therebetween and a metric
5 associated therewith. This metric may include a number of hops in the designated communication link **16**, quality of service (QoS) parameters such as bandwidth, availability, etc., as will be appreciated by those of skill in the art. Such metrics may also preferably be used for the other
10 designated links **16** as well.

Each cluster leader node preferably stores the addresses of all of its adjacent cluster leader nodes and maintains designated communications links **16** to each of the adjacent cluster leader nodes. Once the designated
15 communications links are established, if the cluster-level route requested by the source node **14** is not to one of the clusters adjacent to the source cluster, then the source cluster leader node **21** may begin the cluster-level route discovery process.

20 The process is initiated by sending a cluster leader node route request (CLNRR) from the cluster leader node **21** of the source cluster to the remaining cluster leader nodes **22-31** via the designated communication links **16**, at Block **52**. More particularly, this may be done by sending the cluster leader
25 node route request from the source cluster leader node **21** to each of its adjacent cluster leader nodes, which are the cluster nodes **23, 25** in the example illustrated in FIG. 1. The cluster leader nodes **23, 25** then, in turn, forward the cluster leader node route request to each of its adjacent
30 cluster leader nodes, and so on, until the request has been received by all of the cluster leader nodes **21-33**.

It will be appreciated by those of skill in the art that above approach provides significant savings in overhead traffic since no global broadcast is used. That is, only a

subset of wireless links **13** are required for the broadcast. An expanding ring search can be used in this process in order to further limit the communications overhead transmissions required. Further, the cluster leader node route request can
5 be targeted to discover a route to a single cluster, to a list of clusters, or to all clusters. The cluster leader node route request may also include an accumulated metric that can indicate the desirability of each cluster-level route found. By way of example, the accumulated metric may be the
10 accumulation of link metrics for the designated communication links **16** between the cluster leader nodes **21-33** along the route to the targeted destination cluster **32**.

When a cluster leader node route request is received by the destination cluster leader node **32**, the destination
15 cluster leader node replies with a cluster leader node route reply (CLRREP), at Block **53**. This cluster leader node route reply is used by the destination cluster leader node **32** to return the cluster-level route to the source cluster leader node **21**. This message is returned via the delivery route
20 which the cluster leader node route request traveled, i.e., the designated communication links **16** connecting the source cluster leader node **21** and destination cluster leader node **32**.

The information in the cluster leader node route reply may include the sequence of clusters on the delivery
25 route, though other variations are possible, as will be discussed further below. In addition, a path metric (or components that can be combined to form a path metric) for the particular delivery route may be returned. Of course, it is possible that the destination cluster leader node **32** may
30 receive the same cluster leader node route request message from more than one of its adjacent cluster leader nodes (i.e., the cluster leader nodes **26, 31, and 33** in the example illustrated in FIG. 1). In such case, the destination cluster leader node **32** may also return cluster leader node route

replies for each of the delivery routes associated with each of these adjacent cluster leader nodes.

Once the source cluster leader node **21** collects all of the cluster leader node route replies corresponding to a given cluster leader node route request, it may then use the path metric of each delivery route to select the best route from among the delivery routes as the cluster-level route, at Block **54**. Of course, in some embodiments the destination node **15** could select the best delivery route from among those available and only return the cluster leader node route reply along the best path to thereby determine the cluster-level route.

In either event, once selected the best route may then be stored in a routing cache or table. By way of example, the path metric used to select the cluster-level route may be which delivery route includes the least number of cluster leader nodes (i.e., which one has includes the least number of cluster **12**). Of course, other metrics, such as the QoS metrics noted above, may also be used. One particularly advantageous approach to selecting routes using QoS parameters is described in U.S. Patent No. 6,954,435 entitled "DETERMINING QUALITY OF SERVICE (QoS) ROUTING FOR MOBILE AD HOC NETWORKS". Once the source cluster leader node **21** has determined the best cluster level route, it may then be forwarded to the requesting source node **14** in a cluster level route reply (CLRREP) message, at Block **57**.

Each of the cluster leader nodes **21-33** may periodically poll its adjacent cluster leader nodes to maintain current addresses therefore, at Block **55**, illustratively concluding the method (Block **56**). This may advantageously expedite the process of forwarding the cluster

level node route requests since adjacent cluster leader nodes will not have to be determined with each new request. While this polling step is illustratively shown as a final step (Block 55) in the cluster-level route discovery process
5 illustrated in FIG. 5, it will be understood that this step may be performed at any time after the designated communication links 16 between adjacent cluster leader nodes 21-33 are established and at any desired interval.

Once the cluster-level route is established,
10 data may be transferred from the source node 14 to the destination node 15 using the cluster-level route, at Block 45, thus ending the method illustrated in FIG. 4 (Block 46). The process of transferring the data using the cluster-level route will now be described with
15 reference to the schematic diagram of the ad-hoc network 10 illustrated in FIG. 2, in which the designated communication links 16 have been removed for clarity of illustration, and the flow diagram of FIG. 6. For this example, it will be assumed that the cluster-level route
20 selected by the source node 14 includes clusters 21 (source), 25, 24, 29, 26, and 32 (destination).

This process begins (Block 60) by designating a cluster target node 17 in a next cluster along the cluster-level route to which the data is to be sent, at
25 Block 61. While it is not necessary to use cluster target nodes for transferring data according to the present invention, the cluster target nodes provide a convenient point of entry into each cluster along the cluster-level route and thereby facilitate establishing node-level
30 routes therebetween, as will be described further below.

More particularly, the source node 14 will select a cluster target node 17a in the next adjacent cluster along the cluster-level route (here, the cluster 25). This may be done by broadcasting an adjacent cluster

target node discovery packet using an expanding ring search to identify potential cluster target nodes, for example. This broadcast may advantageously be limited to the next adjacent cluster (here, the cluster **25**). Thus, 5 the broadcast is of limited extent to reduce excess traffic in the ad-hoc network **10**.

Any node in the adjacent cluster **25** will send back an adjacent cluster target node discovery response packet that allows the source node **14** to collect the 10 identity of the potential cluster target node along with a metric and a route thereto. An algorithm may be used for selecting the best adjacent cluster target node in the adjacent cluster **25** based upon all of the adjacent cluster target node discovery responses received and based upon 15 the metrics included therewith. Here again, the path metrics used may include the least number of hops, QoS parameters, etc., as similarly discussed above with respect to selection of the cluster level-route.

The adjacent cluster target node **25** will 20 preferably be as close in distance to the source cluster **27**, and have as high a capacity, as is possible. Also, it should be noted that a cluster leader node of an adjacent cluster could also serve as a cluster target node as well, which may be particularly advantageous if the 25 cluster leader node has high link capacities.

Various approaches are possible for establishing the cluster target nodes. For example, a proactive approach may be adopted in which each node **11** in each cluster **12** may use the above procedure to designate a 30 cluster target node for each of the clusters adjacent to its own cluster. An adjacent cluster target node "hello" message may then be used to maintain node-level routes to such cluster target nodes. This message may be transmitted periodically to each adjacent cluster target

node to ensure that the route is still available. The cluster target node may then reply with the same packet type to indicate that the route is still valid. If the route fails, then the failure is detected by this process
5 and the node sending the adjacent cluster target node hello message may initiate a search for another adjacent cluster target node, as will be described further below.

Another approach that does not require the adjacent cluster target node hello message is to discover
10 adjacent cluster target nodes only on a reactive basis when required. Further, these adjacent cluster target nodes may be maintained only as long as they are used. Here again, this will result in less network traffic, which may be advantageous in certain applications, as will
15 be appreciated by those of skill in the art. In either case, by having each node independently select its adjacent cluster target nodes, there will likely not be one single cluster target node used for each cluster, which may reduce the concentration of transit traffic that
20 may otherwise occur through such a single cluster target node. Of course, a single cluster target node could be used in some embodiments, if desired, as will also be appreciated by those of skill in the art.

Once the next cluster target node is determined
25 (the node **17a** in the example illustrated in FIG. 2), a node-level route to the next cluster target node may then be determined, at Block **62**. This may be done by sending a node-level route request to the next cluster target node **17a** using a base routing protocol such as DSR or AODV, for
30 example. Specific embodiments of the present invention using these two protocols will be presented below.

Generally speaking, node-level route requests may be used to find routes to other nodes within the same cluster or to the cluster target nodes in adjacent

clusters by using a limited broadcast (or expanding ring search). It should be noted that the destination node **15** could be in the same cluster as the source node **14**. If this is the case, only a node-level route need be used, as
5 cluster-level routes are needed only to reach destination nodes outside the source node cluster. This case will also be discussed further below in conjunction with the discussion of DSR as the base routing protocol.

Once the node-level route to the next cluster
10 target node along the cluster-level route has been established, the data may then be transferred from the source node **14** to the next cluster target node **17a** via the node-level route, at Block **63**. Here again, this data transfer will be governed by the underlying base routing
15 protocol that is being used. Generally speaking, the data will be transmitted along with a mission data packet or header which includes information that is pertinent to the node-level transfer, the cluster level route, or both. The use of mission data packets will also be discussed
20 further below in the particular cases in which DSR and AODV are used as the based routing protocols.

The above described steps illustrated at Blocks **61-63** will then be repeated to determine each next cluster target node **17b, 17c, 17d, 17e**, along the cluster-level
25 route and the respective node-level routes therebetween until the data is transferred to the destination target node **17e**, at Block **64**. Once the data reaches the destination cluster target node **17e**, a node-level route from the destination cluster target node to the
30 destination node **15** may be determined (Block **65**), and the data transferred therebetween via this node-level route (Block **66**) as discussed above, thus ending the method, at Block **67**. Again, these steps may be performed according

to the base routing protocol, such as DSR or AODV, for example.

As may be seen in FIG. 2, the various node-level routes along the cluster-level route may or may not include cluster leader nodes. In some embodiments, it may be particularly advantageous to define the node-level routes to not include cluster leader nodes where possible, as this may help alleviate excessive traffic at the cluster leader nodes. The node-level route discovery process could thus include using a metric for each potential route that signifies whether the route will include a cluster leader node, and the node requesting the route may then use this metric in its selection process, for example, as will be appreciated by those of skill in the art.

The case in which DSR is to be used as the base routing protocol will now be described with reference to FIG. 7. The basic DSR protocol includes message types such as route requests and route replies, which may be used to perform the steps described with reference to Blocks 61 and 62 of FIG. 6, which are not reproduced in FIG. 7. It should be noted that the route discovery process for node-level routes in accordance with the invention is very similar to that of the conventional DSR approach. That is, a controlled broadcast search is used to search only in the current cluster or to search for routes to cluster target nodes (or cluster leader nodes) in the adjacent clusters, rather than over the entire network 10. The standard DSR packet type may be modified to accommodate a field for metric type and metric value if it is desired to use a path selection criteria other than minimum hop count, as discussed briefly above, which will be appreciated by those of skill in the art.

On the other hand, the cluster-level route discovery process according to the invention will vary somewhat from the

conventional DSR approach. Namely, this process will involve a limited global search. This is because of the existence of the designated communication links **16** (and corresponding node-level source routes) between all adjacent cluster leader nodes

5 **21-33**. In other words, the route discovery packets will traverse only the designated communication links **16** rather than all links **13** in the network **10**, as described above. The cluster leader node route request forwarded from one cluster leader node will preferably include the node-level source

10 route to the next cluster leader node to which it is forwarding the message. Again, the message is forwarded in this fashion to the cluster leader nodes in all adjacent clusters.

As noted above, data transfer according to a base

15 protocol usually requires that some form of mission data packet or header be generated to accompany the data. When using DSR in accordance with the invention, beginning at Block **70'** the mission data packet generated by the source node **14** (Block **71'**) will preferably include an address of the

20 destination node, an address of the next cluster target node **17a**, the node-level route, and the cluster-level route. The next cluster target and cluster-level routing fields may be defined as optional packet types for application to the present invention, as will be understood by those skilled in

25 the art.

This data is then transferred based upon the mission data packet along the node-level route to the next-cluster target node **17a**, at Block **63'**. The next cluster target node **17a'** will then repeat the steps illustrated at Blocks **61** and

30 **62** (FIG. 6) and then update the mission data packet accordingly. More particularly, the mission data packet is updated at each cluster target node **17a**, **17b**, **17c**, **17d** along the cluster-level route to include the new cluster target node and the new node-level route thereto.

This process continues until the destination cluster target node **17e** is reached (Block **64'**). The destination cluster node **17e** determines that the data has reached the destination cluster **32** by the cluster-level route in the mission data packet. Then, the node-level route to the destination node **15** is determined (Block **65'**). The mission data packet may then be updated to include null values for the cluster level route and the next cluster target node, since the route to the destination node **15** is an intracluster route. The data may then be transferred to the destination node **15**, as previously described above, at Block **66'**.

It was also noted above that the source node **14** and destination node **15** may, in some cases, be located in the same cluster. When this happens, the source node **14** may simply set the address of the cluster target node and the cluster-level route in the mission data packet to equal to a predetermined value. For example, this may be a null value as described above with respect to the destination cluster target node **17e**. The conventional DSR routing procedures may then be used to transfer the data.

Again, the source node **14** will also not need to request a cluster-level route in such cases if it already knows that the destination node **15** is in the same cluster. This may be the case if data has previously been sent thereto and a record thereof has been stored in a memory or cache of the source node **14**.

In this regard, the various routing information that has been determined in the above-described steps may advantageously be stored in one or more caches to be used for future routing operations, at Block **73'**, thus concluding the process (Block **74'**). As a result, if such routing information has not timed out or otherwise been discarded, it may be used again without completing all or parts of the cluster/node-level discovery processes.

By way of example, the following types of caches may be maintained. A cluster-level route cache caches the cluster-level route to any destination cluster for which routes are currently being maintained. This cache may be kept
5 at each of the cluster leader nodes **21-33**, for example, and indexed by the destination cluster to provide known cluster-level source routes upon request.

Another cache may include a node-level route cache which caches the node-level route to any node in the same
10 cluster or in adjacent clusters (such as the cluster target nodes **17**) for which routes are currently being maintained. This cache may be kept at each individual node **11** and indexed by destination node address, and it provides each node **11** with a known node-level source route when available.

Moreover, a hierarchical route cache, which may be kept at each node **11**, caches the hierarchical route to any destination node for which routes are currently being maintained. This cache may also be indexed by the destination node address, and the cache returns the hierarchical route
15 which includes the cluster-level source route to the destination cluster and the node-level source route to the cluster target node (the node **17a** in the illustrated example) in the first cluster on the source route.
20

Additional types of caches which may prove useful
25 include a cluster cache which is a table that is indexed by the destination node address and which returns the address of the cluster in which the node currently is a member, as well as an adjacent cluster target node cache. This cache includes the adjacent cluster target node for each adjacent cluster.
30 This cache may be indexed by the adjacent cluster address and returns the adjacent cluster node address for that cluster.

Given the dynamic nature of ad-hoc networks, various types of addresses may be used for the individual nodes and clusters. Depending upon the particular type of addressing

used in a particular application, various other modifications may be necessary for a given base protocol. For example, if fixed addresses are used, then a protocol may be included for distributing current cluster membership as the nodes change
5 clusters, as will be appreciated by those of skill in the art. If such a protocol is not used, then cluster membership can be determined in a reactive manner using the CLNRR route discovery process, for example. On the other hand, if addresses are dynamically assigned based upon the particular
10 cluster, hierarchical level (discussed further below), etc., at which the node is located, then a dynamic name server may optionally be included for allowing a source node to determine the current address for a fixed node name, as will also be appreciated by those skilled in the art.

15 Turning now to the alternate embodiment in which AODV is used as the base routing protocol, this approach will be described with reference to the flow diagram of FIG. 8. According to the AODV protocol, node-level routes are established using route requests and route replies, as
20 is the case with DSR described above. Yet, the manner in which node level routes, and correspondingly cluster-level routes, are determined is somewhat different than in DSR.

More particularly, beginning at Block **81** in FIG. 8, a cluster leader node route request is sent using
25 conventional AODV mechanisms known to those skilled in the art via the designated communication links **16**. Generally speaking, according to the AODV protocol, when a route request is sent each node **11** along a route stores the address of the prior node from which it received the route
30 request, which is then forwarded along to the next node. In this way, if a route reply is ultimately returned along this route, then the address stored in each node **11** provides the location of the next hop along the return route. Further, as the route reply is forwarded from one

node **11** to the next along the return route, each node then stores the address of the node which forwarded the route reply to it. These addresses then provide the location of the next hop along the route when the data is transmitted
5 along the route.

According to the present invention, the above described process takes place at the cluster level to determine the cluster-level route, at Blocks **81-82**, using the above referenced cluster leader node route requests
10 and cluster leader node route replies. Moreover, this process is similarly implemented at the node level to determine the node-level routes along the cluster-level route, at Blocks **83-84**, using the node-level route requests and node-level route replies described above.
15 Here again, cluster target nodes may be used as described above, if desired, and the cluster target nodes may be determined as previously described above but with the standard mechanisms of AODV, as will be appreciated by those of skill in the art.

20 A mission data packet may be generated at the beginning of each node-level route (i.e., either by the source node **14** or a cluster target node **17**) and the data may then be transferred along the various node-level routes thus defined based upon the mission data packets,
25 at Block **85**. In accordance with the AODV protocol, the mission data packet typically requires only the address of the destination node **15**, as the hops of the node-level route are already stored in the various nodes **11** on the route.

30 Since the mission data packet may not include the location of the next cluster along the cluster level route, each cluster target node **17** may poll its respective cluster leader node for the next cluster address. The cluster leader node may then determine the next cluster

target node based upon the next cluster address. Of course, other approaches may be used in which optional data packets are defined for inclusion in the mission data packet so that the cluster leader nodes need not be
5 polled, as will be understood by those of skill in the art.

The data is transferred along the various node-level routes until reaching the destination cluster target node **17e**, at Block **86**. The node-level route to the
10 destination node **15** may then be defined, again using standard AODV techniques, and the data transferred thereto, at Block **87**, thus concluding the process (Block **88**).

Various tables may be used for storing the
15 requisite routing information for implementing AODV in accordance with the present invention. In particular, a cluster-level route table, which may be indexed by the destination cluster address, returns the next adjacent cluster on the path to any destination cluster for which
20 routes are being maintained. Further, a node-level route table, which again may be indexed by the destination node address, returns the address of the next node **11** on the path to any node in the same cluster or in adjacent clusters (such as the cluster target nodes **17**) for which
25 routes are being maintained.

Moreover, a cluster cache, which may be indexed by the destination node address, returns the address of the cluster in which the destination node is currently a member. An adjacent cluster target node cache, which may be indexed by
30 the adjacent cluster address, returns the adjacent cluster target node address for adjacent clusters. In addition, a hierarchical route table, which may be indexed by the destination node address, returns the address of the next node on the path to any destination node in the entire network for

on the path to any destination node in the entire network for which routes are being maintained.

As similarly described above, the data maintained in the above tables may be stored each time new cluster-level or node-level information is gathered. Thus, this information will be available for future routes, which helps alleviate traffic as discovery request and reply messages may be avoided. Of course, this information may also be discarded after a period of time, for example, to reduce the storage of outdated information.

Due to the dynamic nature of wireless mobile ad-hoc networks, a common problem which must be addressed is that of route failure due to nodes logging off of the network, breaks in the wireless communication links, etc. Base routing protocols typically include mechanisms for addressing route recognition and repair. Route repair in the context of the present invention, with particular emphasis on route repair using the DSR and AODV protocols, will now be described further with respect to the flow diagram of FIG. 9. For the purposes of FIG. 9, it will be assumed that the cluster-level and node-level route designation processes (FIGS. 5 and 6) have previously been performed.

As such, beginning at Block 90, if a cluster-level route failure occurs between adjacent clusters along the cluster-level route, at Block 91, a cluster-level route error message is sent (Block 92) to the source node, which will then begin the cluster-level and node-level route discovery processes over again, as previously described above. The form that this particular route request takes will depend upon the base routing protocol being used.

For example, if the base protocol being used is AODV, it will be recalled that each of the cluster leader nodes stores the address of each "downstream" cluster

leader node along the cluster-level route to the destination cluster leader node **32**. As such, as the cluster-level route error message traverses the cluster-level route back "upstream" to the cluster-level route, each of the cluster leader nodes receiving the error message may delete the next hop address from its respective cache, at Block **93**, since the cluster-level route is no longer valid.

For the case in which DSR is used as the base protocol, the cluster-level route error message may be broadcast from the cluster leader node discovering the loss of connection to all other nodes within its cluster as well as the cluster leader nodes in all adjacent clusters. This broadcast will reach all nodes that have been selected as adjacent cluster target nodes **17** by nodes in other clusters as well as all other nodes within the cluster. Any adjacent cluster target node **17** that receives a packet to forward through the cluster that is no longer adjacent will now forward a cluster-level route error message to the original sender of the data packet notifying it that the route has failed at the cluster level. The cluster-level route error message broadcast to the cluster leader nodes in all adjacent clusters may also be broadcast to all cluster leader nodes in the network **10**, if desired, thereby informing them that cluster-level routes may be outdated. This prompts all of the cluster leader nodes to initiate a new round of route discovery queries upon receiving new cluster-level route requests, rather than simply relying of information previously stored in their respective caches.

On the other hand, if a node-level route failure occurs between adjacent nodes in a node-level route, at Block **94**, then a new node-level route may be determined in accordance with the base protocol being used, at Block **95**, thus concluding the process (Block **96**). More

particularly, for a node-level route used to a destination node **15** or to adjacent cluster target nodes **17**, the basic procedures established for the base routing protocol using a route error message will accommodate notification of the appropriate nodes of the path failure, as will be appreciated by those of skill in the art.

The above-described method of the present invention may also advantageously be extended to an arbitrary number of hierarchical levels, as illustrated in FIG. 3. In FIG. 3, the exemplary ad-hoc network **10** illustrated in FIGS. 1 and 2 has been extended to four levels of hierarchy. The first level of the hierarchy is the network node level (i.e., the nodes **11**) from the previous example. The second level is made up of the hierarchy includes the clusters **12**.

The third level **17** of the hierarchy is constructed from virtual nodes and virtual links. Each virtual node at the third level represents an entire cluster **12** at the second level. Closely connected virtual nodes at the third level **17** are grouped into third level clusters, and one of these virtual nodes is selected as the third level virtual cluster leader node. The physical node selected as the third level **17** cluster leader node may be the actual cluster leader node from the second level cluster, which would then perform the cluster leader node functions for both the second and third level clusters.

The third level **17** virtual links illustratively shown with dashed lines in FIG. 10 are the multi-hop virtual links between the cluster leader nodes in adjacent clusters shown at the second level. Virtual links between third level **17** cluster leader nodes may also be established, as also illustratively shown with dashed lines. This hierarchical organizational process can be

continued to any number of levels, as will be appreciated by those skilled in the art.

5 A fourth level **18** cluster is also illustratively shown in FIG. 3, in which each third level **17** cluster becomes a virtual node in the fourth level. The virtual links shown at the fourth level **18** are the third level **17** cluster leader node virtual links. The physical node selected as the fourth level **18** cluster leader node may be the actual cluster leader node from the third level **17** cluster, which would perform the
10 cluster leader node functions for the second, third, and fourth level clusters. If the network were larger, the hierarchical organization could be extended to even more clusters, as will be appreciated by those of skill in the art.

Several of the above-described messages may be
15 augmented to handle an arbitrary number of hierarchical levels. For example, the cluster leader node route request message type may be of a different type for each hierarchical cluster level. This message is broadcast to all destination cluster leader nodes, but it is sent over the virtual links
20 connecting all cluster leader nodes at the appropriate hierarchical level, which involves only uni-casts over the virtual links connecting adjacent cluster leader nodes. Moreover, the cluster leader node route reply message, like the cluster leader node route request, will similarly have
25 different types for each hierarchical cluster level, as will be appreciated by those of skill in the art.

Furthermore, the cluster-level route request may have a different type for each hierarchical cluster level. More particularly, at a specific level the message is sent to
30 the ALN for that level. Additionally, with respect to the cluster-level route reply, the source node can obtain the cluster-level route (for the specific hierarchical level of the request) to the destination with a transaction that is sent over a short distance to its cluster leader node.

As may be seen in FIG. 3, the fourth level **18** includes a single cluster which may advantageously provide a convenient reference for determining a high-level route from the cluster leader node **21** of the source cluster to the cluster leader node **32** of the destination cluster. More particularly, since this single cluster includes the source and destination leader node clusters **21**, **32**, the high-level route may be determined therebetween using the various steps outlined above. The high-level route may, in turn, be used to determine the cluster-level route for the second hierarchical level. That is, the cluster-level route may include at least the clusters having respective cluster leader nodes along the high-level route, here the cluster leader nodes **21**, **24**, and **32**.

15

THAT WHICH IS CLAIMED IS:

1. A method for sending data in a wireless ad-hoc network comprising a plurality of nodes grouped into
5 clusters of nodes and a plurality of wireless links connecting the plurality of nodes, each cluster having a designated cluster leader node, the method comprising:

10 sending a cluster-level route request from a source node of a source cluster to a cluster leader node of the source cluster;

determining a cluster-level route between the source cluster and a destination cluster comprising a destination node responsive to the cluster-level route request and using a plurality of the cluster leader nodes;

15 at the source node, designating at least one cluster target node in a cluster along the cluster-level route;

determining a first node-level route from the source node to the at least one cluster target node;

20 generating a mission data packet at the source node comprising an address of the destination node, an address of the at least one cluster target node, the first node-level route, and the cluster-level route; and

25 determining a second node-level route from at least one cluster target node to the destination node based upon the mission data packet, and transferring data from the source node to the destination node via the first and second node-level routes based upon the mission data packet.

2. The method of Claim 1 wherein the at least one
30 cluster target node comprises a respective cluster target node for each cluster along the cluster-level route; wherein determining the first node-level route comprises determining a node-level route from the source node to a cluster target node for a next adjacent cluster along the cluster-level route; and
35 wherein determining the second node-level route comprises

determining a node-level route between each successive cluster target node along the cluster-level route.

3. The method of Claim 2 wherein generating the mission data packet further comprises updating the mission data packet at each cluster target node along the cluster-level route to comprise an address of the next cluster target node and the node-level route thereto.

10 4. The method of Claim 1 wherein the address of the at least one cluster target node and the cluster-level route are equal to a predetermined value if the source cluster and the destination cluster are the same cluster.

15 5. The method of Claim 1 further comprising storing, at the source node, a hierarchical source route to the destination node comprising the cluster-level route, the address of the at least one cluster target node, and the first node-level route.

20 6. The method of Claim 1 further comprising grouping a plurality of the cluster leader nodes comprising at least the source cluster leader node and the destination cluster leader node into a leader node cluster, and
25 determining a high-level route from the source cluster leader node to the destination cluster leader node within the leader node cluster; and wherein the cluster-level route comprises at least the clusters having respective cluster leader nodes along the high-level route.

30 7. The method of Claim 1 wherein determining the cluster-level route comprises:

determining designated communication links between the cluster leader nodes;

35 sending a cluster leader node route request from the

cluster leader node of the source cluster to the remaining cluster leaders via the designated communication links; and

returning a cluster leader node route reply from the cluster leader node of the destination cluster to the cluster leader node of the source cluster along a delivery route of
5 the cluster leader node route request.

8. The method of Claim 7 further comprising determining the delivery route based upon at least one of
10 delay, link capacity, and availability.

9. A wireless ad-hoc network comprising:
a plurality of nodes grouped into clusters of nodes, each cluster node having a designated cluster leader node; and
15 a plurality of wireless links connecting said plurality of nodes;

said plurality of nodes sending data therebetween by sending a cluster-level route request from a source node of a source cluster to a cluster leader node of said source cluster;
20

determining a cluster-level route between said source cluster and a destination cluster comprising a destination node responsive to the cluster-level route request and using a plurality of said cluster leader nodes;
25

at the source node, designating at least one cluster target node in a cluster along the cluster-level route;

determining a first node-level route from said source node to said at least one cluster target node;
30

generating a mission data packet at said source node comprising an address of said destination node, an address of said at least one cluster target node, the first node-level route, and
35

the cluster-level route; and

5 determining a second node-level route from
said at least one cluster target node to said
destination node based upon the mission data packet,
and transferring data from said source node to said
destination node via the first and second node-level
routes based upon the mission data packet.

10 10. The wireless ad-hoc network of Claim 9 wherein
said at least one cluster target node comprises a respective
cluster target node for each cluster along the cluster-level
route; and wherein the first node-level route comprises a
node-level route from the source node to a cluster target node
for a next adjacent cluster along the cluster-level route; and
15 wherein the second node-level route comprises a node-level
route between each successive cluster target node along the
cluster-level route.

20 11. The wireless ad-hoc network of Claim 9 wherein
the address of the destination node is stored along with an
address of the respective cluster leader node therefor at the
cluster leader node for the source cluster.

25 12. The wireless ad-hoc network of Claim 9 wherein,
at the source node, a hierarchical source route to the
destination node is stored comprising the cluster-level route,
the address of the at least one cluster target node, and the
first node-level route.

30 13. The wireless ad-hoc network of Claim 9 further
comprising designated communication links connecting the
cluster leader nodes; and wherein the cluster level route is
determined by sending a cluster leader node route request from
said cluster leader node of said source cluster to said
35 remaining cluster leaders via said designated communication

links, and returning a cluster leader node route reply from said cluster leader node of said destination cluster to said cluster leader node of said source cluster along a delivery route of the cluster leader node route request.

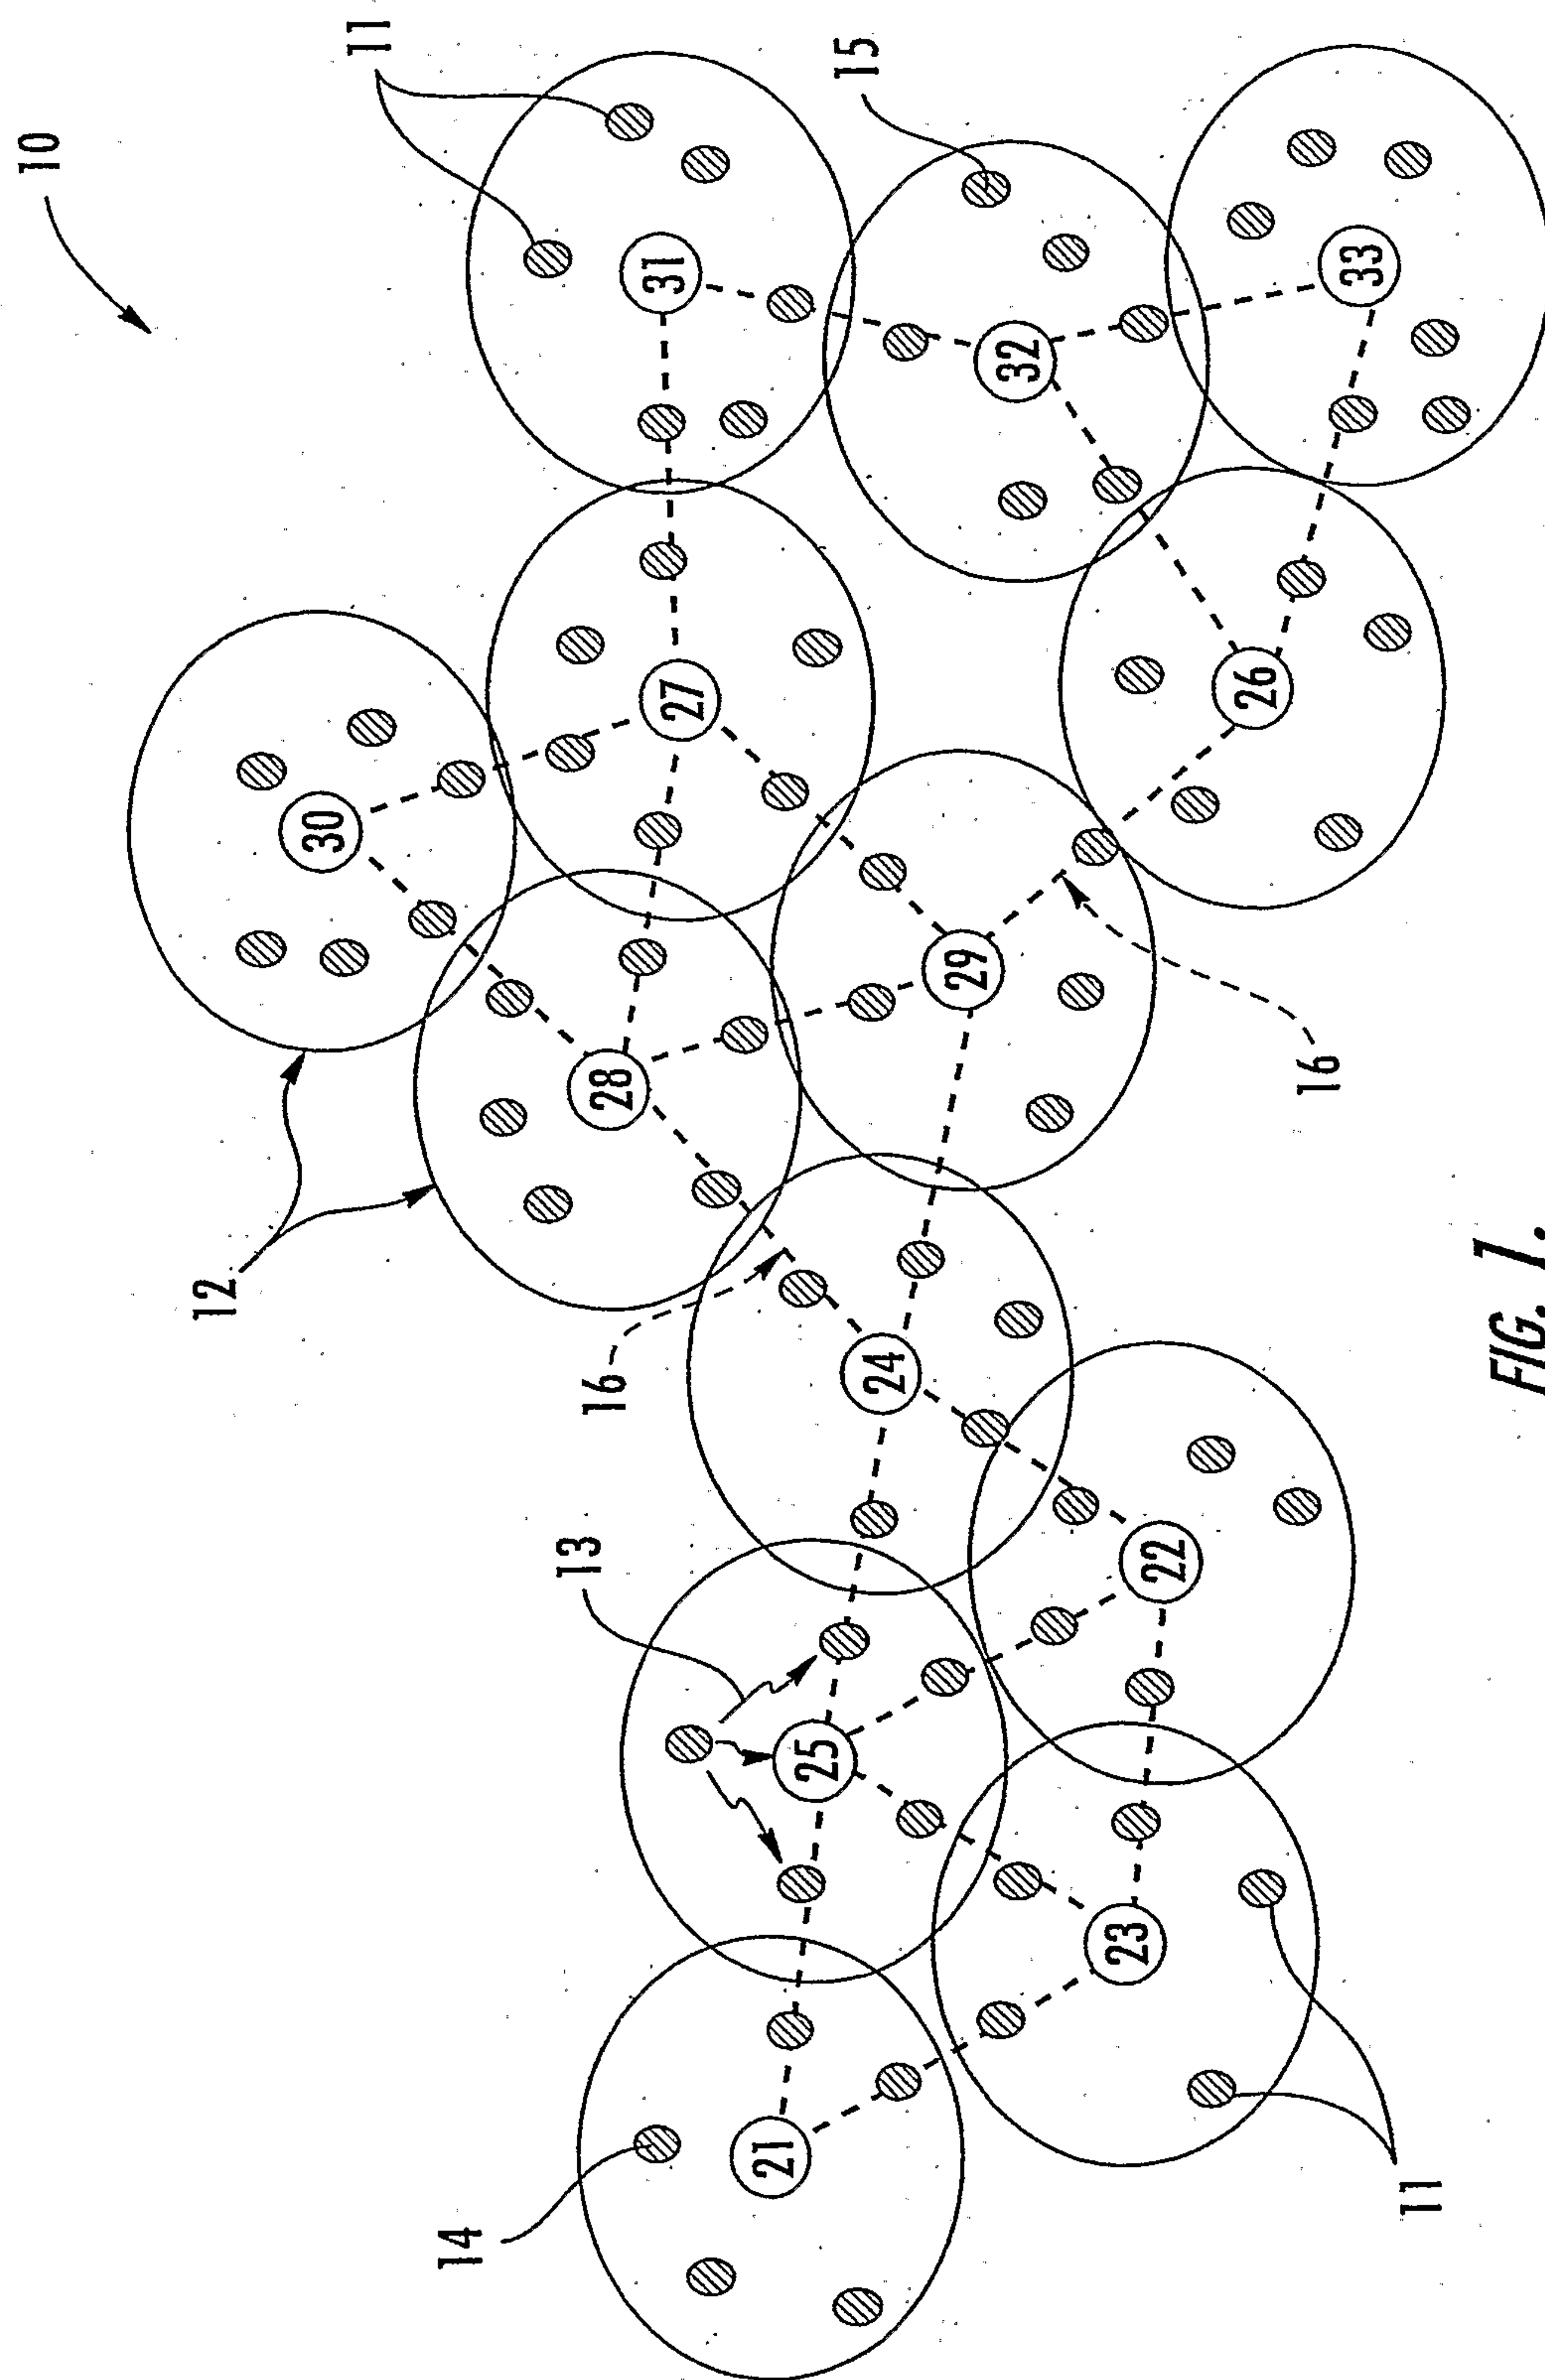


FIG. 1.

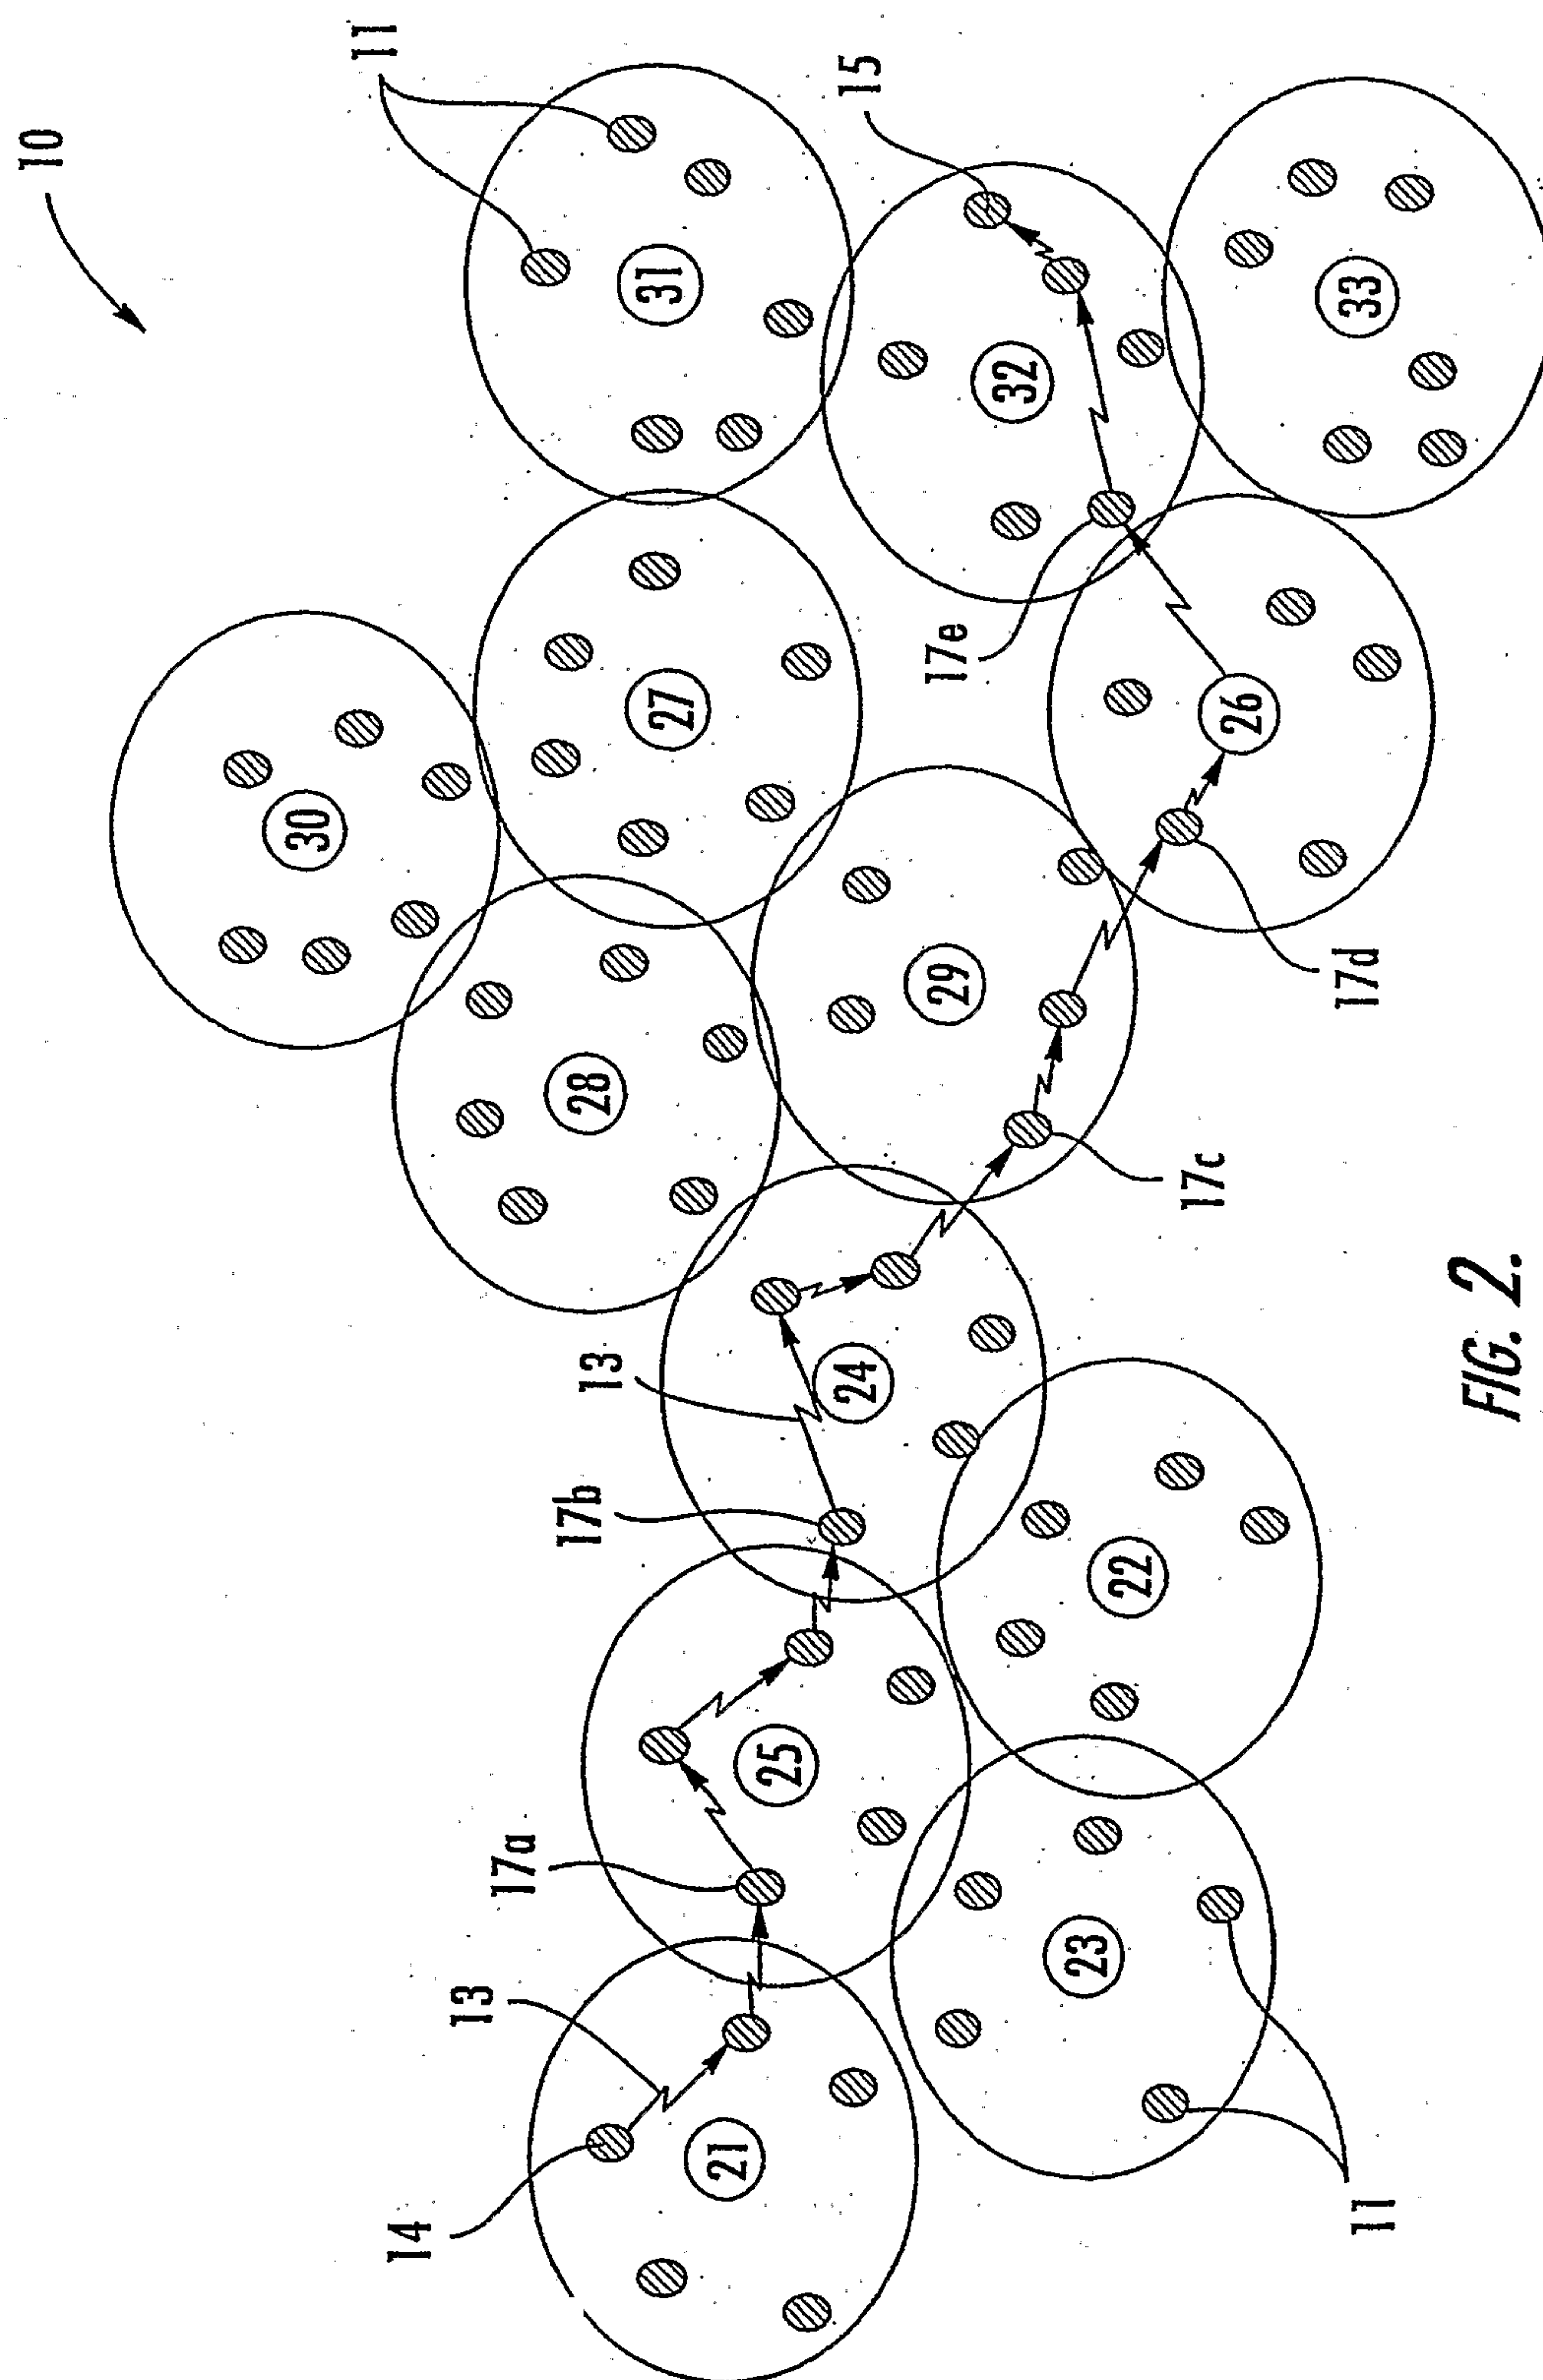
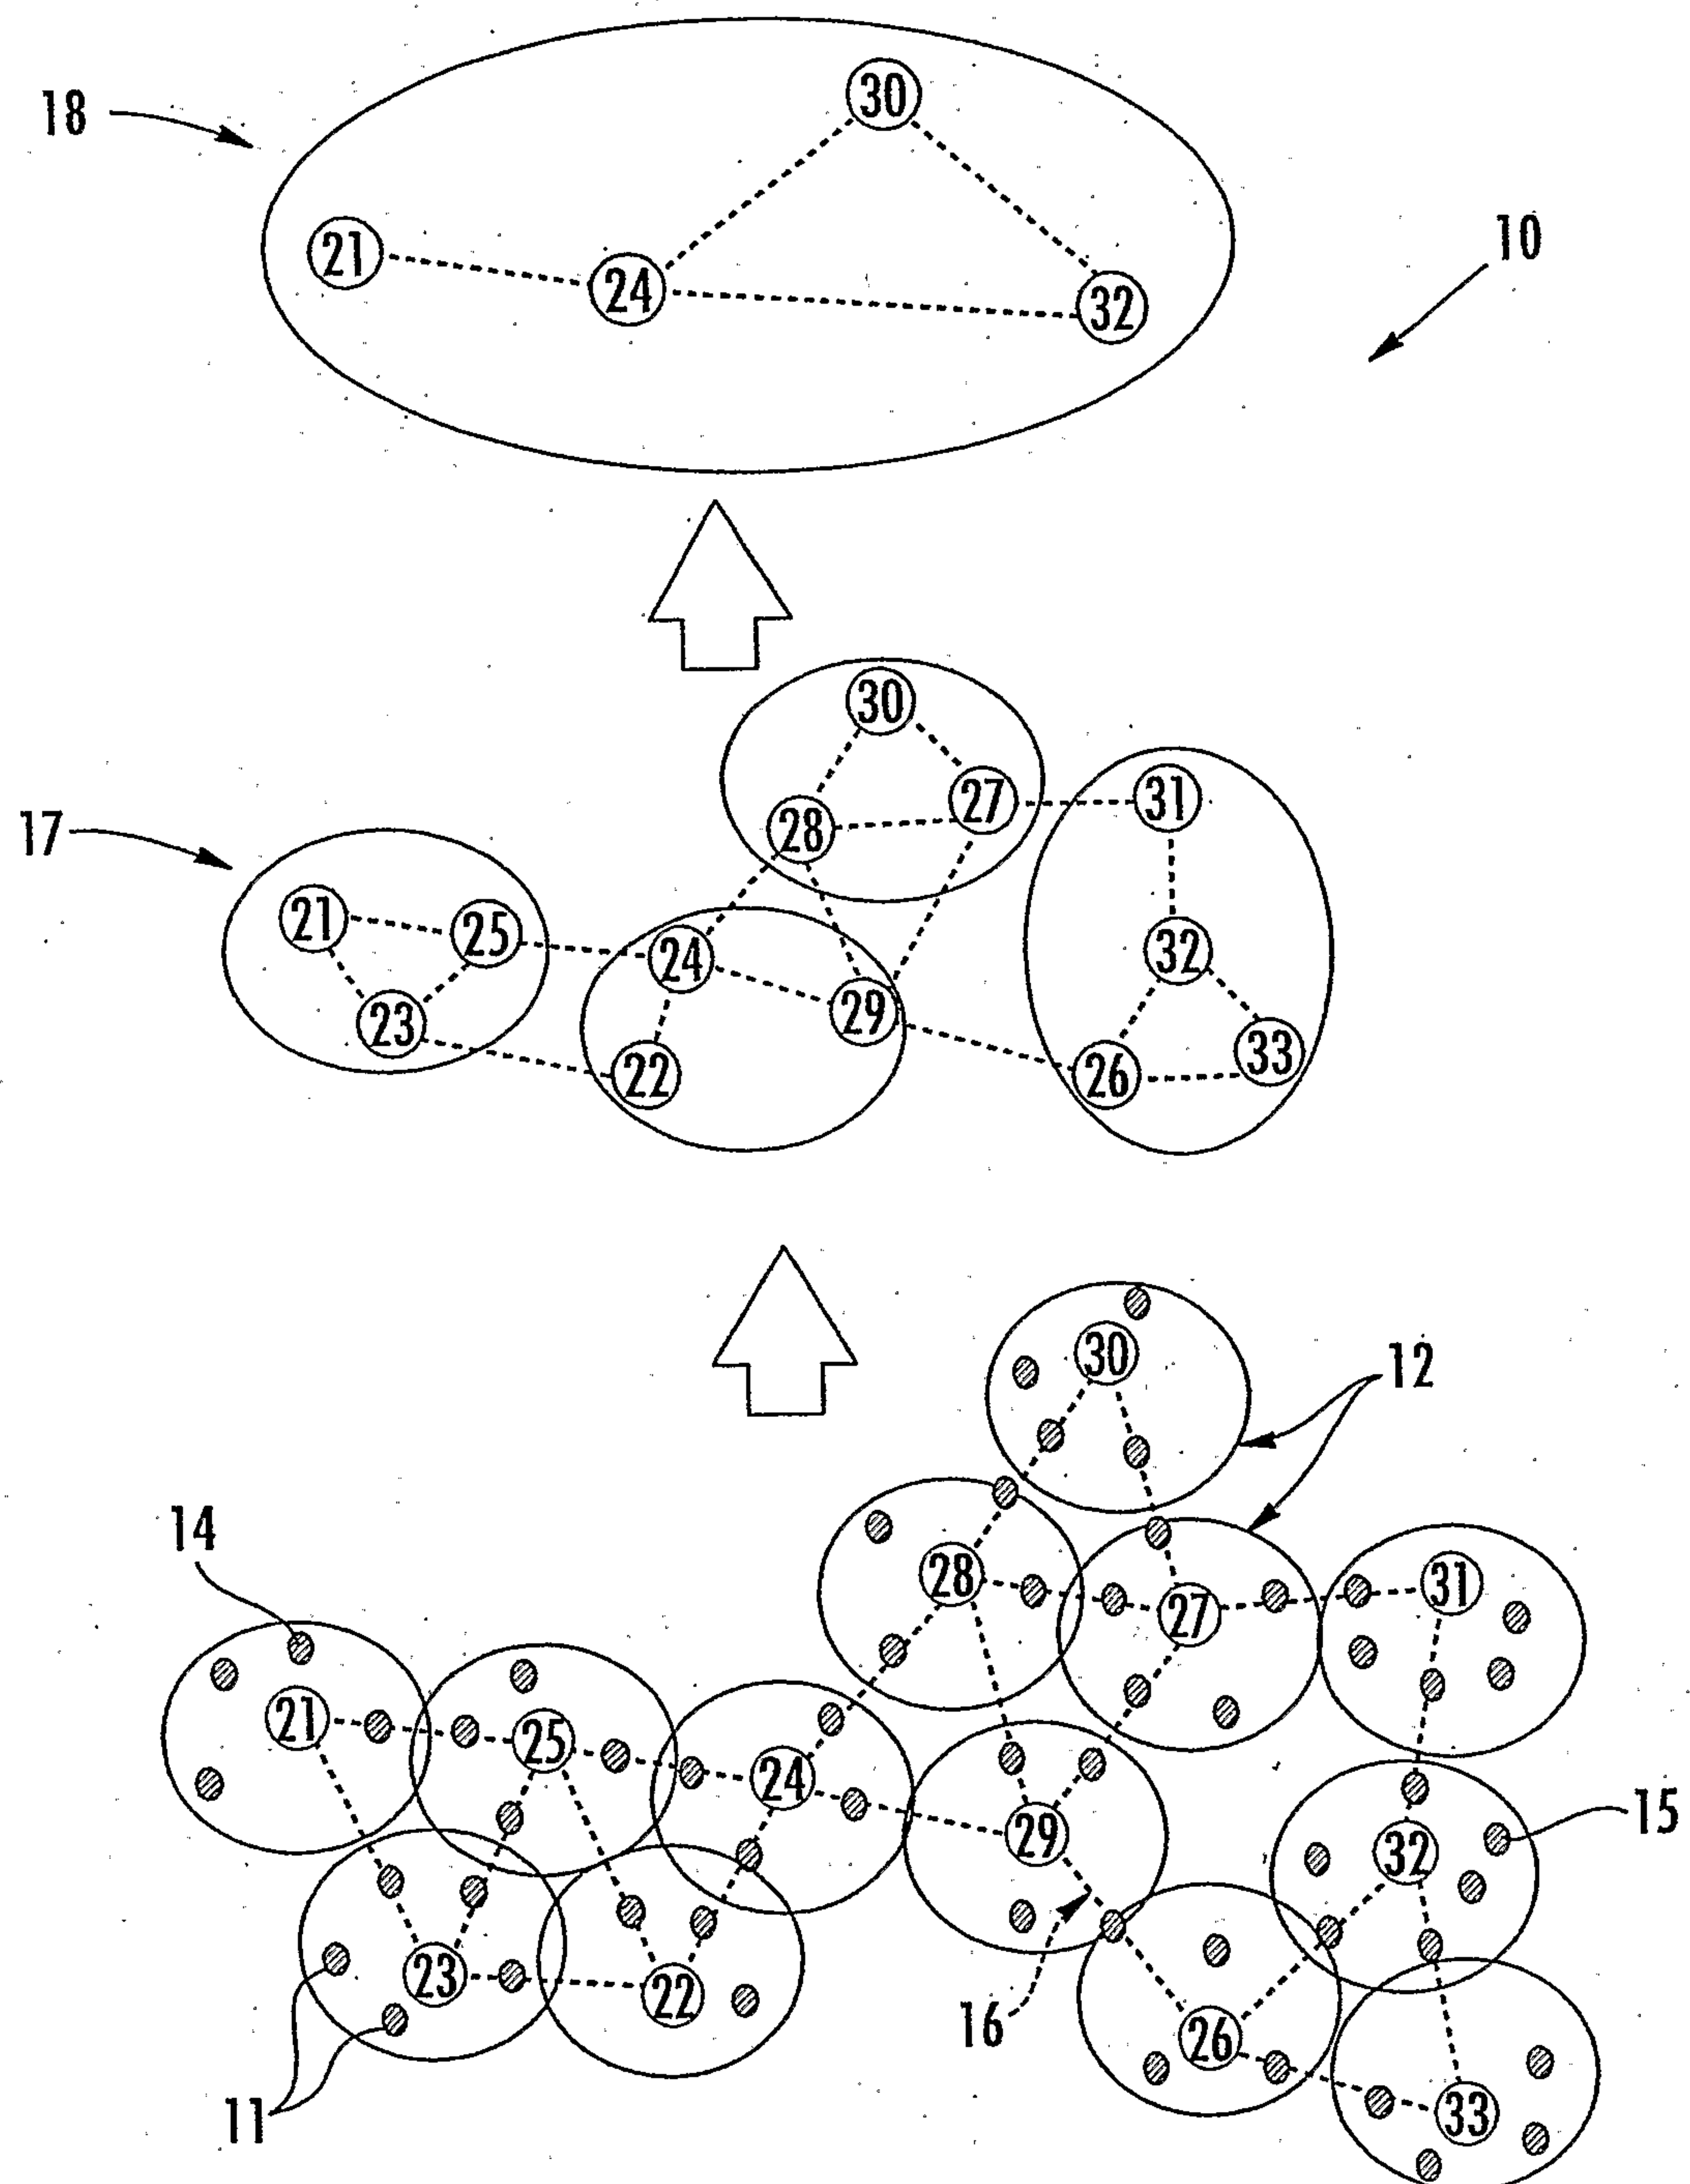
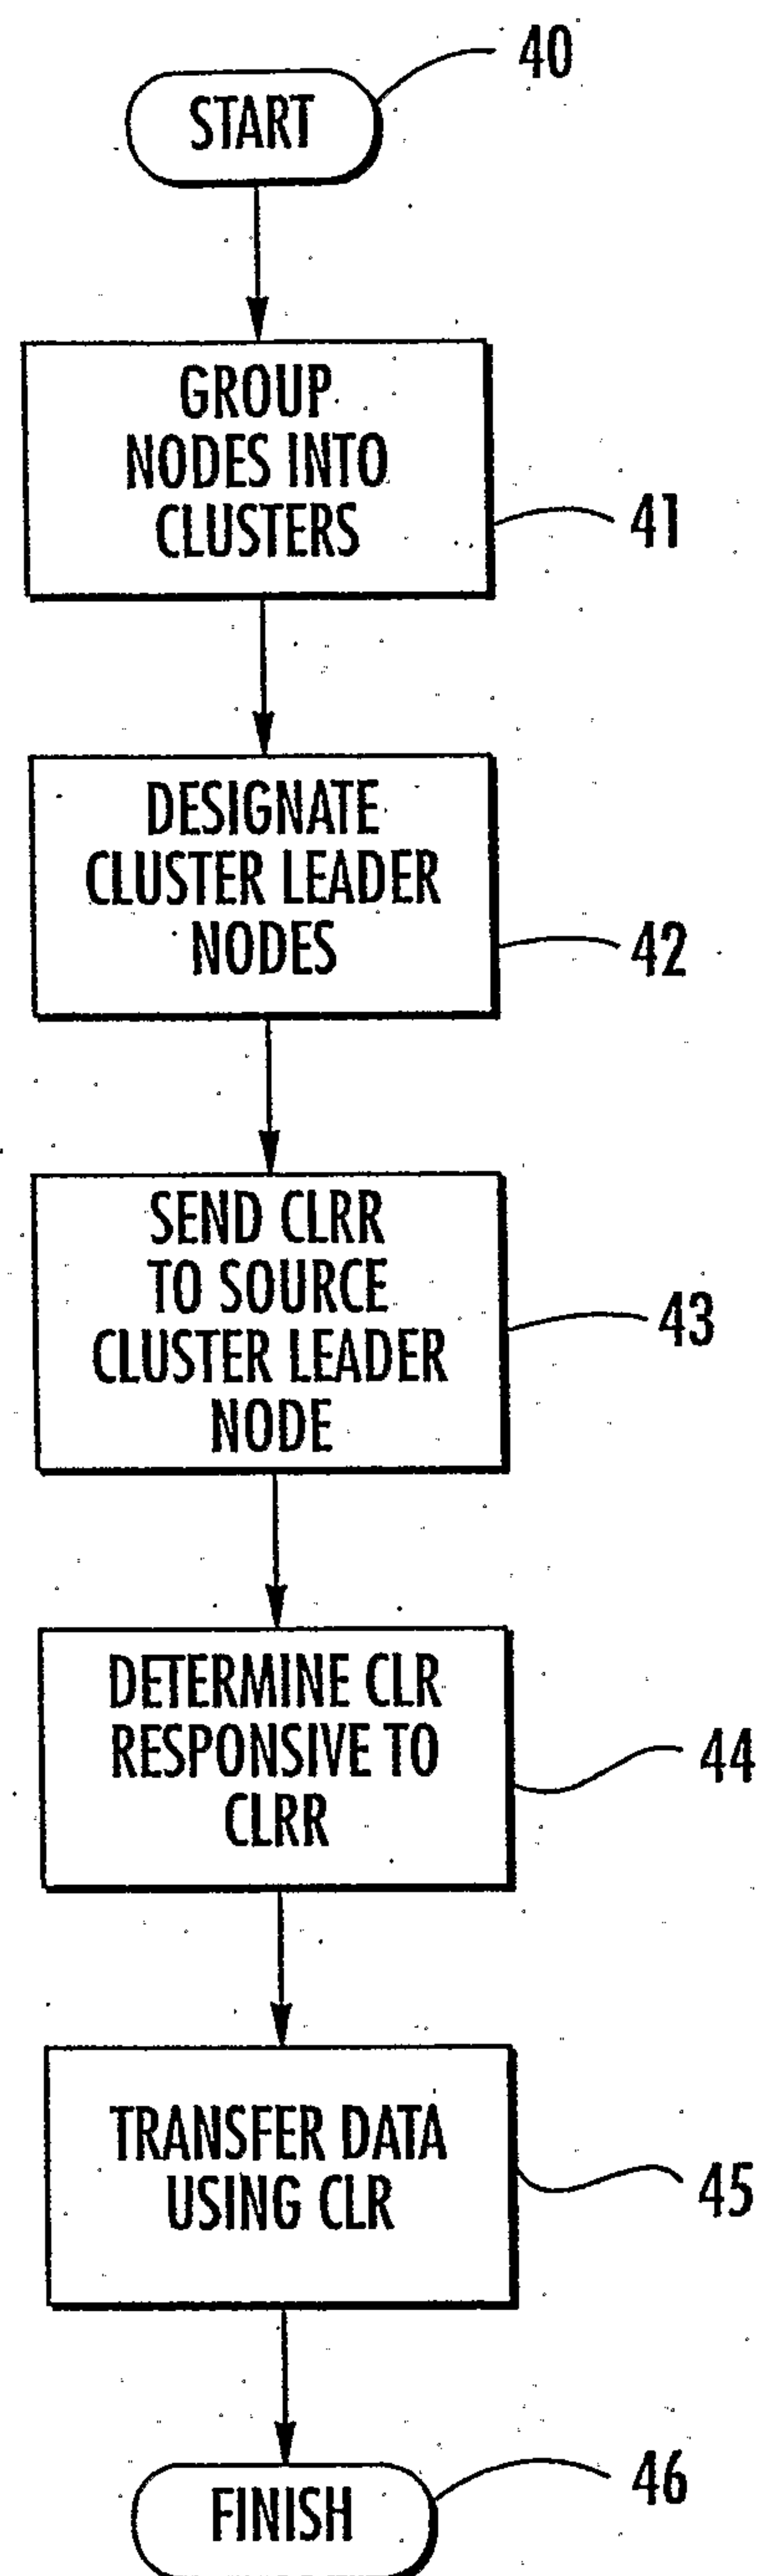


FIG. 2.

**FIG. 3.**

*FIG. 4.*

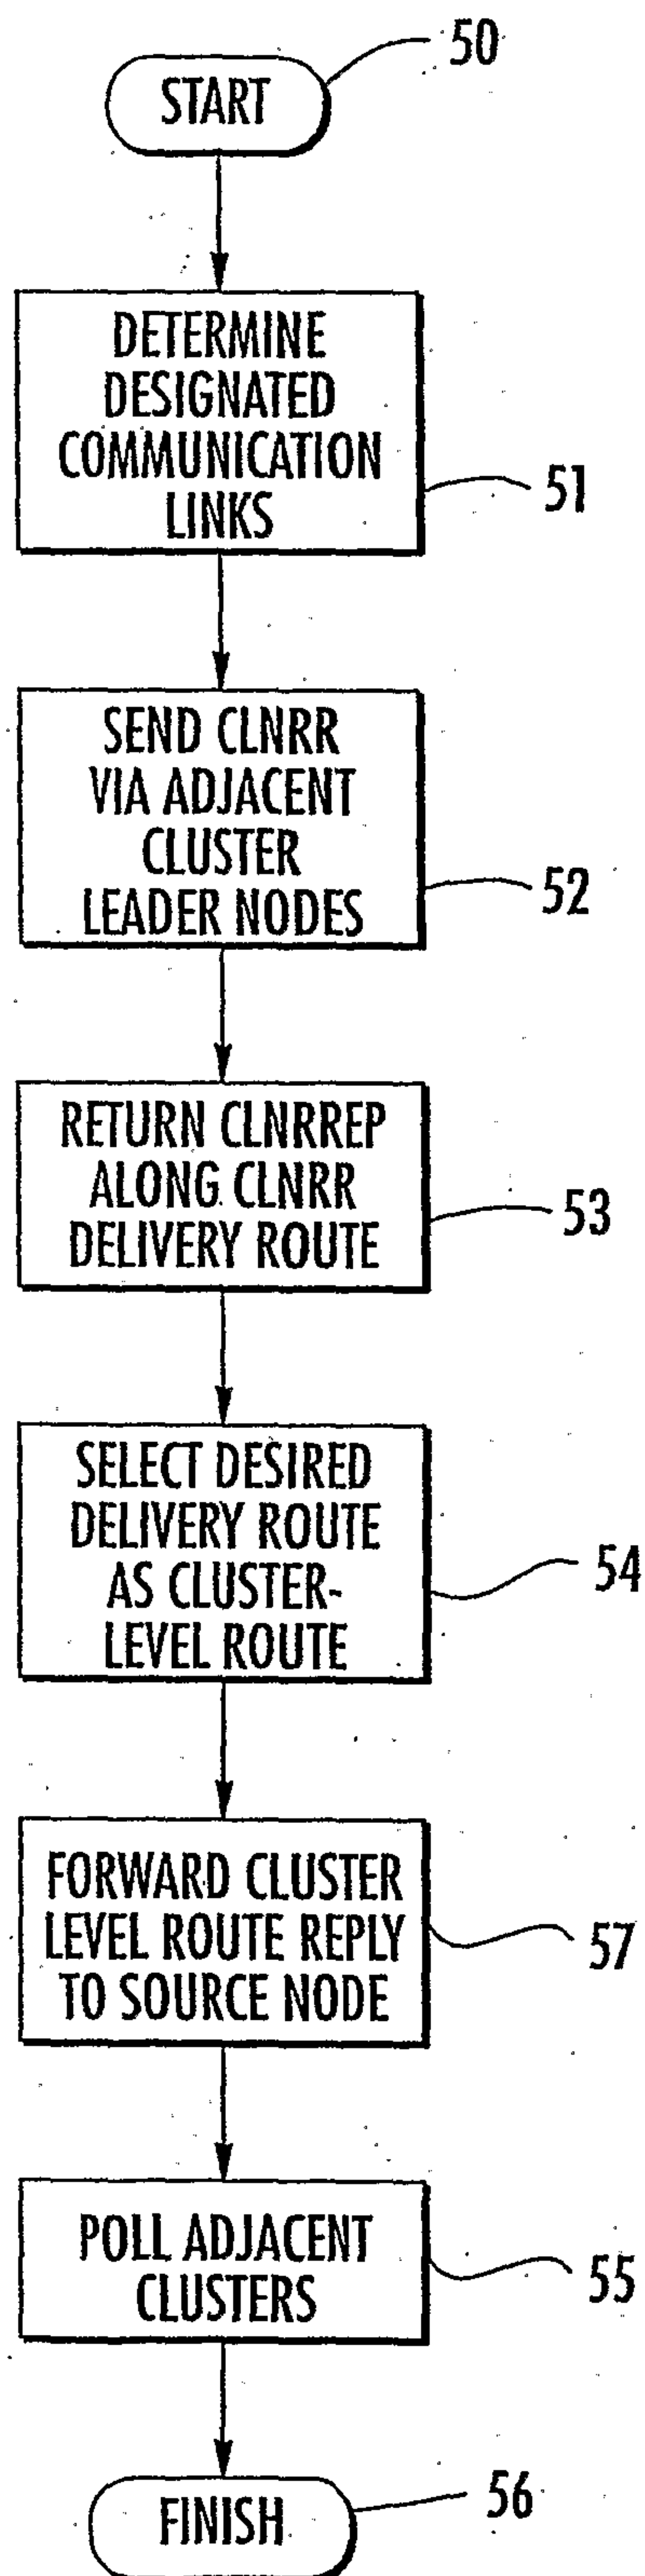


FIG. 5.

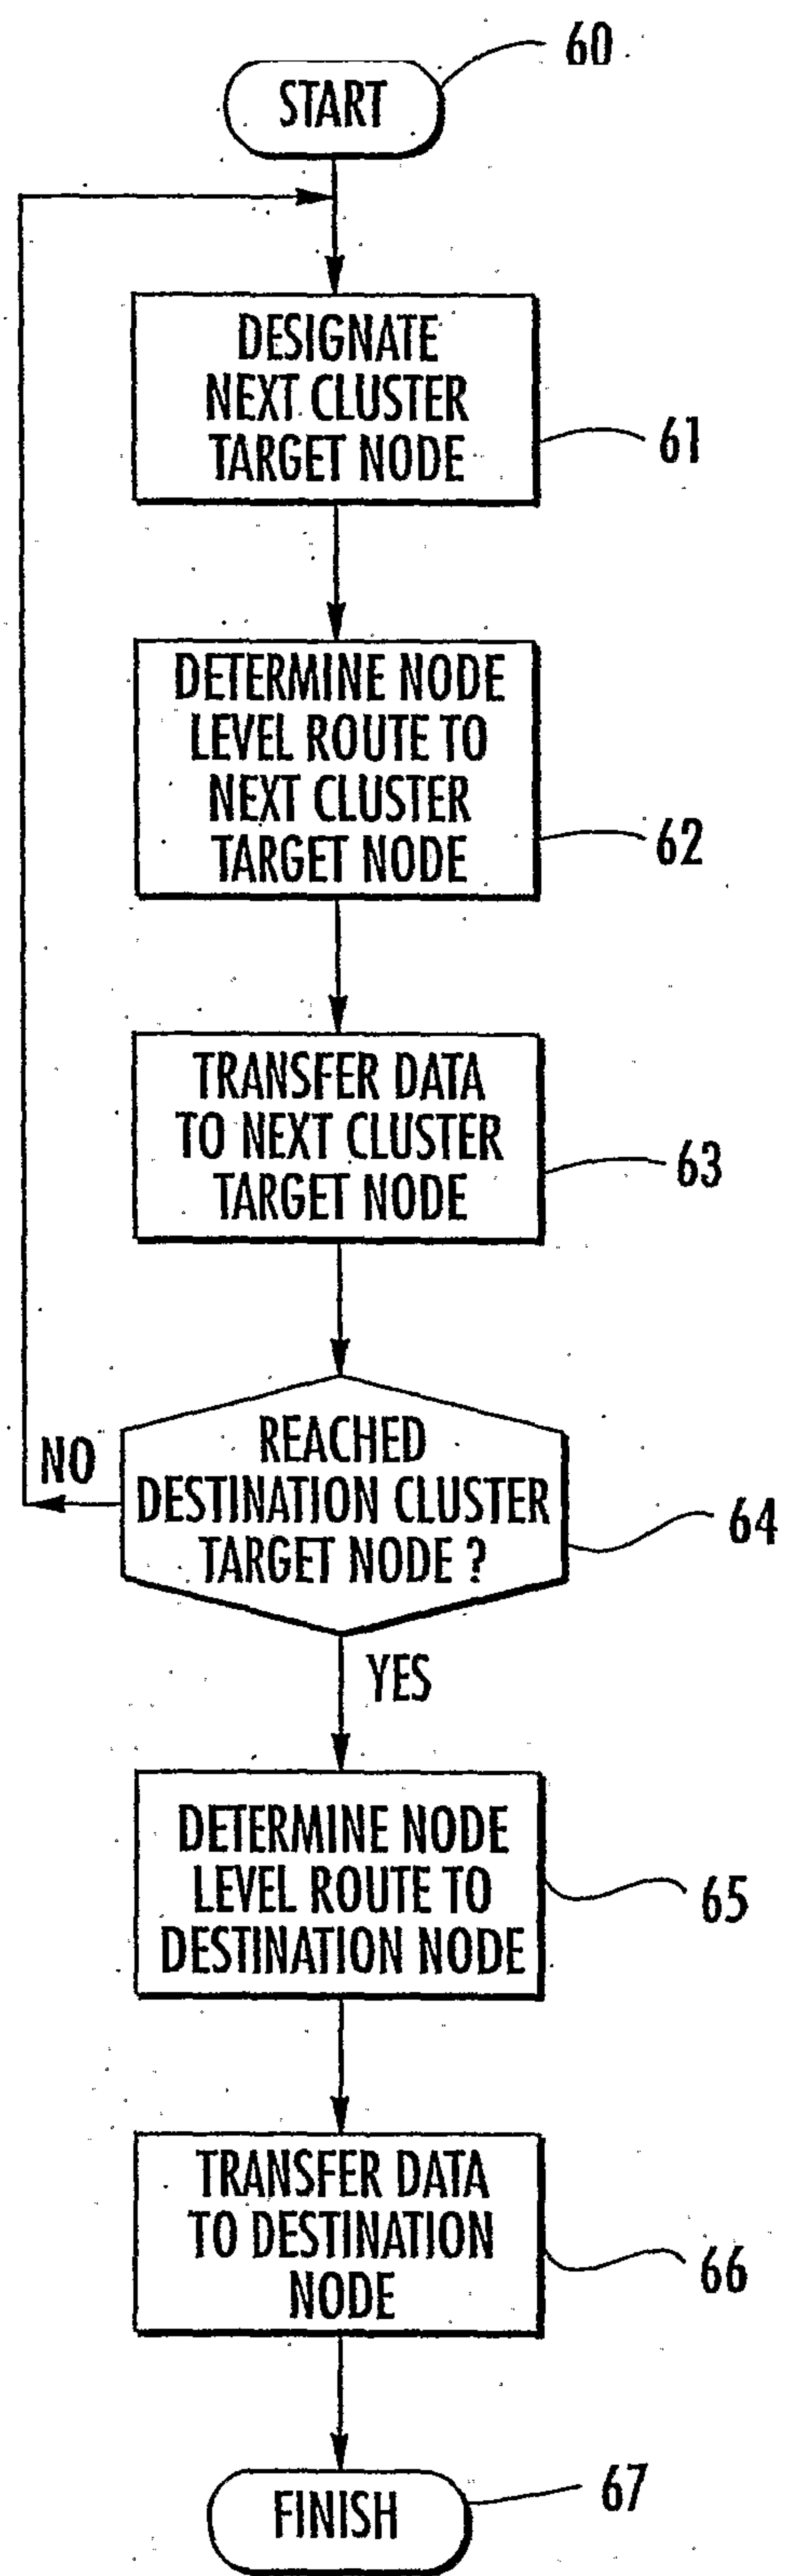


FIG. 6.

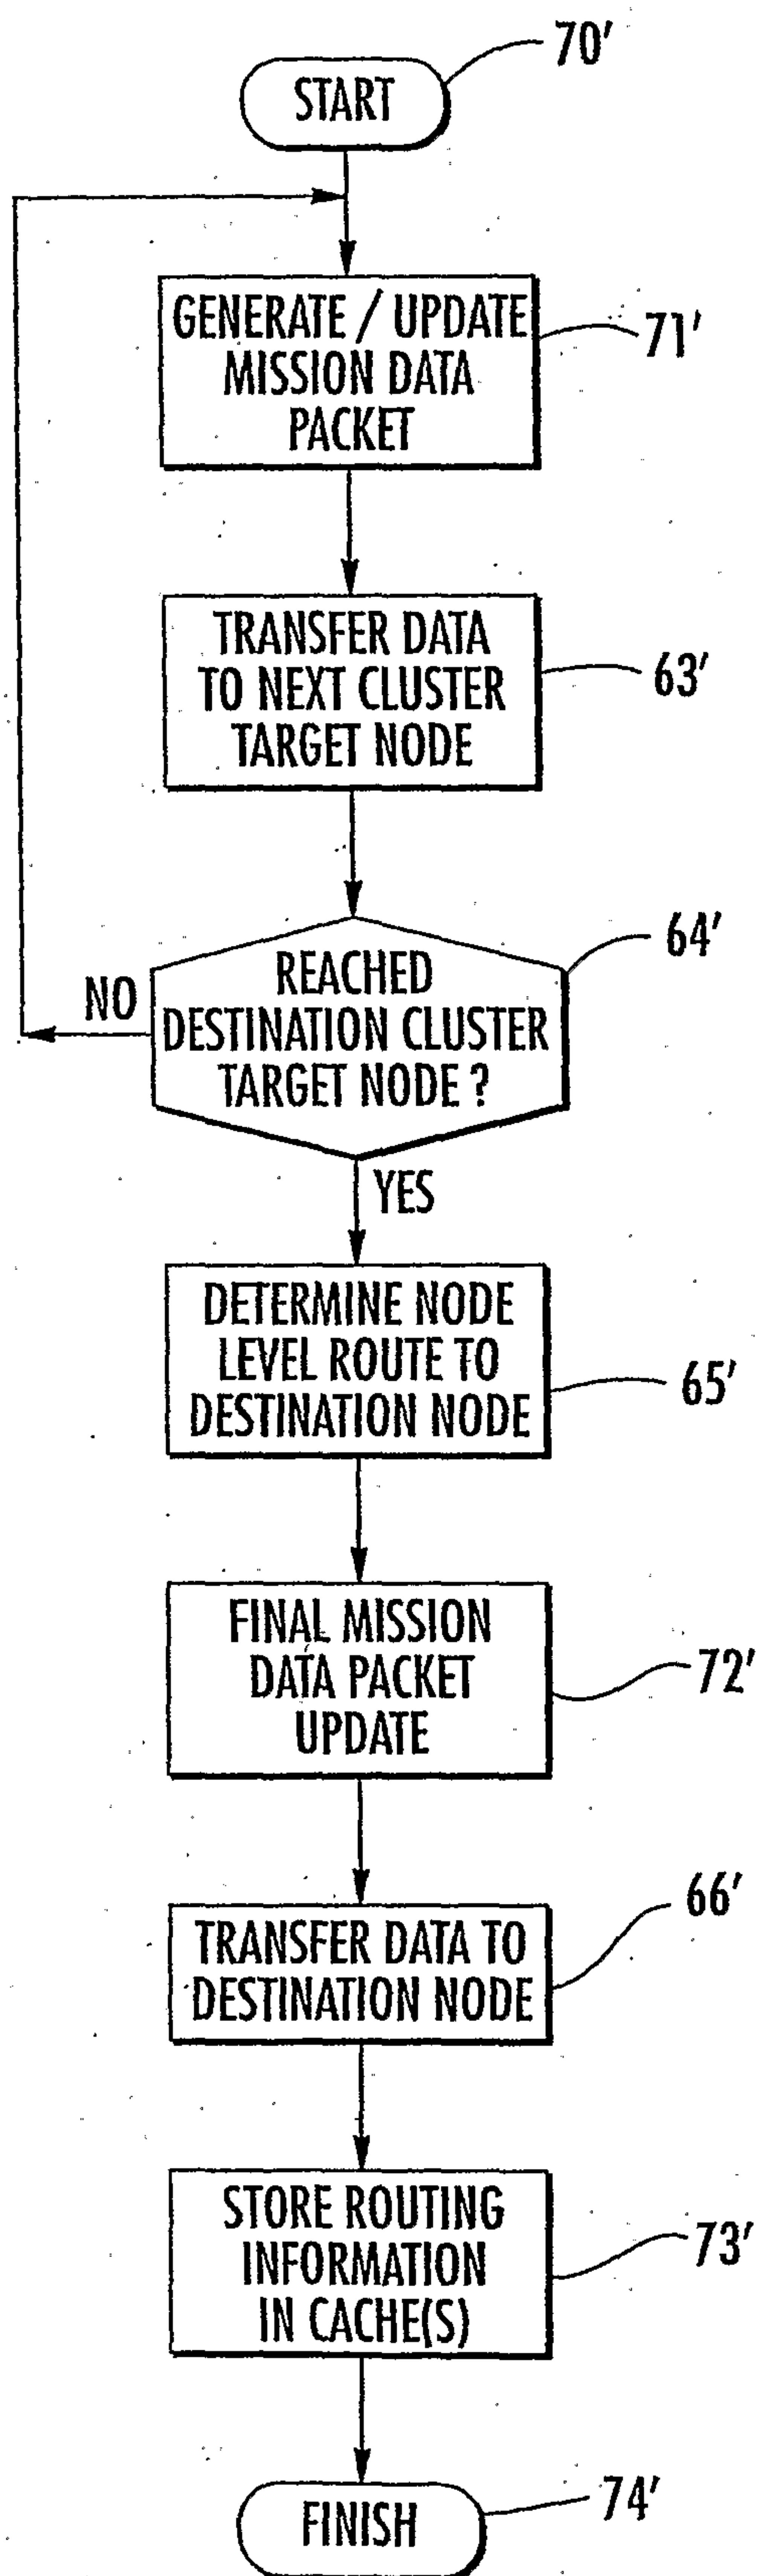


FIG. 7.



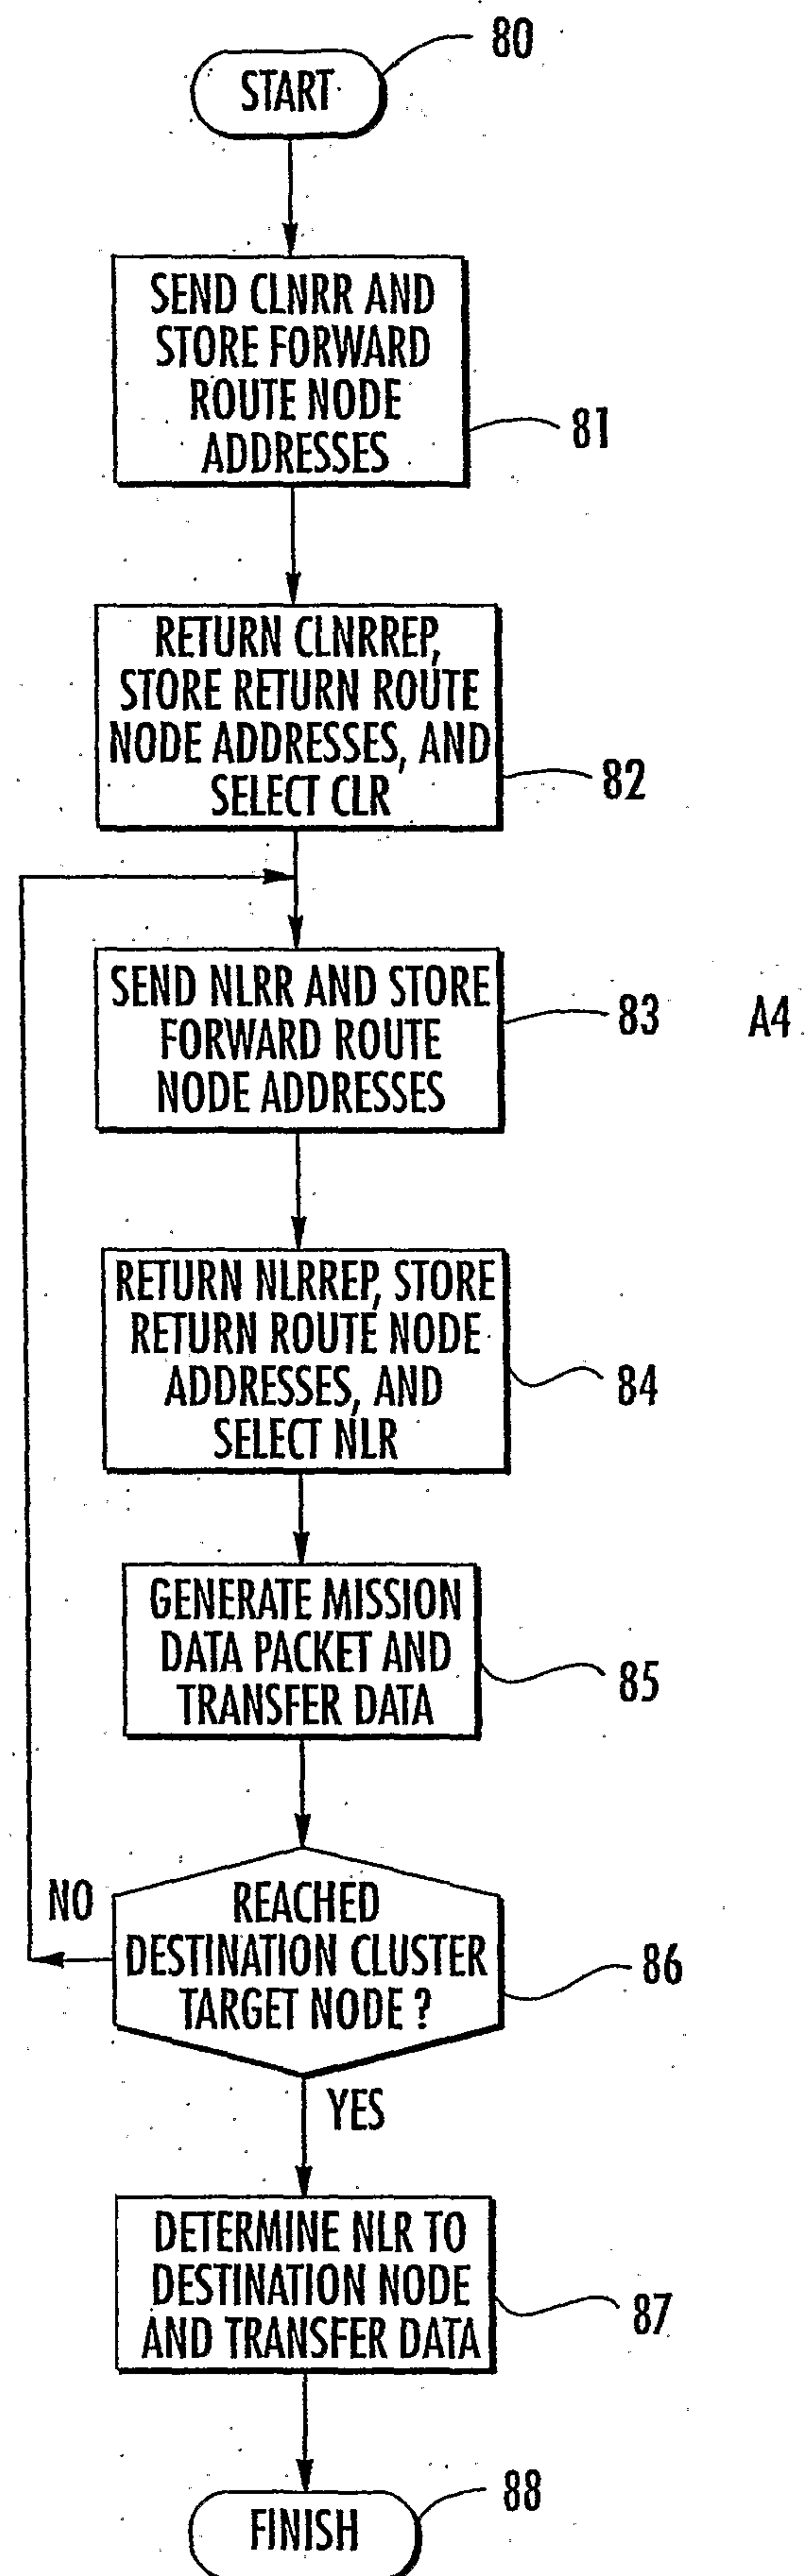


FIG. 8.

*FIG. 9.*

**FIG. 10.**

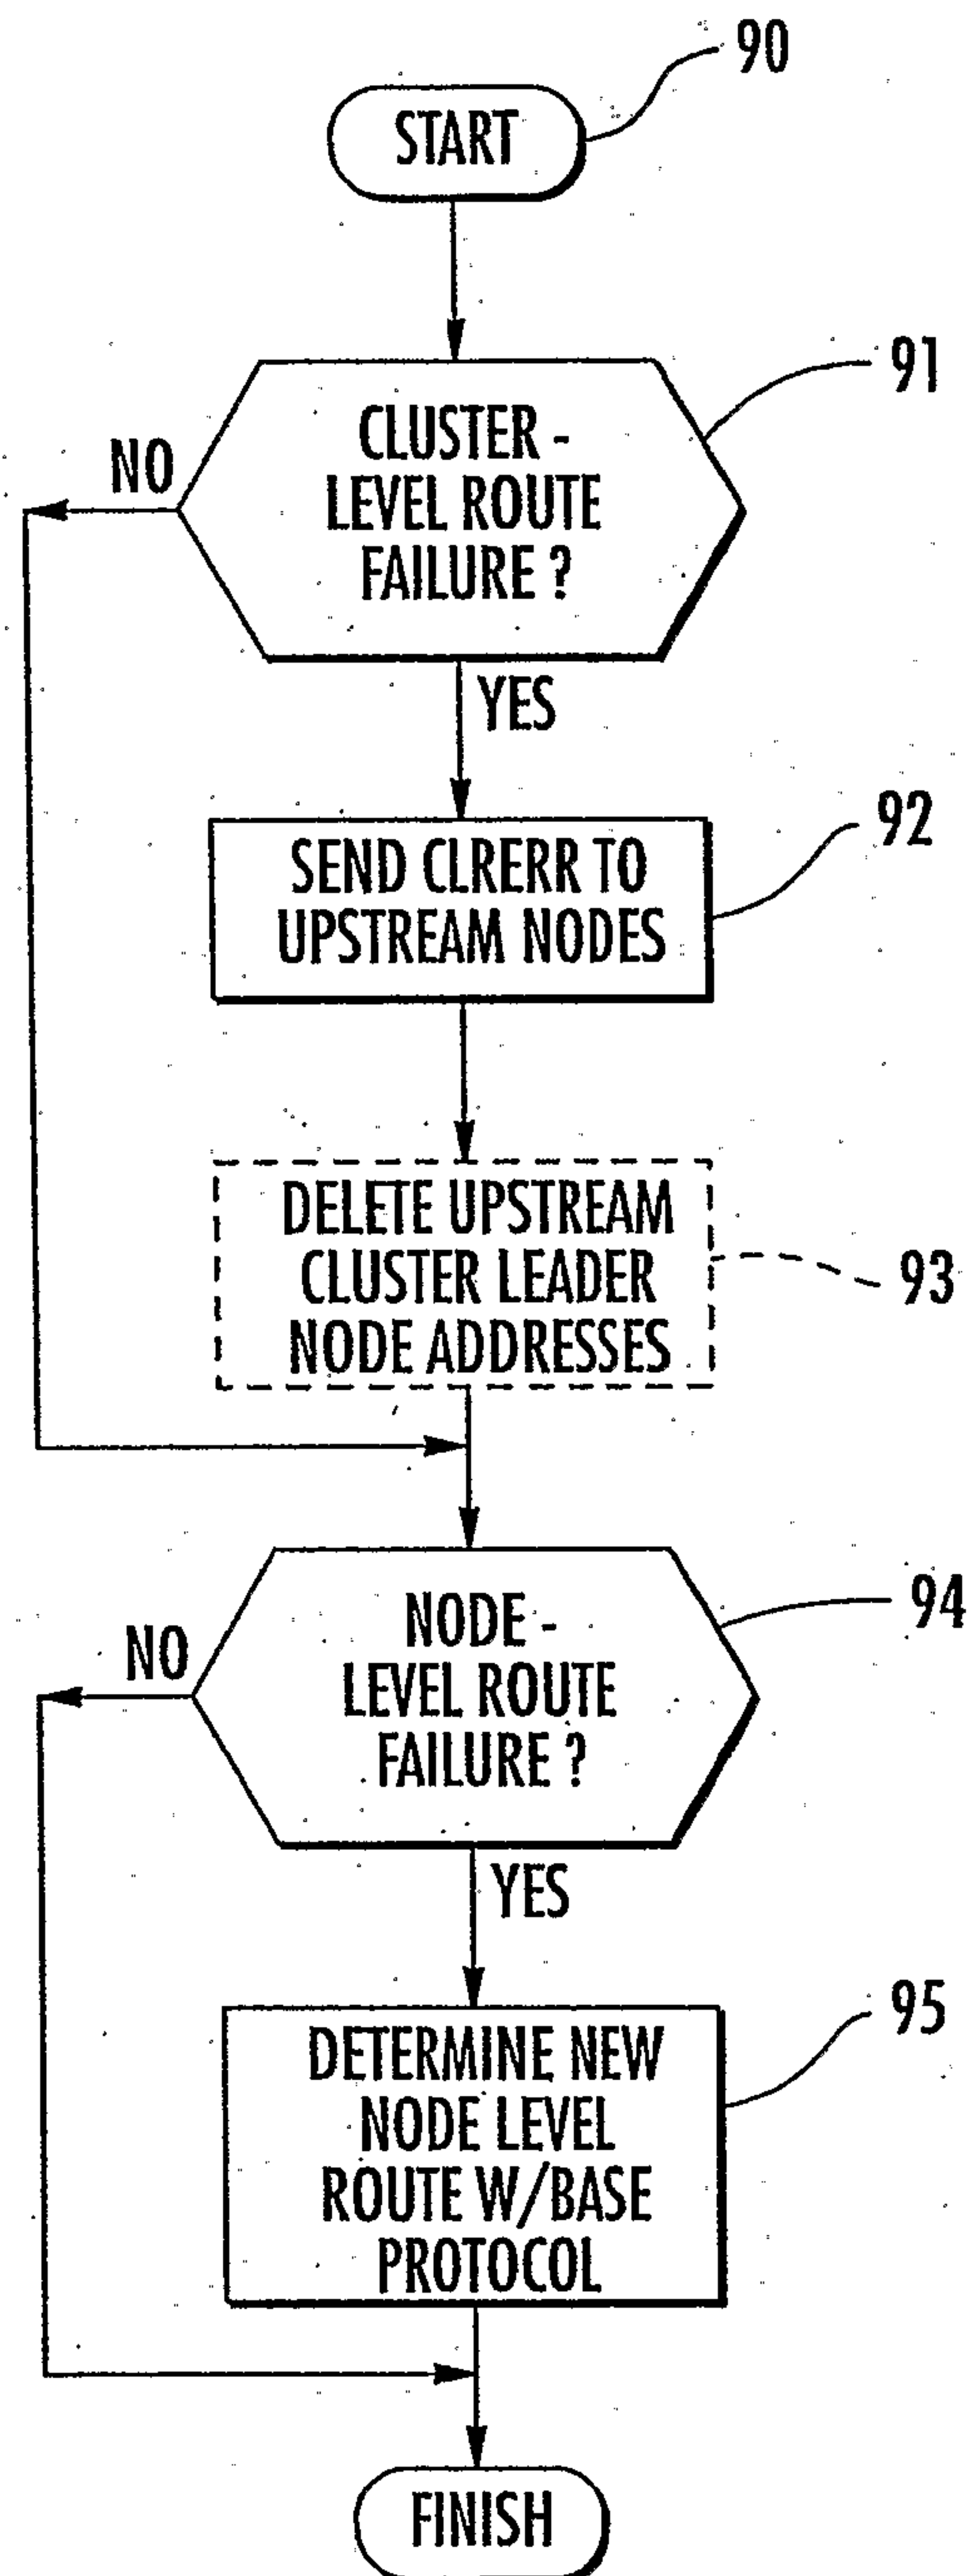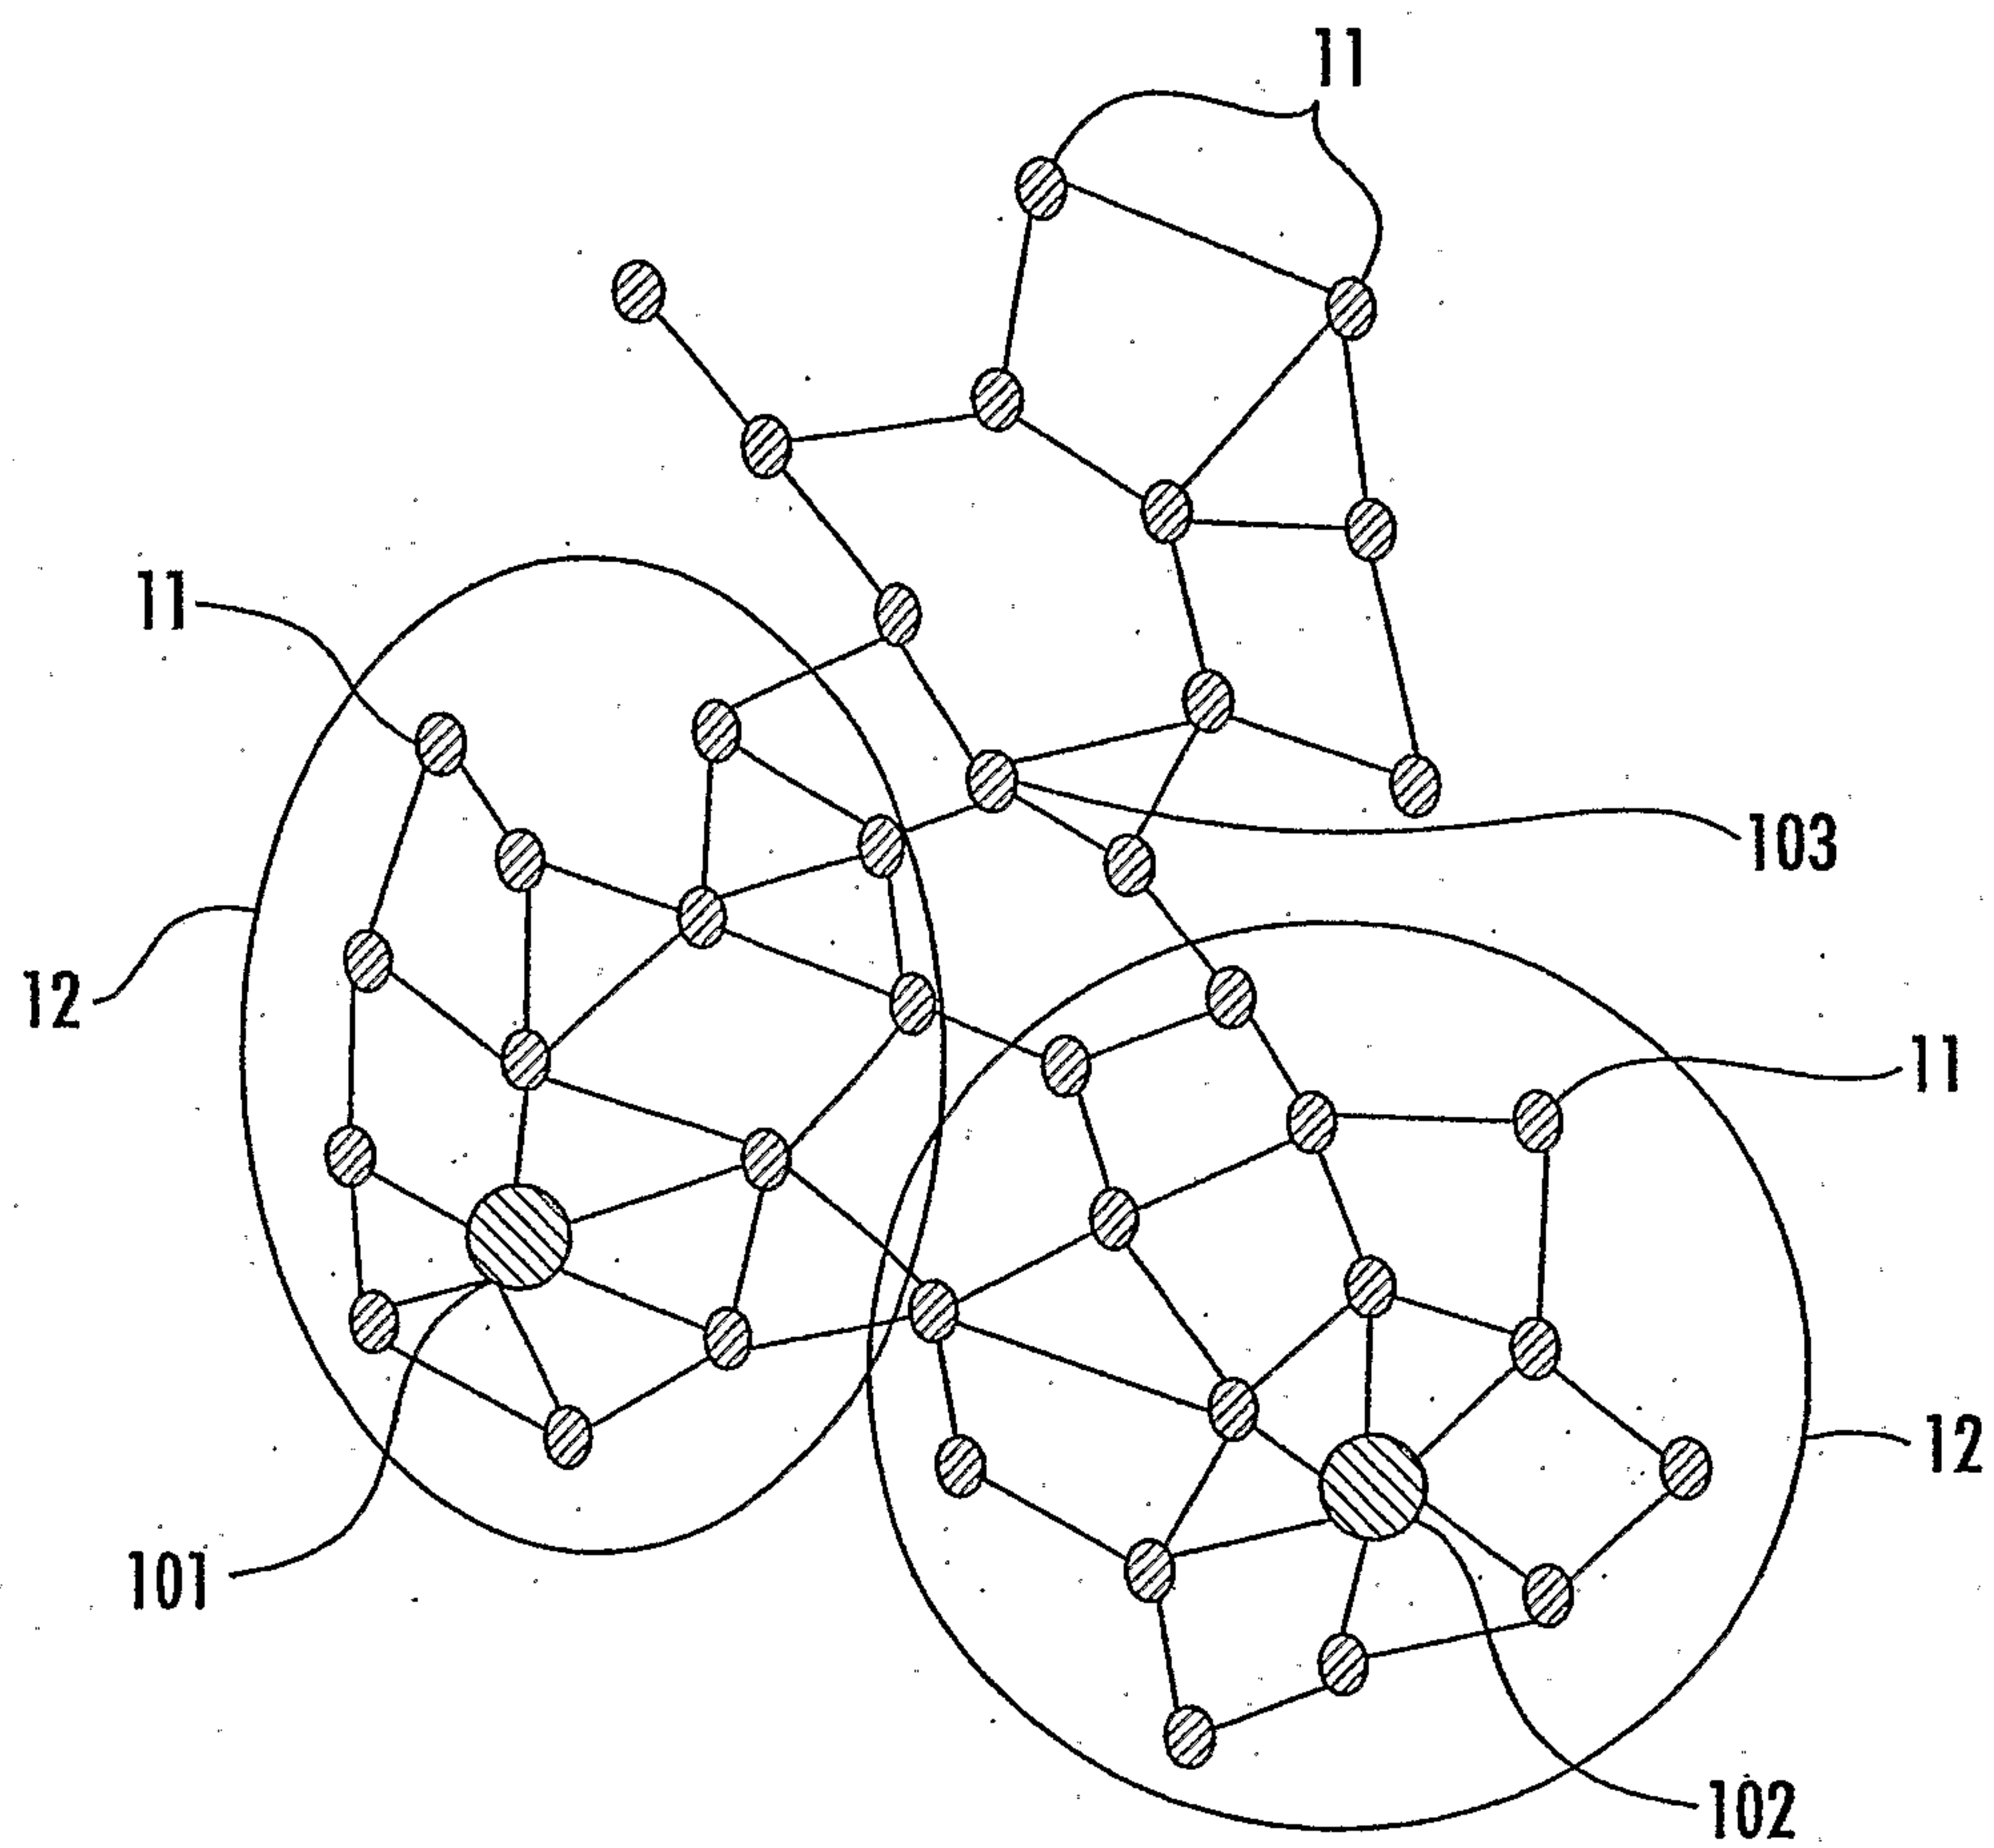