

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 July 2006 (20.07.2006)

PCT

(10) International Publication Number
WO 2006/076545 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2006/001178

(22) International Filing Date: 13 January 2006 (13.01.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/643,951 14 January 2005 (14.01.2005) US

(71) Applicant (for all designated States except US): **INDIANA UNIVERSITY RESEARCH AND TECHNOLOGY CORPORATION** [US/US]; 351 West 10th Street, Indianapolis, IN 46202 (US).

(72) Inventors: **SLOAN, Terry**; 7110 S. Harmony Rd., Bloomington, IN 47403 (US). **STARKS, Earl, W.**; 4145 E. Boltinghouse Rd., Bloomington, IN 47408 (US).

(74) Agent: **BECK, Michael, D.**; MAGINOT, MOORE & BECK, CHASE TOWER, 111 Monument Circle, Suite 3250, Indianapolis, IN 46204 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv))

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AUTOMATIC RETRACTABLE FLOOR SYSTEM FOR A ROTATING GANTRY

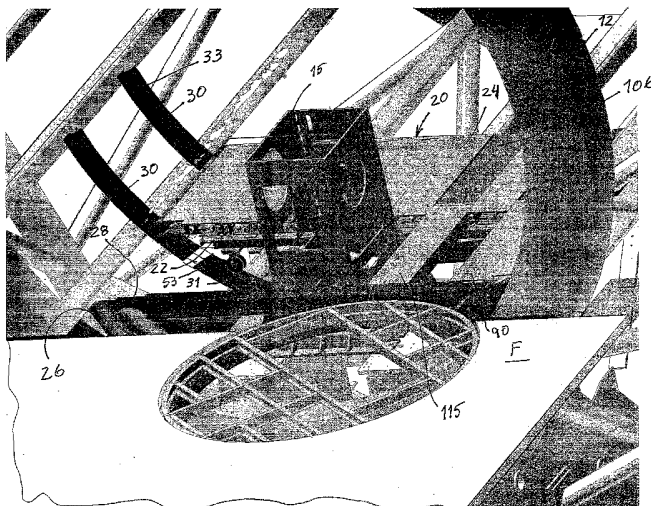

(57) Abstract: A movable floor system for use with a rotating gantry in a radiation treatment facility is provided that comprises a carriage assembly slidably supported within the gantry to maintain a substantially constant orientation while the gantry is rotating. An extendable/retractable panel assembly is supported on the carriage assembly that includes a plurality of non-movable floor panels and a like plurality of movable floor panels slidably mounted over corresponding ones of the non-movable panels. The movable panels are sized to span a distance between the carriage assembly and a fixed floor of the treatment room. Each of the movable panels has a platform surface for supporting a person for access to and from the patient table situated within the gantry. A control system coordinates the extension and retraction of the movable floor panels to prevent collisions with the radiation nozzle as it rotates during the patient treatment.

AUTOMATIC RETRACTABLE FLOOR SYSTEM FOR A ROTATING GANTRY

REFERENCE TO RELATED APPLICATION

5 This application claims priority to co-pending U.S. Provisional application No. 60/643,951, filed on January 14, 2005, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

 The present invention relates to particle radiation therapy systems and, in particular, to the access floor surrounding a patient table within a rotating gantry system.

15

Description of the Related Art

 Particle radiation therapy involves coordinating complex systems and devices to enable targeting of specific cancerous regions of a patient. In particular, proton beam therapy utilizes one or more precisely aligned particle streams to irradiate cancer or tumor cells. The energized protons disrupt targeted cells or tissue so as to effectively halt the progression of the disease. In proton beam therapy, the patient must be accurately positioned with respect to the one or more beams so that the stream irradiates only the desired target region, otherwise the stream may damage healthy cells within the patient's body. Specific alignment in this manner requires numerous control systems to maintain accurate and precise dosage delivery to a plurality of patients during prescribed treatments.

 As described in U. S. Pat. No. 4,870,287, a proton treatment facility generally comprises a proton energy source, an injector, an accelerator, a beam transport system, a switchyard, and a plurality of treatment stations so as to accommodate multiple patients. Each treatment station may comprise a plurality of treatment components such as treatment platforms, gantry structures, and patient monitoring components. Additionally, control and

30

monitoring of the proton treatment facility may be directed by computer and hardware subsystems, which coordinate the activities of each treatment station using software configurable components.

Moreover, control system activities may include beam intensity
5 management, beam position orientation and modification, digital imaging performance, safety condition monitoring, and various other treatment functions. Together these systems form a highly complex collection of hardware and software components. The complexity of the proton treatment
10 facility may be further magnified by managing multiple treatment stations where additional requirements for system redundancy and selective control of each treatment station is required.

The preferred position for a patient is the supine position so as to preclude any deformation of the organs during treatment. Therapy must therefore allow accessibility from all sides and encompass the entire human
15 body. For this reason, the generally known proton therapy devices, are designed so that the entire proton beam guiding device housing is rotatable through 360 degrees about a central axis around a patient table that is aligned with that central axis. A typical proton treatment room includes the treatment system **10** shown in **FIGS. 1-2**. In this system, a rotating gantry **12** supports a
20 beam nozzle **14** contained within a support housing **15**. Protons from a remote source are directed by beam deflectors to the nozzle **14** to effect treatment of a patient **P** (**FIG. 2**) supported on a patient table **T**. The rotating gantry is a very large structure, typically measuring 40 feet in diameter at its largest extent, and about 20 feet in diameter at the mouth of the gantry. The
25 table **T** is cantilever supported within the mouth of gantry **12** so that the entire gantry structure and nozzle **14** can rotate a complete 360° around the patient.

Safety considerations dictate the need for a floor adjacent the patient table. Moreover, the floor provides access to the patient table by radiation treatment technologists and medical personnel during setup of the treatment
30 facility, positioning of the patient on the table, and sometimes during a treatment. The presence of the massive rotating gantry **12** is at odds with the need for complete access around the patient table **T** within the rotating gantry

structure. In particular, any platform or floor providing access to the patient table will necessarily interfere with the necessary rotation of the gantry about the patient. There is a significant need for a floor assembly that can be used with a large rotating gantry facility to provide immediate patient access without
5 interfering with the operation of the gantry.

SUMMARY OF THE INVENTION

In order to address the need for a highly functional floor around the patient table, the present invention contemplates a floor assembly that includes floor segments or panels that extend to mate with the fixed floor of the treatment room and that retract to allow passage of the nozzle as the gantry rotates. In accordance with certain aspects of the invention, the movable panels are capable of supporting the weight of one, and preferably two, average sized adults when fully extended. The floor assembly permits rotation of the gantry from -185° to the $+185^{\circ}$ about the patient by retracting the movable panels. The floor panels mechanically latch to the fixed treatment room floor when fully extended and cannot be unintentionally released by personnel or equipment moving across the floor panels.

A control system is provided that orchestrates the extension and retraction of all the movable floor panels to adhere to certain safety requirements. For instance, the control system prevents all of the movable floor panels from being in their retracted position at the same time and may also mandate that at least two moveable panels be extended and locked to the fixed treatment room floor at all times. The control system is preferably configured to automatically stop the extension or retraction of a floor panel at the onset of certain emergency events. In some embodiments, the control system automatically moves the necessary floor panels in conjunction with the movement of the gantry and radiation nozzle. The control system direct the retraction of selected floor panels as needed to permit line of sight between an X-ray tube and its associated DR panel. A manual override feature may be provided that can be activated at the control panel in the control room to allow direct control over the extension or retraction of any of the movable floor panels. The control system may also be configured to that movement of a selected floor panel is inhibited until the pending movement is acknowledged at the control panel, except in the case of an emergency movement.

The control system preferably includes software that evaluates a gantry move to determine whether and which floor panels must be retracted or extended and when the movement must occur to permit passage of the nozzle. As a consequence, the gantry is provided with position sensors that

are read by the control system to determine the angular position of the gantry, and particularly of the nozzle, at all times. However, control of gantry rotation is not disturbed by the control system for the present invention, meaning that the radiation technologist maintains direct control of the gantry rotation. A
5 user interface is preferably provided that graphically displays the planned movement of the movable floor panels with respect to the gantry rotation. This user interface may also include a remote activation device held by medical personnel near the patient table that is only enabled after the display has been acknowledged by a technologist at the control panel once the
10 technologist has determined that no equipment or personnel will be harmed by the floor movement or the gantry rotation. Enablement of the remote device then allows the medical personnel at the patient table to activate the floor movement sequence.

It is one object to provide a floor assembly that can be used with a
15 rotating gantry and radiation nozzle system at a radiation treatment facility. It is a further object that the floor assembly be controllable to ensure adherence to certain safety protocols while also ensuring that no collisions will occur between the nozzle and the floor assembly as the gantry rotates.

One benefit of the movable floor system of the present invention is that
20 it allows complete access to both sides of a patient table within a rotating gantry structure. Another benefit is that access to the patient table is always maintained by controlled extension and retraction of the movable floor panels. Other objects and benefits of the invention will become apparent from the following written description taken together with the accompanying figures.

DESCRIPTION OF THE FIGURES

FIG. 1 is a perspective view of a radiation treatment system using a rotatable gantry.

5 **FIG. 2** is an enlarged perspective view of a patient within the gantry enclosure.

FIG. 3 is an enlarged perspective view of a rotatable gantry with the retractable floor system of the present invention.

FIG. 4 is an enlarged perspective view of the gantry and floor system shown in **FIG. 3** with the nozzle rotated to a different position.

10 **FIG. 5** is an end view of one of a plurality of floor rails mounted to the gantry as part of the retractable floor system shown in **FIGS. 3-4**.

FIG. 6a is side perspective view of a latch beam mounted to the gantry as part of the retractable floor system shown in **FIGS. 3-4**.

FIG. 6b is a side view of the latch beam shown in **FIG. 6a**.

15 **FIG. 7a** is front perspective view of a center latch that is mounted to the latch beam shown in **FIGS. 6a-b**.

FIG. 7b is top view of the center latch shown in **FIG. 7a**.

FIG. 7c is side view of the center latch shown in **FIGS. 7a-b**.

FIG. 7d is side view of the center latch shown in **FIGS. 7a-c**.

20 **FIG. 8a** is front perspective view of a left side latch that is mounted to the latch beam shown in **FIGS. 6a-b**.

FIG. 8b is a side view of the left side latch shown in **FIG. 8a**.

FIG. 9a is side perspective view of a right side latch that is mounted to the latch beam shown in **FIGS. 6a-b**.

25 **FIG. 9b** is a side view of the right side latch shown in **FIG. 9a**.

FIG. 10 is an enlarged bottom perspective view of a carriage assembly and floor assembly of the retractable floor system shown in **FIGS. 3-4**.

FIG. 11a is an enlarged bottom perspective view of the carriage assembly shown in **FIG. 10** with two floor panel components mounted
30 thereon.

FIG. 11b is an enlarged perspective view of the trolley wheel assembly in the carriage assembly shown in **FIG. 11a**.

FIG. 11c is an enlarged perspective view of the latch mechanism at one end of an extended center upper panel of the carriage assembly shown in **FIG. 11a**.

FIG. 11d is an enlarged perspective view of the latch mechanism at one end of a retracted center upper panel of the carriage assembly shown in **FIG. 11a**.

FIG. 11e is an enlarged perspective view of the cylinder mounting bracket arrangement of a center lower channel beam of the carriage assembly shown in **FIG. 11a**.

FIG. 12 is a top perspective view of a lower weldment forming part of the carriage assembly shown in **FIG. 11a**.

FIG. 13 is top perspective view of an upper weldment forming part of the carriage assembly shown in **FIG. 11a**.

FIG. 14a is top perspective view of a wing lower channel beam forming part of the floor assembly shown in **FIG. 10**.

FIG. 14b is an end view of the wing lower channel beam shown in **FIG. 14a**.

FIG. 15 is top perspective view of a left wing supported by the wing lower channel beam shown in **FIG. 14a**.

FIG. 16a is top perspective view of a left upper channel beam forming part of the floor assembly shown in **FIG. 10**.

FIG. 16b is an end view of the left upper channel beam shown in **FIG. 16a**.

FIG. 17a is a top perspective view of a right wing supported by the wing lower channel beam shown in **FIG. 14a**.

FIG. 17b is a side view of the right wing shown in **FIG. 17a**.

FIG. 18 is a top perspective view of a right upper channel beam forming part of the floor assembly shown in **FIG. 10**.

FIG. 19a is a bottom perspective view of a center lower channel beam forming part of the floor assembly shown in **FIG. 10**.

FIG. 19b is a top view of the center lower channel beam shown in **FIG. 19a**.

FIG. 19c is a side view of the center lower channel beam shown in **FIG. 19a**.

FIG. 19d is an end view of the center lower channel beam shown in **FIG. 19a**.

5 **FIG. 20a** is a bottom perspective view of a center upper channel beam supported by the center lower channel beam shown in **FIGS. 19a-d**.

FIG. 20b is an end view of the center upper channel beam shown in **FIG. 20a**.

10 **FIG. 21** is a side elevational view of a pneumatic cylinder mounted within the channels shown above that form the floor assembly.

FIG. 22 is an enlarged bottom perspective view of a latch mechanism that is mounted to the upper channel beams shown above for engagement to the latches shown in **FIGS. 7a-9b**.

15 **FIG. 23** is a perspective view of a cylinder clevis that forms part of the latch mechanism shown in **FIG. 22**.

FIG. 24a is a perspective view of a latch member that forms part of the latch mechanism shown in **FIG. 22**.

FIG. 24b is a side view of the latch member shown in **FIG. 24a**.

20 **FIG. 25** is a perspective view of a center tongue plate that forms part of the latch mechanism shown in **FIG. 22**.

FIG. 26a is a top perspective view of a right tongue plate that forms part of a latch mechanism similar to that shown in **FIG. 22**.

FIG. 26b is a bottom perspective view of the right tongue plate shown in **FIG. 26a**.

25 **FIG. 27** is a bottom perspective view of a left tongue plate that forms part of a latch mechanism similar to that shown in **FIG. 22**.

FIG. 28 is an enlarged perspective view of a trolley wheel assembly that is mounted to the lower weldment frame as shown in **FIGS. 10-11a**.

DESCRIPTION OF THE PREFERRED EMBODIMENT

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and described in the following written specification. It is understood
5 that no limitation to the scope of the invention is thereby intended. It is further understood that the present invention includes any alterations and modifications to the illustrated embodiments and includes further applications of the principles of the invention as would normally occur to one skilled in the art to which this invention pertains.

10 As shown in **FIGS. 3-4**, the present invention contemplates a movable floor system **20** that is supported on a carriage assembly **22**. The carriage assembly is supported relative to the gantry **12** so that the floor system **20** maintains its neutral horizontal position even as the gantry is rotated. The floor system **20** includes an extendable panel assembly **24** that controls the
15 extension and retraction of various movable panels relative to several non-movable panels that are arranged at one end of the patient table (see table **T** in **FIGS. 1-2**). The patient table is not depicted in **FIGS. 3-4** for clarity; however, it is known that the table extends along the rotation axis of the gantry **12** directly above the nozzle support structure **15** in **FIG. 3**. It can thus be
20 appreciated that the floor assembly **20** is situated at the end of the table within the gantry enclosure. The extendable panel assembly extends part of the floor surface within the gantry enclosure to mate with the fixed floor **F** of the radiation treatment room, as represented by the floor panel **80, 90** and **115** in **FIGS. 3-4**.

25 As shown in **FIG. 3**, the carriage assembly **22** is supported on rollers **53** which ride along the rolling surface **31** of floor rails **30**. The floor rails **30** are preferably 120° beam segments, as shown in **FIG. 5**, so that three such beam segments are combined to encircle the interior of the gantry **12**. (Note that only one such segment is shown in **FIGS. 3-4**). Two sets of floor rails **30**
30 are mounted to the gantry spaced apart by approximately the width of the carriage assembly **22**. Although it is contemplated that three segments

combine to form each rail, any number of segments may be used depending upon the configuration of the gantry **12** and other construction considerations.

The interface to the fixed floor **F** is provide via a latch beam **28** mounted to the end of a floor extension **26** (**FIG. 3**). The floor extension **26**
5 can be part of the fixed floor **F** or can be separately engaged to the floor **F** to form a continuous floor surface projecting into the mouth of the gantry **12**. Of course, the extension **26** is sized so as not to interfere with the rotation of the gantry around the extension. The latch beam **28** includes a latch mounting flange to which a plurality of latches **35** and **43** (**FIGS. 7a-9b**) are mounted at
10 bolt locations **29a** (**FIG. 6b**). As shown in **FIG. 6b**, nine such bolt locations may be provided to support nine latches corresponding to nine movable floor panels of the extendable panel assembly **24**. The latches include a plurality of center latches **35** (**FIGS. 7a-d**) that are mounted to the center portion of the latch beam **28**, a left end latch **43L** (**FIGS. 8a-b**) and a right end latch **43R**
15 (**FIGS. 9a-b**). The latches **35**, **43L** and **43R** are similarly configured to define tongue slots **36**, **44** and mounting bolt bores **38**, **46**. One of the mounting bolt bores in each latch is configured to receive a catch bolt **40**, as shown in **FIGS. 7c-d**. The catch bolt **40** includes an enlarged or elongated head portion **41** that extends into the tongue slot **36**, **44**, for engagement by a mating latch
20 (see **FIG. 22**). As described herein, the latches positively lock a movable floor panel when it is extended to bridge the space between the floor assembly **20** and the fixed floor **F** (or more accurately the floor extension **26** and latch beam **28**).

Additional details of the floor assembly **20** and carriage assembly **22**
25 are shown in **FIGS. 10** and **FIGS. 11a-e**. The carriage assembly **22** is formed by a lower weldment frame **50** that is preferably constructed of tubular members **51** and cross beams **54** to form a rectangular construct (see **FIG. 12**). The tubular members **51** include roller supports **52** mounted at the opposite ends of the members. The roller supports carry rollers **53** that move
30 along the rolling surface **31** of the floor rails **30**. The rollers may be formed of high density polyurethane or other material that is capable of supporting the floor assembly and that is sufficiently strong to resist pitting. The rollers are

carried by the roller supports by way of an axle and bushing or with a known bearing arrangement.

In order to keep the floor assembly **20** on track with the floor rails, trolley wheel assemblies **62** (**FIG. 28**) are mounted at the inboard aspect of the opposite ends of the tubular members **51** of the lower weldment frame **50**.
5 The assemblies **62** are offset from the rollers **53**, as shown best in **FIG. 11a**, so that the wheels **68** of the assemblies **62** can contact the inside guide surface **33** (**FIGS. 3,5**) of the floor rails **30**. Preferably, the wheels **68** include a flange **69** that helps maintain the wheels in contact with the floor rails. The
10 rollers **53** and wheels **68** thus keep the carriage assembly **22** aligned with the floor rails. As shown in **FIG. 28**, the assemblies **62** include a mounting plate **64** that is mounted to the ends of the tubular members **51** (**FIG. 11**). An extension tube **66** is telescopically mounted to the mounting plate **64** so that the position of the wheel **68** can be adjusted for optimum contact with the side
15 guide surface **33** of the floor rails.

Returning to **FIGS. 10** and **FIGS. 11a-e**, the carriage assembly **22** also includes an upper weldment frame **55** that is mounted to the lower frame **50**. As shown in **FIG. 13**, the upper frame **55** includes tubular members **56** that are welded to cross beams **58** to form a rectangular construct. The cross
20 beams **58** may be welded to the tubular members **51** of the lower frame **50**. Preferably, spacers are provided between the cross beams and the lower frame to ensure a level, horizontal orientation for the floor assembly supported on the upper frame. In addition, spacers **59** link the cross beams **54** of the lower frame to the cross beams **58** of the upper frame. The point of fixation of
25 the spacers to the lower frame cross beams can be adjusted once a level orientation for the upper frame **55** has been established.

The extendable panel assembly **24** includes a plurality of moveable floor panels slidably supported on a like number of non-movable floor panels that are mounted to the upper weldment frame **55** of the carriage assembly
30 **22**. The non-movable floor panels include a pair of wing lower channel beams **70** (**FIGS. 14a-b**) that are positioned at opposite ends of the floor assembly, and a plurality of center lower channel beams **100** (**FIGS. 19a-d**) spanning the

space between the wing lower channel beams. These non-movable components each define a non-moving panel surface **71, 106** that is exposed when a movable panel is extended. The lower channel beams **70, 100** are essentially of box beam construction so that the corresponding panel surfaces

5 **71, 106** are sufficiently strong to support the weight of two adults. The two wing lower channel beams **70** include side walls **72** that combine with the support panel **71** and a bottom wall **73** to form the box beam construction. The center lower channel beams **100** include side walls **104** that combine with the support panel **106** and a bottom wall **102** to form the box beam. The

10 bottom walls **73** and **102** provide a surface for mounting the wing and center lower channel beams to the upper weldment frame **55**.

The movable portion of the floor assembly **20** includes several upper channel beam and wing beam components. A left wing panel **75** and a left upper channel beam **80** are connected and supported on the wing lower

15 channel beam **70** at the left side of the floor assembly. The upper channel beam **80** includes an attachment flange **82** (FIG. 16a-b) to which an attachment flange **77** of the left wing **75** (FIG. 15) is engaged. The left wing panel **75** and upper channel beam **80** include support surfaces **76, 81**, respectively that are capable of supporting a person when the movable

20 portion is appropriately latched, as described in more detail herein. The right side components, including right wing **86** (FIGS. 17a-b) and right upper channel beam **90** (FIG. 18) are mirror images of the left side components.

As shown in FIGS. 16a-b and 18, the upper channel beams **80, 90** include side walls **84, 94** (one of which defines the attachment flange **82**).

25 The beams **80, 90** are thus in the shape of a U-shaped channel that fits outside the lower channel beam **70**, as shown in FIG. 10. This same construction is implemented in the center movable panels, namely in the center lower channel beams **100** (FIGS. 19a-d) and center upper channel beams **115** (FIGS. 20a-b). The upper channel beams **115** include side walls

30 **117** and an upper panel surface **119** that form the U-shape discussed above. The upper channel beam **115** thus fits over the lower channel beam **100**, as

shown in **FIGS. 10** and **11a-d** and particularly in the detail views of **FIGS. 11c-d**.

Each side wall **117** of the upper channel beam **115** includes a slot **118** running along the inside length of the channel. These slots are configured to receive a corresponding slide rail **112**, as shown in **FIG. 11c-d**. The slide rails **112** fit within complementary configured bushings **110** mounted to the lower channel beam **100** at mounting recesses **108**. The bushings and slide rails **110**, **112**, respectively, can be of known configuration to permit low friction movement of the upper channel beam **115** relative to the lower channel beam **100**. In one embodiment, these components are formed of a polyurethane. The bushings and slide rails are sufficiently rigid to support the upper channel beam in a cantilevered manner as the upper channel beam extends from the lower channel beam, as shown in **FIGS. 10** and **11a**.

When the upper channel beam **115** is in its retracted position, as represented in **FIG. 11d**, the upper channel beam **115** is effectively supported by the lower channel beam **100**. A plurality of support bushings or buttons (not shown) can be mounted to the panel surface **106** of the lower channel beam **100** to help bear the load of the upper channel beam **115**.

In accordance with one aspect of the invention, the upper channel beams **80**, **90** and **115** are translated (i.e., extended and retracted) relative to the corresponding lower channel beams **70** and **100**, using an extension device **123**, shown in **FIG. 21**. In the preferred embodiment, the extension device is a pneumatic cylinder that includes a piston rod **124**. The piston rod **124** is connected to a corresponding latch mechanism **125** mounted to each upper channel beam **80**, **90** and **115** (which of course means that every channel includes a corresponding cylinder **123**). The cylinder **123** is mounted to the lower channel beams by a pair of mounting brackets **122**, as depicted in **FIGS. 11d-e**. The throw or length of extension of the piston rod **124** is sufficient to span the distance between the floor assembly **20** and the latch beam **28** (**FIG. 3**). Thus, in the preferred embodiment, the cylinder **123** has a length of about 45 inches so the piston rod has a length of about 40 inches. As shown in **FIG. 20a**, the overall length of the upper channel beam **115** is

almost 50 inches, so that at its greatest extension the upper channel beam overlaps the lower channel beam **100** by about 10 inches. The thickness of the support panel **119** of the upper channel beam is less than $\frac{1}{2}$ inch, and more specifically about 0.29 inches, so the transition between the movable
5 floor panel (**115**) and its fixed counterpart (**100**) is negligible.

In the preferred embodiment, the extension mechanism is a pneumatic cylinder. Other extendable mechanisms are contemplated, such as a hydraulic cylinder, an electromagnetic cylinder, a rack and pinion arrangement and other known mechanisms. The pneumatic cylinder is preferred since the
10 treatment facility typically has a ready source of pressurized air. Moreover, leakage of a pneumatic cylinder is not problematic, as might be the case with a hydraulic cylinder.

The extension mechanism **123** performs a dual function. The first is to extend and retract the upper channel beams **80, 90, 115** relative to their
15 corresponding lower channel beams **70, 100**. The second is to release the latch mechanism **125** when it is desired to retract a previously extended floor panel. Consequently, in the preferred embodiment, the working end of the piston rod **124** is connected to the latch mechanism, as shown in **FIG. 11c**.

One embodiment of the latch mechanism **125** is shown in **FIG. 22**, with
20 detail views of its components in **FIGS. 23-27**. Each movable floor panel or upper channel beam **80, 90** and **115** includes a latch mechanism. Each latch mechanism includes a tongue plate, such as the tongue plate configured for the position of the latch within the extendable panel assembly **24**. In other words, the center panels include a tongue plate **127** (**FIGS. 22, 25**) that is
25 configured to mate with a center latch **35** (**FIG. 7a**). Right tongue plate **145** (**FIGS. 26a-b**) mates with the right latch **43R** (**FIG. 9a**), while the left tongue plate **150** (**FIG. 27**) is configured to engage the left latch **43L** (**FIG. 8a**). Each tongue plate is sized to slide into the corresponding slots **36, 44** in the respective latches. The center tongue plate **127** defines a center notch **128**
30 that engages the catch bolt **40** passing through the center bolt bore in the latch **35**. The notches **146** and **151** of the outboard tongue plates are aligned to mate with the offset catch bolts in the outboard latches **43R, 43L**. The

edges of the tongue plates are configured to help guide the tongue plate into the corresponding latch slots. Similarly, the latch slots include beveled guide surfaces, such as surfaces **37** shown in **FIG. 7d**, to direct the tongues into the slots. With this construction, any drop in the position of the end of an
5 extending floor panel is corrected and the panel regains its proper horizontal orientation in its locked position.

Returning to **FIG. 22**, the latch mechanism **125** includes a support plate **129** that is generally perpendicular to the tongue plate **127**. A latch member **130** is pivotably mounted to the tongue plate by a pivot bolt **139** so that the
10 latch member is immediately adjacent the support plate. The latch member **130** includes a latch hook **131**, as shown in **FIGS. 24a-b**, which is configured to engage the catch bolts **40** in the latches **35**, **43R** and **43L**. A fulcrum plate **132** is situated generally perpendicular to the latch hook. The fulcrum plate defines a spring recess **133** at its end that contains the end of a biasing spring
15 **140** (**FIG. 22**). The biasing spring operates on the fulcrum plate **132** to pivot the latch hook **131** into its locked position. As a movable panel approaches the latch beam, the outside edge of the latch hook **131** contacts the catch bolt so that the latch member **130** pivots against the force of the spring **140** until the bolt is snagged by the latch hook. The spring **140** exerts a constant force
20 against the fulcrum plate **132** to maintain pressure between the latch member **130** and the catch bolt **40**.

The fulcrum plate **132** also defines a clevis slot **134** through which an end of a cylinder clevis **135** (**FIG. 23**) extends. The clevis **135** includes a bore **135b** that receives a clevis pin **136**. The pin bears against the fulcrum plate
25 **132**, especially when the clevis is retracted relative to the support plate **129**. As shown in **FIG. 23**, the body **135c** of the clevis defines a bore **135a** that is configured to mate with the working end of the piston rod **124** of the extension mechanism or cylinder **123**. The body **135b** is larger than the clevis bore **129a** (**FIG. 25**) in the support plate so that the body bears against the support
30 plate **127** when the piston rod is extended. The clevis includes a shaft portion **138** that is sized to fit through the bore **129a**. A snap ring **137** engages the shaft portion **138** to thereby trap the clevis within the bore **129a**. It is

understood that the travel of the clevis relative to the support plate **129** is limited at one end by the body **135c** and at the other end by the snap ring **137**.

The movable floor panels are extended by activating the cylinder **123**.
5 As the cylinder is pressurized, the piston rod **124** extends, pushing the clevis **135** to which it is connected. As the piston rod moves, the clevis body **135c** bears against the support plate **129** of the latch mechanism **125**. Since the latch mechanism is fastened to the upper channel beam (**80, 90, 115**), the channel or floor panel moves toward the fixed floor **F**. When the piston rod
10 pushes the latch mechanism, the clevis pin **136** is at its farthest position from the support plate **129** and in this position only serves to prevent over-rotation of the latch hook **131** under the force of spring **140**. As explained above, when the tongue plate reaches the corresponding latch, the catch bolt pivots the latch member **130** until the latch hook locks around the catch bolt. Again,
15 the spring **140** maintains the latch hook in solid engagement with the catch bolt.

An adjustment screw **142** may be provided passing through the support plate as shown in **FIG. 22**. The adjustment screw includes a pressure face **143** that bears against the latch beam **28** to provide a counter-force against
20 the effort of the latch hook **131** to draw the catch bolt toward the latch member. All of the components of the latch mechanism **125** and latches **35, 43** cooperate to provide a solid and positive engagement between the extended floor panel and the stationary floor.

When it is desired to retract the upper channel beam **115** each latch
25 mechanism **125** must be released from the latch beam **28**. When a retract command is directed to each cylinder **123**, the piston rod is retracted. As the rod retracts, the clevis pin **136** pulls on the fulcrum plate **132** against the force of the spring **140**. By the time the snap ring **137** has contacted the support plate **129**, the latch member **130** has pivoted enough so that the latch hook
30 **131** has disengaged the catch bolt **40**. The latch mechanism is then released from the latch beam **28**.

Continued return movement of the piston rod now pulls on the support plate **129**, latch mechanism **125**, and ultimately the upper channel beam floor panel **115**. When the piston rod **124** reaches the end of its stroke, the upper channel beam **115** is properly positioned over the lower channel beam **100**. It
5 can thus be appreciated that the extension mechanism **123** and the latch mechanism **125** provide means for not only extending and retracting a floor panel, but also for automatically latching and un-latching a movable floor panel from the latch beam **28** connected to the fixed floor **F**.

In accordance with the present invention, a control system is provided
10 that directs the activity of each movable floor panel. Thus, in the illustrated embodiment, the control system determines whether and when any of the seven center panels **115** or either of the two end panels **80**, **90** (with their associated wing panels **75**, **85**) are extended or retracted. The control system can include a pneumatic controller that is connected to all nine of the
15 pneumatic cylinders, wherein the controller includes an array of valves that either provides pressurized air to or bleeds the air from the cylinder. The cylinder control valves are preferably electronically controlled from electrical signals generated by a microprocessor or electronic controller. The control system thus coordinates the operation of these cylinder control valves to
20 thereby extend or retract the respective panel(s).

It is understood that important goals of the floor assembly **20** of the present invention include: 1) providing a floor surface within the gantry enclosure adjacent the end of the patient table; 2) providing a floor connection or path between the floor surface within the gantry enclosure and the fixed
25 floor of the treatment facility; and 3) preventing collisions between the rotating gantry and floor panels of the assembly **20** that may be extended as the gantry approaches. The structural aspect of the invention described above accomplish the first two goals.

The third goal is accomplished by software or firmware within the
30 control system. Preferably, the gantry **12** is provided with sensors (not shown) that relay the exact angular position of the nozzle **15** (**FIG. 1**) relative to the floor assembly **20**. During certain treatment procedures, a technologist

or technician will issue a command to rotate the gantry from one angular position to another. In other procedures, the gantry may move according to a pre-determined program. In accordance with the present invention, the control system determines whether an upcoming move of the gantry will
5 cause a collision with an extended floor panel. In particular, the control system knows the angular position of each movable floor panel when it is extended, the current angular position of the gantry, and the ending angular position of the gantry after its expected rotation. If the angular position of an extended movable floor panel falls within the current and ending angular
10 position of the gantry, a conflict exists. If so, the control system issues a signal to the pneumatic valve of the appropriate pneumatic cylinder to retract the associated floor panel or upper channel beam **80, 90 or 115**.

At the same time, the control system may also assess whether retracting the particular panel will eliminate a path between the movable floor
15 **20** and the fixed floor **F**. It is desirable to always maintain such a path, even during rotation of the gantry, so that medical personnel can have ingress or egress. If the assessment shows that no current floor path exists, the control system makes a determination as to which movable floor panels can be extended without conflicting with the rotation of the gantry, and then issues an
20 extension command to an appropriate cylinder. As desired, multiple floor panels can be extended, although the control system is preferably configured to prevent all of the floor panels being extended at the same time.

In certain embodiments, the floor movement protocol is automated, requiring human intervention only in the event of an anomaly or emergency.
25 In one embodiment, all movements of the movable panels are orchestrated and timed with the rotational movement of the gantry and nozzle. For instance, in one specific example, the two left-most panels are extended as the gantry approaches during a clockwise rotation. As the gantry passes beneath the patient table, the left-most panels are retracted and the two right-
30 most panels are extended so that a path is always maintained. The rate of extension and retraction of the panels can be calibrated to the rate of rotation of the gantry.

However, in the most preferred embodiment of the invention, every movement of the gantry and the floor apparatus requires human intervention to acknowledge and accept the proposed movement. In this way, any potentially unsafe movement can be prevented by the human operator at the treatment room. The human operator may be in a separate control room, and/or may be at the gantry itself. In the latter case, a remote actuator device, or hand pendant, can be provided that communicates with the control system. Thus, in this preferred embodiment, the operator enters a movement command to the control system which then determines and displays any conflicts with the movable floor panels. The control system may also display the suggest panel move sequence for approval by the operator.

In the preferred embodiment, the control system includes a computer display that may be used to notify the human operator of the status of the system and the proposed gantry and floor panel movements. A variety of GUIs can be implemented to communicate this information in an easily interpreted manner and to permit essentially fail-safe communication of movement commands through the human operator.

The control system is also preferably configured to implement various safety restrictions. For instance, the controller may be operable to prevent extension of all floor panels at one time. Other restrictions may include: 1) preventing simultaneous movement of multiple panels; 2) simultaneous retraction of all panels; 3) enforced limits as to the minimum number of panels that must be extended and latched at all times; 4) immediate stop of extension or retraction of a floor panel, regardless of the position of the panel; and 5) emergency overrides of any movement command in a sensed emergency condition or due to human intervention.

It is contemplated that the control system is a microprocessor based system and that the various controls discussed above may be implemented in software. The control system for the retractable floor of the present invention may be integrated into the control system for the radiation therapy facility. In some instances, a pre-programmed treatment plan may incorporate move commands for the gantry as well as for the retractable floor.

As explained above, the present invention contemplates a retractable floor system that can be positioned within a rotating gantry in a radiation treatment facility. The retractable floor system is configured to surrounding a patient table within the gantry and to provide a path between the fixed floor of the treatment facility and the patient table. The retractable floor system includes extendable/retractable panels, each having a latch configured to latch the panel to the fixed floor when in the extended position. The retraction mechanism automatically releases the latch when it is desired to retract the panel.

Each retractable panel is driven by a simple actuator, such as a pneumatic cylinder and each cylinder can be controlled by an electrically activated valve. Each valve is in turn controlled by the control system for the retractable floor, which preferably implements software programs to direct when a particular valve is activated to either extend or retract the corresponding cylinder and associated movable floor panel.

In accordance with the preferred embodiment, the movable floor system follows certain criteria primarily dictated by safety concerns. These criteria include:

- a) The retractable floor assembly within the gantry enclosure is capable of supporting the weight of at least two average sized adults;
- b) The floor assembly permits rotation of the gantry from -185° to the $+185^{\circ}$;
- c) The floor panels of the assembly remain level with the fixed treatment room floor at all times, including during gantry rotation;
- d) The floor panels mechanically latch to the fixed treatment room floor when fully extended;
- e) The mechanical latch is configured so that the floor panels cannot be unintentionally released by personnel or equipment moving across the floor panels;
- f) There is no vertical step between adjacent floor panels or between the extended floor panels and the fixed floor;

- g) The interface between non-movable and movable floor segments is minimal, not exceeding $\frac{1}{2}$ inch, with the segments configured so that the step down is from a movable segment to a non-movable segment;
- h) The control system for the movable floor panels prevents all of
5 the movable floor panels from being in their retracted position at the same time;
- i) The control system mandates that at least two moveable panels are extended and locked to the fixed treatment room floor at all times during non-emergency operation;
- 10 j) The control system is configured to automatically stop the extension or retraction of a floor panel at the onset of certain emergency events;
- k) The control system for the retractable floor system can be used to retract selected floor panels as needed to permit line of sight between an X-
15 ray tube and its associated DR panel;
- l) The control system may include a manual override feature that can be activated at the control panel in the control room to allow direct control over the extension or retraction of any of the movable floor panels;
- m) The control system inhibits movement of a selected floor panel
20 until the pending movement is acknowledged by the human operator at the control panel, except in the case of an emergency movement;
- n) Certain technicians or medical personnel may be provided with a remote activation device that can be used to initiate movement of a floor panel;
- 25 o) The control system includes software that evaluates a gantry move to determine whether and which floor panels must be retracted or extended and when the movement must occur to permit passage of the nozzle;
- p) As a consequence, the gantry may be provided with position
30 sensors that are read by the control system to determine the angular position of the gantry, and particularly of the nozzle, at all times;
- q) Control of gantry rotation is not disturbed by the control system for the present invention, meaning that the radiation technologist maintains

direct control of the gantry rotation regardless of which technician controls the retractable floor;

5 r) In certain embodiments, a requested gantry rotation may be only enabled by a technologist using the remote activation device at the gantry entrance;

 s) In certain embodiments, a request for gantry rotation between two angles that do not require movement of a floor panel can proceed under direct control of the technologist without any commands by the control system for the retractable floor;

10 t) When a gantry rotation request requires movement of one or more floor panels to avoid collision with the nozzle, a display may be generated at the control room describing which floor panels are to move, and the remote activation device may be enabled only after the display has been acknowledged by a technologist at the control panel once the technologist has
15 determined that no equipment or personnel will be harmed by the floor movement or the gantry rotation;

 u) When an X-ray is requested as part of the treatment protocol, a determination is made whether a floor panel must be moved, in which case an alert display is generated in the control room which must be acknowledged
20 before the remote activation device is enabled to control retraction of a floor panel;

 v) Once the X-ray request has been completed, another alert display at the control room is generated to permit extension of the previously retracted floor panel by operation of the remote activation device;

25 w) The control system can be password driven to ensure that only specially qualified personnel can make gantry and floor movement commands.

 While the invention has been illustrated and described in detail in the drawings and foregoing description, the same should be considered as
30 illustrative and not restrictive in character. It is understood that only the preferred embodiments have been presented and that all changes, modifications and further applications that come within the spirit of the invention are desired to be protected.

What is claimed is:

1. A floor system for use with a rotating gantry in a radiation treatment facility comprising:
 - a carriage assembly slidably supported within the gantry to maintain a substantially constant orientation while the gantry is rotating; and
 - an extendable/retractable panel assembly supported on said carriage assembly, said panel assembly including a plurality of non-movable floor panels and a like plurality of movable floor panels slidably mounted over corresponding ones of said non-movable panels, said movable panels sized to span a distance between said carriage assembly and a fixed floor of the treatment room and each of said movable panels having a platform surface for supporting a person thereon.
2. The floor system of claim 1, wherein said carriage assembly includes a plurality of rollers arranged to contact the gantry so that said rollers rotate as the gantry is rotated to maintain said carriage assembly in said substantially constant orientation.
3. The floor system of claim 1, wherein each of said movable panels includes a latch mechanism configured to automatically engage a mating latch component attached to the fixed floor of the treatment room.
4. The floor system of claim 3, wherein said latch mechanism is configured to automatically disengage said mating latch component as said movable panel is retracted.
5. The floor system of claim 1, wherein said panel assembly includes an actuator mounted between each of said plurality of non-movable floor panels and a corresponding one of said movable panels, said actuator configured to extend and retract said movable panel relative to said non-movable panel.

6. The floor system of claim 5, wherein said actuator includes a pneumatic cylinder supported by said non-movable panel and a piston rod connected to said movable panel, said piston rod extendable and retractable from said cylinder to extend and retract said movable panel relative to said non-movable panel.

7. The floor system of claim 6, wherein each of said movable panels includes a latch mechanism configured to automatically engage a mating latch component attached to the fixed floor of the treatment room.

8. The floor system of claim 7, wherein said piston rod is connected to said latch mechanism so that said piston rod is operable when retracted to disengage said latch mechanism from said mating latch.

9. The floor system of claim 8, wherein said latch mechanism includes a latch hook configured to engage said mating latch, and said piston rod is connected to said latch hook and is operable to disengage said latch hook from said mating latch.

10. The floor system of claim 5 further comprising a control system operable to control said actuator of each of said plurality of movable panels to selectively extend or retract said movable panels.

11. The floor system of claim 10, wherein said control system includes software that is operable to control said actuator of each of said plurality of movable floor panels in response to the rotation of the gantry.

12. The floor system of claim 11, wherein said software of said control system is operable to evaluate a planned rotational movement of the gantry to determine whether the movement will cause a collision with an extended floor panel and then to control said actuator of each of said extended floor panel to retract said panel.

13. The floor system of claim 11, wherein said software of said control system is operable to control said actuator of each of said plurality of movable floor panels so that at all times during rotation of the gantry least one movable floor panel is in its extended position.

5

14. The floor system of claim 1, wherein each of said plurality of non-movable floor panels has a platform surface for supporting a person thereon.

10

15. The floor system of claim 1, wherein said panel assembly includes a bearing interface between each of said plurality of non-movable floor panels and said corresponding plurality of movable floor panels.

15

16. A floor system for use with a rotating gantry in a radiation treatment facility comprising:

a carriage assembly slidably supported within the gantry to maintain a substantially constant orientation while the gantry is rotating;

a panel assembly supported on said carriage assembly, said panel assembly including a plurality of movable floor panels, each of said movable floor panels having a platform surface for supporting a person thereon; and
20 an actuator associated with each of said plurality of movable floor panels to move the panel from a retracted position to an extended position spanning a distance between said carriage assembly and a fixed floor of the treatment facility.

25

17. The floor system of claim 16, wherein said carriage includes a plurality of rollers arranged to contact the gantry so that said rollers rotate as the gantry is rotated to maintain said carriage assembly in said substantially constant orientation.


30

18. The floor system of claim 16, wherein each of said plurality of movable panels includes a latch mechanism configured to automatically

engage a mating latch component attached to the fixed floor of the treatment room.

19. The floor system of claim 16, wherein said actuator is a
5 pneumatic cylinder having a piston rod connected to said movable floor panel.

20. The floor system of claim 19, further comprising a control
system operable to control said actuator of each of said plurality of movable
floor panels to selectively extend or retract said movable panels.
10

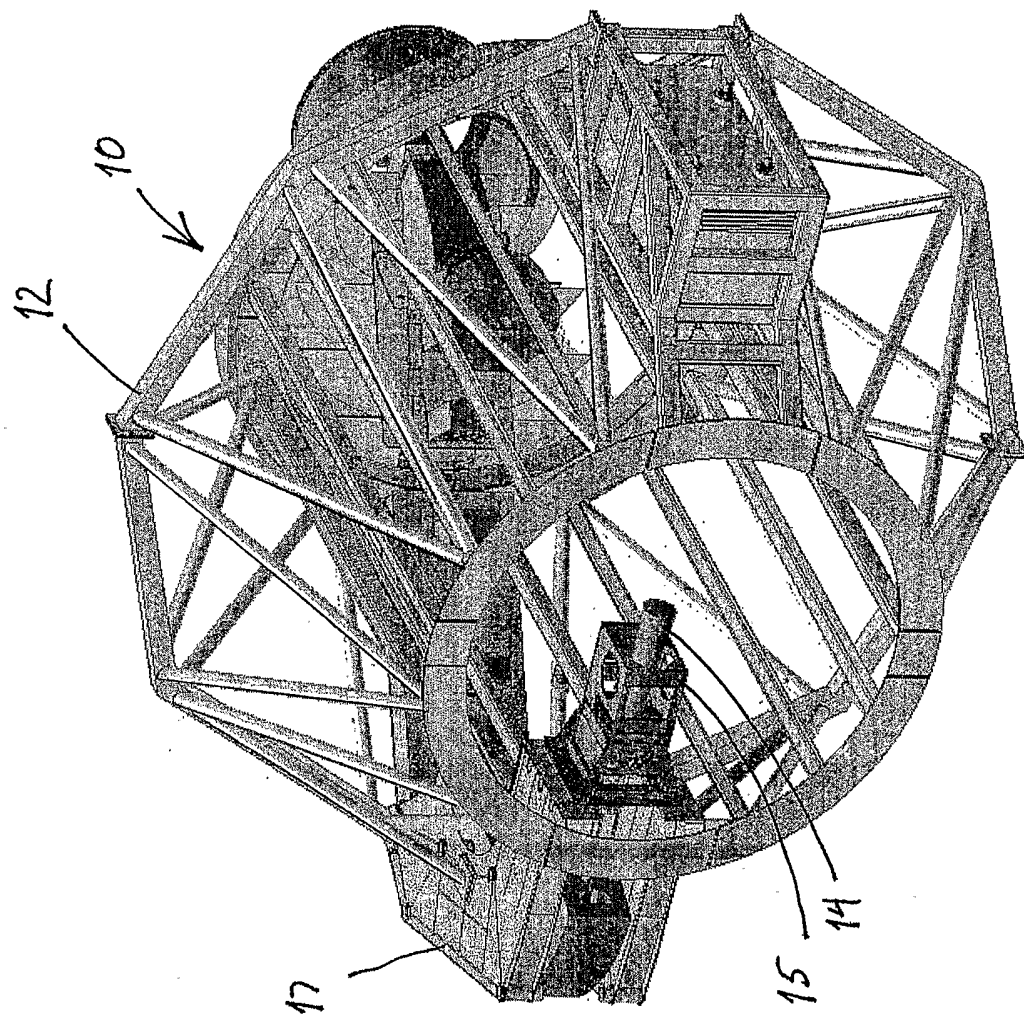

THE

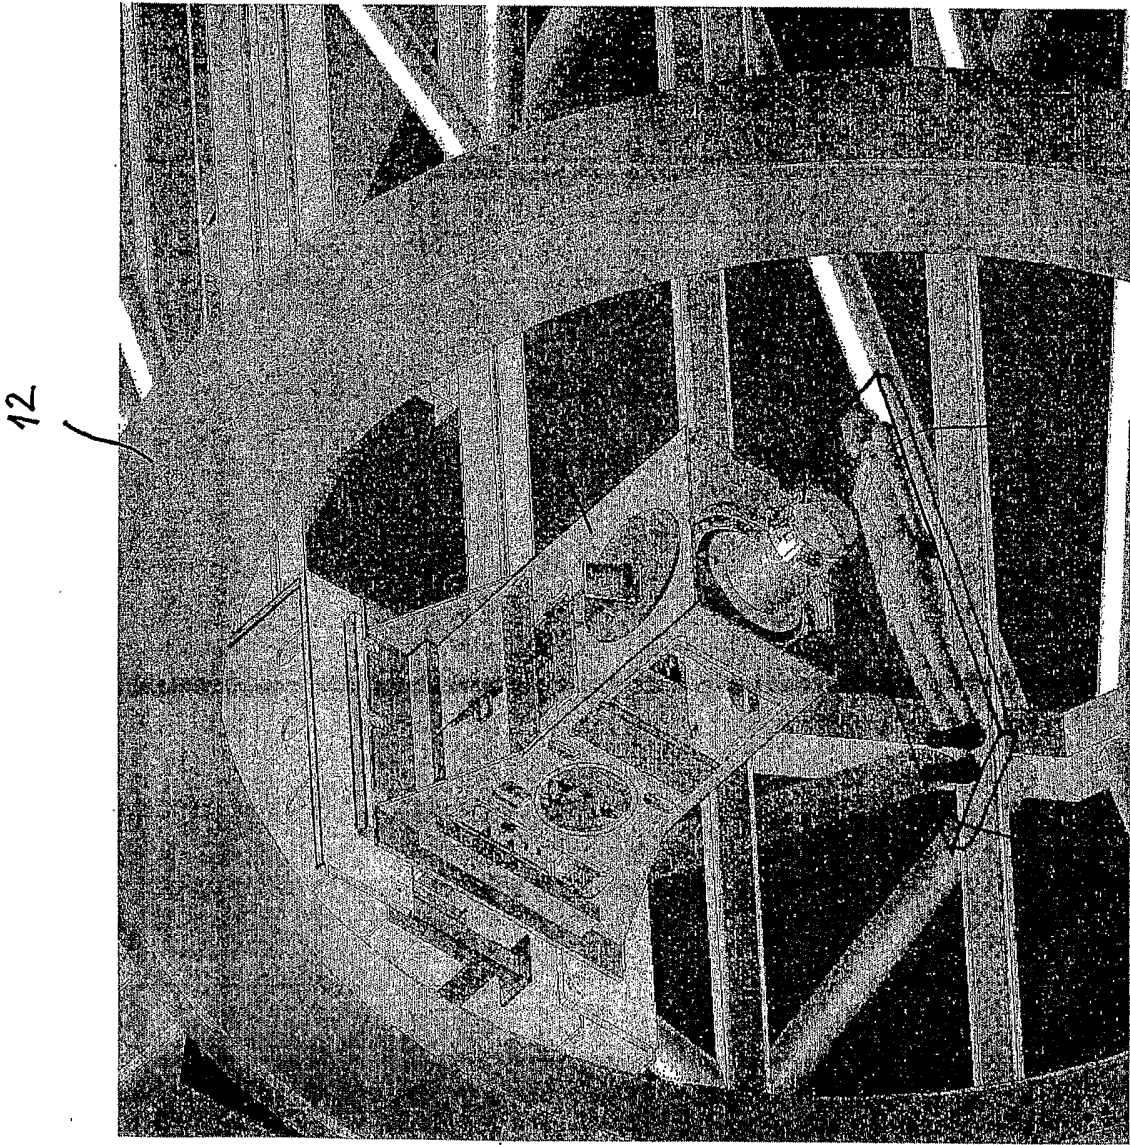
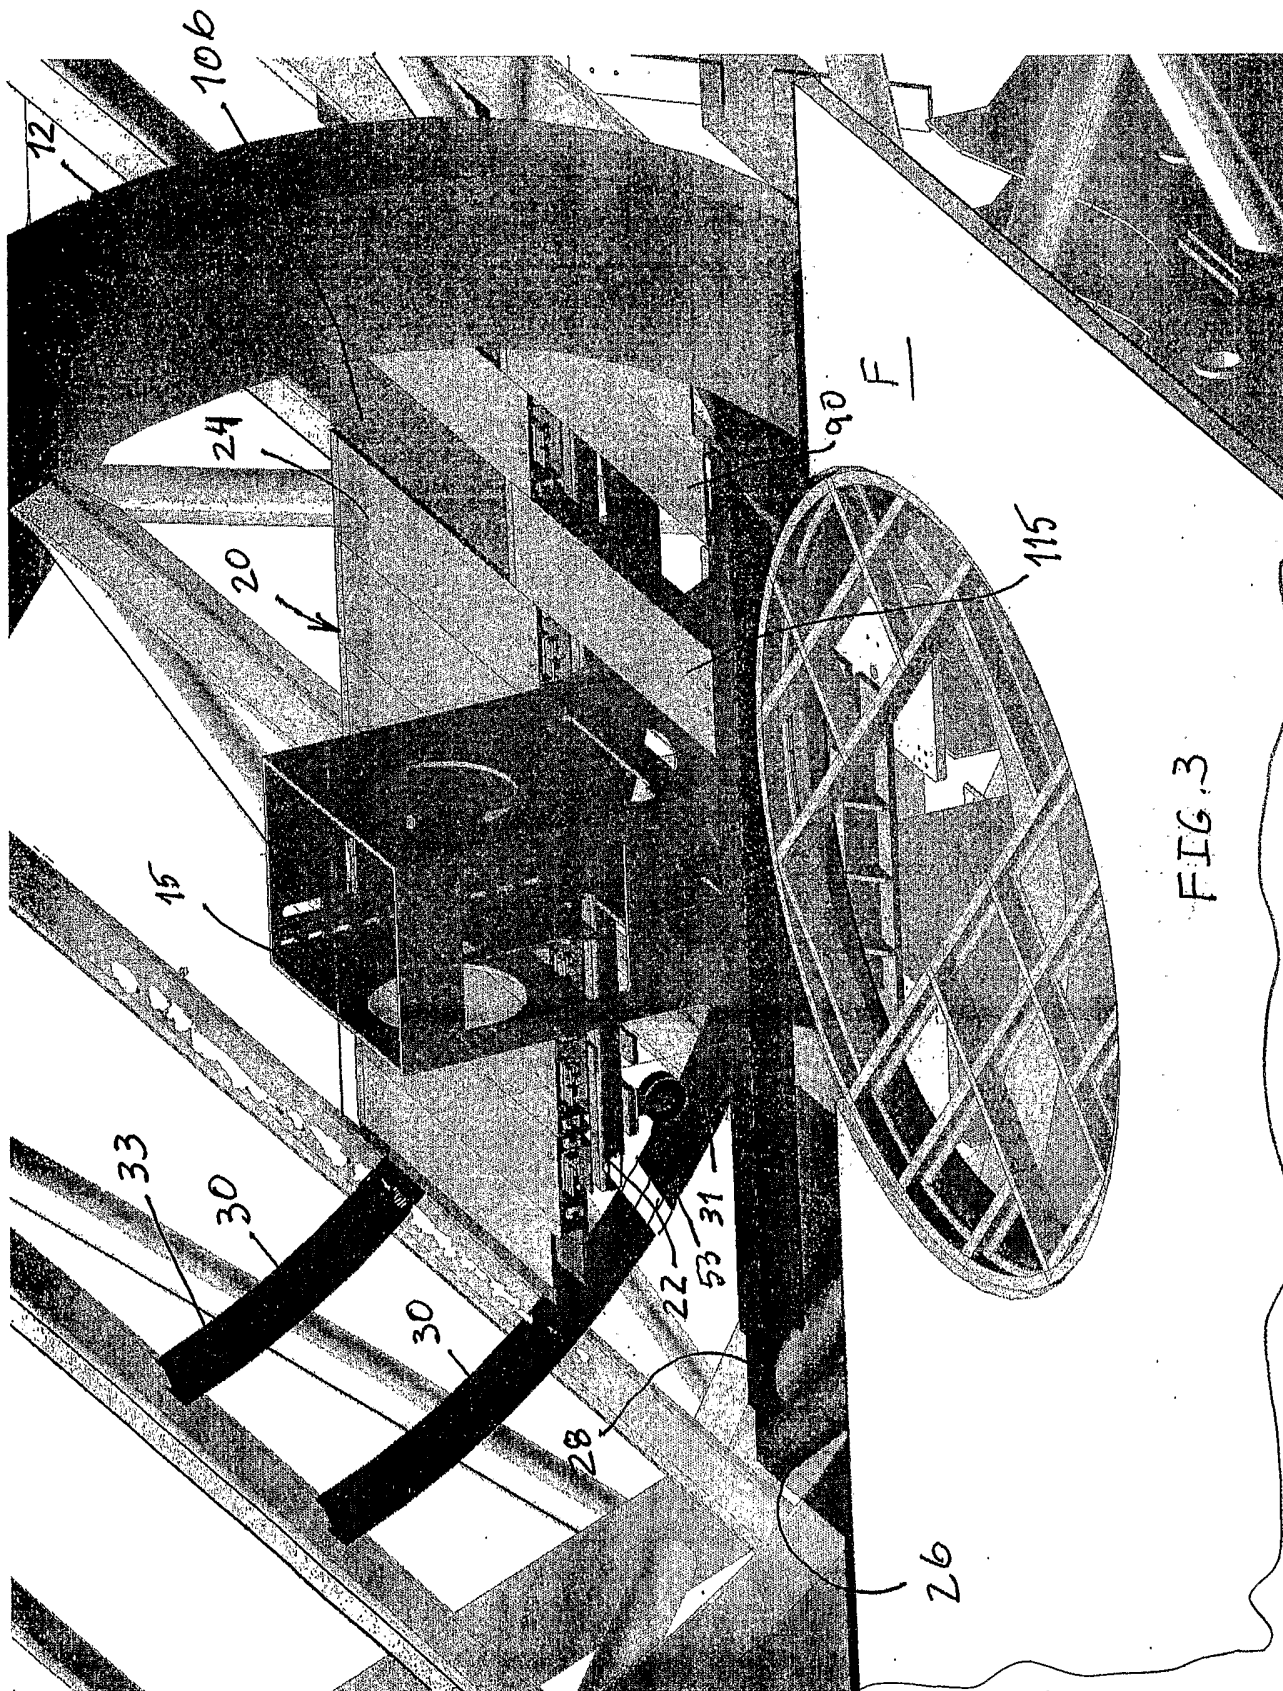


FIG. 2



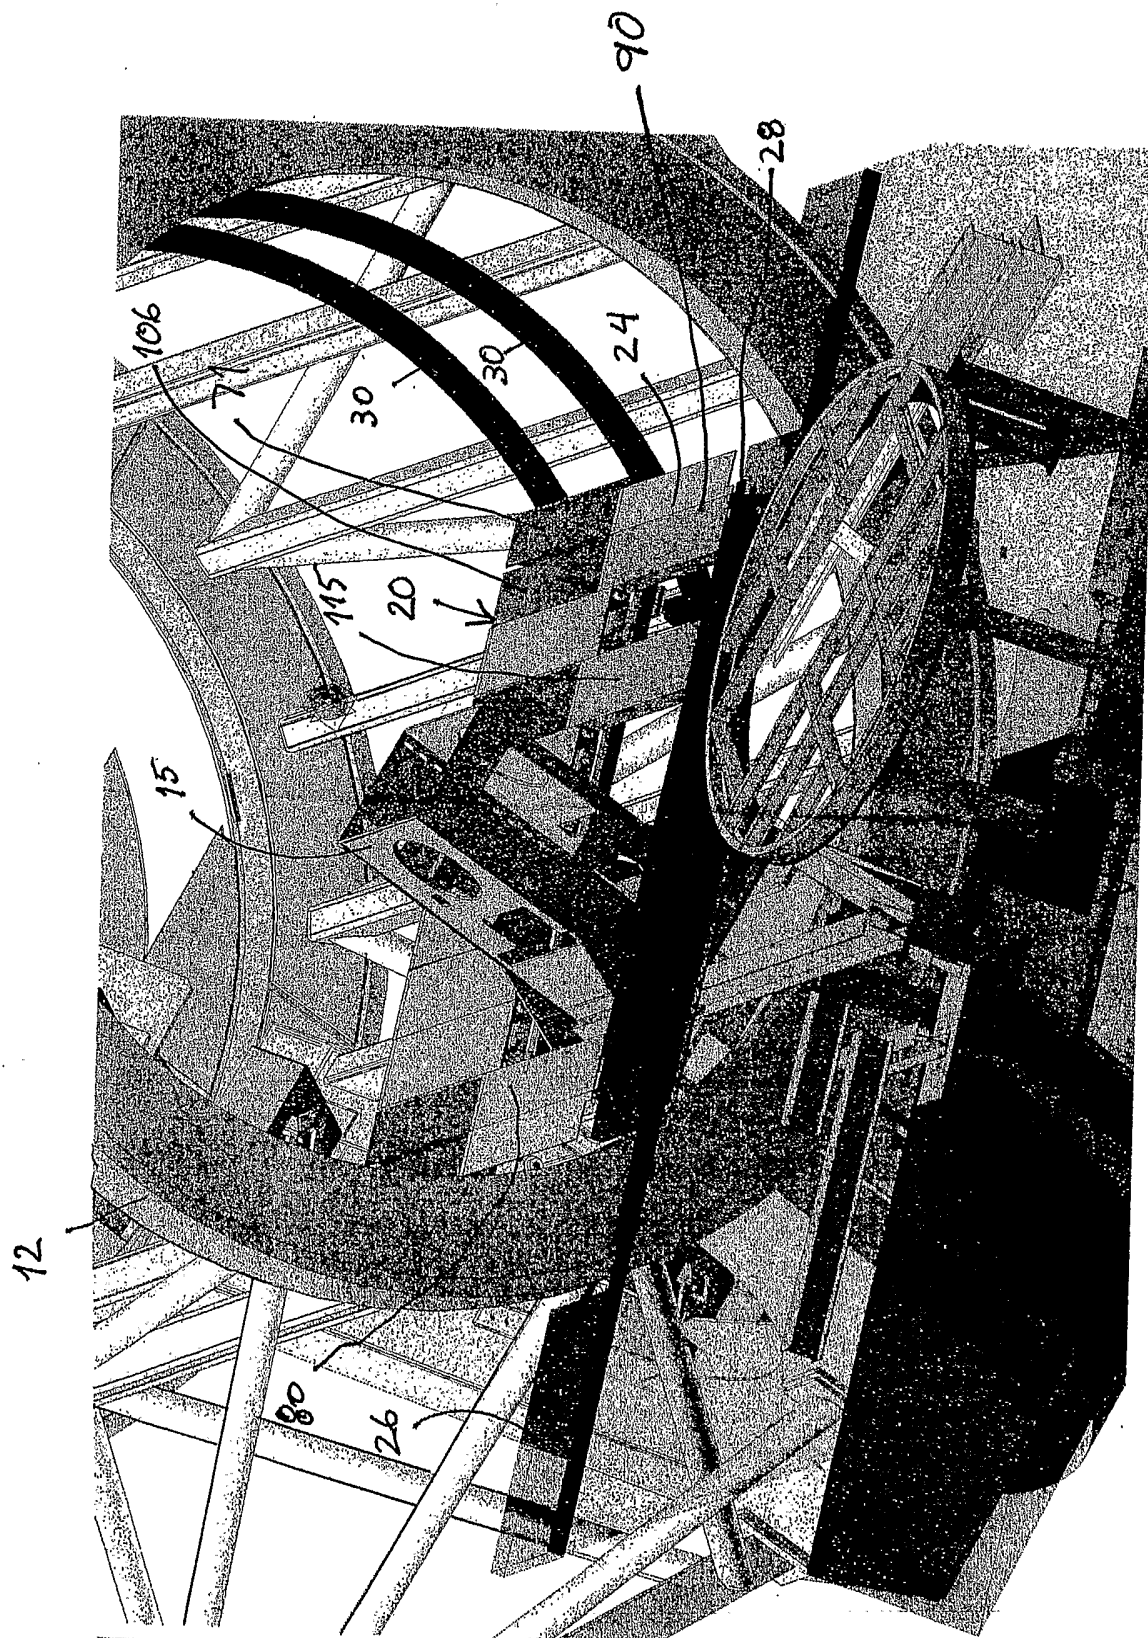


FIG. 4

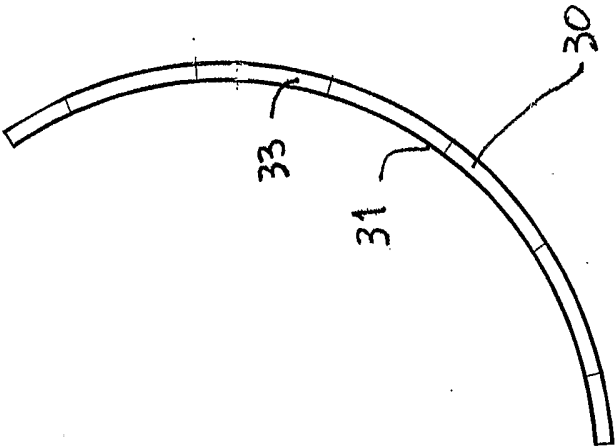


FIG. 5

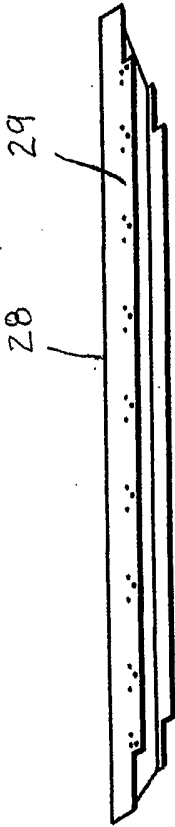


FIG. 6a

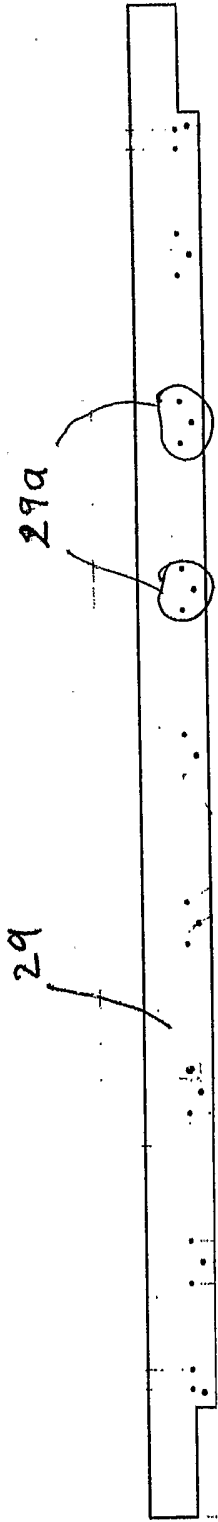


FIG. 6b

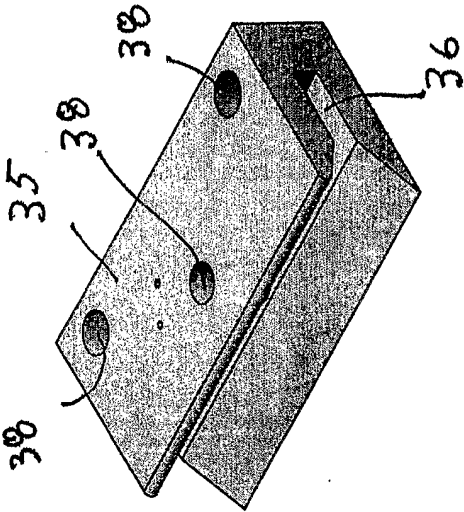


FIG. 7a

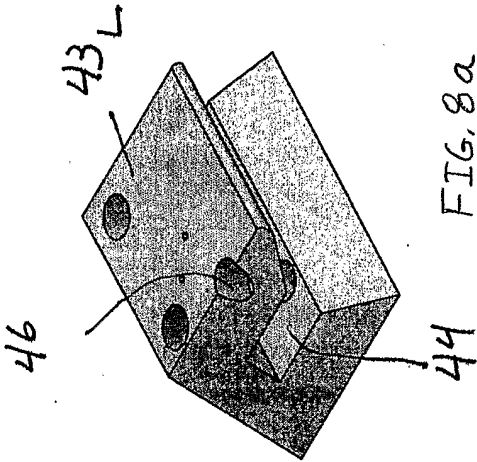


FIG. 8a

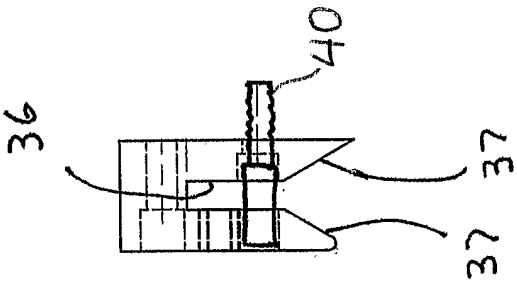


FIG. 7b

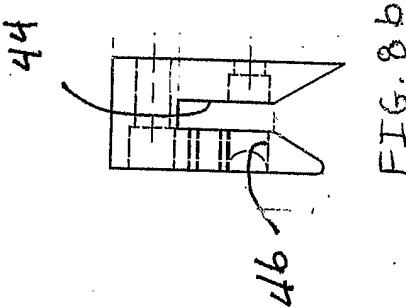


FIG. 8b

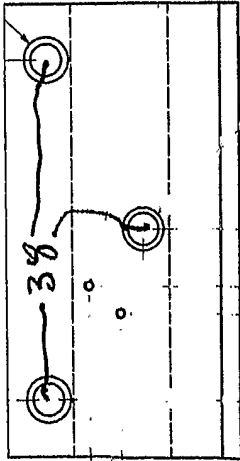


FIG. 7c

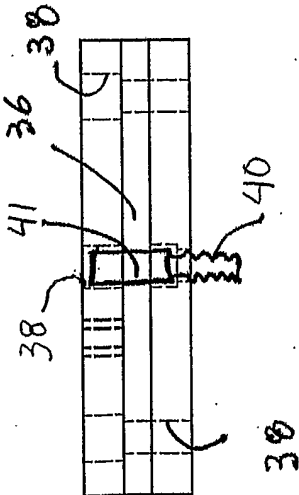


FIG. 7d


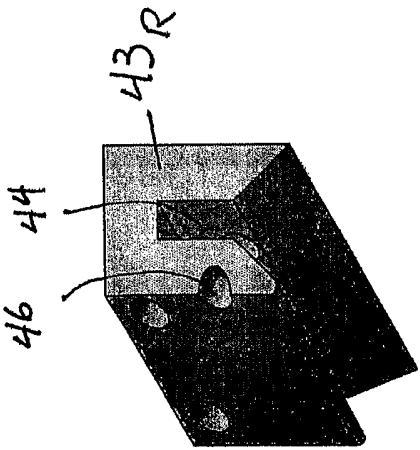


FIG. 9a

FIG. 9b

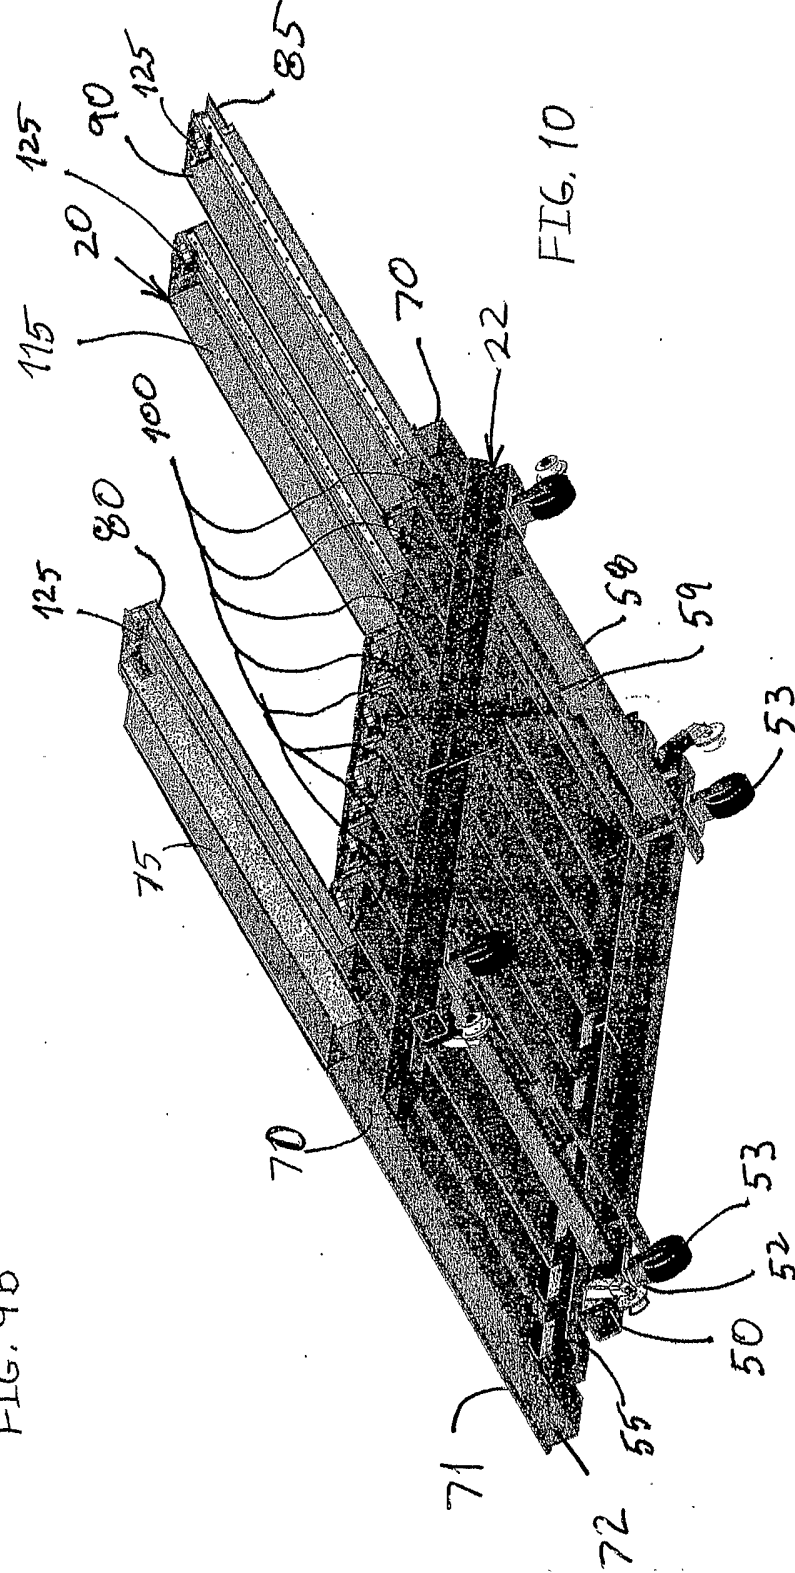
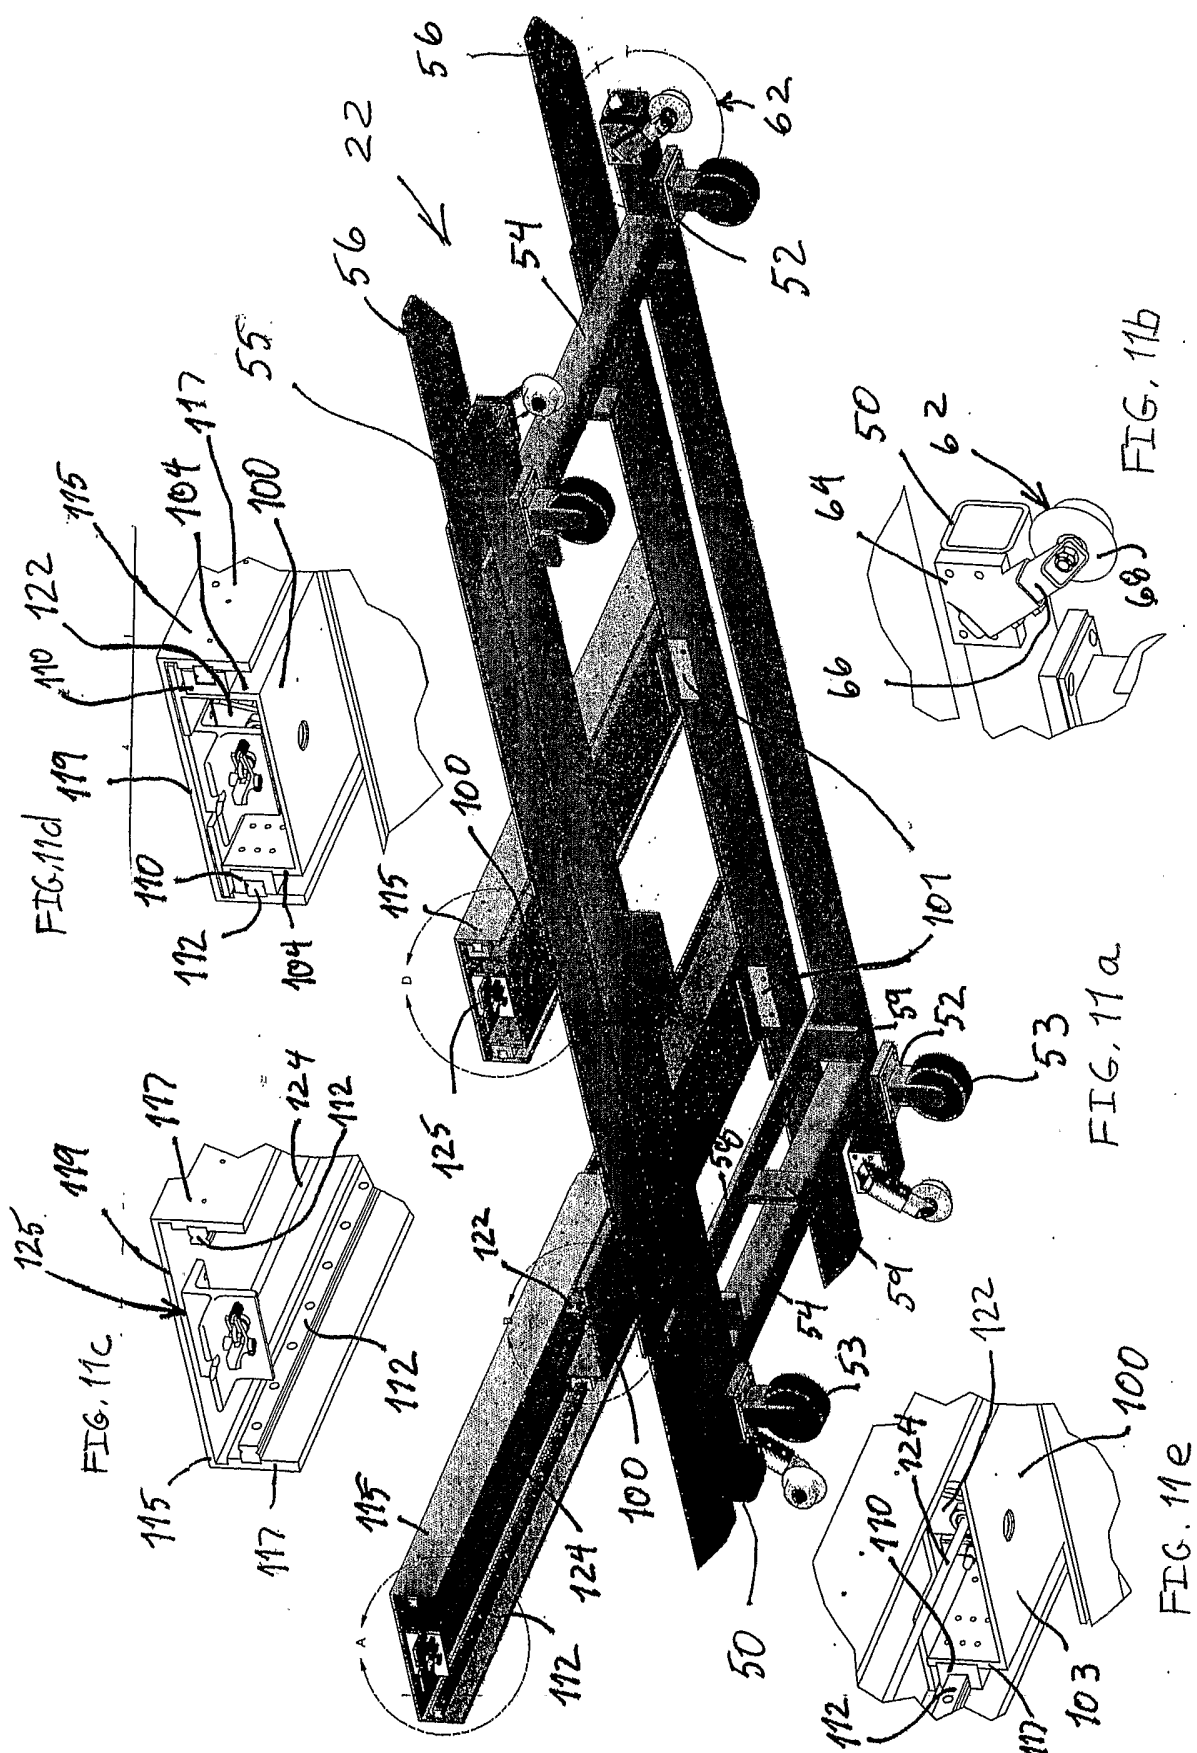
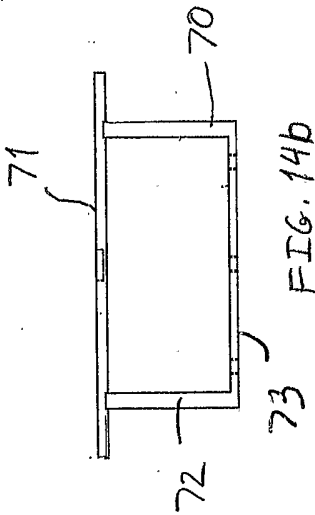
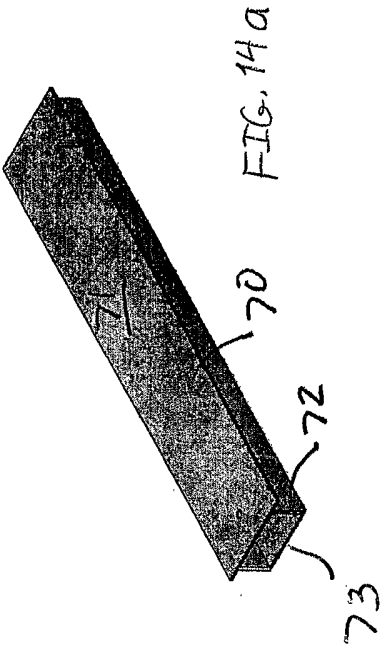
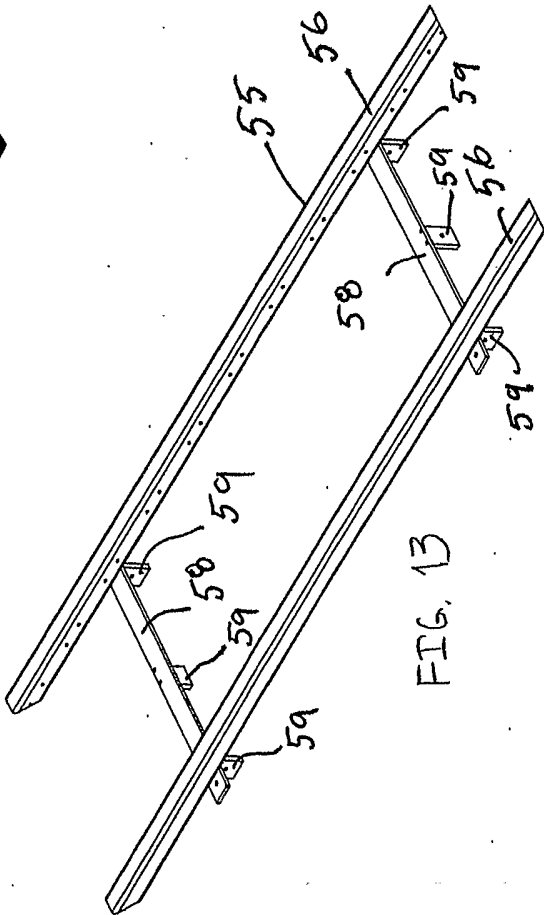
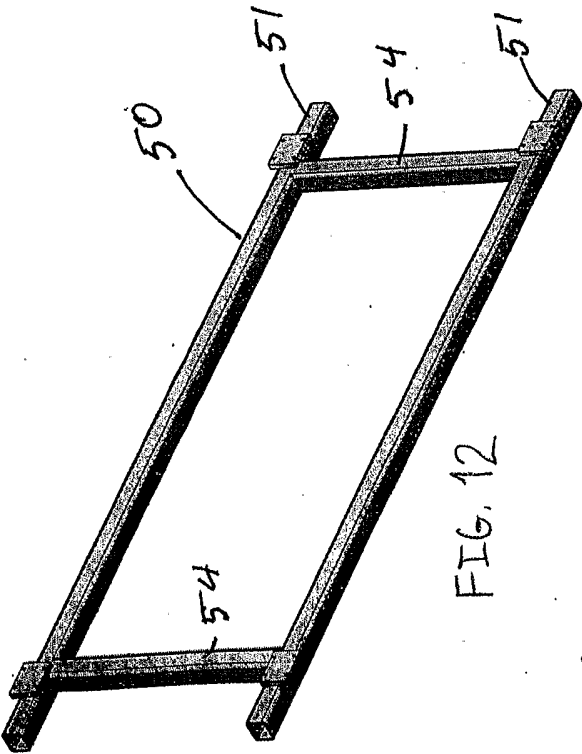


FIG. 10





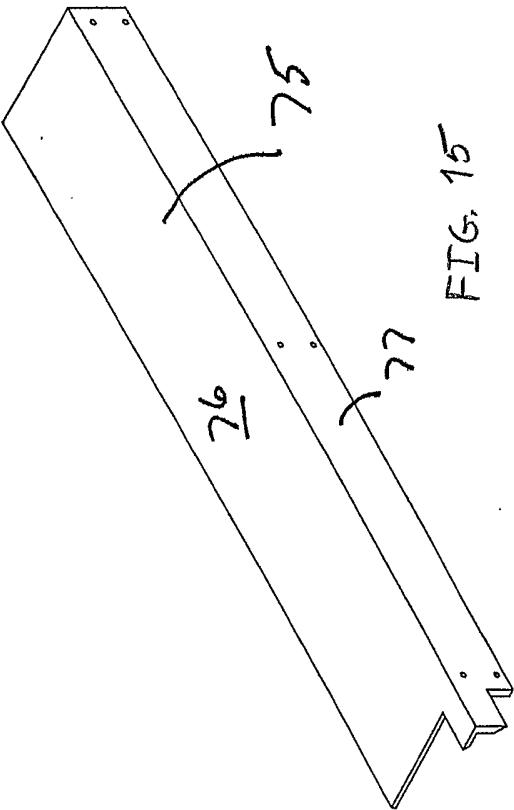


FIG. 15

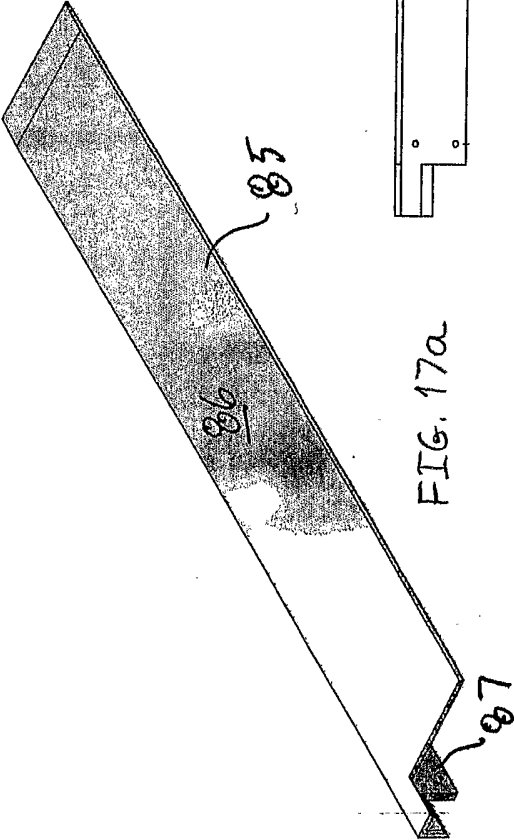


FIG. 17a

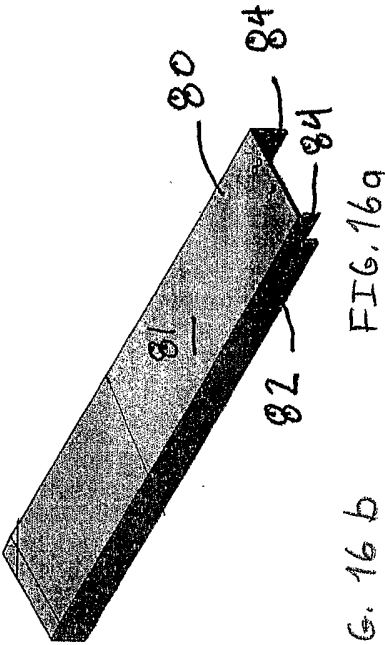


FIG. 16a




FIG. 16b

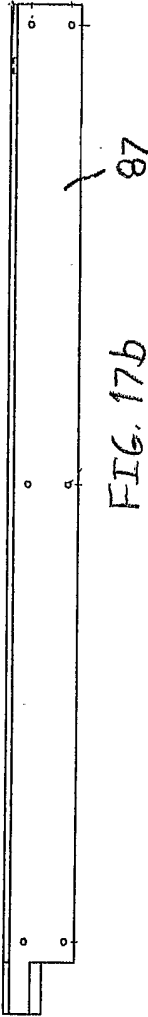
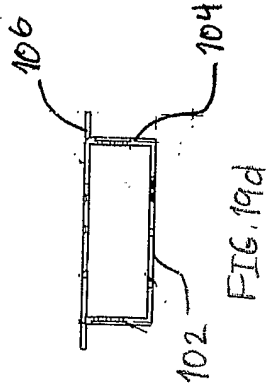
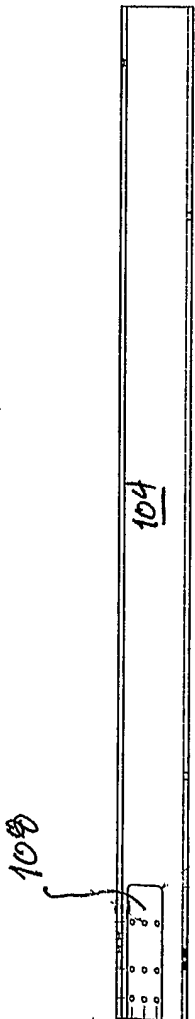
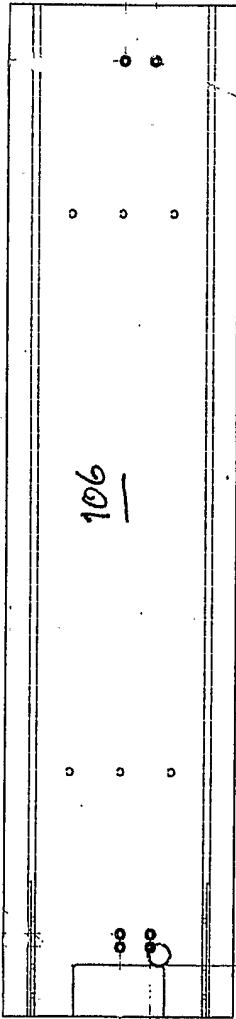
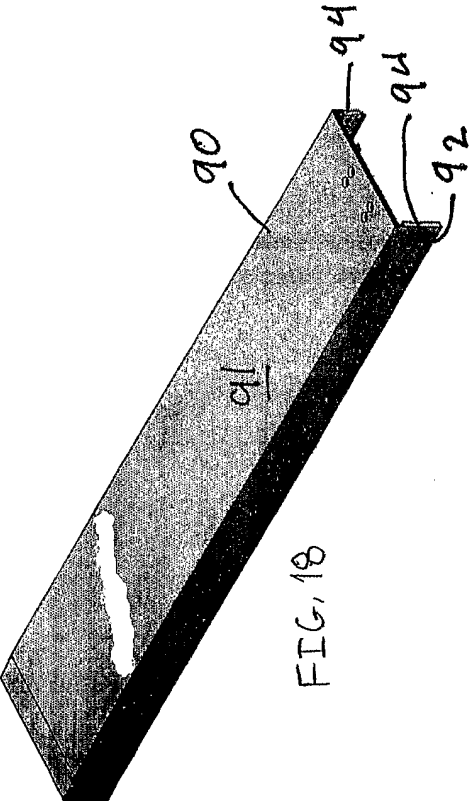
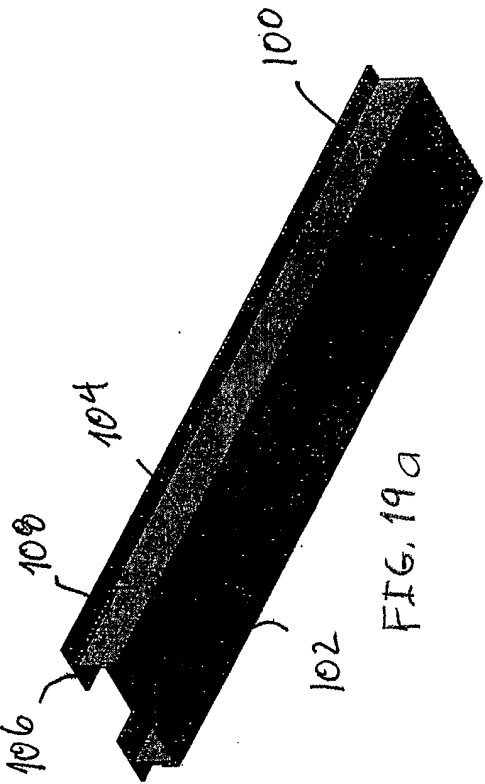
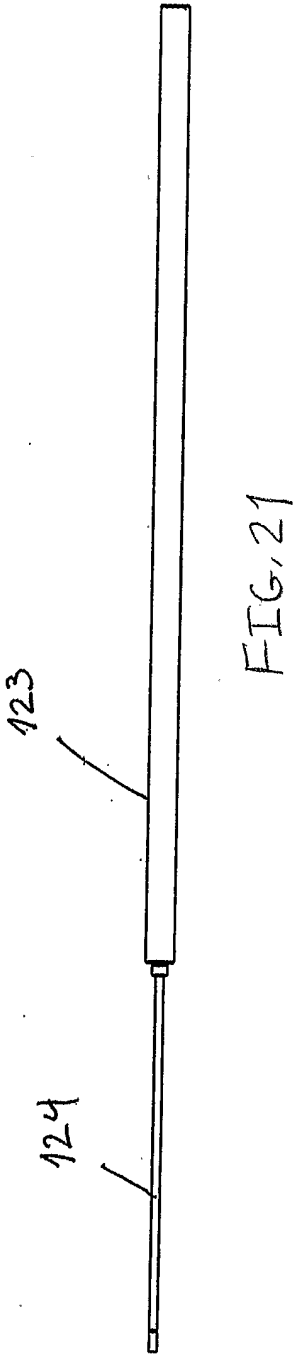
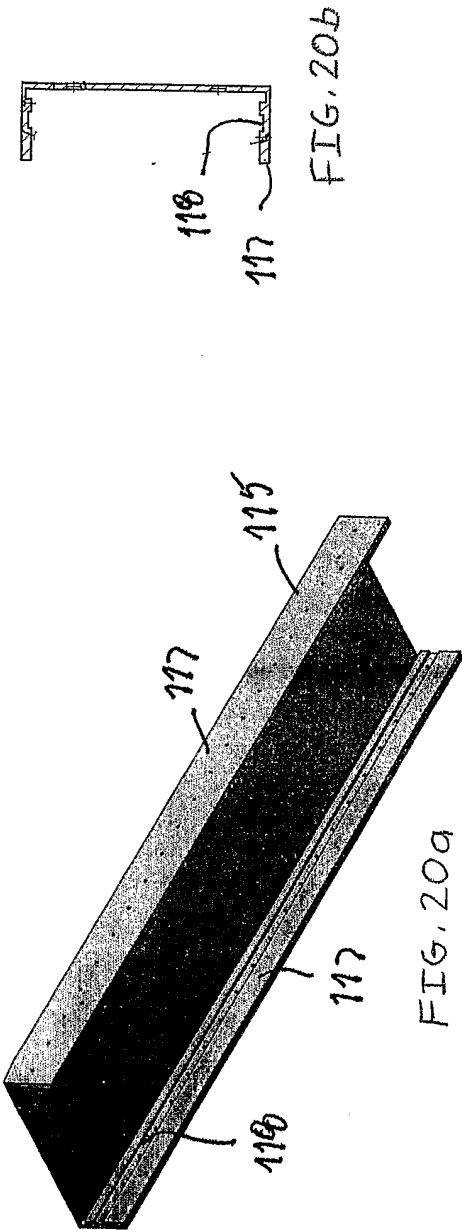
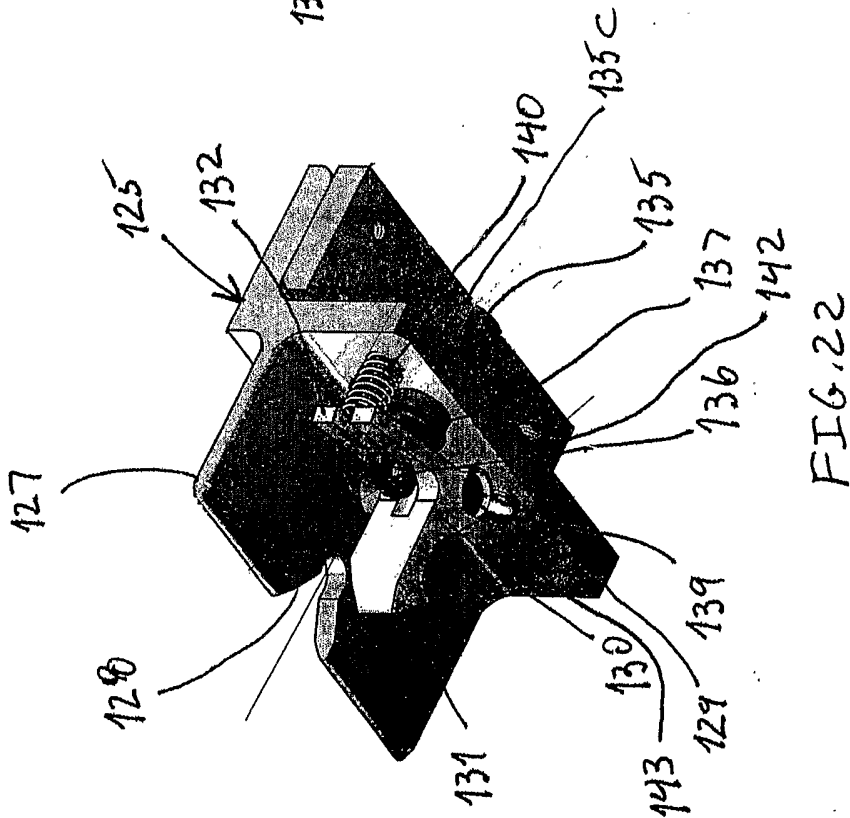
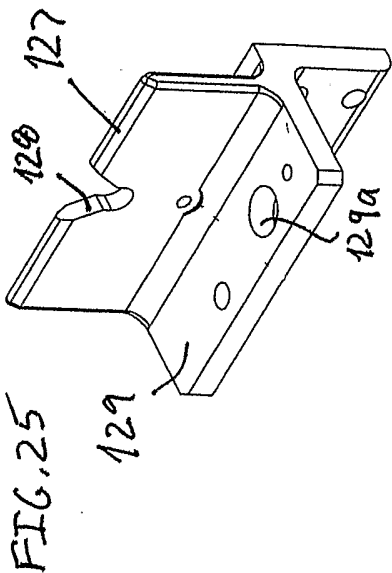
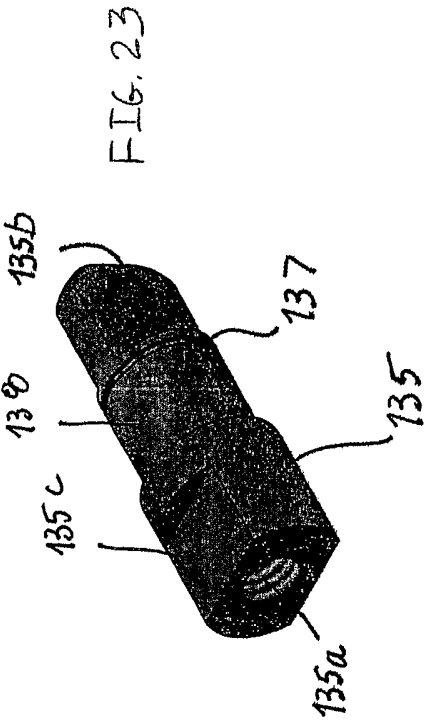


FIG. 17b







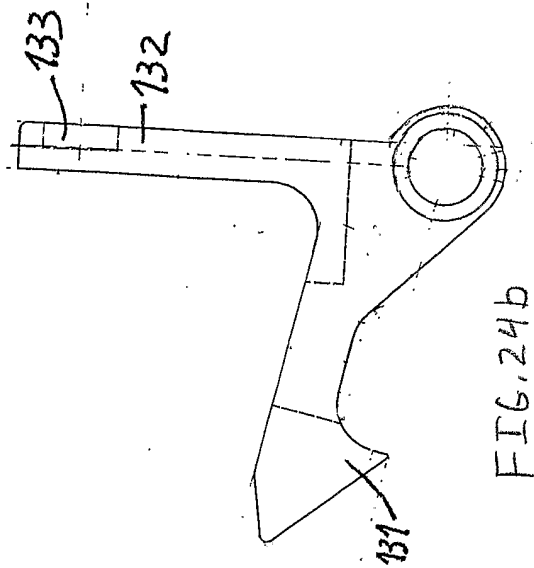


FIG. 24b

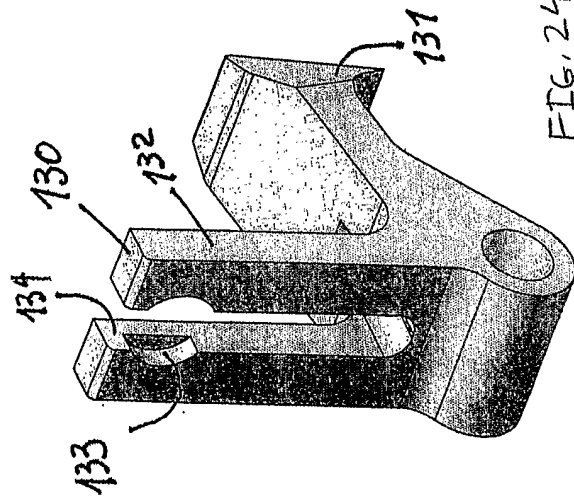


FIG. 24a

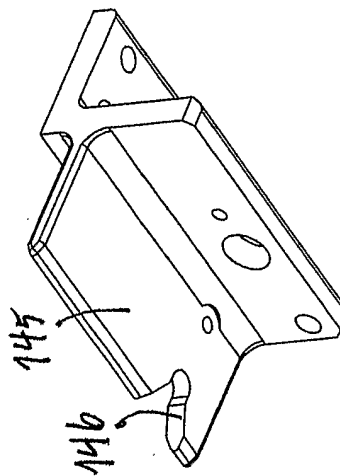


FIG. 26b

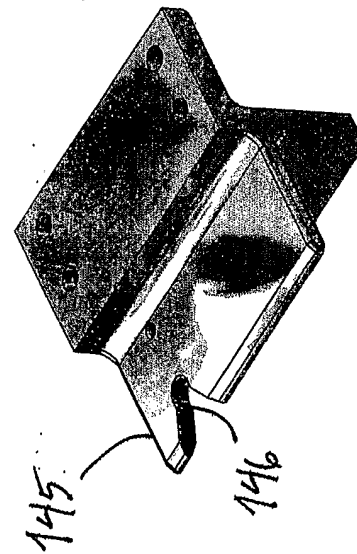


FIG. 26a

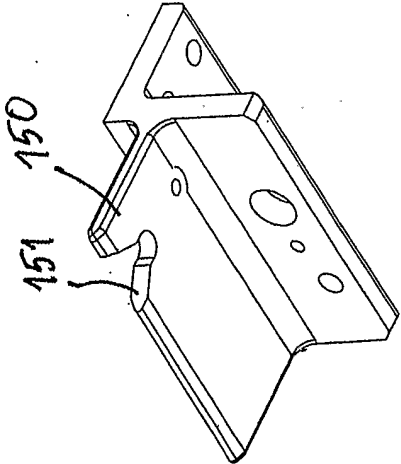
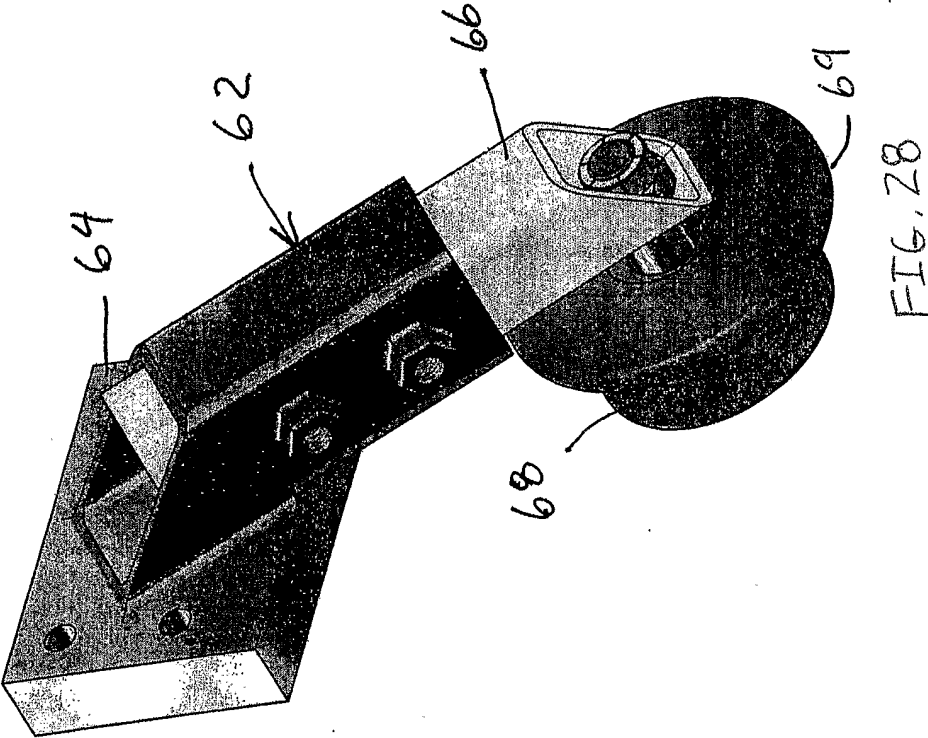


FIG. 27