



(72) DAVIDSON, PAUL, GB

(71) DAVIDSON, PAUL, GB

(51) Int.Cl.⁶ F16L 27/12, F16L 25/00

(30) 1997/11/18 (9724221.9) GB

(30) 1998/02/02 (9802001.9) GB

(30) 1998/06/11 (9812551.1) GB

(54) **JOINT**

(54) **JOINT**

(57) L'invention concerne un joint destiné au raccordement d'un tuyau (11), ou d'un autre élément tubulaire, avec une structure creuse (3) présentant un orifice d'entrée tubulaire (7). Ce joint comprend un élément de scellement annulaire (9) doté de premiers et seconds moyens de scellement (13 et 15). Les premiers moyens de scellements permettent un contact de scellement entre l'élément de scellement annulaire et l'orifice d'entrée. Les seconds moyens de scellement permettent un contact de scellement entre l'élément de scellement annulaire et l'élément tubulaire. L'élément de scellement annulaire et l'orifice d'entrée sont pourvus de moyens servant à assujettir ledit élément de scellement audit orifice d'entrée, afin d'empêcher tout déplacement axial entre ceux-ci, les seconds moyens de scellement entrant en contact avec la surface courbe extérieure de l'élément tubulaire, de telle sorte que l'on obtient un contact de scellement entre l'élément de scellement et l'élément tubulaire sur plusieurs positions axiales relatives situées entre ces éléments.

(57) A joint is provided for interconnecting a pipe (11) or other tubular element with a hollow structure (3) having a tubular inlet (7) thereto. The joint includes an annular sealing member (9) which is provided with first and second sealing means (13 and 15). The first sealing means provide sealing engagement between the annular sealing member and the inlet. The second sealing means provide sealing engagement between the annular sealing member and the tubular member. The annular sealing member and inlet are provided with means to secure said sealing member to said inlet to prevent axial movement therebetween, said second sealing means engaging the outer curved surface of the tubular member whereby sealing engagement may be effected between the sealing member and the tubular member over a plurality of relative axial positions therebetween.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16L	A2	(11) International Publication Number: WO 99/26005 (43) International Publication Date: 27 May 1999 (27.05.99)									
(21) International Application Number: PCT/GB98/03437 (22) International Filing Date: 18 November 1998 (18.11.98) (30) Priority Data: <table border="0"> <tr> <td>9724221.9</td> <td>18 November 1997 (18.11.97)</td> <td>GB</td> </tr> <tr> <td>9802001.9</td> <td>2 February 1998 (02.02.98)</td> <td>GB</td> </tr> <tr> <td>9812551.1</td> <td>11 June 1998 (11.06.98)</td> <td>GB</td> </tr> </table> (71)(72) Applicant and Inventor: DAVIDSON, Paul [GB/GB]; 18 Ploughmans Way, Tytherington, Macclesfield SK10 2UN (GB). (74) Agent: HARRISON GODDARD FOOTE; Belmont House, 20 Wood Lane, Leeds LS6 2AE (GB).		9724221.9	18 November 1997 (18.11.97)	GB	9802001.9	2 February 1998 (02.02.98)	GB	9812551.1	11 June 1998 (11.06.98)	GB	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
9724221.9	18 November 1997 (18.11.97)	GB									
9802001.9	2 February 1998 (02.02.98)	GB									
9812551.1	11 June 1998 (11.06.98)	GB									
(54) Title: JOINT (57) Abstract <p>A joint is provided for interconnecting a pipe (11) or other tubular element with a hollow structure (3) having a tubular inlet (7) thereto. The joint includes an annular sealing member (9) which is provided with first and second sealing means (13 and 15). The first sealing means provide sealing engagement between the annular sealing member and the inlet. The second sealing means provide sealing engagement between the annular sealing member and the tubular member. The annular sealing member and inlet are provided with means to secure said sealing member to said inlet to prevent axial movement therebetween, said second sealing means engaging the outer curved surface of the tubular member whereby sealing engagement may be effected between the sealing member and the tubular member over a plurality of relative axial positions therebetween.</p>											

JOINT

5 This invention relates to joints and in particular to joints and hand tools for connecting a pipe or other tubular elements to a hollow structure having a tubular inlet thereto.

10 Joints of the type with which this invention is concerned have many applications, examples being joints for use in connection with central heating systems, air conditioning systems, vehicles, white goods, petrol pumps, fire fighting equipment, heater batteries, tank fittings and three way valve systems.

15 Current joints of the type with which this invention is concerned are normally such that they are difficult to install and a major reason for this is that they do not allow relative axial movement between the pipe and the hollow structure to which the pipe is to be connected.

20 According to the present invention there is provided a method of interconnecting an end of a pipe with a hollow structure having a screw-threaded tubular inlet thereto, the method comprising applying an annular sealing member around the pipe, said annular sealing member having a screw-threaded portion for engagement with the screw-threaded tubular inlet and being provided with first and second sealing means, said first sealing means being for sealing engagement between said annular sealing member and said inlet and said second sealing means being for sealing engagement
25 between said annular sealing member and said pipe end, distorting outwardly the end of the pipe around at least a portion of the periphery thereof, and effecting screw-threaded engagement between the annular sealing member and the tubular inlet, whereby sealing engagement may be effected between said sealing member and said pipe end over a plurality of relative axial positions therebetween.

30

Accordingly, a joint formed by a method allows relative axial movement between the members to be joined together. Such an arrangement allows easy positioning of the members into their appropriate positions relative to each other and subsequent operation to form an effective joint between the members.

5

The annular sealing member is a single member provided with means for accommodating the first and second sealing means as well as a screw threaded portion or other means for engaging the tubular inlet. The annular sealing member may also be provided with a recess so as to accommodate a protrusion or crimp or
10 upset of a pipe. The recess is preferably substantially continuous about the periphery of the pipe

The first and second sealing means may be any suitable sealing elements, for instance, O-rings.

15

The sealing member and the pipe may be put into sealing engagement with each other over a plurality of discrete relative axial positions or over a continuous range of positions therebetween. Preferably, the pipe is provided with some form of radially and outwardly extending protrusion which limits the range of axial positions due to
20 engagement between said protrusion and another element of the joint, for instance, the annular sealing member.

X

In another embodiment of the invention the pipe is provided with two radially and outwardly extending protrusions. Preferably, the first of said protrusions protrudes a
25 sufficient distance about the periphery of a pipe so as to engage with the joint of the invention and prevent the pipe from being pulled out of engagement with same. More preferably said first protrusion is suitably located a relatively short distance from the end of the pipe. Preferably, the second protrusion is relatively small with respect to the first protrusion, and more preferably still said second protrusion is of
30 marginally smaller dimensions than the recess portion in the annular sealing member. Thus, in use and in position, said second protrusion is accommodated within the

recess portion of the annular sealing member and is allowed sufficient movement therein so as not to impede rotational movement of the pipe.

5 It will be appreciated that provision of two protrusions, the first protrusion acting as a pipe-stop just outside the joint itself, and the second protrusion being loosely accommodated within the joint itself, allows for limited axial movement whilst providing a secure joint.

10 The invention also provides a joint for use in the method of the invention, the joint being as defined above in connection with said method.

There may also be provided with the joint a tool comprising means for distorting or crimping or flaring the end of a pipe. Ideally the tool is manually operated and the tool may be of a scissors type or a clamping type action. In the scissors type
15 embodiment, the tool comprises pivotally connected upper and lower jaws, wherein the lower jaw has corresponding recesses into which spikes or ribs of the upper jaw fit when the jaws are closed together about at least a part of a pipe. Alternatively the tool comprises a clamp, wherein an upper surface of said clamp is provided with recess portions and a lower surface is provided with corresponding spikes or ridges
20 or the like which fit into the recesses in a clamped position. In use, the pipe is sandwiched between the two clamping surfaces or scissors jaws and sufficient force is applied so as to impart a crimp or ridge or groove onto the pipe surface.

25 Embodiments of the invention will now be described, by way of examples only, and with reference to the accompanying drawings, in which:-

Figure 1 shows a cross-section through a first embodiment of a joint of the invention;

30 Figure 2 shows an embodiment of Figure 1 but with different relative axial positions between the members of the drawing;

Figure 3 shows a cross-section through a second embodiment of a joint of the invention;

Figure 4 shows a cross-section through a third embodiment of a joint of the invention;

5 Figure 5 shows a cross-section through a fourth embodiment of a joint of the invention;

Figure 6 shows a cross-section through a fifth embodiment of a joint of the present invention;

10 Figure 7 shows a cross-section through a sixth embodiment of a joint of the invention;

Figure 8 shows a cross-section through a seventh embodiment of a joint of the invention;

Figure 9 shows a tool for distorting or crimping the end of a pipe for use with a joint of the present invention;

15 Figure 10 shows an alternative embodiment of a tool for distorting or crimping the end of a pipe for use with a joint of the present invention;

Figure 11 shows a cross-section through a ninth embodiment of a joint of the invention;

20 Figure 12 shows the tool of Figure 10 placed about the joint of Figure 11 at the start of the procedure to distort or crimp the end of a pipe; and

Figure 13 shows progression of Figure 12.

Referring to Figures 1 and 2 of the accompanying drawings, a joint 1 lies between a pipe receiving fitting 3 of a central heating radiator and a radiator valve (not shown).

25 Pipe receiving fitting 3 is in the form of a hollow sphere 5 from which a short tubular inlet 7 extends. The fitting 3 is provided with a short length of pipe (not shown) integral therewith and which is welded to the body of the radiator (not shown). Tubular inlet 7 is threaded on its inner surface.

30 The joint comprises two parts, an annular sealing member 9 and a tubular member 11.

The annular sealing member 9 is in the form of a short tube of which a first portion 11 has a relatively thick tubular wall and is provided with a threaded outer surface which is for engagement with the threaded inner surface of inlet 7 of pipe receiving fitting 3.

Over the rest of its axial length, annular sealing member 9 has a relatively thinner wall which is stepped axially to provide two O-ring accommodating portions 13 and 15.

As seen in Figures 1 and 2, O-ring accommodating portion 13 is in the form of an outwardly facing recess which is shaped and dimensioned so as to hold an O-ring 17 and allow it to be compressed against the radial end surface 19 of inlet 7 of fitting 3. This is achieved by the recess 13 being provided with two spaced apart radial walls, the radial wall remote from inlet 7 extending radially outwardly beyond the inner radial wall. As a result the O-ring 17 can be trapped between the outer radial wall and the surface 19, as illustrated in Figures 1 and 2.

The second O-ring accommodating portion 15 lies adjacent the first O-ring accommodating portion and is in the form of a recess facing radially inwardly. This recess accommodates a second O-ring 21 which is for sealing engagement between the annular sealing member 9 and the tubular member 11.

Tubular member 11 is provided with a radially outwardly directed end flange 23 which may be formed by deforming the end of a uniform tubular member.

In order to form a secure joint between a pipe having associated therewith tubular member 11 and the pipe receiving fitting 3, the tubular member 11, having the annular sealing member 9 positioned thereabout, is introduced into inlet 7. The outer threaded portion of annular sealing member 7 is brought into engagement with the inner threaded section of inlet 7 and annular sealing member 9 is turned until O-ring

17 is compressed between the annular sealing member and the inlet 7. At this position, O-ring 21 is in firm sealing engagement with tubular member 11.

Figure 2 illustrates the same joint but with the tubular member 11 shown in a different axial position relative to pipe receiving fitting 3. Figures 1 and 2 illustrate the full range of axial positions between member 11 and fitting 3, thereby allowing for ease of fitting of the joint and for the accommodation of different relative positions between the pipe and the radiator to which it is to be connected.

It should be appreciated that the use of the joint such as that described above allows the central heating radiator to be rotated relative to the pipes to which it is connected since fitting 3 may be rotated with annular sealing member 9 about tubular member 11. Accordingly such joints provided between two coaxially aligned valves of a radiator allow the radiator to be lifted and hingedly lowered to give access to the wall there behind for maintenance and decoration without use of tools or loosening any plumbing connection.

Referring now to Figure 3 of the accompanying drawings, a second embodiment of a joint in accordance with the present invention is similar to the embodiments shown in Figures 1 and 2, the main difference being that the annular sealing member 71 carries an internal threaded section 73. Tubular inlet 75 carries an outwardly facing threaded section 77 for engagement with section 73 of annular sealing member 71.

Referring to Figure 4 of the accompanying drawings, a third embodiment of a joint of the present invention is shown in use providing sealing of, for instance, an outlet pipe 81 into the wall 83 of a tank. In this case the annular sealing member 85 is in the form of a short tube of which a first portion 87 is shaped to provide an internal recess for accommodating an O-ring 89. Extending longitudinally from portion 87 is an externally threaded portion 91. As illustrated in Figure 5, annular sealing member 85 surrounds pipe 81 with O-ring 89 in sealing engagement with the wall of pipe 81.

A further O-ring 93 is located around threaded portion 91 adjacent O-ring accommodating portion 87.

- 5 The joint is mounted into the tank wall with threaded portion 91 being in threaded engagement with a backing nut 95 welded to the rear of the tank wall 83 about the entry hole therein.

10 Pipe 81 is provided with an outwardly extending flange or crimped portion 97 which might be continuous or discontinuous around the periphery of the pipe. This portion 97 prevents the pipe from being pulled out of engagement with the joint. However subject to this limitation, axial movement between the pipe and the joint is possible.

15 An advantage of a tank joint as described above is that the inlet pipe may be fitted to the bottom of the tank and then pushed up into the tank to provide a clearance between the bottom of the tank and the end of the pipe of an appropriate amount, say of the order of 5cm. With currently available arrangements, the inlet is provided in the side of the tank because no axial movement is possible between the pipe and the tank.

20

Referring to Figure 5 of the accompanying drawings, there is illustrated a joint for interconnecting two pipes 101 and 103. The joint include a substantially tubular member 105 which has two externally threaded portions 107 and 109, longitudinally separated from each other. Internally tube 105 includes a central section 111 of relatively small diameter and stepped outwardly therefrom at each end thereof, pipe accommodating portions 113 and 115 of somewhat larger diameter.

25

As shown in Figure 5, each pipe end 101 and 103 is provided with an outwardly directed flange 117 which extends about the periphery of the pipe end and is located a short distance from the very end of the pipe.

30

The joint is provided with a pair of annular sealing members 119, 121. Each annular sealing member is associated with a respective pipe end and each has an internally threaded section 123 for engagement with a respective threaded section of tube 107. Adjacent the threaded section is located an O-ring 125 which is for sealing between
5 the end of tube 107 and the annular sealing member 119 or 121.

Longitudinally adjacent O-ring 125 is an internally facing channel or recess 127 provided on the annular sealing member 119 or 121. Located within recess 127 is a further O-ring 129 providing sealing between the annular sealing member and the
10 pipe.

It can be seen that, with pipes 101 and 103 located in position, as shown in Figure 6, within respective annular sealing members 107 and 109 and with the latter tightened on threaded tube 105, sealing is provided between the two pipe ends via the annular
15 sealing members and the central tube.

Referring now to Figure 6 of the accompanying drawings, a joint for connecting together two pipes 131, 135 is similar to that described in connection with Figure 5 except that there is associated with each pipe end only a single sealing ring 135
20 which, as shown in Figure 7, is, in use, squeezed between the pipe end, the central threaded tube 137 and the respective annular sealing member 139 or 141.

Referring to Figure 7 of the accompanying drawings, a joint is shown for sealing between two pipes disposed at angles to each other, in this case at a right angle to
25 each other. The essential difference between this joint and that of Figure 7 is that the central tube 143 includes a right angle turn.

Referring now to Figure 8 of the accompany drawings, there is here shown an arrangement similar to that of Figures 7 and 8 except that it is for use in connecting
30 together three pipes and makes use of a T-junction central member 145 having three

threaded ends, each said end for mating with a corresponding annular sealing member.

Referring to Figure 9 of the accompanying drawings, there is depicted a simple tool
5 for distorting or crimping the end of a pipe for use in connection with one of the
above described joints of the present invention. The tool is a manual, scissor-action
implement having handles 121 and 123 which are pivotally connected together and
from which extend upper and lower jaws 125 and 127. Upper jaw 125 is provided
with a downwardly extending spike or rib 129. Lower jaw 127 is provided with a
10 corresponding recess 131 into which spike or rib 129 fits when the jaws of the
implement are closed together.

With the pipe end placed between the jaws 125, 127 of the implement, the jaws may
be manually caused to come together and pressure exerted on the handles of the
15 implement will cause the spike or rib 129 to deform the pipe near its end to form an
outwardly extending deformation on the pipe end. The deformation may be a single
deformation, a series of peripherally spaced apart deformations or, by running the
tool around the pipe end, a continuous peripheral distortion.

20 With reference to Figure 10 there is shown an alternative embodiment to the tool of
Figure 10. In this particular embodiment the tool 146 operates by a clamping
mechanism, the force being applied by turning of screw threaded means 145. Lower
clamping surface 147 is provided with protrusions 149 and 150 and upper clamping
surface 148 is provided with corresponding recesses 151 and 152. Protrusion 150 is
25 spiked so as to provide significant deformation to a pipe when clamped about a pipe,
in order that a ridge of sufficient dimensions is formed that is capable of abutting the
end of the annular sealing member and preventing disengagement of the joint.
Protrusion 149 is of relatively smaller dimensions and is intended to provide the pipe
with a relatively less prominent ridge or deformation following clamping about the
30 pipe.

Referring to Figure 11 there is shown a ninth embodiment of a joint in accordance with the present invention, which is similar to the embodiments shown in Figures 4 and 5, in that the annular sealing member 153 carries an internal threaded section 154. The main difference being the provision of a recess portion 155, the recess
5 portion is provided on the innermost surface of the annular sealing member, that surface being in contact with the pipe 156 and close to the end of the threaded section 154.

With reference to Figures 12 and 13, there is shown the tool 146 of Figure 10, placed
10 about the pipe and joint of Figure 11 at a preliminary stage in the process of crimping or deforming or grooving the pipe 156. Upper clamping surface 148 is allowed to rest on the outer surface 157 of the pipe and is located by abutting the end of the pipe against an inner surface 158 of the tool. Once in position, clamping force is applied by turning the threaded screw means 145. The clamping force is continually applied
15 (with reference to Figure 13) until the two protrusions on the lower clamping surface are positioned in their corresponding recesses in the upper clamping surface thereby effectively sandwiching the pipe therebetween. As a result of the applied clamping force the pipe is appropriately deformed so that it has the first and second protrusions imparted thereon.

20

The joint and tool of the present invention therefore presents a novel and elegant means for connecting a pipe or other tubular element to a hollow structure such as a water tank or the like, having a tubular inlet thereto. It also provides a joint that is easy to install and provides some relative axial movement for ease of maintenance
25 and the like whilst maintaining a strong and effective connection.

P15387.3

CLAIMS

1. A method of interconnecting an end of a pipe (11) with a hollow structure (3) having a screw-threaded tubular inlet (7) thereto, the method comprising applying an annular sealing member (9) around the pipe, said annular sealing member having a screw-threaded portion (11) for engagement with the screw-threaded tubular inlet and being provided with first and second sealing means, said first sealing means (17) being for sealing engagement between said annular sealing member and said inlet and said second sealing means (21) being for sealing engagement between said annular sealing member and said pipe end, distorting outwardly the end of the pipe around at least a portion of the periphery thereof, and effecting screw-threaded engagement between the annular sealing member and the tubular inlet, whereby sealing engagement may be effected between said sealing member and said pipe end over a plurality of relative axial positions therebetween.
2. A method according to Claim 1 in which the annular sealing member is provided with a recess to accommodate the outwardly distorted portion of the pipe end.
3. A method according to Claim 1 or Claim 2 wherein the recess is substantially continuous about the periphery of the pipe.
4. A method according to any of the preceding claims wherein one or both of the first and second sealing means is an O-ring.
5. A method according to any of the preceding claims in which the annular sealing member and the tubular member are such that they may be put into sealing engagement with each other over a plurality of discrete relative axial positions or over a continuous range of positions therebetween.

6. A method according to Claim 5 in which the pipe is provided with a radially and outwardly extending protrusion which limits the range of axial positions due to engagement between said protrusion and another element of the joint.

5 7. A method according to Claim 6 in which the tubular pipe is provided with two radially and outwardly extending protrusions.

8. A joint for use in the method of any of the preceding claims, the joint comprising an annular sealing member as defined in any of the preceding claims.

10

9. A joint according to Claim 8 and further including a tool for distorting outwardly the end of the pipe to which the joint is to be applied.

1/6
-119-

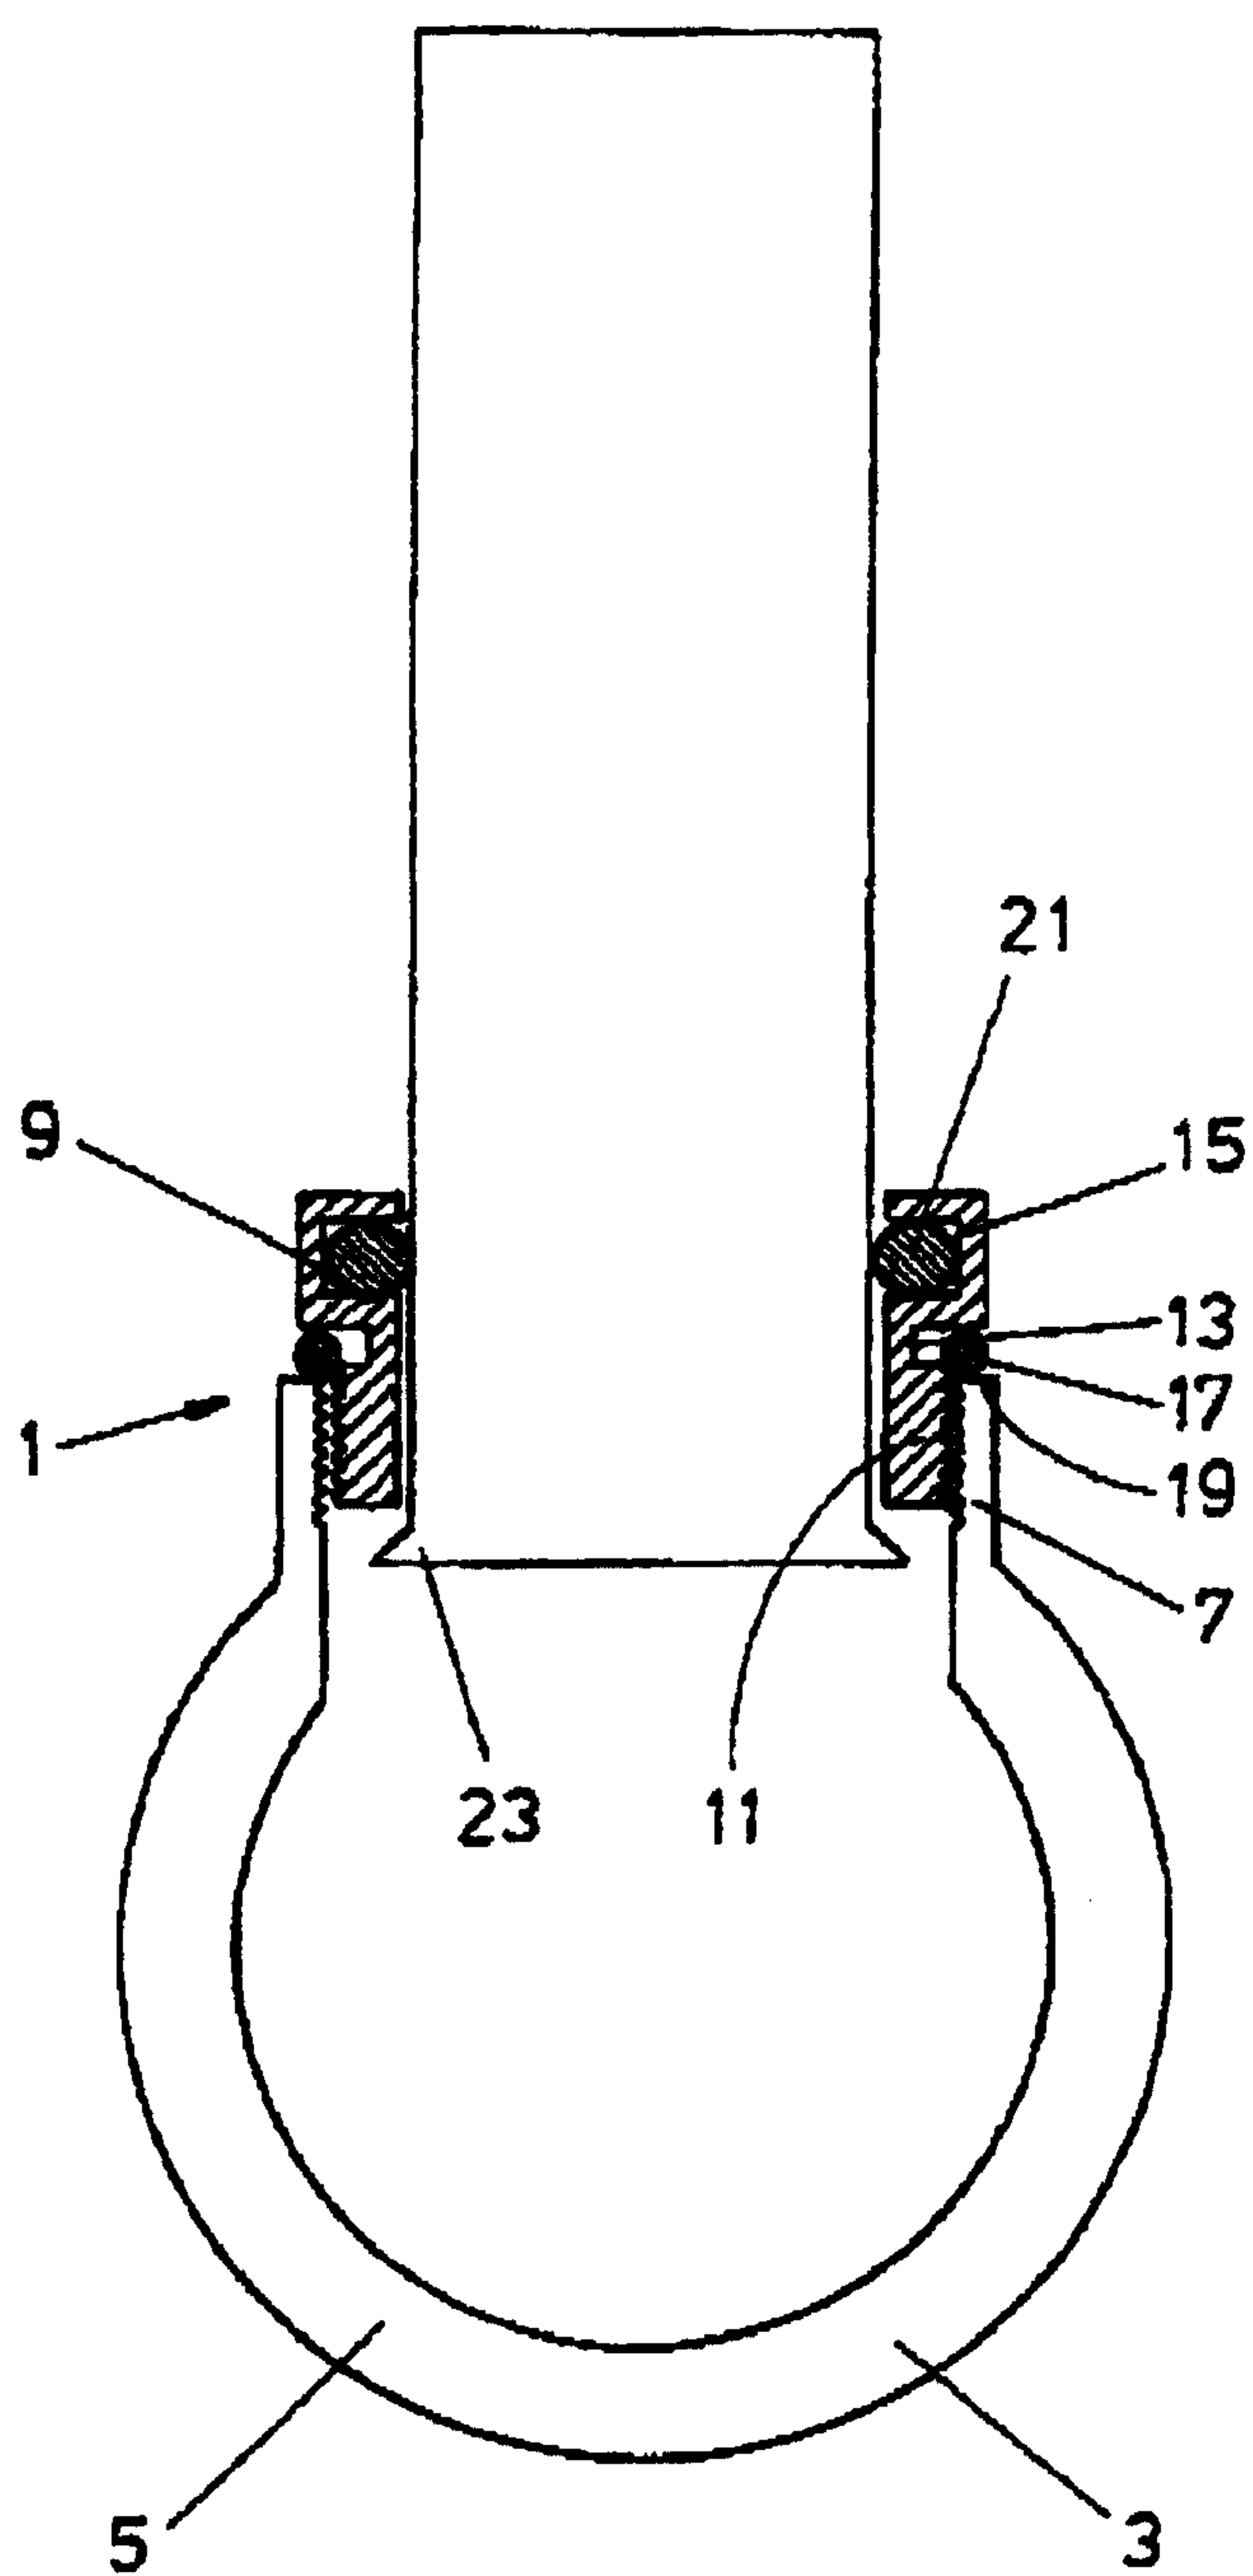


FIG. 1

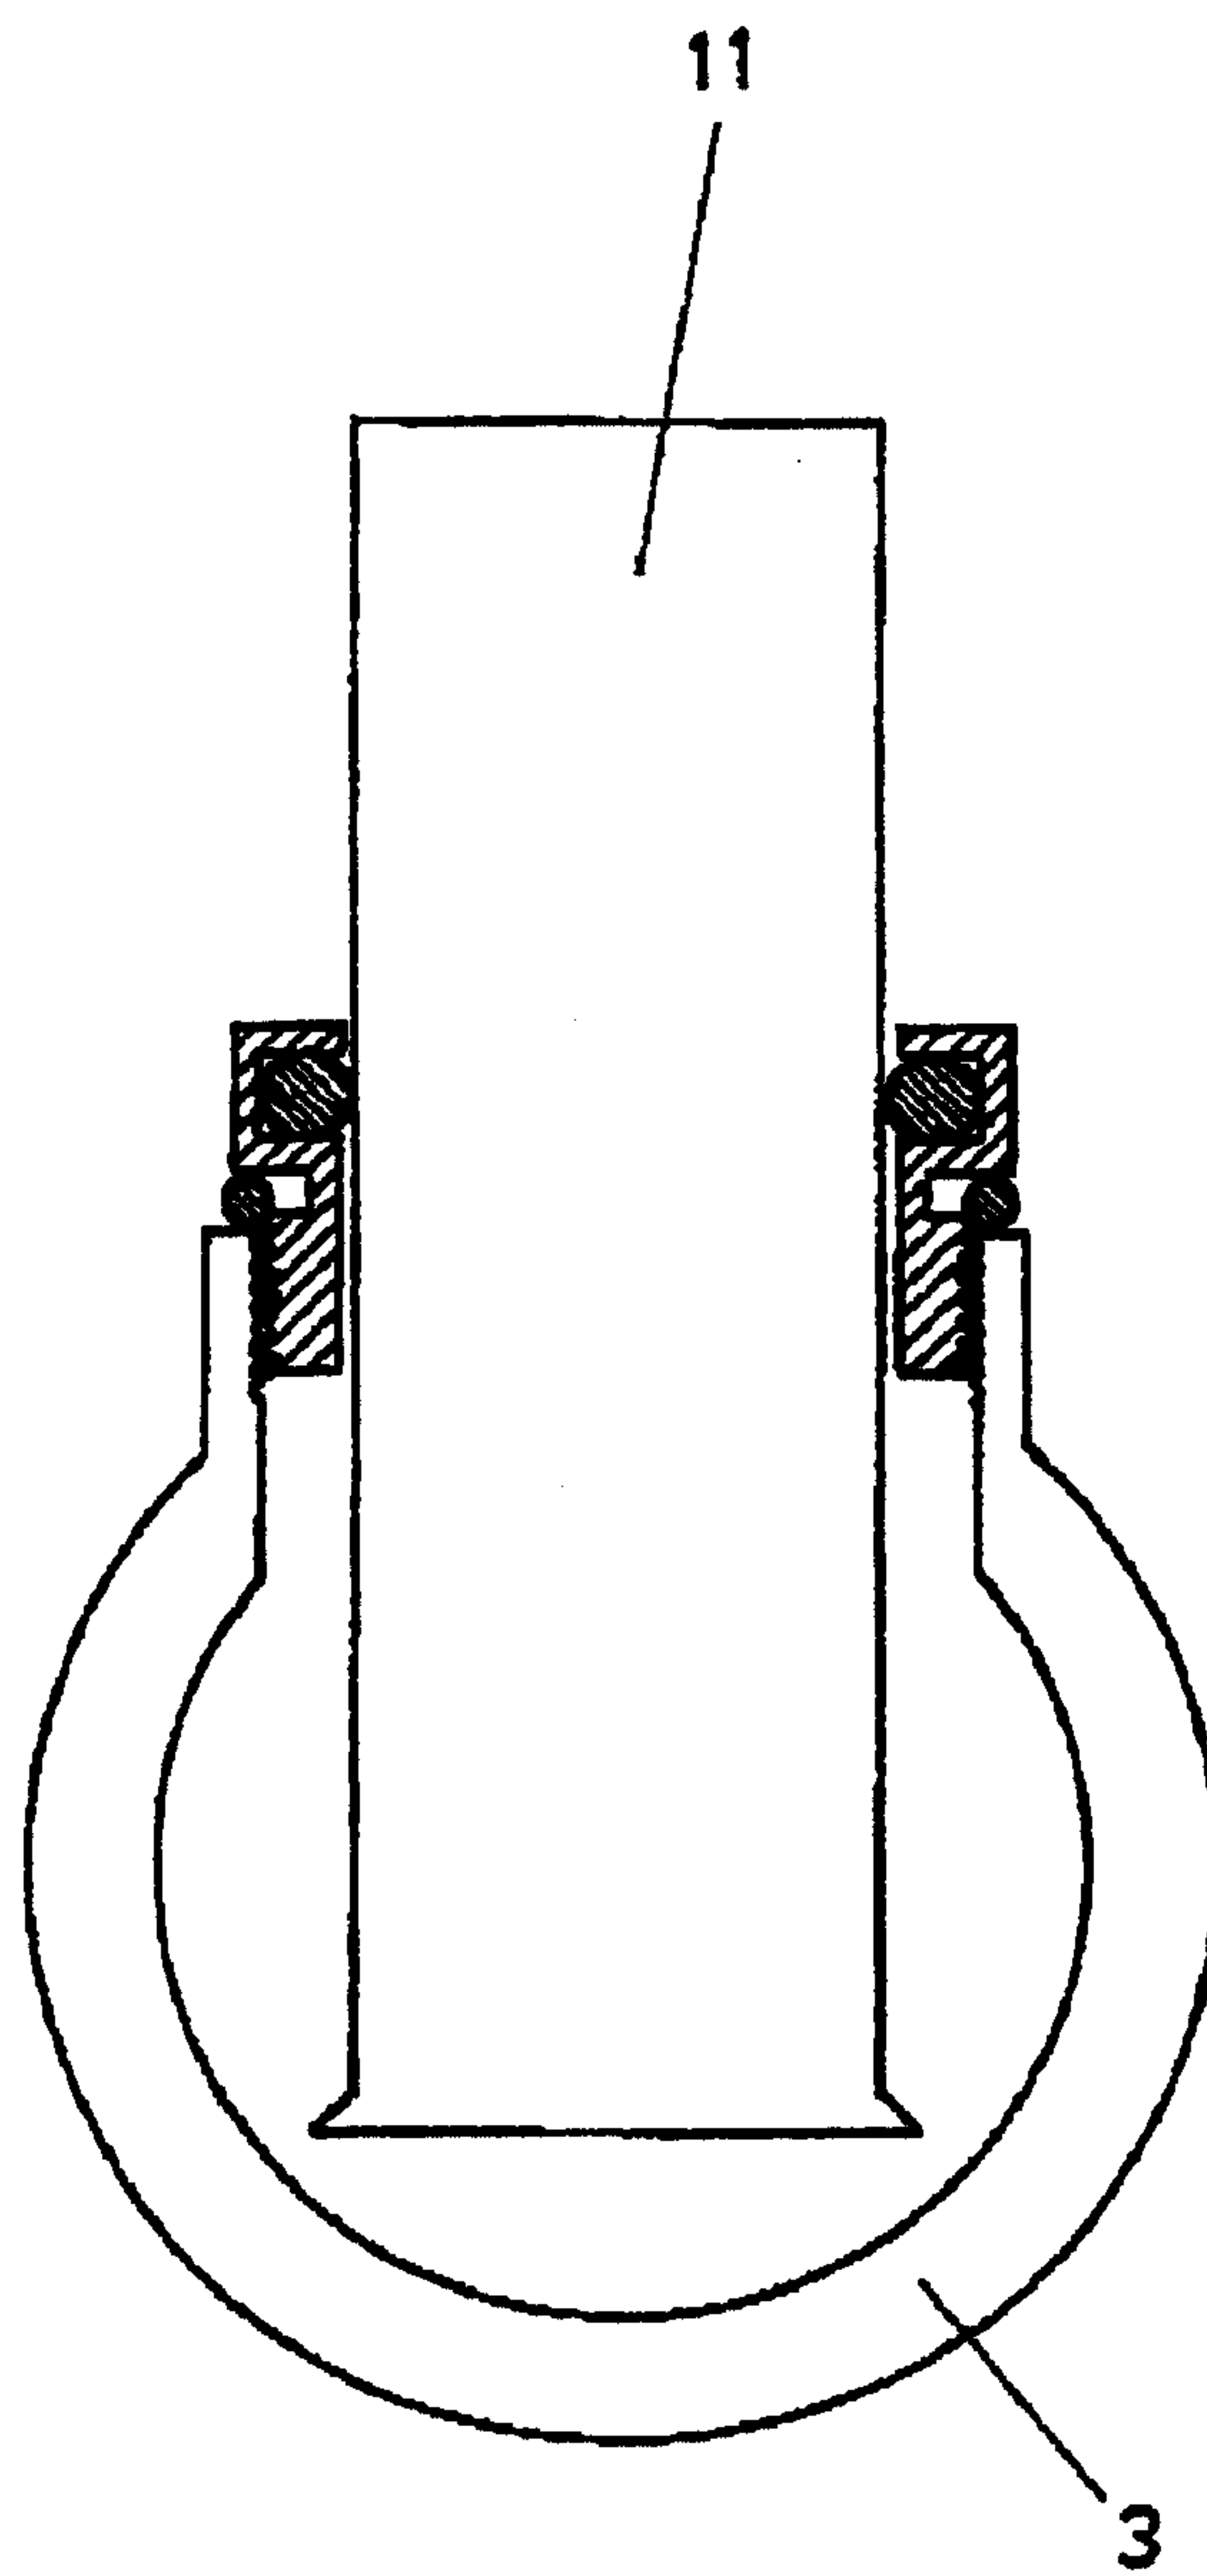


FIG. 2

2/6
-37-

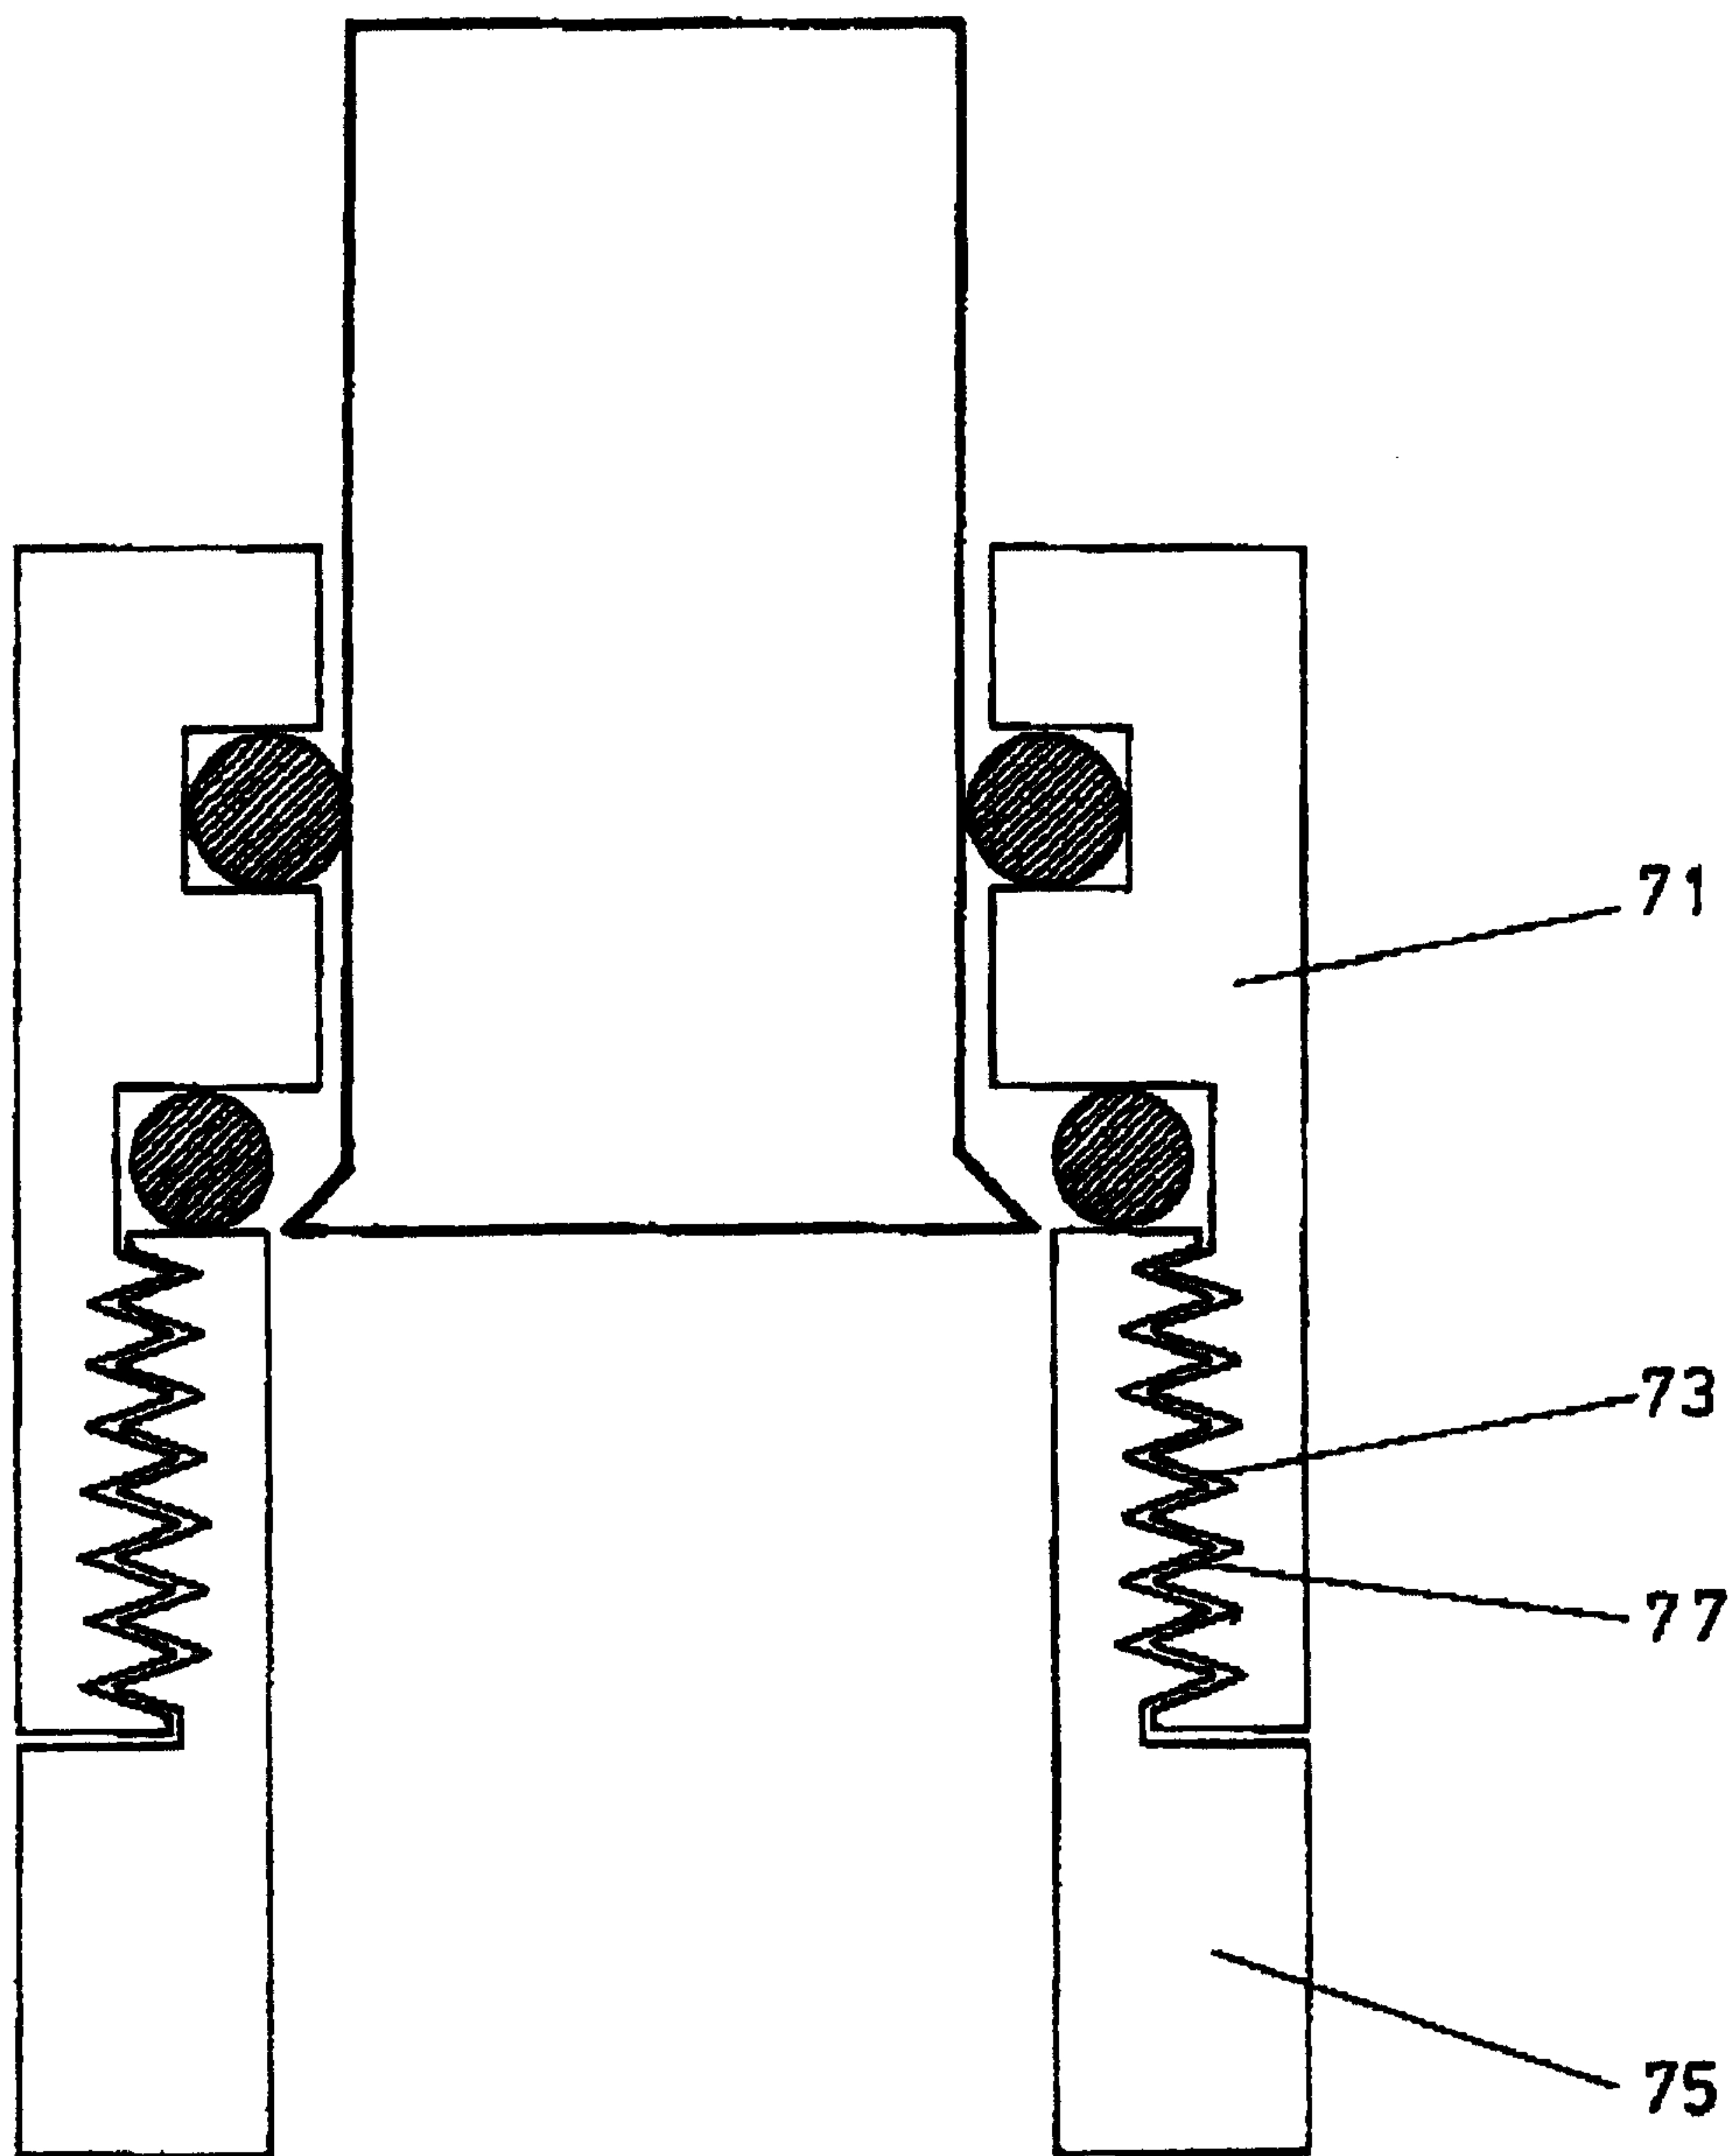


FIG. 3

3/6.
-1-7-

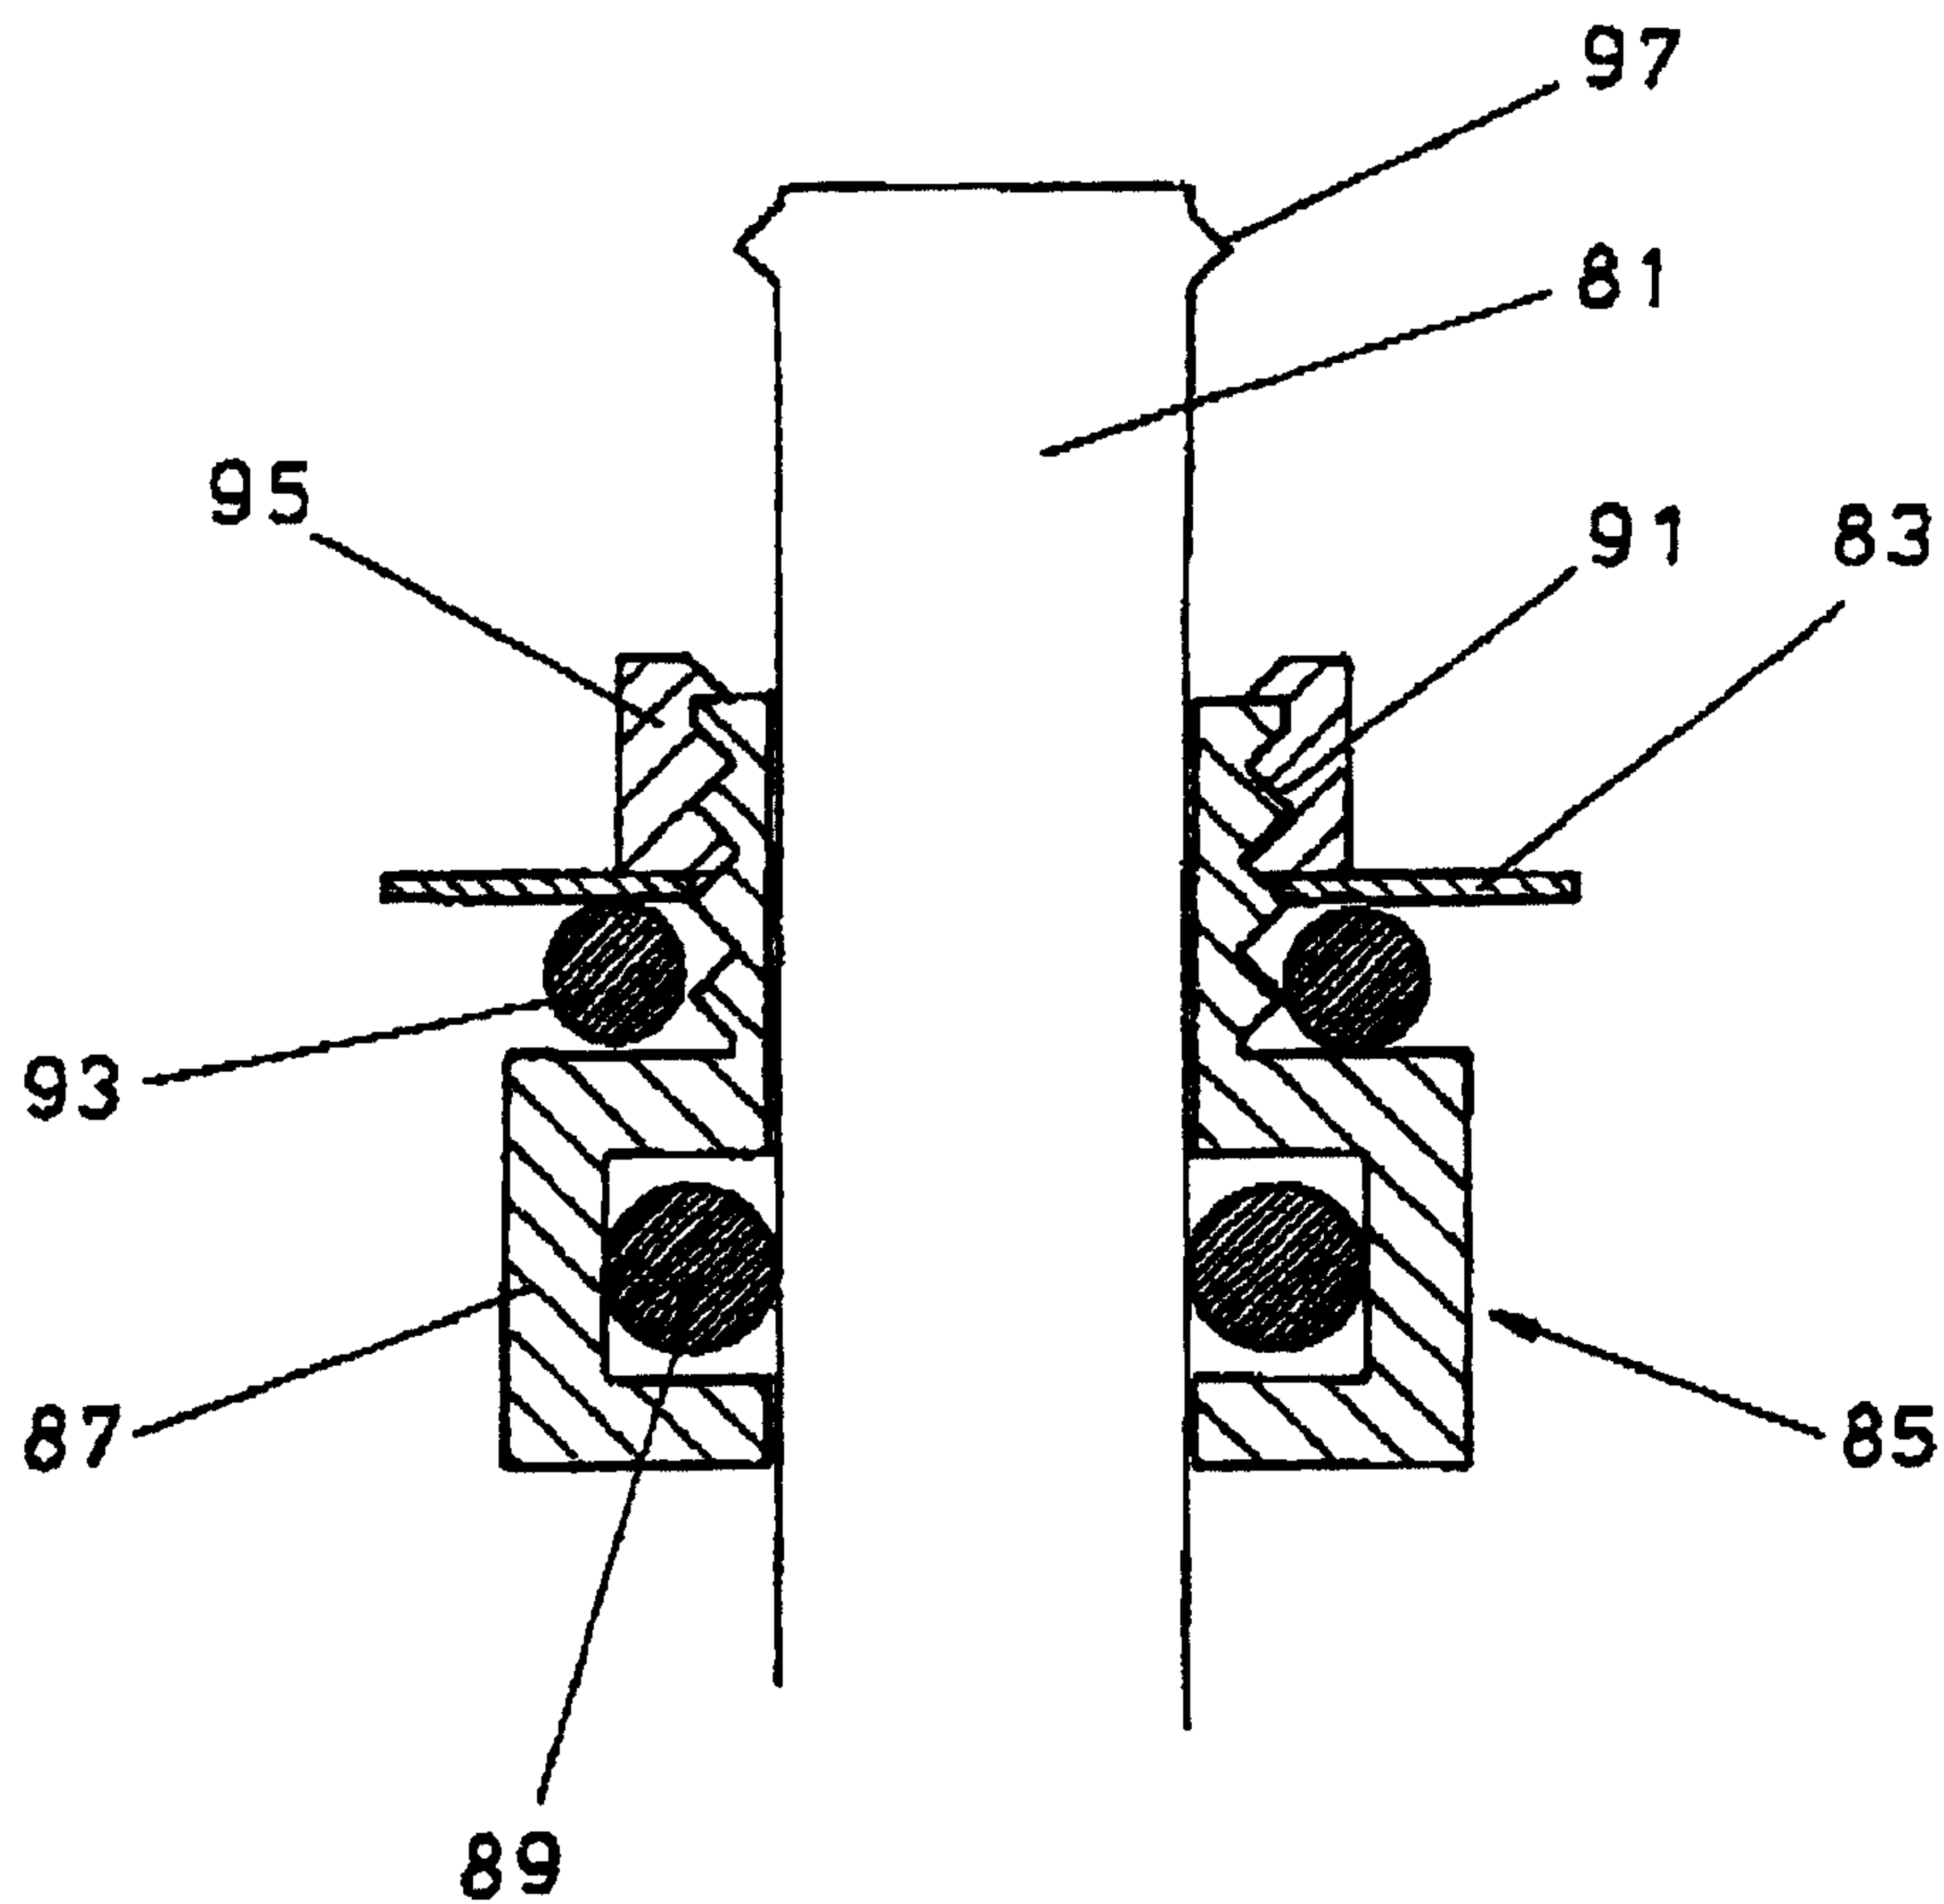


FIG. 84

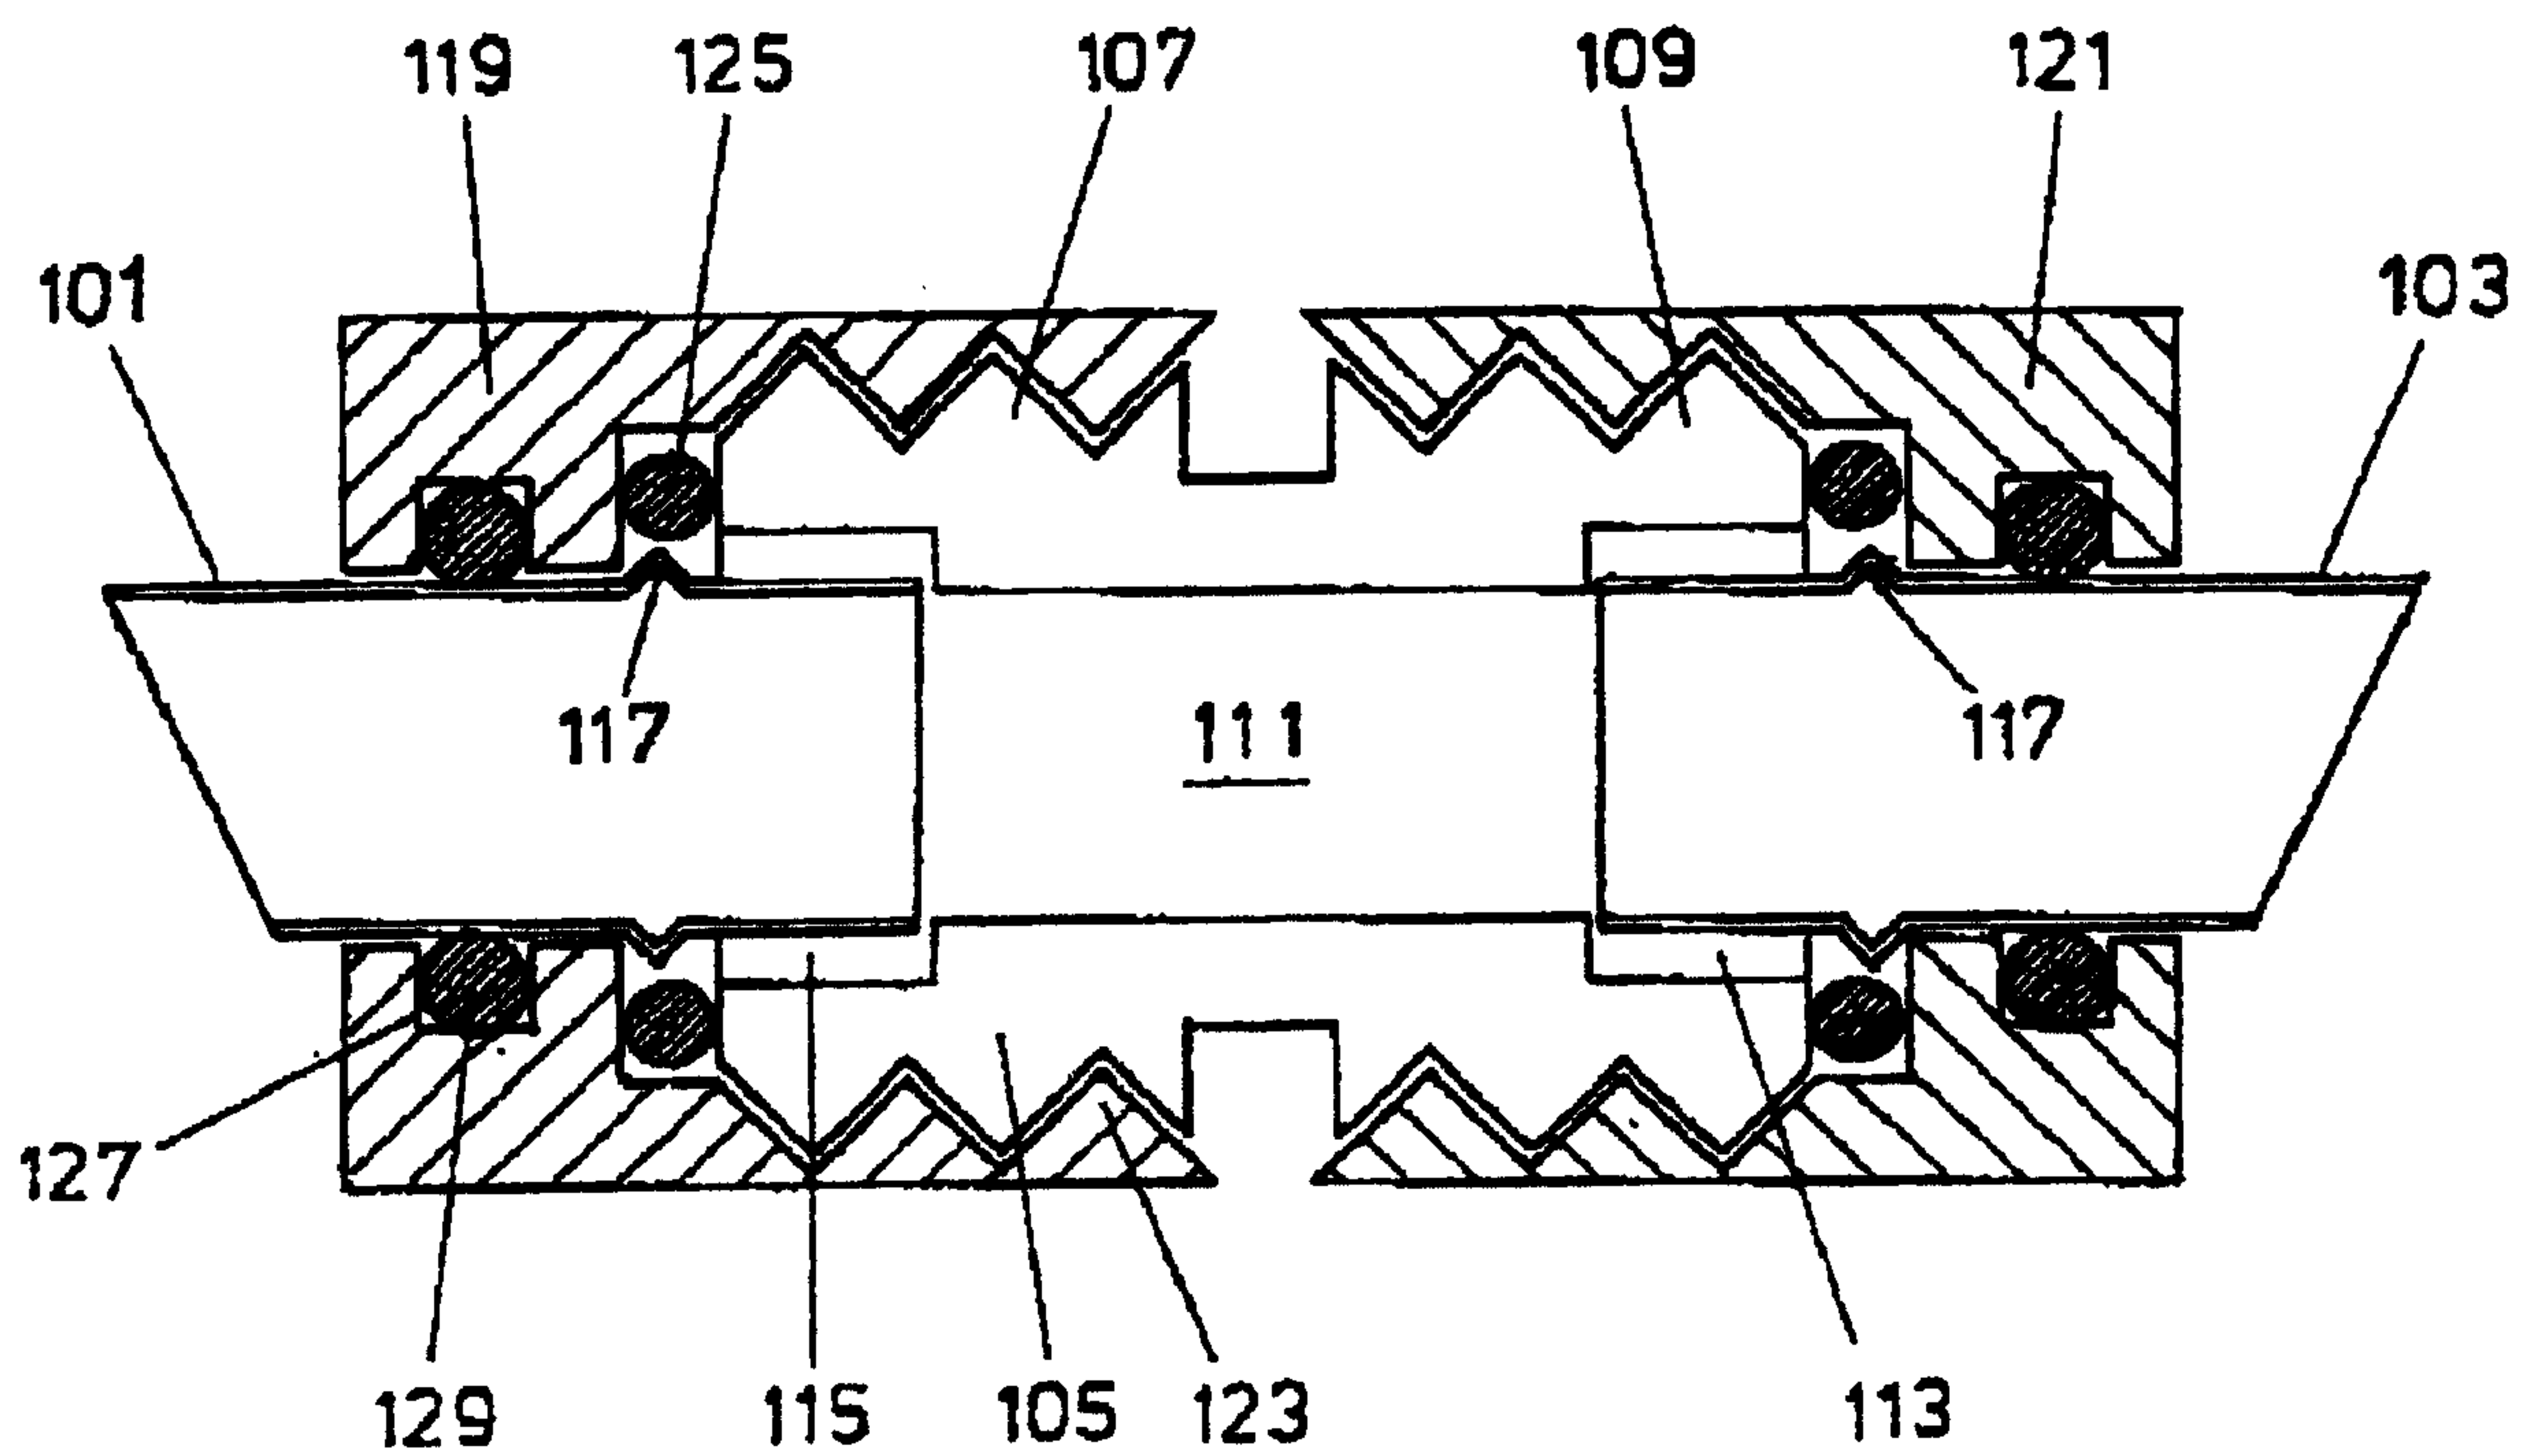


FIG. 85

4/6
~~517~~

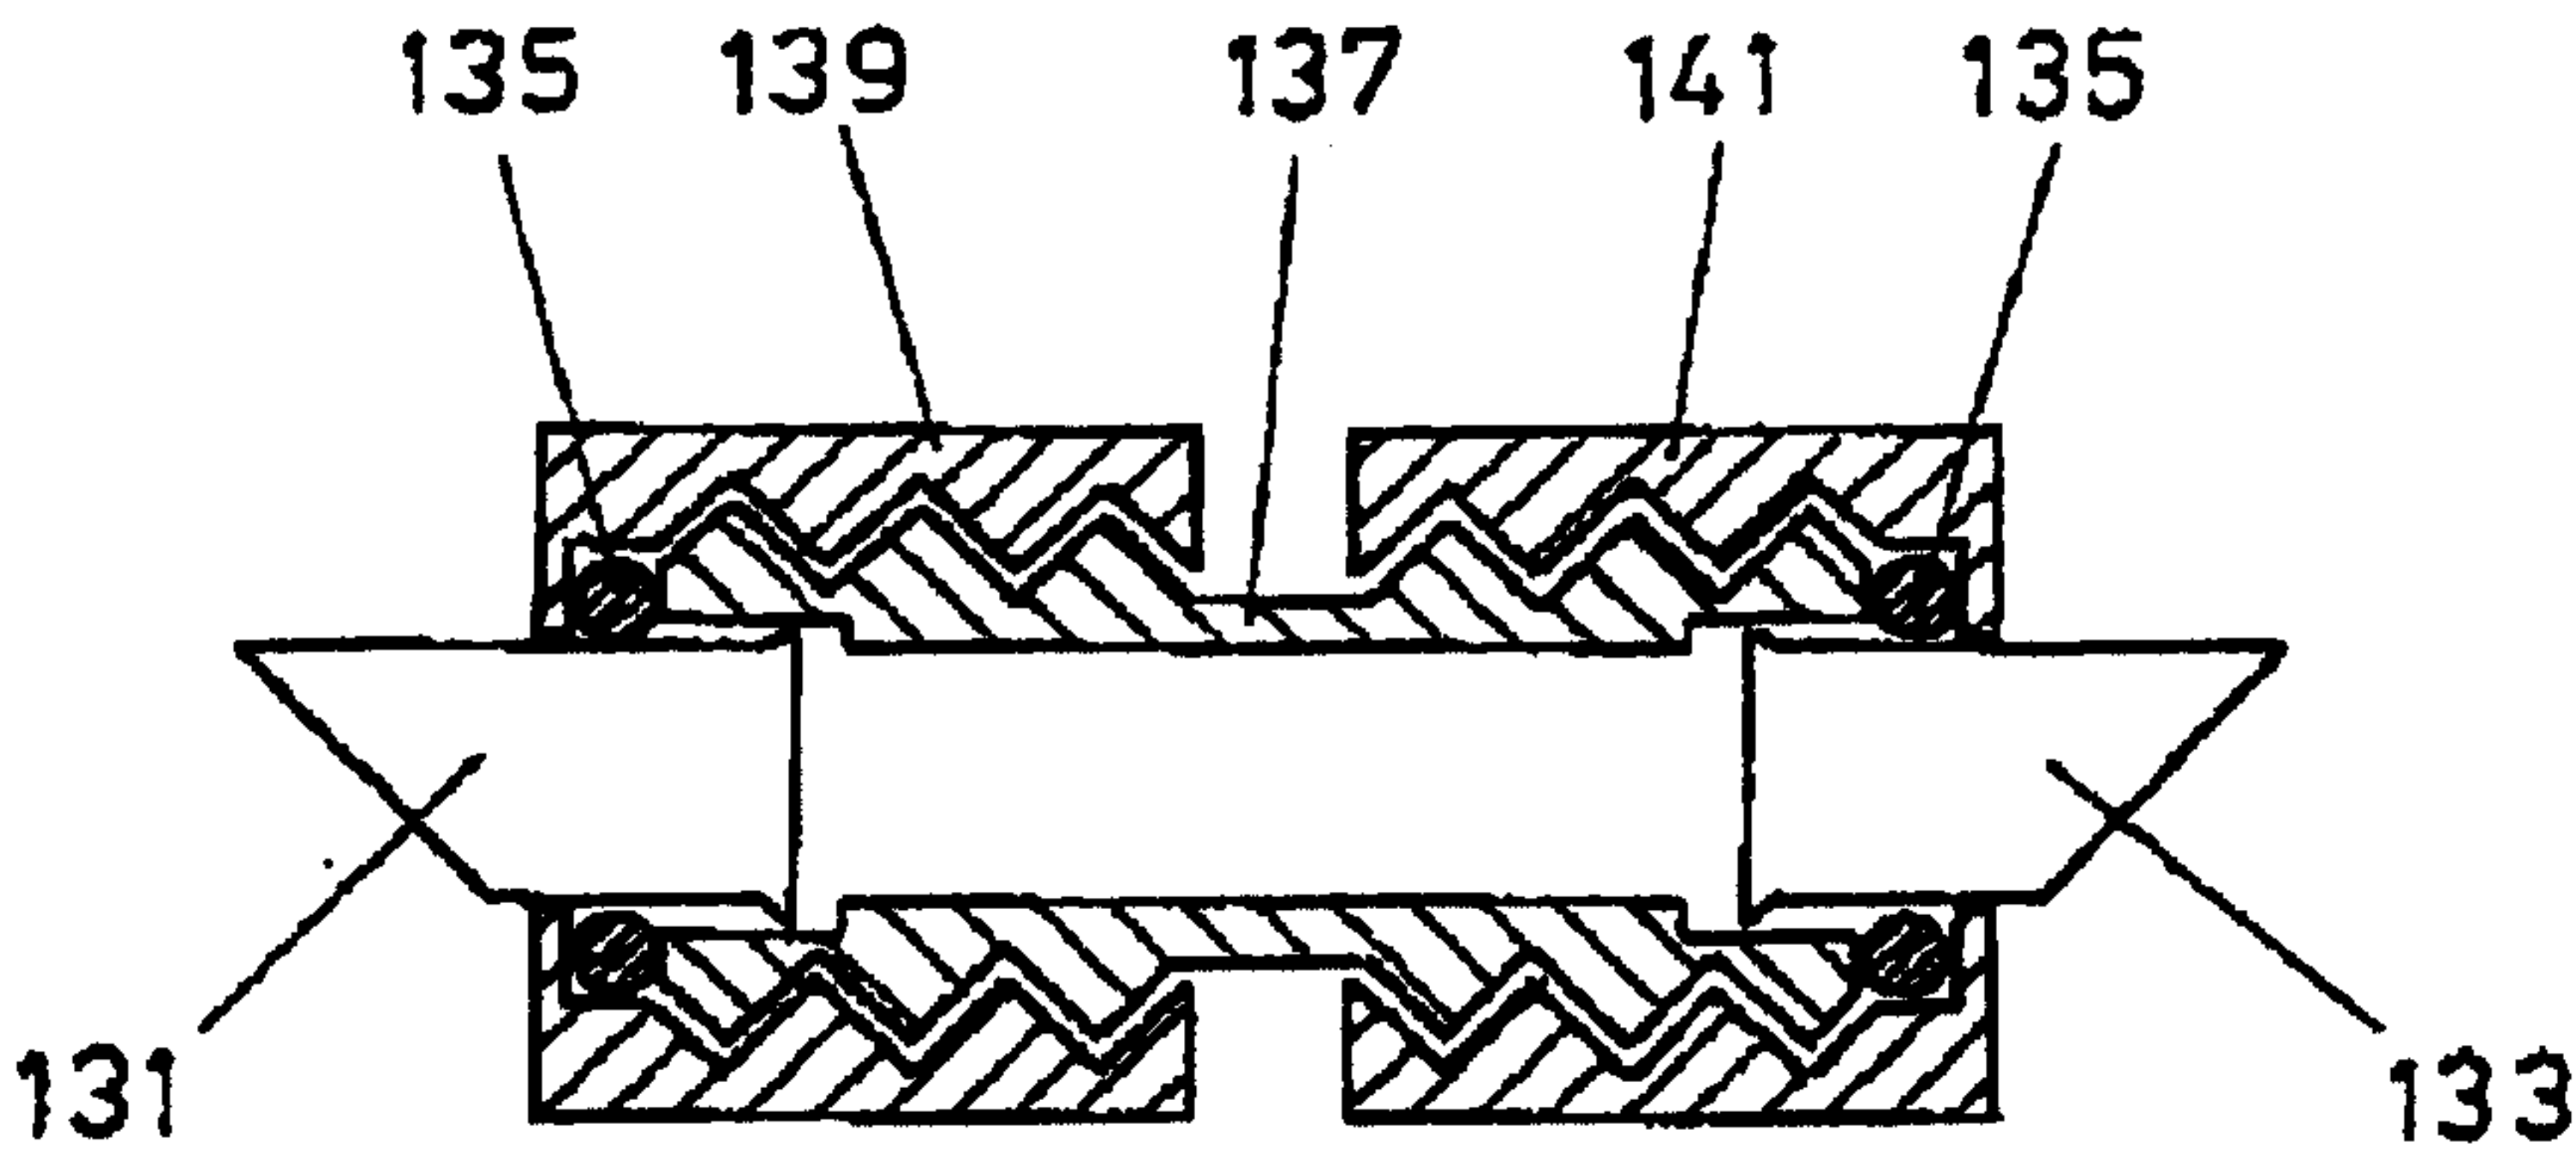


FIG. 7⁶

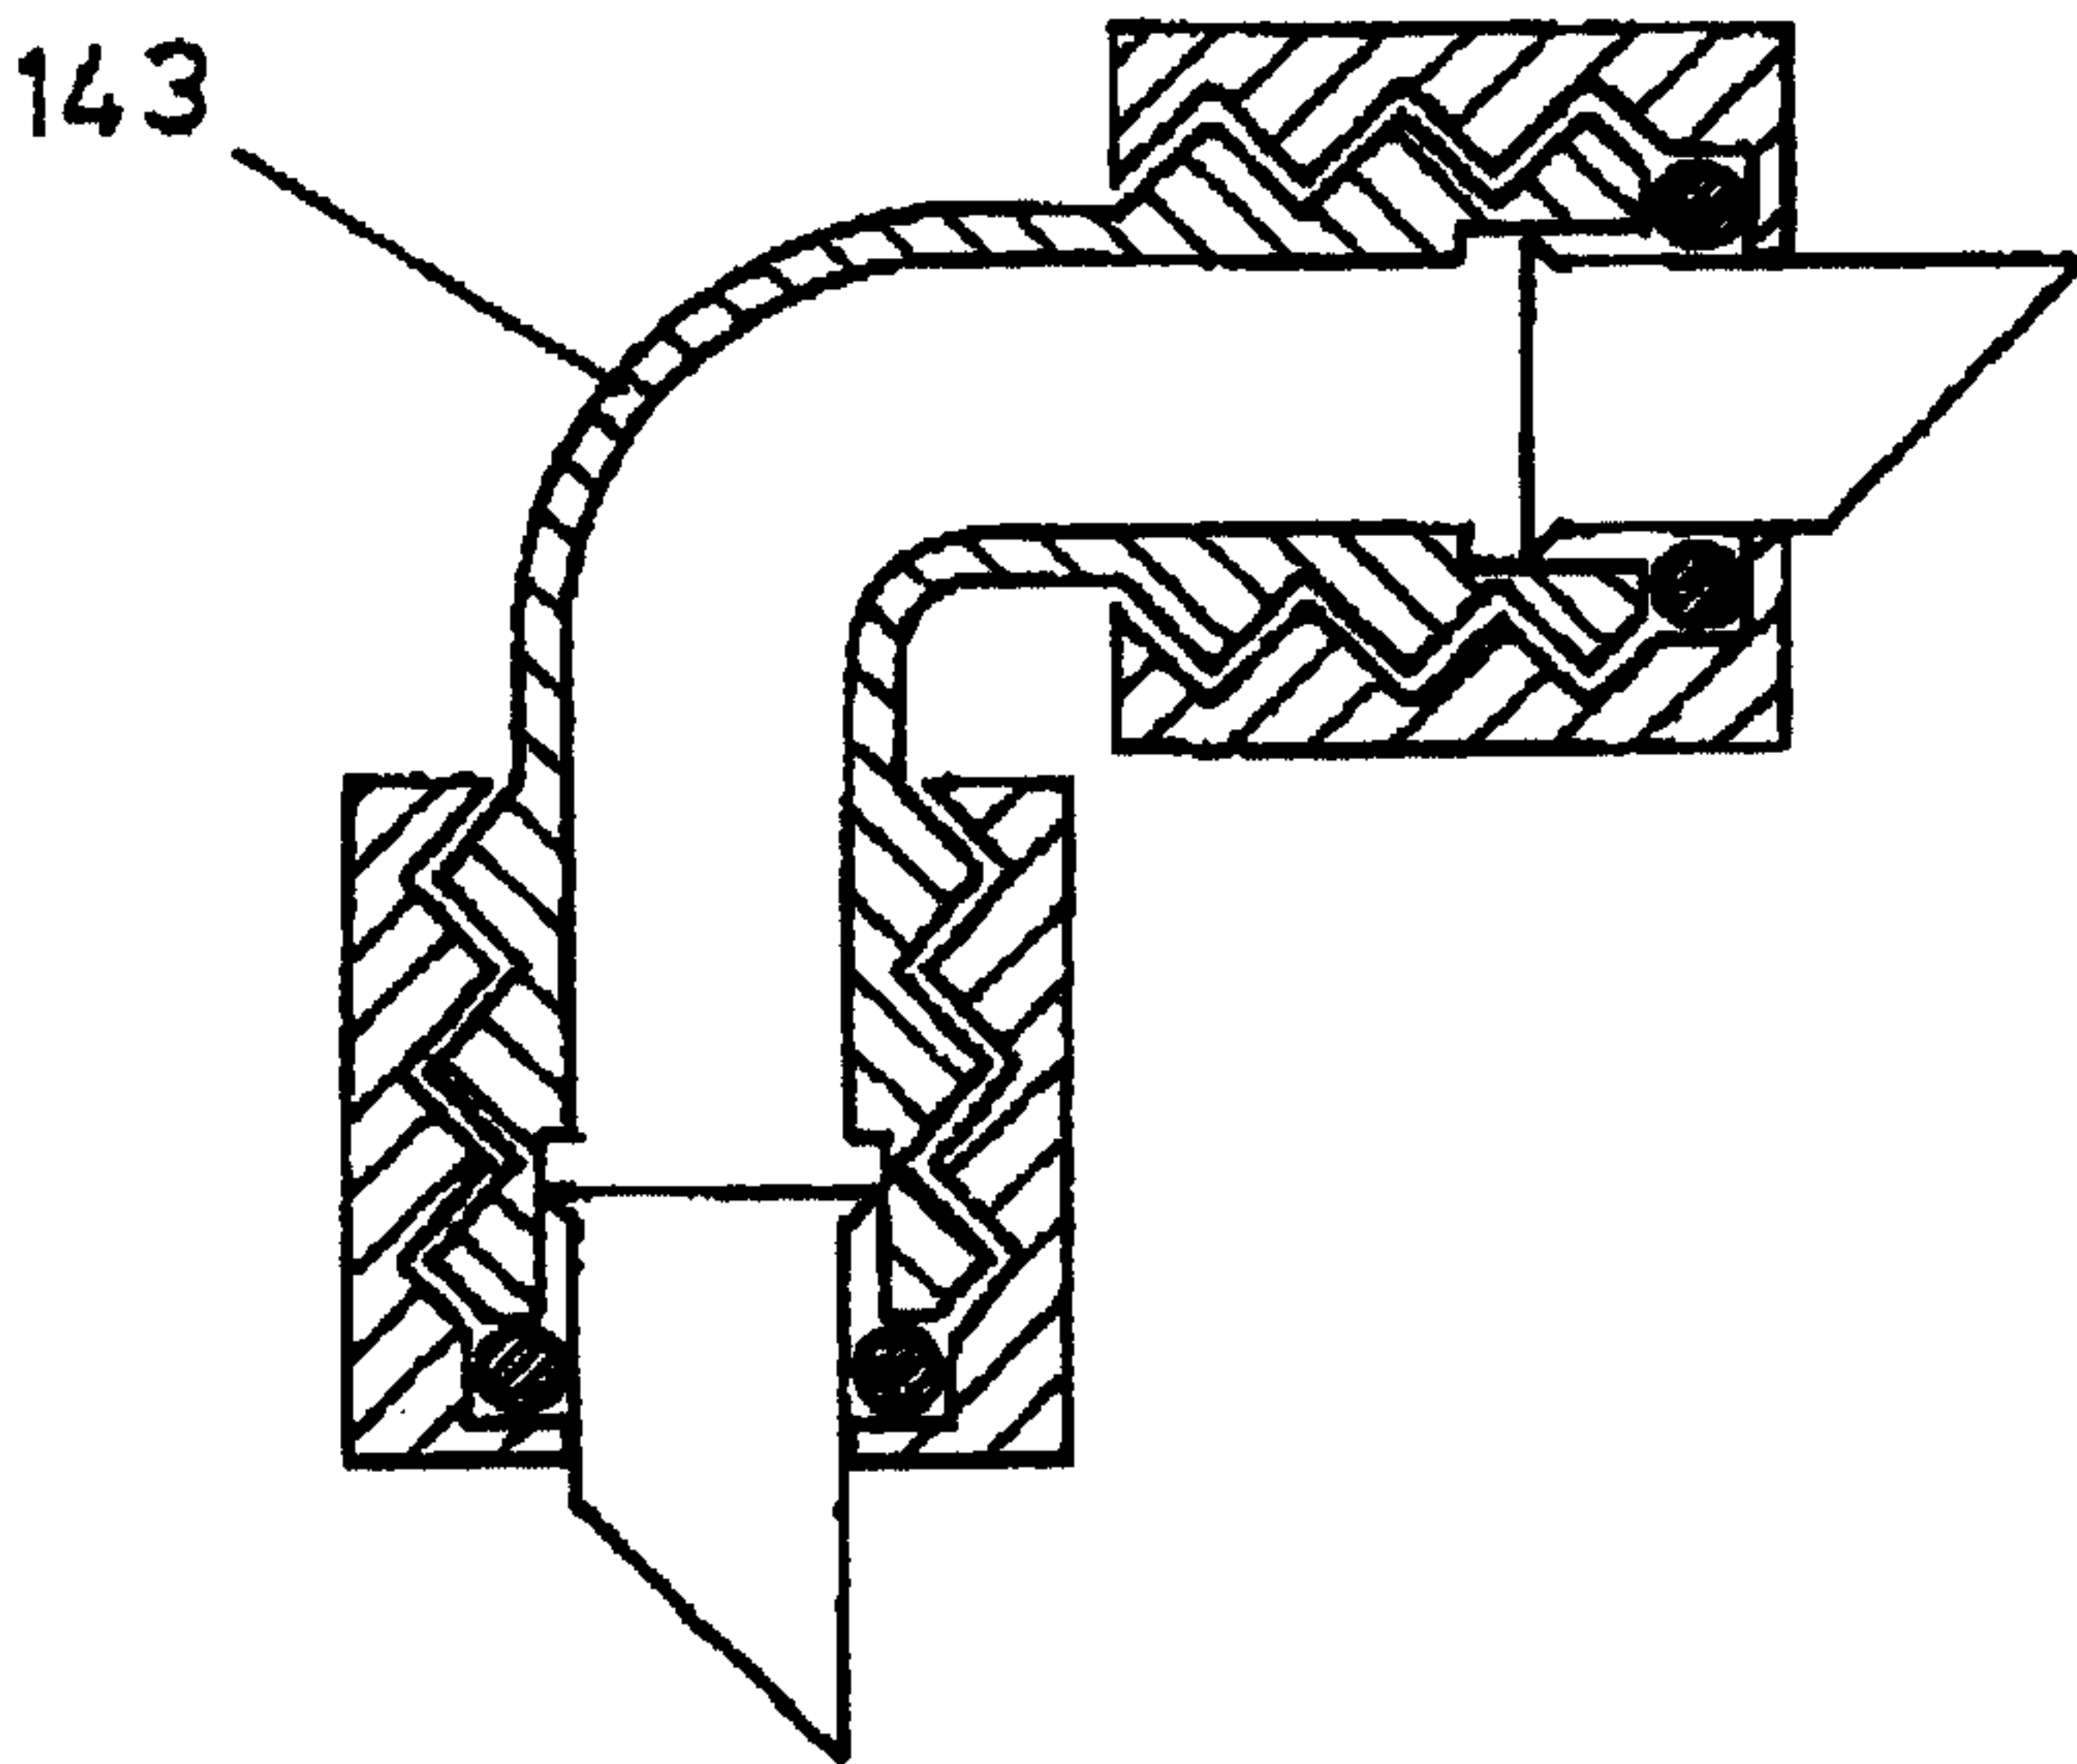


FIG. 8⁷

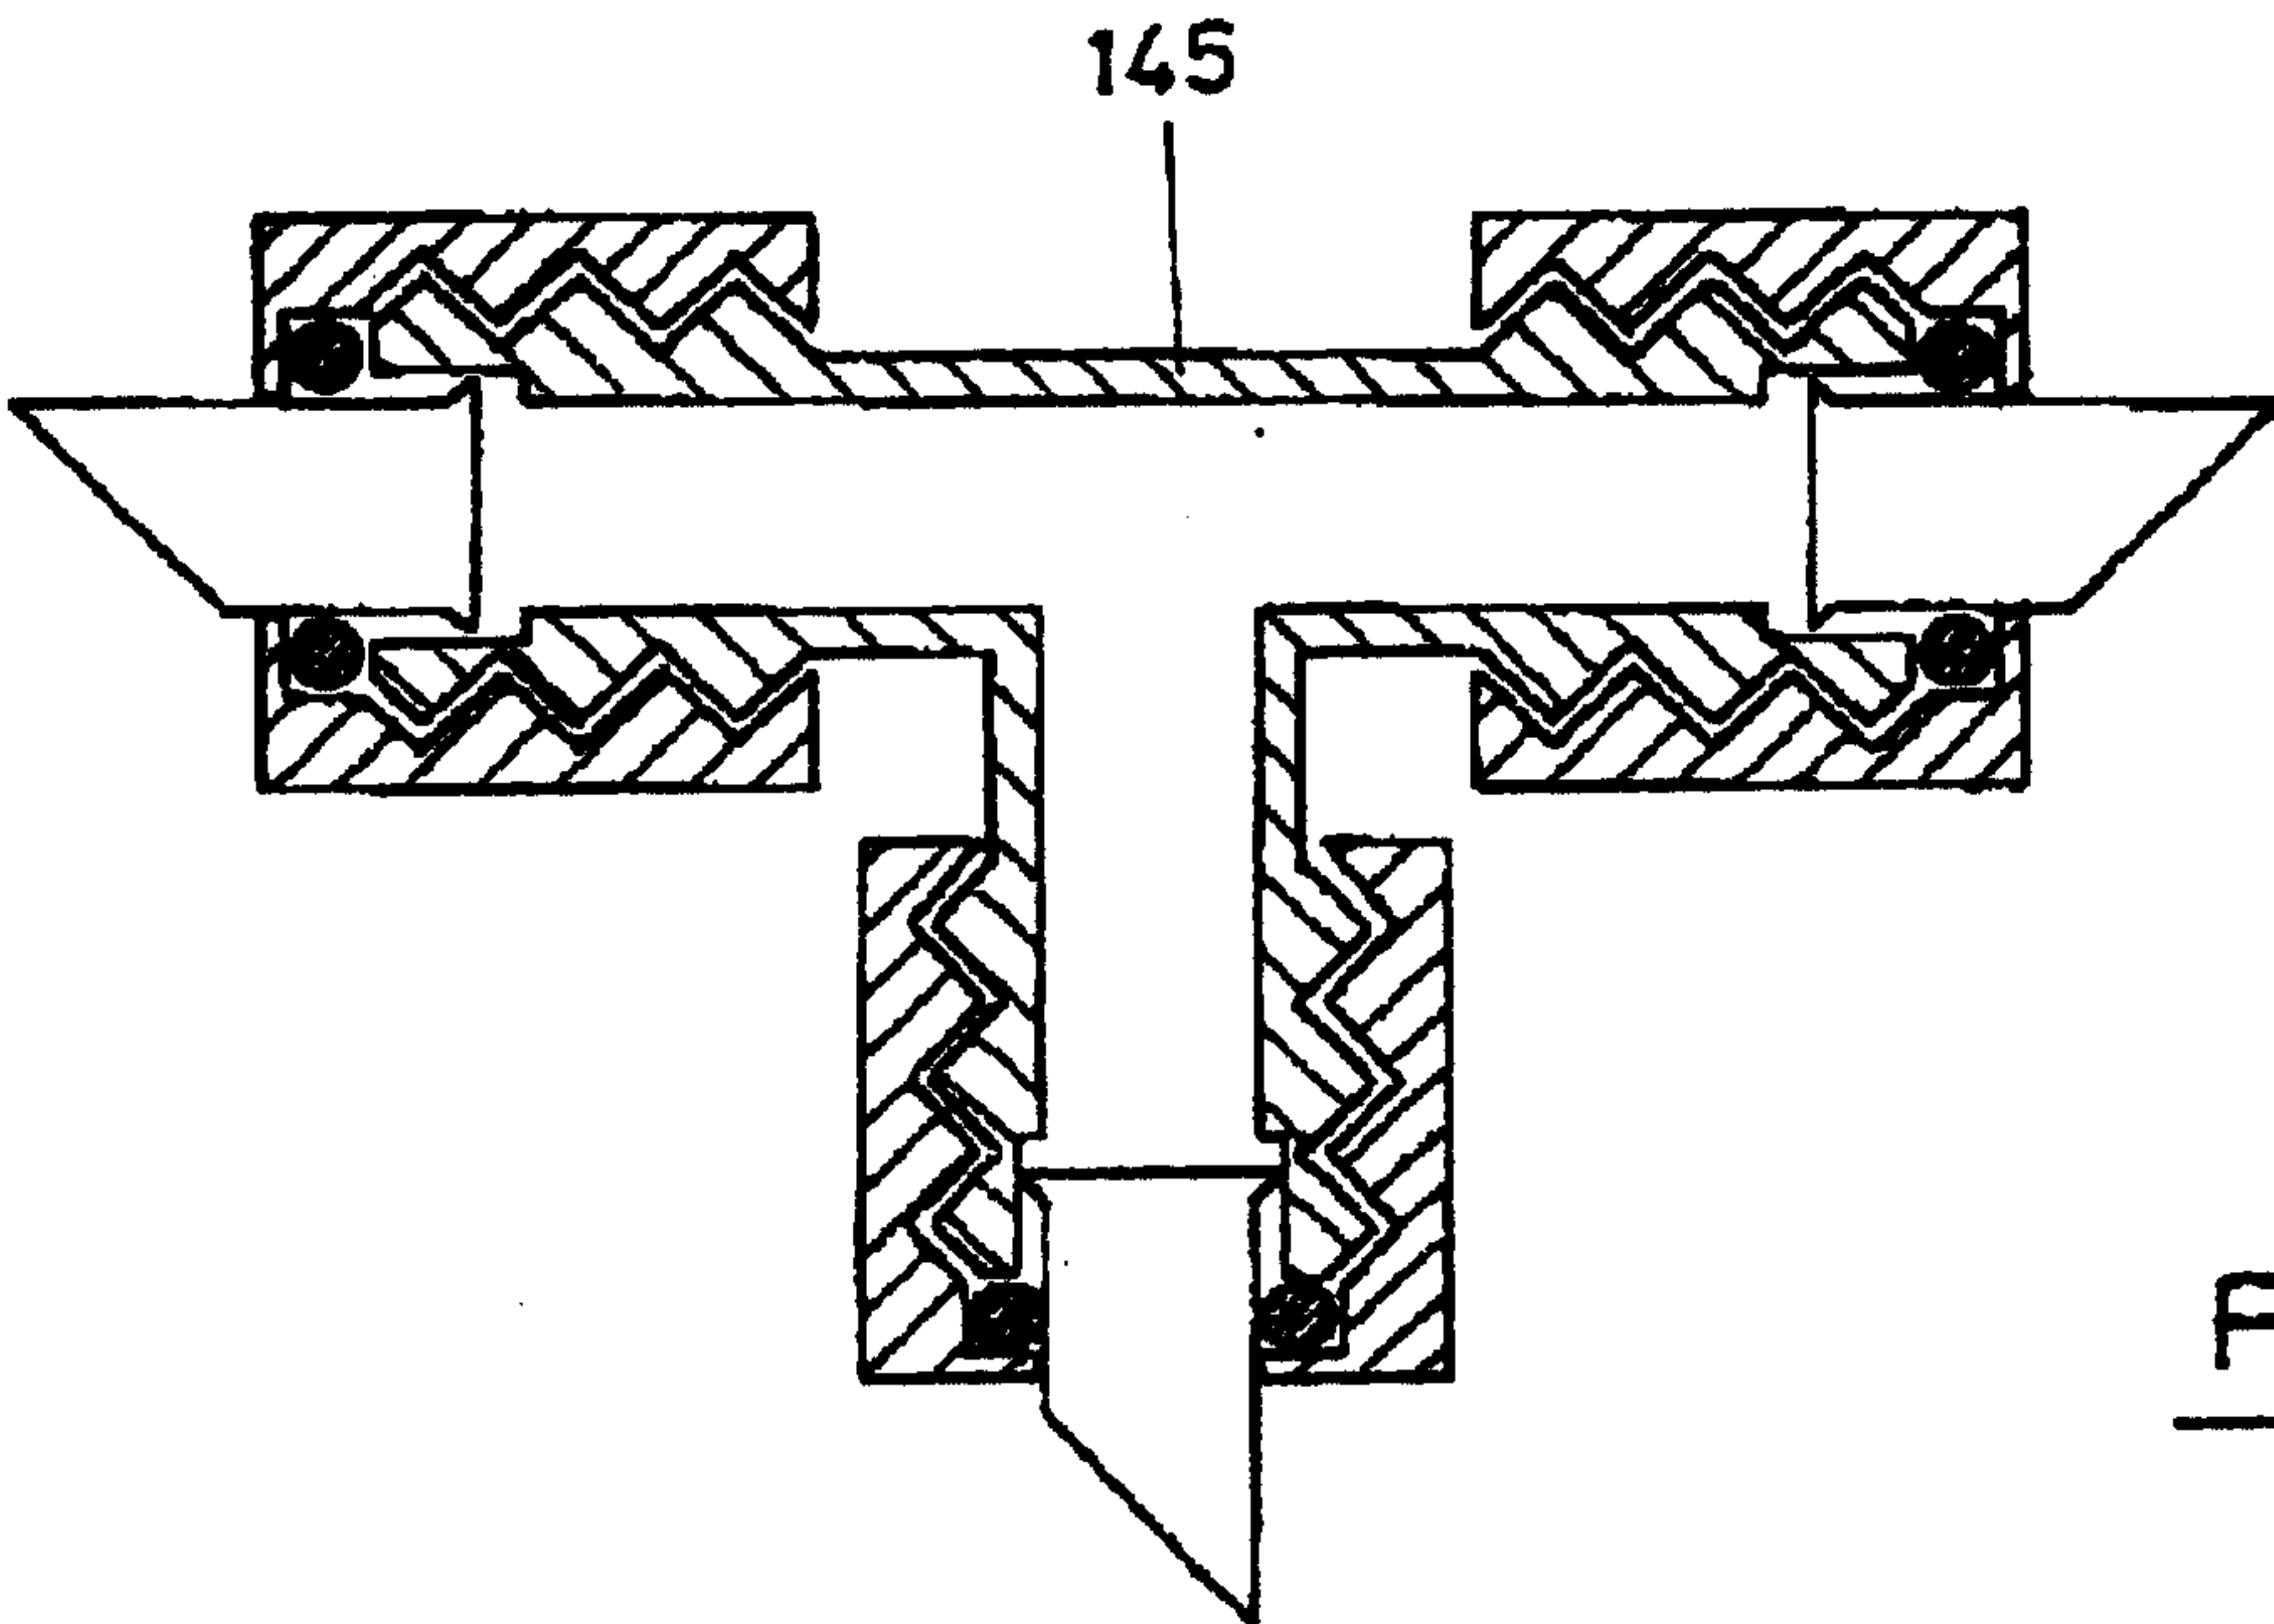


FIG. 9⁸

5/6
-67-

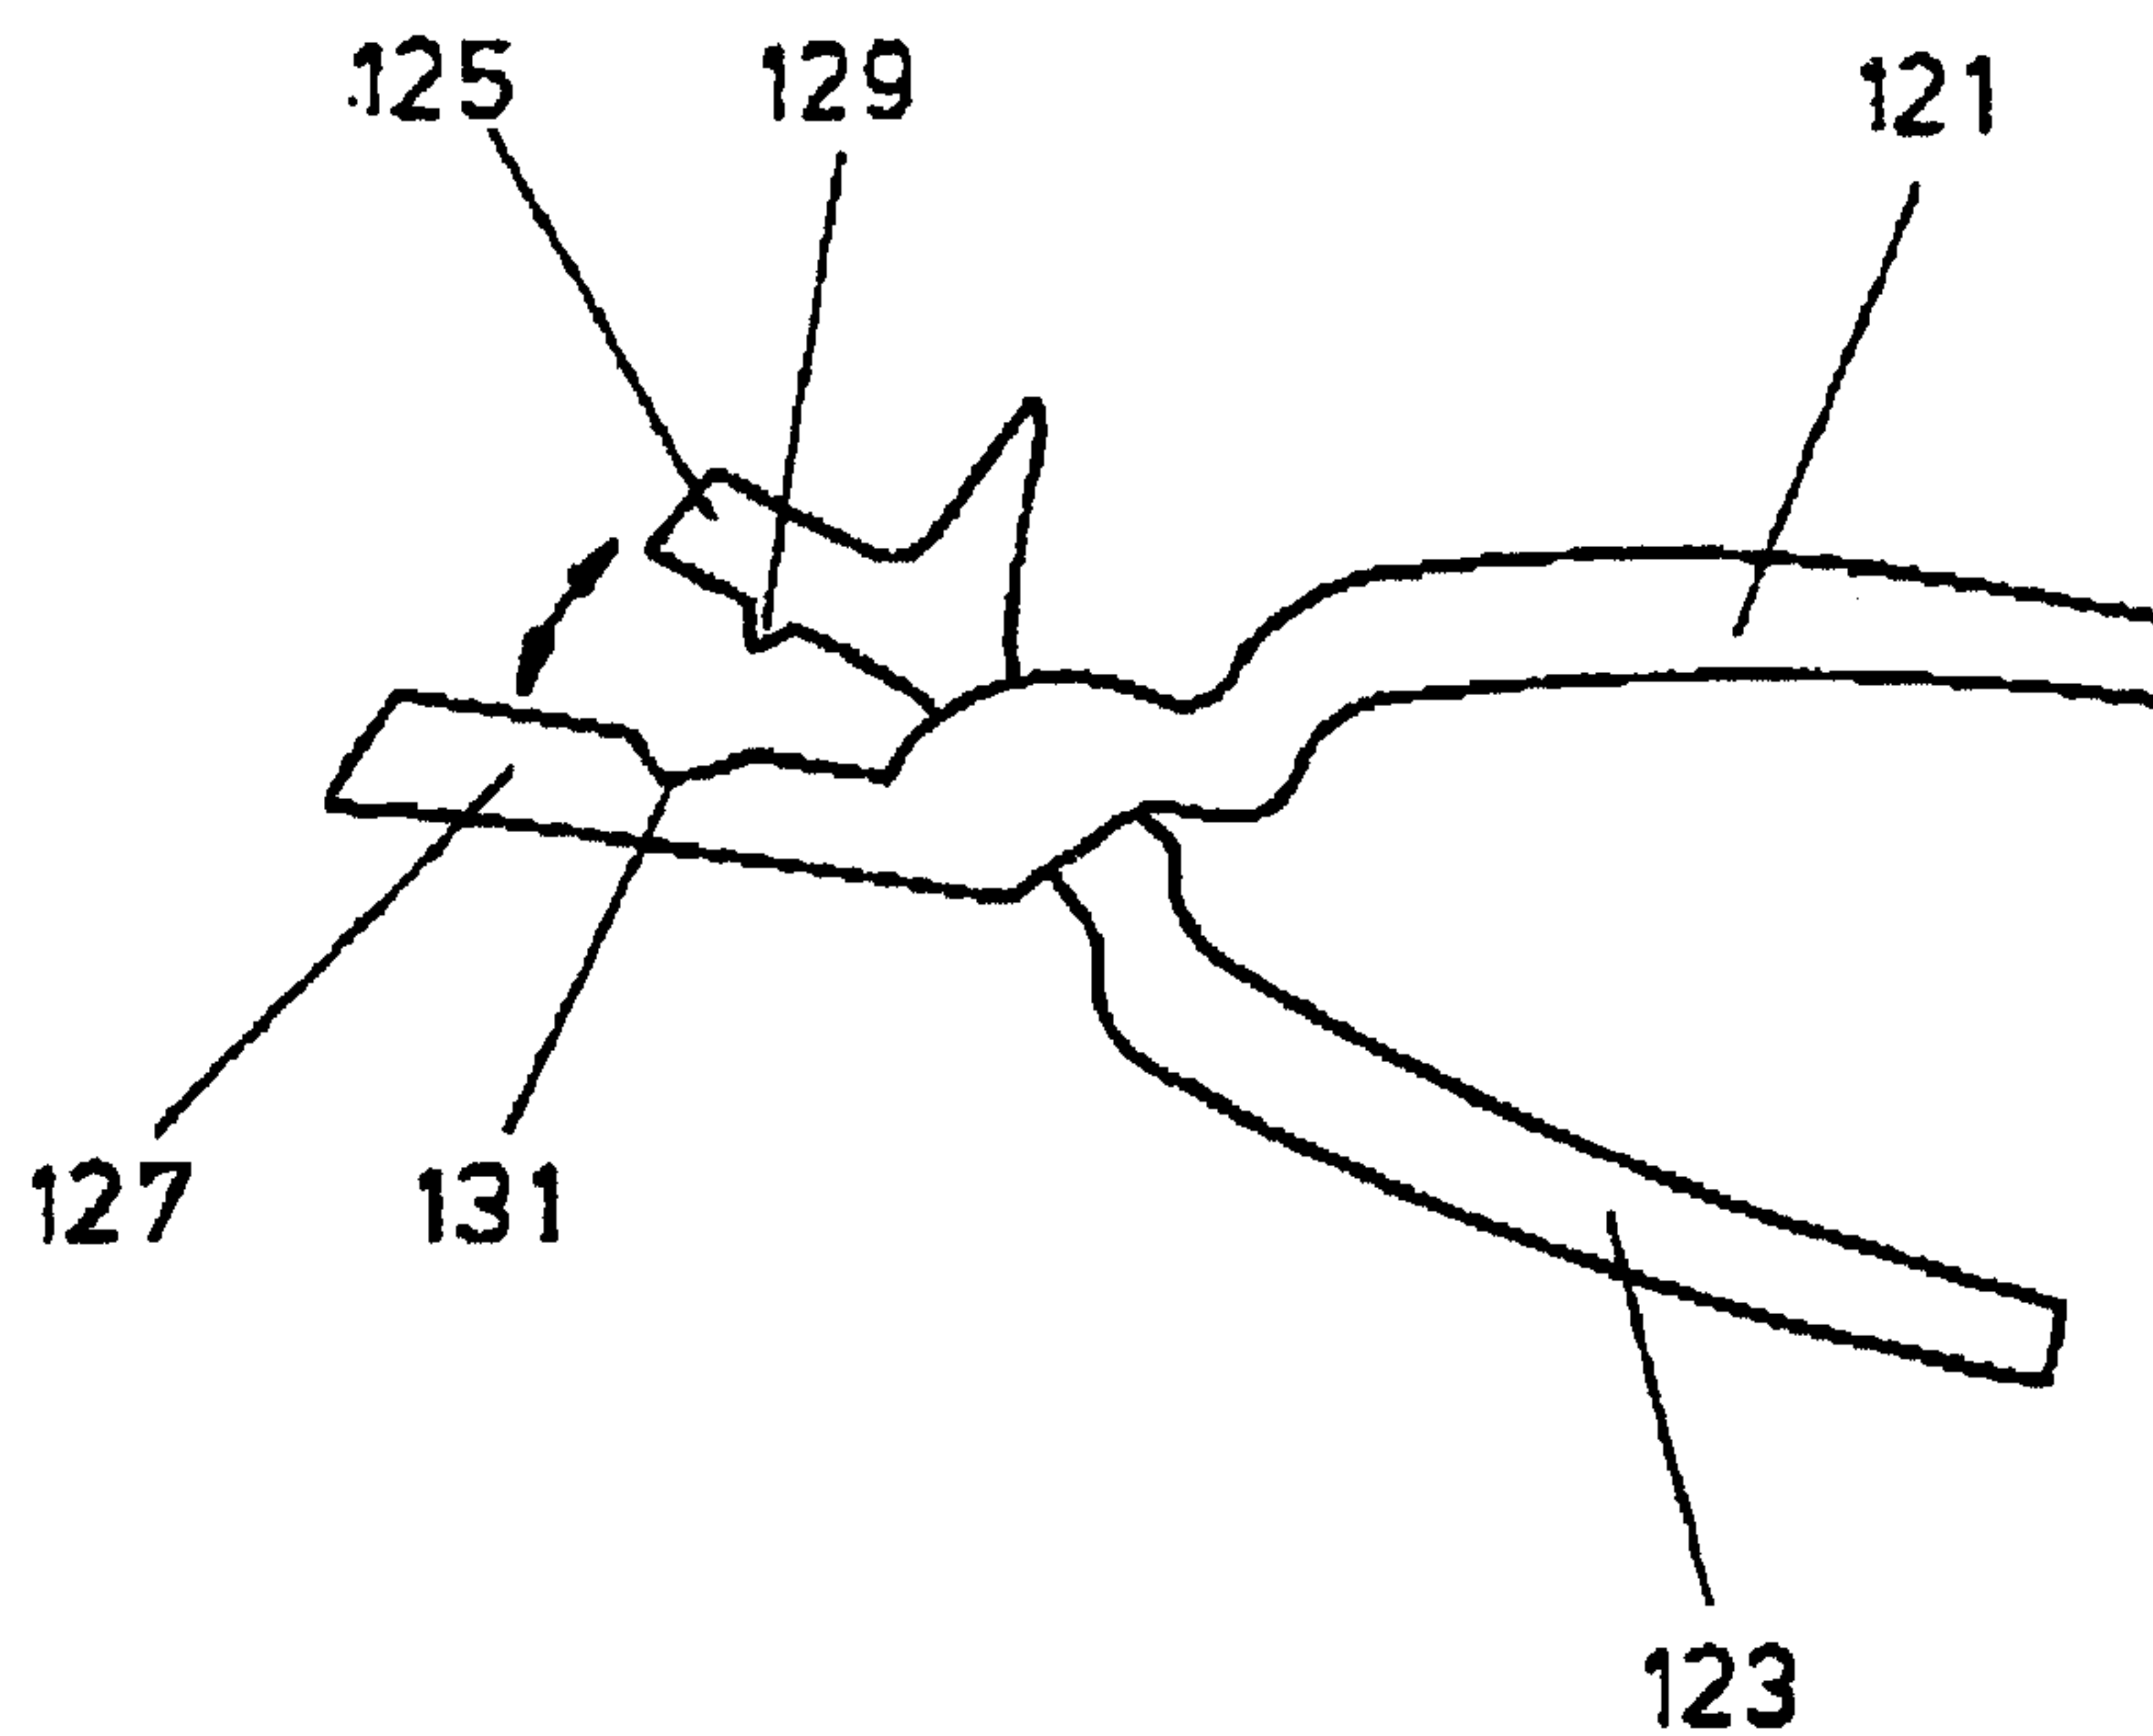


FIG. 109

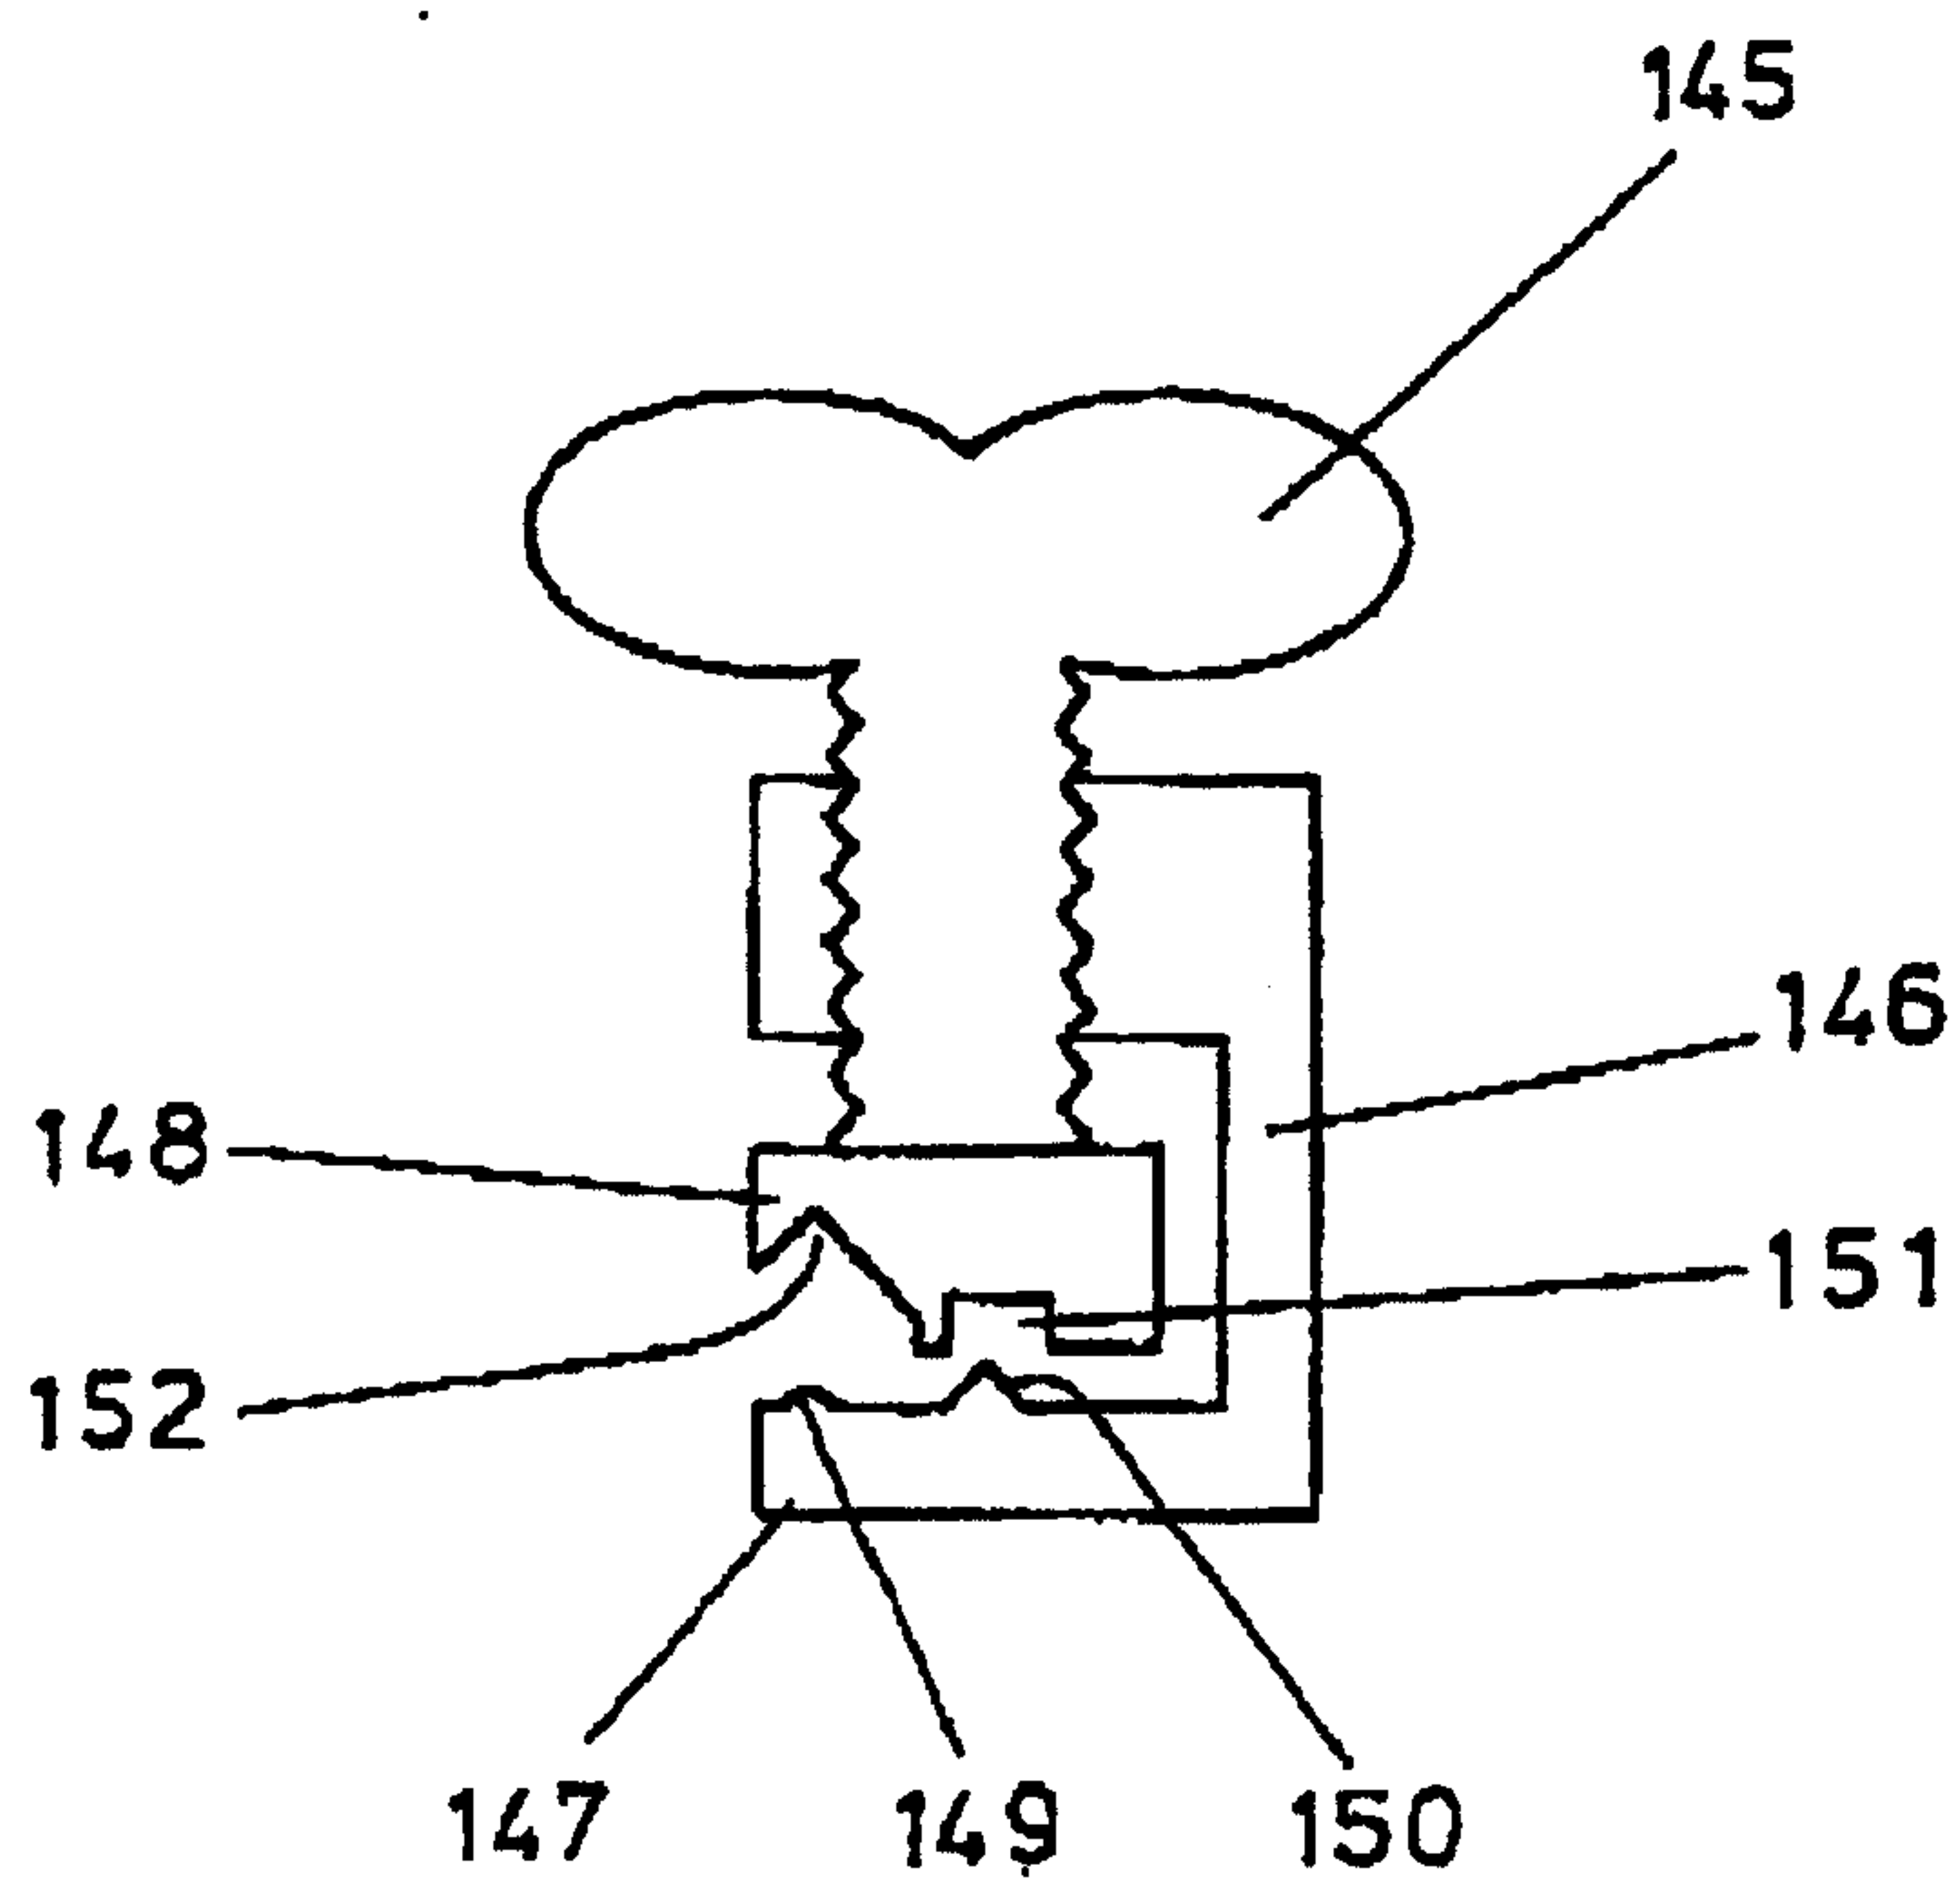


FIG. 110

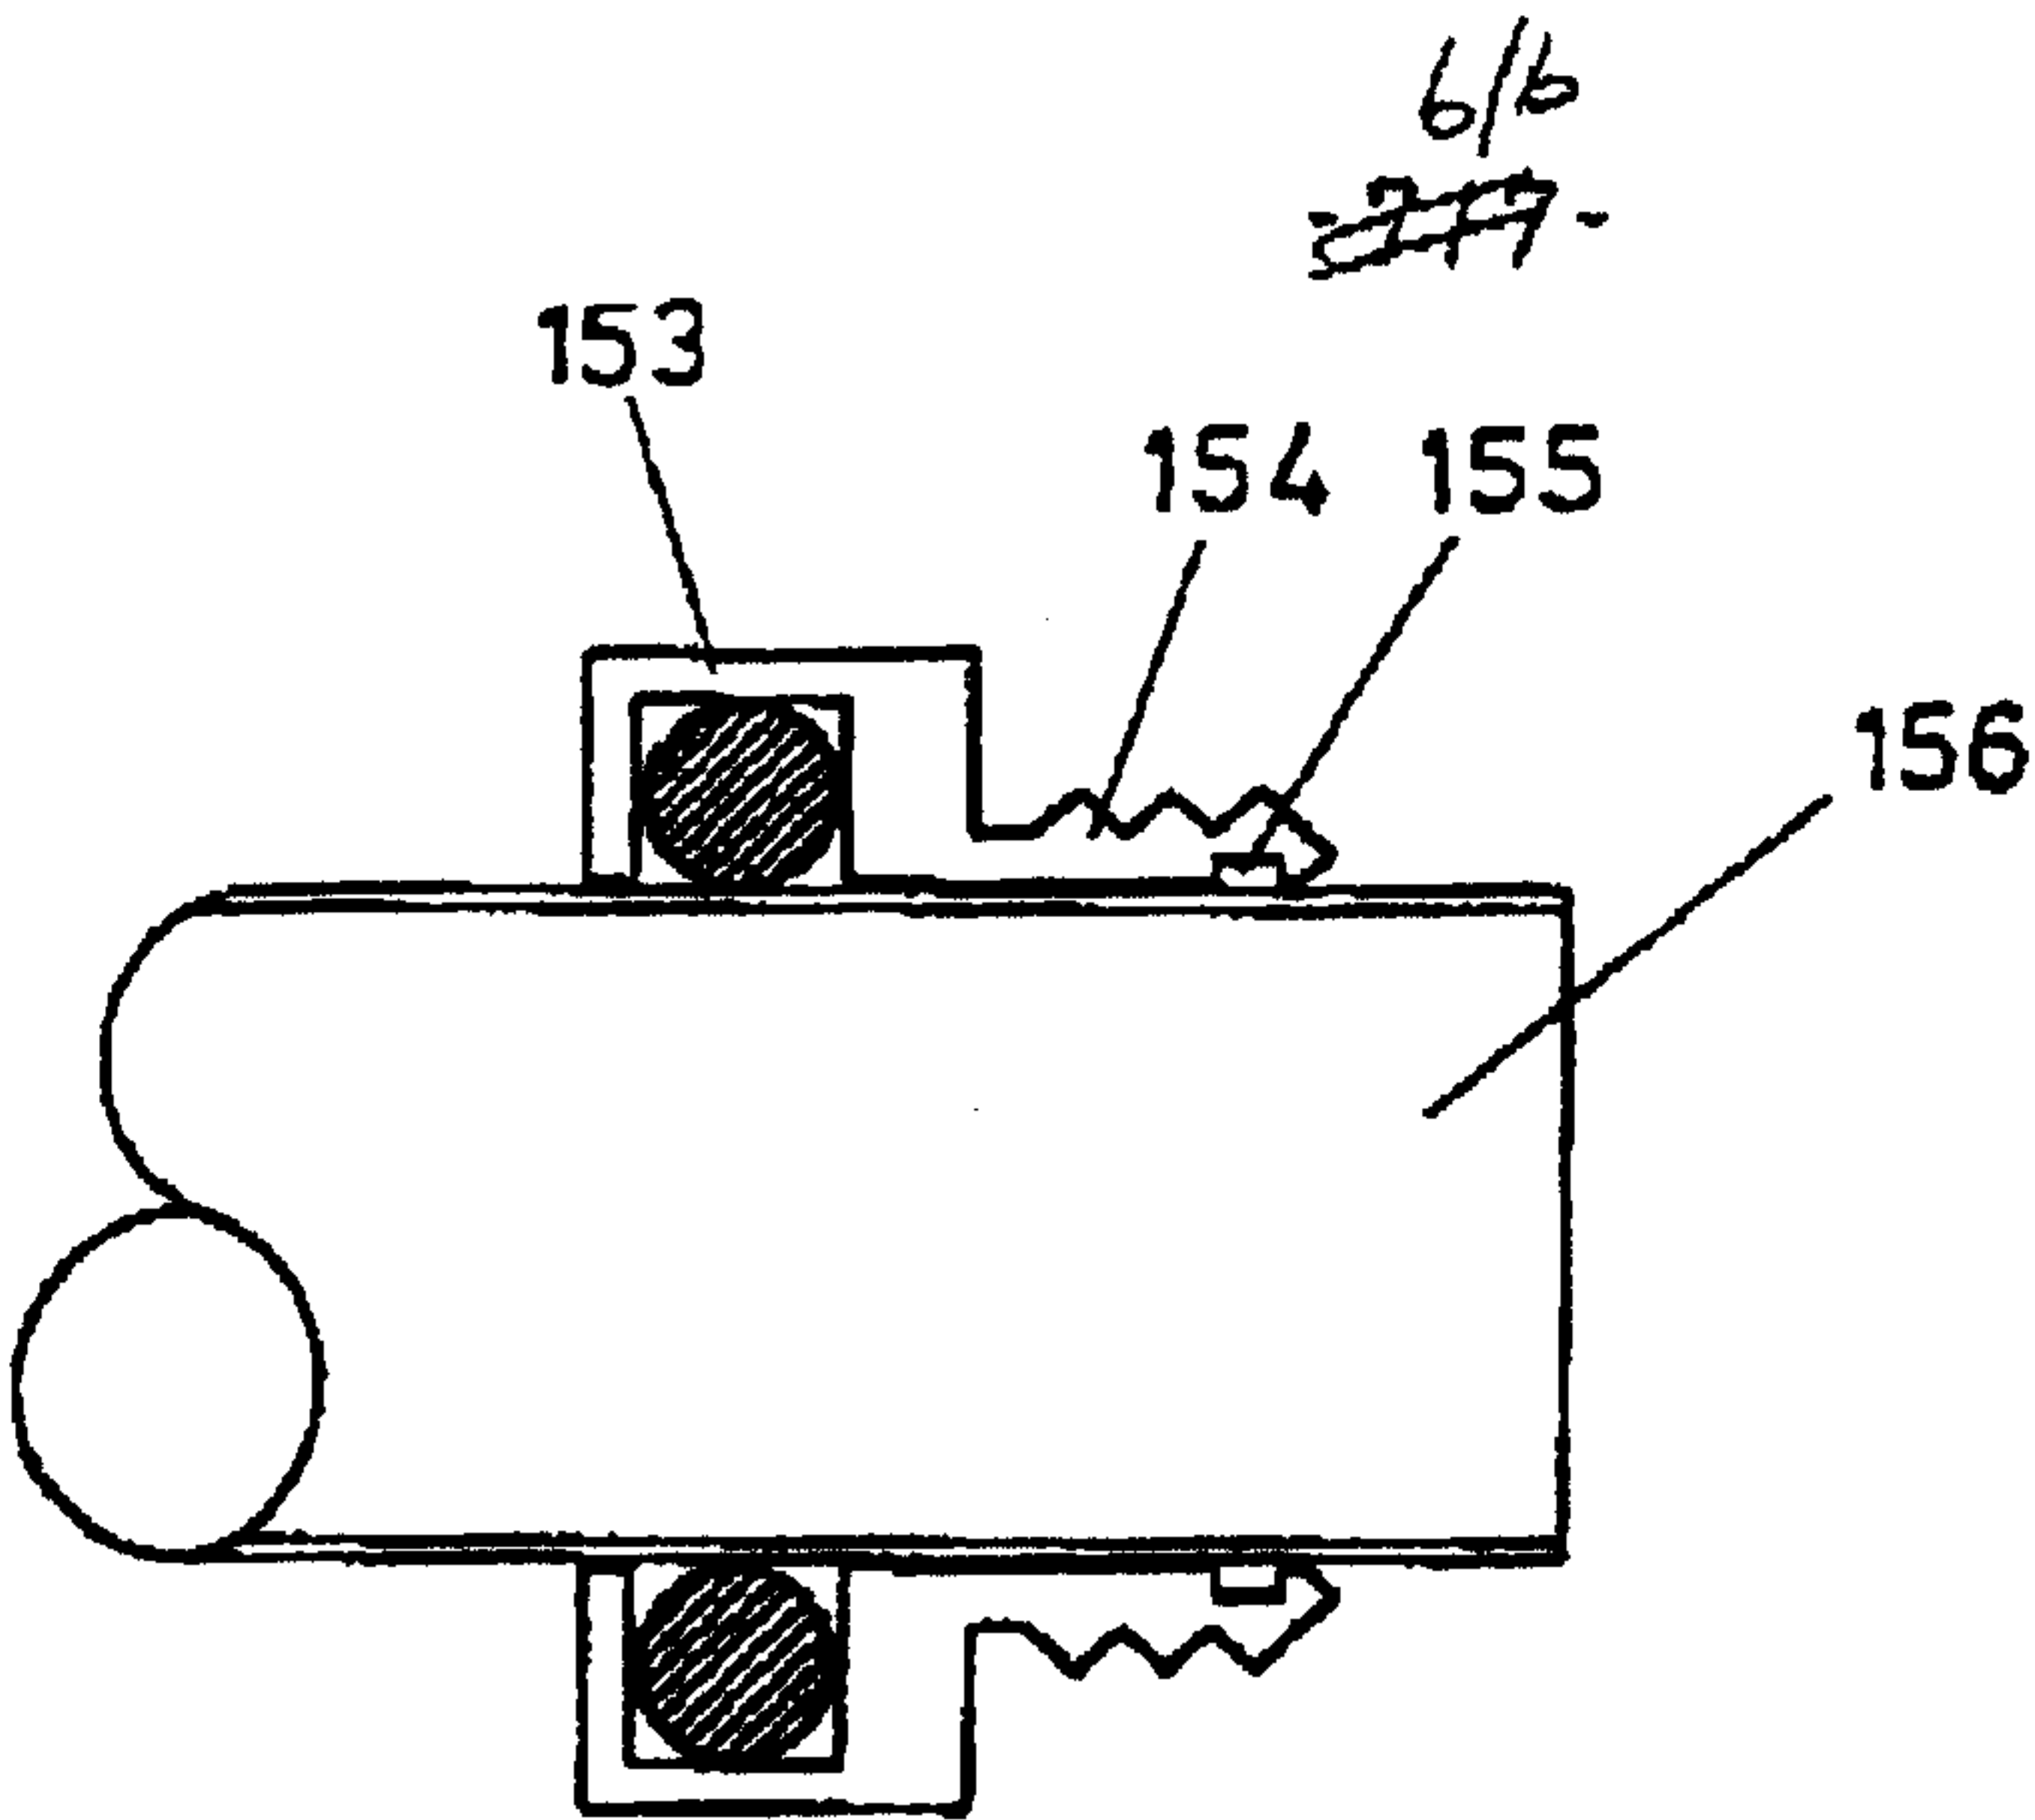


FIG. ¹¹~~12~~

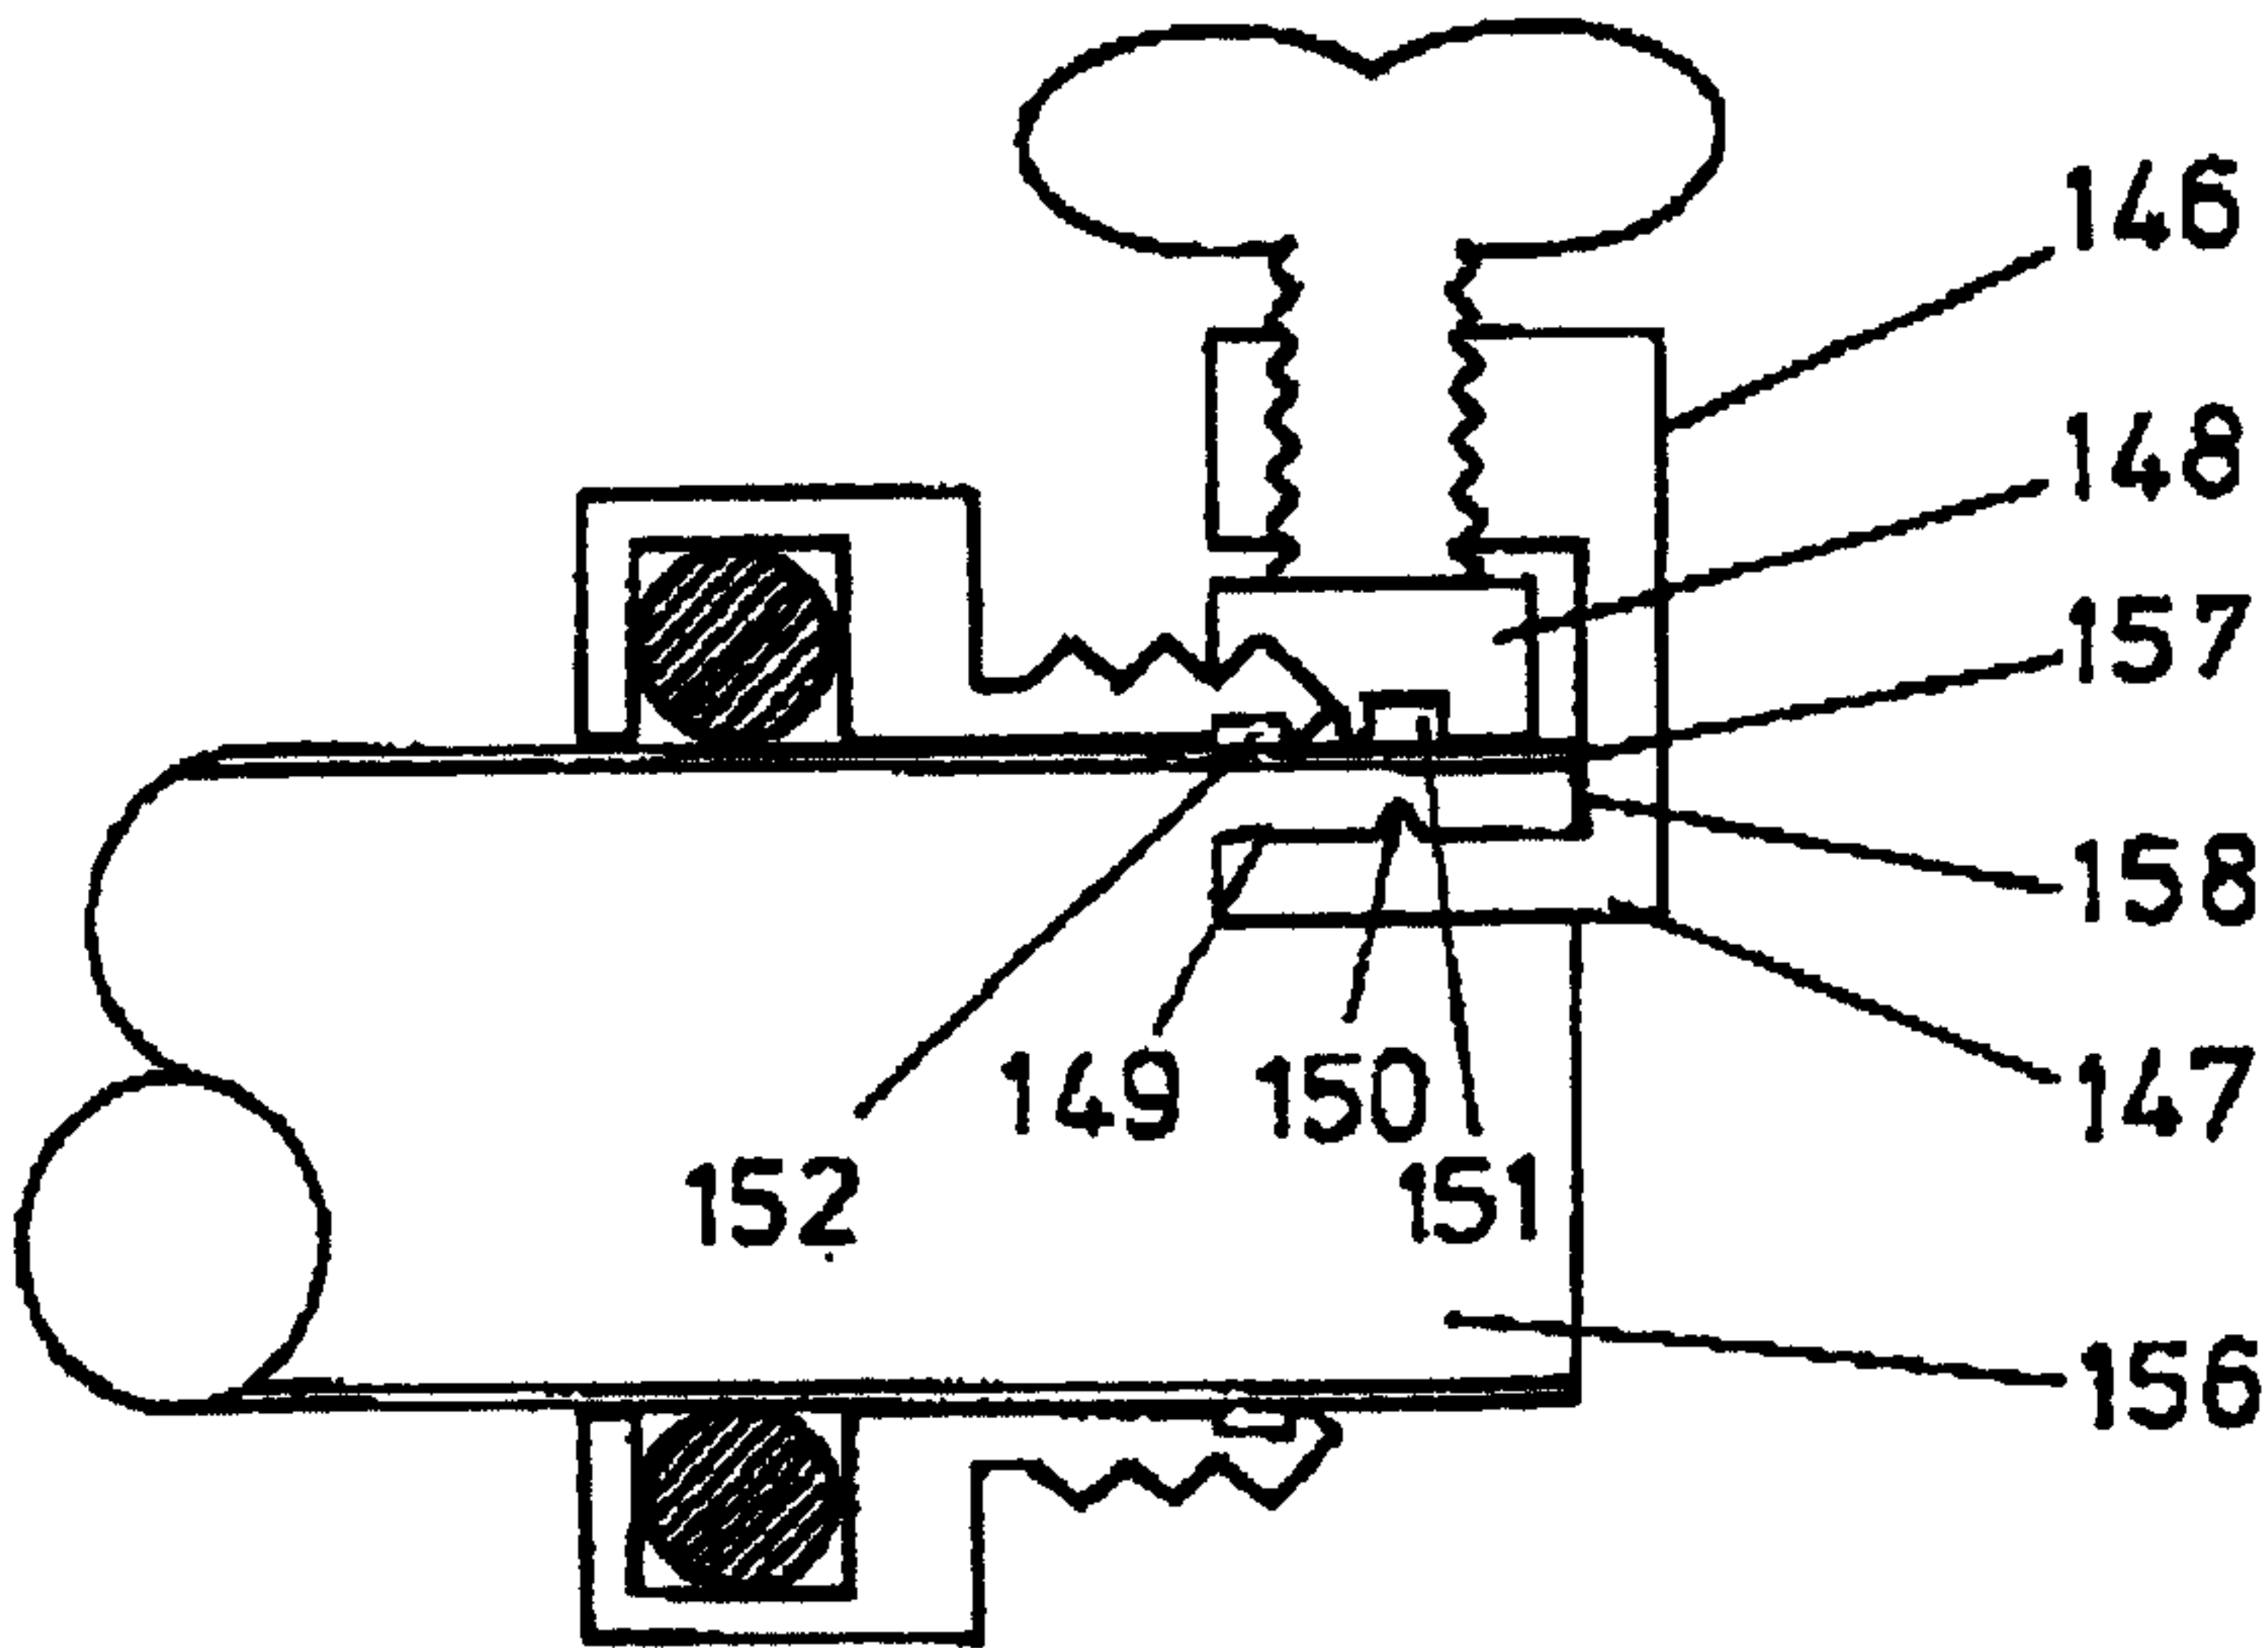


FIG. ¹²~~13~~

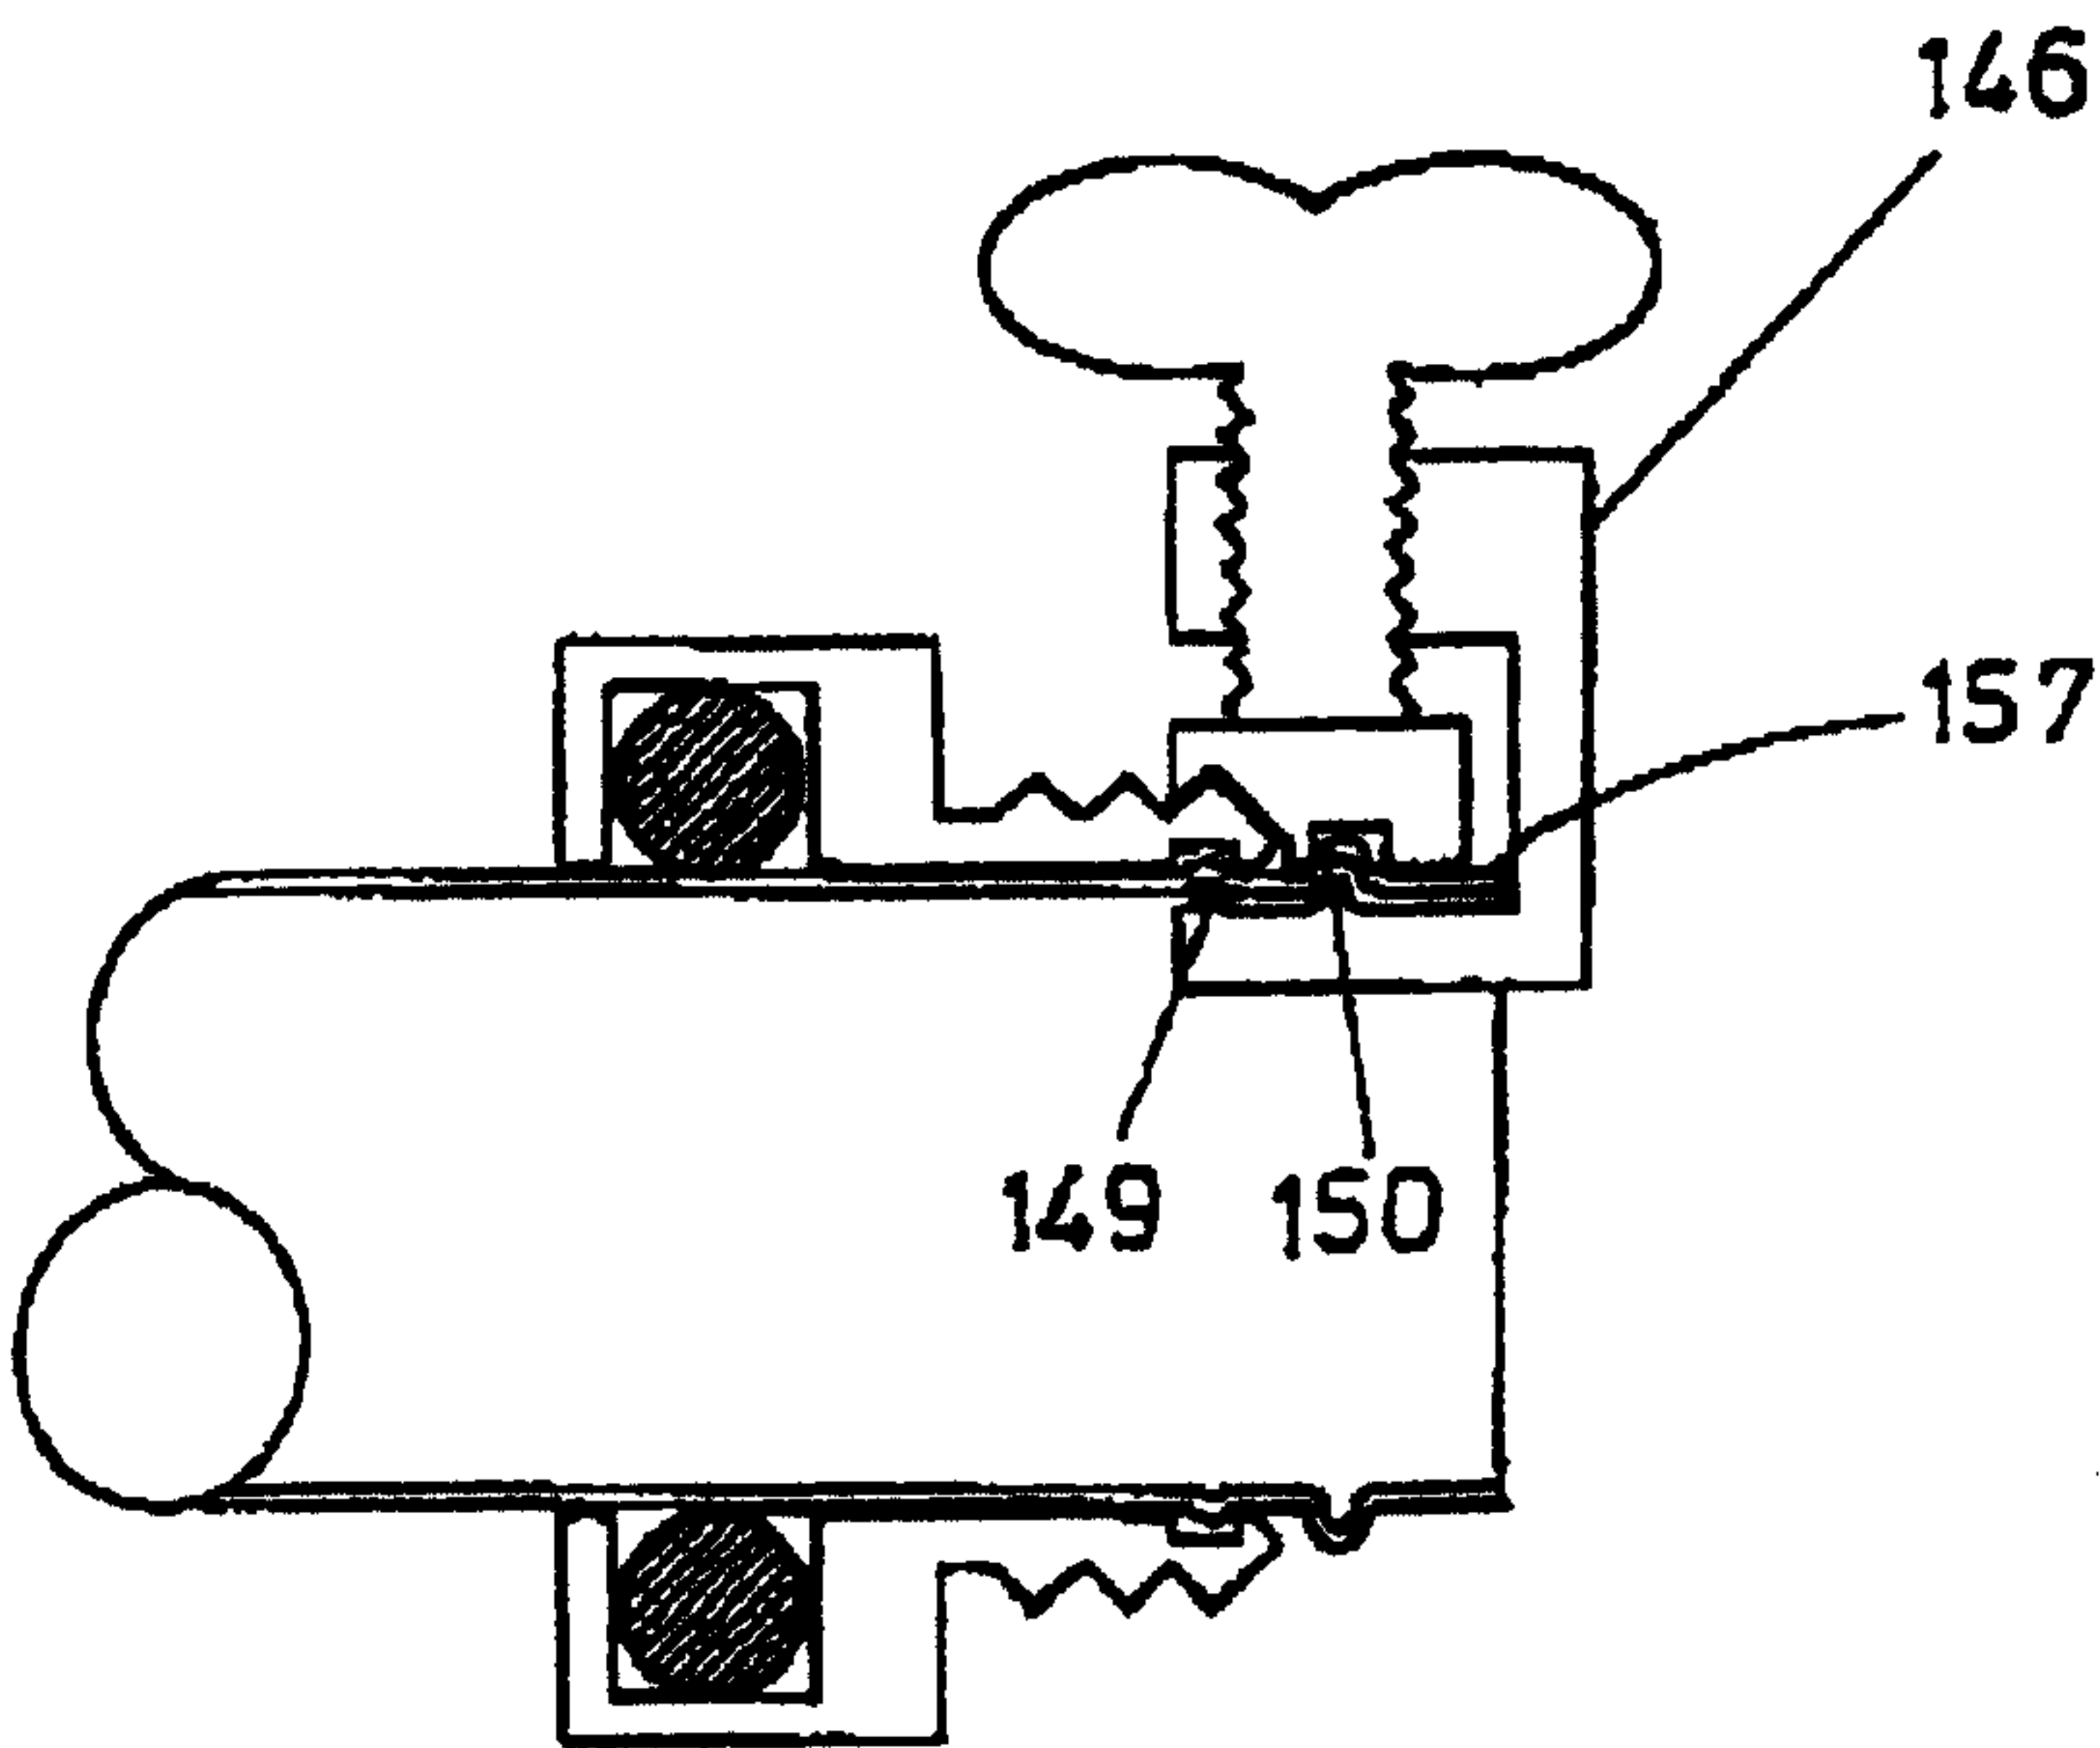


FIG. ¹³~~14~~