




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01R 23/02	A1	(11) International Publication Number: WO 97/24783 (43) International Publication Date: 10 July 1997 (10.07.97)
(21) International Application Number: PCT/US96/20428 (22) International Filing Date: 26 December 1996 (26.12.96) (30) Priority Data: 08/580,943 29 December 1995 (29.12.95) US (71) Applicant: BERG TECHNOLOGY, INC. [US/US]; One East First Street, Reno, NV 89501 (US). (72) Inventor: BELOPOLSKY, Yakov; 2407 West Bayberry Drive, Harrisburg, PA 17112 (US). (74) Agents: LONG, Daniel, J. et al.; 825 Old Trail Road, Etters, PA 17319 (US).		(81) Designated States: CN, JP, KR, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: INSERT FOR A MODULAR JACK USEFUL FOR REDUCING ELECTRICAL CROSSTALK

(57) Abstract

An insert for a modular jack assembly insert comprising an insulative member (10) having top and bottom walls (12, 14), a front end (20) and a rear recess (21); a first wire extending from adjacent the bottom wall (14) of the insulative member (10) across the rear recess (21) to the top wall (12) and then through the front end (20) of the insulative member (10); and a second wire extending from adjacent the bottom wall (14) of the insulative member (10) across the rear recess (21) in non-contacting, overlapping relation with the first wire. Surprisingly and unexpected reductions in electrical crosstalk are achieved with this insert.

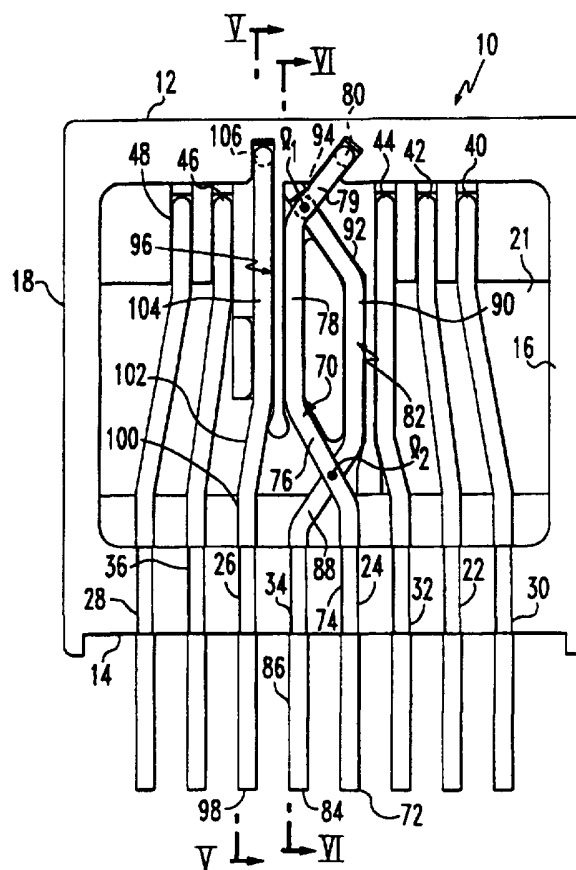

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

INSERT FOR A MODULAR JACK USEFUL FOR REDUCING ELECTRICAL CROSSTALK

5 Background of Invention

1. **Field of the Invention:** The present invention relates to electrical connectors and more particularly to modular jacks for use in telecommunications equipment.

2. Brief Description of Prior Developments: Modular jacks are used in two broad categories of signal transmission: analog (voice) and digital (data) transmission. These categories can overlap somewhat since digital systems are used for voice transmission as well. Nevertheless, there is a significant difference in the amount of data transmitted by a system per second. A low speed system would ordinarily transmit from about 10 to 16 megabytes per second (Mbps), while a high speed system should be able to handle 155 Mbps or even higher data transfer speeds. Often, high speed installations are based on asynchronous transfer mode transmission and utilize shielded and unshielded twisted pair cables.

With recent increases in the speed of data transmission, requirements have become important for electrical connectors, in particular, with regard to the reduction or elimination of crosstalk. Crosstalk is a phenomena in which a part of the electromagnetic energy transmitted through one of multiple conductors in a connector causes electrical currents in the other conductors.

Another factor which must be considered is that the telecommunications industry has reached a high degree of standardization in modular jack design. Outlines and contact areas are essentially fixed and have to be interchangeable with other designs. It is, therefore, important that any novel modular jack allow with only minor modification, the use of conventional parts or tooling in its production.

There is, therefore, a need for a modular jack insert which will reduce or eliminate crosstalk in telecommunications equipment.

There is also a need for such a modular jack insert which can reduce or eliminate crosstalk and common mode interference which is interchangeable with prior art modular jacks and which may be manufactured using conventional parts and tooling.

5

Summary of the Invention

The present invention consists of an insert for a modular jack assembly which, surprisingly and unexpectedly, reduces electrical cross talk.

In the insert of the present invention there is an insulative housing having a top and bottom walls, lateral walls, a front end and a rear recess. A pair of wires
10 extend from the bottom wall to the top wall and then horizontally through the front end in non-contacting overlapping relation. One of these wires extends upwardly beyond the upper end of the other wire. Another wire is positioned in generally parallel non-overlapping, non-contacting arrangements with these two other wires and this third wire also extends from the bottom wall to the top wall and then
15 horizontally through the front end wall at a point which is in space vertical relation above the first wire. The first and second wires will also be in separate vertical planes while the third wire may share common plane with the second wire otherwise may be used in the modular jacking conventional manner.

In a second embodiment of this insert, a first wire extends from the bottom
20 wall, first vertically then diagonally in a first vertical plane to an upper point at which it extends horizontally toward the front end. A second wire extends in a vertical plane. In a second vertical plane from the bottom wall to a point above the upper point of the first wire and then extends diagonally upwardly to a point where it extends horizontally toward the front end so that the wires are non-contacting
25 and non-overlapping in their respective vertical planes. A third wire extends from the bottom wall toward the top wall further than the upper end of the first wire and then also extends toward the front end. Other wires may be positioned conventionally and generally parallel arrangement such that the top ends will be in a generally common horizontal plane with the top end of the first wire.

Brief Description of the Drawings

The insert of the present invention is further described with reference to the accompanying drawings in which:

- 5 Fig. 1 is a front elevational view of a preferred embodiment of the modular jack contact insert of the present invention;
- Fig. 2 is a rear elevational view of the contact insert shown in Fig. 1;
- Fig. 3 is a side elevational view of the contact insert shown in Fig. 1;
- Fig. 4 is a bottom plan view of the modular jack insert shown in Fig. 1;
- 10 Fig. 5 is a cross sectional view through V-V in Fig. 2;
- Fig. 6 is a cross sectional view through VI-VI in Fig. 2;
- Fig. 7 is a rear perspective view of the insulative member section of the modular jack insert shown in Fig. 1;
- Fig. 8 is a front perspective view of the insulative member section of the modular jack insert shown in Fig. 1; and
- 15 Fig. 9 is a rear elevational view similar to Fig. 6 of a modular jack insert representing an alternate preferred embodiment of the present invention.

Detailed Description of the Preferred Embodiments

- 20 Referring to Figs. 1-8, a modular jack insert includes an insulative member shown generally at numeral 10. The insert is received in an insulative housing (not shown) to form a completed modular jack. The insert may have wide uses, but it is believed that it may be of particular use with a housing intended to meet standards 568.A and 568.B of the Electronics Industry Association. The insulative
- 25 member section of the insert includes a top wall 12, a bottom wall 14, lateral walls 16 and 18 and a front end wall 20. The top wall 12, bottom wall 14, lateral walls 16 and 18 and front wall 20 together form a rear recess 21. On the bottom wall there are an upper row of wire receiving grooves 22, 24, 26 and 28. There are also a more deeply recessed lower row of wire receiving grooves 30, 32, 34, and

36. It will be appreciated that the wires engaged with the lower row of wire receiving grooves and the wires engaged with the upper row of wire receiving grooves will be in separate vertical planes p_1 and p_2 , respectively. On the upper wall there are lower wire receiving grooves 40, 42, 44, 46 and 48. These wire receiving grooves connect to lateral upper horizontal apertures 50, 52, 54, 56 and 58. These lateral wire receiving grooves and apertures hold lower wires 60, 62, 64, 66 and 68. There is also a first medial passageway shown generally at numeral 70 which receives first medial wire 72. This passageway conducts the first medial wire upwardly from the bottom wall toward the top wall in a vertical leg 74, a diagonal leg 76, another vertical leg 78 and another diagonal leg 79 to a first medial horizontal aperture 80 which conducts the first medial wire through the front end wall. There is also a second medial passageway shown generally at numeral 82 which conducts a second medial wire 84 from the bottom wall toward the top wall in a vertical leg 86, a diagonal leg 88, another vertical leg 90 and another diagonal leg 92 which conveys the wire to a second medial horizontal aperture 94 that conveys the wire through the front end wall. It will be appreciated that wires 72 and 84 are in separate vertical planes, and that wire 72 overlaps wire 84 at two points so that two separate horizontal lines (l_1 and l_2 in Fig. 2) pass through both wires. It will also be appreciated that wires 72 and 98 are in a common vertical plane. There is also a third medial passageway shown generally at numeral 96 which conducts a third medial wire 98 in a vertical leg 100, a diagonal leg 102 and another vertical leg 104 to a third horizontal aperture 106 which conveys this wire through the front end wall. Referring particularly to Fig. 8, it will also be seen that on the front end wall there are a number of vertical grooves 108, 110, 112, 114, 116, 118, 120, and 122. These vertical grooves receive, respectively, wires 60, 62, 64, 72, 84, 98, 66 and 68.

Referring to Figs. 9, the insulative member of a second preferred embodiment of the insert is shown generally at numeral 210. The insulative member of a second preferred embodiment of the includes a top wall 212, a bottom

wall 214, lateral walls 216 and 218 and a front end wall. The top wall 212, bottom wall 214, lateral walls 216 and 218 and front wall 220 together form a rear recess 221. On the bottom wall there are an upper row of wire receiving grooves 222, 224, 226 and 228. There are also a more deeply recessed lower row of wire receiving grooves 230, 232, 234, 236 and 238. On the upper wall there are lateral wire receiving grooves 240, 242, 244, 246 and 248. These wire receiving grooves connect to lateral upper horizontal apertures 250, 252, 254, 256 and 258 from where they extend diagonally downward. These lower wire receiving grooves and apertures hold lower wires 260, 262, 264, 266 and 268. There is also a first medial passageway shown generally at numeral 270 which receives first medial wire 272. This passageway conducts the first medial wire upwardly from the bottom wall toward the top wall in a vertical leg 274, a diagonal leg 276 and another vertical leg 278 to a first medial horizontal aperture 280 which conducts the first medial wire through the front end wall from where it extends diagonally downward. There is also a second medial passageway shown generally at numeral 282 which conducts a second medial wire 284 from the bottom wall toward the top wall in a vertical leg 286 and a diagonal leg 288 which conveys the wire to a second medial horizontal aperture 294 that conveys the wire through the front end wall from where it extends diagonally downward. It will be appreciated that wires 272 and 284 are in separate vertical planes and that they are in non-contacting, non-overlapping relation. It will also be appreciated that wires 272 and 298 are in a common vertical plane. There is also a third medial passageway shown generally at numeral 296 which conducts a third medial wire 298 in a vertical leg 300, a diagonal leg 302 and another vertical leg 304 to a third horizontal aperture 306 which conveys this wire through the front end wall from where it extends diagonally downwardly. As was described in connection with the first embodiment, there are vertical grooves on the front side in which the wires extending diagonally from the front end are receivable.

Those skilled in the art will appreciate that stamped contacts may be readily substituted for the wires in the above described preferred embodiment.

With the above described modular jack assembly insert, surprising and unexpected reductions in electrical crosstalk may be efficiently and economically obtained. It will also be appreciated that this insert may be readily designed to be backward compatible with existing parts and tooling.

While the present invention has been described in connection with the preferred embodiments of the various figures, it is to be understood that other similar embodiments may be used or modifications and additions may be made to the described embodiment for performing the same function of the present invention without deviating therefrom. Therefore, the present invention should not be limited to any single embodiment, but rather construed in breadth and scope in accordance with the recitation of the appended claims.

Claims

WHAT IS CLAIMED IS:

1. An insert for a modular jack assembly comprising:
 - (a) an insulative member having top and bottom walls, a front end and a rear recess;
 - (b) a first conductive means extending from adjacent the bottom wall of the insulative member across the rear recess to the top wall and then through the front end of the member; and
 - (c) a second conductive means extending from adjacent the bottom wall of the insulative member across the rear recess in non-contacting overlapping relation with the first conductive means.
2. The modular jack assembly insert of claim 1 wherein the second conductive means extends upwardly beyond the first conductive means.
3. The modular jack assembly insert of claim 2 wherein there is a third conductive means which extends from adjacent the bottom wall of the insulative member across the rear recess to the top wall and then through the front end of the member and said third conductive means extends upwardly further than the first conductive means.
4. The modular jack assembly insert of claim 1 wherein the insulative member opposed lateral walls extending from said top and bottom walls.
5. The modular jack assembly insert of claim 3 wherein there are a plurality of additional conductive means.
6. The modular jack assembly insert of claim 5 wherein the conductive means are wires.

7. The modular jack assembly insert of claim 1 wherein there are a plurality of vertical wire receiving grooves on the front end of the member.

5 8. The modular jack assembly insert of claim 7 wherein there are a plurality of wire receiving grooves on the bottom wall.

9. The modular jack assembly insert of claim 8 wherein there are a plurality of horizontal apertures extending from the rear recess to the front end of the member.

10

10. The modular jack assembly insert of claim 9 wherein there are a first group of wire receiving grooves and a second group of wire receiving grooves and said first group of wire receiving grooves are recessed to a first depth and the second group of wire receiving grooves are recessed to a second depth.

15

11. The modular jack assembly insert of claim 10 wherein a first wire conducting passageway guides the first conducting means from one of the first group of wire receiving grooves on the bottom wall first vertically then diagonally then again vertically then again diagonally to a point where said passageway converges with
20 a first one of said horizontal apertures.

12. The modular jack assembly insert of claim 11 wherein a second wire conducting passageway guides the second conducting means from one of the second group of wire receiving grooves on the lower wall first vertically then
25 diagonally in overlapping relation to the first conducting means then vertically then again diagonally in overlapping relation to the first conducting to a point where said passageway converges with a second one of said horizontal apertures.

13. The modular jack assembly insert of claim 12 wherein the second horizontal apertures is positioned in vertical spaced relation above the first horizontal aperture.
- 5 14. The modular jack assembly insert of claim 13 wherein a third wire conducting passageway guides the third conducting means from one of the wire receiving grooves on the lower wall vertically to a third of said horizontal grooves in vertical spaced relation above the first horizontal apertures.
- 10 15. The modular jack assembly insert of claim 14 wherein the third conducting means is adjacent the second conducting means.
16. The modular jack assembly insert of claim 15 wherein the first of said horizontal apertures is positioned in lateral spaced relation between the second
15 and third of said horizontal apertures.
17. The modular jack assembly insert of claim 16 wherein the third conducting means is positioned on one of the second group of wire receiving grooves.
- 20 18. The modular jack assembly insert of claim 11 wherein the first conducting means extends diagonally from its initial and its subsequent vertical direction by an amount of from about 30° to about 40°.
19. The modular jack assembly insert of claim 12 wherein the second
25 conducting means extends diagonally from its initial vertical direction from about 25° to 35° and from its subsequent vertical direction by from about 35° to 45°.
20. An insert for a modular jack assembly comprising:
(a) an insulative member having a top and a bottom wall and a front end;

(b) a first conductive means extending in a first vertical plane from adjacent the bottom wall toward the top wall and then extend toward the front end in a first horizontal plane; and

5 (c) a second conductive means extending a second vertical plane from adjacent the bottom wall toward the top in a pattern such that at least two separate horizontal lines pass through both the first conductive means and the second conductive means.

10 21. The modular jack assembly insert of claim 20 wherein the second conductive means extends upwardly beyond the first conductive means.

15 22. The modular jack assembly insert of claim 21 wherein there is a third conductive means which extends from adjacent the bottom wall toward the top wall further than the first conductive means and then extends toward the front end.

23. The modular jack assembly insert of claim 22 wherein the third conductive means extends from adjacent the bottom wall toward the top wall in the second vertical plane.

20 24. An insert for a modular jack assembly comprising:

(a) an insulative member having a top wall and a bottom wall and a front end;

25 (b) a first conductive means having a vertical leg extending in a first vertical plane from adjacent the bottom wall toward the top wall and then extending diagonally in said first vertical plane in a diagonal leg to a first upper point from where it extends in a horizontal leg toward the front end; and

(c) a second conductive means having a vertical leg extending in a second vertical plane from adjacent the lower wall toward the upper

wall further than the first upper point and then extending diagonally in a diagonal leg in the second vertical plane to a second upper point from where it extends in a horizontal leg toward the front end.

5 25. The modular jack assembly insert of claim 24 wherein vertical and diagonal legs of the first and second conductive means are not overlapping.

26. The modular jack assembly insert of claim 25 wherein the diagonal leg of the first conductive means extends toward the second conductive means.

10

27. The modular jack assembly insert of claim 25 wherein the diagonal leg of the second conductive means extends in a direction so that the horizontal leg of the second conductive means is superimposed over at least part of the first conductive means.

15

28. The modular jack assembly insert of claim 27 wherein there is a third conductive means which extends from adjacent the bottom wall further than the first conductive means and then extends toward the front end.

20 29. The modular jack assembly insert of claim 28 wherein the third conductive means extends from adjacent the bottom wall toward the top wall in the second vertical plane.

30. An insert for a modular jack assembly comprising:

- 25 (a) an insulative member having top and bottom walls a front end and a rear recess;
- (b) a first conductive means extending from adjacent the bottom wall of the insulative member across the rear recess to the top wall and then through the front end of the member and said first conductive means

has a vertical leg extending in a first vertical plane from adjacent the bottom wall toward the top wall and then extends diagonally in said first vertical plane in a diagonal leg to a first upper point from where it extends in a horizontal leg toward the front end; and

- 5 (c) a second conductive means extending from adjacent the bottom wall of the insulative member across the rear recess in non-contacting relation with said first conductive means and extending beyond the first conductive means.

10 31. The modular jack assembly insert of claim 30 wherein the first conductive means having a vertical leg extending in a first vertical plane from adjacent the bottom wall toward the top wall and then extending diagonally in said first vertical plane in a diagonal leg to a first upper point from where it extends in a horizontal leg toward the front end.

15

32. The modular jack assembly insert of claim 31 wherein the second conductive means has a vertical leg extending in a second vertical plane from adjacent the bottom wall toward the upper wall further than the first upper point and then extending diagonally in a diagonal leg in the second vertical plane toward the

20 front end.

1/6

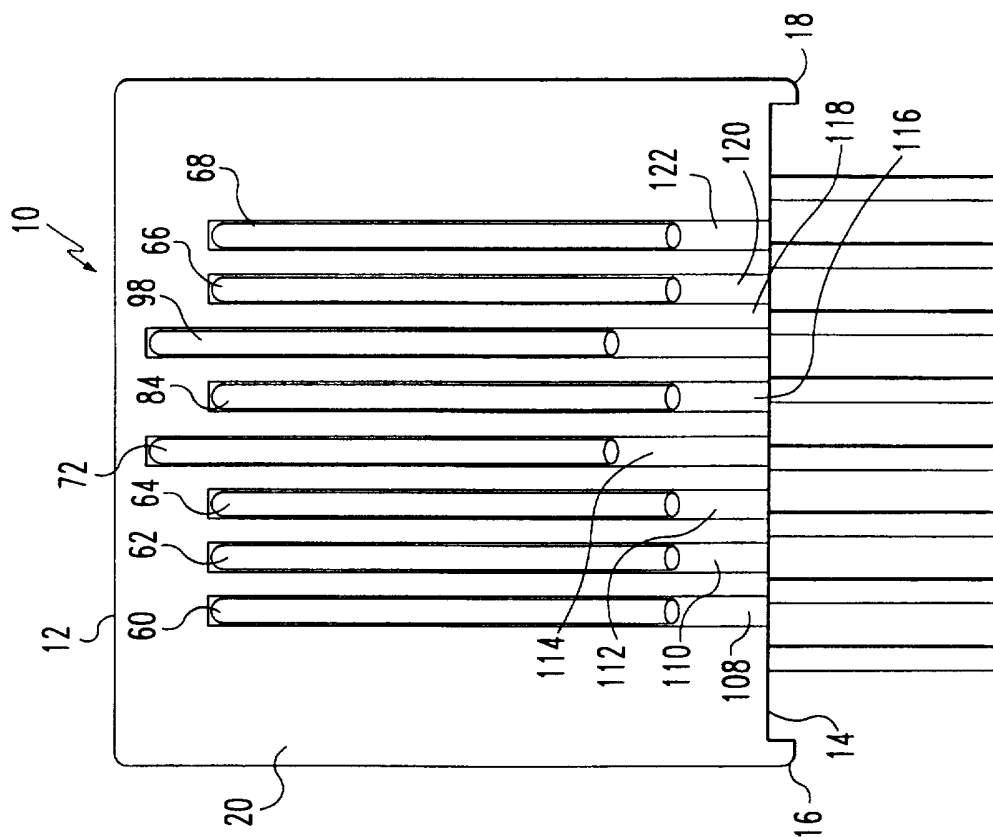


FIG. 1





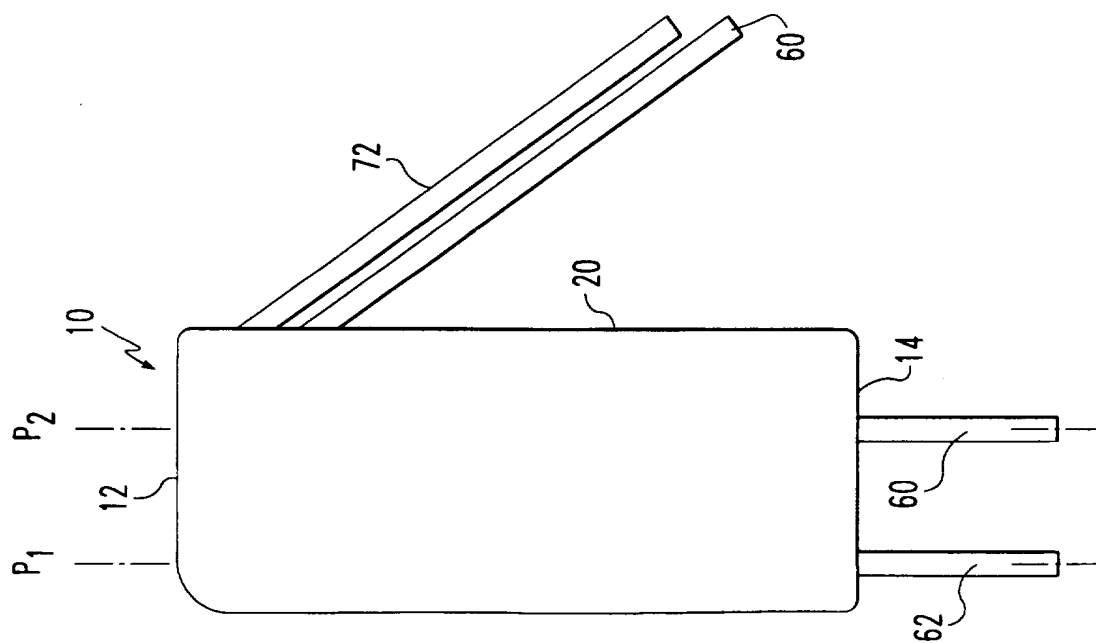


FIG. 3

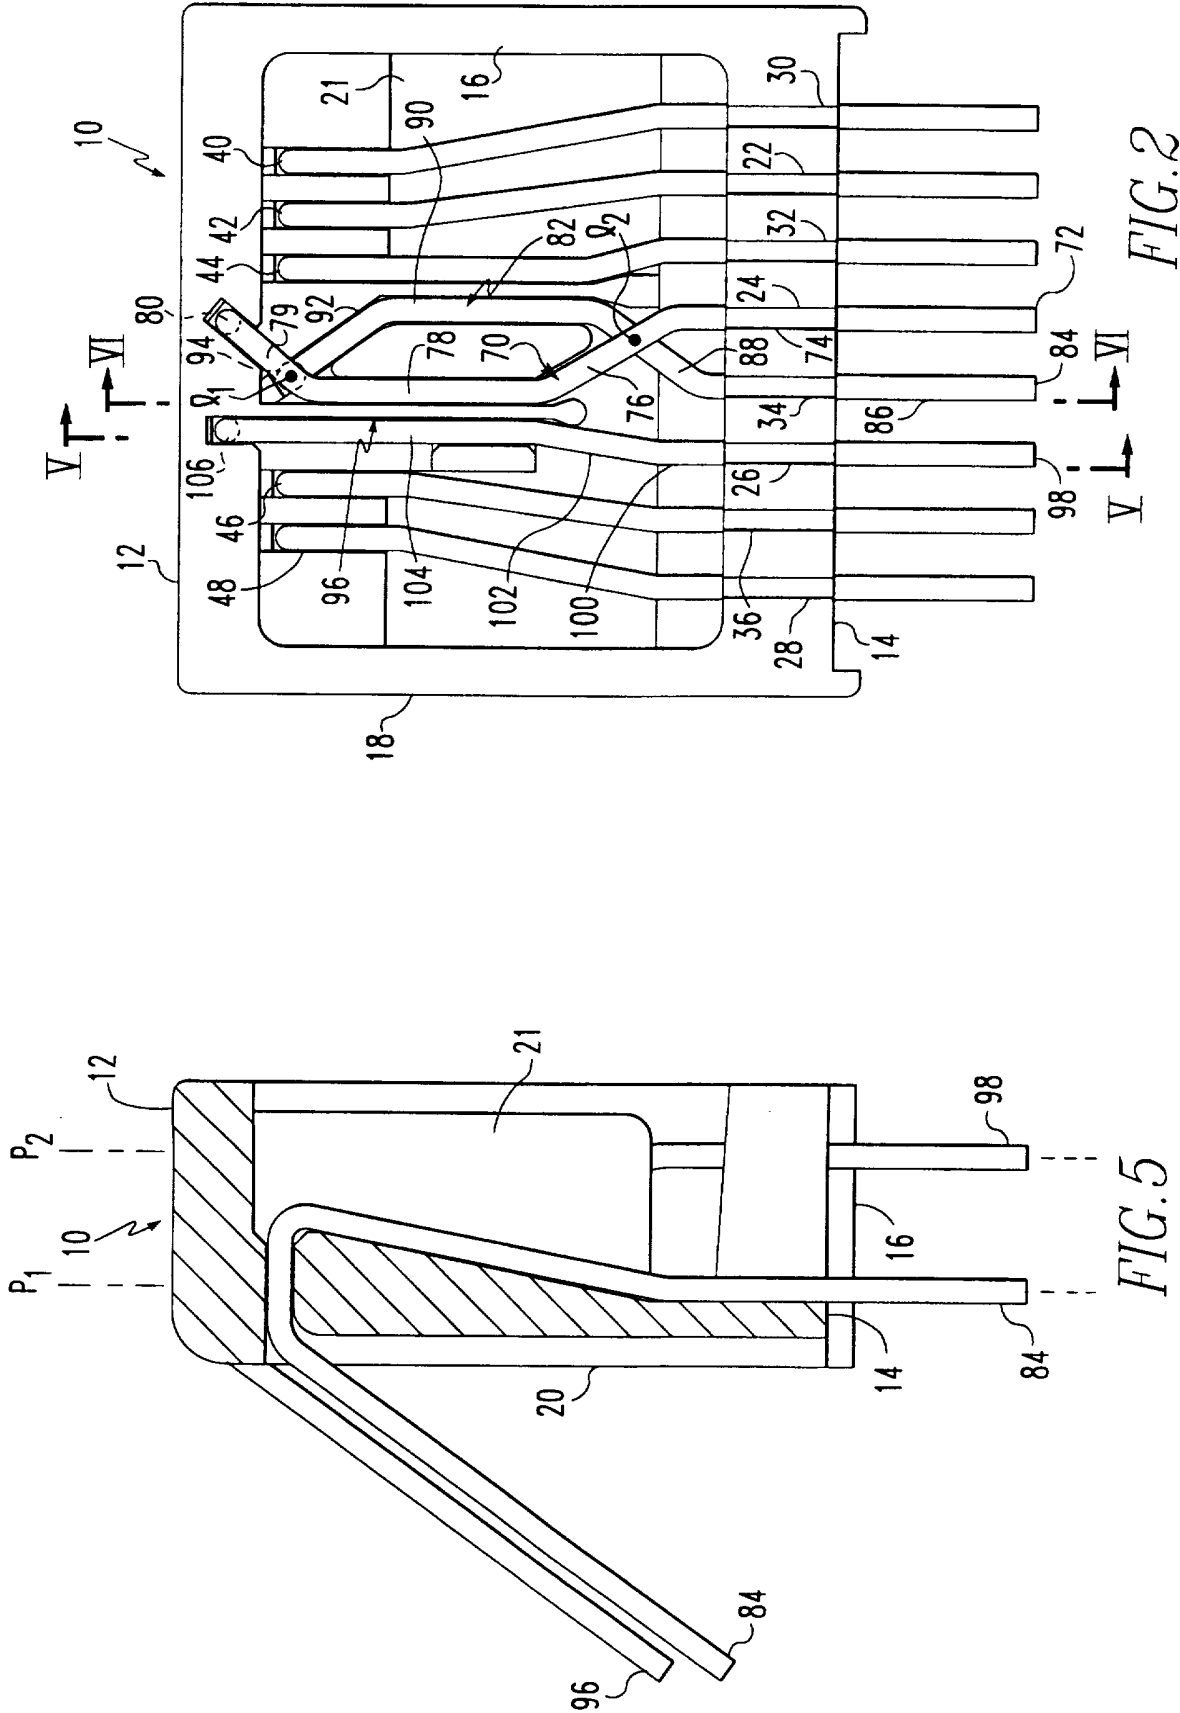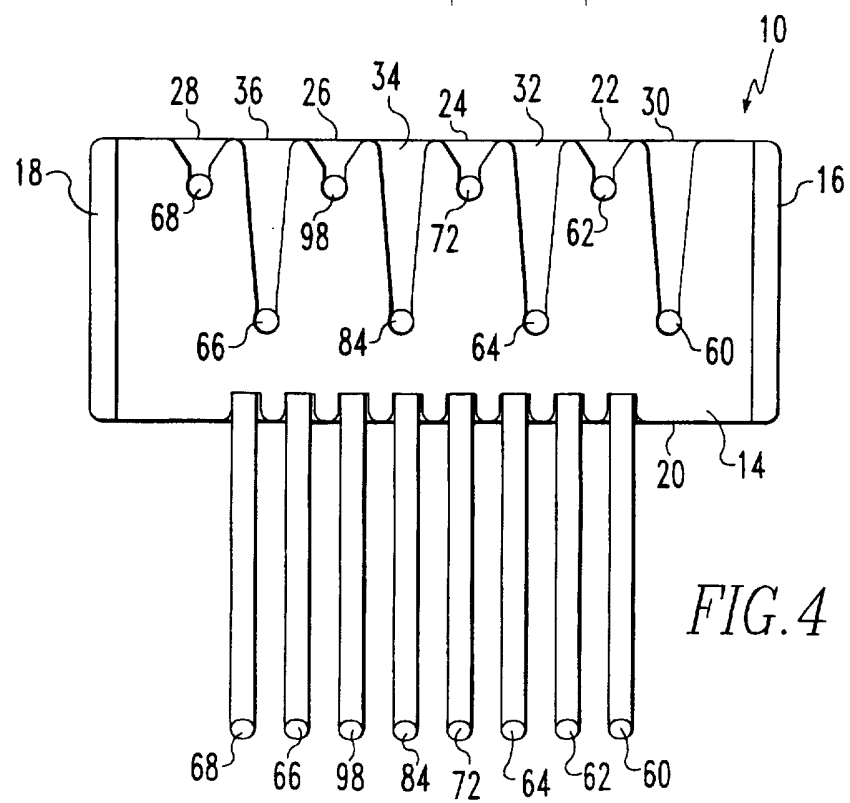

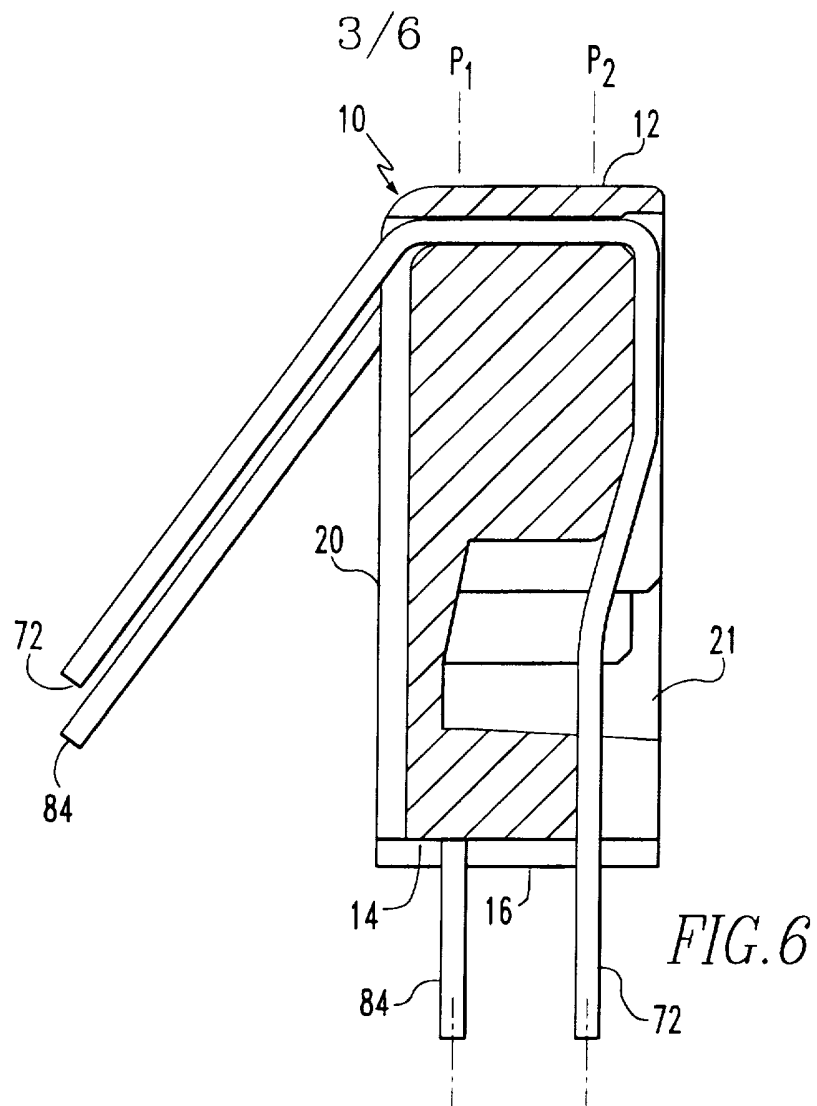

4/6

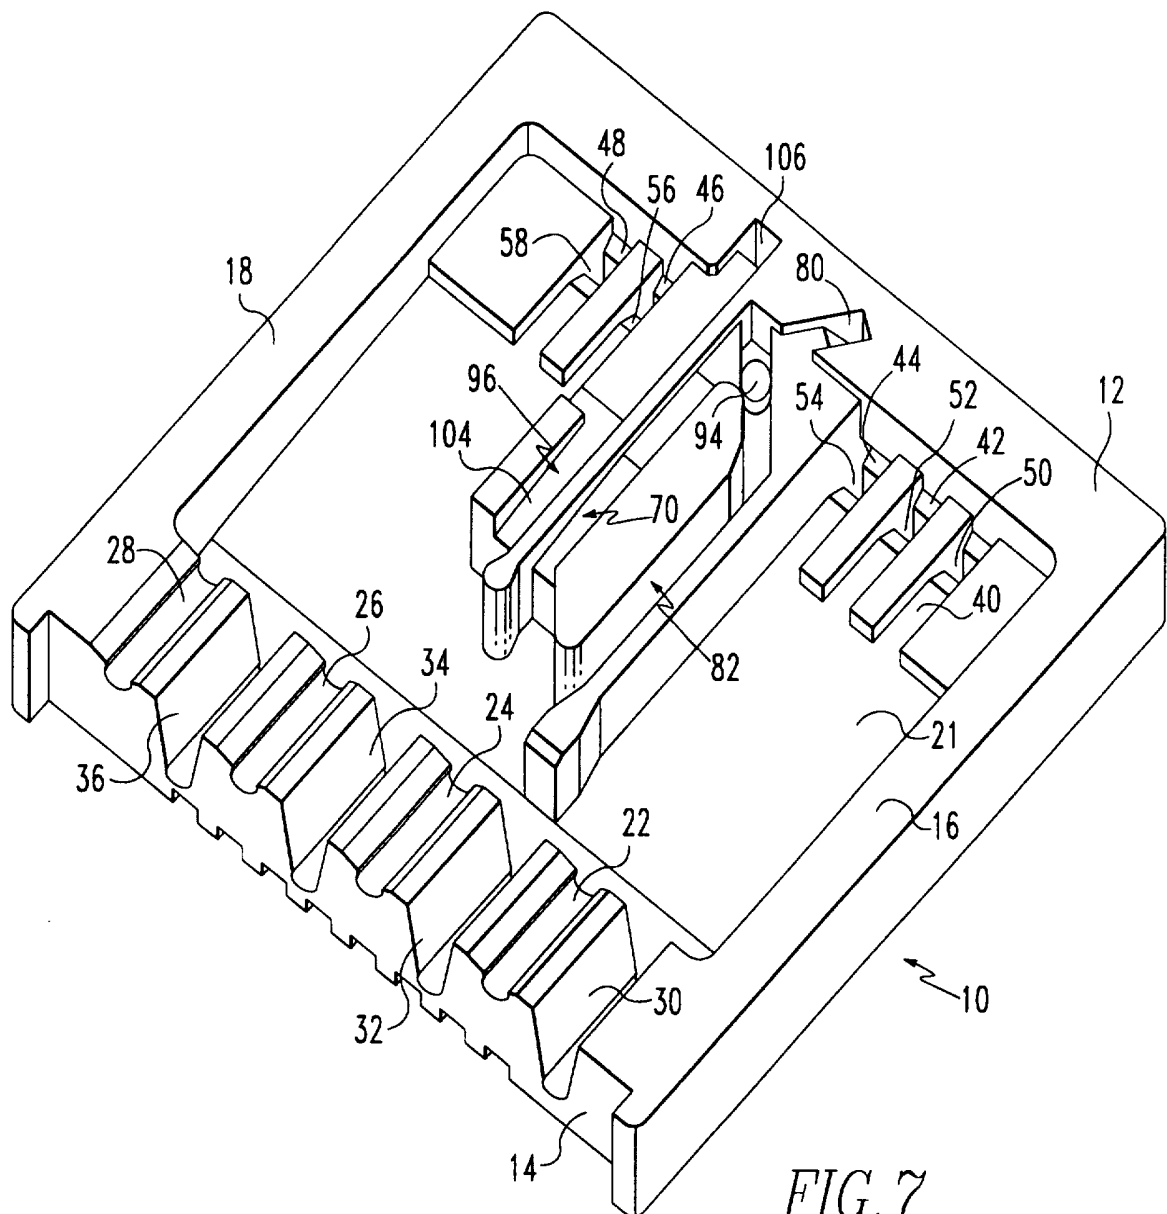

5/6

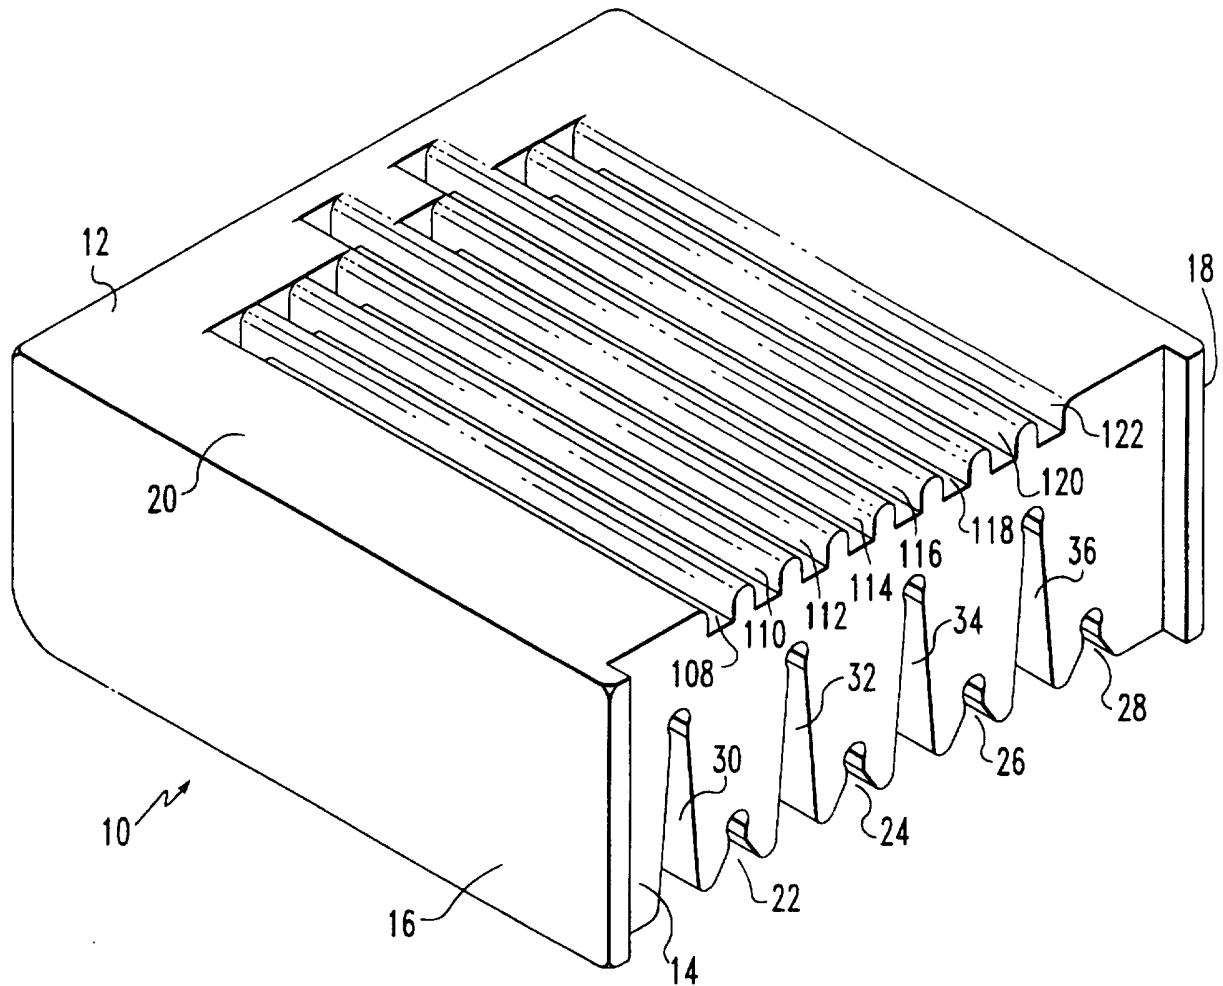


FIG. 8

6/6

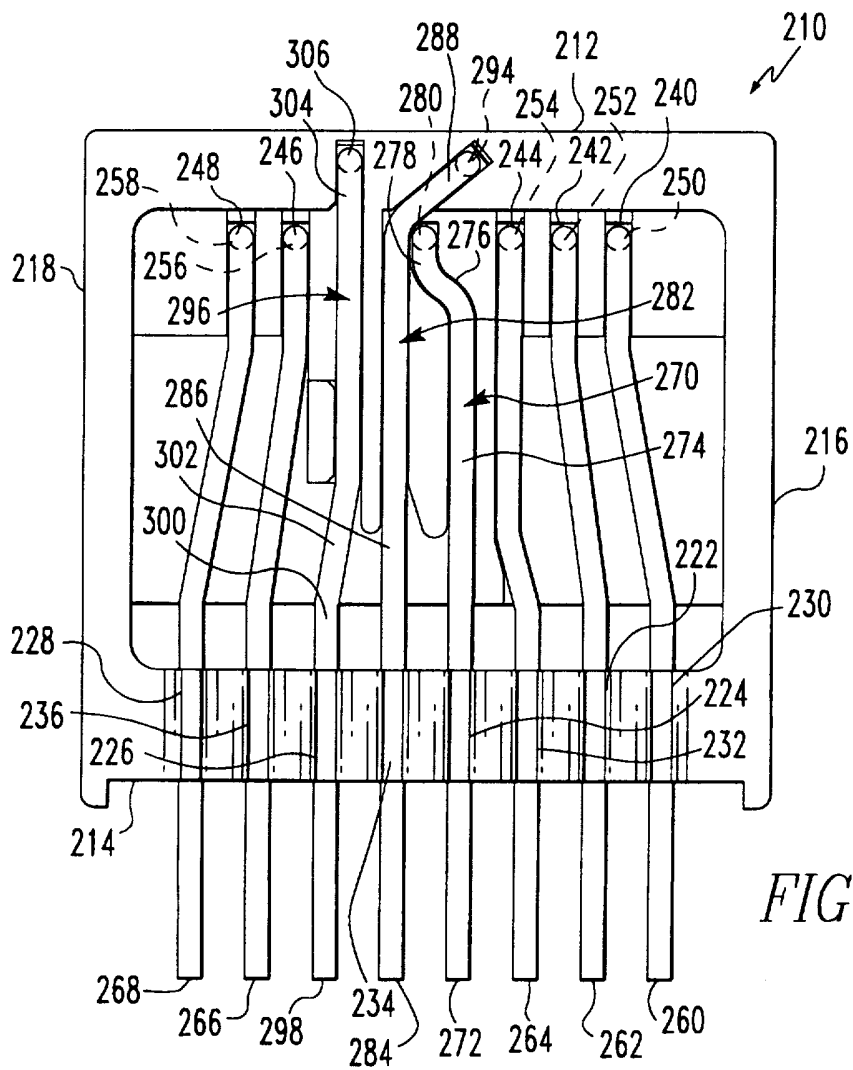


FIG. 9

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US96/20428

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H01R 23/02

US CL : 439/676

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 439/676, 941, 344, 607

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,456,619 A (BELOPOLSKY ET AL.) 10 OCTOBER 1995, SEE ENTIRE DOCUMENT	1-23
Y	US 5,362,257 A (NEAL ET AL.) 08 NOVEMBER 1994, SEE ENTIRE DOCUMENT	2, 3, 5-23
Y	US 5,399,107 A (GENTRY ET AL.) 21 MARCH 1995, SEE ENTIRE DOCUMENT	2, 3, 5-23, 30
A	US 4,734,043 A (EMERT ET AL.) 29 MARCH 1988	
A	US 4,274,691 A (ABERNETHY ET AL.) 23 JUNE 1981	

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

10 FEBRUARY 1997

Date of mailing of the international search report

04 MAR 1997

 Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

For PAULA AUSTIN BRADLEY

Telephone No. (703) 308-1148


Sheila Veney
Patent Specialist
Group 3200