

(19)



(11)

EP 3 182 018 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
17.04.2019 Bulletin 2019/16

(51) Int Cl.:
F24C 7/08 (2006.01) F24C 15/06 (2006.01)

(21) Application number: **16200839.5**

(22) Date of filing: **28.11.2016**

(54) **AN OVEN HAVING A CONTROL PANEL**

OFEN MIT EINER BEDIENBLENDE

FOUR COMPRENANT UN PANNEAU DE COMMANDE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **18.12.2015 TR 201516334**

(43) Date of publication of application:
21.06.2017 Bulletin 2017/25

(73) Proprietor: **BSH Hausgeräte GmbH
81739 München (DE)**

(72) Inventors:
• **Atay, Erdinc**
39750 KIRKLARELI (TR)
• **Kenar, Serdar**
59600 TEKIRDAG (TR)
• **Mert, Mustafa**
59600 TEKIRDAG (TR)

(56) References cited:
EP-A1- 0 826 489 EP-A2- 1 160 513

EP 3 182 018 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to control panels of domestic ovens where cooking is realized.

[0002] In the oven body, there is a cooking chamber, a door closing the cooking chamber in an openable manner, and a control panel positioned at the upper section of the door. On the control panel, pluralities of setting elements are placed in order for the user to realize the cooking setting. The setting elements comprise a button, a rotary button which provides transmitting of the setting commands physically, or a screen for informing the user or for providing the user to make information entry. Since glass and partially light transmittance based materials can be easily cleaned, the outermost layer of the control panel is made of glass or a partially light transmittance material.

[0003] In order to draw the attention of the user to the control panel visually, strips with reflective surface are adhered onto the control panel. In the control panels which is made of partially light transmittance material, the strip, having a reflective layer on the outer section, is fixed on the glass by means of an adhesive. However, in domestic ovens where vapor output occurs under the control panel, the oily vapor rises through the outlet, and it adheres onto the reflective layer provided on the control panel. In order to clean the oily layer, oil solvent chemicals are applied onto the control panel. The oil solvent chemicals and the abrasive cleaning apparatus used for cleaning may lead to abrasion of the reflective surface in time. Prior document EP 0 826 489 A1 discloses an oven comprising a control panel made of a glass plate, comprising a decorative steel layer. In order to protect the decorative steel layer from scratches, the decorative steel layer is positioned on a rear surface of the control panel. Prior document EP 1 160 513 A2 discloses a decorative plate mounted on a support panel, namely on a sealing frame, with a double sided adhesive. For fixing the decorative plate at the oven corpus, a rear panel is provided, wherein the support panel and the rear panel are in the form of abutted plates.

[0004] The object of the present invention is to facilitate cleaning of partially light transmittance material and especially glass based control panel provided in domestic ovens, as well as to protect the reflective strip from effects like hot air and humidity after assembly.

[0005] In order to realize the abovementioned object, the present invention is an oven comprising a cooking chamber covered by an openable door, a control panel provided above the upper section of the door and made of a partially light transmittance material. According to the present invention, there is a transparent section and by a reflective strip positioned at the transparent section on a rear surface of the control panel. When the oily vapor occurring as a result of cooking is discharged through the exhaust opening, the oily vapor may smear to the control panel; however, the oily vapor cannot directly access the reflective strip. In this case, when the transpar-

ent section of the control panel is cleaned from outside, the light reflection efficiency of the reflective strip provided on the rear surface is easily increased. In a probable embodiment, the reflective strip may be in the form of a plate, and in an alternative embodiment, it may be a layer applied to the transparent section so as to cover from the rear wall.

[0006] In a preferred embodiment of the present invention, the transparent section and the corresponding reflective strip are extended transversely on the control panel. Thus, the most efficient visual access area is provided since it occupies a small area along the control panel. In a probable embodiment, the reflective strip and the corresponding transparent section have a sectioned form. By means of this, a different optical effect can be obtained. In a probable embodiment, in order to draw visual attention to the section where clock and other control elements are provided on the control panel, a piece may extend, and in other sections, reflective strip may extend as the continuation of said piece.

[0007] In a preferred embodiment of the present invention, there is an adhesion element is fixed to the reflective strip. The adhesion element facilitates the assembly of the reflective strip to the transparent section. In a probable embodiment, the reflective strip is fixed by means of a housing formed so as to be close to the transparent section on the rear surface of the control panel.

[0008] According to the present invention, the control panel comprises a support panel and the reflective strip is located in sandwich form between the support panel and the control panel. The support panel applies pressure from the rear surface of the control panel and pushes the reflective strip to the transparent section. By means of this, the compression pressure is equally distributed to the reflective strip along the transparent section. The reflective strip is protected from effects like hot air, humidity after assembly by means of the support panel covering the rear section thereof.

[0009] In a preferred embodiment of the present invention, the adhesion element is a double-sided adhesive band which adheres to the reflective strip from one side and which adheres to the support panel from the other side. In this case, the double-sided band adhered to the reflective strip from the front section can be fixed to a support element from the rear section thereof, for instance, it can be fixed to the support panel. In a probable embodiment, the adhesion element has an adhesion band structure which is wider than the reflective strip. The band, whose adhesive section is for instance made of acrylic foam, overflows from the periphery of the reflective strip, and fixes the reflective strip to the rear surface of the control panel from the peripheral adjacent edges of the transparent section.

[0010] In a preferred embodiment of the present invention, there is a rear panel is fixed to the control panel so that the support panel is confined between the control panel and the rear panel. The rear panel provides the support panel to apply pressure to the reflective element.

In a probable embodiment, the rear panel bears connection elements extending to the control panel in order to keep the sandwich structure together.

[0011] In a preferred embodiment of the present invention, the control panel, the support panel and the rear panel are in the form of parallel and abutted plates. By means of this, a compact structure is obtained which is in the form of abutted plates.

Figure 1 is the frontal schematic view of an oven comprising a representative embodiment of the subject matter control panel.

Figure 2a is the perspective assembly view of a representative embodiment of the subject matter control panel.

Figure 2b is the exploded view of the embodiment illustrated in Figure 2a.

[0012] In this detailed description, the subject matter improvement is explained with references to examples without forming any restrictive effect only in order to make the subject more understandable.

[0013] In Figure 1, the frontal view of a domestic oven is given. The oven body (1) comprises a cooking chamber (7) wherein the heating equipment is provided and wherein the items to be cooked are placed. The cooking chamber (7) is covered by means of a door (4) which can be opened by drawing. Flanges (3) are provided at the two mutual sides of the door (4). At the front upper section of the body (1), there is a control panel (10) which is in partially light transmittance form. Control elements (2) are arranged on the control panel (10). The control elements (2) comprise a digital display and buttons (6) provided around said display. In order for the buttons (6) to pass through the control panel (10), the partially light transmittance material is cut in the form of a button opening (16) which has a form suitable for the button (6) passage. On the body (1), an exhaust opening (5) is provided between the upper section of the door (4) and the control panel (10). The exhaust opening (5) extends from end to end transversely under the control panel (10).

[0014] In Figure 2a and 2b, a representative embodiment of the subject matter control panel (10) is illustrated. The control panel (10) has a rectangular form. At the position close to the upper edge of the control panel (10), a transparent section (12) from end to end is delimited. The transparent section (12) is a transparent glass form permitting light passage through the control panel (10) between a rear surface (11) and a front surface provided on the opposite section with respect to said rear surface (11). On the control panel (10), the regions outside the transparent section (12) define opaque section (15) which does not transmit light through. The opaque section (15) is in black color.

[0015] On the back surface (11) of the control panel (10), a reflective strip (20) is aligned so as to correspond

to the transparent section (12). The reflective strip (20) is a thin and long strip having a light reflecting film on the front face thereof. An adhesion element (30) is positioned at the rear section of the reflective strip (20). Said adhesion element (30) is a double-sided band which is wider than the reflective strip (20). The adhesion element (30) is adhered to the rear face of the reflective strip (20) from one face thereof. The adhesion element (30) is adhered to a rear panel (50), which is a wide metal plate, from one face thereof. The rear panel (40) is dimensioned so as to cover the control panel (10) from the rear section. A flat support panel (40) is positioned between the control panel (10) and the rear panel (40). The upper edge of the support panel (40) is spaced apart from the upper edge of the control panel (10). Thus, a support section (52), defined at the upper edge of the rear panel (50) and where the reflective strip (20) is held from the rear side, aligns the reflective strip (20) to the transparent section (12) provided at the control panel (10). The control panel (10) forms a sandwich structure together with the support panel (40) and the rear panel (50). In order to provide this, a connection flap (54), reaching the control panel (10), is extended on the rear panel (50).

[0016] At the control panel (10) provided on the oven body (1), reflective strip (20) is used in order to define a region which reflects the light coming from outside and which attracts visual attention to the control panel (10). The reflective strip (20) is fixed to the rear surface (11) of the control panel (10) where exhaust opening (5) extends along the lower edge thereof. By means of the sandwich structure of the control panel (10), the discharge vapor blown through the exhaust opening (5) towards outside of the body (1) cannot reach the reflective strip (20). The support panel (40) is adjacent to the reflective strip (20) from the lower section. When the rear panel (50) and the control panel (10) overlap onto each other along the lateral surfaces thereof, the support panel (40), which remains in between, forms housing where the reflective strip (20) is seated from the upper section at the alignment of the support section (52). The reflective strip (20), fixed in the housing, receives outer ambience light arriving at the transparent section (12) and the control panel (10) from the front section and it partially reflects the outer ambience light. The reflective strip (20) is made of steel material which is brushed so as to decrease the amount of light reflection. In alternative embodiments, the reflective strip (20) can be configured so as to have chrome, aluminum or similar metallic surface.

REFERENCE NUMBERS

[0017]

- 1 Body
- 2 Control element
- 3 Flange
- 4 Door
- 5 Exhaust opening

6 Button
 7 Cooking chamber
 10 Control panel
 11 Rear surface
 12 Transparent section
 14 Lower edge
 15 Opaque section
 16 Button opening
 20 Reflective strip
 30 Adhesion element
 40 Support panel
 50 Rear panel
 52 Support section
 54 Connection flap

Claims

1. An oven comprising a cooking chamber (7) covered by an openable door (4), a control panel (10) provided above the upper section of the door (4) and made of a partially light transmittance material, wherein the control panel (10) comprises a transparent section (12) and wherein a reflective strip (20) is positioned at the transparent section (12) on a rear surface (11) of the control panel (10), **characterized in that** the control panel (10) comprises a support panel (40) and the reflective strip (20) is located in sandwich form between the support panel (40) and the control panel (10), wherein the support panel (40) is covering the rear section of the reflective strip (20) and wherein that the support panel (40) applies pressure from the rear surface of the control panel (10) and pushes the reflective strip to the transparent section (12) in such way, that the compression pressure is equally distributed to the reflective strip (20) along the transparent section (12).
2. An oven according to Claim 1, wherein the transparent section (12) and the corresponding reflective strip (20) are extended transversely on the control panel (10).
3. An oven according to any one of the preceding claims, wherein an adhesion element (30) is fixed to the reflective strip (20).
4. An oven according to Claim 3, wherein the adhesion element (30) is a double-sided adhesive band which adheres to the reflective strip (20) from one side and which adheres to the support panel (40) from the other side.
5. An oven according to Claim 4, wherein a rear panel (50) is fixed to the control panel (10) so that the support panel (40) is confined between the control panel (10) and the rear panel (50).

6. An oven according to Claim 5, wherein the control panel (10), the support panel (40) and the rear panel (50) are in the form of parallel and abutted plates.

Patentansprüche

1. Backofen mit einem Garraum (7), der von einer öffenbaren Tür (4) abgedeckt ist, einem oberhalb des oberen Abschnitts der Tür (4) vorgesehenen Bedienfeld (10), das aus einem teilweise transparenten Material hergestellt ist, wobei das Bedienfeld (10) einen transparenten Abschnitt (12) umfasst und an einer hinteren Fläche (11) des Bedienfelds (10) ein reflektierender Streifen (20) an dem transparenten Abschnitt (12) angeordnet ist, **dadurch gekennzeichnet, dass** das Bedienfeld (10) eine Halteblende (40) umfasst und der reflektierende Streifen (20) zwischen der Halteblende (40) und dem Bedienfeld (10) liegt, wobei die Halteblende (40) den hinteren Abschnitt des reflektierenden Streifens (20) abdeckt und von der hinteren Fläche des Bedienfelds (10) aus Druck ausübt und den reflektierenden Streifen so zu dem transparenten Abschnitt (12) hin drückt, dass sich der Kompressionsdruck an dem transparenten Abschnitt (12) entlang gleichmäßig auf den reflektierenden Streifen (20) verteilt.
2. Backofen nach Anspruch 1, wobei der transparente Abschnitt (12) und der entsprechende reflektierende Streifen (20) an dem Bedienfeld (10) quer verlaufen.
3. Backofen nach einem der vorhergehenden Ansprüche, wobei ein Haftelement (30) an dem reflektierenden Streifen (20) fixiert ist.
4. Backofen nach Anspruch 3, wobei es sich bei dem Haftelement (30) um ein doppelseitiges Klebeband handelt, das auf einer Seite an dem reflektierenden Streifen (20) und auf der anderen Seite an der Halteblende (40) haftet.
5. Backofen nach Anspruch 4, wobei eine hintere Blende (50) so an dem Bedienfeld (10) fixiert ist, dass die Halteblende (40) zwischen dem Bedienfeld (10) und der hinteren Blende (50) eingeschlossen ist.
6. Backofen nach Anspruch 5, wobei das Bedienfeld (10), die Halteblende (40) und die hintere Blende (50) in Form von parallelen und aneinander anliegenden Platten vorliegen.

Revendications

1. Four comprenant une chambre de cuisson (7) couverte par une porte ouvrante (4), un panneau de commande (10) prévu au-dessus de la partie supé-

rieure de la porte (4) et fait en un matériau transmettant partiellement la lumière, dans lequel le panneau de commande (10) comprend une partie transparente (12) et dans lequel une bande réfléchissante (20) est positionnée sur la partie transparente (12) sur une surface arrière (11) du panneau de commande (10), **caractérisé en ce que** le panneau de commande (10) comprend un panneau de support (40) et la bande réfléchissante (20) est prise en sandwich entre le panneau de support (40) et le panneau de commande (10), dans lequel le panneau de support (40) couvre la partie arrière de la bande réfléchissante (20) et dans lequel le panneau de support (40) exerce une pression au départ de la surface arrière du panneau de commande (10) et pousse la bande réfléchissante vers la partie transparente (12) de telle sorte que la pression de compression est uniformément répartie sur la bande réfléchissante (20) le long de la partie transparente (12).

2. Four selon la revendication 1, dans lequel la partie transparente (12) et la bande réfléchissante (20) correspondante s'étendent transversalement sur le panneau de commande (10).
3. Four selon l'une quelconque des revendications précédentes, dans lequel un élément d'adhésion (30) est fixé à la bande réfléchissante (20).
4. Four selon la revendication 3, dans lequel l'élément d'adhésion (30) est une bande adhésive à double face qui adhère à la bande réfléchissante (20) par un côté et qui adhère au panneau de support (40) par l'autre côté.
5. Four selon la revendication 4, dans lequel un panneau arrière (50) est fixé au panneau de commande (10) de sorte que le panneau de support (40) est confiné entre le panneau de commande (10) et le panneau arrière (50).
6. Four selon la revendication 5, dans lequel le panneau de commande (10), le panneau de support (40) et le panneau arrière (50) revêtent la forme de plaques parallèles et se jouxtent.

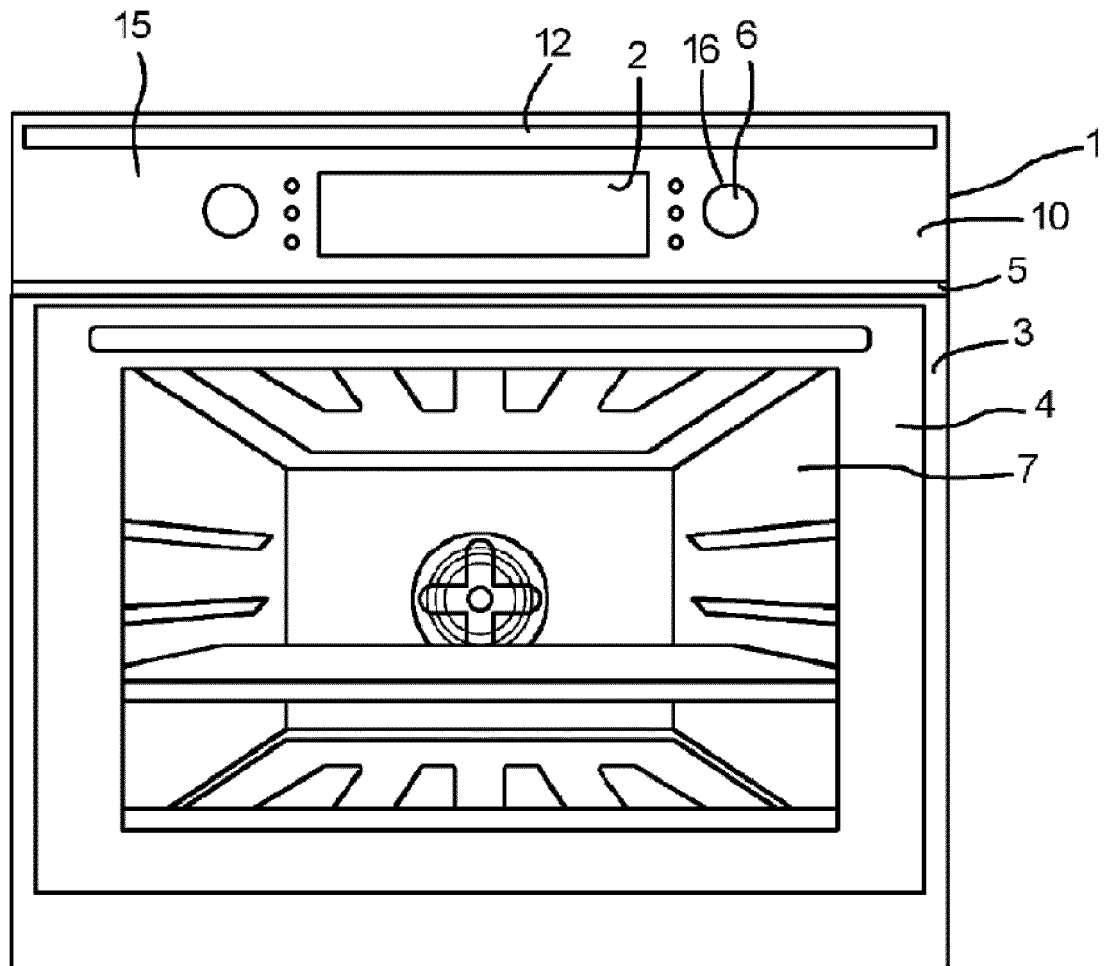


Figure 1

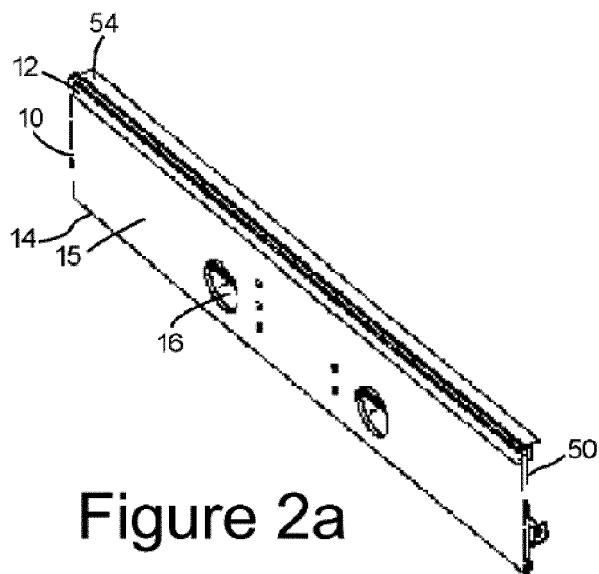


Figure 2a

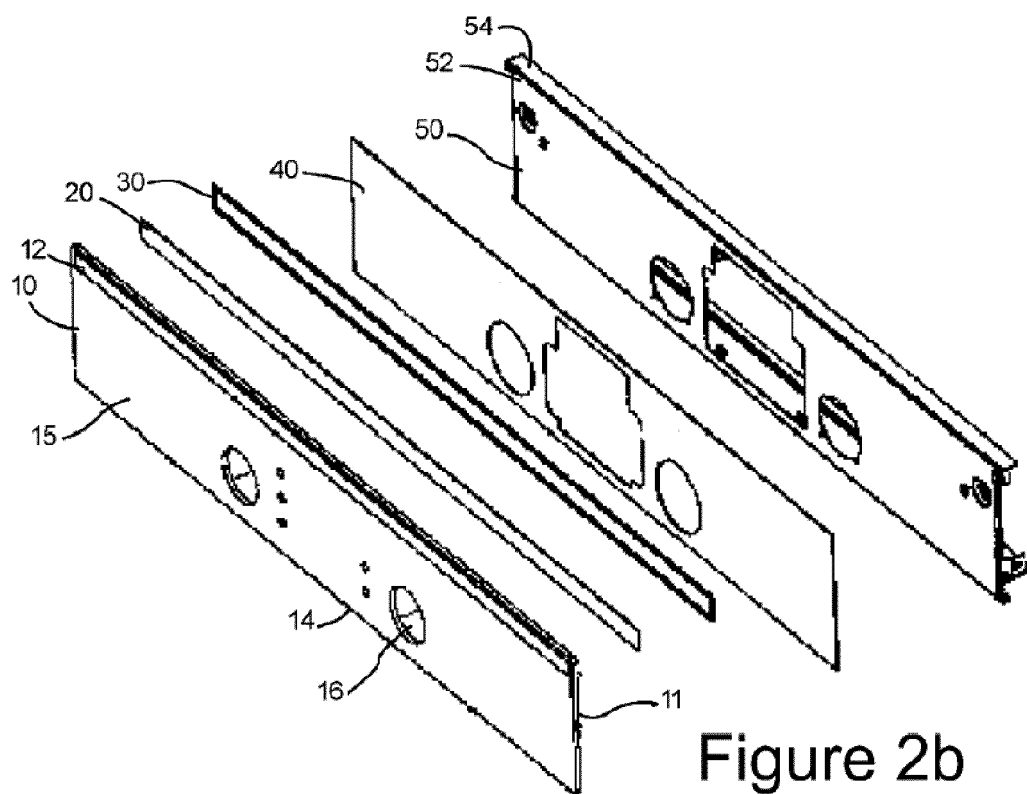


Figure 2b

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0826489 A1 [0003]
- EP 1160513 A2 [0003]