



- (51) International Patent Classification:
B65D 85/804 (2006.01)
- (21) International Application Number:
PCT/EP2014/063479
- (22) International Filing Date:
26 June 2014 (26.06.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13174466.6 1 July 2013 (01.07.2013) EP
- (71) Applicant: NESTEC S.A. [CH/CH]; Av. Nestlé 55, CH-1800 Vevey (CH).
- (72) Inventors: NORDQVIST, David; Chemin des Epinettes 6, CH-1007 Lausanne (CH). ABEGGLEN, Daniel; Rue du Bugnon 11, CH-1439 Rances (CH). GERBAULET, Arnaud; 24 rue du chalet, F-25160 Oye et Pallet (FR). PELLEGRINI, Stéphane; 3, rue champs Gauty, F-25160 Montperreux (FR).
- (74) Agent: BORNE, Patrice; Avenue Nestlé 55, CH-1800 Vevey (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: CAPSULE FOR PREPARING A BEVERAGE SUCH AS COFFEE AND THE LIKE

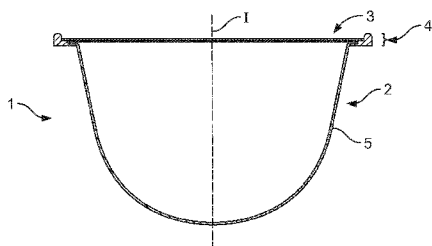


FIG. 1

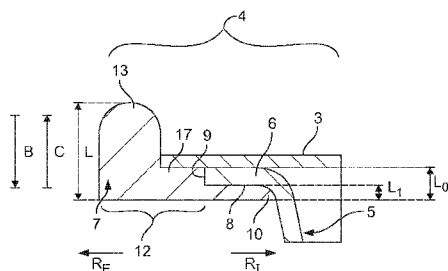


FIG. 4

(57) Abstract: Capsule (1) for the preparation of a beverage in a beverage preparation device. The capsule (1) has a flange (4) which is partially made of paper and partially made of polymer. The polymer is essentially arranged on the flange to cover at least partially the paper part and so to improve the inside tightness of the capsule, in particular, to prevent air enters inside the capsule via folds and creases.

WO 2015/000775 A1

- Published:**
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
 - *with international search report (Art. 21(3))*
 - *of inventorship (Rule 4.17(iv))*

Capsule for preparing a beverage such as coffee and the like

Field of the invention:

The present invention relates to a capsule for use in a beverage preparation device, such as a coffee machine and the like, to prepare a beverage such as coffee. The invention more particularly relates to a capsule comprising paper materials without detriment to the storage quality of the beverage ingredients in the capsule and the functional attributes of the capsule in the device. The capsule of the invention is more particularly focused to protect beverage ingredients which are sensitive to oxidation such as roast and ground coffee.

Background:

Containers made of paper laminate are known. A beverage capsule for preparing a beverage in a coffee machine formed of paper-based material is also known. A paper-based capsule provides a potentially reduced environmental impact compared to capsule made of plastic materials.

EP0524464 relates to a closed or open flexible capsule which can comprise a multi-layer of aluminium/paper/plastic in combination with a rigidifying element.

WO2009050540 relates to a capsule for the preparation of a beverage such as coffee constituted of biodegradable material in particular, a composition comprising starch, fibres, proteins, lipids and at least one biodegradable resin.

EP2218653 relates to a package with a fibrous layer fixed in a wall of the shell and a closure membrane connected to the shell by material engagement. A marking can be arranged at or in the package or fixedly arranged with the shell or the closure membrane where the shell, the fibrous layer and the closure membrane are made of biologically degradable material. The closure membrane include a laminate which is jointed to two metalized bio-plastic films in an air free- manner.

WO2009/053811 relates to a container arranged for containing a dosed quantity of a solid product for extracting a beverage; the container having walls made of a material that is impermeable to water and oxygen and may be degradable and/or an edible film.

WO2010137956 relates to a capsule for containing beverage ingredients, comprising a sealing member for achieving a sealing effect with a beverage production device wherein an external surface of the sealing member comprises fibrous and/or paper-like material to achieve the sealing effect against sealing surfaces of the device during closure.

WO2010137957 relates to a capsule with a body and a flange comprising a wall including material which upon being wetted expands.

EP2573008 relates to a capsule with a paper body and cover or sealing film; the peripheral rim has a greater rigidity than the tray-like body and can be formed as a ring.

It is so advantageous to utilize paper or similar biodegradable materials as packaging material for a single-use capsule for preparing a beverage in a beverage production device. A problem is due to the properties of the formed sheet of material, either by stamping or folding, which do not allow forming a sufficiently smooth surface of the flange once formed. In particular, folds or creases appear on the flange. These folds or creases do not allow a tight sealing of the capsule, in particular, between the flange of the capsule and the cover which seals thereon. When the sealing is not perfect, rapid oxidation of certain beverage ingredients (e.g., roast and ground coffee) may occur and the quality of the beverage is adversely affected.

Furthermore, the paper-based surface is too irregular on surface to receive a readable identification marking such as an optical barcode or equivalent such as described in WO 2011/141532.

Additionally, the paper-based surface is usually insufficiently rigid for setting a pressure with a pressurizing ring-shaped counterpart of the device to control the coffee extraction, such as described in WO 2010066705.

Therefore, there is a need for inventing a paper containing capsule offering enough mechanical properties to be used in a beverage preparation device but provides a perfect sealing with the cover so that a reduced risk of oxidation is encountered.

Summary of the invention:

The solution to the above-mentioned objects is achieved with a capsule as described in the independent claim of the present invention. The dependent claims develop further characteristics and advantages of the present invention.

5 In a general manner, the invention relates to a capsule made in part of paper material for the preparation of a beverage in a beverage preparation device. The capsule has a flange which is partially made of paper and partially made of polymer. The polymer is essentially arranged on the flange to cover at least partially the paper part and so to improve the inside tightness of the capsule, in particular, to prevent air enters
10 inside the capsule via folds and creases.

More particularly, the present invention relates to a capsule for the preparation of a beverage in a beverage preparation device comprising a cup-like body, a cover for closing the cup-like body; a flange for the cover to seal thereon; the cup-like body being shaped from a paper-based sheet to form a cavity wall containing beverage
15 ingredients and an inner portion of the flange extending outwardly from the cavity wall; wherein the flange further comprises an outer flange portion formed of moulded polymer-based material comprising at least an loop-shaped recess enabling the inner flange portion to be received in and the polymer-based material of the outer flange portion to seal at least partially against a lower surface of the inner flange portion
20 oriented in the direction B towards the cavity wall and against the outer edge of the inner flange portion.

Generally, the polymer-based material provides a proper mechanical support in the beverage preparation device enabling the capsule to offer a proper response to a force applied thereon by the device. However, the improvement comes in that such
25 configuration of a portion of moulded polymer-based material which seals against the paper-based flange portion, in particular, the outer edge of the flange portion, ensures that the folds and creases present at any of the surfaces and in the thickness of the paper-based flange portion are properly closed thereby limiting the risk of gas leakage.

30 In particular, the cup-like shape body preferably forms a revolutionary symmetric cavity wall and the recess is preferably annular. For instance, the cavity wall is dome-shaped, trunk-shaped or cylindrical or a combination thereof. Therefore, the capsule

can be designed for use in a centrifugal beverage (preferably coffee) preparation device such as described in WO 2010066705.

Preferably, the outer portion of flange prolongs the (paper-based) inner flange portion both in outward radial direction and in axial direction. The extension in both directions of the dimensions of the flange by the polymer-based portion contributes to providing a more effective sealing effect. It also confers an increased rigidity to the flange that compensates for the lack of rigidity of the paper-based flange.

In another aspect, the region of the (polymer-based) outer flange portion extending outwardly (or radially) beyond the inner flange portion is thicker than the lower part of the polymer-based outer flange portion sealing against the lower surface of the (paper-based) inner flange portion. Again, this configuration of thicker portion of the polymer-based material contributes to a more effective clogging of the folds and creases present in the formed paper-based material. It also promotes a higher rigidity on the outermost region of the flange which is preferably required for the mechanical properties of the capsule fitting in the device.

More preferably, the outer flange portion comprises a relief of longest axial dimension compared to the axial dimension of the rest of the flange and protruding in the axial direction opposite to the direction of extension of the (paper-based) cup-like body.

Such arrangement can provide a force setting structure enabling the capsule to be inserted in a beverage preparation device comprising a ring-type pressure member to form in combination with the capsule, a beverage flow control valve. As a matter of example, such a beverage device is described in WO 2010066705. In the present invention, the structure of the capsule is optimized so that its force bearing structure is obtained with the appropriate polymer-based material, resisting crushing and offering a sufficient rigidity, while the rest of the capsule is formed of a more flexible material, i.e., paper-based material, chosen for its light weight, potentially reduced impact on environment compared to a full plastic solution and more natural feel and touch of the material.

In a first mode, the outer flange portion further extends inwardly by an upper part which seals against the upper surface of the inner flange portion. In this possible configuration, the paper-based portion of flange is covered on the three sides

(bottom/top/edge) thereby ensuring a more complete filling of the folds and creases and providing consequently an improved leak-resistant capsule.

In this first mode, the cover is preferably sealed against an annular top surface of the said upper part. The cover may not necessarily be sealed to the whole upper surface
5 of the flange but at least along a sufficiently large annular portion of said upper part. The upper part which is made of moulded-polymer based material can be given a suitable surface flatness to provide a perfect adhesion of the cover over the entire circumference of the flange. For this, the cover also preferably extends radially beyond the (paper-based) inner flange portion. Also, the polymer offers a compatible
10 adhesive surface with the cover which can be coated or formed of a same or compatible polymer. Therefore, a strong bond between the cover and flange can be obtained which so confers to the capsule a high resistance to the delamination under the usually high pressure and temperature conditions of extraction in the device.

Nevertheless, it is preferable to maintain the upper part as (axially) thin as possible
15 since the polymer-base material (a polyolefin such as polypropylene) is usually not a suitable barrier to oxygen. Preferably, the upper part of the outer portion of flange has a thickness of less than 1 mm, preferably between 0.05 and 0.5 mm, most preferably between 0.05 and 0.3 mm.

In other modes, the outer portion of flange forms a step-like recess which is arranged
20 in open fashion extending upwardly towards the cover. The total thickness of the flange can be reduced.

In a possible mode, the cover is sealed onto the inner flange portion only. Thus, the cover fits in the annular recess formed by the polymer-based material. The advantage is twofold. Firstly, the cover can be sealed directly onto the paper-based
25 flange thereby creating a gas barrier seal, if necessary, at the sealing junction. Secondly, the potential folds or irregularities present at the terminal edge of the cover can be closed by the polymer-based material to further improve the tightness against gas transfer of the finished capsule.

In another mode, the cover is sealed onto the upper surface forming a step-like
30 portion of the (polymer-based) outer flange portion oriented towards the cover. For this, the cover has a sufficient diameter such that it extends beyond the paper-based inner flange portion.

In still another mode, the cover is sealed both onto the (paper-based) inner flange portion and (polymer-based) outer flange portion. In this case, the inner flange portion is preferably a paper-based laminate comprising an upper sealing layer made of material sealable and the cover comprises a lower sealable layer compatible with the sealable material of the sealable layer of the upper sealing layer. An advantage of this configuration is that a more secured sealing can be achieved to both suitably clog the potential folds/creases of the cover and further seal on a flat solid sealing surface offered by the polymer material.

In the context of the invention, the term "paper" refers to paper, cardboard, pulp of cellulose or equivalent natural fibres. The terms "paper-based material", "paper-based layer" and the like refer to a material, layer and the like containing at least 50% in weight of paper. The terms "paper-containing material", "paper-containing layer" and the like refer to a material, layer and the like with no minimal limit in volume but preferably less than 50% in weight. The paper-based and paper-containing sheets can be obtained by different technologies such as lamination and/or forming and can be combined with layers of other functional materials.

Preferably, the paper-based sheet is preferably a laminate of paper and thermoformable polymer layer(s).

The paper-based sheet of the body comprises at least one oxygen barrier layer such as EVOH, AlOx, SiOX, metal, metalized film or a combination thereof. The barrier layer has preferably a thickness comprised between 5-20 μm , more preferably between 8-15 μm . A metalized film can be for instance a PET layer coated with thin (e.g. 1 μm) metal layer.

The paper-based sheet of the body also preferably comprises at least one thermoformable polymer layer oriented towards the cavity. Preferably, the paper-based sheet comprises a multi-layer of polyolefin(s), most preferably, PP or PE or combinations thereof. Such thermo-formable polymer layer(s) confers the defined, self-sustainable cup-like shape to the body after forming. The paper-based layer can be deformed to the desired capsule shape under heat and pressure using a press. The formable polymer layer may further provide a sealing function with the cover when necessary.

In an exemplary mode, the paper-based sheet for the cup-like body comprises (from inside to outside): one or a plurality of polyolefin(s), preferably PP or PE or combinations thereof, of a thickness between 30-100 μm including and at least one gas barrier layer (e.g., 5-15 μm of EVOH) / paper between 50-400 μm , preferably 200-350 μm . Optionally, one or a plurality of additional thermo-formable polymer layer(s) of polyolefin, such as PP or PE, of thickness between 10-50 μm , is provided on the outer surface of the cup-like shaped body. The different polymer layers are usually bound by tie layers of a few micrometers.

In general, the paper layer of the sheet may have a density comprised between 100 and 400 g/m^2 .

Preferably, the cover is a paper-containing sheet. The cover may be flat, i.e., non-formed in a three-dimensional shape. The cover preferably comprises a gas barrier layer such as EVOH, AlOx, SiOX, metal, metalized film or a combination thereof.

The cover preferably comprises a sealing layer oriented towards the cavity or the bottom of the body. The sealing layer may be a polyolefin, preferably polypropylene or polyethylene, on the inner side suitable for sealing with the flange of the capsule. A preferred laminate for the cover is (from outside to inside): paper / gas barrier / polyolefin. The laminate may be about 100-200 μm thick; paper of 50-150 μm / EVOH or similar gas barrier of 5-40 μm / polypropylene of 20-50 μm .

In general, the paper layer of the cover may have a density comprised between 15 and 150 g/m^2 , more preferably between 20 and 80 g/m^2 . The density is preferably chosen to promote the sealing of the cover and have a sufficiently fast sealing.

Preferably, the barrier to oxygen for both the cover and the body is selected to provide a sufficient shelf life depending on the nature of the beverage ingredients.

For coffee, for example, the shelf life expected may be of 12 months.

The polymer-based material for the outer flange is over-moulded by injection-moulding on the inner portion of flange. Therefore, it is preferably an injection-mouldable thermoplastic material or elastomeric-thermoplastic material (TPE).

The polymer-based material can be selected from a group comprising: polyethylene (PE), high-density polyethylene (HDPE), polypropylene or polyethylene terephthalate (PET) and combinations thereof.

In a possible aspect, the moulded polymer-based material comprises reinforcing material, i.e., fillers such as fibres. The fibers can be glass fibers. In particular, the reinforcing material increases the mechanical properties of the flange and enables the flange to deform less under the internal pressure present in the capsule. As a result, the risk of delamination of the sealing with the cover is reduced.

The outer portion of flange may preferably further comprise an identification code such as an optically readable code. The code is preferably applied on the lower surface of the outer flange portion. The identification code can be formed by the surface of the outer flange portion being textured or printed on the outer surface. The identification code can be formed by a series light-reflective surface portions and light-absorbing surface portions wherein the light-absorbing surface portions have a higher rugosity (R_z) than the light-reflective surface portions such as described in WO 2013/072326. For example, the light-reflective surface portions are non-roughened or mirror-reflective surfaces of the base layer or structure itself. The light-absorbing surfaces are formed in the flange by any one of: sand blasting, shot blasting, milling, chemical attack, laser engraving, in-mould forming, depositing and combinations thereof. The identification code can also be formed by a series of small surfaces portions providing different light reflection angles such as described in WO 2011/141532.

The beverage ingredients are preferably chosen amongst ground coffee, soluble coffee, coffee beans, leaf tea, soluble tea, dairy product, cocoa, chicory, barley, culinary aid, soup ingredient, infant formula and combinations thereof.

Most preferably, the beverage ingredients are roast and ground coffee. It preferably contains a weight of roast and ground coffee comprised between 4 and 20 grams, preferably between 5 and 15 grams. Depending on the weight of roast and ground coffee, can be prepared a liquid coffee extract of a ristretto cup of about 25 grams, espresso cup of about 40 grams, lungo cup of about 110 grams or long coffee of about 230 grams or higher. In general, roast and ground coffee may be selected to have a volumetric mean of particle diameter ($D_{4,3}$) preferably comprised between 190 and 750 μm (as determined by the method described on page 12, "5. Granulometry" of WO2008012202)

The capsule of the invention may typically interact with the beverage and/or food preparation device such as by being fed with a diluent (e.g. hot, cold or ambient

water) in the container; such diluent mixing, or interacting otherwise with the beverage ingredients.

Preferably, the cavity delimited by the body and cover of the capsule is essentially oxygen-free and the empty space is saturated with an inert gas such as nitrogen, carbon oxide and combinations thereof. Preferably, the capsule has an internal pressure of gas above atmospheric pressure due to the gas contained in the coffee and emanating in the cavity after sealing such as carbon oxide and dioxide. The invention further relates to the use of a capsule as described in the present invention in a beverage preparation device.

The beverage preparation device is preferably a centrifugal beverage preparation device comprising a capsule holder for receiving the capsule, a liquid supply member and an interface member comprising a peripheral engaging portion for engaging against the flange of the capsule.

Brief description of the drawings:

Figure 1 shows a schematic view of a capsule according to the invention;

Figure 2 shows a schematic view of the top of the capsule of figure 1;

Figure 3 shows a schematic enlarged view of the flange area of the capsule according to a first embodiment;

Figure 4 shows a schematic enlarged view of the flange area of the capsule according to a second embodiment;

Figure 5 shows a schematic enlarged view of the flange area of the capsule according to a third embodiment;

Figure 6 shows a capsule of the invention in place in a beverage preparation (extraction) device before closure by an injection assembly of the device;

Figure 7 shows a detail of the engagement of the capsule in the device according to the first mode.

Detailed description of the drawings:

The capsule 1 illustrated in figures 1 to 4 is designed for preparing a beverage in a beverage preparation device such as a dedicated coffee machine. The capsule

comprises a cup-like body 2, a cover 3 for closing the cup-like body and a flange 4. The cover 3 is typically sealed on the flange 4.

The cup-like body forms a revolutionary-symmetric cavity wall 5 defining an internal cavity. In particular, the wall is formed symmetrically relative to a central axis I of the capsule. The wall may take a convex shape such as illustrated or other various shapes such as trunconical, cylindrical or combinations thereof. The body of the invention may be designed with relatively wide ranges of depth-to-diameter ratios; for instance, comprised between 0.2:1 to 2:1. In this context, the diameter is considered as the maximal diameter of the cavity and the depth is considered as the maximal internal depth of the cavity. Typically, for a given shape, the higher the depth-to-diameter ratios, the higher the risk of pleats in the paper-based material forming the body. Certain shapes with short radiuses and/or corners are also more prone to form pleats.

The capsule contains a predetermined dose of beverage ingredients; such as roast and ground coffee suitable for preparing a liquid coffee extract upon injection of hot water in the capsule.

First of all, the flange 4 comprises an inner portion of the flange 6 extending outwardly from the cavity wall 5. Secondly, the flange 4 comprises a second portion of flange; in particular, an outer flange portion 7 which is formed of polymer-based material. The polymer-based material is a thermo-mouldable material.

This polymer-based outer flange portion 7 is shaped to form an annular recess 8 oriented in inward radial direction R_i , towards the central axis of the capsule. The annular recess is thereby configured to receive the paper-based flange portion 6 and to cover it essentially along three sides. The outer flange portion thus partially seals against the inner flange portion. More particularly, the outer flange portion covers the terminal edge 9 of the inner portion 6. Furthermore, the outer flange portion also extends below the inner flange portion 6 by a lower part 10 and above the inner flange portion 6 by an upper part 11. As a result, the pleats or creases of the paper-based material of the inner flange portion are essentially filled or covered by the polymer-based material over-moulded thereon. The lower part 10 preferably (but not necessarily) extends up to the cavity wall 5.

The paper-based sheet formed as a three-dimensional body has preferentially an outer layer made of a material which is intimately compatible in sealing with the polymer-based material. The material of the outer layer of the sheet is preferably a

polyolefin such as PP or PE or a combination or mixture of polyolefins such as PP and PE.

In the present context, the terms “below” and “lower” or “downwards” refer to an axial direction B towards the bottom of the body. The terms “above” and “upper” or “upwards” refer to an axial direction C towards the cover.

The flange part 12 of the outer flange portion extending outwardly (radially) beyond the inner flange portion 6 is thicker than the lower part 10 (thickness L_1). The flange part of larger thickness L_0 provides an increased rigidity suitable for engagement with the device as will be described later. More particularly, the region 12 of the moulded polymer-based flange preferably forms an outermost relief 13 of longest axial dimension or thickness L compared to the axial dimension or thickness L_0 of the rest of the flange part 12. The outermost relief can serve to preset the opening pressure of a flow restriction means when the capsule is positioned in the device; such pressure depending on dimension L. Of course, the capsule of the invention may be contemplated without such relief, in particular, when the capsule is dedicated to a different beverage device.

An annular portion 14 of the cover 3 is sealed to an annular top surface 15 of the upper part 11 of the outer flange portion 7. The cover is usually welded by heat or ultrasonic sealing to the polymer-based surface. The cover is preferably formed of a paper-based sheet comprising a paper layer and, on the inside in contact with surface 15, at least one sealing thermoplastic layer which is compatible in sealing with the polymer-based material of the upper part 11. For example, the cover has a bi-layer formed of the paper (outside) and polypropylene (inside).

Preferably, the cover 3 and body 5 have a gas barrier but the material of the outer flange portion (e.g., polypropylene) is usually not a suitable gas barrier. In consequence, the thickness (L_2) of the upper part 11 is minimized to reduce the surface which is potentially permeable to a certain extent to oxygen. The lower limit of thickness is essentially driven by the limits of the injection moulding technology to provide a suitable sealing surface 15 for sealing of the cover thereon. Preferably, the thickness (L_2) is lower than 0.5 mm, most preferably comprised between 0.05 and 0.3 mm.

The lower surface of the outer flange portion is preferably relatively planar both in radial outward direction R_E and in circumferential direction D to receive an identification code 16 such as described in WO 2013/072326 or WO 2011/141532.

The code can be an optically readable binary code which can be printed and/or embossed in the polymer material itself. A printing can be produced by applying ink or deposition of metal. Embossing can be realised by mechanical or laser engraving, chemical etching, depositing or moulding. Most preferably, the code is produced in the mass of the polymer during injection moulding of the outer flange portion onto the inner flange portion by having the negative pattern of the code embossed in the injection mould.

As a preferred example, the capsule can be produced as follows:

The cup-like body is produced from a paper-based sheet by deforming it into a mould to confer the shape of the body including the inner flange pre-formed during this step. Then, the outer flange 7 is over-moulded in the same mould or after transfer to a specific injection mould. After removal (eventually, storage, stacking /destacking, transport), the capsule is filled with beverage ingredients on a product filling line and the cover is sealed onto the flange. The filling and sealing operations are preferably carried out under reduced oxygen atmosphere such as under partial vacuum and/or under an atmosphere saturated in nitrogen or CO₂ gas.

Considering the second embodiment of the capsule illustrated in figure 4, the outer portion 7 of the flange forms a step-like recess 8 which is arranged in open manner in upward direction C and inward radial direction R_i. The recess forms a step-like annular recess. Therefore, the polymer-based material of the outer flange portion seals against the lower surface and against both the outer edge 9 of the paper-based inner flange portion 6. The cover 3 is sized to extend beyond the recess 8 and seals on a step-like portion 17 of the outer flange portion. The cover 3 may additionally be sealed to the upper surface of the paper-based flange portion 6. As a result, a gas tight arrangement is obtained. In this mode, the recess 8 may be sized to match the thickness of the inner flange portion 6.

In the embodiment of figure 5, the outer portion 7 of the flange also forms a step-like recess 8 which is arranged in open fashion and oriented in upward direction C and radial inward direction R_i. The inner flange portion 6 fits in the recess in sealing engagement with the moulded outer flange portion 7. The outer flange portion covers the outer edge 9 of the inner flange portion, as well as the lower surface of the inner flange portion by a lower part 10 which can extend in inward direction R_i up to the cavity wall 5 of the body. The lower part can so join to the outer surface of the cavity wall. In this mode, the cover is only sealed to the upper surface of the inner

flange portion. As a result, a gas tight arrangement is obtained. In this mode, the recess 8 may be sized to approximately match the sum of the thicknesses of the inner flange portion 6 and cover 3.

Figs 6 and 7 show an example of the capsule 1 when in position in a centrifugal extraction device 50. The device typically comprises a rotating capsule holder 51 for placing the capsule in a stable position of reference in the device enabling a rotation of the capsule around its central axis I. The device further comprises a fluid interface assembly 52. The fluid interface assembly may take many various configurations. For example, it comprises a central liquid supply member 53 with a hollow needle 54 comprising a liquid conduit. The conduit is usually in communication with a liquid reservoir, a pump and a heater (not shown). The central liquid supply member 53 is mounted on a disc-shaped interface member 55. The interface member 55 comprises a peripheral engaging portion 56 which is arranged for engaging against the flange 4 of the capsule when the fluid interface assembly 52 is engaged on the capsule holder with the capsule inserted there between. The interface member 55 is also arranged to rotate around axis I. For this, the interface member is mounted in rotation relative to a frame of the device (not shown). The liquid supply member 53 may be fixed or be mounted in rotational relationship with the frame. A driving system (not shown) is provided to drive these rotating parts of the device (capsule holder, fluid interface assembly) in rotation with the capsule. The driving system usually comprises a rotary motor.

The interface member 55 also comprises a series of circumferential perforating members 60. These perforating members are there to perforate beverage outlets in the cover 3. They are preferably placed close to the flange where the liquid extract is centrifuged.

Figure 6 shows the system in the closing phase, when the fluid interface assembly 52 is moved towards the capsule and the capsule is positioned inside the capsule holder. Figure 7 shows the system in engagement of the fluid interface assembly 52 against the capsule when the capsule is positioned in the capsule holder. In such configuration, the hollow needle 54 traverses the cover 3 in such a manner that its liquid conduit communicates with the interior cavity 2 of the capsule. The needle 54 serves to perforate the cover 3.

The capsule and device form together a valve means for controlling the flow of the centrifuged beverage coming out of the capsule. More particularly, the flange 4 of

the capsule rests on an annular sealing portion 57 of the capsule holder. On the fluid interface assembly 52 is provided an engaging portion 56 which engages in elastic manner with the relief 13 of the flange. The engaging portion 56 has a closing part 59 which is pre-stressed by an elastic biasing means 58 (e.g., spring). The height L of the relief of the valve determines the preset closing force of the engaging portion 56 against the flange.

The system works as follows:

An extracting liquid such as hot water is fed in the centre of the capsule by the liquid supply member (i.e., through needle 54). The capsule is filled with liquid hot which so prewets the beverage ingredients, such as ground coffee powder 20. After filling, the capsule is driven in rotation by the rotating capsule holder and fluid interface assembly. Liquid will traverse the bed of coffee powder to transform into coffee extract and will traverse the perforated outlets by effect of the centrifugal forces. Then, the flow of coffee extract exerts a pressure which forces the closing part 59 to flex against the effect of the biasing means 58. Thus, a circumferential gap is provided during centrifugation which enables the coffee extract (or any other beverage liquid brewable in a similar way) to be ejected towards a collecting means (not represented) and funneled towards a receptacle (e.g. cup).

The capsule of the present invention may of course be used in different other beverage production devices and is not limited to the present one described as a preferential example.

Claims:

1. Capsule (1) for the preparation of a beverage in a beverage preparation
5 device comprising a cup-like body (2), a cover (3) for closing the cup-like
body; a flange (4) for the cover to seal thereon; the cup-like body being
shaped from a paper-based sheet to form a cavity wall (5) containing
beverage ingredients and an inner flange portion (6) extending outwardly from
the cavity wall (5); wherein the flange further comprises an outer flange portion
10 (7) formed of moulded polymer-based material comprising at least a loop
shaped recess (8) enabling the inner flange portion (6) to be received in and
the polymer-based material of the outer flange portion (7) to seal at least
partially against a lower surface of the inner flange portion (6) oriented in the
direction (B) towards the cavity wall (5) and against the outer edge (9) of the
15 inner flange portion (8).
2. Capsule according to claim 1, wherein the cavity wall (5) is revolutionary
symmetrical and the recess (8) is annular.
- 20 3. Capsule according to claims 1 or 2 wherein the outer flange portion (7)
prolongs the inner flange portion (8) both in outward radial direction (R_E) and
in axial direction (C).
4. Capsule according to claims 1 to 3, wherein the region of the outer flange
25 portion (7) extending outwardly (radially) beyond the inner flange (6) portion is
thicker than the lower part (10) of the outer flange portion (7) sealing against
the lower surface of the inner flange portion (6).
5. Capsule according to any one of claims 1 to 4, wherein the outer flange
30 portion (7) forms an outermost relief (13) of longest axial dimension (L)
compared to the axial dimension (L_0) of the rest of the flange.
6. Capsule according to any one of claims 1 to 5, wherein the outer flange
35 portion (7) further extends inwardly (in direction R_i) by an upper part (11)
which seals against the upper surface of the inner flange portion (6).

7. Capsule according to claim 6, wherein the cover (3) is sealed against an annular top surface (15) of the upper part (11).
- 5
8. Capsule according to any one of claims 1 to 5, wherein the outer flange portion (7) forms a step-like recess (8) which is arranged in open fashion upwardly towards the cover (3).
- 10
9. Capsule according to claim 8, wherein the cover (3) is sealed onto the inner flange portion (6) and/or an upper surface forming a step-like portion (17) of the outer flange portion (7) oriented (in direction C) towards the cover.
- 15
10. Capsule according to any of the preceding claims wherein the paper-based sheet of the body comprises at least one oxygen barrier layer such as EVOH, AlOx, SiOX or a combination thereof.
- 20
11. Capsule according to any of the preceding claims wherein the paper-based sheet of the body comprises at least one sealing (e.g. PP) layer oriented towards the cavity.
- 25
12. Capsule according to any of the preceding claims, wherein the cover is a paper-containing sheet and optionally the cover (3) comprises a gas barrier layer.
- 30
13. Capsule according to any of the preceding claims, wherein the cover comprises a sealing layer oriented (in direction B) towards the cavity or bottom of the body (2).
- 35
14. Capsule according to any one of the preceding claims, wherein the polymer-based material for the outer flange is preferably an injection-mouldable thermoplastic material or elastomeric-thermoplastic material (TPE), preferably, selected from a group comprising: polyethylene (PE), high-density polyethylene (HDPE), polypropylene, polyethylene terephthalate (PET) and combinations thereof.

15. Capsule according to any of the preceding claims, wherein the moulded polymer-based material is filled with reinforcing material such as a filler (such as fibres).
- 5 16. Capsule according to any of the preceding claims the outer portion of flange comprises an identification code (16) such as an optically readable barcode.
- 10 17. Capsule according to any of the preceding claims, wherein the beverage ingredients are chosen amongst: ground coffee, soluble coffee, coffee beans, leaf tea, soluble tea, dairy products, cocoa, chicory, barley, culinary aid, soup ingredient, infant formula and combinations thereof.
- 15 18. Use of a capsule according to any of the preceding claims in a beverage preparation device.

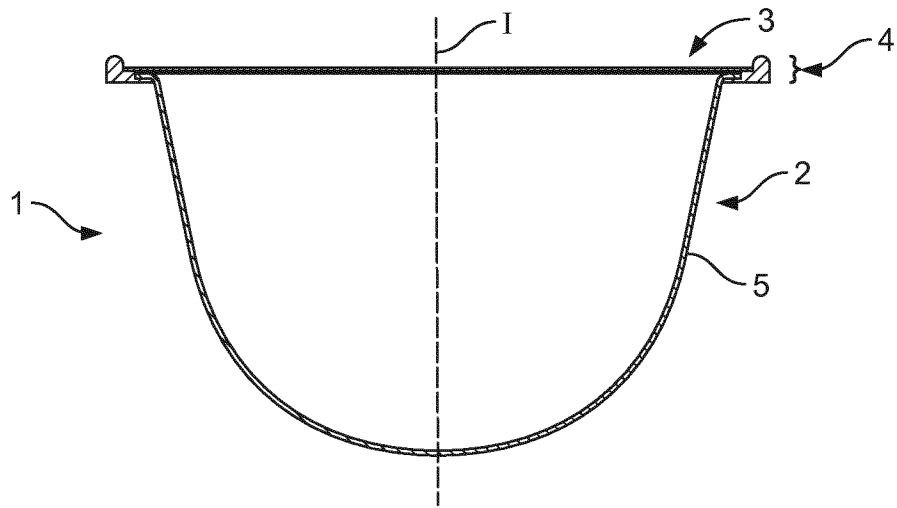


FIG. 1

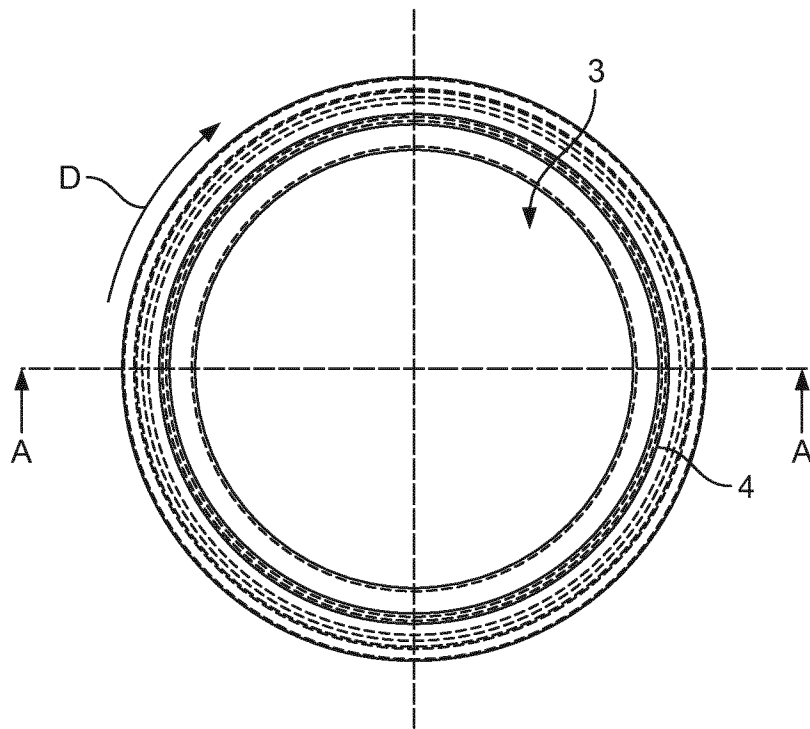


FIG. 2

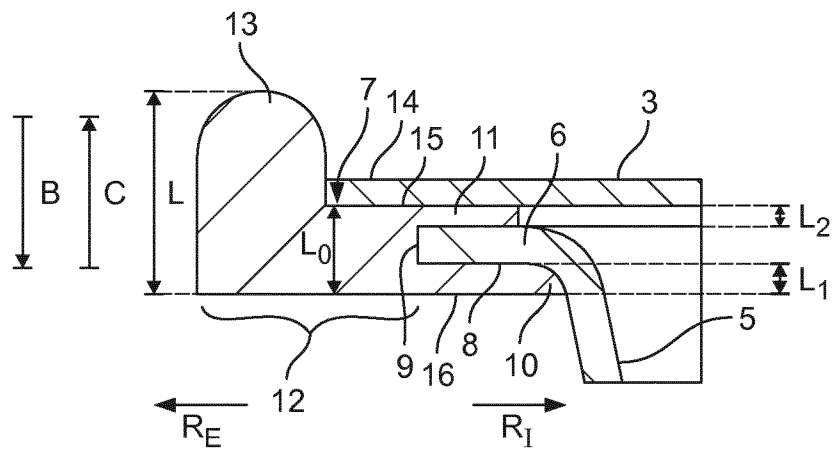


FIG. 3

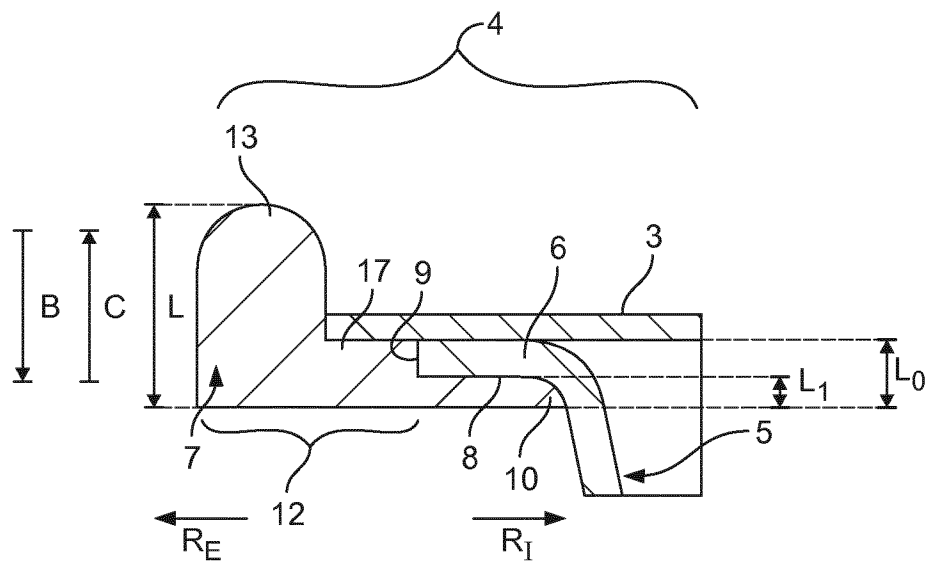


FIG. 4

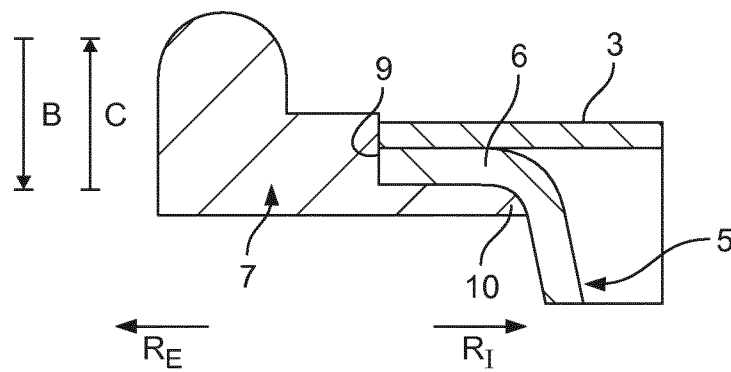


FIG. 5

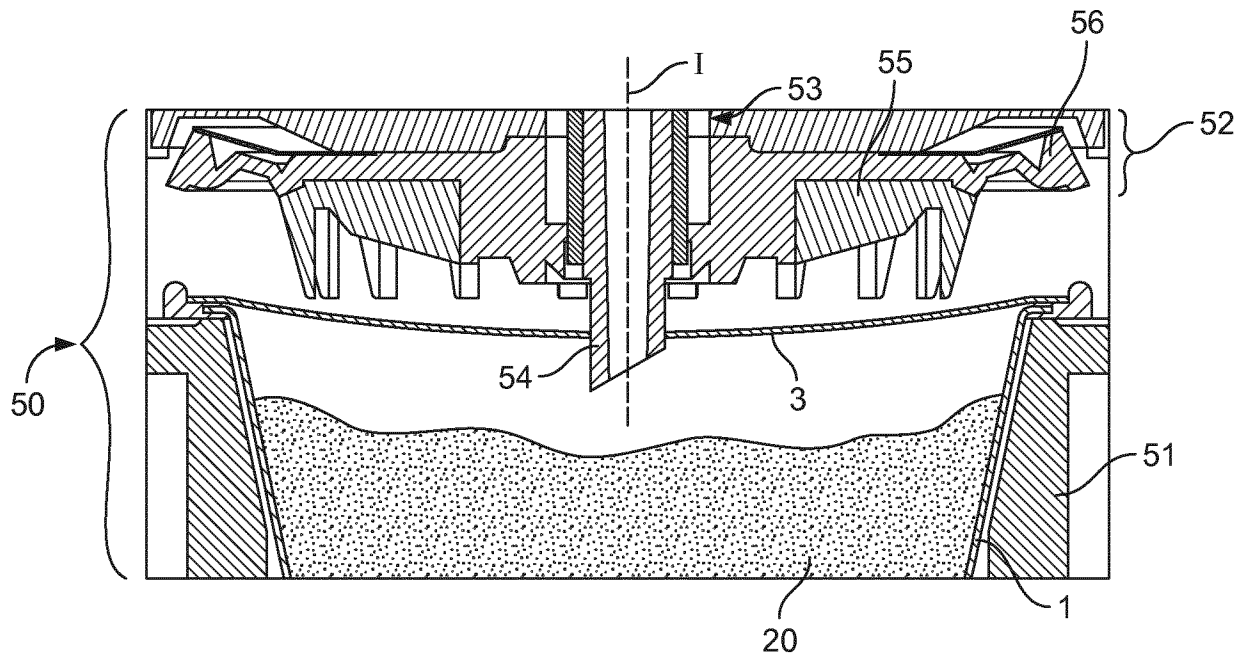


FIG. 6

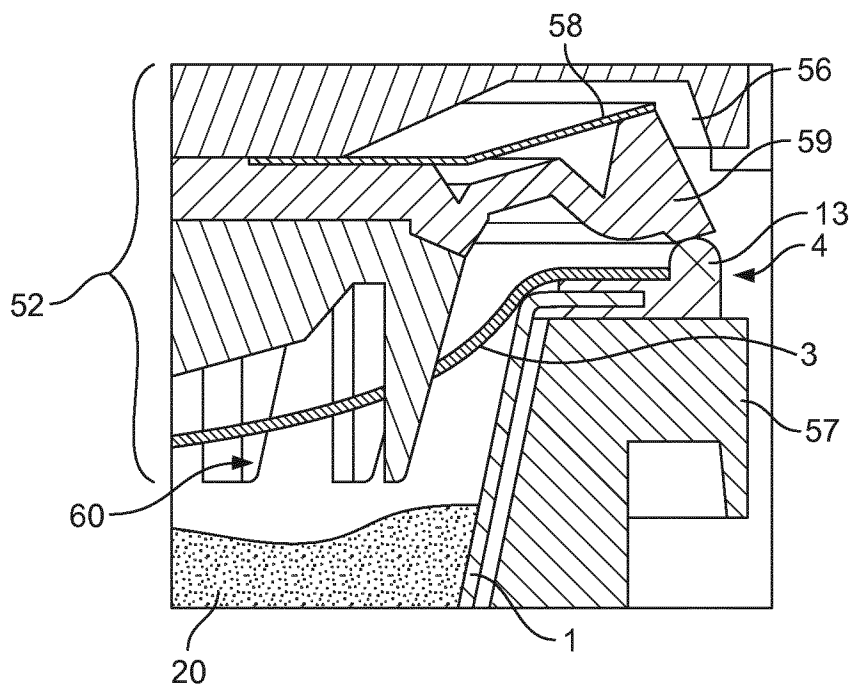


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2014/063479

A. CLASSIFICATION OF SUBJECT MATTER INV. B65D85/804 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) B65D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/185911 A1 (RAPPARINI GINO [IT]) 4 August 2011 (2011-08-04) paragraph [0048] - paragraph [0076] figures 1-15	1-18
A	----- EP 0 524 464 A1 (NESTLE SA [CH]) 27 January 1993 (1993-01-27) cited in the application column 7, lines 19-33 figures 10-11	1-18
A	----- WO 2011/095518 A2 (NESTEC SA [CH]; ALVAREZ DIEGO JIMENEZ [CH]; RICOUX DELPHINE [CH]; MONN) 11 August 2011 (2011-08-11) pages 11-16 figures 1a-c	1-18
	----- -/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
24 September 2014	06/10/2014	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Duc, Emmanuel	

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2014/063479

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 573 008 A1 (CAPITANI SRL [IT]) 27 March 2013 (2013-03-27) cited in the application columns 1-5 figures 3,4	1-18
A	----- ES 1 077 395 U (SOLUBLES S A PROD [ES]) 16 July 2012 (2012-07-16) the whole document	1-18
A	----- WO 2012/118367 A1 (BISERKON HOLDINGS LTD [CY]; ZWEED SANDER GORDON [NL]) 7 September 2012 (2012-09-07) figure 1d	1-18
A	----- EP 2 151 313 A1 (NESTEC SA [CH]) 10 February 2010 (2010-02-10) the whole document -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2014/063479

Patent document cited in search report	A1	Publication date	Patent family member(s)	Publication date
US 2011185911	A1	04-08-2011	NONE	

EP 0524464	A1	27-01-1993	AT 128692 T	15-10-1995
			AU 649844 B2	02-06-1994
			BR 9202610 A	16-03-1993
			CA 2072300 A1	06-01-1993
			DE 69205232 D1	09-11-1995
			DE 69205232 T2	14-03-1996
			DK 0524464 T3	12-02-1996
			EP 0524464 A1	27-01-1993
			ES 2078598 T3	16-12-1995
			FI 922897 A	06-01-1993
			JP 3150202 B2	26-03-2001
			JP H05199938 A	10-08-1993
			NO 922617 A	06-01-1993
			NZ 243239 A	27-06-1994
			ZA 9204490 A	31-03-1993

WO 2011095518	A2	11-08-2011	AU 2011212505 A1	30-08-2012
			CA 2789212 A1	11-08-2011
			CN 102858210 A	02-01-2013
			EP 2533672 A2	19-12-2012
			JP 2013518647 A	23-05-2013
			KR 20120123548 A	08-11-2012
			NZ 601626 A	27-06-2014
			RU 2012138402 A	20-03-2014
			SG 182834 A1	30-08-2012
			US 2012308691 A1	06-12-2012
			WO 2011095518 A2	11-08-2011

EP 2573008	A1	27-03-2013	EP 2573008 A1	27-03-2013
			US 2014083873 A1	27-03-2014

ES 1077395	U	16-07-2012	ES 1077395 U	16-07-2012
			WO 2014001584 A1	03-01-2014

WO 2012118367	A1	07-09-2012	AU 2011361036 A1	26-09-2013
			CA 2828915 A1	07-09-2012
			EP 2681126 A1	08-01-2014
			US 2014170281 A1	19-06-2014
			WO 2012118367 A1	07-09-2012

EP 2151313	A1	10-02-2010	AT 529248 T	15-11-2011
			AU 2009272891 A1	21-01-2010
			CA 2730053 A1	21-01-2010
			CN 102099177 A	15-06-2011
			DK 2318199 T3	01-09-2014
			EP 2151313 A1	10-02-2010
			EP 2318199 A1	11-05-2011
			ES 2377030 T3	21-03-2012
			HK 1138540 A1	27-07-2012
			JP 5426673 B2	26-02-2014
			JP 2011527920 A	10-11-2011
			KR 20110043586 A	27-04-2011
			PT 2151313 E	02-02-2012
			RU 2011105396 A	20-08-2012
			US 2011259204 A1	27-10-2011
			WO 2010006936 A1	21-01-2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/063479

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
