

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 180 482 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
07.07.2004 Bulletin 2004/28

(51) Int Cl.7: **B65D 47/08**, B65D 43/16,
A47K 10/32

(21) Application number: **00117506.6**

(22) Date of filing: **14.08.2000**

(54) Container closure arrangement

Verschlussanordnung für einen Behälter

Système de fermeture pour un récipient

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(43) Date of publication of application:
20.02.2002 Bulletin 2002/08

(73) Proprietor: **THE PROCTER & GAMBLE COMPANY**
Cincinnati, Ohio 45202 (US)

(72) Inventors:
• **Zethoff, Martin**
65779 Kelkheim (DE)
• **Radtke, Thomas**
61440 Oberursel (DE)

- **Young, Kenneth**
61462 Königstein (DE)
- **Sams, Bernard**
London N11 3EU (GB)
- **Sams, Stephen**
London N11 3EU (GB)

(74) Representative: **Kremer, Véronique et al**
Procter & Gamble Service GmbH
65824 Schwalbach am Taunus (DE)

(56) References cited:
EP-A- 0 608 757 **EP-A- 0 953 313**
DE-A- 19 517 102 **US-A- 5 699 912**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 180 482 B1

Description

[0001] This invention relates to a closure arrangement for closing an opening in a base component. In particular - but not exclusively - this invention relates to a closure arrangement for a container, to serve as an openable lid for the container.

[0002] Many household products are supplied in a container having an opening to give access to the interior of the container, together with a lid to close that opening. Many such containers require two hands to remove the lid but for some products, it is desirable that the container can be opened simply, just with one hand. For example, in the case of a container for wetted or moist tissues, a person wishing to use a tissue may well have soiled fingers and so will wish to gain access to the interior of the container holding the tissues in a quick and simple manner. On the other hand, the lid for the container, when closed, should substantially seal the container so as to prevent drying-out of the wetted tissues.

[0003] Particularly in the case of a container for wetted tissues, it is advantageous if the lid can be moved from its closed position to its opened position automatically, on being released by a simple one-touch action by a finger of a user. For example, such a container is described in EP-0952088-A.

[0004] It is an aim of the present invention to improve on the several known designs of closure arrangements for containers and so provide such an arrangement which can be operated effectively and reliably for the expected life of the container, and yet which is cheap and easy to manufacture, bearing in mind that the container will probably be thrown away when its contents have been exhausted.

[0005] Accordingly, the present invention provides a closure arrangement comprising a base component defining a closable opening, a closure for the opening and hinged to the base component for movement between closed and open positions, juxtaposed lugs provided respectively on the base component and the closure in the region of the hinging axis of the closure, each lug having at or adjacent its free end a receptor, and an elastic link located in and extending between the receptors of the lugs, the receptors of the lugs being off-set from the hinging axis and arranged such that the link is strained when the closure is at its closed position, the straining of the link varying as the closure is moved between its closed and open positions and is least when the closure is at its open position.

[0006] It will be appreciated that the closure arrangement of this invention may be manufactured by a moulding operation using suitable plastics materials, except perhaps for the elastic link. Both the base component and the closure may be configured to be relatively simple items so as to be cheap to manufacture in large quantities and yet able to give reliable operation when in use.

[0007] Though it would be possible for there to be only one lug on the base component and only one lug on the closure, preferred embodiments of this invention have a single lug on one of the base component and the closure and on the other of the base component and closure a pair of spaced apart lugs so that the single lug is disposed therebetween. For such an arrangement, the elastic link may be strained between the pair of lugs and be deflected from a straight-line path by means of the single lug engaged substantially centrally with the link.

[0008] The elastic link preferably takes the form of a strip of elastomeric material moulded to have an enlarged head at each of its two ends respectively and which heads in use engage the respective lugs. Preferably, the strip of elastomeric material is of substantially circular cross-sectional shape. Each receptor may comprise a generally U-shaped recess formed in an end portion of each lug, which recess has a sufficient width to receive the strip of elastomeric material but the head of the strip serving to prevent the strip pulling out of the receptor transverse to the plane of the lug.

[0009] Preferably, a catch mechanism is provided to maintain the closure in its closed position, against the action of the strained link. Such a catch mechanism may comprise a catch member hinged to the base component and a tab provided on the closure which tab is engageable with the catch member so as to retain the closure in its closed position. Hinging of the catch member away from the tab will then release the closure to permit it to move to its open position, under the action of the elastic link. Such a releasing action may easily be performed by a single finger of a user so facilitating easy access to the contents of a container associated with the closure arrangement.

[0010] In an alternative embodiment, the arrangement of the lugs respectively on the base component and the closure is such that the straining of the elastic link initially increases on moving the closure from its closed position to its open position, before reducing to its smallest value with the closure at its open position. Such a closure arrangement will have an over-centre feel but may still be released easily so as automatically to move to its open position, merely by lifting the closure slightly.

[0011] Preferably, the closure arrangement of this invention is used in association with a container, the base component forming a part of a lid assembly for that container. Such a container may hold wetted or moistened sheets or tissues removable from the container through the opening in the base component. In this case, the closure when in its closed position may effect a generally air-tight seal to the base component, to minimise any drying of the moistened or wetted sheets within the container.

[0012] By way of example, certain specific embodiments of this invention will now be described in detail, reference being made to the accompanying drawings in which:-

Figure 1 is an isometric rear view of a first closure arrangement, with the closure separated from the base component;

Figure 2 is a view similar to that of Figure 1 but with the closure fitted to the base component;

Figure 3 is a sectional view through the arrangement of Figures 1 and 2 taken generally on the hinging axis of the closure;

Figures 4, 5 and 6 correspond to Figures 1, 2 and 3 respectively, but showing a second embodiment;

Figure 7 corresponds generally to Figure 2, but shows a third embodiment of this invention;

Figure 8 shows a catch mechanism used with the first, second and third embodiments of this invention;

Figures 9A, 9B and 9C are cross-sections through the hinge region of the embodiment of Figures 1 to 3; and

Figure 10 is a view similar to that of Figure 9A, but of an alternative over-centre arrangement.

[0013] Referring initially to Figures 1 to 3, there is shown a first embodiment of closure arrangement of this invention and comprising a base component 15 defining an opening 16, and a closure 17 pivoted to the base component 15 for movement between an open position and a closed position (shown in Figure 2) where the closure closes the opening 16. Both the base component 15 and the closure 17 are moulded from a plastics material. The lower region of the base component 15 may be configured for mounting on a lid of a container, over an aperture through that lid. In the alternative, the base component 15 may itself form the lid for a container with which the closure arrangement is to be associated. Yet another possibility would be for the base component 15 to be formed integrally with or attached directly to a container.

[0014] Around three sides of the opening 16, the base component 15 is provided with an in-turned flange 18, that flange on the two sides having aligned holes 19, adjacent the rear wall 20 of the base component 15. A curved wall 21 extends inwardly of the opening 16 from the rear wall 20, curving upwardly towards the top face of the base component 15. A lug 22 projects upwardly from this curved wall 21, midway along the length of the rear wall 20, the lug 22 having a U-shaped slot 23 at its upper free end.

[0015] The closure 17 is of simple rectangular shape and is provided with a downturned lip 25 around its periphery. For the sake of clarity, the lip has been omitted from the rear edge 26 of the closure in Figures 1 and 2,

but is shown in Figure 9A, 9B and 9C, and has a curved form for interaction with the rear wall as the closure is opened. The closure 17 is dimensioned so that it is a snug fit within the opening 16 of the base component 15, when in its closed position shown in Figure 2, giving a generally moisture-tight seal.

[0016] Projecting outwardly from the lip 25 at two opposed locations adjacent the rear edge 26 of the closure 17 are aligned pivot pins 27, arranged to be received in the aligned holes 19 of the base component 15, so allowing the closure 17 to pivot between the closed position shown in Figure 2 to an open position shown in Figure 9C. The under-surface of the closure 17 is provided with a pair of spaced lugs 28, disposed equidistant from the side edges of the closure and each having a U-shaped slot 29 formed in its free end. Stretched between the lugs 28 is a link 30 of an elastomeric material (such as natural or synthetic rubber), the link 30 having a main portion 31 of circular cross-sectional shape and a respective head 32 formed at each of the two ends of the main portion 31. As shown in Figure 1, the link 30 should be lightly stretched when positioned between the pair of lugs 28 on the closure, so that the link will remain in position in the slots 29 by virtue of the tension in the link. Then, on engaging the pivot pins 27 with the holes 19, as shown in Figure 2 and 3, the lug 22 on the base component 15 will engage the central part of the link 30 and strain that link so as to take up a generally V-shaped form.

[0017] With the closure 17 in its closed position, shown in Figures 2, 3 and 9A, the link 30 is strained to the greatest extent. Pivoting movement of the closure 17 from its closed position through an intermediate position (Figure 9B) to its open position (Figure 9C) reduces the straining of the link, with the included angle of the V-shaped form taken up by the main portion 31 of the link 30 reducing as the closure moves to its open position. Thus, the closure 17 will tend to move to its open position where the tension in the link 30 is at a minimum.

[0018] In Figure 3, two retaining walls 33 are shown, disposed outside the pair of lugs 28 and spaced therefrom. These walls serve to assist holding of the link 30 in the slots 29 of lugs 28, by having each head 32 of the link a friction fit between the wall 33 and the opposed face of the link. These walls may be omitted, as shown in Figures 1 and 2, if the link is sufficiently strained when carried in the pair of lugs 29, before the closure is engaged with the base member.

[0019] In order to maintain the closure 17 in its closed position, a catch mechanism 34 as shown in Figure 8 is employed. This catch mechanism includes an L-shaped catch member 35 which is pivoted at 36 to the base component 15, so as to be movable between a holding position shown in solid lines in Figure 8 and a released position shown in broken lines in that Figure. The closure 17 is shown diagrammatically at 37 in Figure 8, but in the arrangement of Figures 1 and 2, there is a forwardly-projecting tab (not shown) on the closure 17 and

below the upper surface of that closure, so that the upper surface 38 of the catch member 35 may lie in substantially the same plane as the upper surface of the closure 17.

[0020] Though in Figure 8 a simple pivot 36 is shown for the catch member 35, preferably the pivot is defined by a moulded film hinge which will urge the catch member to its holding position, movement of the catch member to its released position being against the force provided by the film hinge. The forward edge 39 of the catch member should be raked as shown in Figure 8, so as to permit the closure 17 (or the tab provided thereon) to ride over that edge 39, deflecting the catch member 35 as necessary. Securing of the closure 17 in its closed position thus simply requires the closure to be pushed to that position. Then, the closure may be released by a simple one-touch operation, pressing on the upper surface of the catch member 35.

[0021] Figures 4, 5 and 6 show a second embodiment of this invention but which is generally similar to the arrangement of Figures 1 to 3. Consequently, like parts are given like reference numerals and those parts will not be described again here.

[0022] The second embodiment of Figures 4 to 6 differs from that of Figures 1 to 3 in that the closure 17 is provided with only a single downwardly-projecting lug 40, disposed centrally of the closure adjacent its rear edge 26. Conversely, the base component 15 has a pair of spaced lugs 41 the upper edges of which are on the same level as the upper edge of the curved wall 21. In this embodiment, the elastic link 30 is strained between the lugs 41 and the lug 40 on the closure engages a central region of the main portion 31 of that link, to deform the link into a generally V-shaped form when the closure is in its closed position, as shown in Figures 5 and 6. In other respects, the embodiment of Figures 4 to 6 operates as has been described above with reference to Figures 1 to 3.

[0023] Figure 7 shows a third embodiment of this invention. In this embodiment, the base component 43 has a generally rounded profile to enhance the aesthetic appearance thereof, as compared to the base component 15, but otherwise generally corresponds to that base component 15. However, in this embodiment both the base component 43 and the closure 17 are provided only with one lug 44 and 45 each, those lugs being disposed equally to either side of the centre line of the closure 17. A shorter elastic link 46 is provided than in the case of the embodiments of Figures 1 to 6, but the link is generally of the same form as link 30 and operates in the same manner. In other respects, the embodiment of Figure 7 is essentially the same as the first two embodiments, described above.

[0024] It will be appreciated that with the embodiments of Figures 1 to 7, the axis of pivoting movement of the closure 17 (that is, the axis of the holes 19 and pivot pins 27) is disposed slightly to the rear of the slots in the lugs of the closure and base component, as shown

in Figure 9A. This ensures that the link is strained to its greatest extent when the closure is in its closed position, with the straining of the link reducing as the closure is moved to its open position. The position of said axis relative to the lugs may be adjusted to control the rate of change of the force of the link. If that axis is moved sufficiently forwardly to lie just in front of the link with the closure in its closed position, there will be imparted to the mechanism an over-centre (or toggle) action; such an arrangement is shown in Figure 10. With this arrangement, the straining of the link increases for the first few degrees of opening movement of the closure, whereafter the action proceeds as described above, with the straining reducing until the closure is in its opened position. The result is that the closed position of the closure is stable and the closure will move automatically to its open position only after raising the closure through a few degrees. This then permits the elimination of the catch mechanism 34 whilst still giving a simple and easy to operate one-touch action, of just raising the closure by a few degrees at its forward edge.

Claims

1. A closure arrangement comprising a base component (15) defining a closable opening, a closure (17) for the opening and hinged to the base component for movement between closed and open positions, juxtaposed lugs (22) provided respectively on the base component and the closure in the region of the hinging, axis of the closure, each lug having at or adjacent its free end a receptor (23), and an elastic link (31) located in and extending between the receptors of the lugs, the receptors of the lugs being off-set from the hinging axis and arranged such that the link is strained when the closure is at its closed position, the straining of the link varying as the closure is moved between its closed and open positions and is least when the closure is at its open position.
2. A closure arrangement as claimed in claim 1, wherein the base component is provided with a pair of similarly-configured lugs spaced in the direction of the hinging axis of the closure, the elastic link extends between the pair of lugs and is located in the receptors thereof, and the lug of the closure is disposed between the pair of lugs of the base component with the closure lug receptor also engaging the elastic link.
3. A closure arrangement as claimed in claim 1, wherein the closure is provided with a pair of similarly-configured lugs spaced in the direction of the hinging axis of the closure, the elastic link extends between the pair of lugs and is located in the receptors thereof, and the lug of the base component is

disposed between the pair of lugs of the closure with the base component lug receptor also engaging the elastic link.

4. A closure arrangement as claimed in any of the preceding claims, wherein each receptor comprises a generally U-shaped slot formed in an end portion of each lug. 5
5. A closure arrangement as claimed in any of the preceding claims, wherein the elastic link comprises a strip of elastomeric material moulded to have enlarged heads at its two ends and which heads engage the lugs. 10
6. A closure arrangement as claimed in claim 5, wherein the strip of elastomeric material is of substantially circular cross-sectional shape. 15
7. A closure arrangement as claimed in any of the preceding claims, wherein a catch mechanism is provided to maintain the closure in its closed position. 20
8. A closure arrangement as claimed in claim 7, wherein said catch mechanism comprises a catch member hinged to the base component and a tab provided on the closure which tab is engageable with the catch member to retain the closure in its closed position. 25
9. A closure arrangement as claimed in any of the preceding claims, wherein the arrangement of the lugs respectively on the base component and the closure is such that the strain in the elastic link initially increases on moving the closure from its closed position to its open position, before reducing to its smallest value with the closure at its open position. 30
10. A closure arrangement as claimed in any of the preceding claims, wherein the base component forms a part of a lid assembly for a container. 35
11. A closure arrangement for a container as claimed in claim 10 and where the container is intended to hold wetted or moistened sheets removable from the container through the opening in the base component, wherein the closure when in its closed position effects a generally moisture-tight seal to the base component. 40
12. A closure arrangement as claimed in claim 1 and substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings. 45

Patentansprüche

1. Verschluss-Anordnung mit einer Grund-Komponente (15), die eine verschließbare Öffnung bestimmt, einem Verschluss (17) für die Öffnung und welcher an der Grund-Komponente für eine Bewegung zwischen einer geschlossenen und einer offenen Position angelenkt ist, angrenzenden Ansätzen (22), die jeweils auf der Grund-Komponente und dem Verschluss im Bereich der Gelenk-Achse des Verschlusses vorgesehen sind, wobei jeder Ansatz an oder benachbart zu seinem freien Ende eine Aufnahme (23) aufweist, und einem elastischen Zwischenglied (31), das in den Aufnahmen der Ansätze angeordnet ist und zwischen diesen verläuft, wobei die Aufnahmen der Ansätze zu der Gelenk-Achse versetzt und derart angeordnet sind, dass das Zwischenglied unter Spannung gesetzt ist, wenn sich der Verschluss in seiner geschlossenen Position befindet, wobei sich die Spannung des Zwischengliedes verändert, während der Verschluss zwischen seiner geschlossenen und offenen Position bewegt wird und am kleinsten ist, wenn sich der Verschluss in seiner offenen Position befindet.
2. Verschluss-Anordnung nach Anspruch 1, wobei die Grund-Komponente mit einem Paar ähnlich-konfigurierter Ansätze versehen ist, die in der Richtung der Gelenk-Achse des Verschlusses beabstandet sind, wobei das elastische Zwischenglied zwischen dem Paar von Ansätzen verläuft und in deren Aufnahmen angeordnet ist, und wobei der Ansatz des Verschlusses zwischen dem Paar von Ansätzen der Grund-Komponente angeordnet ist, wobei die Aufnahme des Verschluss-Ansatzes außerdem mit dem elastischen Zwischenglied in Eingriff steht.
3. Verschluss-Anordnung nach Anspruch 1, wobei der Verschluss mit einem Paar ähnlich-konfigurierter Ansätze versehen ist, die in der Richtung der Gelenk-Achse des Verschlusses beabstandet sind, wobei das elastische Zwischenglied zwischen dem Paar von Ansätzen verläuft und in deren Aufnahmen angeordnet ist, und wobei der Ansatz der Grund-Komponente zwischen dem Paar von Ansätzen des Verschlusses angeordnet ist, wobei die Aufnahme des Grund-Komponenten-Ansatzes außerdem mit dem elastischen Zwischenglied in Eingriff steht.
4. Verschluss-Anordnung nach einem der vorherigen Ansprüche, wobei jede Aufnahme eine im Allgemeinen U-förmigen Ausnehmung aufweist, die in einem Endabschnitt von jedem Ansatz ausgebildet ist.
5. Verschluss-Anordnung nach einem der vorherigen Ansprüche, wobei das elastische Zwischenglied ein

schmales Stück aus elastomeren Material aufweist, das geformt ist, um vergrößerte Köpfe an seinen beiden Enden aufzuweisen und welche Köpfe mit den Ansätzen in Eingriff stehen.

6. Verschluss-Anordnung nach Anspruch 5, wobei das schmale Stück aus elastomeren Material im Wesentlichen eine kreisrunde Querschnitts-Form aufweist.
7. Verschluss-Anordnung nach einem der vorherigen Ansprüche, wobei ein Halte-Mechanismus vorgesehen ist, um den Verschluss in seiner geschlossenen Position zu halten.
8. Verschluss-Anordnung nach Anspruch 7, wobei der Halte-Mechanismus ein Halte-Element umfasst, das an der Grund-Komponente angelenkt ist, und eine Lasche, die auf dem Verschluss vorgesehen ist, welche Lasche mit dem Halte-Element in Eingriff bringbar ist, um den Verschluss in seiner geschlossenen Position zurückzuhalten.
9. Verschluss-Anordnung nach einem der vorherigen Ansprüche, wobei die Anordnung der Ansätze jeweils auf der Grund-Komponente und dem Verschluss derart ist, dass die Spannung in dem elastischen Zwischenglied anfänglich bei der Bewegung des Verschlusses von seiner geschlossenen Position zu seiner offenen Position zunimmt, bevor diese auf ihren kleinsten Wert abnimmt, wenn sich der Verschluss in seiner offenen Position befindet.
10. Verschluss-Anordnung nach einem der vorherigen Ansprüche, wobei die Grund-Komponente einen Teil einer Deckel-Anordnung für ein Behältnis bildet.
11. Verschluss-Anordnung für ein Behältnis nach Anspruch 10 und wobei das Behältnis vorgesehen ist, um benetzte oder feuchte Bögen zu enthalten, die aus dem Behältnis durch die Öffnung in der Grund-Komponente entnehmbar sind, wobei der Verschluss - wenn sich dieser in seiner geschlossenen Position befindet - eine im Allgemeinen feuchtigkeitsdichte Verbindung mit der Grund-Komponente bewirkt.
12. Verschluss-Anordnung nach Anspruch 1 und wie diese im Wesentlichen vorher hierin unter Bezugnahme auf die beigelegten Zeichnungen beschrieben ist und in diesen dargestellt ist.

Revendications

1. Système de fermeture comprenant un composant de base (15) définissant une ouverture obturable,

une fermeture (17) pour l'ouverture et en articulation sur le composant de base pour le mouvement entre des positions fermées et ouvertes, des oreilles juxtaposées (22), prévues respectivement sur le composant de base et la fermeture dans la région de l'axe d'articulation de la fermeture, chaque oreille ayant sur ou de façon adjacente à son extrémité libre un récepteur (23) et une liaison élastique (31) située dans ou s'étendant entre les récepteurs des oreilles, les récepteurs des oreilles étant décalés par rapport à l'axe d'articulation et disposés de telle sorte que la liaison est sollicitée lorsque la fermeture se trouve sur sa position fermée, la sollicitation de la liaison variant à mesure que la fermeture est déplacée entre ses positions fermée et ouverte et étant moindre lorsque la fermeture est sur sa position ouverte.

2. Système de fermeture selon la revendication 1, dans lequel le composant de base est muni d'une paire d'oreilles de configuration similaire, espacées dans la direction de l'axe de liaison de la fermeture, la liaison élastique s'étend entre la paire d'oreilles et est située dans ses récepteurs, et l'oreille de la fermeture est disposée entre la paire d'oreilles du composant de base avec le récepteur d'oreille de fermeture coopérant également avec la liaison élastique.
3. Système de fermeture selon la revendication 1, dans lequel la fermeture est munie d'une paire d'oreilles de configuration similaire espacées dans la direction de l'axe d'articulation de la fermeture, la liaison élastique s'étend entre la paire d'oreilles et est située dans ses récepteurs, et l'oreille du composant de base est disposée entre la paire d'oreilles de la fermeture avec le récepteur d'oreille de composant de base coopérant également avec la liaison élastique.
4. Système de fermeture selon l'une quelconque des revendications précédentes, dans lequel chaque récepteur comprend une fente de façon générale en forme de U dans une portion d'extrémité de chaque oreille.
5. Système de fermeture selon l'une quelconque des revendications précédentes, dans lequel la liaison élastique comprend une bande de matériau élastomère moulé pour présenter des têtes agrandies sur ses deux extrémités et lesquelles têtes coopèrent avec les oreilles.
6. Système de fermeture selon la revendication 5, dans lequel la bande de matériau élastomère est de forme transversale sensiblement circulaire.
7. Système de fermeture selon l'une quelconque des

revendications précédentes, dans lequel un mécanisme d'arrêt est prévu pour maintenir la fermeture dans sa position fermée.

8. Système de fermeture selon la revendication 7, dans lequel ledit mécanisme d'arrêt comprend un élément d'arrêt articulé sur le composant de base et une languette prévue sur la fermeture, laquelle languette peut coopérer avec l'élément d'arrêt pour maintenir la fermeture dans sa position fermée. 5 10
9. Système de fermeture selon l'une quelconque des revendications précédentes, dans lequel le système des oreilles respectivement sur le composant de base et la fermeture est tel que la sollicitation dans la liaison élastique augmente initialement lors du déplacement de la fermeture de sa position fermée à sa position ouverte avant de diminuer à sa valeur la plus petite avec la fermeture dans sa position ouverte. 15 20
10. Système de fermeture selon l'une quelconque des revendications précédentes, dans lequel le composant de base forme une partie d'un ensemble de couvercle pour un récipient. 25
11. Système de fermeture pour un récipient selon la revendication 10 et dans lequel le récipient est destiné à renfermer des feuilles mouillées ou humectées pouvant être enlevées du récipient à travers l'ouverture du composant de base, dans lequel la fermeture, lorsqu'elle est dans sa position fermée, réalise un joint étanche de façon générale à l'humidité vis-à-vis du composant de base. 30 35
12. Système de fermeture selon la revendication 1 et sensiblement comme décrit ci-dessus et en référence à ce qui illustré dans les dessins ci-annexés. 40

45

50

55

60

Figure 1

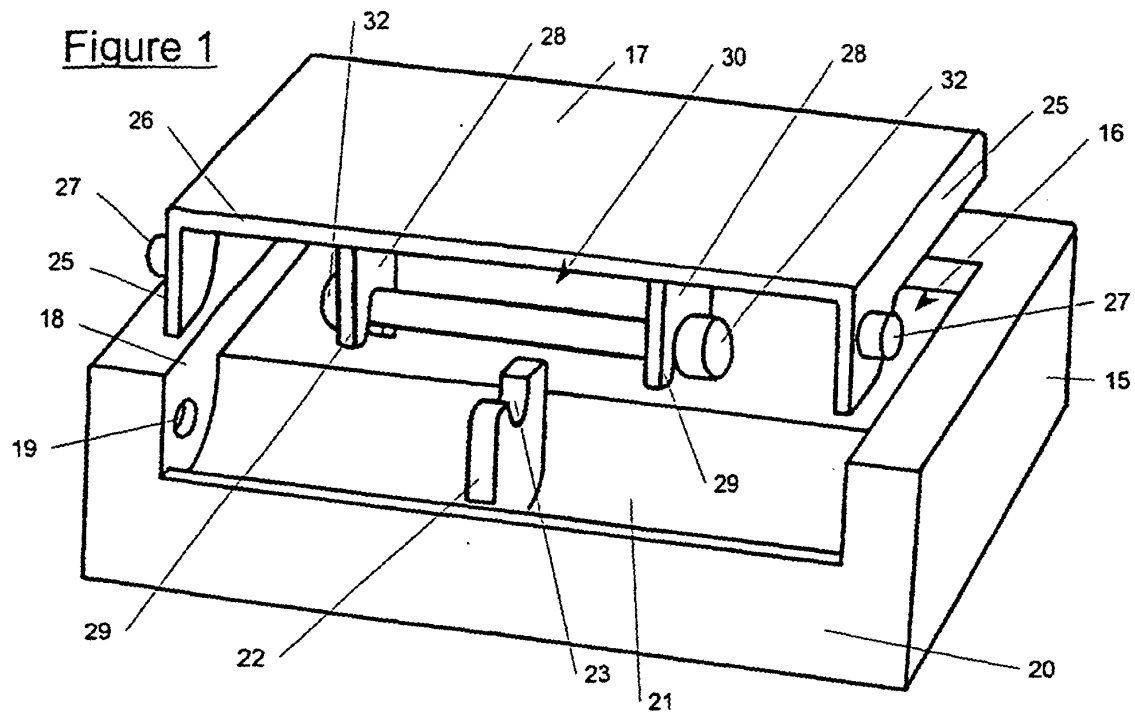


Figure 2

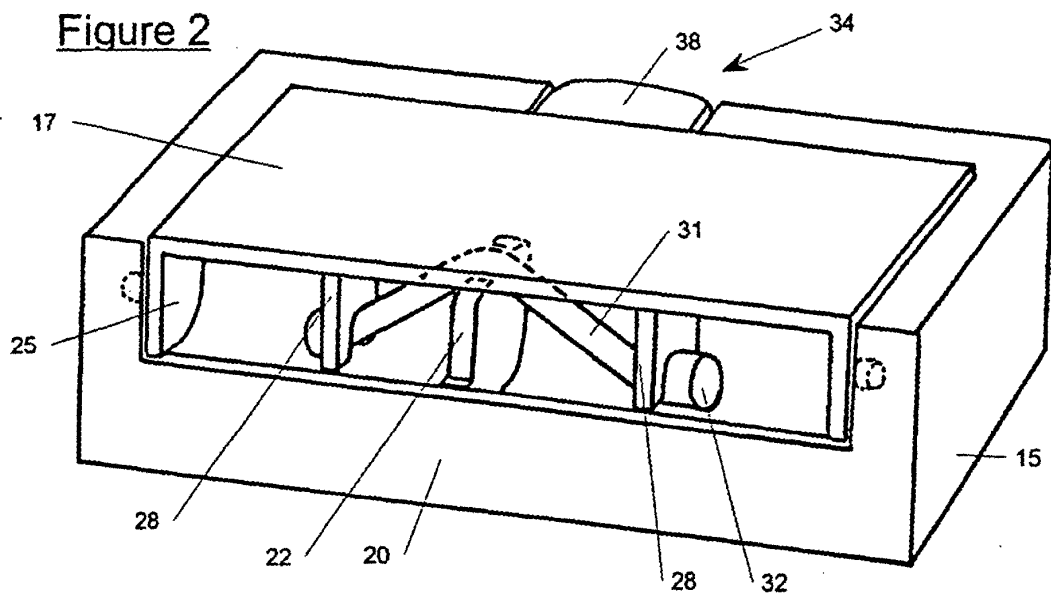


Figure 3

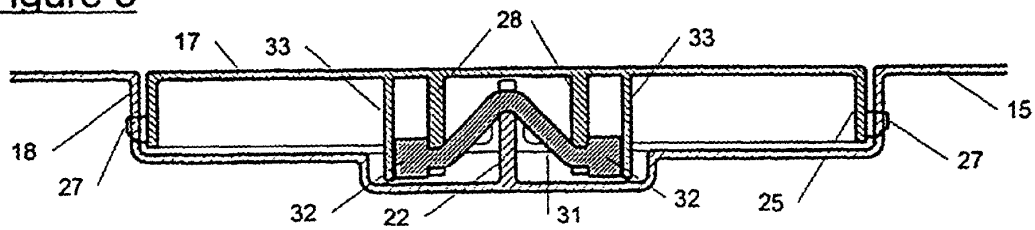


Figure 4

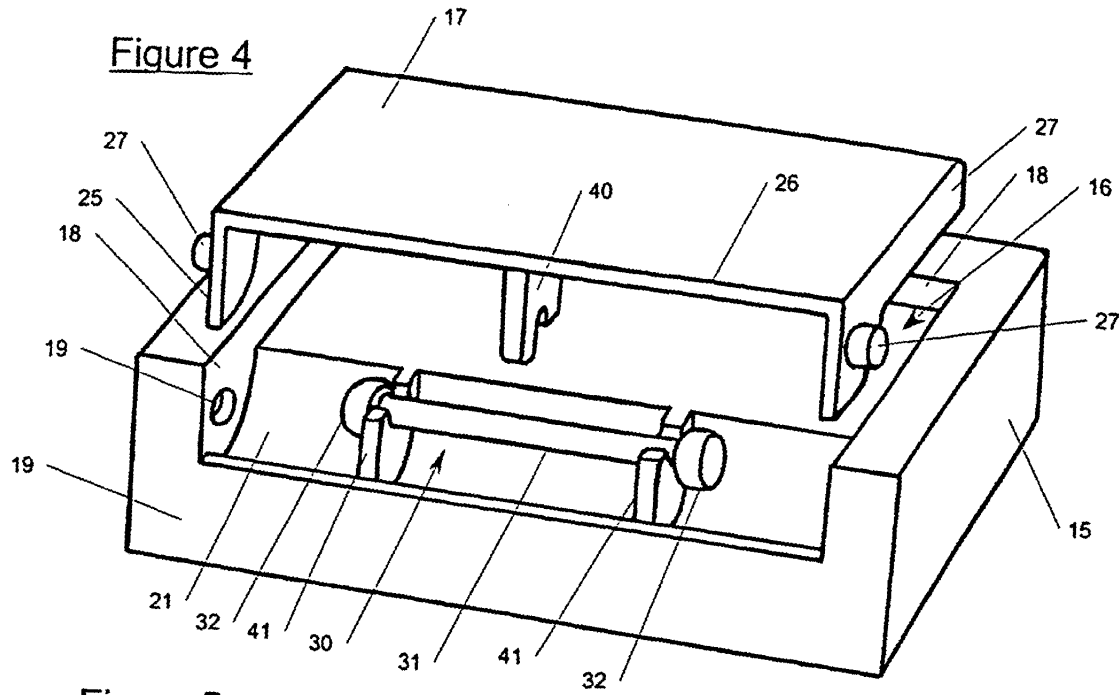


Figure 5

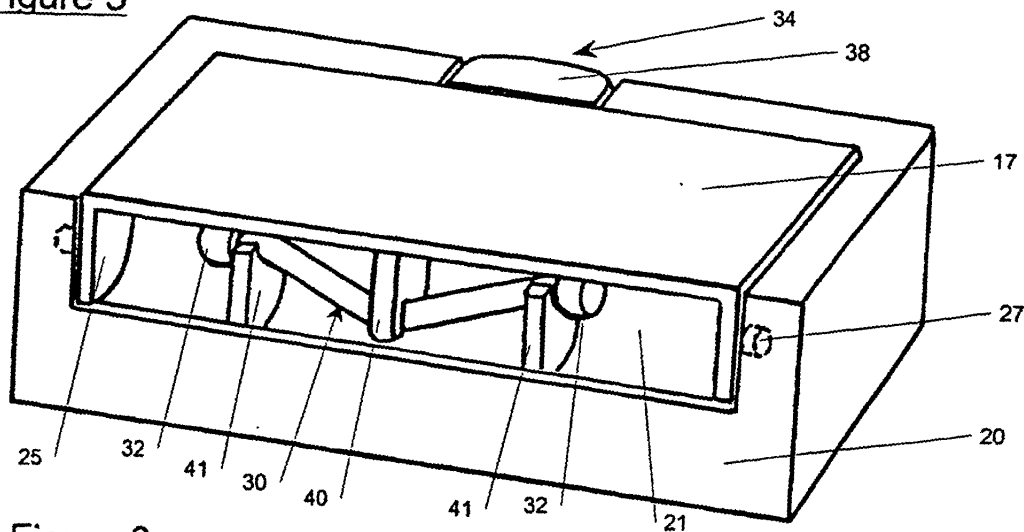


Figure 6

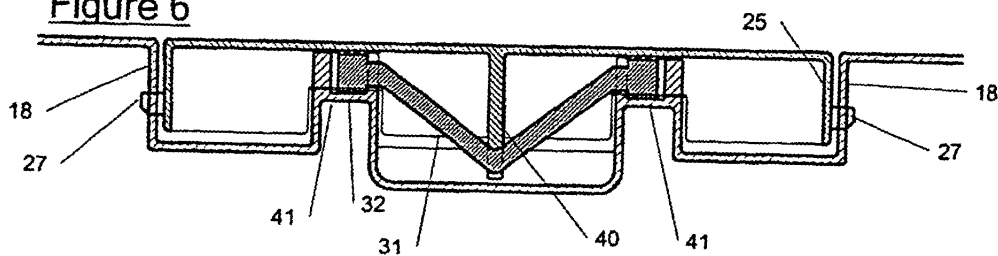


Figure 7

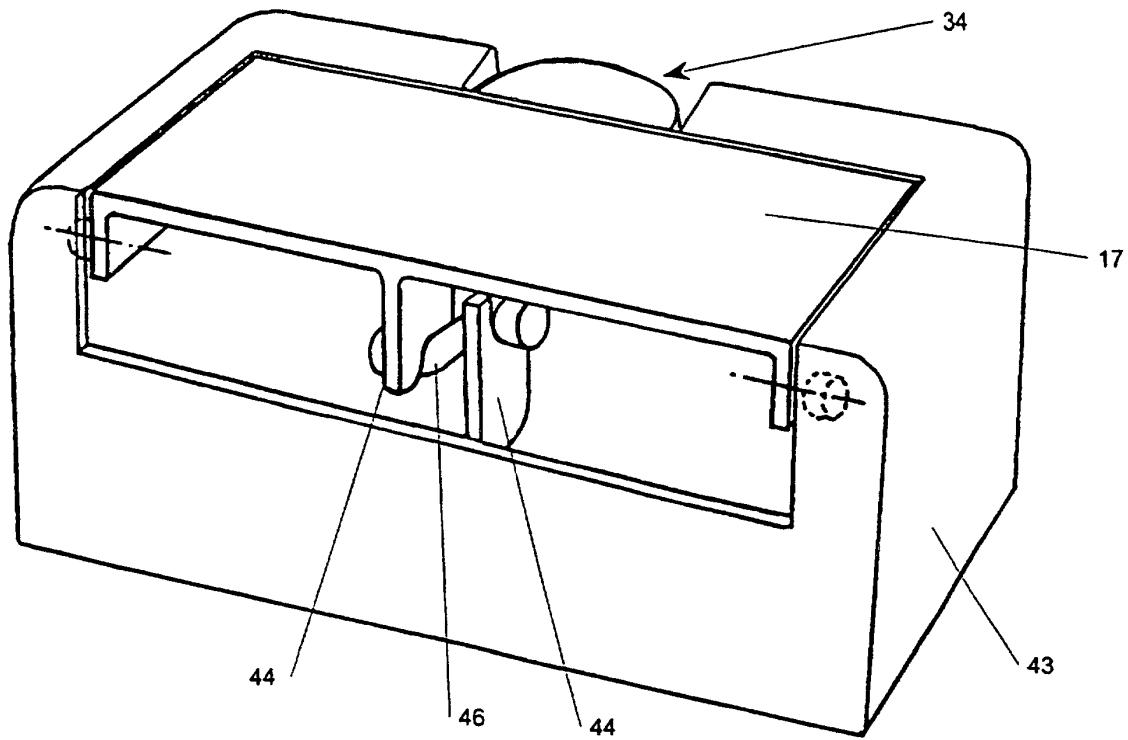


Figure 8

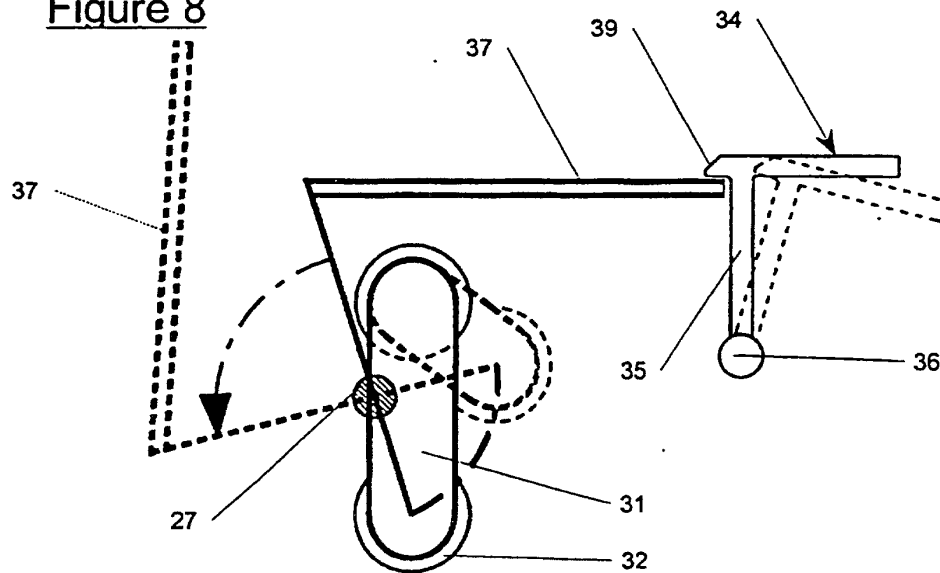


Figure 9A

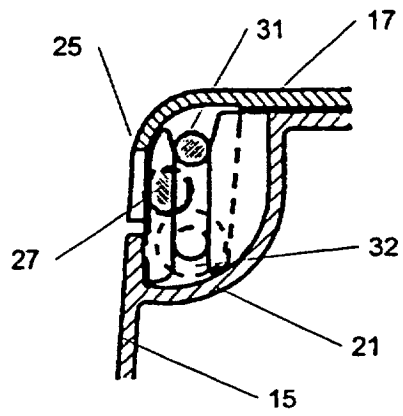


Figure 9B

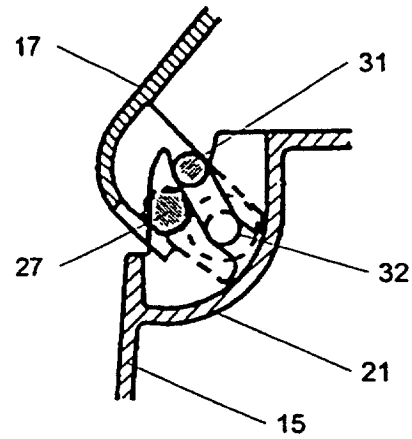


Figure 9C

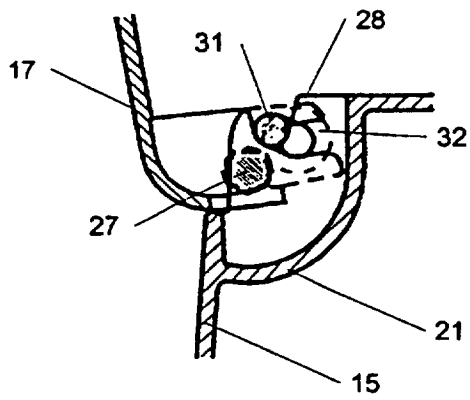


Figure 10

