

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 March 2008 (13.03.2008)

PCT


(10) International Publication Number  
WO 2008/030463 A2

- (51) International Patent Classification:  
B24B 31/00 (2006.01)
- (21) International Application Number:  
PCT/US2007/019344
- (22) International Filing Date:  
5 September 2007 (05.09.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/842,321 5 September 2006 (05.09.2006) US
- (71) Applicant (for all designated States except US): SUN-  
NEN PRODUCTS COMPANY [US/US]; 7910 Manches-  
ter Avenue, St. Louis, MO 63143 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MOEHN, David,  
M. [US/US]; 2206 Edwards, Alton, IL 62002 (US).  
CLOUTIER, Daniel, R. [US/US]; 1625 NW 123rd  
Street, Clive, IA 50325 (US). HOTH, Timothy, P.  
[US/US]; 4 Auburn Circle, St. Peters, MO 63376 (US).

- (74) Agents: GARRETT, Robert, M. et al.; Haverstock, Gar-  
rett & Roberts LLP, 611 Olive St., Suite 1610, St. Louis,  
MO 63101 (US).
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,  
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,  
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,  
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,  
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,  
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,  
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,  
ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,

[Continued on next page]

(54) Title: PRE-AND POST-PROCESS BORE GAGING USING A HONING FEED SYSTEM EQUIPPED WITH FEED FORCE SENSING

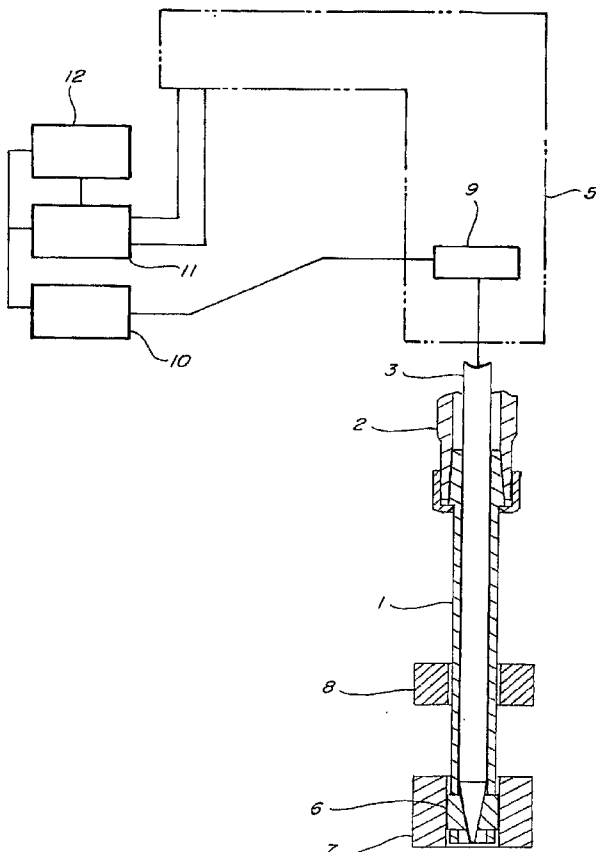

(57) Abstract: The method of the invention provides a capability for accurately and uniformly determining the sizes of bores of workpieces, both pre- and post-process, to improve process control, particularly compensation for tool or stone wear and other factors, and process data collection. The present method makes all required bore measurements, including those in both the workpiece bore and the calibration ring or sample workpiece bore, with the honing tool, under controlled static, non-honing conditions, including expanding the tool in the bores in a predetermined manner, such as at a predetermined rate. The method of the invention has utility for honing multiple workpieces to a finished size with a single tool, and also for multiple spindle applications.

WO 2008/030463 A2



PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

**Published:**

- *without international search report and to be republished upon receipt of that report*

**PRE- AND POST-PROCESS BORE GAGING USING A HONING  
FEED SYSTEM EQUIPPED WITH FEED FORCE SENSING**

5    **[0001]**     This application claims the benefit of U.S. Provisional Application No. 60/842,321, filed September 5, 2006.

Technical Field

10   **[0002]**     This invention relates generally to gaging of bores, to be honed, and after being honed, and more particularly, to bore gaging using a feed force sensing capability of a feed system of a honing machine, for purposes such as to achieve improved accuracy, and  
15   making compensation for predicted tool wear for honing the compensation.

Background Of The Invention

20   **[0003]**     Cloutier, et al, U.S. Patent Application Serial No. 11/596,836 entitled *Honing Feed System Having Full Control of Feed Force, Rate and Position*, currently pending, and the disclosure of U.S. Provisional Application No. 60/842,321, filed September 5, 2006, are incorporated herein by reference in their entirety.

25   **[0004]**     Currently some new models of honing machines available from Sunnen Products Company are using a feed force sensing device to improve the control and results of the honing process. This technology is described in detail in the above-referenced pending U.S. and  
30   international patent applications, Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate and Position*.

-2-

**[0005]** Essentially, according to the present invention, the type of feed system described in the above-referenced pending patent application, and other feed systems with force sensing capability, can be used in conjunction with the honing tool itself to produce reliable pre- and post-processing gaging of the finished bore, or hole, herein interchangeably referred to by the term bore. Furthermore the data gathered and processed by the machine control computer during this step can be used to make accurate compensations for abrasive wear of the honing tool.

**[0006]** Current bore measuring methods can be generally categorized as post-process methods and in-process methods. The in-process methods primarily consist of either a plug gage that tries to enter the bore during the process or an air gage probe, either separate or built into the tool, measuring the bore during the process. Post-process gaging can vary in sophistication from manually placing a bore gage in the bore to automated air gage probes that enter the bore and take multiple readings. No known methods exist where the tool itself, lacking any dedicated measuring attachment, is used to measure the size of the finished bore.

**[0007]** In the past, most honing feed systems did not have the ability to accurately measure both feed force and feed position. Since the elements of the feed system and honing tool are not perfectly rigid and exhibit some degree of elasticity, it is impractical to attempt to use the honing feed system as a bore

-3-

measuring system unless both force and position can be measured accurately.

**[0008]** One example of prior art, does combine both force and position measurement. European Patent No. EP 5 0 575 675 B1 (Grimm, et al, Method and Machine for Finishing a Bore in a Work Piece) uses a feed force measuring device, for determining a target end point (final encoder position) before the honing process begins. This method uses a calibration ring (or sample 10 workpiece) that has been made with a bore size equal to the desired final bore size. The honing tool is expanded in the bore of this calibration ring until a certain level of force is measured in the feed force measuring device. To minimize errors arising from tool 15 and feed system elasticity, the last recorded feed force of the last honing cycle is used. When this force is reached with the tool in the calibration ring, the feed system position is recorded as the target position for the next honing cycle.

**[0009]** An observed shortcoming of the above-discussed disclosure of Grimm et al., however, is that no post-process measurements of the honed bore are made to verify the achievement of the desired bore size. Thus, no capability is provided for the machine control system 25 to gather accurate process data for purposes such as improving the accuracy of the honing process.

**[0010]** Another observed shortcoming in the disclosure of Grimm et al., is that no difference between measurements made under static and dynamic conditions is 30 noted or recognized. In Grimm et al., in the calibration ring, the feed force and position are

-4-

measured under static conditions, that is with no relative rotation and/or stroking of the tool and workpiece, but, in the workpiece bore, the measurements are made under the dynamic conditions of the honing process, i.e., the honing tool is at least rotating and there may be a relative stroking motion between the tool and the bore. Experience has shown that forces and positions recorded under dynamic conditions will not exactly result in the same bore measurement as when the same level of force is applied under static conditions.

[0011] Still further, in the Grimm et al. disclosure, compensation for tool wear is made periodically, based on differences between feed position measurements taken in the calibration ring before and after at least one workpiece has been honed, and thus, as another shortcoming, the compensation is not applied to the immediately affected workpiece or workpieces, but instead, to subsequently honed workpieces.

[0012] Accordingly, what is sought is a capability of making pre- and post-process measurements of bores of honed workpieces, that verify the desired bore size and allow the ability for the machine control system to gather accurate process data for purposes including improving the accuracy of the honing process and compensation for tool wear.

#### Summary of the Invention

[0013] According to the invention, a capability of making measurements of bores of workpieces, both pre- and post-process, that enables verifying bore size before honing, and allows more accurately determining

-5-

honing parameters for reaching a desired finished bore size, including amount of stock or material to be removed, and accompanying tool wear, and the ability for the machine control system to gather accurate process data, for purposes including improving the accuracy of the honing process, is disclosed.

[0014] According to a preferred aspect of the invention, the present invention makes all comparative bore measurements, that is, those in both the workpiece bore and the calibration ring or sample workpiece bore, under static conditions.

[0015] According to another preferred aspect of the invention, the present invention makes tool wear compensations before the workpiece bore is honed, as a function of the amount of stock or material to be removed from the workpiece in the honing operation.

#### Description of the Drawings

[0016] FIG. 1 is a simplified schematic representation of aspects of a representative honing machine for performing steps of the method of the present invention, including a feed system, a honing tool, and a calibration ring, and showing the honing tool disposed in position in a bore of a representative workpiece to be honed;

[0017] FIG. 2 is a simplified graphical representation of stone wear verses stock removal according to the method of the invention;

[0018] FIG. 3 is a simplified schematic representation of aspects of a representative multiple spindle honing machine for performing steps of the

-6-

method of the present invention, including respective feed systems for the spindles, a honing tool of each of the spindles disposed in bores of workpieces to be honed, and a calibration ring in association with one of the honing tools;

[0019] FIG. 4 is a high level flow diagram illustrating steps of a preferred embodiment of a method of the invention; and

[0020] FIG. 5 is a side view, in partial section, of a representative honing machine spindle with which the invention can be used.

#### Description of the Proposed Invention

[0021] Referring to Figure 1, a honing tool 1 is fixed in the spindle 2 of a honing machine (not shown), which machine can be for instance, any of a variety of machines that provide all the usual required motions for abrasive bore finishing processes (spindle rotation and axial reciprocation of spindle or workpiece). The honing tool contains a wedge 3 which is driven axially by a feed system 5. (Detail of one possible embodiment of the feed system can be seen in FIG. 5, disclosed more particularly in Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate, and Position*, incorporated herein by reference above.) The end of the wedge bears against abrasive stones 6, thereby feeding them into the bore of the workpiece 7.

[0022] The feed force developed in the wedge and feed system is measured by a load cell 9 which transmits an electronic signal back to an amplifier 10 (if required). Power and signals run between the amplifier and the

-7-

honing machine computer control 12 and to a computer controlled motor drive 11. The control of these devices results in signals that precisely control a feed motor or some other driving component of the feed system 5.

5 [0023] Referring also to FIG. 4, which contains a flow diagram 13 showing steps of one embodiment of the method of the invention, when honing a group of workpieces, the first workpiece must somehow be honed to finished size or close to finished size. This could be  
10 done by using any number of conventional initialization techniques. (One such method is described hereinbelow, and in Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate, and Position, incorporated herein by reference above.*)

15 [0024] When the honing of the first workpiece is complete the spindle and stroking motion will stop. The feed system will then retract the abrasive stones 6. Then the feed system will move to once again expand the stones in the same bore of workpiece 7, this time,  
20 though, expansion will be under static conditions, that is, without relative rotational and/or reciprocating movements of the honing tool and workpiece as would be used for actual honing, wherein material or stock is removed from the surface of the bore. The expansion  
25 will proceed at some predetermined rate until the load cell 9 senses that a predetermined or target level of force has been reached. At that point, the position of the feed system (as determined by an encoder in the feed system) will be recorded, as a target feed system  
30 position. The predetermined rate of expansion may be one that has been optimized for the accuracy of the

-8-

position measurement that results when the target level of force is achieved and it is not limited to a single rate or a single forward feeding motion as several techniques may be envisioned for finding the bore in such a manner that a reliable value of position can be measured. (See Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate, and Position.*)

5 [0025] The feed system then again retracts the stones and the machine moves the tool up out of the workpiece bore until the abrasive stones are uniformly inside the calibration ring 8. The calibration ring most likely will have a bore that is exactly the desired finished size, although the methods described here will work with any size of ring as long as the difference between the ring's size and the desired finished size is included in the control system calculations. For simplicity the calculations shown here will assume the calibration ring has been made to the exact desired finished size.

15 [0026] With the stones inside the calibration ring, the feed system is again expanded at the same predetermined rate until the same predetermined target feed force is reached. At that point, the position of the feed system is again recorded. This position measurement is compared to the measurement made in the workpiece bore and the true size of the workpiece bore can then be calculated from the following:

$$D_{wp} = D_{cr} + r(x_{wp} - x_{cr})$$

30 where  $D_{wp}$  = Diameter of workpiece bore (mm)  
 $D_{cr}$  = Diameter of calibration ring (mm)  
 $x_{wp}$  = Encoder position of workpiece measurement (counts)  
 $x_{cr}$  = Encoder position of calibration ring measurement (counts)

-9-

$r$  = Combined feed system and tool ratio  
(mm of diametrical  
stone expansion per encoder count)

5 [0027] This information can then be used to make a  
bore size compensation for the honing of the next  
workpiece. Also this information can be saved and/or  
output for purposes of Statistical Process Control.  
[0028] Since this measurement step is not a required  
10 part of the honing process, it does not need to be  
performed on every workpiece. The operator of the  
honing machine can select the frequency at which the  
final bore size measurement will be taken.

15 **Stone Wear Measurement, Prediction and Compensation**

[0029] It is necessary to at least periodically  
measure the finished workpiece bore because the abrasive  
stones continually wear down during the honing process.  
This stone wear, also referred to as tool wear, results  
20 in bore size errors. Many factors affect the amount of  
stone or tool wear that will occur in a honing cycle,  
but most of those factors are held constant throughout  
the process and therefore will not contribute to short  
term variations in stone wear. One significant factor  
25 that often varies widely from one workpiece to the next  
is the amount of stock or workpiece material to be  
removed from the bore (stock removal). The stone or  
tool wear increases as the amount of stock removal  
increases. Depending on the conditions and hardness of  
30 the in-coming workpiece bores, this relationship could  
be a simple proportion or it could be more complex. An  
example is shown in Figure 2. For most applications a  
linear approximation of the relationship between stone

-10-

wear and stock removal will be sufficient, however it is foreseen that more complex curve fitting techniques could be used if a specific application presents such a sufficiently non-linear relationship between stone wear and stock removal.

5 [0030] The present invention provides a method to accurately measure both stock removal and stone wear for any given honing cycle or series of honing cycles. The process described above constitutes one set of  
10 measurements required. Another measurement will also be required. It will be necessary to measure the initial diameter of the workpiece bore. This will occur at the beginning of the cycle after any bore compensation from the previous cycle has been made by the control system.  
15 The method of measurement is identical to that described above. Under static conditions the feed system expands the stones into the workpiece bore at a predetermined rate until a predetermined force is measured by the load cell. (This process is equivalent to the feature  
20 described as Automatic Bore Detection in Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate, and Position.*)

[0031] After the honing cycle is complete and the final bore size measurement is taken as described above,  
25 the control system will have recorded three measurements:

$x_i$  = initial feed system position (counts)  
 $x_f$  = final feed system position (counts)  
30  $x_t$  = target feed system position (counts)

By application of the combined ratio of the feed system and tool, these can equivalently be expressed as diameters:

$D_i = r(x_i - x_0)$  where  $D_i$  = initial diameter (mm)  
 $D_f = r(x_f - x_0)$  where  $D_f$  = final diameter (mm)  
 $D_t = r(x_t - x_0)$  where  $D_t$  = target diameter, i.e.  
 calibration ring (mm)

5 and where  $x_0$  = some offset  
 (counts) corresponding to  
 an encoder position where the  
 diameter would equal  
 10 zero

Stock removal,  $s$  (mm) and stone wear,  $w$  (mm) are then  
 calculated as follows:

$$w = D_t - D_f = r(x_t - x_f)$$

$$s = D_f - D_i = r(x_f - x_i) \quad \text{or} \quad s = D_t - D_i - w$$

15 A target feed position  $x_{tnext}$  for honing the next  
 workpiece, and adjustment for stone wear,  $x_{tadj}$ , can be  
 determined using the equations shown at the bottom of  
 the flow diagram of FIG. 4.

20 **[0032]** It is understood that stone wear in many  
 applications may be small enough that it is unnecessary  
 to measure the final bore size on every workpiece honed.  
 Assume then the frequency of final bore checking to be  
 every  $n$  workpieces. (Note: Since the in-coming bore  
 25 size can vary, the initial bore size of every workpiece  
 must be recorded and summed for the group of  $n$   
 workpieces.) For a group of  $n$  workpieces then,

$$\Sigma w = D_t - D_f \text{ (measured at the last workpiece only)}$$

$$\Sigma s = nD_t - \Sigma d_i - \Sigma w$$

30 If the relationship between stone wear and stock removal  
 is assumed to be linear, then the form of that function  
 can be written as,

$$w = A + Bs \quad \text{for a single workpiece, or}$$

$$35 \Sigma w = nA + B\Sigma s \quad \text{for a group of } n \text{ workpieces}$$

where A and B are unknown constants.

-12-

At least two groups will need to be measured in order to determine A and B by conventional linear regression techniques. After they have been determined, then the relationship between stone wear and stock removal can be assumed to be known and the above relationship can be used to calculate the expected amount of stone wear before the honing cycle begins. That amount of stone wear can then result in an accurate bore size compensation for anticipated stone wear applied at the beginning of the honing cycle to result in the finished bore size being very close to the target bore size within a minimal range of error. That workpiece-specific bore size compensation will be based on the measured amount of stock removal for that specific bore and calculated from the formula above for  $w$ .

[0033] It is understood that the conditions of honing may change over time and the relationship of stone wear to stock removal may also change over time. It may be desirable to continually update the constants A and B based on the most recent groups of measurements. This is easily done, however the formulae above are based on the assumption that no bore size compensations are made throughout the entire run of the group being measured. If bore size compensations are made during the run of the group (either manually or automatically as described above) then those compensations must be summed. The formula for  $\Sigma w$  above must then be replaced by:

$$\Sigma w = D_t - D_f + \Sigma c$$

where  $\Sigma c$  = the sum of all bore size compensations made during the run of the group

-13-

**[0034]** All discussion and calculations above assume that bore measurements are made at a constant feed force level. This will inherently remove any effect of tool and feed system elasticity. However a known method for removing the effects of elasticity is described in Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate, and Position*, so it is anticipated that the method described by this invention could in fact be accomplished at different levels of feed force so long as the methods of this prior art are applied during the measurement process.

#### **Multiple Spindle Honing Operations**

**[0035]** Referring also to Figure 3, some honing machines use multiple spindles (i.e. tools) in succession to achieve the final finished bore (e.g. a rough honing tool followed by a finer finish honing tool). For instance, here, three honing tools **1A**, **1B** and **1C** are used. Tools **1A**, **1B** and **1C** are mounted in separate spindles **2A**, **2B** and **2C** of a honing machine which provides all the usual required motions for abrasive bore finishing processes (spindle rotation and axial reciprocation of spindle or workpiece). The honing tools contain wedges **3A**, **3B** and **3C**, respectively, driven axially by a feed system **5A**, **5B** or **5C**. (Detail of another possible embodiment of the feed system can be seen in Cloutier, et al, *Honing Feed System Having Full Control of Feed Force, Rate, and Position*.) In each of the tools, the end of the wedge bears against abrasive stones **6A**, **6B** or **6C**, thereby feeding them into the bore of the workpiece **7**.

-14-

[0036] For each of the tools, the feed force developed in the wedge and feed system is measured by a load cell **9A**, **9B** or **9C** which transmits an electronic signal back to an amplifier **10A**, **10B** or **10C** (if  
5 required). Power and signals run between the amplifiers and the honing machine computer control **12** and to a computer controlled motor drive **11A**, **11B** or **11C** for each tool. It is not necessary to have a calibration ring **8** for each spindle **2A**, **2B** and **2C**. It is sufficient for  
10 only the last spindle **2C** to have a calibration ring **8** or some other post process method of accurately measuring the final bore size.

[0037] In operation, the workpiece **7C** just finished by the last honing tool **1C** is measured either by the  
15 method described above (using calibration ring **8**) or by some other post process method of bore gaging. Any bore size compensation that is subsequently determined for that last tool is then made to that last tool. The workpiece transfer device (not shown) then indexes  
20 presenting the next workpiece to each spindle. The workpiece now under the last spindle is the one completed by the previous spindle. The tool enters the workpiece and under static conditions the tool is expanded until the abrasive stones contact the bore  
25 wall. When this contact is made and feeding stops, the encoder of the feed system can be read. Following the method previously described, this encoder reading can be mathematically converted to a bore size for that particular workpiece. If that size varies from the  
30 target bore size for that previous tool then the appropriate bore size compensation can be made for that

-15-

previous tool using only the information obtained at the subsequent tool (i.e. no calibration ring will be needed for the previous tool).

**[0038]** If more than two spindles are present, the tool prior to the tool that was just compensated can now be measured and compensated using the same method. This can continue for any number of spindles with the sequence of compensations flowing from last tool to the first tool with each tool being calibrated by means of the bore measurement made from the tool that follows it in the honing operation but has preceded it in this calibration operation.

**[0039]** FIG. 5 illustrates additional aspects of one possible feed system 5 with which the method of the invention can be used. A feed motor 14 of drive 11 is connected to (or is integral with) an encoder 15. If needed to provide the desired characteristics of output torque, output speed, and linear travel per encoder count, a gear reducer 16 may be attached to the shaft of the feed motor 14. The gear reducer output shaft is connected to a ball screw assembly 17 by a coupling 18. The ball screw assembly 17 resists axial motion by means of ball bearing 19 held in a feed system housing 20. (The feed system housing 20 may consist of several pieces as required for ease of manufacturing and assembly.) The ball screw engages a ball nut 21 that is attached to a ball nut carrier 22. The ball nut carrier 22 is prevented from rotating by a key 23 that engages a slot 24 in the feed system housing 20. Rotation of the feed motor 14 and subsequently the output shaft of the gear reducer 16 causes the ball screw to rotate, which

-16-

in turn imparts a linear motion to the ball nut 21 and its carrier 22. The key 23, in this embodiment, is integral with a retainer 25 that has a pocket to hold a round disc 26. The round disc 26 is attached to one  
5 threaded end of load cell 9. The pocket has a very small amount of clearance with the round disc 26 for the purpose of allowing the round disc 26 to align itself with the components below without creating any undesirable stresses on the load cell 9. The load cell  
10 9 is fastened to a non-rotating feed rod 27, which is prevented from rotating by a key 28 which also engages the previously mentioned slot 24 in the feed system housing 20. The non-rotating feed rod 27 is attached to a tube holding an arrangement of angular contact  
15 bearings 29. The rotating races of the bearings 29 are attached to a rotating feed rod 30. The rotating feed rod 30 is splined or keyed by some means so that it will rotate with the honing machine spindle shaft 2 and yet allows relative axial motion between the spindle shaft 2  
20 and the feed rod 30. The spindle shaft 2 holds the honing tool 1 which contains a wedge for expanding abrasive honing elements 6 into the bore of the workpiece 7. The wedge is attached to the feed rod 3 and is allowed to move axially with the feed rod 3 while  
25 the tool 1 is restrained from axial movement by its connection to the spindle shaft 2. This relative axial motion of the wedge and tool 1 creates the expanding/retracting motion of the abrasive honing elements 6. The feed system housing 20 and the spindle  
30 shaft 2 are both connected to carriage of a honing

-17-

machine that strokes them together to generate the axial reciprocation of the honing process.

**[0040]** The axial force of the wedge to expand the honing elements is developed from the torque of the feed motor and converted to a linear force by the ball screw and nut and then transmitted through the load cell to the feed rod and wedge. The load cell therefore always senses the full axial feed force of the honing process. The load cell cable 31 is carried through a cable carrier to an amplifier 10 (if required). Power to and signals from the load cell run through this cable and amplifier to a processor based feed control and a servo controller of the feed drive, in connection with motor 14 and encoder 15. The control of these devices result in signals that precisely control the motion of the feed motor.

**[0041]** There are two basic methods of feed control. The first is feed rate control, where the control system keeps the feed motor moving at a constant rate or controlling the rate to some programmed profile that is at least partially a function of feed position. The second basic method of feed control is force control, where the control system keeps the feed motor moving in a manner such that the feed force is held constant or follows some programmed profile that is at least partially a function of feed position.

**[0042]** Computer control also allows for these two basic methods to be mixed within a honing cycle, e.g. honing at a controlled rate until some condition is met then honing at controlled force until the bore is at final size. Furthermore the computer control allows for a

-18-

high degree of flexibility in feed control programming. Parameters such as feed rate, feed force, spindle torque, time, number of reciprocation strokes, workpiece temperature, and others can be used in real-time control logic that adapts the controlled feed parameter or even changes the feed control method in a simple or complex programmed manner.

**[0043]** It will be understood that changes in the details, materials, steps, and arrangements of parts which have been described and illustrated to explain the nature of the invention will occur to and may be made by those skilled in the art upon a reading of this disclosure within the principles and scope of the invention. The foregoing description illustrates the preferred embodiment of the invention; however, concepts, as based upon the description, may be employed in other embodiments without departing from the scope of the invention. Accordingly, the following claims are intended to protect the invention broadly as well as in the specific form shown.

-19-

Claims

What is claimed is:

5           1. A method of determining a size of a bore of a  
workpiece honed using a honing tool assembled to a  
honing machine feed system capable of measuring feed  
forces exerted against the tool and feed system  
positions representative of feed positions of the tool,  
10 comprising steps of:

          expanding the tool within the bore of the  
workpiece, under static conditions, until a  
predetermined feed force is reached, and measuring the  
feed system position;

15           positioning the tool in a bore of known size and  
expanding the tool, under the static conditions, until  
the predetermined feed force is reached, and measuring  
the feed system position;

          determining a value representative of the size of  
20 the bore of the workpiece, as a function of the measured  
feed system position for the tool in the bore of known  
size, and the measured feed system position for the tool  
in the bore of the workpiece.

25           2. A method as claimed in claim 1, comprising a  
further step of utilizing the value representative of  
the size of the bore of the workpiece for statistical  
process control.

30           3. A method as claimed in claim 1, comprising  
steps prior to the honing of the bore of the workpiece,  
of:

-20-

determining a value representative of predicted stone wear for honing the bore of the workpiece;

determining a target feed system position for honing the bore of the workpiece to a target size, as a  
5 function of the target size and the value representative of predicted stone wear; and

honing the bore of the workpiece until the target feed system position is reached.

10 4. A method as claimed in claim 3, wherein the value representative of predicted stone wear is determined as a function of an amount of stock to be removed by the honing of the bore to the target feed system position.

15 5. A method as claimed in claim 4, wherein the value representative of predicted stone wear is determined at least in part, from measurements of stone wear for at least one previously honed workpiece.

20 6. A method as claimed in claim 1, wherein the steps of expanding the tool comprise expanding the tool at a predetermined rate.

25 7. A method as claimed in claim 1, comprising an additional step of determining a feed system compensation value as a function of the measured feed system position for the tool in the bore of known size, and the measured feed system position for the tool in  
30 the bore of the workpiece.

-21-

8. A method as claimed in claim 7, comprising a further step of determining a target feed system position as a function of the feed system compensation value and a value representative of predicted stone wear for a subsequent honing step.

9. A method as claimed in claim 7, comprising an additional step of using the feed system compensation value for determining a target feed system position for honing a bore of another workpiece.

10. A method as claimed in claim 1, wherein the bore of known size comprises a bore of a calibration ring or a sample workpiece.

11. A method of honing a bore of a workpiece using a honing tool assembled to a honing machine feed system capable of measuring feed forces exerted against the tool and feed system positions representative of feed positions of the tool, comprising steps of:

expanding the tool within the bore of the workpiece, under static conditions, until a predetermined feed force is reached, and measuring the feed system position;

determining a predicted feed system compensation value for tool wear for honing the bore to a target size, as a function of at least the measured feed system position, the target size, and a predetermined value for tool wear as a function of stock to be removed from the bore;

-22-

determining a target feed system position for honing the bore, as a function of the predicted value for tool wear and the target size; and

5 honing the bore until the target feed system position is reached.

12. A method as claimed in claim 11, where in the step of expanding the tool, the tool is expanded at a predetermined rate.

10

13. A method as claimed in claim 12, comprising further steps of:

retracting the tool in the honed bore, then expanding the tool therewithin, under the static conditions and at the predetermined rate, until the predetermined feed force is reached, and measuring the feed system position;

20 positioning the tool in a bore of known size and expanding the tool, under the static conditions and at the predetermined rate, until the predetermined feed force is reached, and measuring the feed system position; and

determining a feed system compensation value as a function of at least the measured feed system position for the tool in the bore of known size, and the measured feed system position for the tool in the honed bore.

25

14. A method as claimed in claim 11, wherein the predetermined value for tool wear is determined from a determination of tool wear from honing bores of at least two previous workpieces.

30

-23-

15 15. A method as claimed in claim 14, wherein the determination of tool wear is derived from measurements of final size of the bores of the previous workpieces, the target size, accumulated measurements of stock removal, and accumulated measurements of bore size compensations.

10 16. A method for automatically honing bores of a plurality of workpieces to a target size, using a honing tool assembled to a honing machine feed system capable of measuring feed forces exerted against the tool and feed system positions representative of feed positions of the tool, comprising steps of:

15 prior to honing the bores of at least some of the workpieces, respectively, expanding the tool within the bore of the workpiece in a predetermined manner, under static conditions, until a predetermined feed force is reached, and measuring the feed system position;

20 between the honing of at least some of the bores, positioning the tool in a bore of known size and expanding the tool in the predetermined manner, under the static conditions, until the predetermined feed force is reached, and measuring the feed system position; and

25 determining a target feed system position for honing each of the bores of the workpieces to the target size, respectively, as a function of the measured feed system positions and a predicted stone wear value.

30

-24-

17. A method as claimed in claim 16, wherein the predicted stone wear value is determined as a function of an amount of material to be removed from the bore by honing the bore.

.5

18. A method for automatically honing bores of a plurality of workpieces, respectively, using a sequence of honing tools including at least a first honing tool assembled to a first honing machine feed system capable of measuring feed forces exerted against the first tool and feed system positions representative of feed positions of the first tool, and then a second honing tool assembled to a second feed system capable of measuring feed forces exerted against the second tool and feed system positions representative of feed positions of the second tool, comprising steps of:

after honing the bores of at least one of the workpieces using the first tool, and prior to honing the bores of said at least one of the workpieces using the second tool, respectively, expanding the second tool within the bore of said at least one of the workpieces in a predetermined manner, respectively, under static conditions, until a predetermined feed force is reached, and measuring the feed system position of the second tool therein; and

determining a compensation value for the first feed system, as a function of the measured feed system position of the second tool and a predicted stone wear value.

30

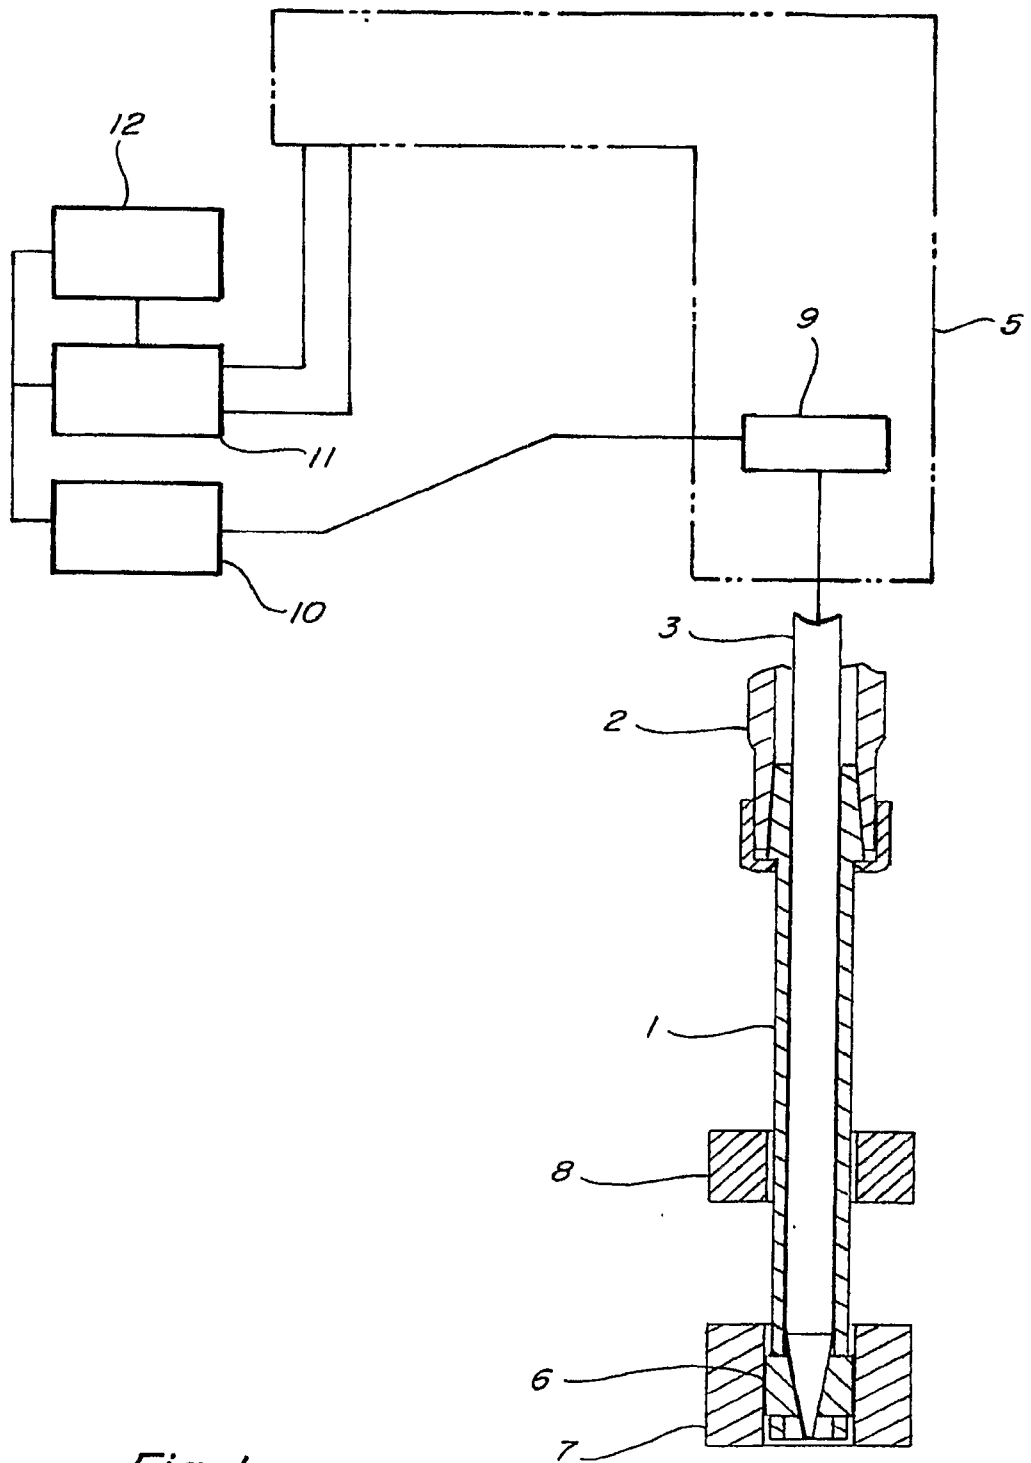


Fig. 1

2/5

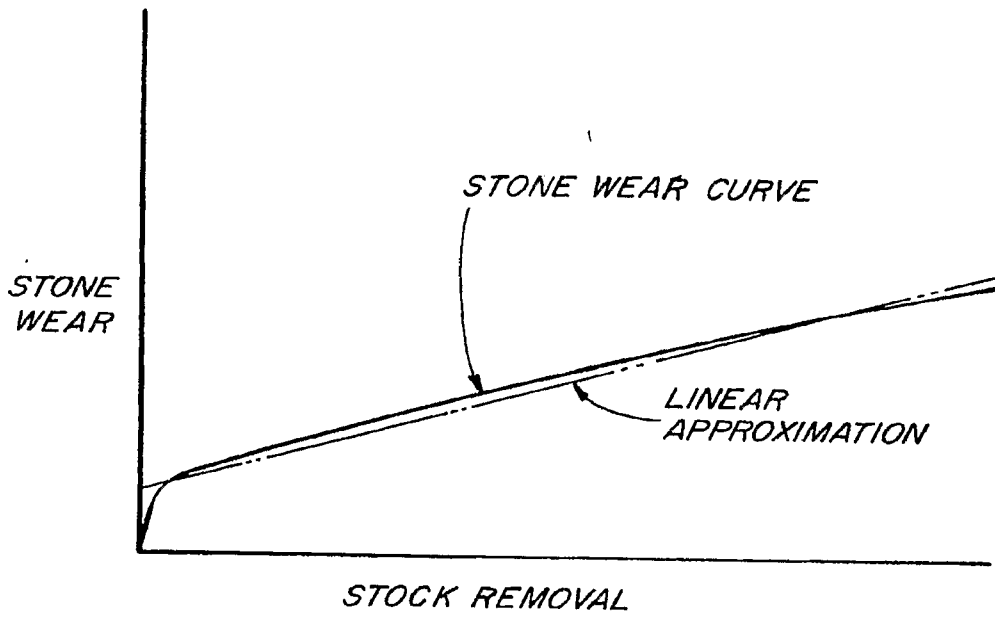


Fig. 2

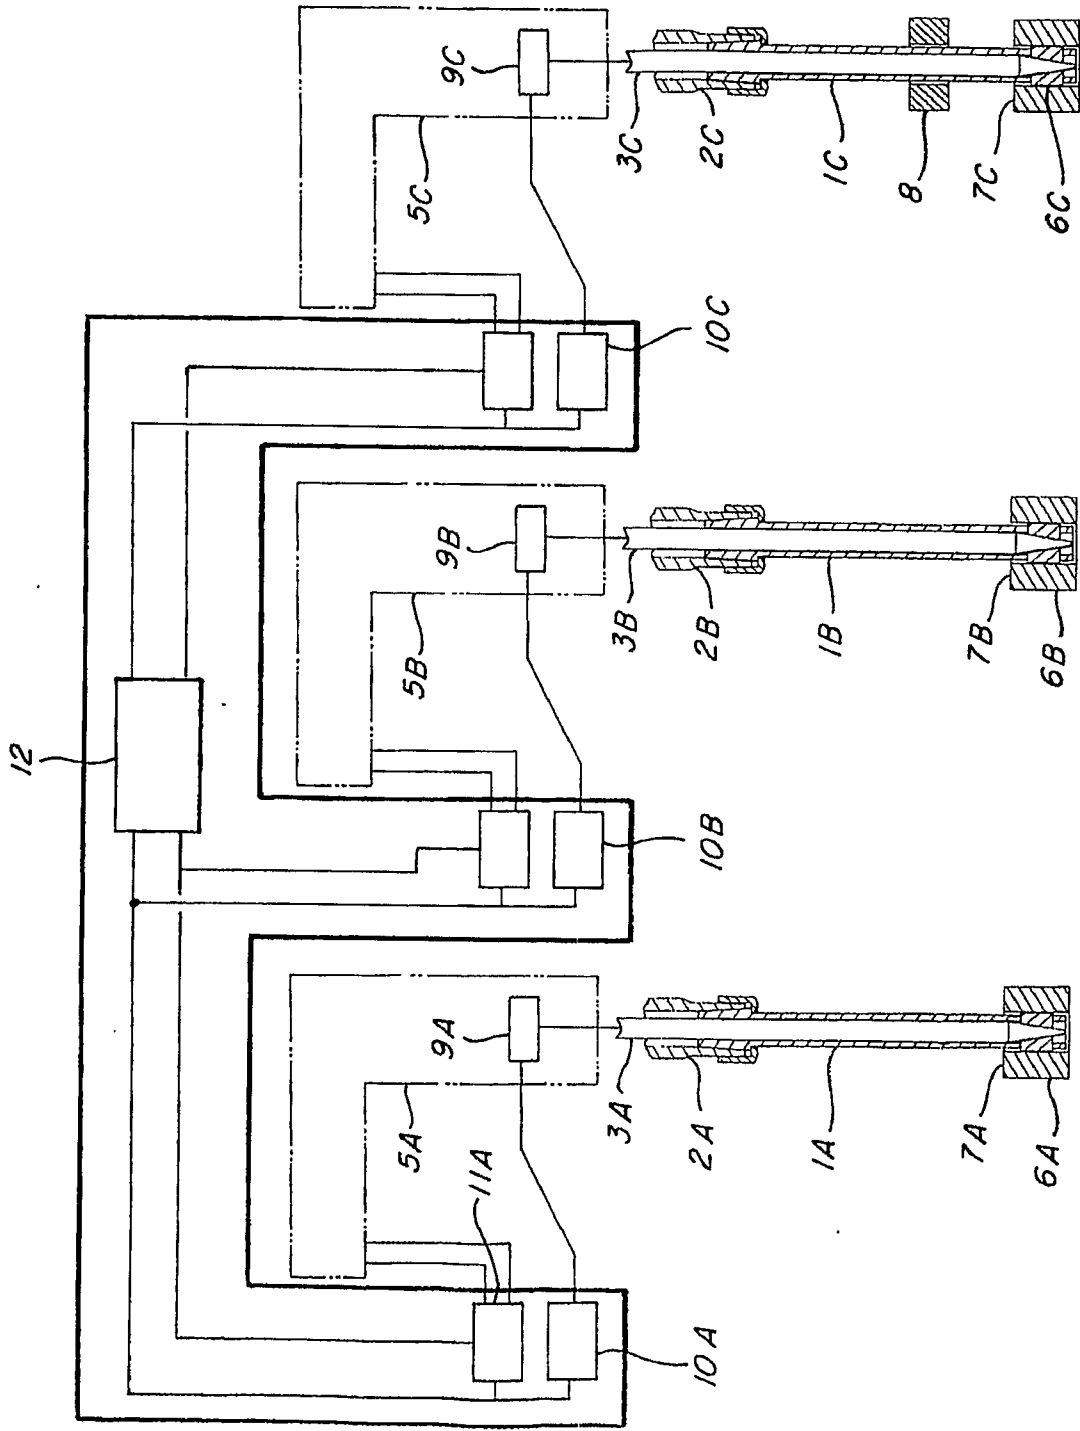


Fig. 3

4/5

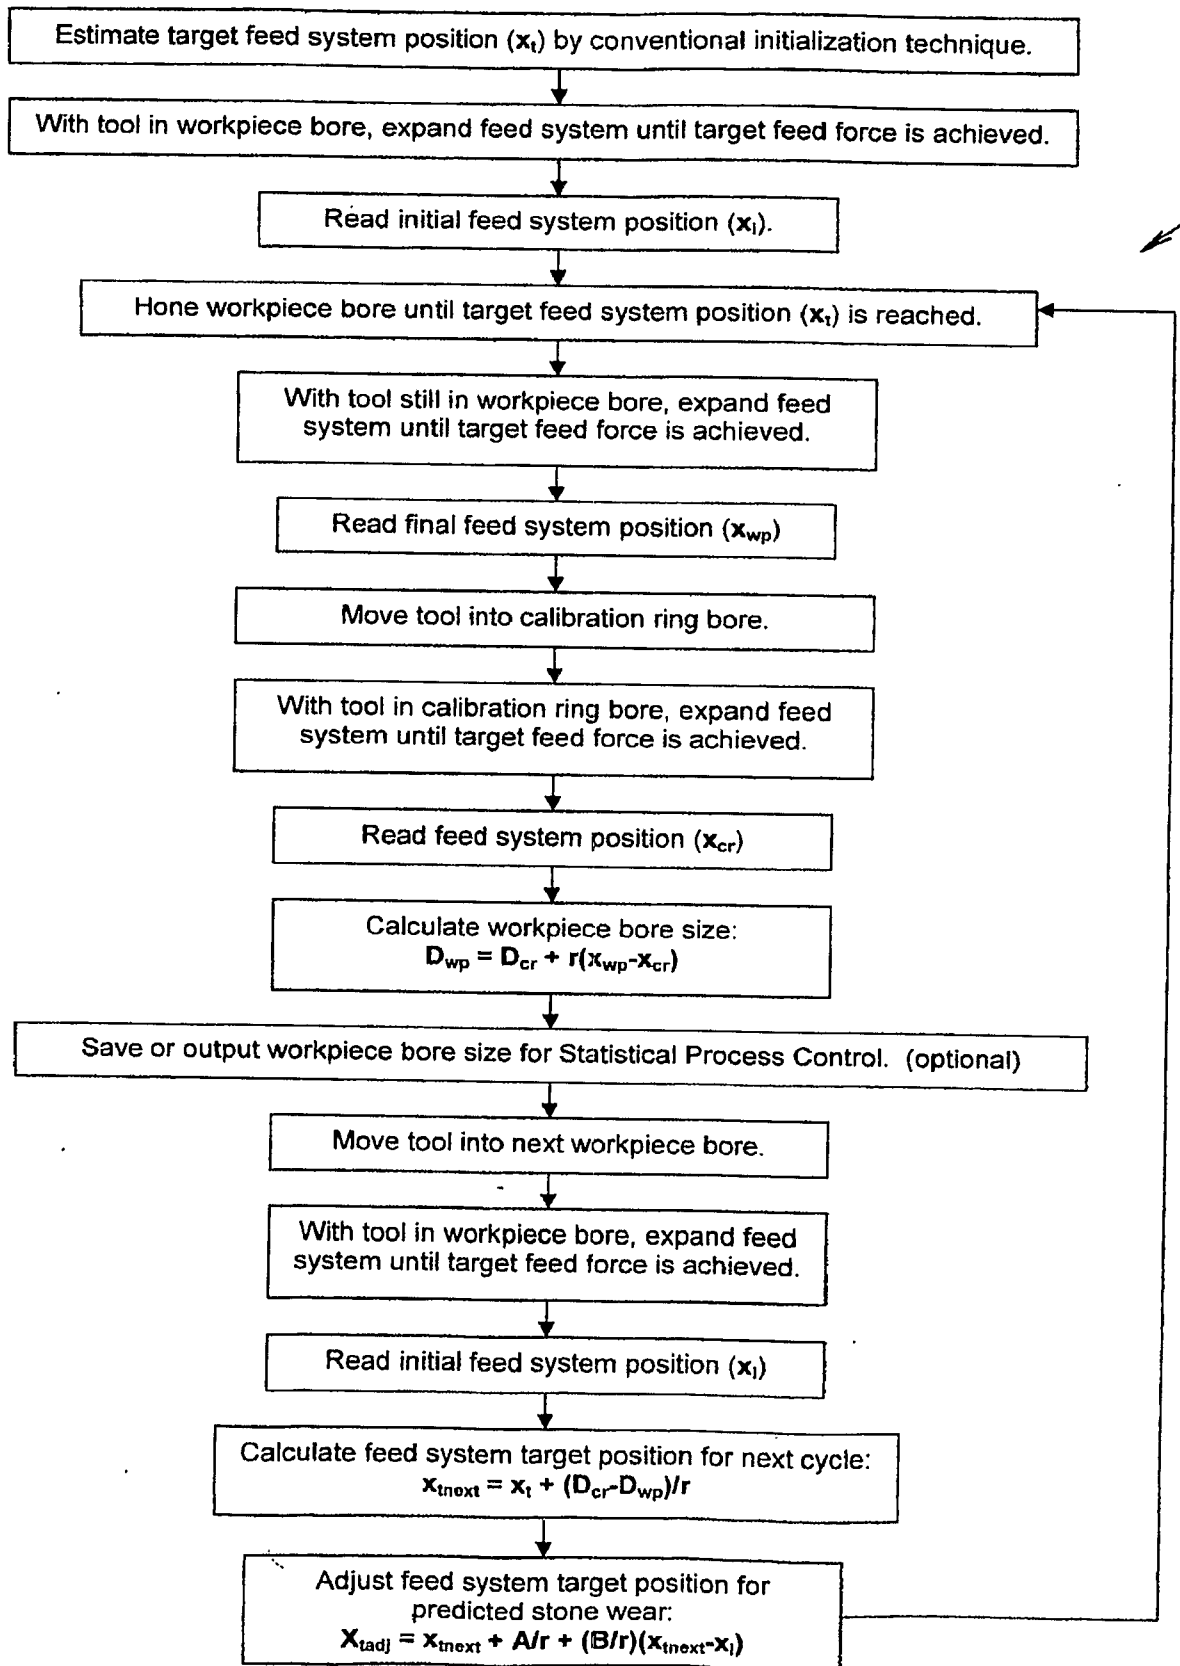


Fig. 4

5/5

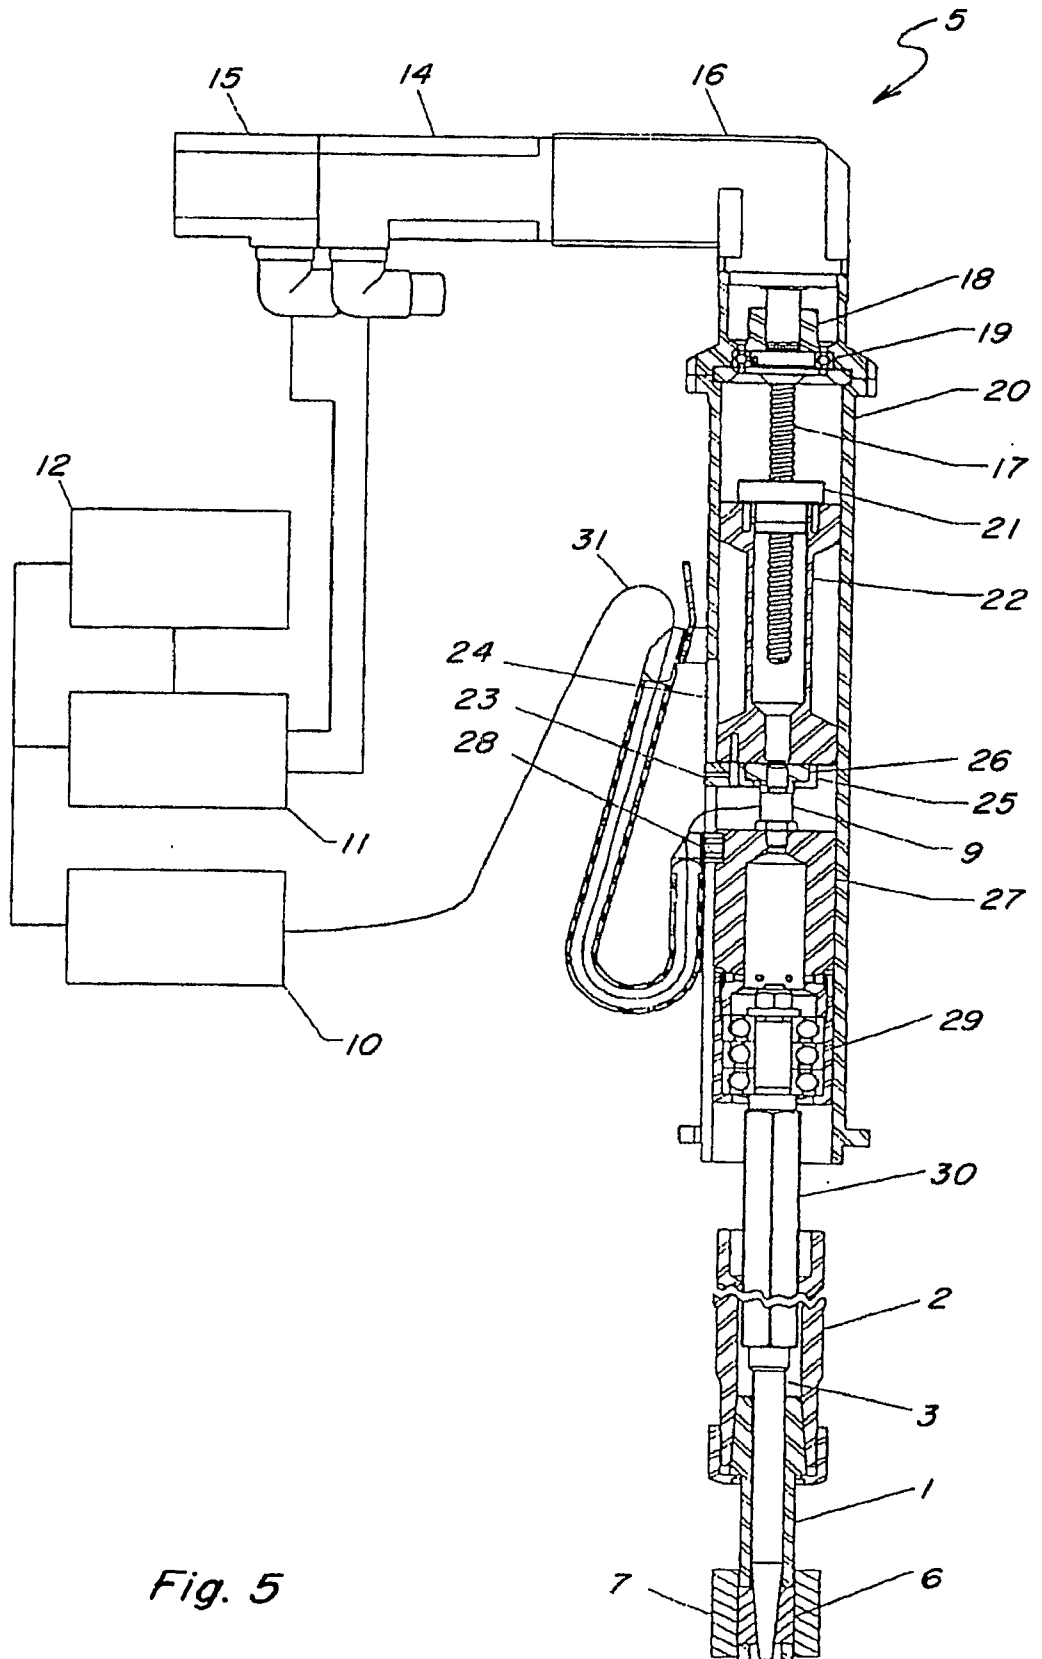


Fig. 5