



(22) Date de dépôt/Filing Date: 2000/04/10

(41) Mise à la disp. pub./Open to Public Insp.: 2001/03/08

(45) Date de délivrance/Issue Date: 2005/04/05

(30) Priorité/Priority: 1999/09/08 (09/392,043) US

(51) Cl.Int.⁷/Int.Cl.⁷ E21B 10/46


(72) Inventeurs/Inventors:
FIELDER, COY M., US;
SILVA, ROGERIO H., US

(73) Propriétaire/Owner:
DIAMOND PRODUCTS INTERNATIONAL, INC., US

(74) Agent: MACRAE & CO.

(54) Titre : TREPAN BI-CENTRE ADAPTE AU SABOT DE TUBAGE DE FORAGE

(54) Title: BI-CENTER BIT ADAPTED TO DRILL CASING SHOE

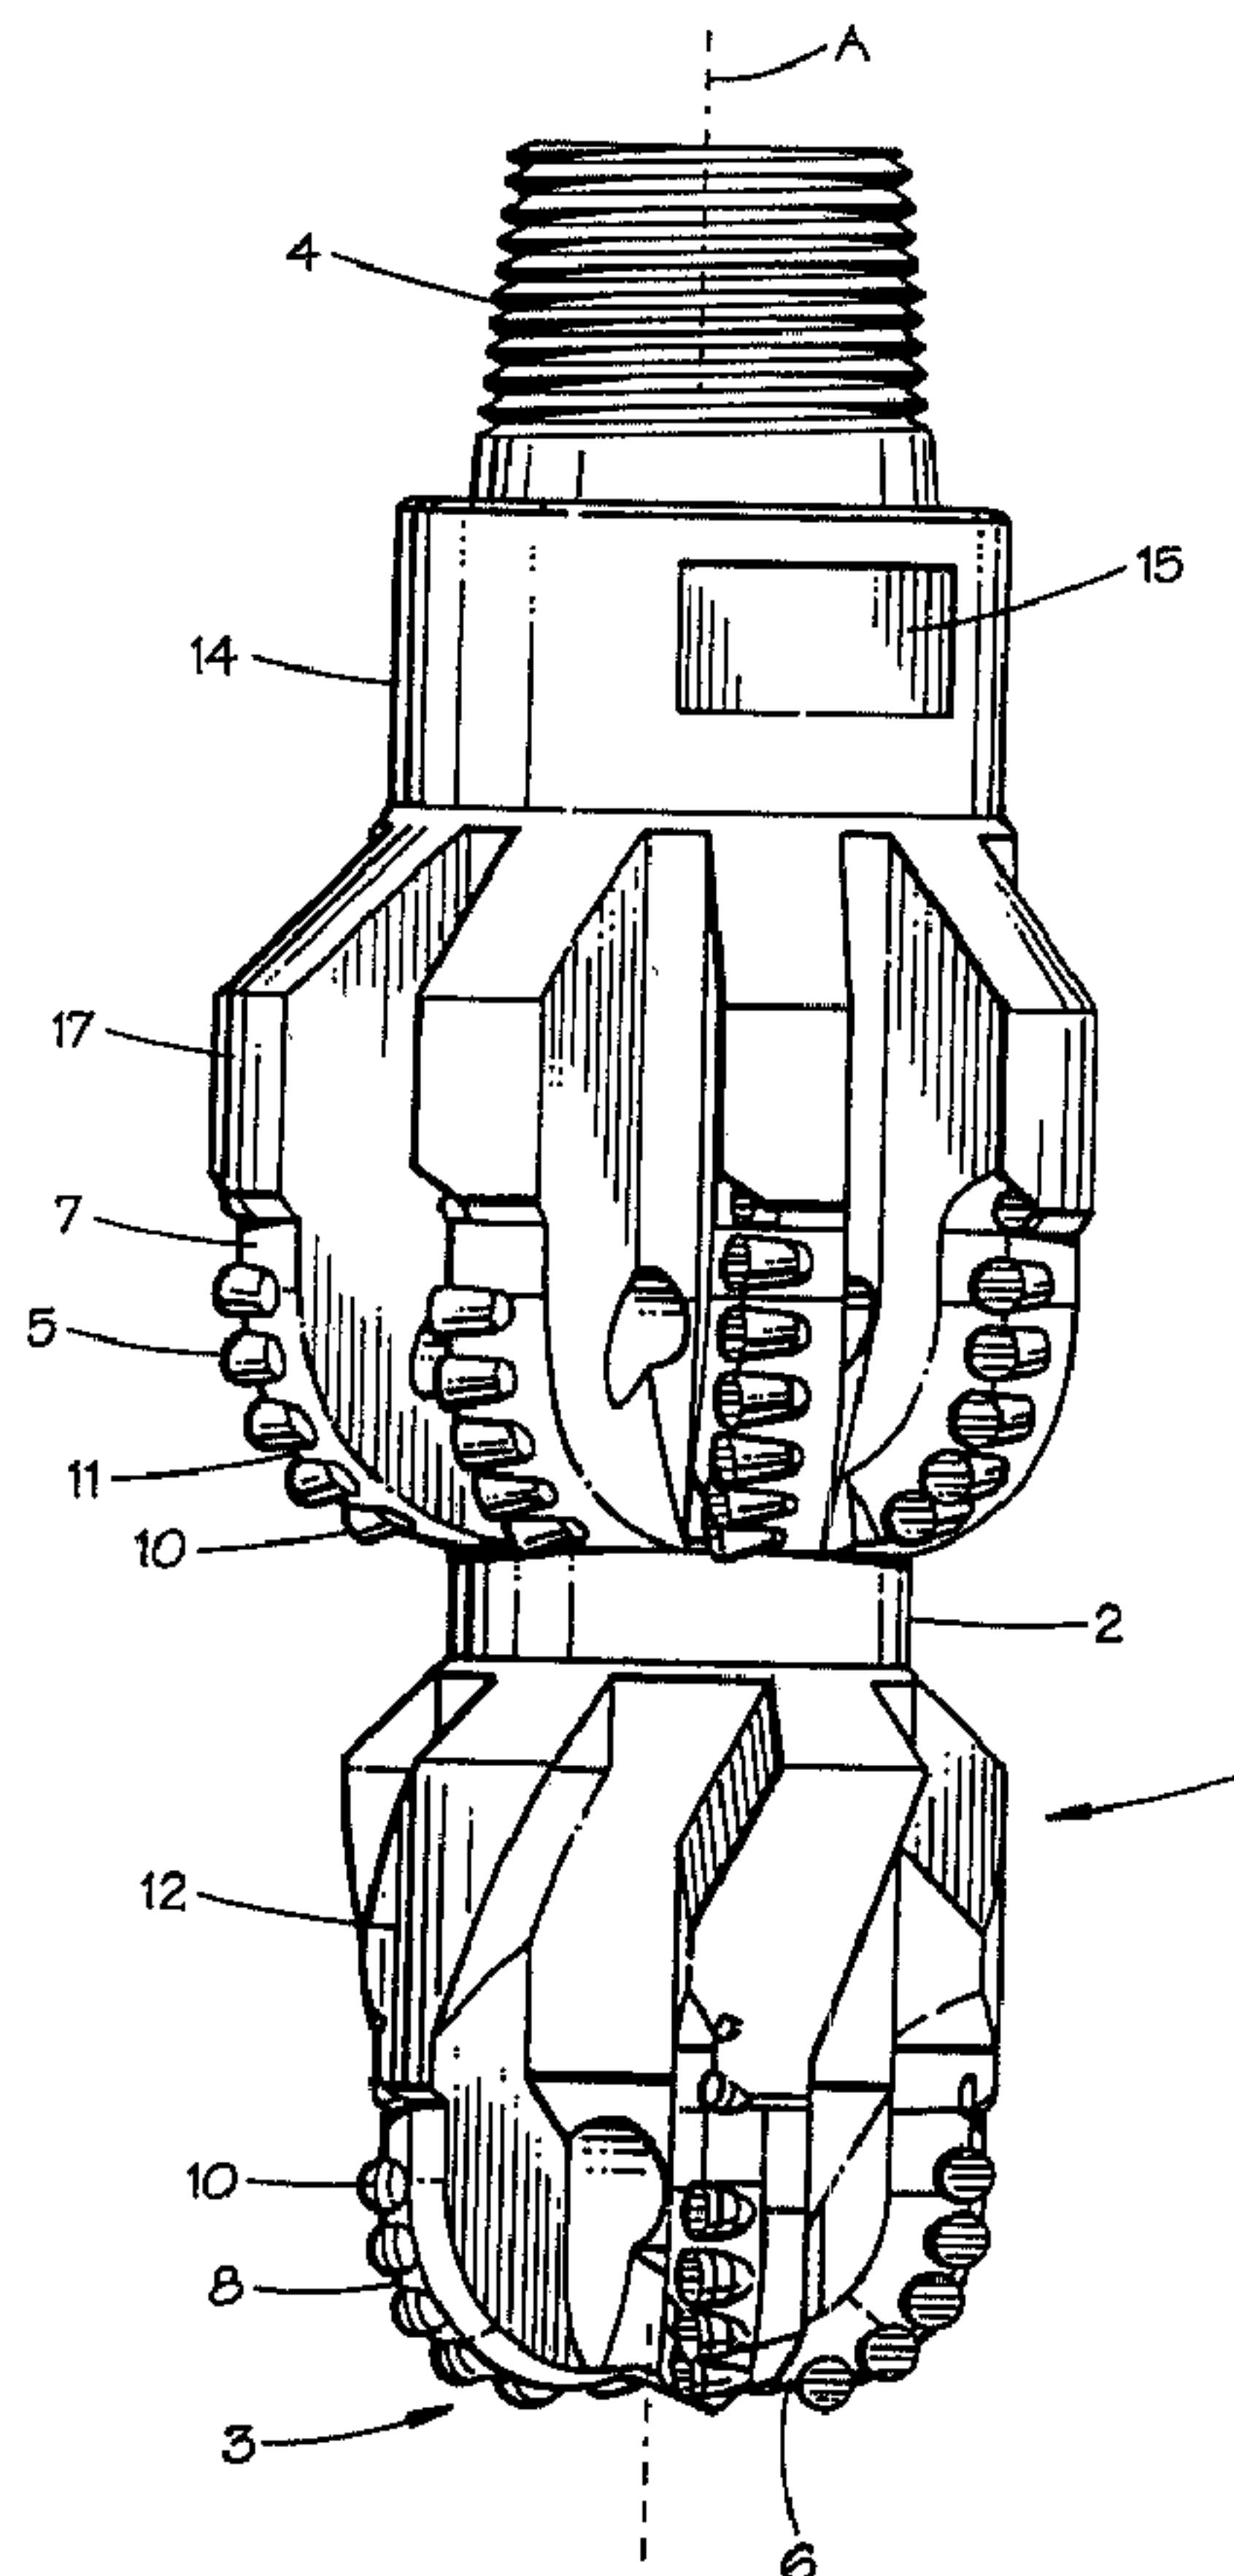

(57) Abrégé/Abstract:

Although particular detailed embodiments of the apparatus and method have been described herein, it should be understood that the invention is not restricted to the details of the preferred embodiment. Many changes in design, composition, configuration and dimensions are possible without departing from the spirit and scope of the instant invention.



ABSTRACT OF THE DISCLOSURE

Although particular detailed embodiments of the apparatus and method have been described herein, it should be understood that the invention is not restricted to the details of the preferred embodiment. Many changes in design, composition, configuration and dimensions are possible without departing from the spirit and scope of the instant invention.

BI-CENTER BIT ADAPTED TO DRILL CASING SHOE**BACKGROUND OF THE INVENTION**1. **Field of the Invention**

The present invention is directed to downhole tools. More specifically, the present invention is directed to a bi-center drilling bit adapted to fit within the drill through a casing shoe without damage to the surrounding casing.

2. **Background**

Bi-center bits are adapted for insertion down a wellbore having a given diameter where, once in position, the rotation of the bi-center bit creates a borehole having a selectedly greater diameter than the borehole.

In conventional bi-center bits, the bit is designed to rotate about a rotational axis which generally corresponds to the rotational axis defined by the drill string. Such conventional designs are further provided with cutting elements positioned about the face of the tool to reveal a low backrake angle so as to provide maximum cutting efficiency.

Disadvantages of such conventional bi-center bits lie in their inability to operate as a cutting tool within their pass-through diameter while still retaining the ability to function as a traditional bi-center bit. In such a fashion, a conventional bi-center bit which is operated within casing of its pass-through diameter will substantially damage, if not destroy the casing.

SUMMARY OF THE INVENTION

The present invention addresses the above and other disadvantages

of prior bi-center drilling bits by allowing selective modification of the use of the tool within the borehole.

In one embodiment, the present invention includes a drill bit body which defines a pilot section, a reamer section and a geometric axis. The pilot section defines a typical cutting surface about which is disposed a plurality of cutting elements. These elements are situated about the cutting face to generally define a second rotational axis separate from the rotational axis defined by the drill string as a whole. This second or pass-through axis is formed by the rotation of the bit about the pass-through diameter.

In one embodiment, the pilot section may define a smaller diametrical cross-section so as to further prevent the possibility of damage to the borehole and/or casing when the bit is rotated about the pass-through axis. To further accomplish this goal, a gauge pad may also be situated on the drill bit body opposite the

reamer. In yet other embodiments, cutters emphasizing a high back rake angle are employed on the peripheral cutting blades of the tool.

The present invention presents a number of advantages over prior art bi-center bits. One such advantage is the ability of the bi-center bit to operate within a borehole or casing approximating its pass-through diameter without damaging the borehole or casing. In the instance of use in casing, the casing shoe may thus be drilled through.

A second advantage is the ability of the same tool to be used as a conventional bi-center bit to create a borehole having a diameter greater than its pass-through diameter. In such a fashion, considerable cost savings may be observed since only one tool need be used where this tool need not be retrieved to the surface to modify its character of use.

Other advantages of the invention will become obvious to those skilled in the art in light of the figures and the detailed description of the preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side view of a conventional bi-center drill bit; Figure 2 is an end view of the working face of the bi-center drill bit illustrated in Figure 1;

Figures 3A-C are end views of a bi-center bit as positioned in a borehole illustrating the pilot bit diameter, the drill hole diameter and pass through diameter, respectively;

Figures 4A-B illustrate a conventional side view of a bi-center bit as it may be situated in casing and in operation, respectively;

Figure 5 is an end view of a conventional bi-center bit;

Figure 6 illustrates a cutting structure brazed in place within a pocket milled into a rib of a conventional bi-center drill bit;

Figure 7 illustrates a schematic outline view of an exemplary bi-center bit of the prior art;

Figure 8 illustrates a revolved section of a conventional pilot section cutter coverage as drawn about the geometric axis;

Figure 9 illustrates a revolved section of a conventional pilot section cutter coverage as drawn about the pass-through axis;

Figure 10 illustrates a side view of one embodiment of the bi-center bit of the present invention;

Figure 11 illustrates an end view of the bi-center bit illustrated in Figure 10;

Figure 12 illustrates a revolved section of the pilot section of the bi-center bit illustrated in Figure 10, as drawn through the pass-through axis;

Figure 13 illustrates a revolved section of the pilot section of the bi-center bit illustrated in Figure 10,

as drawn through the geometric axis;

Figure 14 illustrates a graphic profile of the cutters positioned on the reamer section of the embodiment illustrated in Figure 10.

Figure 15 illustrates a schematic view of the orientation of cutters in one preferred embodiment of the invention.

While the present invention will be described in connection with presently preferred embodiments, it will be understood that it is not intended to limit the invention to those embodiments. On the contrary, it is intended to cover all alternatives, modifications, and equivalents included within the spirit of the invention and as defined in the appended claims.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figures 1-9 generally illustrate a conventional bi-center bit and its method of operating in the borehole.

By reference to these figures, bit body 2, manufactured from steel or other hard metal, includes a threaded pin 4 at one end for connection in the drill string, and a pilot bit 3 defining an operating end face 6 at its opposite end. A reamer section 5 is integrally formed with the body 2 between the pin 4 and the pilot bit 3 and defines a second operating end face 7, as illustrated. The term "operating end face" as used herein includes not only the axial end or axially facing portion shown in Figure 2, but also contiguous areas extending up along the lower sides of the bit 1 and reamer 5. The operating end face 6 of bit 3 is traversed by a number of upsets in the form of ribs or blades 8 radiating from the lower central area of the bit 3 and extending across the underside and up along the lower side surfaces of said bit 3. Ribs 8 carry cutting members 10, as more fully described below. Just above the upper ends of rib 8, bit 3 defines a gauge or stabilizer section, including stabilizer ribs or gauge pads 12, each of which is continuous with a respective one of the cutter carrying rib 8. Ribs 8 contact the walls of the borehole that has been drilled by operating end face 6 to centralize and stabilize the tool 1 and to help control its vibration. (See Figure 4).

The pass-through diameter of the bi-center is defined by the three points where the cutting blades are at gauge. These three points are illustrated at Figure 2 are designated "x", "y" and "z". Reamer section 5 includes two or more blades 11 which are eccentrically positioned above the pilot bit 3 in a manner best illustrated in Figure 2. Blades 11 also carry cutting elements 10 as described below. Blades 11 radiate from the tool axis but are only positioned about a selected portion or quadrant of the tool when viewed in end cross section. In such a fashion, the tool 1 may be tripped into a hole having a diameter marginally greater than the maximum diameter drawn through the reamer section 5, yet be able to cut a drill hole of substantially greater diameter than the pass-through diameter when the tool 1 is rotated about the geometric or rotational axis "A".

The axis defined by the pass-through diameter is identified at "B". (See Figures 4A-B.)

In the conventional embodiment illustrated in Figure 1, cutting elements 10 are positioned about the operating end face 7 of the reamer section 5. Just above the upper ends of rib 11, reamer section 5 defines a gauge or stabilizer section, including stabilizer ribs or kickers 17, each of which is continuous with a
 5 respective one of the cutter carrying rib 11. Ribs 11 contact the walls of the borehole that has been drilled by operating end face 7 to further centralize and stabilize the tool 1 and to help control its vibration.

Intermediate stabilizer section defined by ribs 11 and pin 4 is a shank 14 having wrench flats 15 that may be engaged to make up and break out the tool 1 from the drill string (not illustrated). By reference again to Figure 2, the underside of the bit body 2 has a number of circulation ports or nozzles 15 located near its
 10 centerline. Nozzles 15 communicate with the inset areas between ribs 8 and 11, which areas serve as fluid flow spaces in use. With reference now to Figures 1 and 2, bit body 2 is intended to be rotated in the clockwise direction, when viewed downwardly, about axis "A". Thus, each of the ribs 8 and 11 has a leading edge surface 8A and 11A and a trailing edge surface 8B and 11B, respectively. As shown in Figure 6, each of the cutting members 10 is preferably comprised of a mounting body 20 comprised of sintered tungsten carbide
 15 or some other suitable material, and a layer 22 of polycrystalline diamond carried on the leading face of stud 38 and defining the cutting face 30A of the cutting member. The cutting members 10 are mounted in the respective ribs 8 and 11 so that their cutting faces are exposed through the leading edge surfaces 8A and 11, respectively.

In the conventional bi-center bit illustrated in Figures 1-9, cutting members 10 are mounted so as to
 20 position the cutter face 30A at an aggressive, low angle, e.g., 15-20° backrake, with respect to the formation. This is especially true of the cutting members 10 positioned at the leading edges of bit body 2. Ribs 8 and 11 are themselves preferably comprised of steel or some other hard metal. The tungsten carbide cutter body 38 is preferably brazed into a pocket 32 and includes within the pocket the excess braze material 29.

As illustrated in profile in Figure 7, the conventional bi-center bit normally includes a pilot section
 25 3 which defines an outside diameter at least equal to the diameter of bit body 2. In such a fashion, cutters on pilot section 3 may cut to gauge. The cutter coverage of a conventional bi-center bit may be viewed by reference to a section rotated about a given axis. Figure 8 illustrates the cutter coverage for the pilot bit illustrated in Figures 1-2. The revolved section identifies moderate to extreme coverage overlap of the cutters, with the maximum overlap occurring at the crown or bottommost extent of pilot section 3 when said pilot
 30 section 3 is rotated about geometric axis "A". The cutter coverage illustrated in Figure 8 should be compared with the absence of cutter coverage occurring when pilot section 3 is rotated about the pass-through axis "B" (See Fig. 9.). Clearly, the bi-center bit illustrated in Figure 9 would be inefficient if used in hard or resilient formations such as a casing shoe.

When a conventional bi-center bit is rotated about its rotational axis "A" the bit performs in the manner earlier described to create a borehole having a diameter larger than its pass-through diameter. (See Figs. 4A-4B.). This result is not desirable when the bit is used in casing to drill through a casing shoe since, while the shoe might be removed, the casing above the shoe would also be damaged. Consequently, it has become accepted practice to drill through a casing shoe using a conventional drill bit which is thereafter retrieved to the surface. A bi-center bit is then run below the casing to enlarge the borehole. However, the

5
aforedescribed procedure is costly, especially in deep wells when many thousand feet of drill pipe may need be tripped out of the well to replace the conventional drilling bit with the bi-center bit. The bi-center bit of the present invention addresses this issue.

10 One embodiment of the bi-center bit of the present invention may be seen by reference to Figures 10-15. Figure 10 illustrates a side view of a preferred embodiment of the bi-center bit of the present invention. By reference to the figures, the bit 100 comprises a bit body 102 which includes a threaded pin at one end 104 for connection to a drill string and a pilot bit 103 defining an operating end face 106 at its opposite end. For reasons discussed below, end face 106 defines a flattened profile. A reamer section 105 is integrally

15 formed with body 102 between the pin 104 and pilot bit 103 and defines a second operating end face 107. The operating end face 106 of pilot 103 is traversed by a number of upsets in the form of ribs and blades 108 radiating from the central area of bit 103. As in the conventional embodiment, ribs 108 carry a plurality of cutting members 110. The reamer section 105 is also provided with a number of blades or upsets 152, which upsets are also provided with a plurality of cutting elements 110 which themselves define cutting faces 130A.

20 The embodiment illustrated in Figure 10 is provided with a pilot section 103 defining a smaller cross-section of diameter than the conventional embodiment illustrated in Figures 1-8. The use of a lesser diameter for pilot section 103 serves to minimize the opportunity for damage to the borehole or casing when the tool 100 is rotated about the pass-through axis "B".

In a conventional bit, cutters 110 which extend to gauge generally include a low backrake angle for

25 maximum efficiency in cutting. (See Figure 11.). In the bi-center bit of the present invention, it is desirable to utilize cutting elements which define a less aggressive cutter posture where they extend to gauge when rotating about the pass-through axis. In this connection, it is desirable that cutters 110 at the pass-through gauge and positioned on the leading and trailing blades 118 define a backrake angle of between 30-90 degrees with the formation. Applicant has discovered that a preferred backrake angle for soft to medium formations

30 is 55 degrees. The orientation of cutting elements 100 to define such high backrake angles further reduces the potential for damage to casing 136 when the tool 110 is rotated about the pass-through axis "B".

In a preferred embodiment, bit 100 may be provided with a stabilizer pad 160 opposite reamer section 105. Pad 160 may be secured to bit body 102 in a conventional fashion, *e.g.*, welding, or may be formed integrally. Pad 160 serves to define the outer diametrical extent of tool 100 opposite pilot 103. (See Figure

35 10.) It is desirable that the uppermost extent 161 of pad 160 not extend beyond the top of cutters 121 on

reamer blades 152. When rotated in the casing, the tool 100 is compelled to rotate about pass-through axis "B" due to the physical constraints of casing 136. Casing 136 is not cut since contact with tool 100 is about the three points defined by leading edges 118 and stabilizer pad 160. As set forth above, edges 118 include cutting elements having a high backrake angle not suited to cut casing 136. Likewise, pad 160 is not adapted to cut casing 136. The cutters disposed elsewhere about operating face 107 incorporate a backrake angle of 15°-30° and thus are able to cut through the casing shoe. When the casing shoe has been cut, the tool 100 is able to rotate free of the physical restraints imposed by casing 136. In such an environment, the tool reverts to rotation about axis "A".

The method by which the bi-center bit of the present invention may be constructed may be described as follows. In an exemplary bi-center bit, a cutter profile is established for the pilot bit. Such a profile is illustrated, for example, in Figure 8 as drawn through the geometrical axis of the tool. The pass-through axis is then determined from the size and shape of the tool.

Once the pass-through diameter is determined, a cutter profile of the tool is made about the pass-through axis. This profile will identify any necessary movement of cutters 110 to cover any open, uncovered regions on the cutter profile. These cutters 110 may be situated along the primary upset 131 or upsets 132 radially disposed about geometric axis "A".

Once positioning of the cutters 110 has been determined, the position of the upsets themselves must be established. In the example where it has been determined that a cutter 110 must be positioned at a selected distance r_1 from pass-through axis "B" an arc 49 is drawn through r_1 in the manner illustrated in Figure 15. The intersection of this arc 49 and a line drawn through axis "A" determines the possible positions of cutter 110 on radially disposed upsets 151.

To create a workable cutter profile for a bi-center bit which includes a highly tapered or contoured bit face introduces complexity into the placement of said cutters 110 since issues of both placement and cutter height must be addressed. As a result, it has been found preferable to utilize a bit face which is substantially flattened in cross section. (See Figure 10.) Once positioning of the upsets has been determined, the cutters 110 must be oriented in a fashion to optimize their use when tool 100 is rotated about both the pass-through axis "B" and geometric axis "A". By reference to Figures 11 and 15, cutters 110 positioned for use in a conventional bi-center bit will be oriented with their cutting surfaces oriented toward the surface to the cut, *e.g.*, the formation. In a conventional bi-center bit, however, cutters 110 so oriented on the primary upset 131 in the area 140 between axes "A" and "B" will actually be oriented 180° to the direction of cut when tool 100 is rotated about pass-through axis "B". To address this issue, it is preferable that at least most of cutters 110 situated on primary upset 131 about area 140 be oppositely oriented such that their cutting faces 130A are brought into contact with the formation or the casing shoe, as the case may be, when tool 100 is rotated about axis "B". This opposite orientation of cutter 110 is in deference to the resilient compounds often comprising the casing shoe.

Cutters 110 disposed along primary upset 131 outside of region 140 in region 141 are oriented such that their cutting faces 130A are brought into at least partial contact with the formation regardless when rotated about axis "A". Cutters 110 oppositely disposed about primary upset 131 in region 142 are oriented in a conventional fashion. (See Figure 15.)

5 Cutters 110 not situated on primary upset 131 oriented are disposed on radial upsets 132. These cutters 110, while their positioning may be dictated by the necessity for cutter coverage when tool 100 is rotated about axes "A" and "B" as described above, are oriented on their respective upsets 132 or are skewed to such an angle such that at least twenty percent of the active cutter face 130 engages the formation when the bi-center bit is rotated about axis "A". Restated as a function of direction of cut, the skew angle of cutters 110
10 is from 0°-80°.

WHAT IS CLAIMED IS:

1. A bi-center bit adapted to be consecutively used in casing and in formation without the need of removing the bit from the borehole, said bit comprising:

5 a bit body defining a proximal end adapted for connection to a drill string, a distal end and a pass-through gauge, where the distal end defines a pilot bit and an intermediate reamer section, where each the pilot and reamer section define a cutting face; and

10 a plurality of cutting or wear elements situated on cutting blades disposed about the cutting face of the pilot and reamer sections, where the cutting or wear elements disposed on one or more of the blades which extend to or are proximate to the pass-through gauge define an angle between the line of contact on the cutting or wear element and the material to be drilled of between 5-45°, and where further said cutting elements define a backrake angle and a skew angle.

15 2. The bi-center bit of claim 1 further including one or more stabilizing elements disposed opposite said reamer section such that the proximal most portions of said stabilizing elements do not extend beyond the most proximally disposed cutting elements on said reamer section.

20 3. The bi-center bit of claim 2 where the stabilizing elements comprise a gauge pad.

4. The bi-center bit of claim 1 where the backrake angle is between 45-85°.

5. The bi-center bit of claim 2 where the stabilizing elements extend to the pass-through gauge.

6. The bi-center bit of claim 1 where the body is adapted to rotate about one axis when operated in casing and a second, independent axis when operated free of casing.

7. The bi-center bit of claim 1 where the bit body is manufactured from steel.

8. The bi-center bit of claim 1 further defining a rotational axis "A" and a pass-through axis "B" where the cutting face of most of the cutting elements disposed on cutting blades situated between the rotational axis "A" and the pass-through axis "B" are oriented such that such elements are brought into at least partial contact with the material to be drilled when the bit is rotated about said axis "B".

9. The bi-center bit of claim 1 where the cutting blades on the pilot and reamer sections include a primary and one or more secondary cutting blades, where both the rotational and pass-through axes are disposed about the primary cutting blade;

where each cutting element defines a cutting face; and

where the cutting faces of most cutting elements disposed along the primary cutting blade not between the rotational axis "A" and pass-through axis "B" but between the pass-through axis and pass-through gauge are brought into at least partial contact with the material to be drilled when said bit is rotated about axis "B".

10. The bi-center bit of claim 9 including cutting elements positioned on the secondary cutting blades such that at least a portion of the cutting face of most elements engages the material to be drilled when the bit is rotated about axis "A".

11. The bi-center bit of claim 9 where the skew angle of said cutting elements positioned on the secondary blades is between 0-80°.

12. The bi-center bit of claim 1 where cutting elements disposed on cutting blades comprising the reamer section, other than those cutting elements disposed on cutting blades which extend to the pass-through gauge, define an angle formed between the line of contact on the cutting element and the material to be drilled of between 50-80°.

13. The bi-center bit of claim 1 where the bit body includes tungsten carbide matrix.

14. The bi-center bit of claim 6 where the cutting elements disposed about the pilot and reamer sections demonstrate substantially complete cutter overlap when the bit is rotated about either axis.

15. A method to fabricate a bi-center bit adapted to rotate about a rotational axis "A" or a pass-through axis "B" where the bi-center bit comprises a bit body having a proximal and a distal end where the distal end defines a pilot bit and an intermediate reamer section, where each the pilot and reamer sections define a bit face including primary and secondary cutting blades and cutting elements disposed on said blades where each cutting element defines a cutting face, the method comprising the steps of:

fabricating a cutter profile for the bit about the rotational axis "A";

identifying the pass-through axis "B" of the bit;

fabricating a cutter profile for the bit about the pass-through axis "B"; and

situating cutting elements on the bit face of the pilot and reamer sections such that at least a portion of a cutting element is disposed about substantially all portions of said profiles when the bit is rotated about the rotational and pass-through axes.

16. The method of claim 15 further including the step of positioning the cutting blades so that the rotational and pass-through axes fall along a primary cutting blade.

17. The method of claim 15 further including the step of positioning cutting elements on the primary cutting blade between the rotational axis "A" and pass-through axis "B" such that substantially all of the cutting faces of said elements are brought into at least partial contact with the material to be drilled when the bit is rotated about said axis "B".

18. The method of claim 15 further including the step of positioning cutting elements on the primary cutting blade opposite said rotational axis "A" and between said pass-through axis "B" and gauge such that the cutting faces of substantially all such elements are brought into at least partial contact with the material to be drilled when said bit is rotated about axis "A".

19. The method of claim 15 where the skew angle of cutting elements of the secondary cutting blades is between 0-80°.

20. The method of claim 15 where the reamer section defines at least one cutting blade which extends to the pass-through gauge and including the additional step of positioning cutting elements along said cutting blade such that cutting elements proximate to the pass-through gauge at their line of contact with the material to be drilled define an angle of attack of between 5-45°.

21. A two stage drilling tool comprising:

a bit body defining a proximal end adapted for connection to a drill string and a distal end where said distal end terminates in a primary bit face and a secondary bit face spaced proximally from said primary bit face where said primary bit face includes a primary upset and secondary upsets and where one or more cutting elements are disposed about said upsets;

said tool defining a rotational axis "A" and a pass-through axis "B"; where cutting elements disposed along said primary upset between said axis "A" and axis "B" define cutting faces where most of said cutter faces are brought into at least partial contact with the material to be drilled when said tool is rotated about said pass-through axis "B".

22. The drilling tool of claim 21 where both of said axes "A" and "B" are disposed along the primary upset.

23. The tool of claim 21 where the cutting faces of most of the cutting elements disposed about the primary upset not between the rotational axis "A" and pass-through axis "B" but between said pass-through axis "B" and gauge are brought into at least partial contact with the material to be drilled when said bit is rotated about either axis "A" or "B".

5

24. The tool of claim 21 further including the step of positioning the cutting elements on said secondary upsets such that they define a skew angle between 0-80°.

25. A bi-center bit comprising:

10

a bit body defining a proximal end for connection to a drill string and a distal end, where the distal end defines a pilot bit and an intermediate reamer section, where each said pilot and reamer sections each define a bit face;

the bit face on said pilot being comprised of a primary upset and one or more secondary upsets;

15

the bit body defining a rotational axis "A" and a pass-through axis "B"; and cutting elements disposed about said primary and secondary upsets where each of said cutting elements defines a cutting face, where most of the cutting elements disposed along the primary or secondary upsets between said rotational axis "A" and pass-through axis "B" are brought into contact with the material to be drilled when the bit is rotated about either the pass-through axis "B" or the rotational axis "A".

20

26. The bi-center bit of claim 25 where most of the cutting elements disposed along said primary upset not between said axis "A" and "B" but between axis "B" and the pass-through gauge are brought into at least partial contact with the formation when the bit is rotated about the rotational axis "B".

25

27. The bi-center bit of claim 26 where said reamer section defines leading and trailing upsets such that cutting elements positioned about said leading and trailing upsets and extending or proximate to the pass-through gauge define an effective backrake angle of between 45-85° where the effective backrake angle is equal to 180° minus the angle of contact between the cutter face and the material to be drilled and the angle of inclination of the contact surface of the cutting element.

30

28. The bi-center bit of claim 26 further including one or more stabilizer elements disposed opposite said reamer section where the proximal most portion of said elements does not extend beyond the proximal most cutting element on said reamer section.

35

29. A bit adapted to rotate about two or more rotational axes where such bit defines a pass-through gauge, said bit comprising:

a bit body defining a proximal end adapted for connection to a drill string and a distal end, where the distal end defines a pilot bit and an intermediate reamer section, where each the pilot and reamer section define a cutting face;

the bit body defining a rotational axis "A" and a pass-through axis "B"; and a plurality of cutting elements situated on cutting blades disposed about the cutting face of the pilot and reamer sections, such that there is substantially complete cutter overlap when said bit is rotated about the rotational or pass-through axis.

30. The bit of claim 29 where the cutting elements disposed proximate the pass-through gauge define a high effective backrake angle.

31. A method to fabricate a bit which defines at least two axes of rotation, where the bit includes a bit body defining a proximal end adapted to be coupled to the drill string, a distal end, a pilot section and a reamer section, where both said pilot and reamer sections include one or more cutting blades, the method comprising:

defining a rotational axis and a pass-through axis of the bit; and

positioning cutting elements on the cutting blades of the pilot and reamer sections such as to create substantially complete cutter overlap when the bit is rotated about either the rotational and pass-through axis.

32. The method of claim 31 further including the step of positioning one or more stabilizing elements opposite said reamer section such that the proximal most portion of said stabilizing elements do not extend beyond the most proximal cutting elements disposed on said reamer section.

33. The method of claim 31 where said stabilizing element includes a gauge pad.

34. The method of claim 31 further including the step of orienting the cutting elements which each define a cutting face such that the cutting face of most of said elements on cutting blades situated between the rotational and pass-through axes are oriented such that they are brought into contact with the material to be drilled when the bit is rotated about the pass-through axis.

35. The method of claim 31 further including the step of orienting the cutting elements which each define a cutting face such that the cutting face of most of said elements on cutting blades situated between the rotational and pass-through axes are oriented such that they are brought into contact with the material to be drilled when the bit is rotated about the rotational axis.

36. The method of claim 31 further including the step of orienting the cutting elements which each define a cutting face such that the cutting face of most of said elements on cutting blades situated between the

rotational and pass-through axes are oriented such that they are brought into contact with the material to be drilled when the bit is rotated about the rotational axis or the pass-through axis.

37. The method of claim 31 further including the step of orienting the cutting elements which each define a cutting face and where the cutting
5 blades include primary and secondary blades, where the rotational and pass-through axes lie substantially along the primary blade such that the cutting faces of substantially all elements disposed along the primary cutting blade not between the rotational axis and pass-through axis but
10 between the pass-through axis and gauge are brought into at least partial contact with the formation to be drilled when said bit is rotated about the rotational axis.

38. The method of claim 31 where the reamer section defines one or more blades which extend to pass-through gauge further including the step of positioning cutting elements on said blades at or near the pass-through
15 gauge so as to form an angle between the material to be drilled and the line of contact on the cutting element where said angle is between 5-45°.

39. The method of claim 37 further including the step of positioning the cutting elements on the secondary blades such that they define a skew angle of between 0-80°.

20 40. An eccentric drilling tool comprising:

a bit body defining a proximal end adapted for connection to a drill string, a distal end and defining a pass-through gauge, where said distal end terminates in a primary bit face and a secondary bit face spaced proximally from said primary bit face where said primary bit face
25 includes a primary upset and secondary upsets and where one or more

cutting elements are disposed about said upsets;

said tool defining a rotational axis "A" and a pass-through axis "B"; and

where the cutting elements define substantially complete cutter overlap when said tool is rotated about the rotational or pass-through axes.

41. The eccentric tool of claim 40 where both of said axes "A" and "B" are disposed about the primary upset.

42. The eccentric tool of claim 40 where the cutting elements disposed proximate the pass-through gauge define a high effective backrake angle.

43. The eccentric tool of claim 40 where cutting elements disposed along said primary upset between said axis "A" and axis "B" define cutting faces where most of said cutting faces are brought into at least partial contact with the material to be drilled when either the tool is rotated about said pass-through axis "B" or rotational axis "A".

44. A multi-center bit comprising:

a bit body defining proximal end adapted for connection to a drill string and a distal end, where the distal end defines a pilot bit and an intermediate reamer section, where each the pilot and reamer section define a cutting face which include one or more cutting elements;

the bit body defining a rotational axis and at least a second axis; and

where said bit when in use defines two distinct bottom hole patterns when rotated about the rotational and the second axis.

45. The bit of claim 44 where the bit defines a pass-through gauge and where cutting elements disposed proximate said gauge define a high

effective backrake angle.

46. The bit of claim 44 which is adapted to consecutively be used to cut through casing equipment and the underlying formation without being removed from the borehole.

47. The bit of claim 44 further including one or more stabilizing elements disposed opposite the reamer section such that the proximal most portions of said stabilizing elements do not extend beyond the most proximately disposed elements on the reamer section.

48. The bit of claim 44 which is adapted to rotate in casing about an axis separate from the rotational axis so as to not pierce said casing.

49. A multi-center bit comprising:

a bit body defining a proximal end adapted for connection to a drill string and a distal end, where the distal end defines a first and a second cutting section, where each said first and second sections define a cutting face;

the bit body defining a first and second axis; a plurality of cutting elements situated on cutting blades disposed about the cutting face of the first and second sections; and

said bit adapted to consecutively without removal rotate about said axis first within casing without cutting said casing and rotate about second axis within a borehole formed in formation.

50. The bit of claim 49 where the rotation of the bit about the first or the second axis defines substantially complete cutter overlap.

51. The bit of claim 46 where the rotation of the bit about the first and the second axes creates at least two distinct bottom hole patterns.

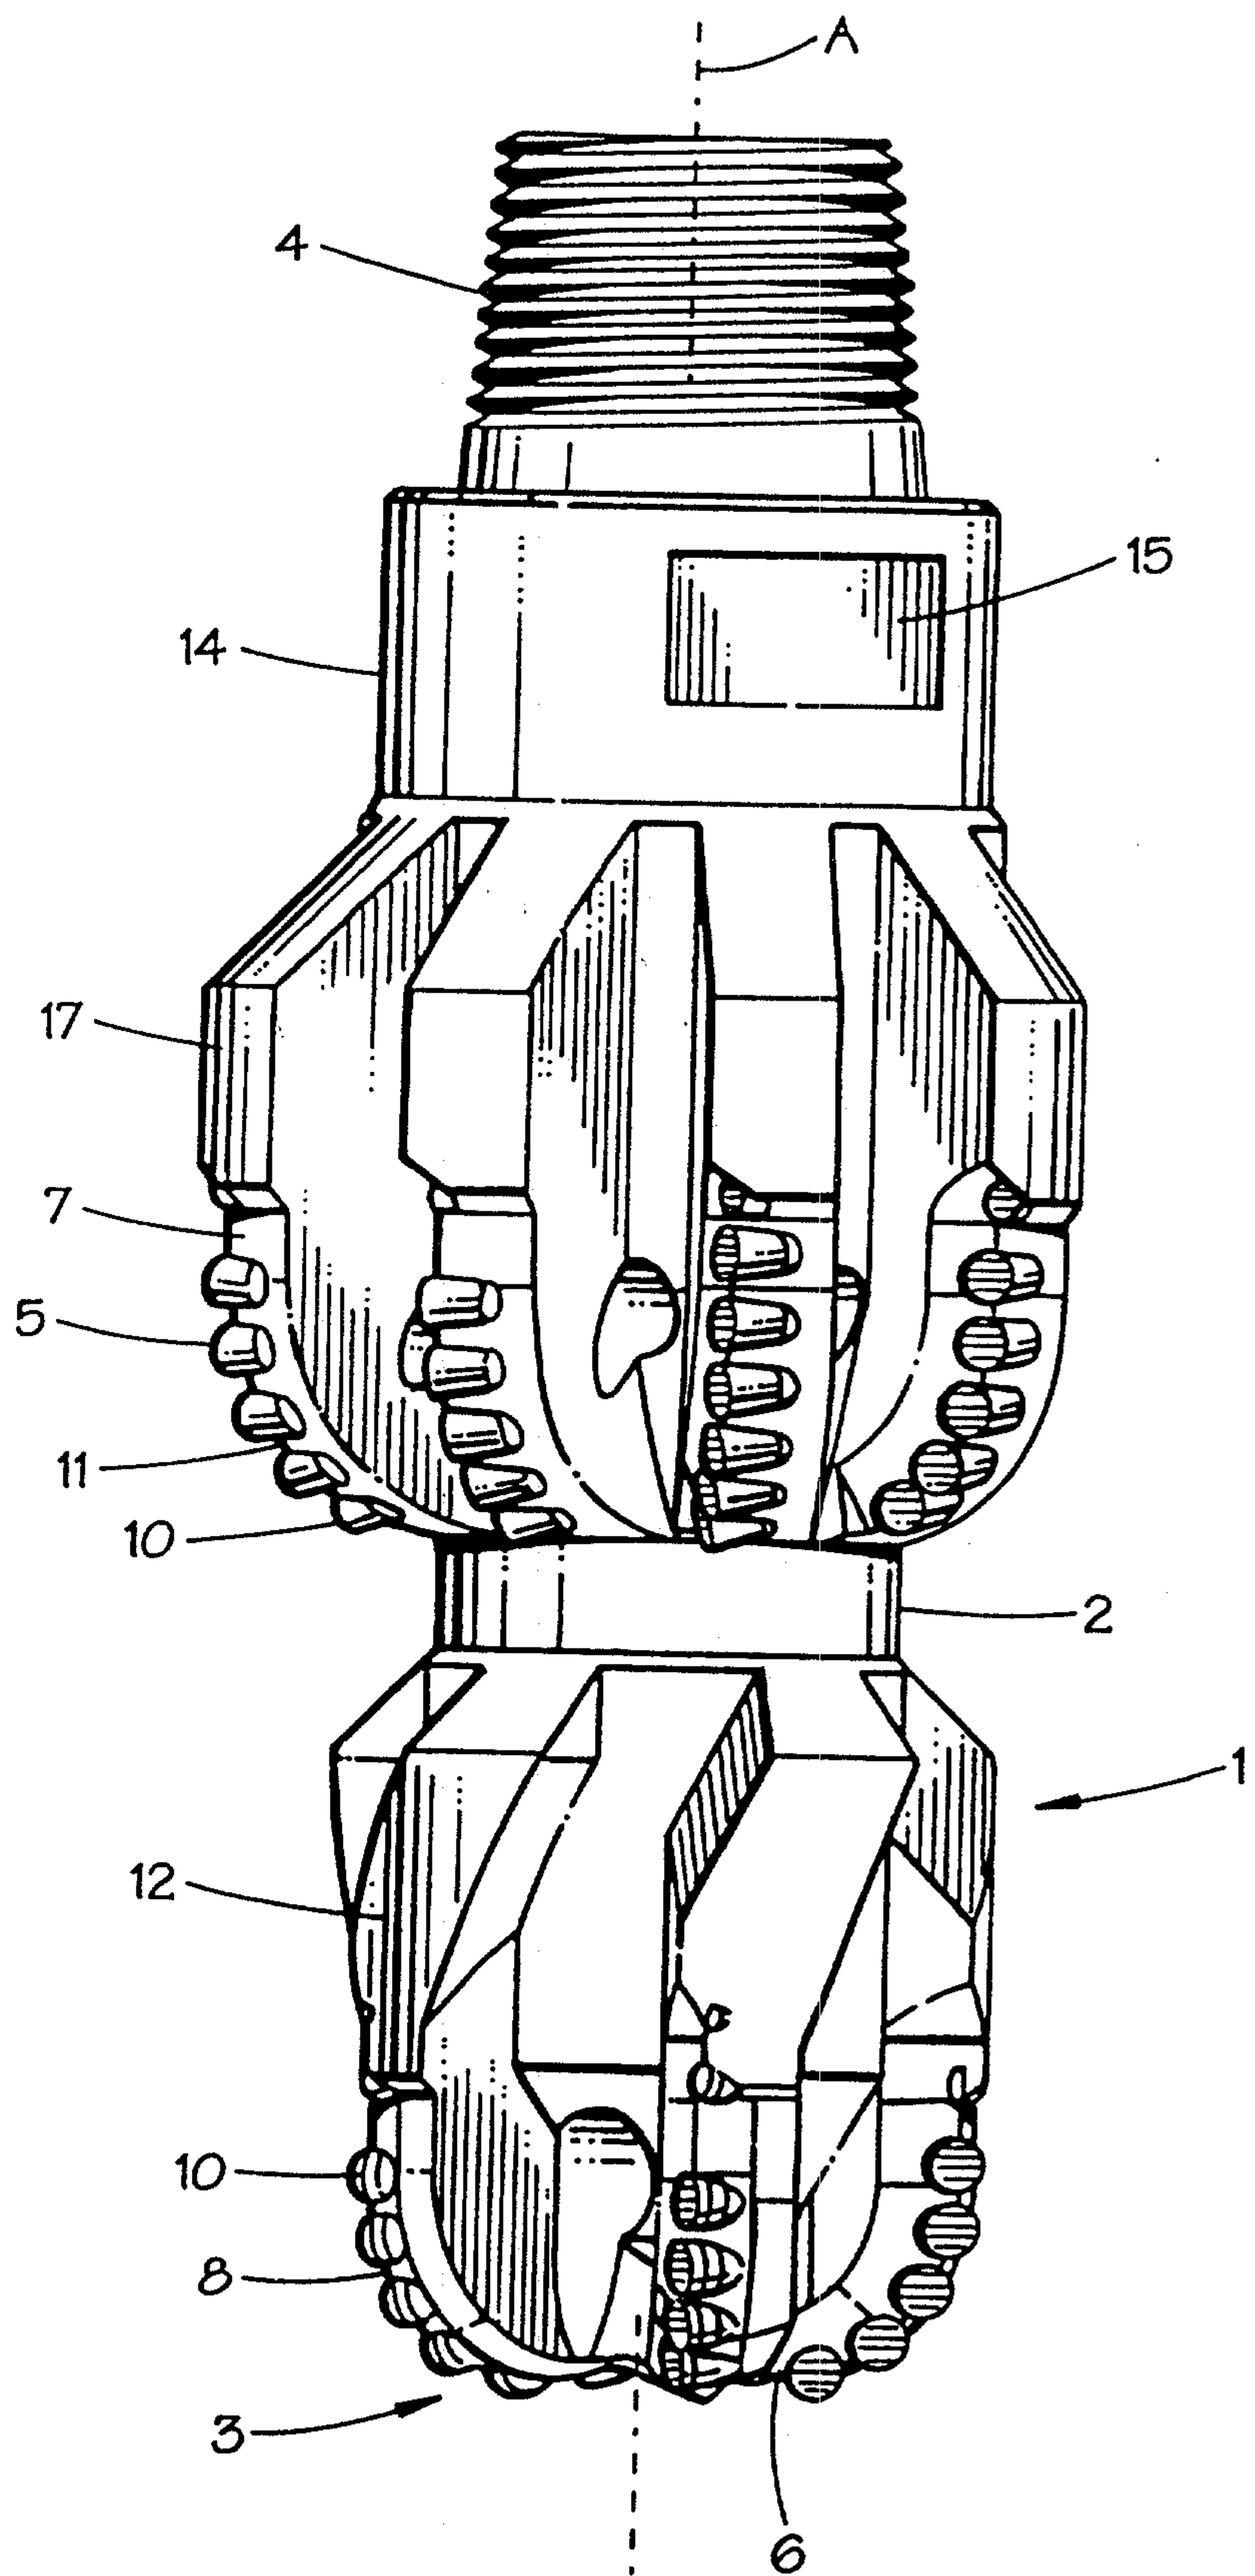


FIG. 1

FIG. 7
(PRIOR ART)

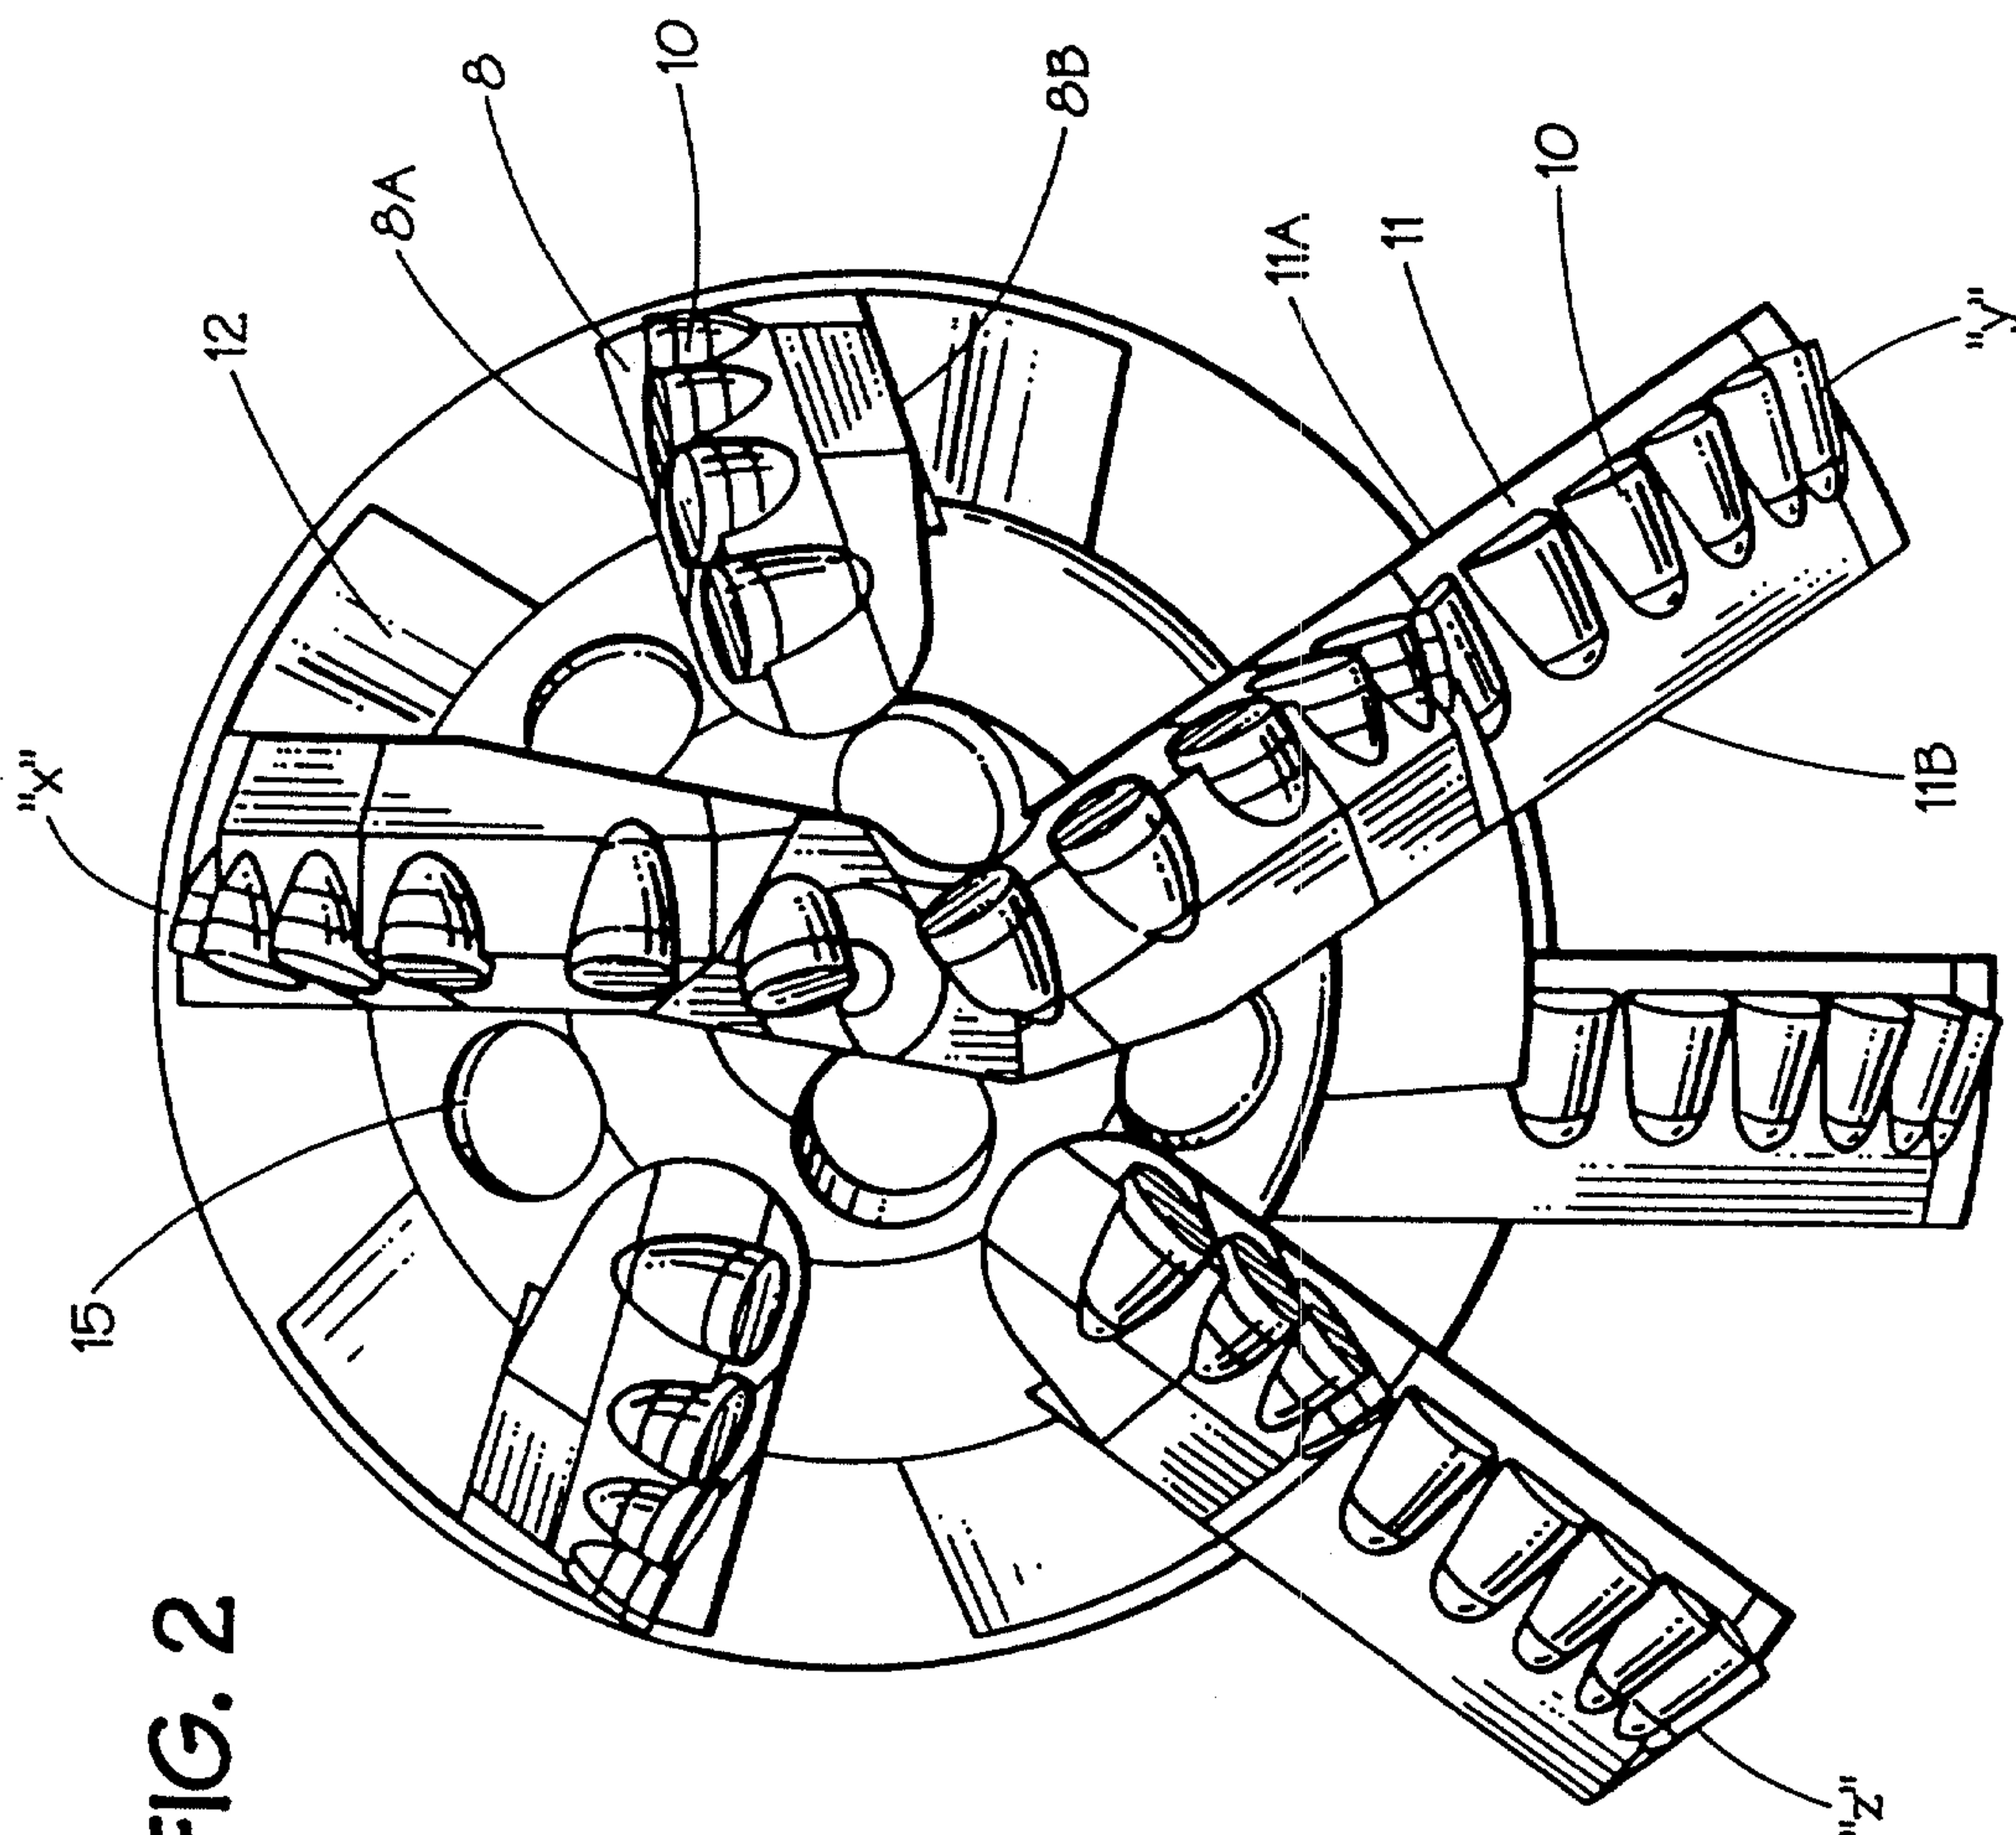
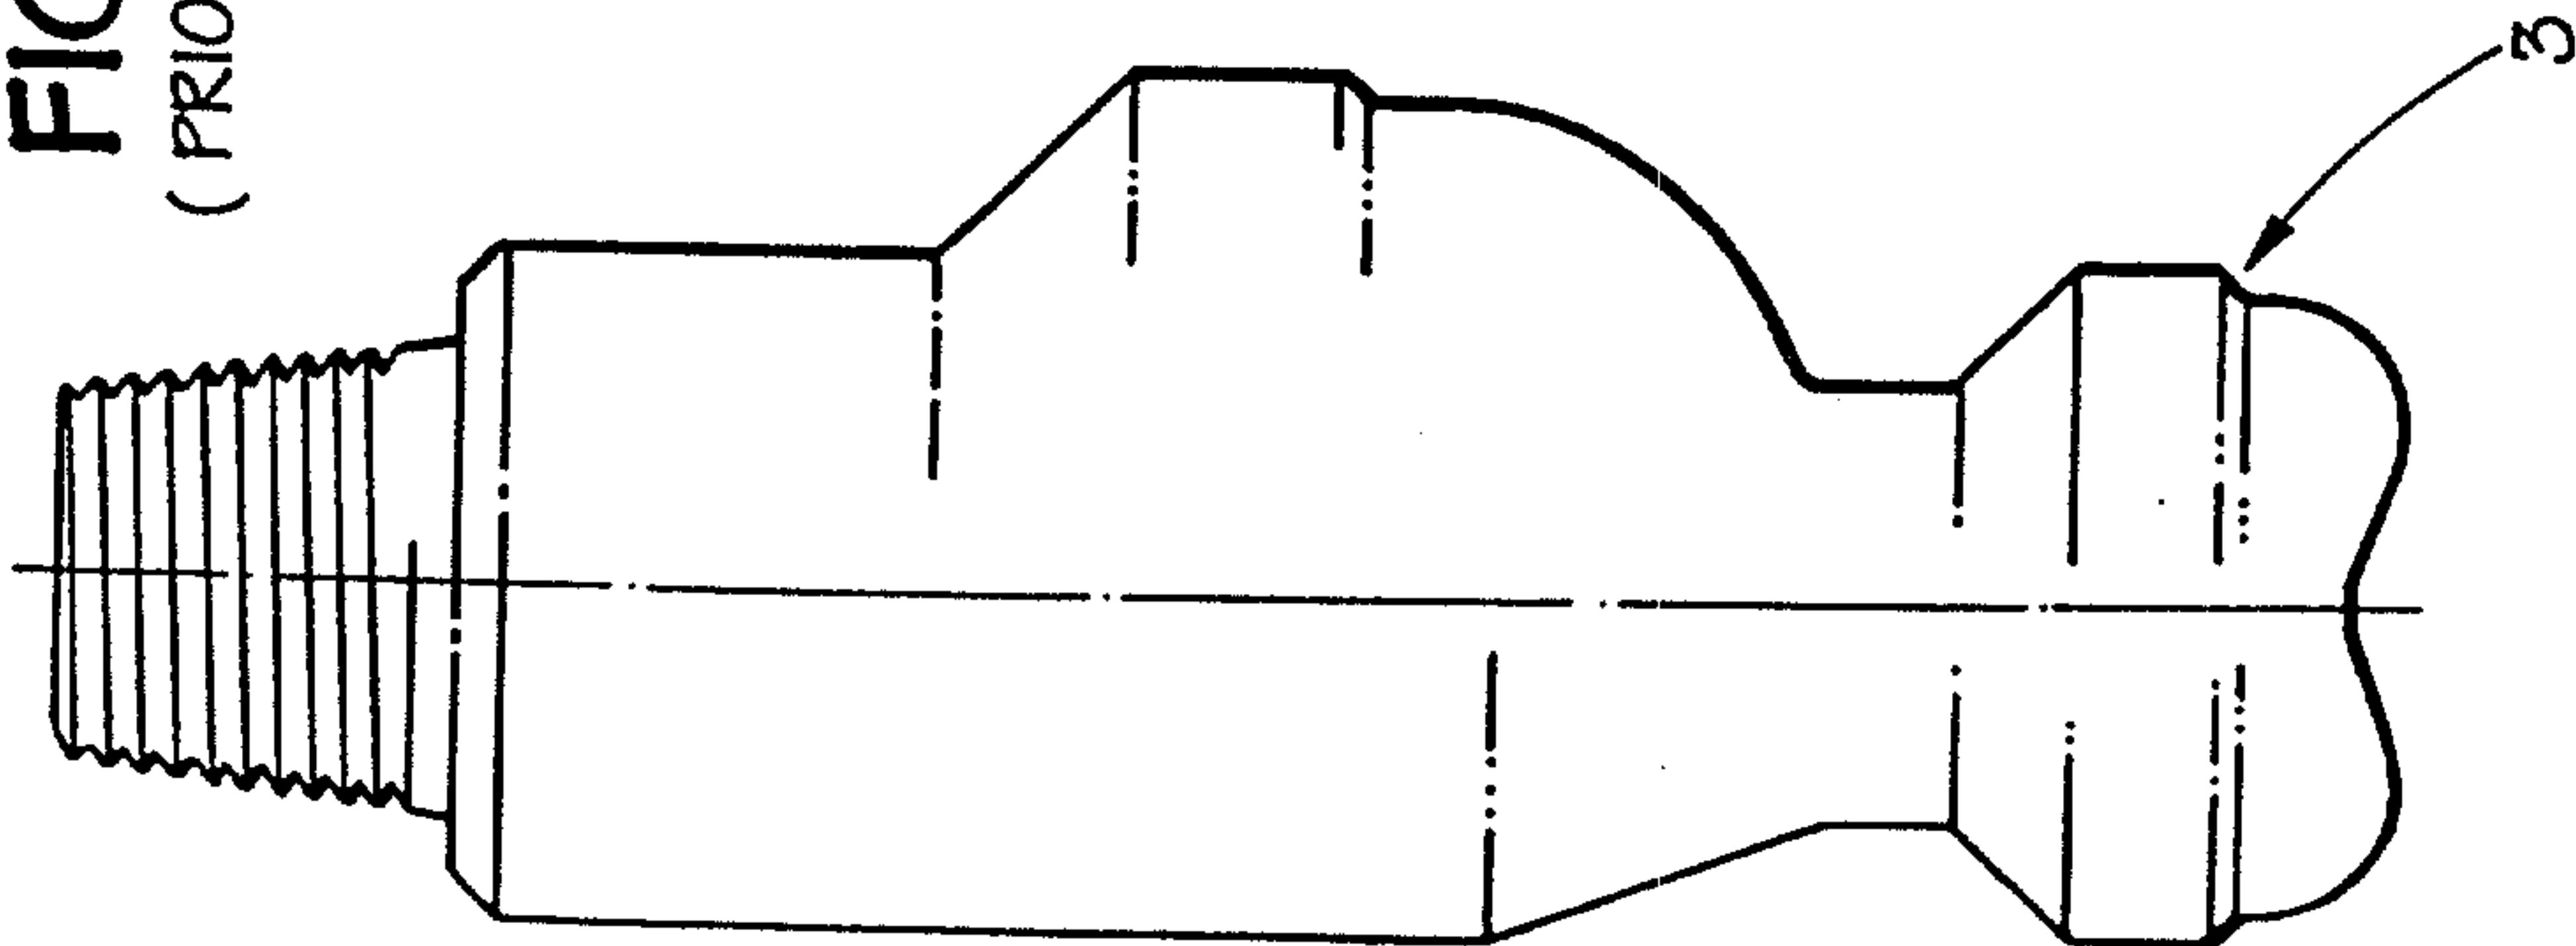


FIG. 2

+

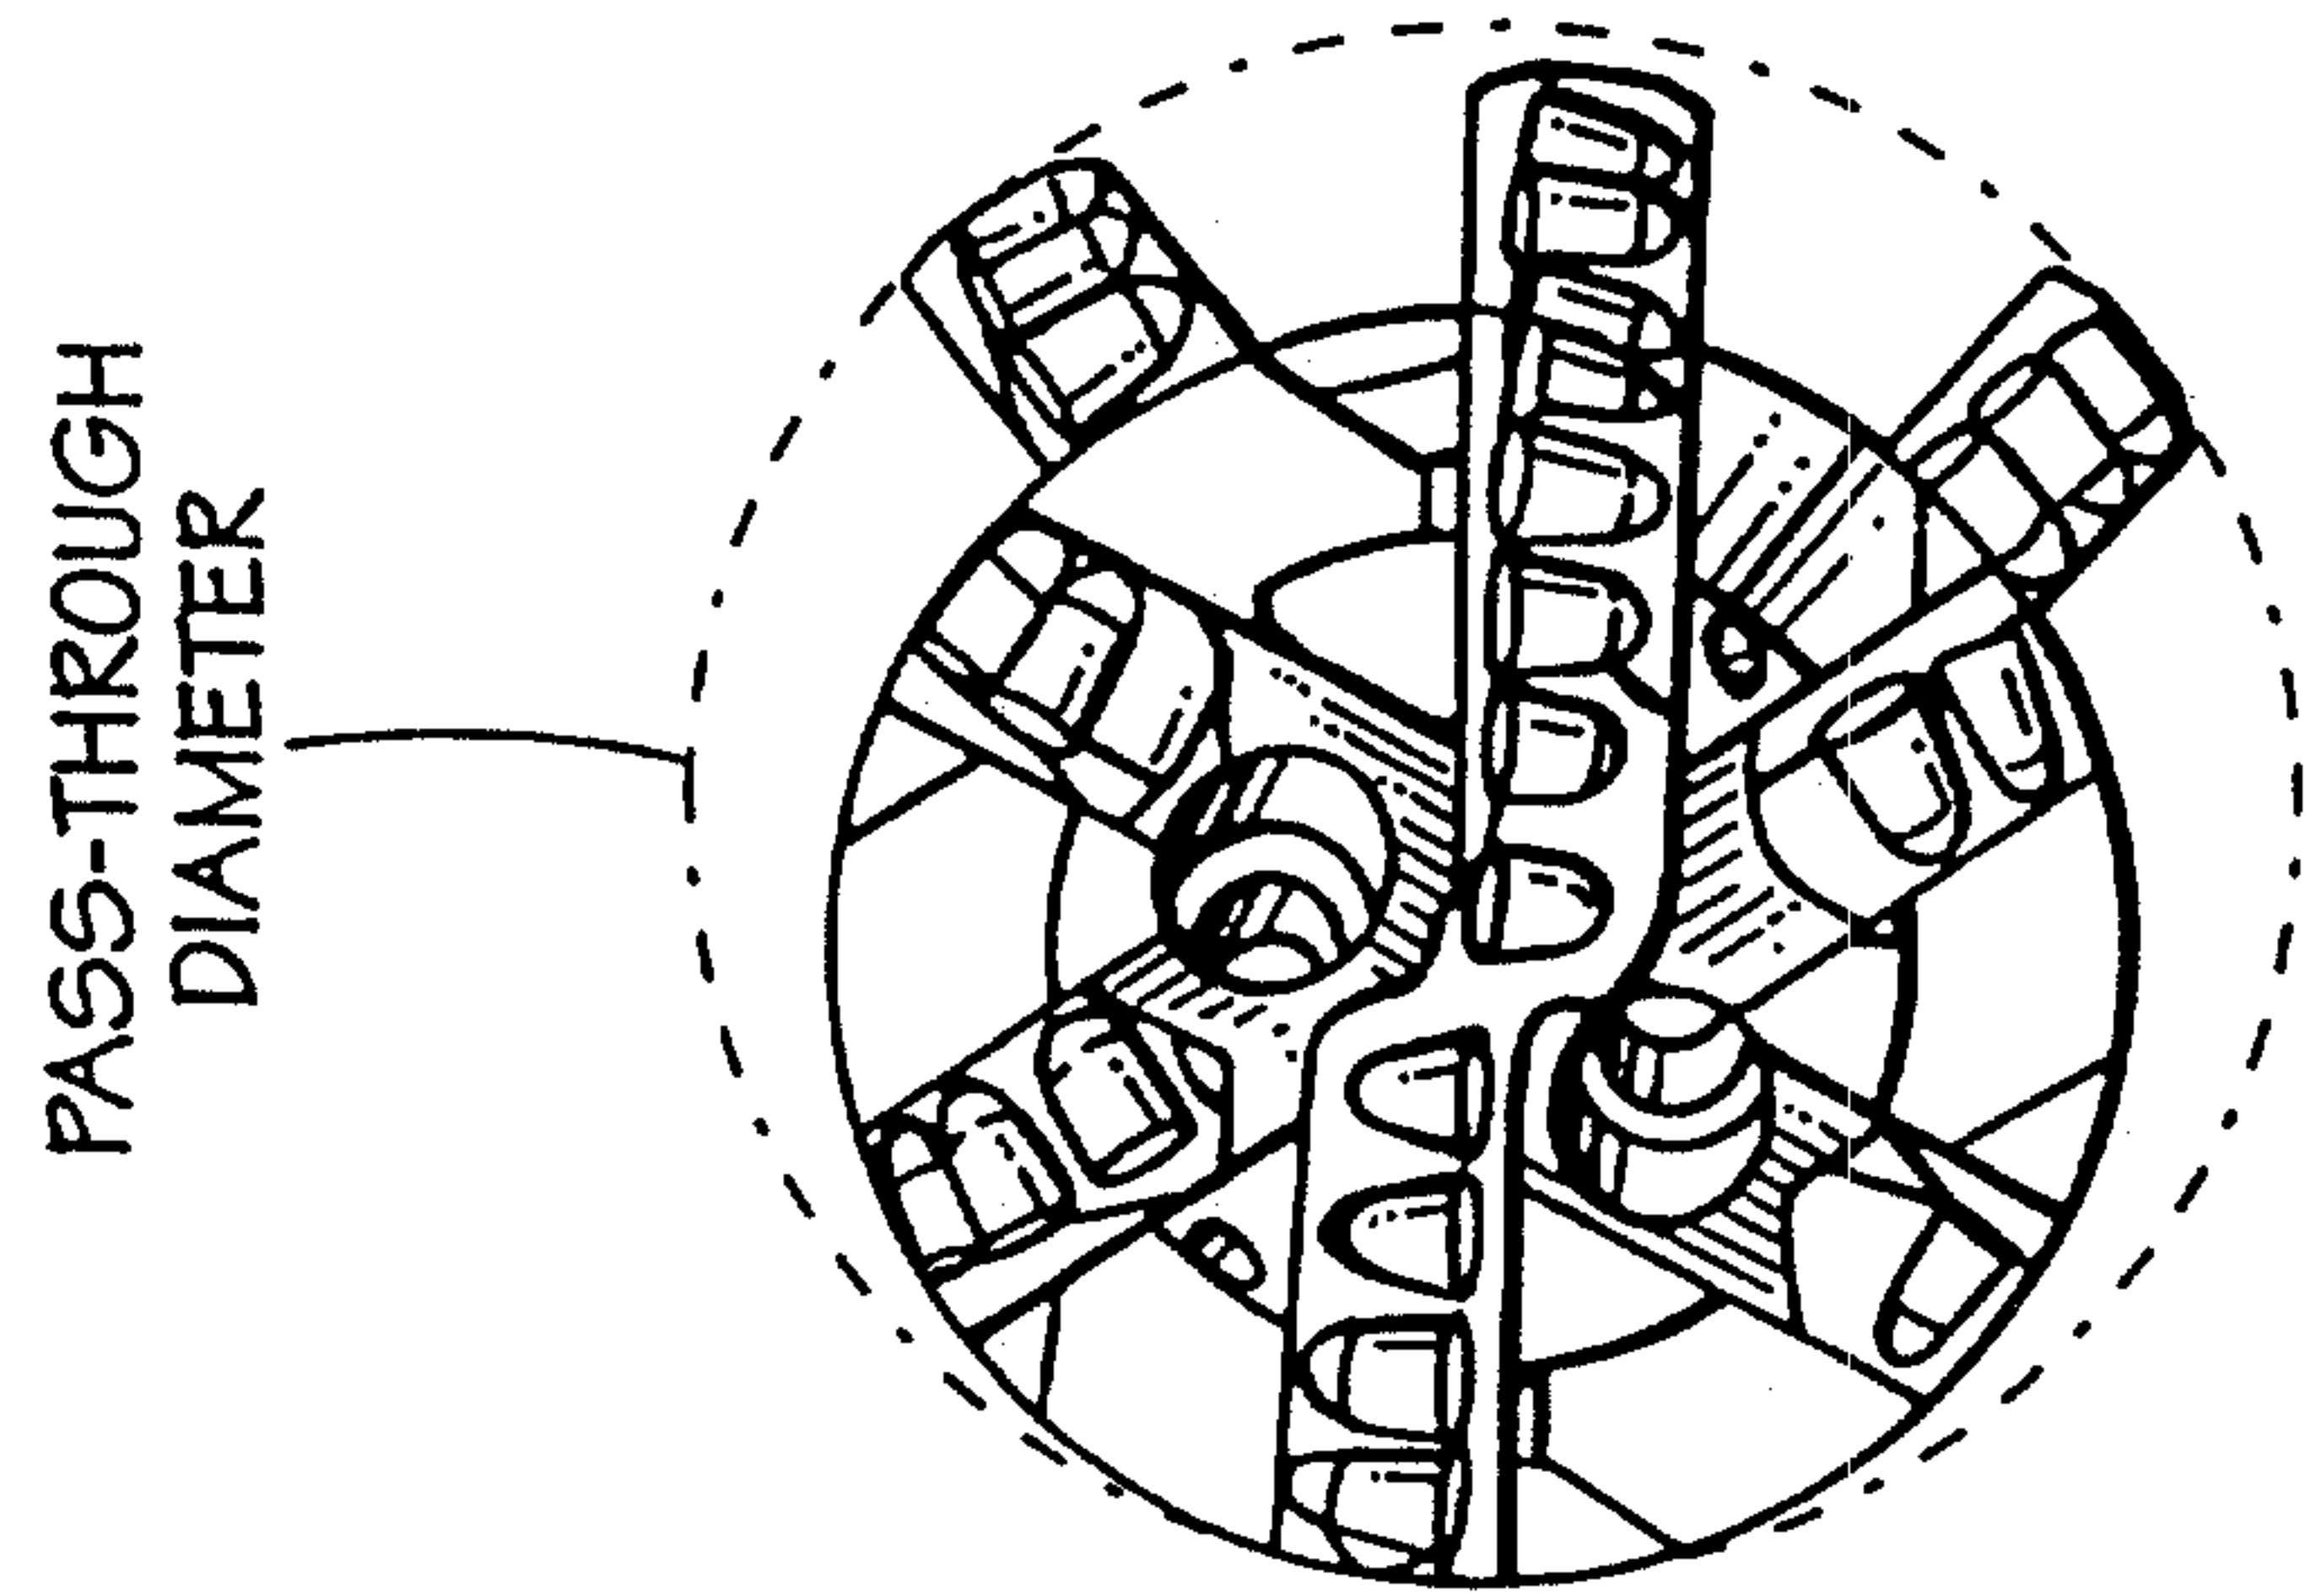


FIG. 3A

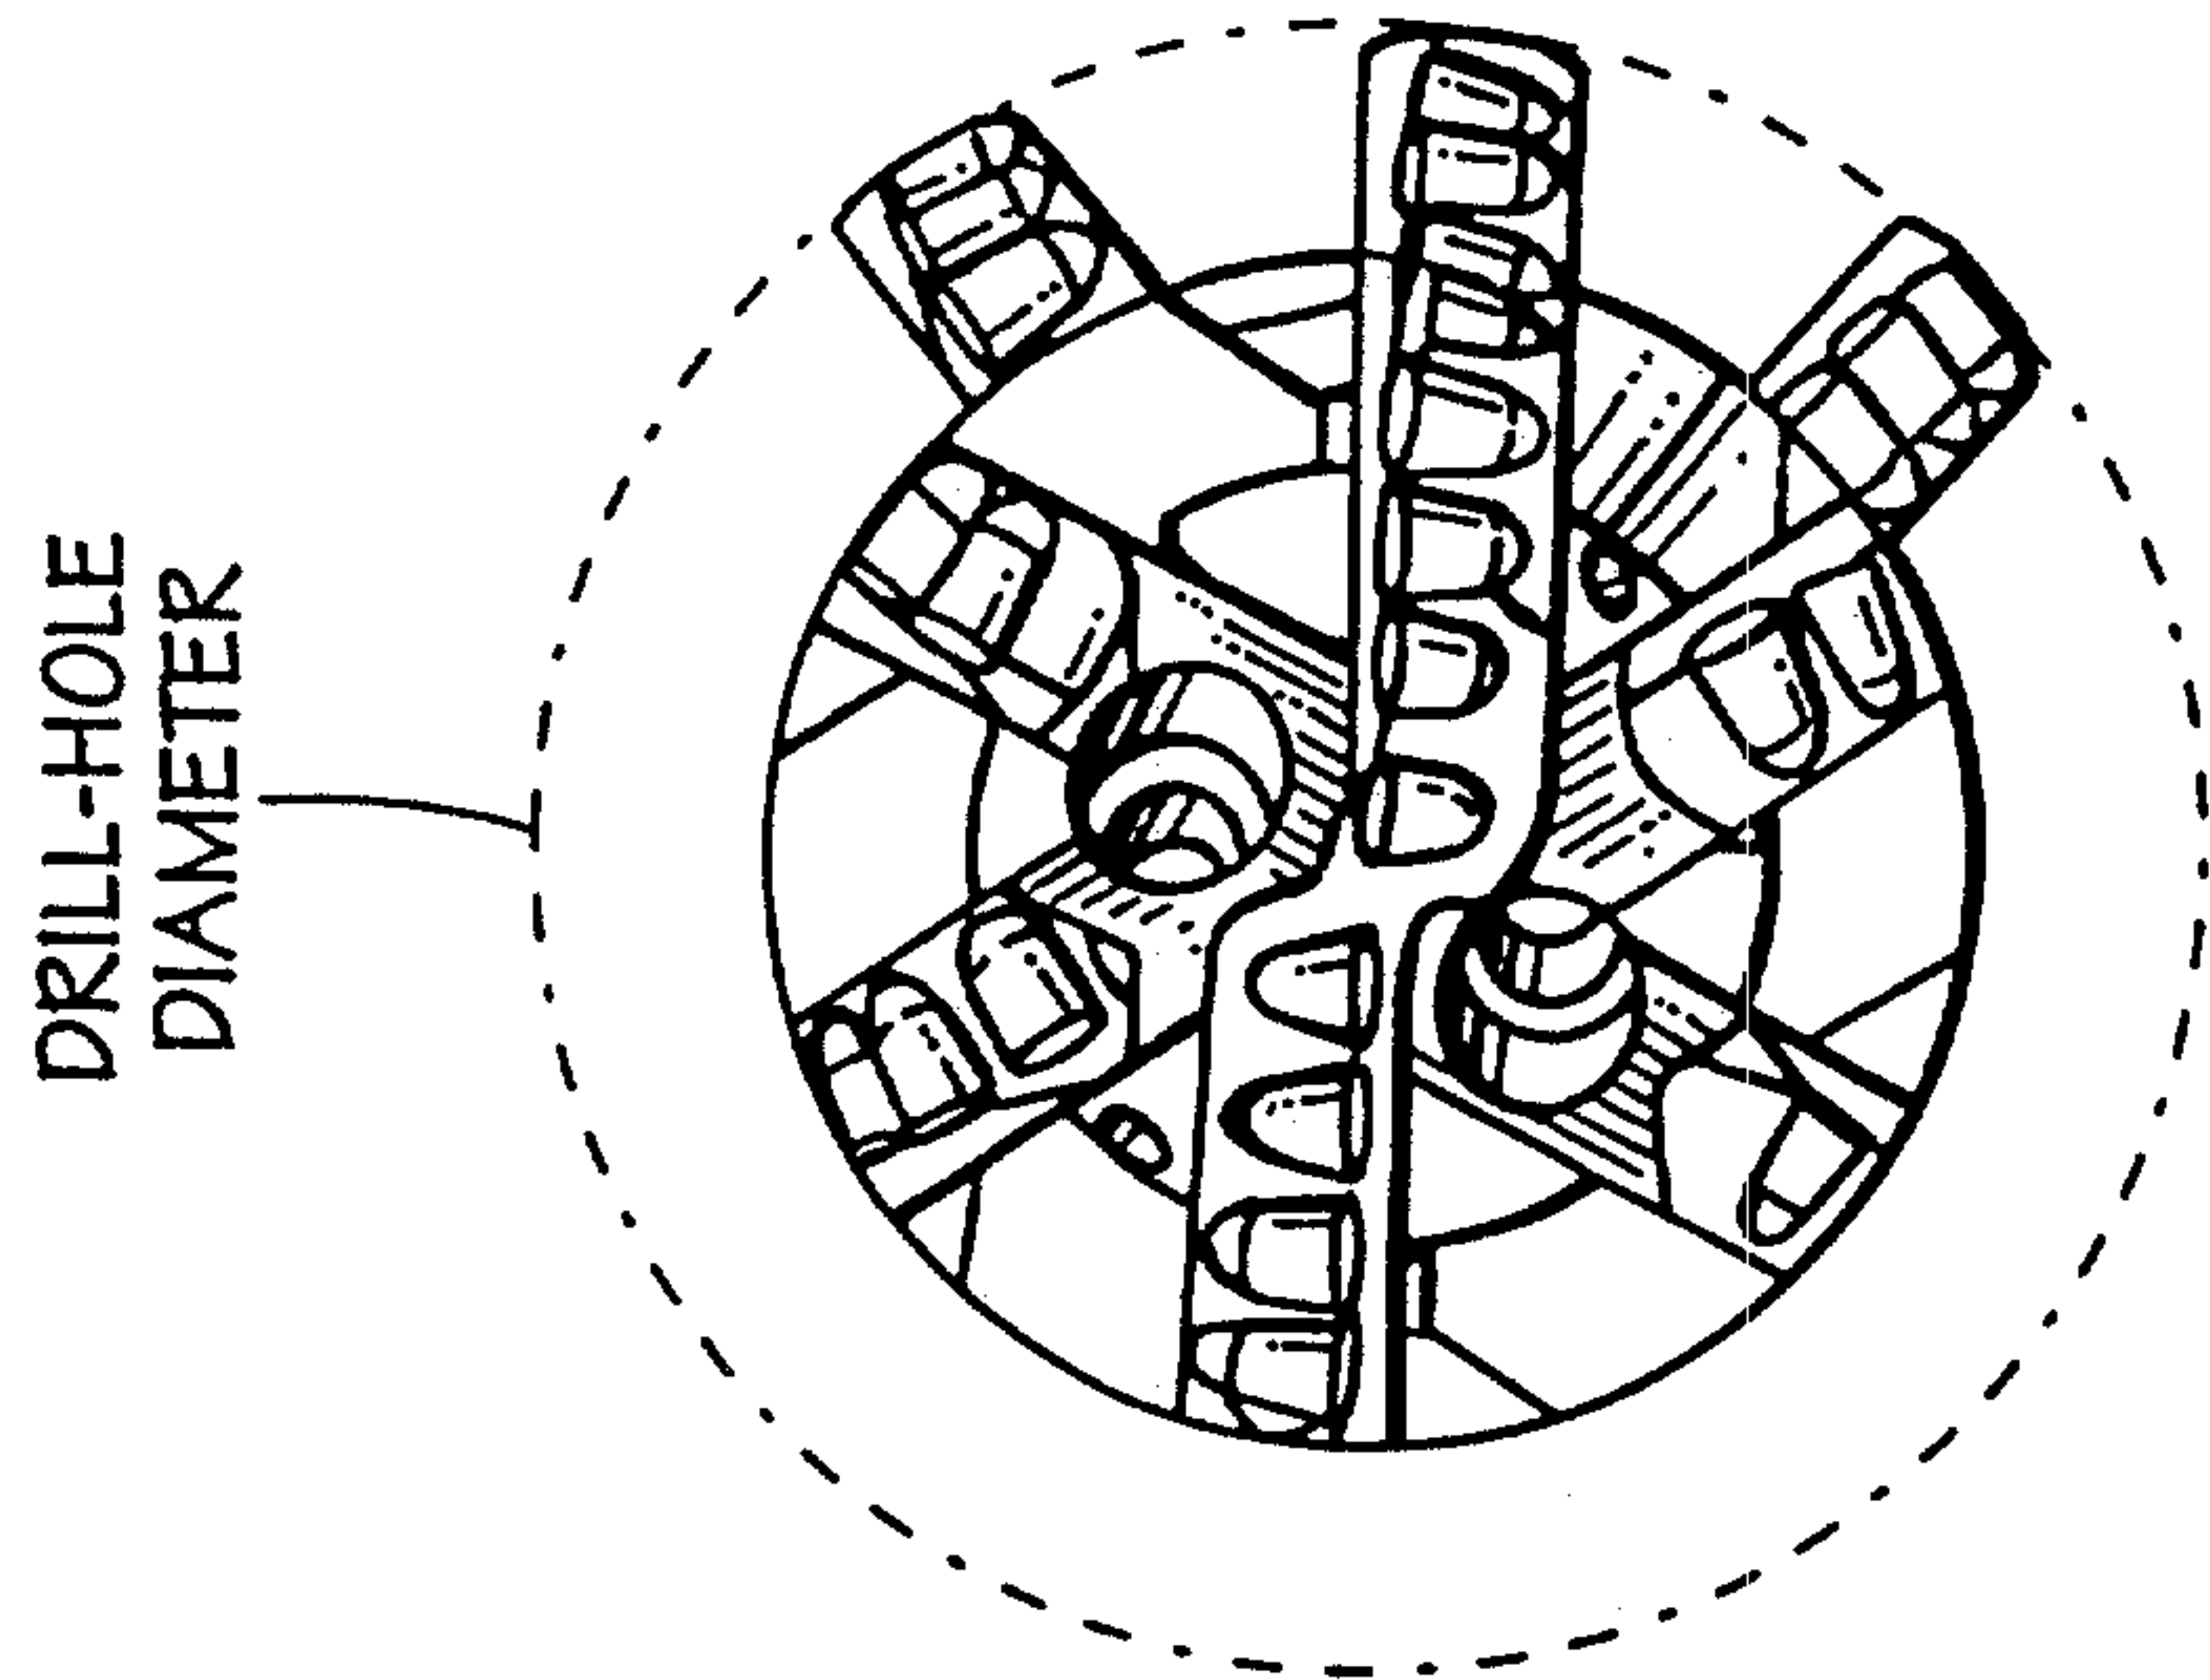


FIG. 3B

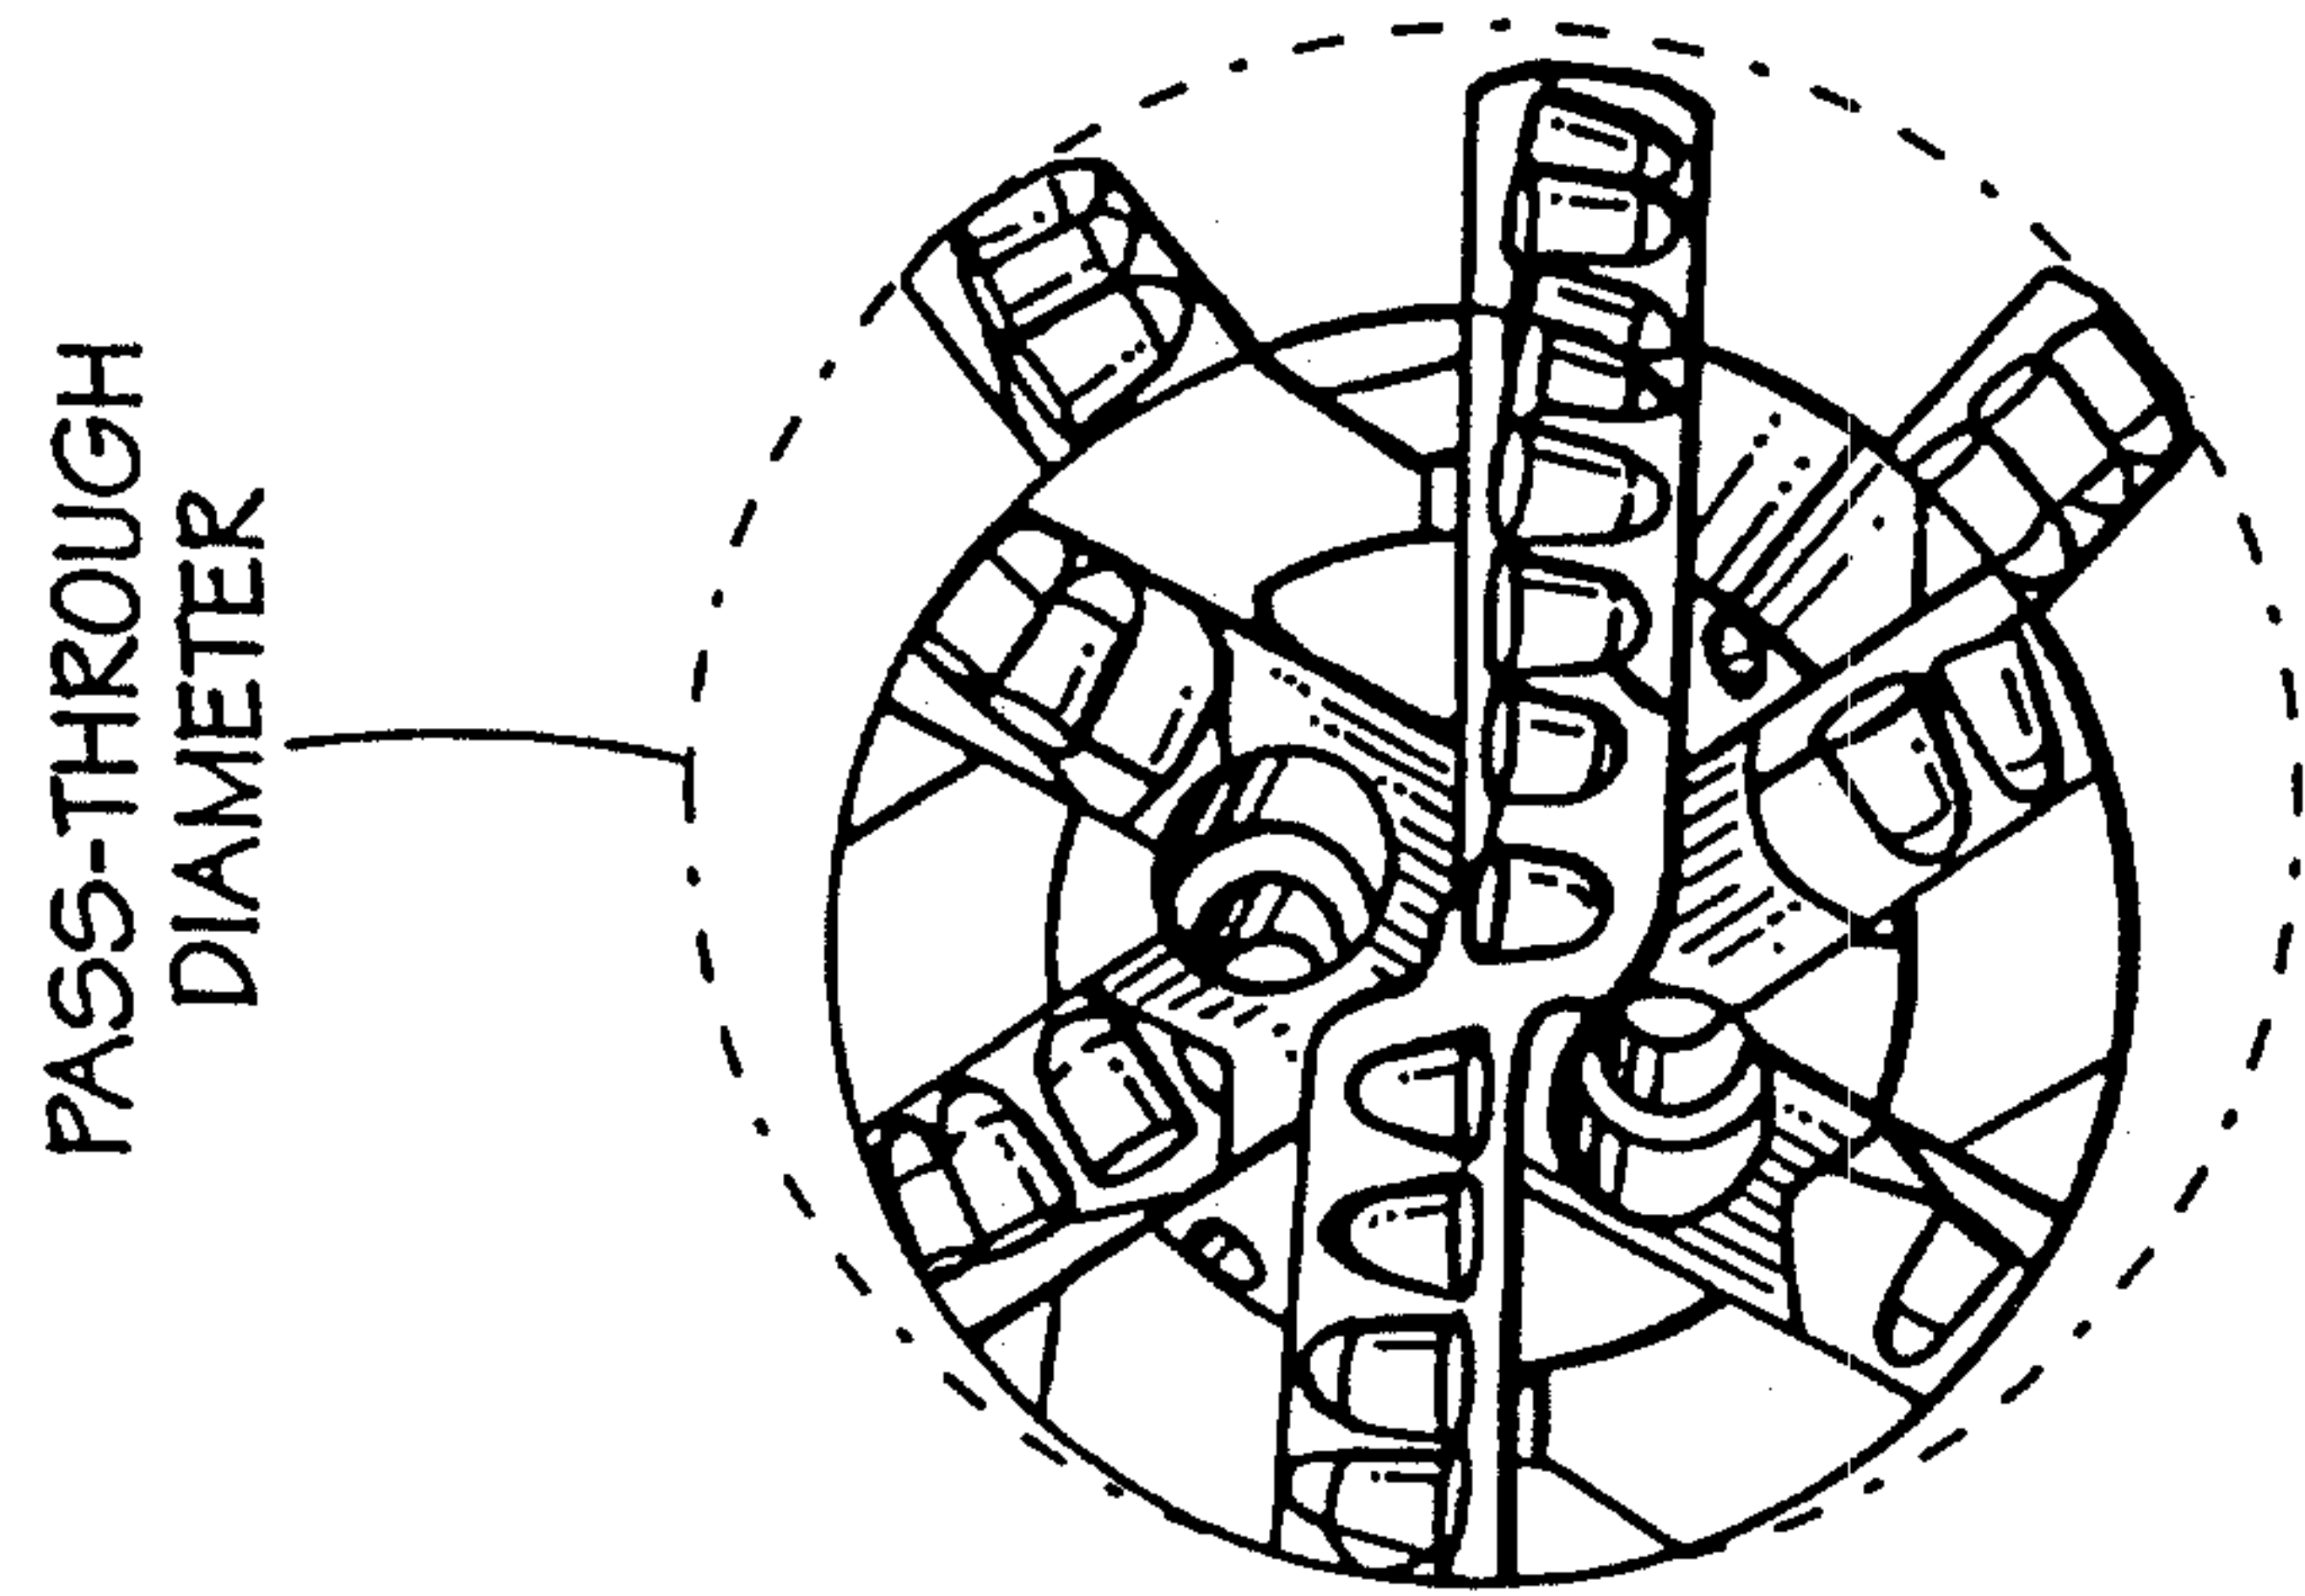


FIG. 3C

+

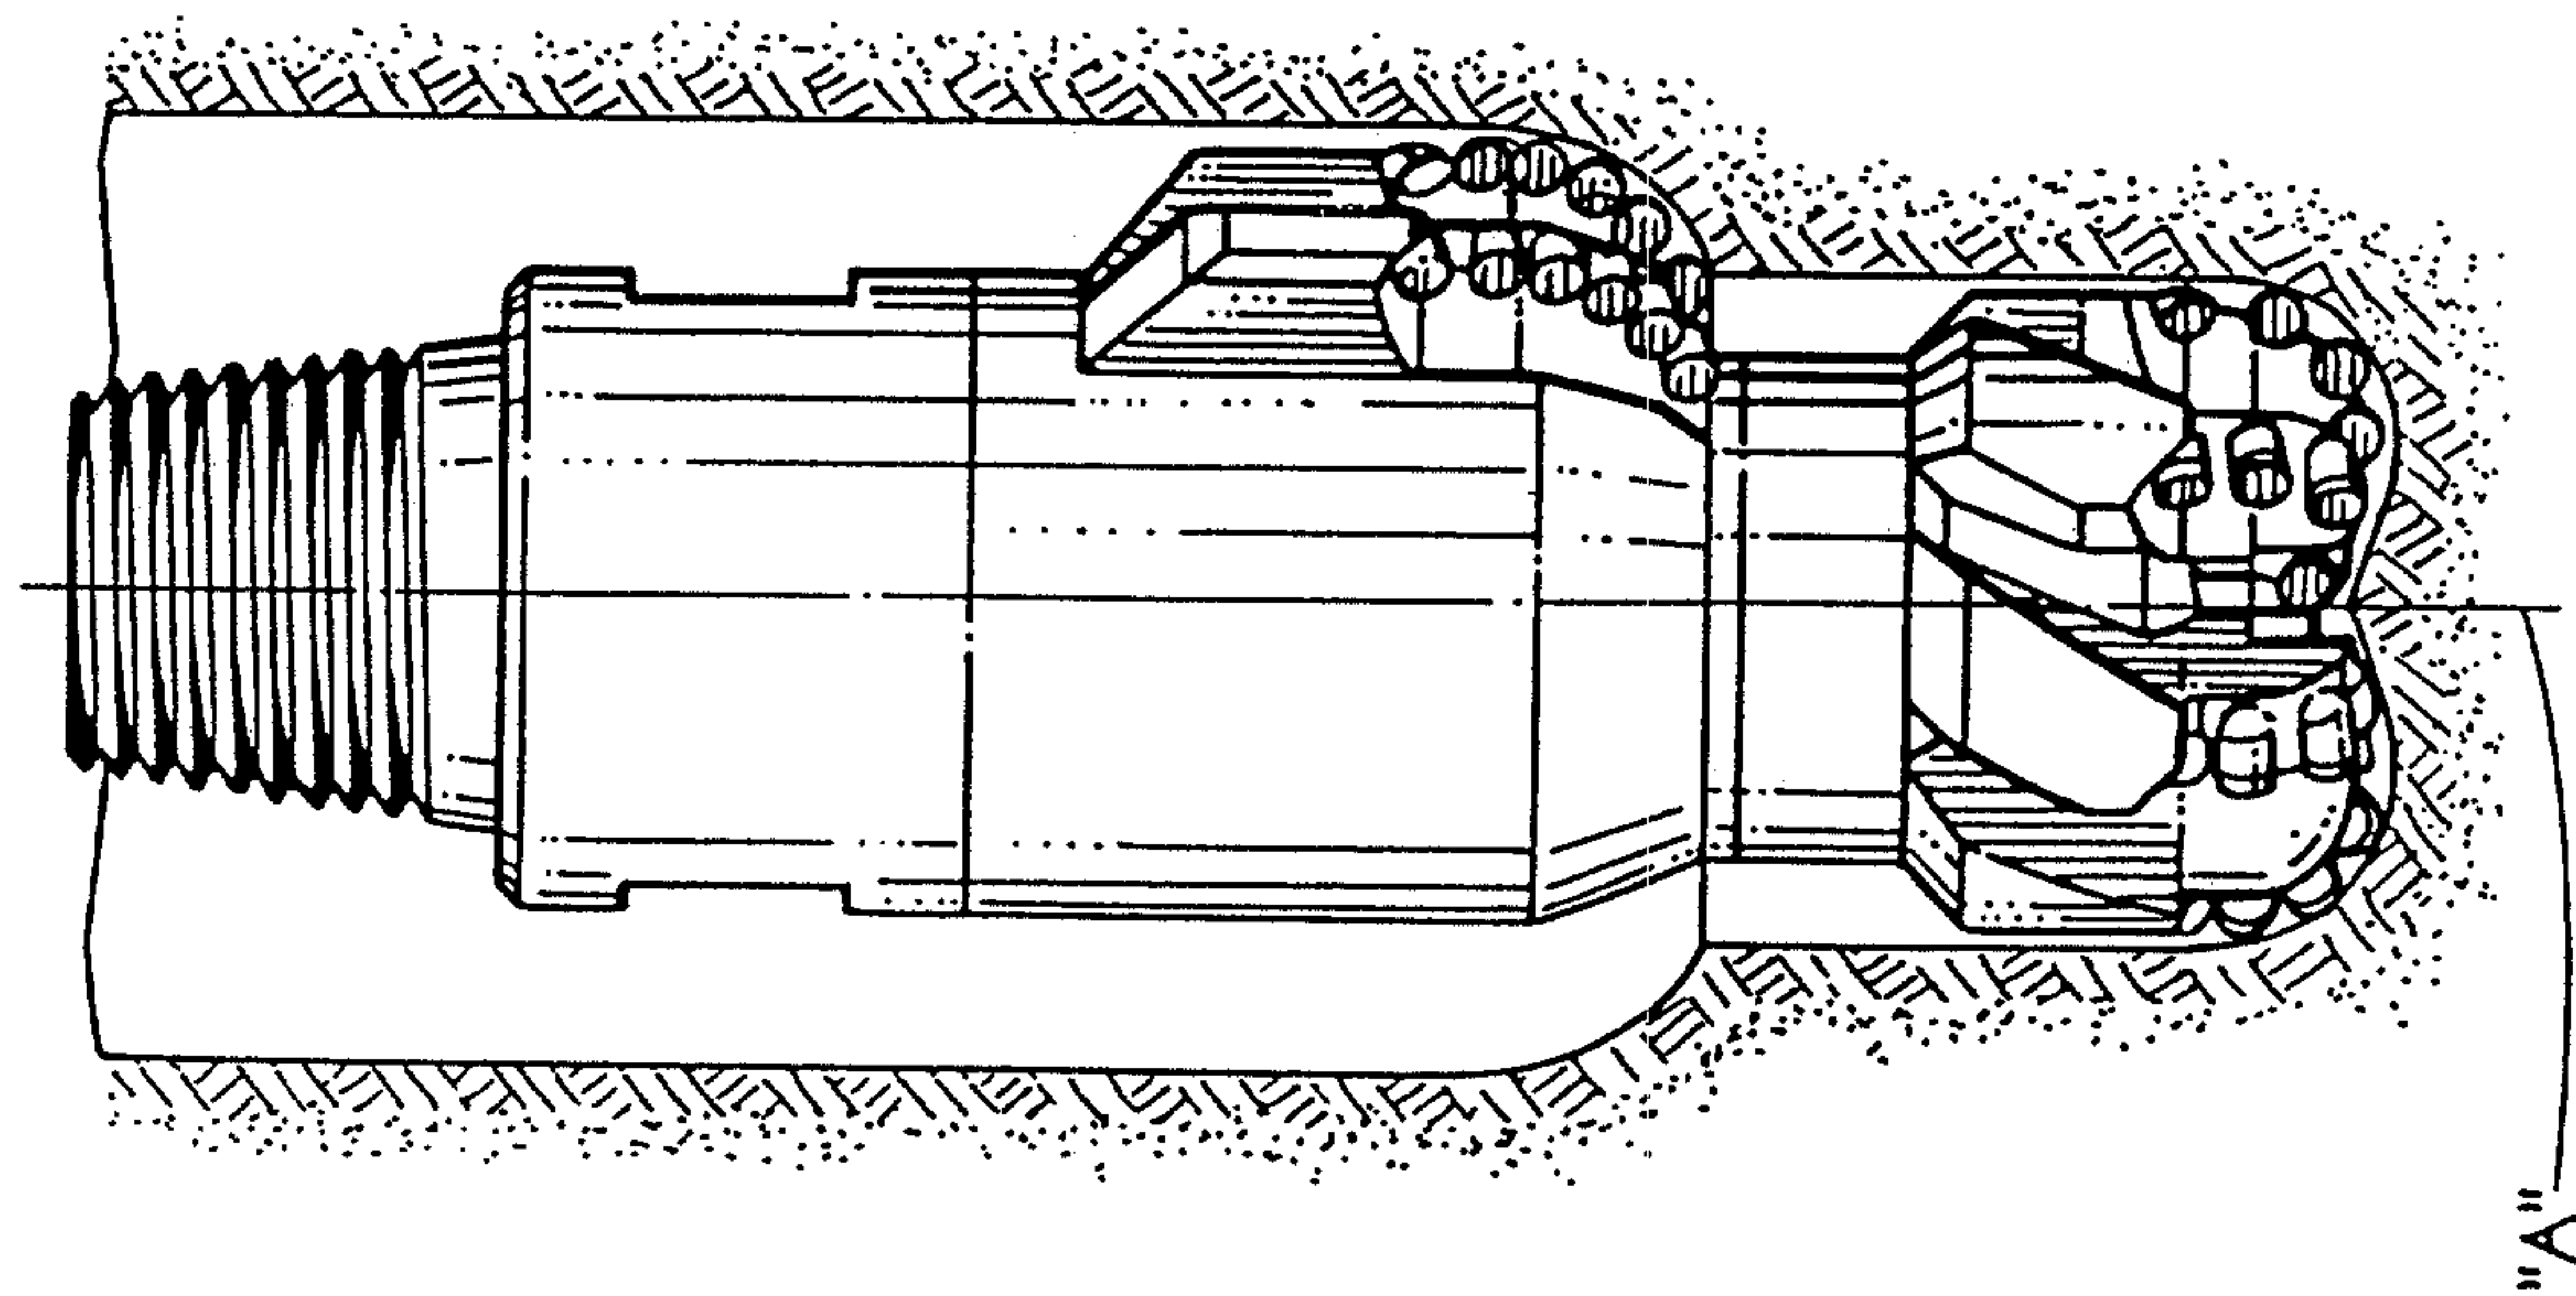


FIG. 4B

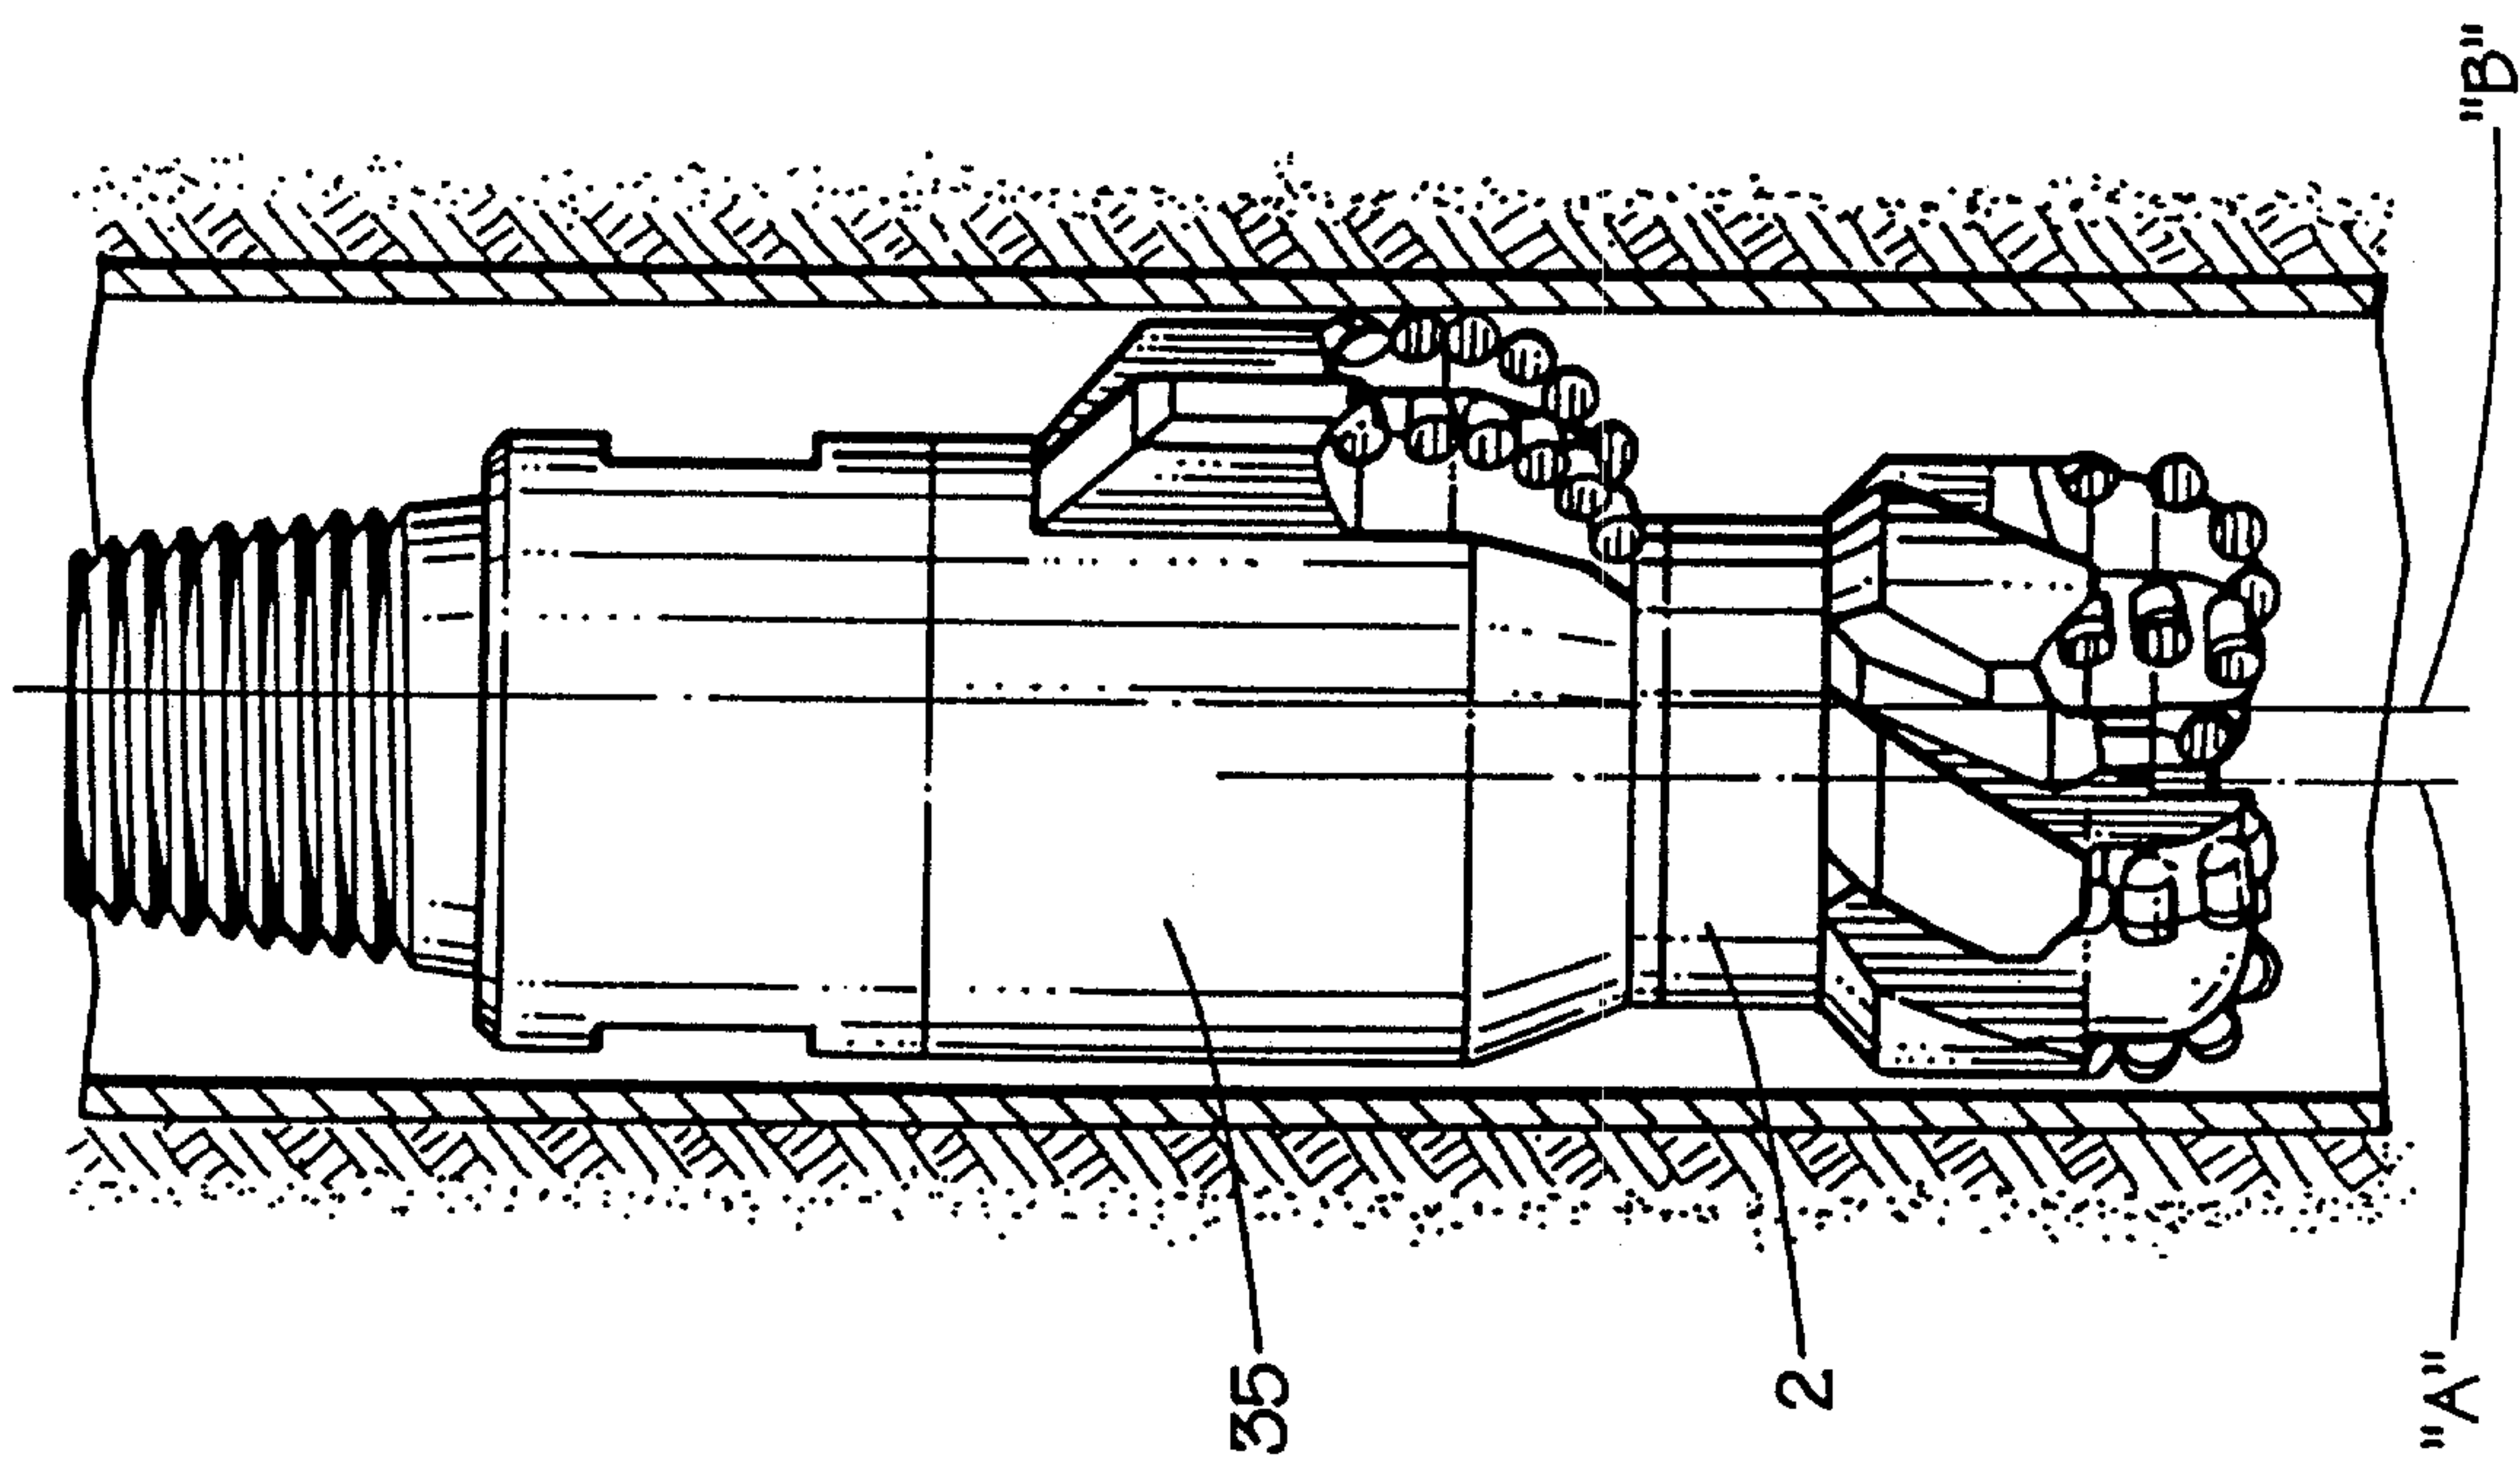


FIG. 4A

FIG. 5


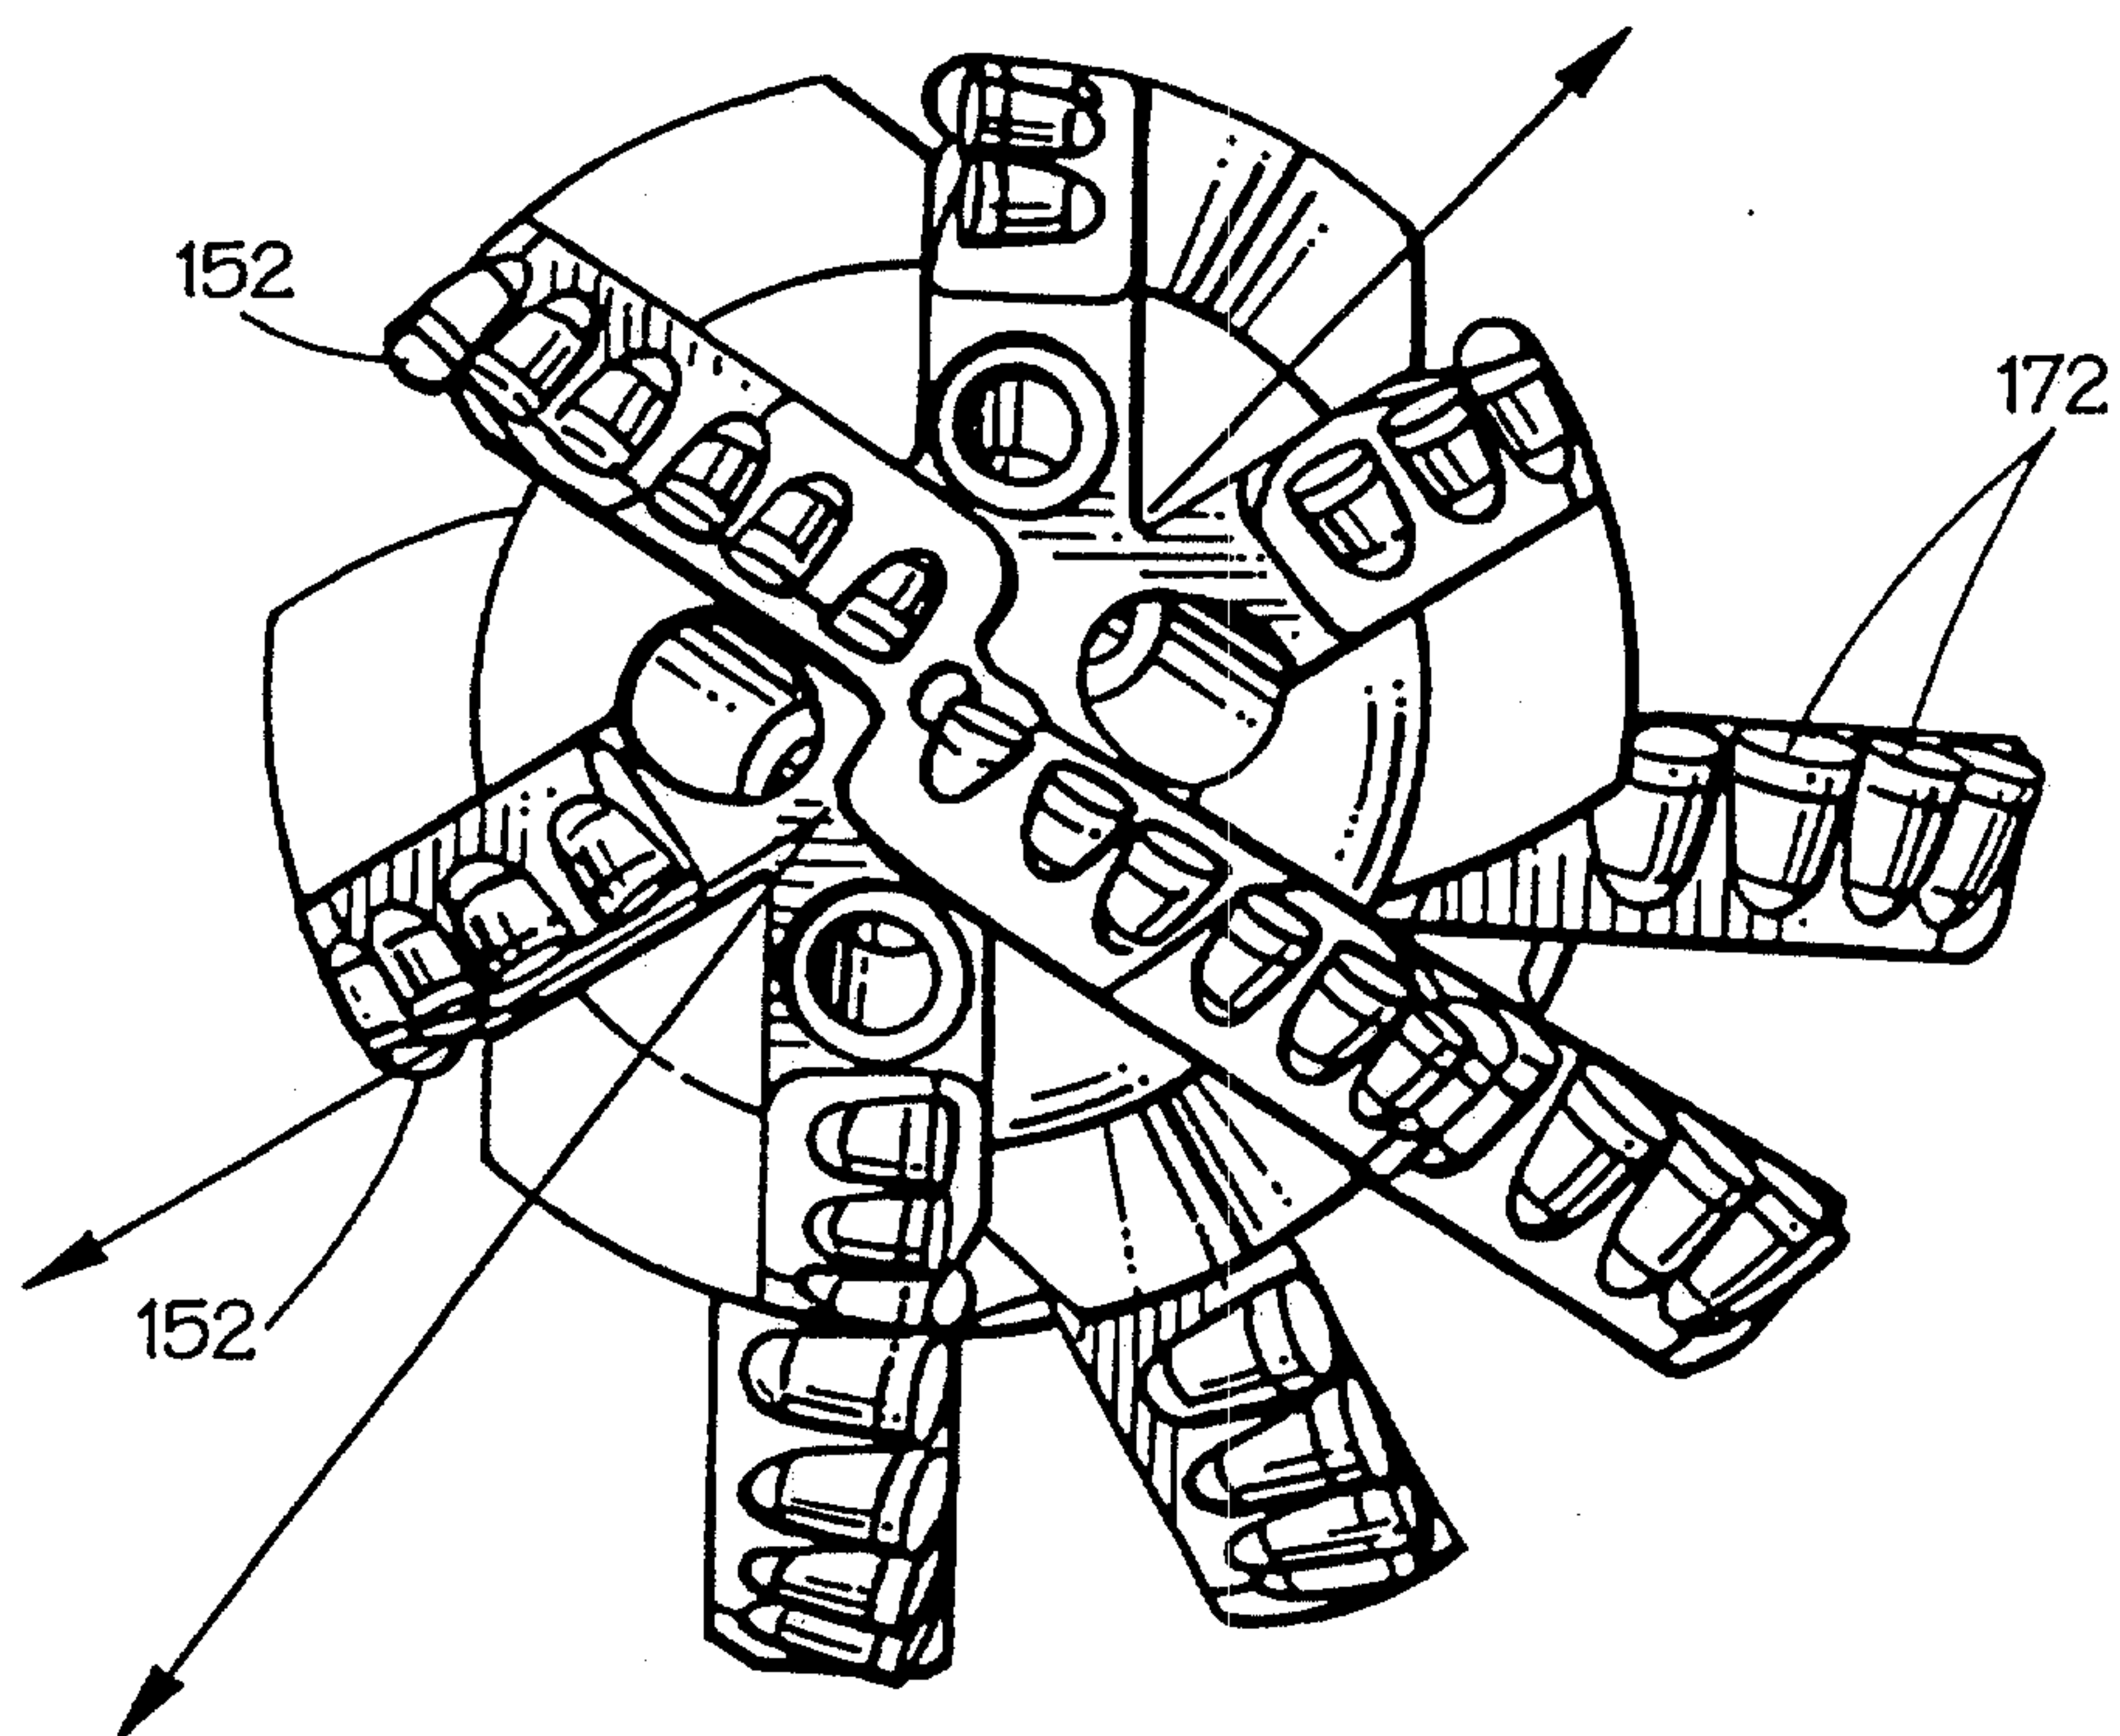


FIG. 6

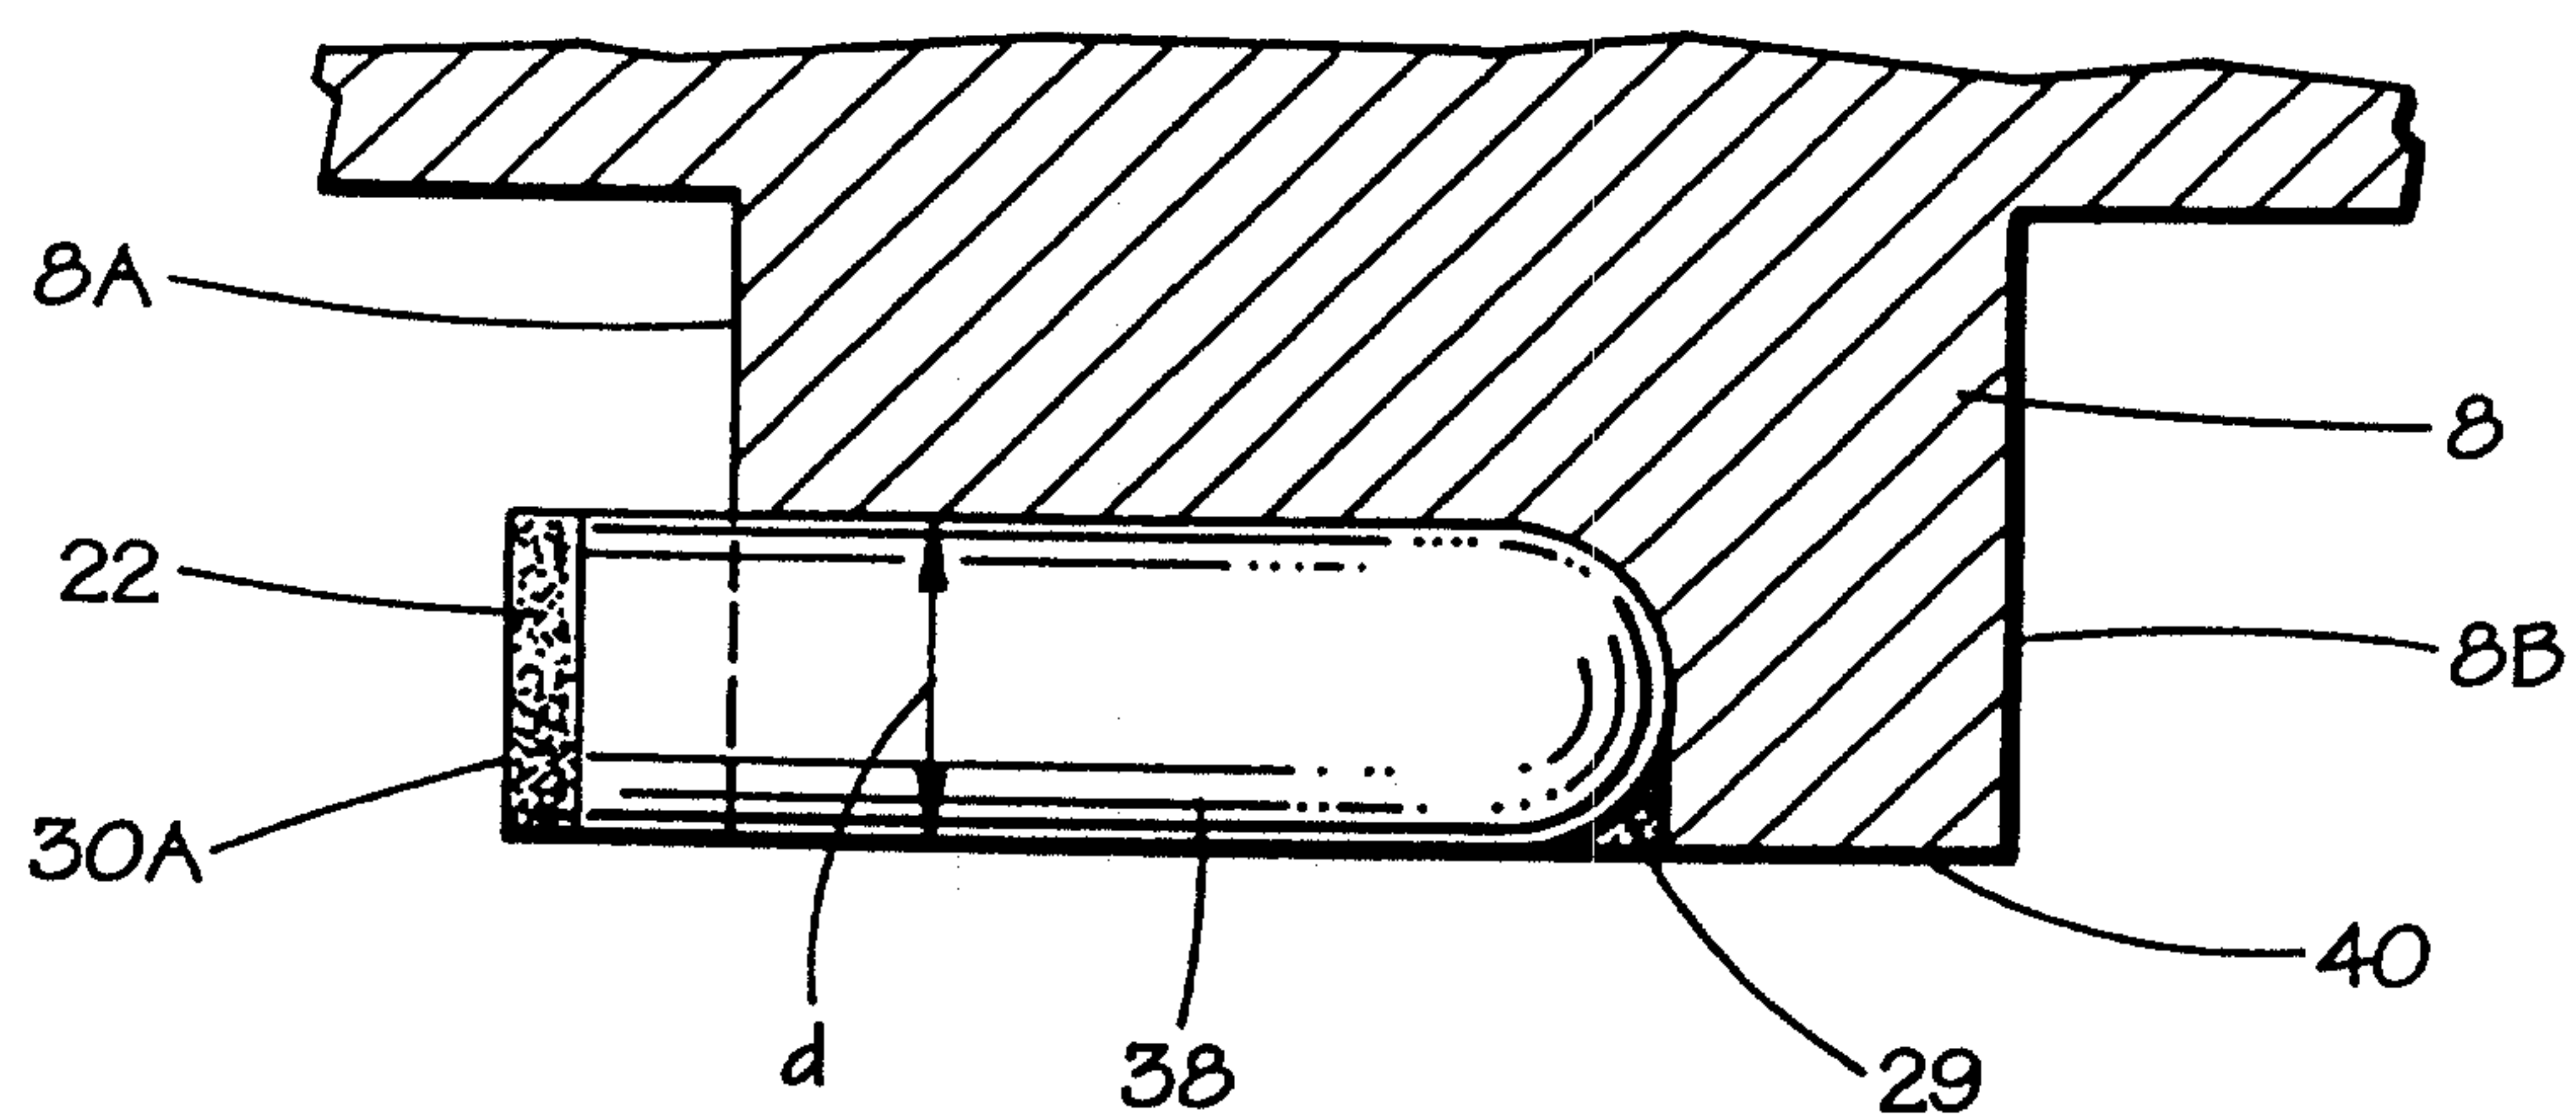

+

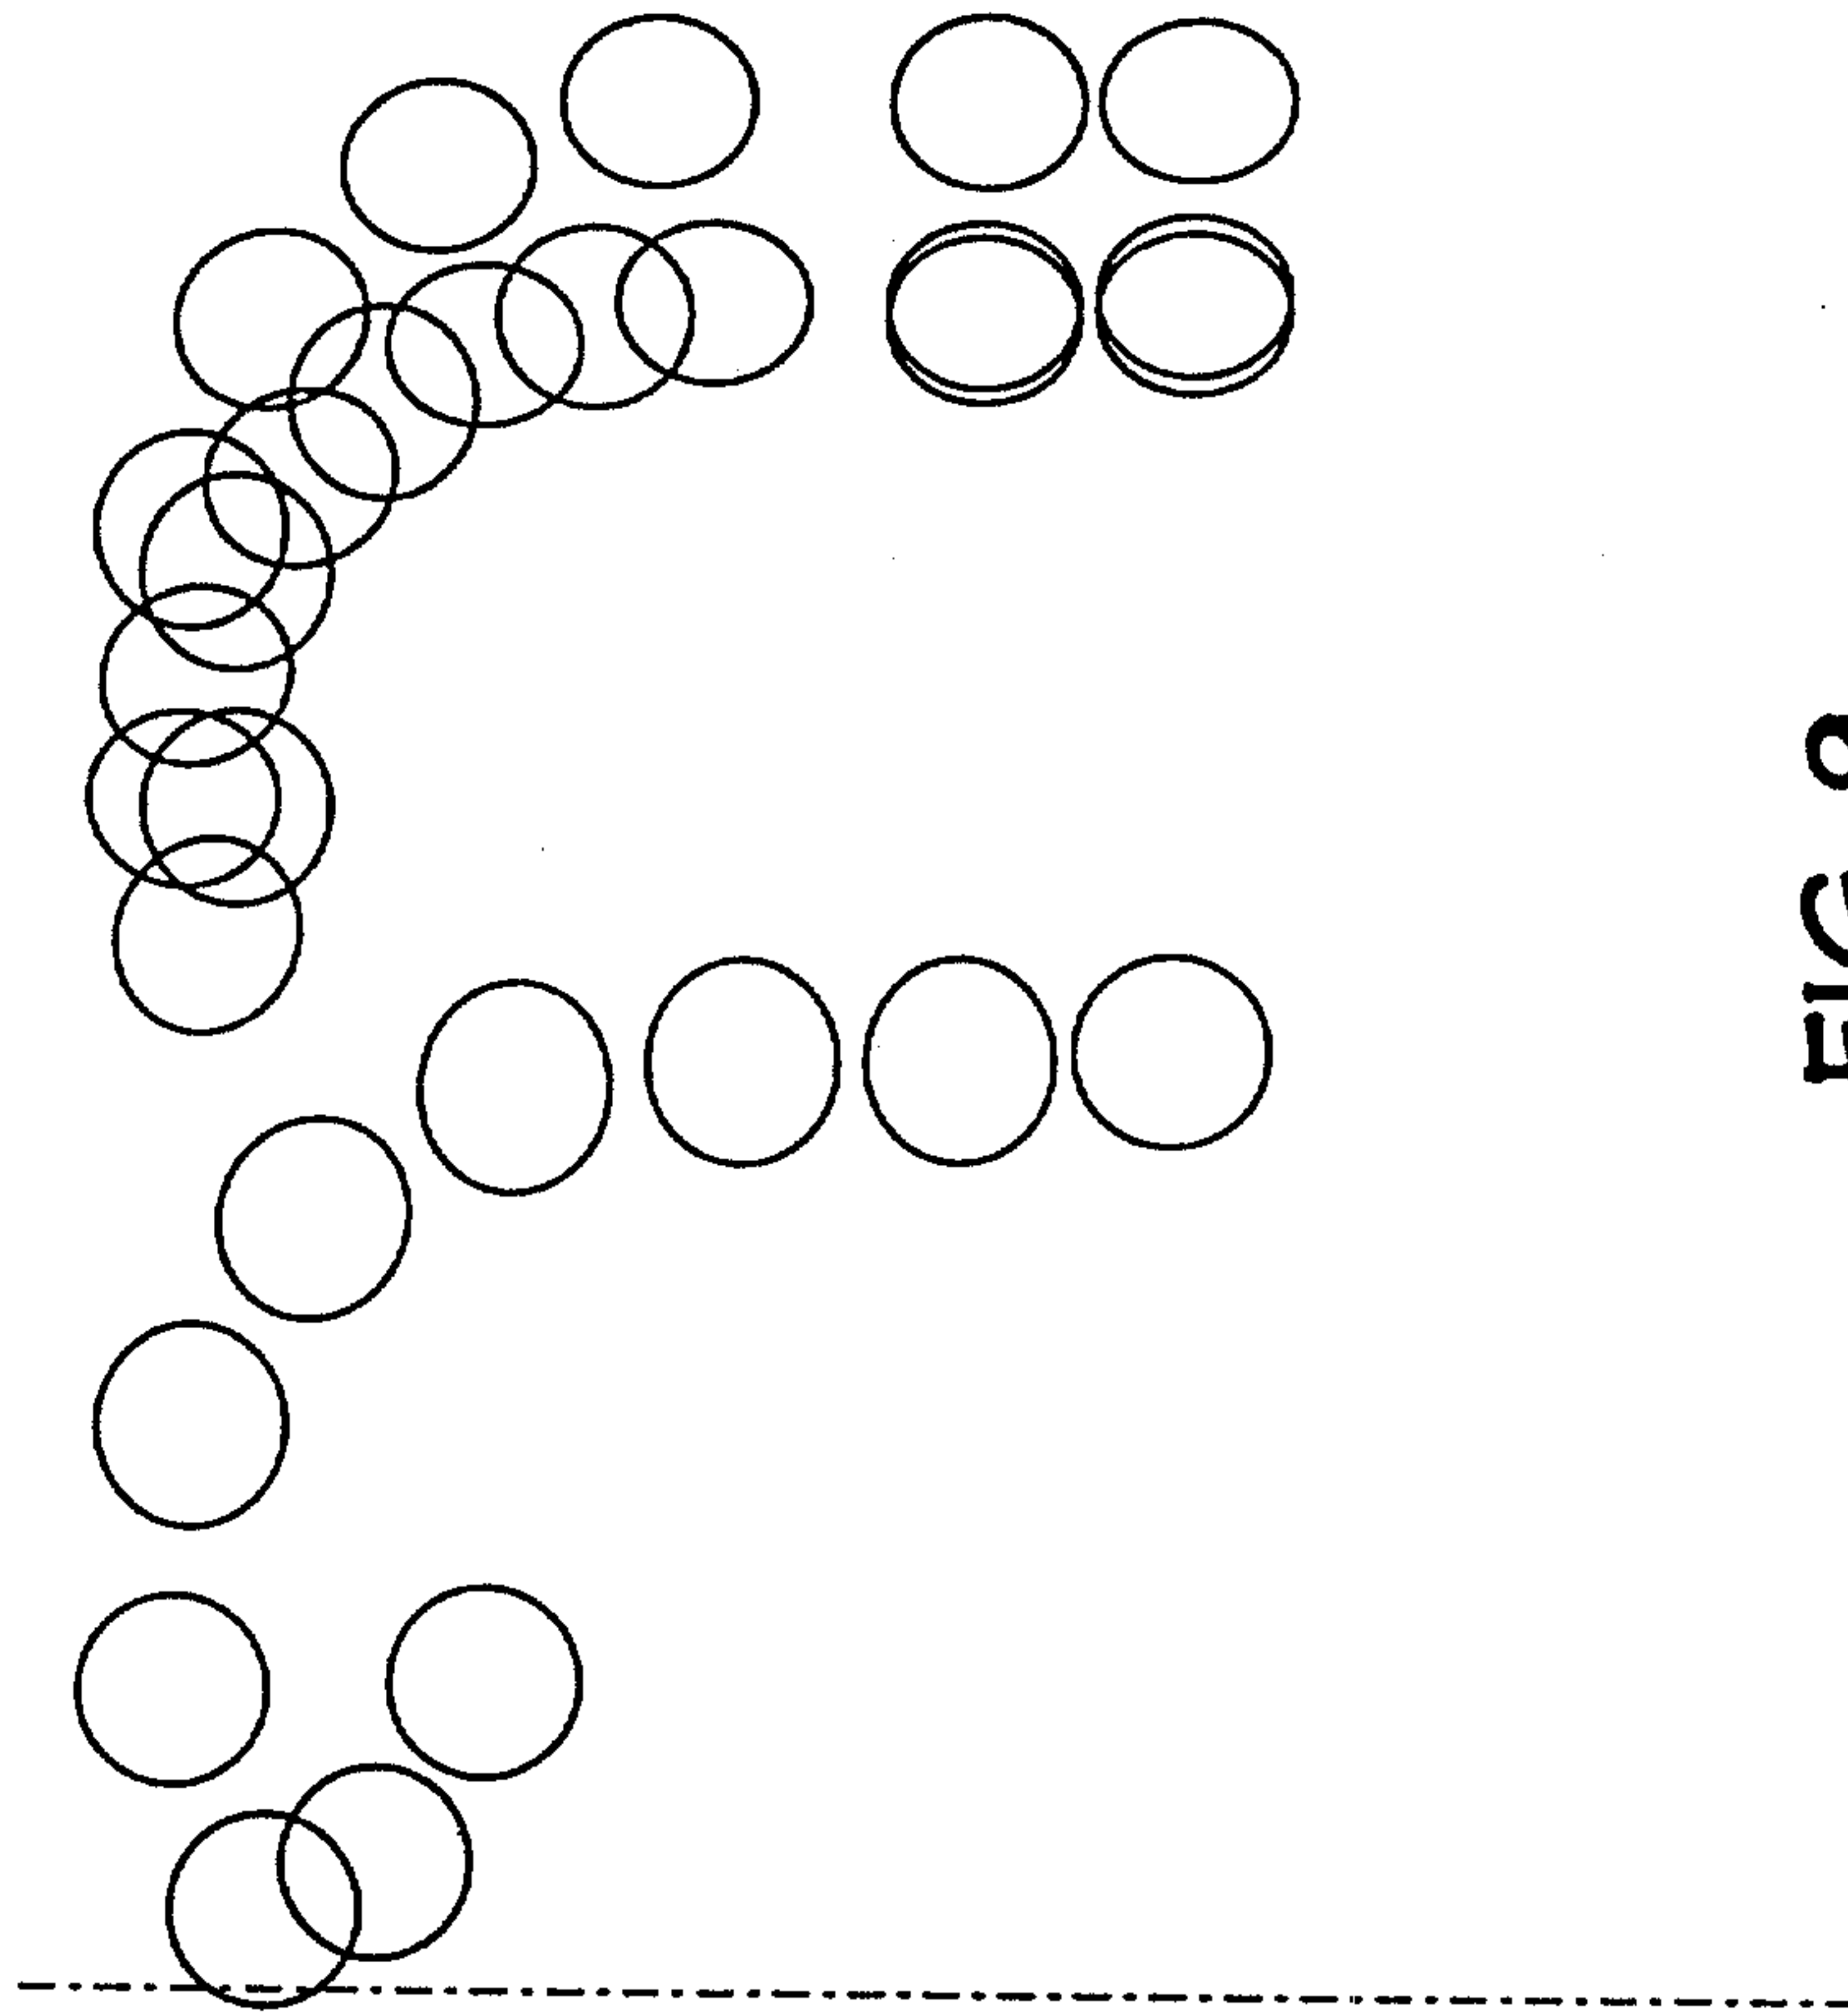


FIG. 9

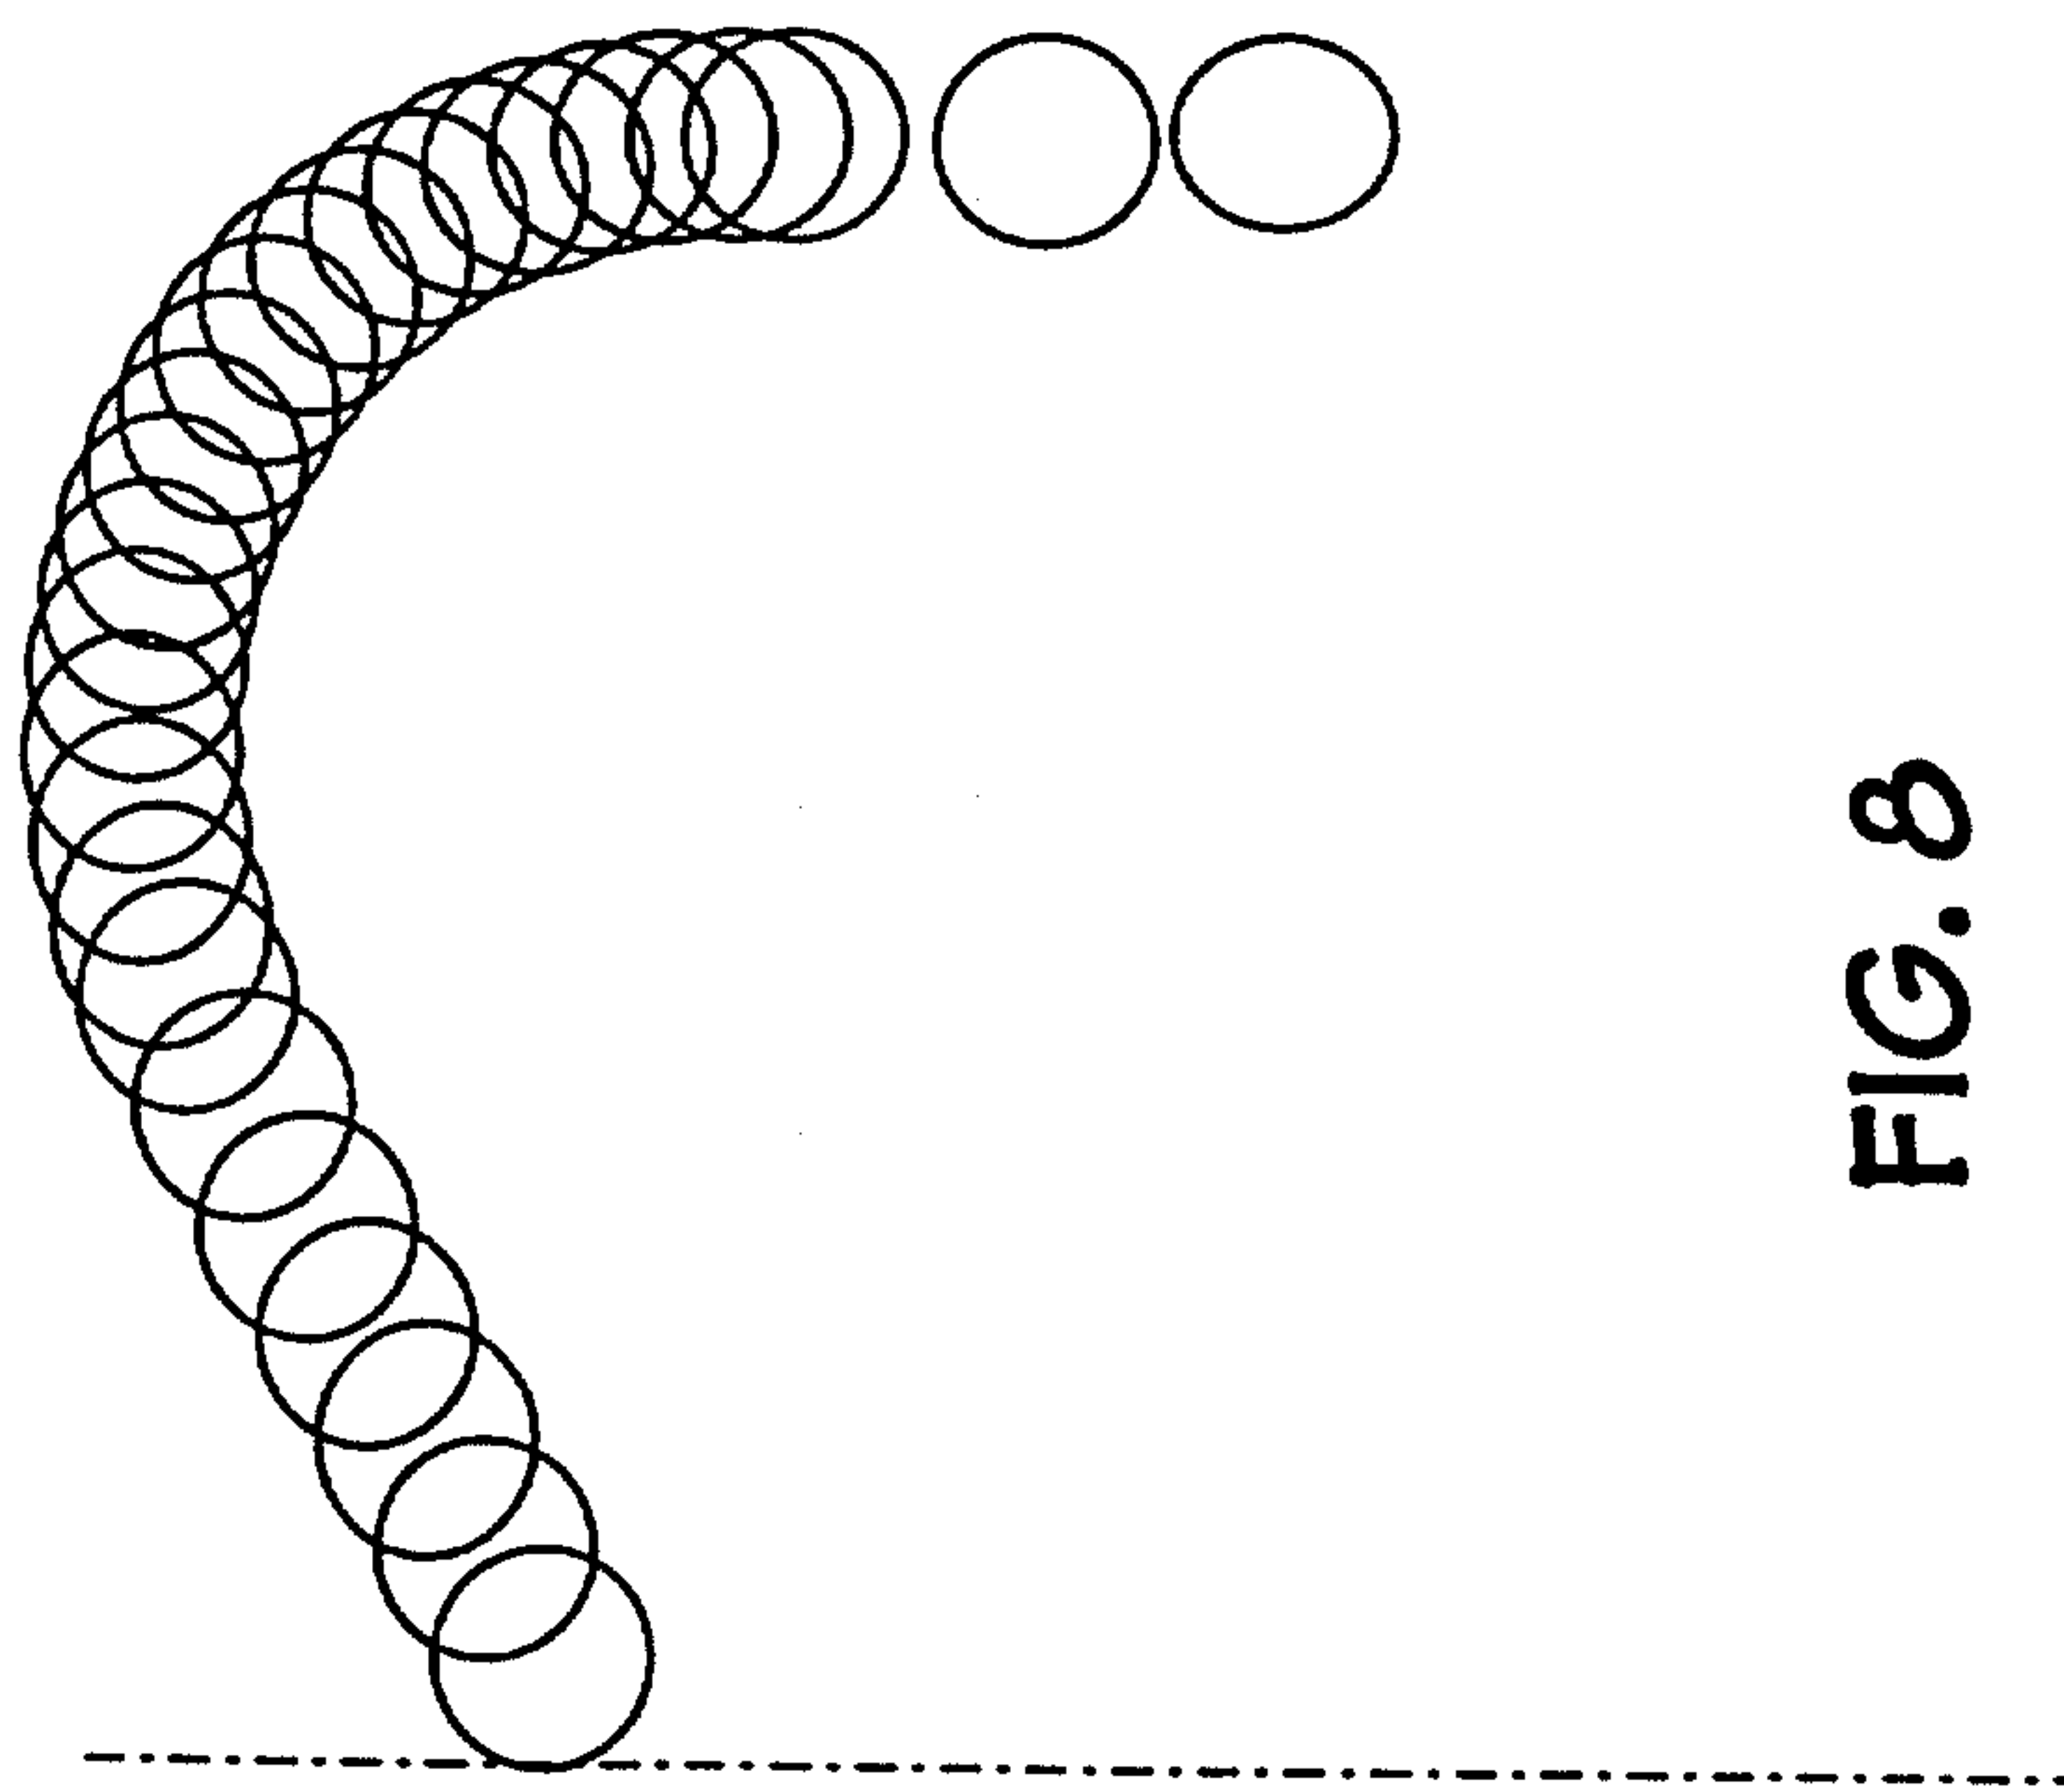
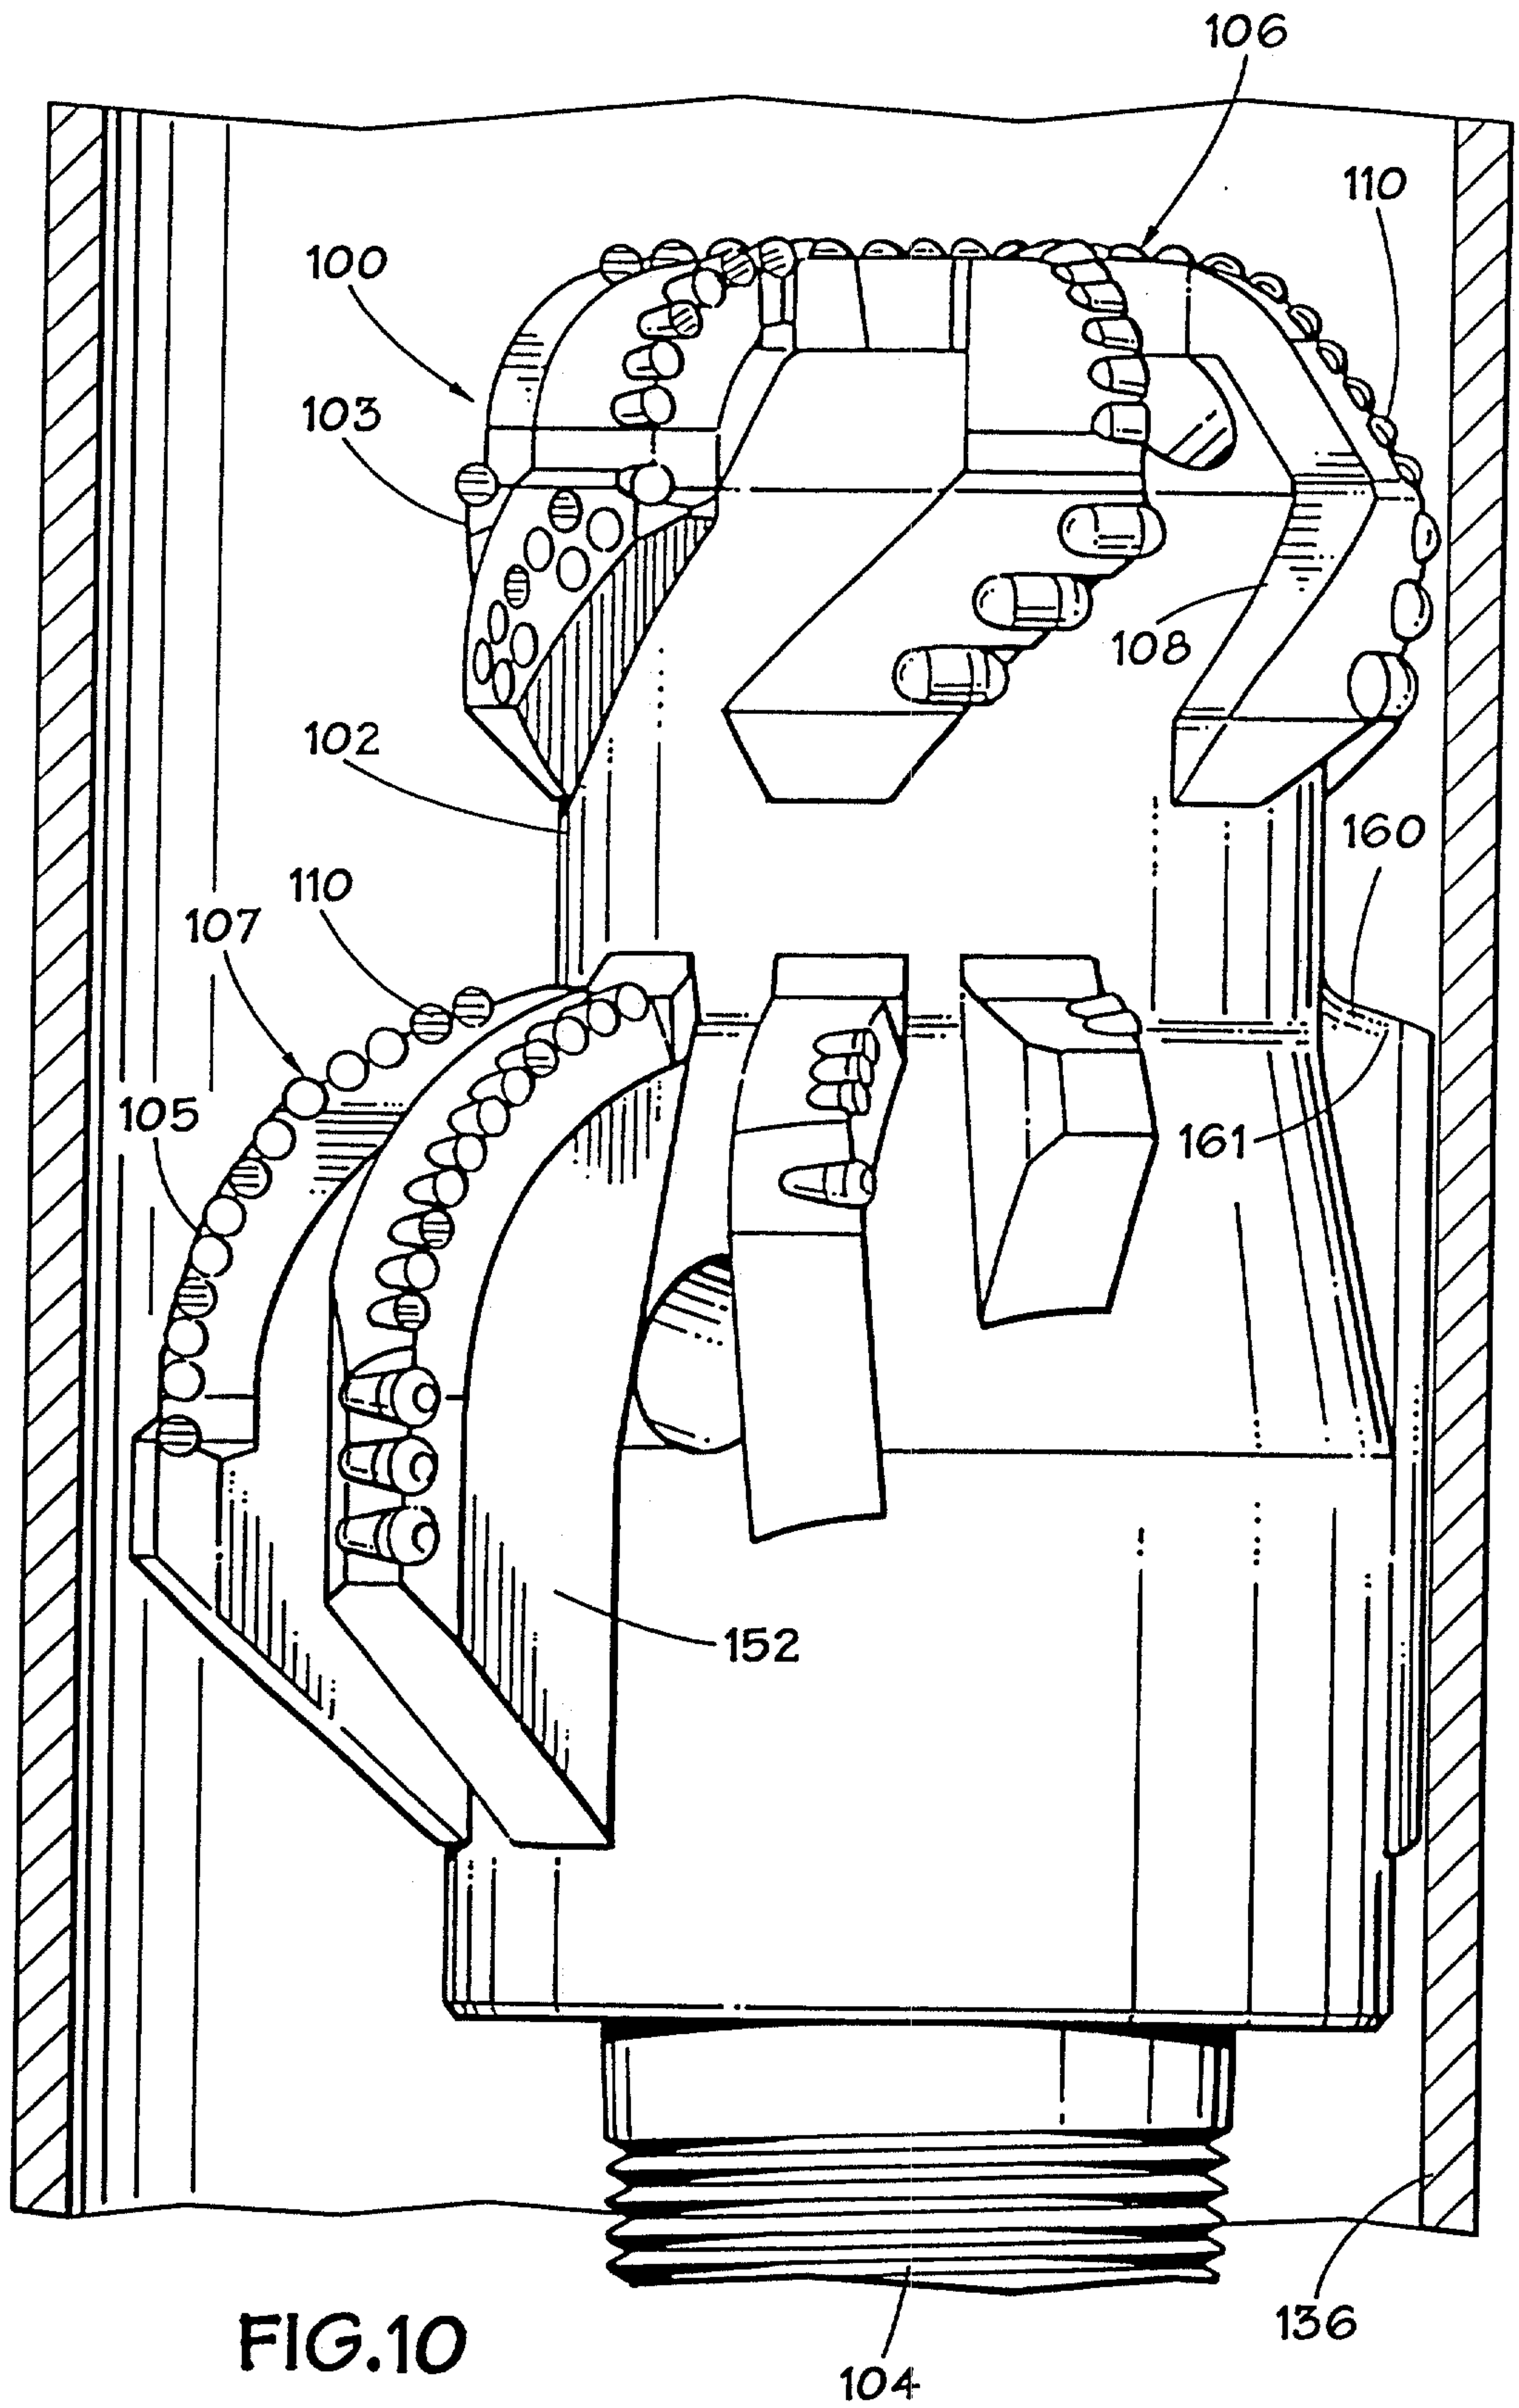


FIG. 8

+



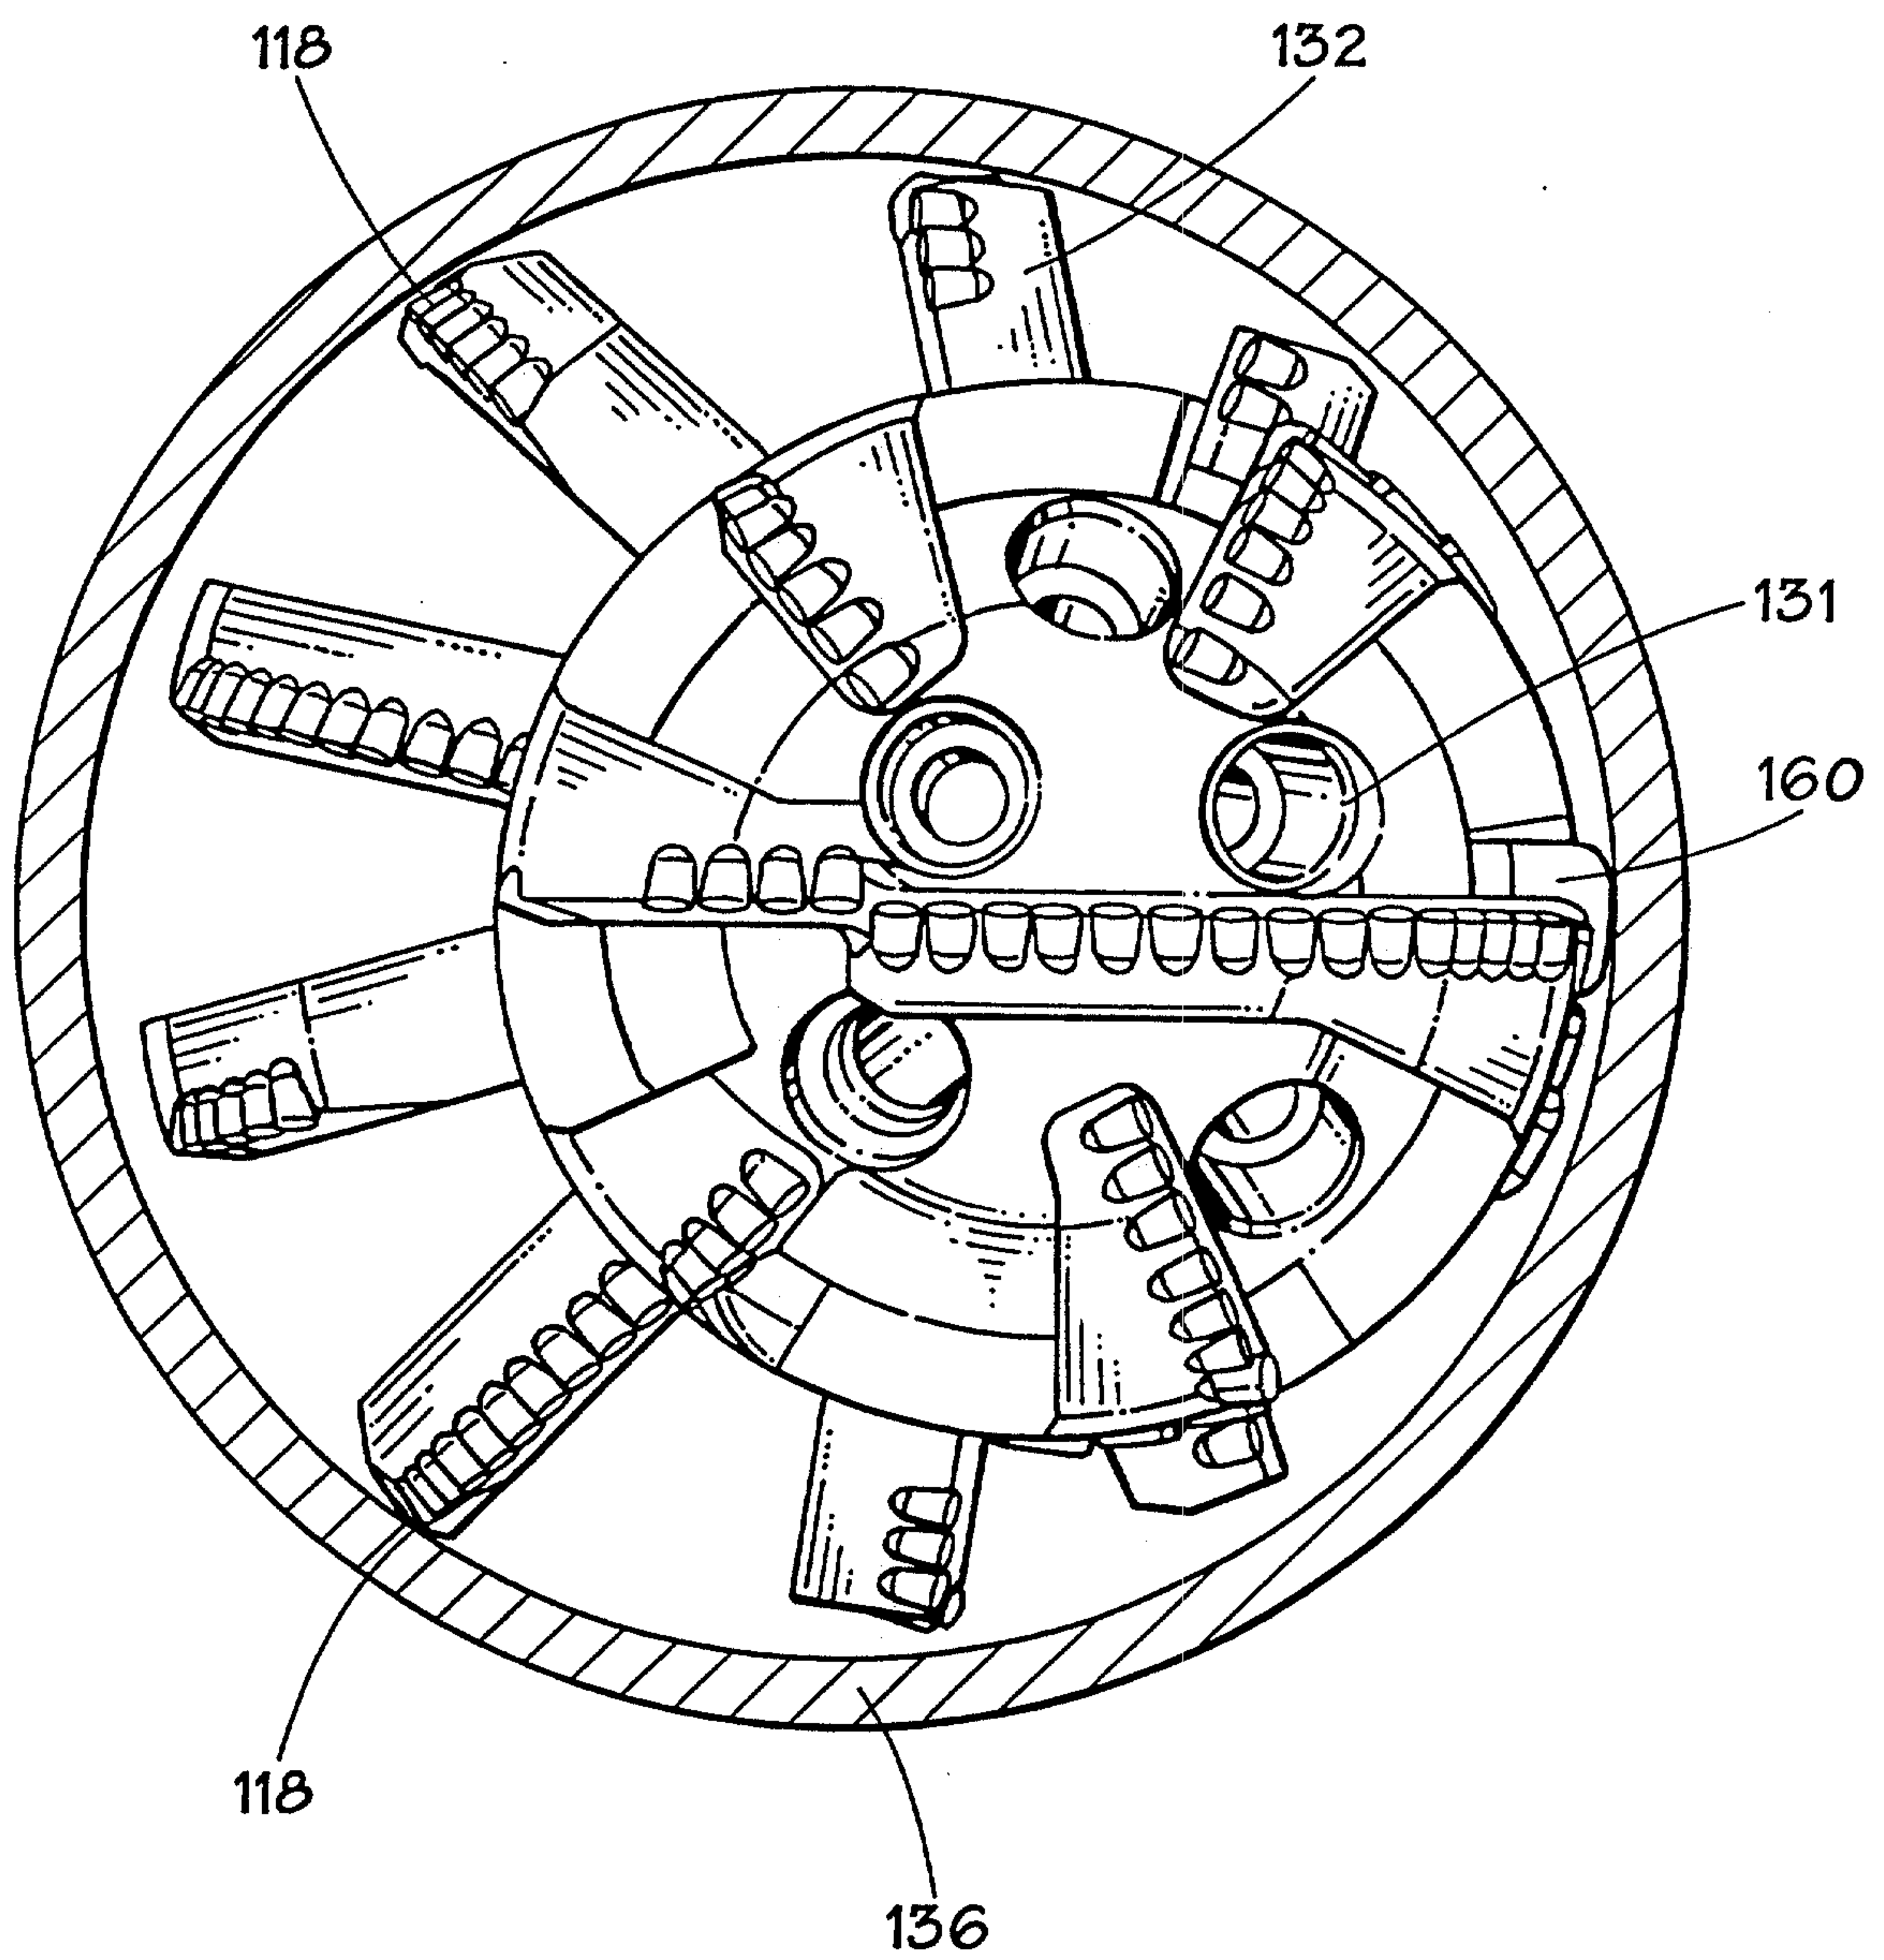


FIG.11

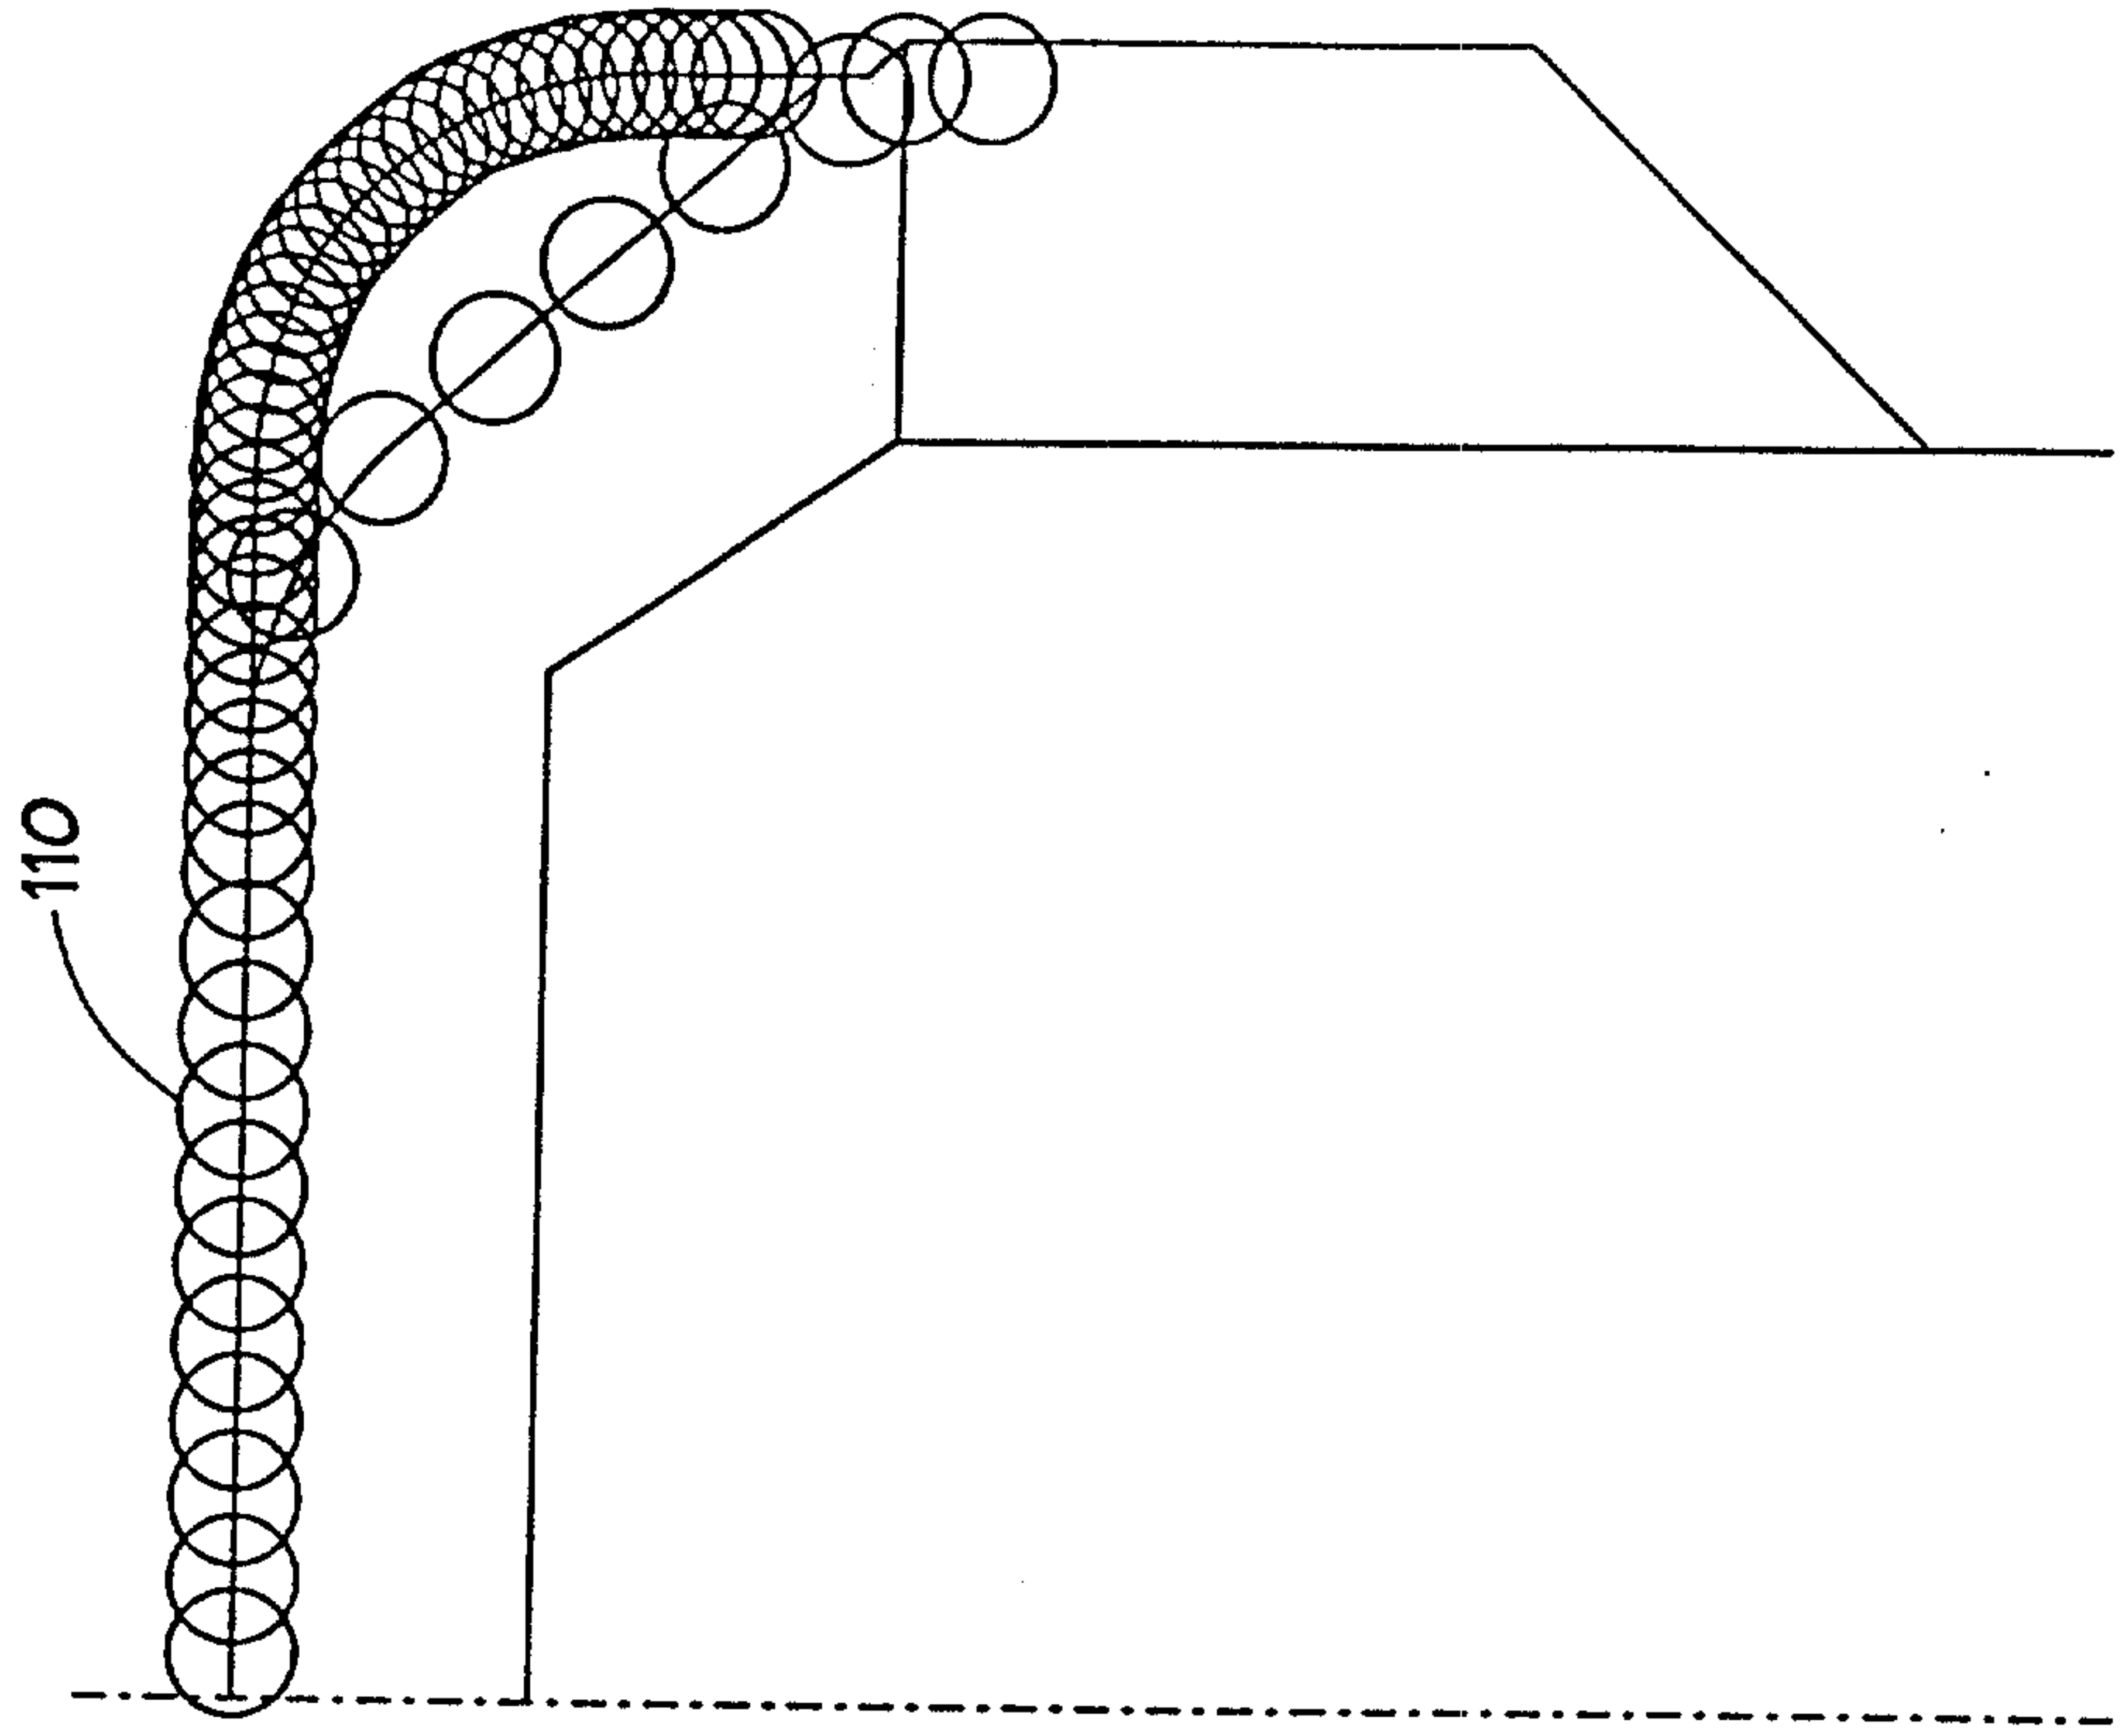


FIG. 13

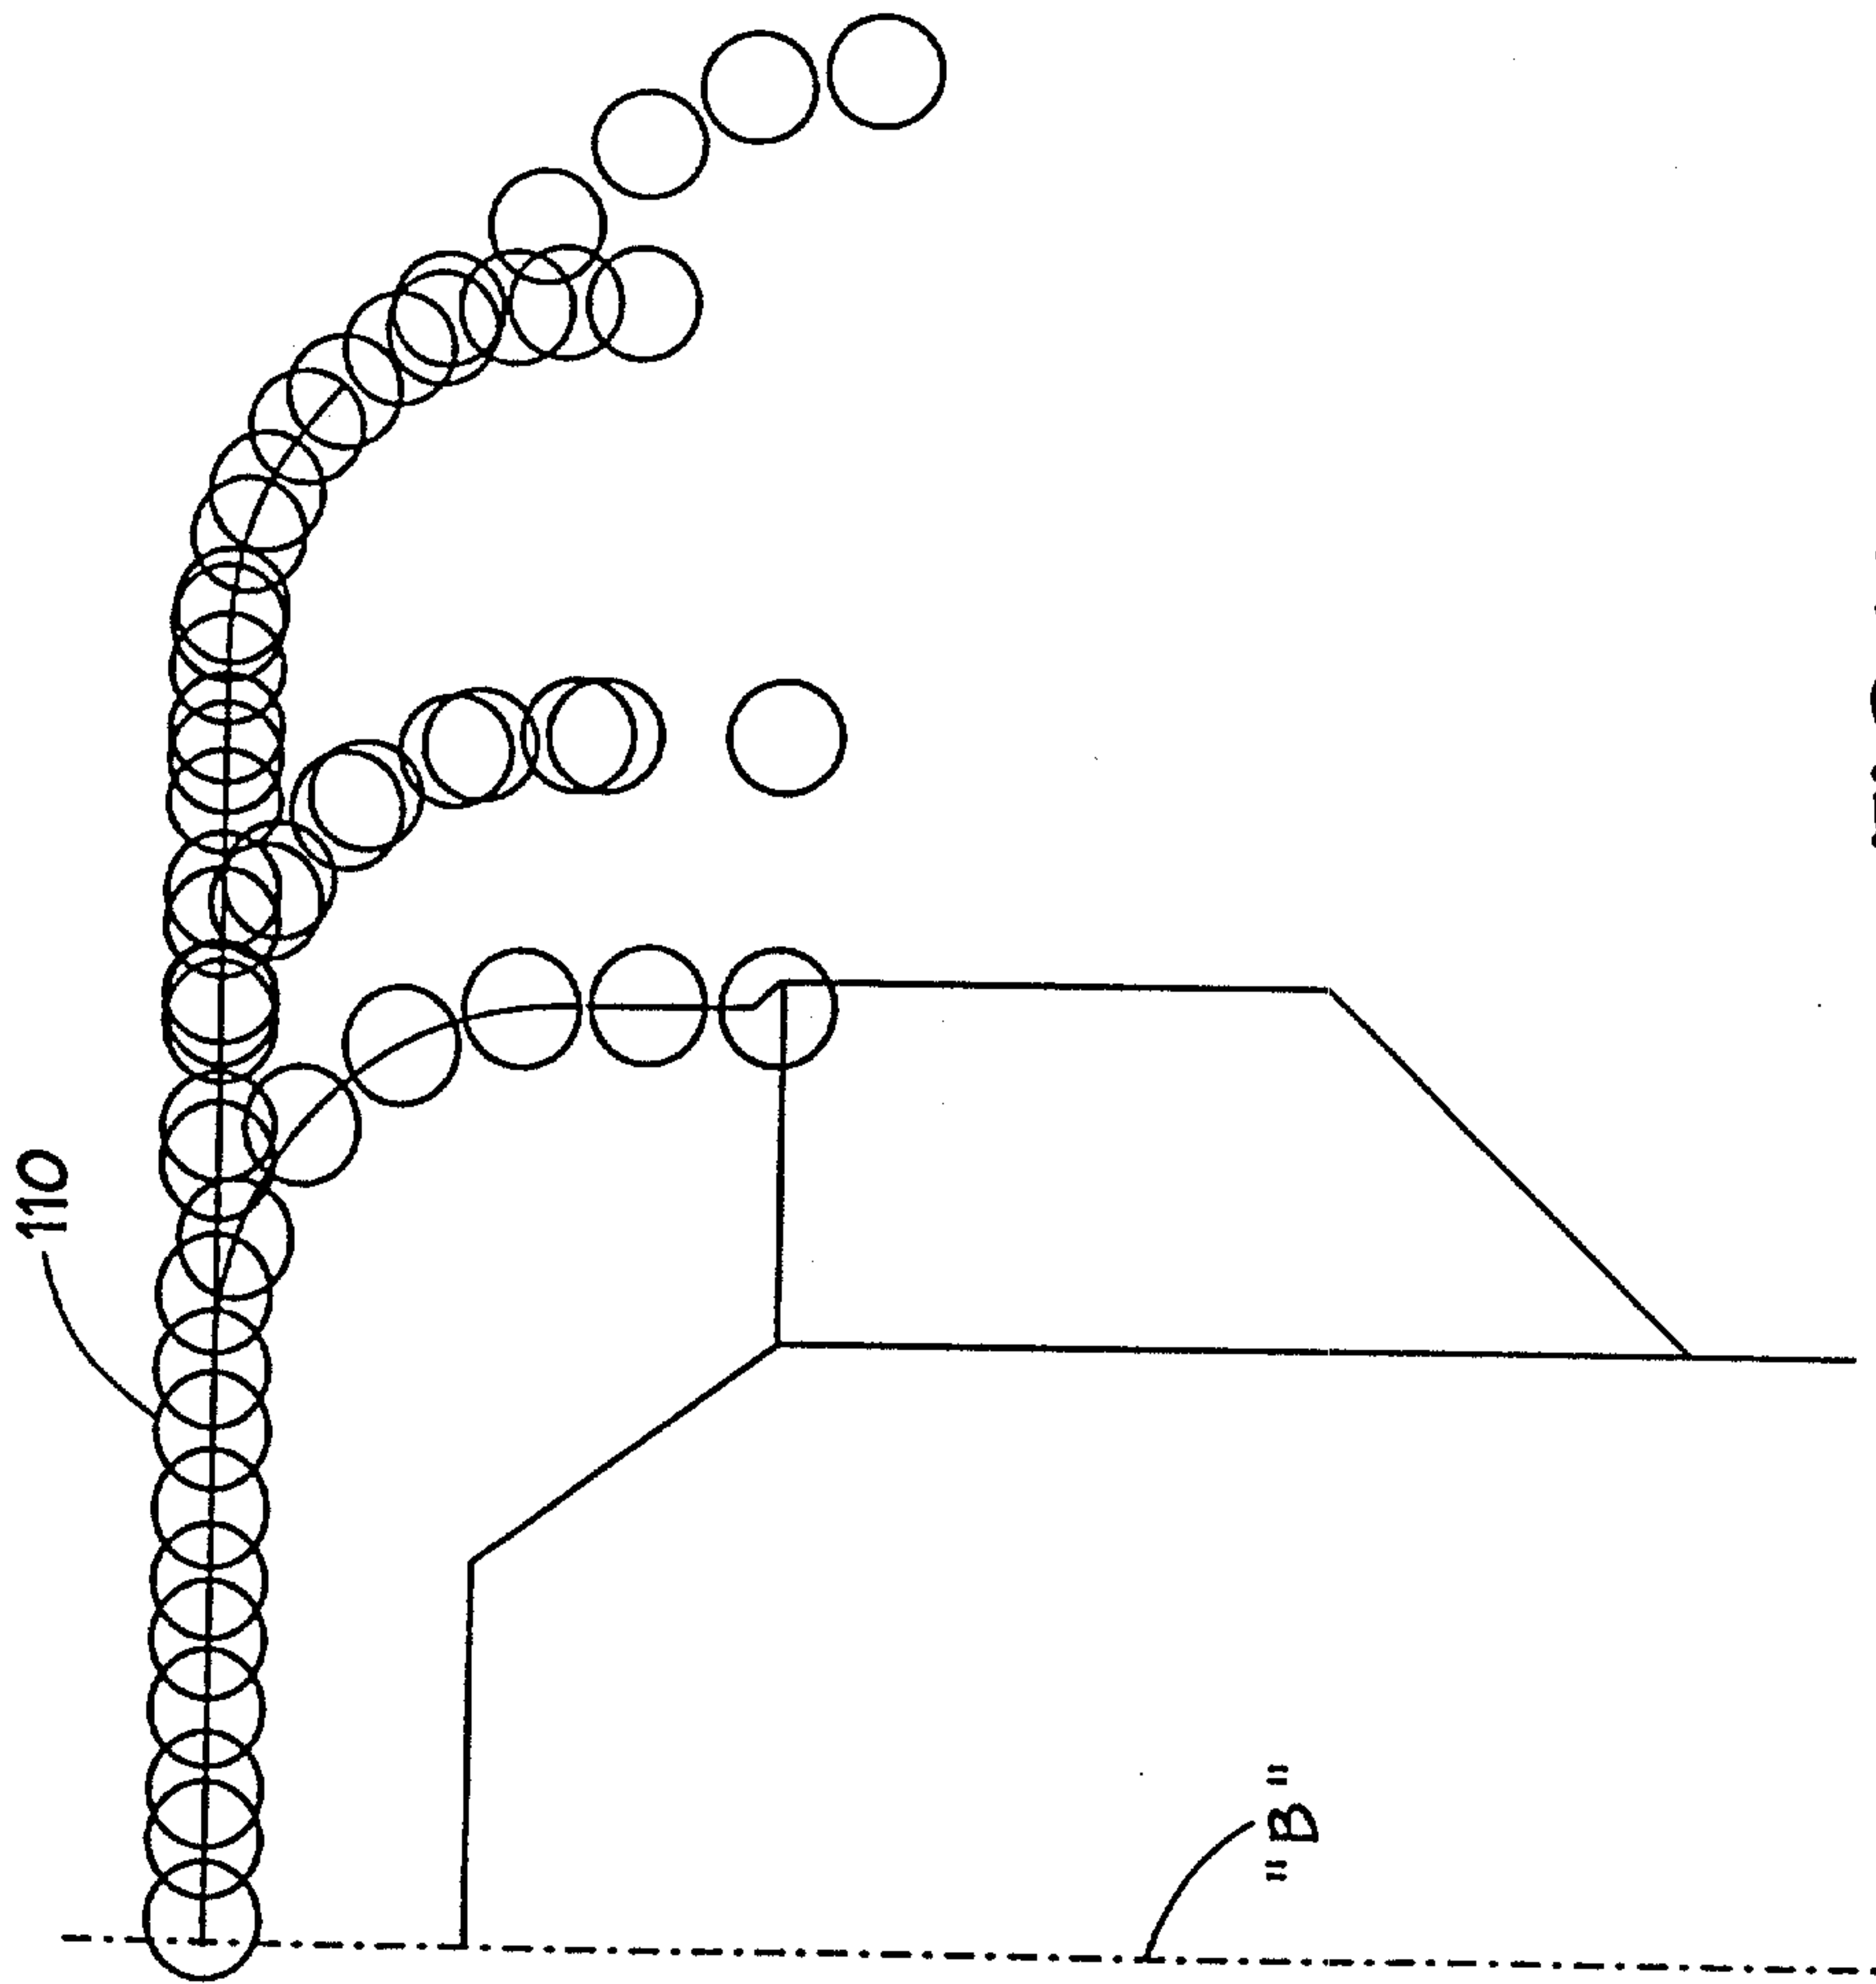


FIG. 12

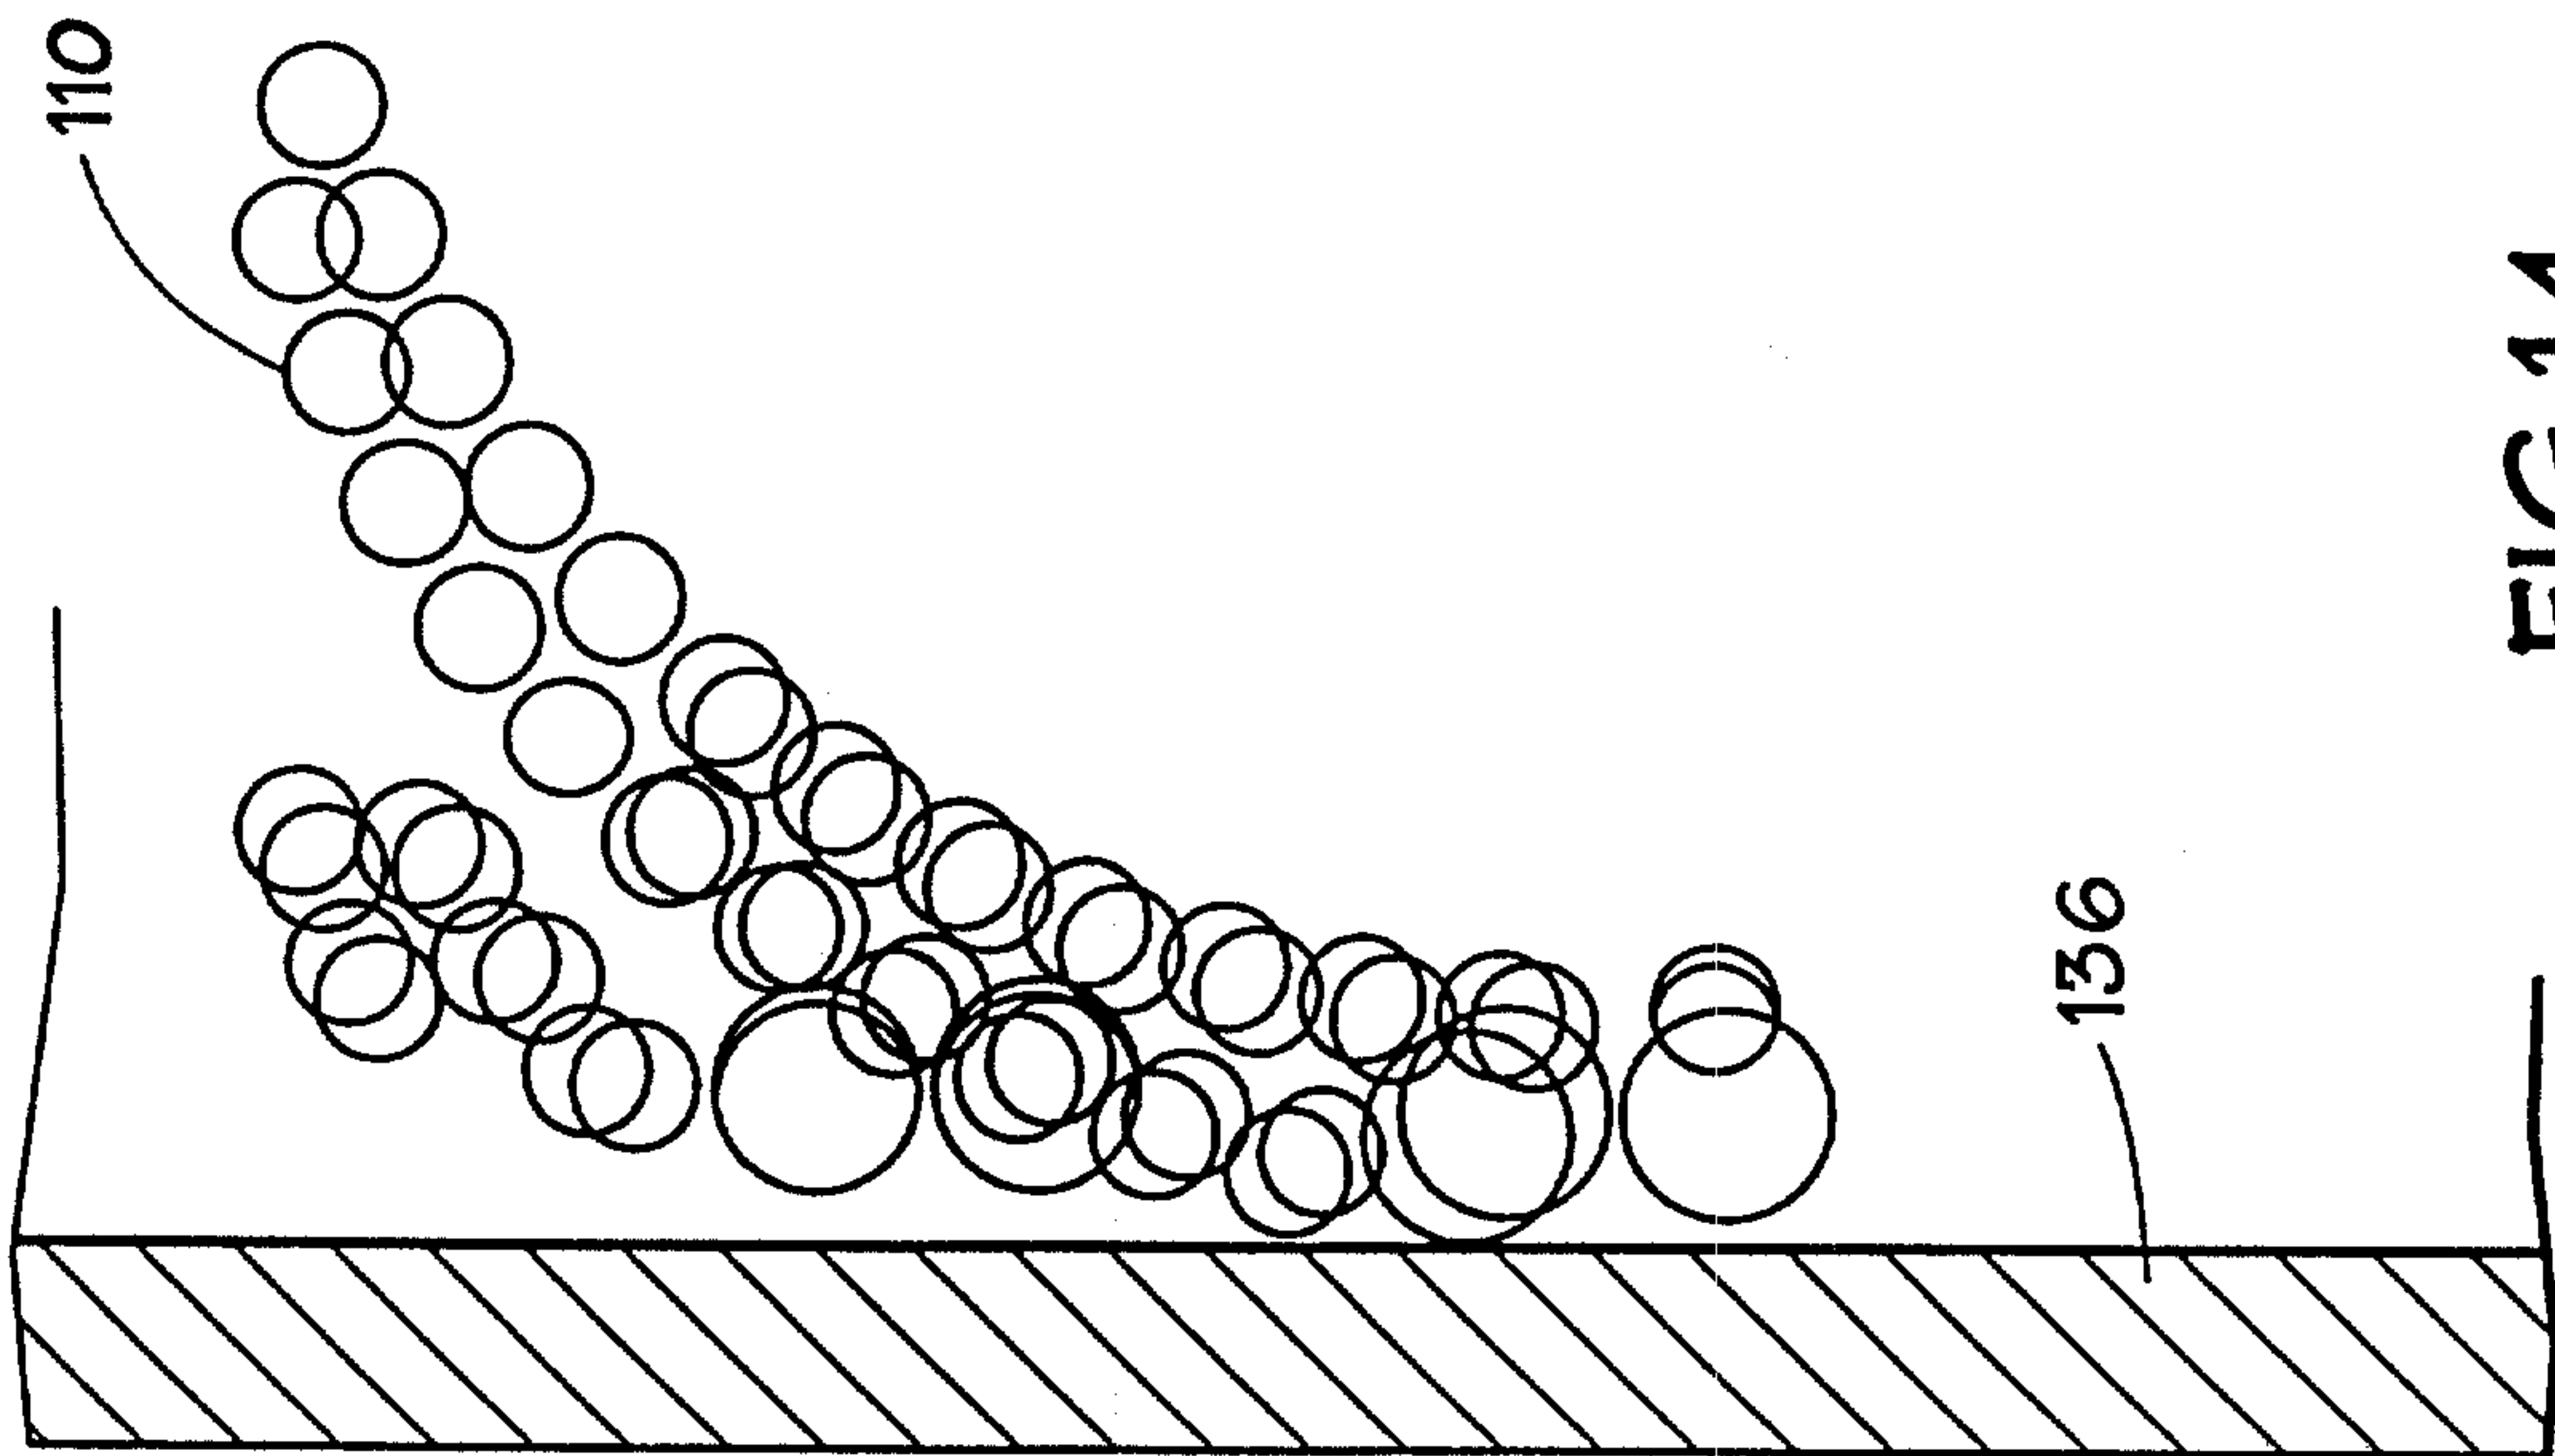


FIG. 14

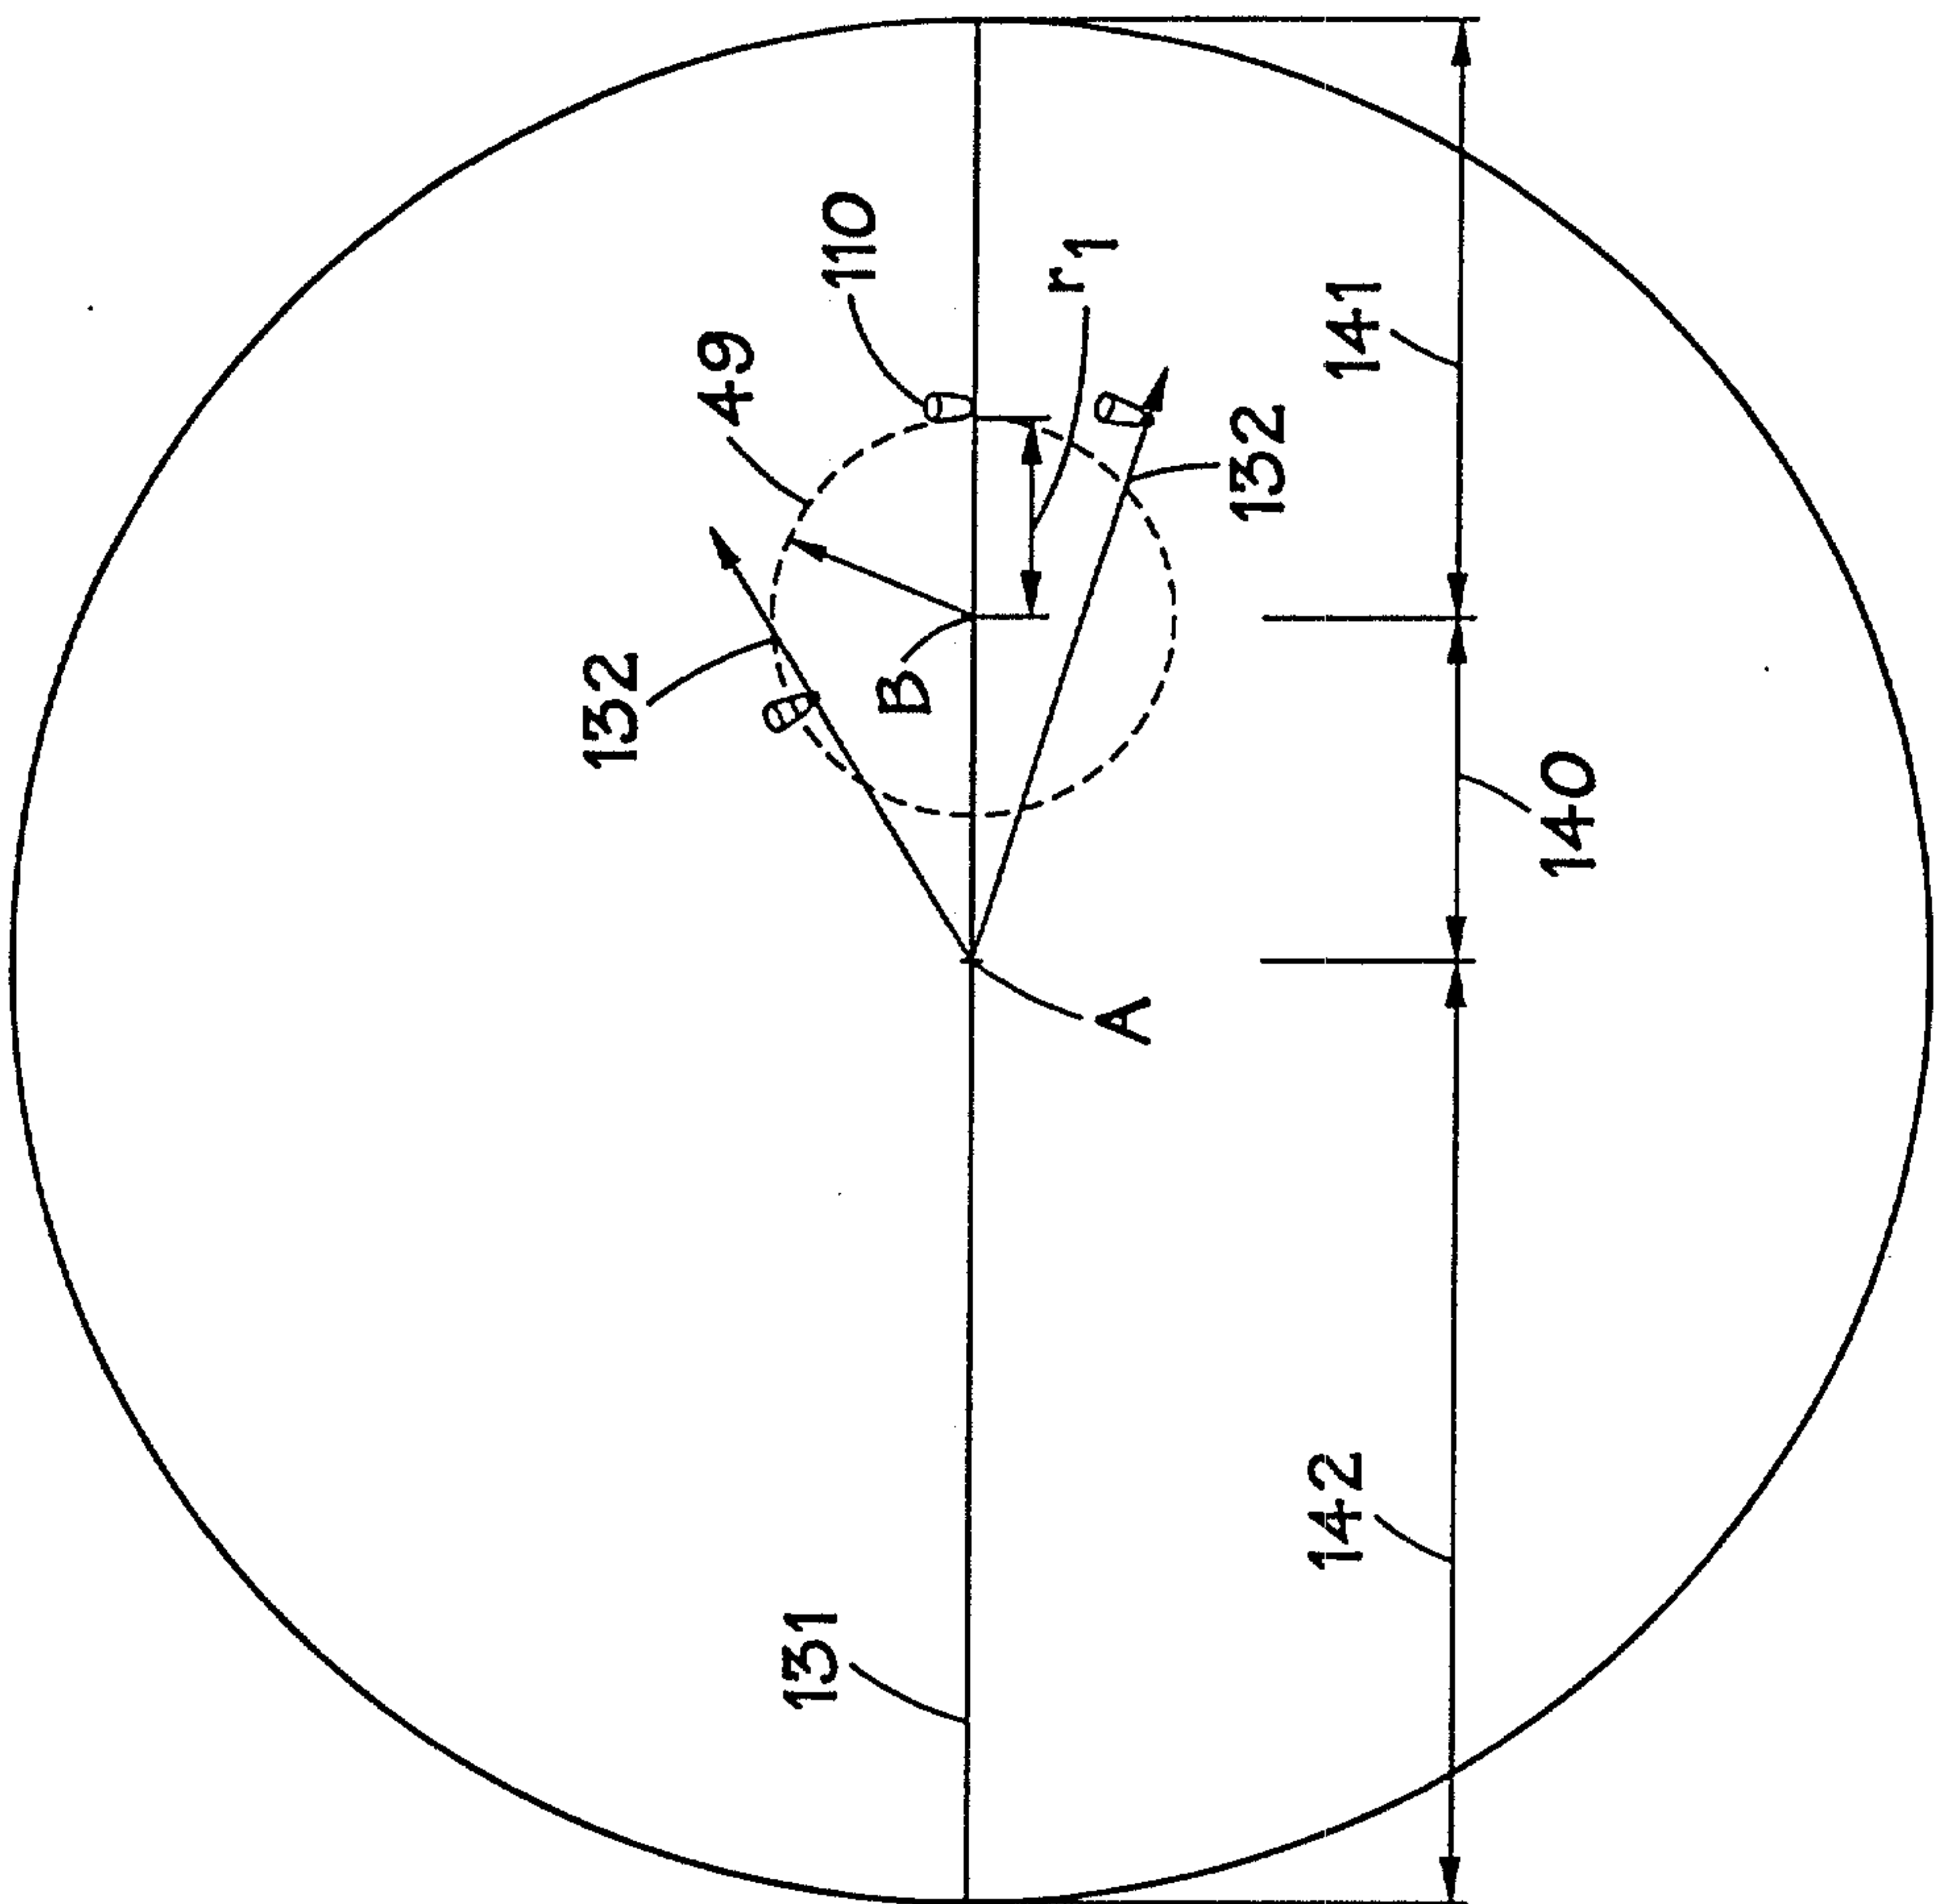


FIG. 15

