



(51) International Patent Classification:

A61M 16/06 (2006.01)

(21) International Application Number:

PCT/IB2021/054290

(22) International Filing Date:

19 May 2021 (19.05.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/027,243 19 May 2020 (19.05.2020) US

(71) Applicant: FISHER & PAYKEL HEALTHCARE

LIMITED [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).

(72) Inventor: HAMMER, Jeroen; 15 Maurice Paykel Place,

East Tamaki, Auckland, 2013 (NZ).

(74) Agent: FLINT INTELLECTUAL PROPERTY; PO Box

11058 Ellerslie, Auckland, 1542 (NZ).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,

ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEADGEAR FOR A PATIENT INTERFACE

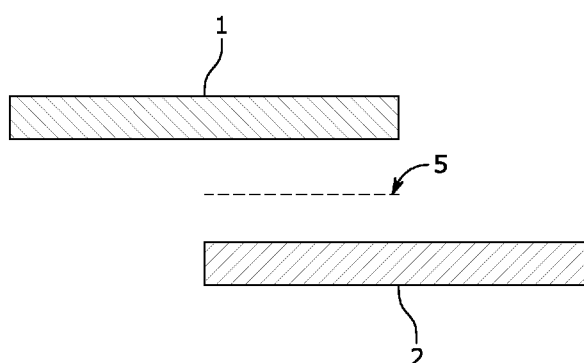


FIGURE 1A

(57) Abstract: A headgear for a patient interface, such as a respiratory interface, includes a plurality of panels which are lapped against each other. The panels define lapped parts of the headgear where panels overlap and/or underlap each other, and non-lapped parts of the headgear where a panel or panels are not lapped by another panel. The panels at the lapped regions are bonded to each other by an adhesive, such as a hot-melt adhesive. By combining panels having different properties, interfaces between panels having different lapping configurations, and by controlling the properties such as extensibility and stiffness of the adhesive when set a headgear may be provided location-specific features and properties.



HEADGEAR FOR A PATIENT INTERFACE

FIELD OF THE INVENTION

The present invention relates to headgear for a patient interface.

5

BACKGROUND TO THE INVENTION

Respiratory interfaces or masks are used to provide respiratory gas or gases, such as air in CPAP therapy, including in for example VPAP and BiPAP systems, or NIV, or high flow rate therapy, for example.

10 A respiratory interface may comprise a nasal, oral, or full face, i.e., both nasal and oral, interface. In turn an interface may be an indirect interface which covers the nose, mouth, or both, or an indirect interface such as an interface comprising nasal nozzles or pillows or similar which enter into the nares of the wearer.

15 Headgear for a respiratory interface may comprise at least two side straps which in use extend from a rear part of the headgear along the left and right sides of the patient's head to connect to the interface. Other configurations may include two sets of an upper and a lower side strap of each side.

Headgear may also comprise a top strap such as a crown strap or a
20 forehead strap, and respiratory headgear may be in various other forms. For example, headgear may comprise only a crown or forehead strap or an occipital loop, and a single strap on either side of the patient's head or face to the mask. Typically, the length of one or more of the headgear straps may be adjustable so that a patient can don the interface and headgear when the headgear strap or
25 straps are loose and then tighten the straps when the interface and headgear are in position, to hold the mask and headgear securely in position thereafter until removal or doffing.

SUMMARY OF THE INVENTION

30 Patients may use various types of respiratory interfaces or masks for the provision of different respiratory therapies. To enable the respiratory therapy to be provided to the patient the interface must be retained in some way relative to either or both of the patient's mouth and nose. This is particularly the case where the respiratory therapy involves the provision of pressurised gases; the interface
35 must be retained against the patient's face to provide at least some degree of a seal and prevent undesirable leakage of the respiratory therapy gases from the

periphery of the interface. A headgear may be utilised to provide this function of retaining the interface on the patient's face.

Respiratory interfaces or masks may be used in a variety of settings, including in hospital environments and in patients' homes. Various respiratory therapies may be provided either or both when a patient is awake or while they sleep.

While a primary function of the headgear may be to retain the interface to the patient's face to counteract any pressure-generated forces and/or to create a seal with the patient's face, how the headgear transfers forces to the patient's head may significantly influence the patient's comfort and potentially also their compliance with the respiratory therapy. Load-carrying portions of the headgear may be liable to cause irritation or discomfort. This may particularly be the case where an interface and headgear are to be worn for an extended period of time, such as when sleeping.

Where an interface and headgear are used when sleeping at least some parts of the headgear may be positioned between the patient's head and the bed. This may present further opportunities for discomfort for the patient, as a localised thickness of the headgear may cause increased pressures to be experienced by their head when the headgear is laid on.

Different patients also may have significantly different anatomies. For example, they may have different circumferences of their heads, different face and skull shapes, and different tissue depths and sensitivities in different regions. This may be exemplified at the back of a patient's head, where some patients may have predominantly muscular necks or necks which taper significantly from their skulls, while other patients have more fat tissue or necks which do not taper as significantly from their skulls. These differences may result in different fits or comfort levels for a given headgear between different patients.

While a headgear may be adjusted in some ways to fit different patients, for example by shortening or lengthening one or more of the straps, such adjustments may not adequately compensate for the differences in anatomy between patients. Such adjustments may additionally or alternatively not provide for sufficient support or at least the sensation of support of the headgear on the patient's head. Ideally a headgear may be adjusted to comfortably suit the patient's anatomy, but also securely and snugly fit to the patient's head in the adjusted state.

A headgear itself may have particular and localised requirements for its structure and function. For example, to retain any given respiratory interface with

some force, some regions of a headgear may experience greater loads than others. There may also be location specific needs for stiffness, flexibility, softness, any number of other properties.

Various aspects of the present disclosure provide a headgear comprising a plurality of panels, where at least part of each panel is lapped against at least part of another panel they are bonded together by an adhesive, and combinations of different panels having different properties and interfaces between panels having different lapping configurations provide for a headgear with the potential for location-specific features and properties.

The individual panels may according to at least some configurations be single plies or single layers of one material or a unitary composite of materials, as opposed to multiple layers of the same or different materials.

The use of an adhesive over other joining or bonding methods such as stitching or ultrasonic welding may provide for bonds between the panels of relatively decreased bulk or thickness or hardness (as compared to such other joining or bonding methods).

The use of adhesive over other joining or bonding methods may furthermore provide for tailoring of the structural and material properties at the bond. For example, an adhesive can be selected to have a substantially matching properties of the bonded panels (in particular stiffness, stretch and/or recoverability properties) such that the 'feel' of the bonded region of the panels is similar to that of the panels themselves. Advantageously, this will result in the patient of the headgear having increased comfort because they do not feel the joins between the panels when the headgear is on their head.

In other examples, an adhesive may be selected to provide different properties to the panels (such as stiffness, hardness and/or strength). In such examples, the adhesive may advantageously condition a selected portion of the panels to improve performance and/or resist undesirable deformation of the headgear in use.

Lapped regions may be fully or only partially bonded together, in particular by an adhesive. For example, a lapped region may include both bonded regions where the adjacent panel surfaces have been bonded together by an adhesive, and non-bonded regions where the adjacent panel surfaces are not bonded together with an adhesive.

Where lapped panels are bonded by an adhesive which substantially matches the properties of the lapped panels, there may be minimal or no difference

in the properties, including particularly stretch properties, of the headgear at the bonded lapped region when compared to a non-bonded lapped region.

Otherwise, where the properties of the panels differ (for example where the lapped panels are extensible in perpendicular directions) or where the properties of the adhesive do not substantially match that of the lapped panels there may be a difference in the properties, particularly stretch properties, of the headgear at the bonded lapped region compared to a non-bonded lapped region.

In addition to providing a desired performance of the headgear, adhesive may be utilised to provide different properties to the panels to change the 'feel' or appearance of the headgear. This may be employed to provide cues to the patient or other user as to orientation or use of the headgear.

The panels of headgear according to the disclosure may be entirely bonded together using one or more adhesives.

However, it will be appreciated that various embodiments may utilise one or more additional methods of bonding various panels or panel parts or other components together to form the headgear to some degree. For example, various panels or panel parts may include stitched joins, particularly at locations where such stitching may not undesirably impact on the bulk of the headgear or particularly thickness of the joins and comfort of the patient when wearing the headgear.

Conventional headgear is commonly constructed from one or more joined sections of a laminate comprising external fabric layers which sandwich an internal foam layer, such as a natural or synthetic rubber foam. An example of such a laminate material which is used in the construction of headgear is Breathe-o-prene[®]. Where a headgear is made from a joined sections of an existing laminate material such as Breathe-o-prene[®] the headgear will have a thickness of at least the three or more layers of the laminate. At joins between sections of the laminate the headgear will have the thickness of both joined sections. Even if efforts are made to reduce the thickness of the layers of each laminate, overlapping laminate sections can easily create undesirably thick regions and thus potential sources of discomfort for a wearer of the headgear. For example, where the laminates have three layers each, the resulting join will have a thickness of the total combined six layers.

According to the present disclosure a headgear may be formed by a plurality of single-ply panels where at least part of each single-ply panel is lapped against at least part of another single-ply panel, and the lapped panels are each bonded together. This may provide a headgear having a number of lapped regions

where two or more panels lap each other, and a number of non-lapped regions where panels are not lapped by another panel. At the non-lapped regions the headgear will comprise only a single-ply panel.

At one or more of the lapped regions the panels may be joined to each other to secure the panels together and define the headgear.

The panels may be cut to their respective desired shapes, then lapped with each other and joined together. Such a configuration may differ from conventional methods such as in the case of a laminate material such as Breathe-o-prene® where a headgear is built up by cutting already laminated panel sections, which are then joined together to form the headgear or parts of the headgear.

While the panels of the headgear may be cut to shape before they are lapped together and joined, in some forms at least some parts of the headgear may additionally or alternatively be cut once they are lapped together and potentially once one or more lapped parts are joined together.

Because the headgear of the disclosure may be formed from individual panels comprising single plies of one material or one composite of materials, rather than from joined laminates of multiple layers of different materials, the headgear may have reduced thickness. At non-lapped regions the headgear comprises only the thickness of one single-ply panel, rather than at least three plies as in the case of the use of a three-layer laminate material such as Breathe-o-prene®. This may allow for a relative reduction in thickness.

Similarly at lapped regions the headgear of the present disclosure may also have a reduced thickness, as a lapped region may have a thickness of only two panels compared to six panels in the case of a joint of two three-layer laminate materials such as Breathe-o-prene®.

The potential reduction in the number of panels and thickness at both lapped regions and non-lapped regions of the headgear of the present disclosure when compared to a conventional headgear made from joined laminate or multiply materials may provide either location-specific or overall reductions in the thickness of the headgear. Reduced thicknesses, whether in particular locations or across the whole headgear, may provide a visual and/or physical perceptions to a patient of reduced bulk. Reduced thicknesses may also provide increased comfort for a patient wearing the headgear.

Any such reduction in the number of panels present at different points of the headgear and its thickness may provide corresponding decreases in the overall weight of the headgear.

Joining panels together by way of an adhesive may also provide for either or both of reductions in thickness and weight, as the use of an adhesive may obviate the need for providing complex hems with stitching or welding.

According to another aspect, the present disclosure provides a headgear comprising a plurality of panels, where at least part of each panel is lapped against at least part of another panel they are bonded together to provide a thin and seamless or substantially seamless headgear.

According to another aspect, the present disclosure provides a headgear comprising a plurality of panels, where at least part of each panel is lapped against at least part of another panel they are bonded together to provide a lightweight headgear.

According to another aspect, the present disclosure provides a headgear comprising a plurality of panels, where at least part of each panel is lapped against at least part of another panel they are bonded together, wherein the panels are configured such that the headgear retains at least some of its in-use shape when in an at-rest state.

According to another aspect, the present disclosure provides a headgear consisting only of a plurality of panels that are bonded together using one or more adhesives.

According to another aspect, the present disclosure provides a headgear consisting only of a plurality of panels that are bonded together using only a single adhesive.

According to another aspect, the present disclosure provides a headgear for a patient interface, the headgear comprising a plurality of panels, each panel having two opposed major faces,

wherein the headgear has at least one lapped region in which at least two of the plurality of panels respectively overlap and underlap each other, and at least one non-lapped region in which one or more of the plurality of panels is not lapped by another of the plurality of panels, and

wherein at the or each at least one lapped region the panels are bonded to each other by an adhesive.

The headgear comprises a plurality of lapped regions and a plurality of non-lapped regions.

Each of the plurality of panels are provided at least partially within one or more of the plurality of lapped regions.

At least some of the plurality of panels are also provided at least partially within one or more of the plurality of non-lapped regions.

Each of the plurality of panels are also provided at least partially within one or more of the plurality of non-lapped regions.

A lapped region comprises a substantially continuous region of two or more lapping panels.

5 A non-lapped region comprises a substantially continuous region of one non-lapped panel.

In at least one of the plurality of lapped regions one or more of:

a first panel and a second panel lap each other,

10 a first panel is lapped on respective sides between a second panel and a third panel, and

more than three panels, comprising at least a first panel, a second panel, a third panel, and a fourth panel, are consecutively lapped against each other.

Each panel of the plurality of panels at the lapped region is bonded to the one or both adjacent panels by an adhesive.

15 At least one of the plurality of panels comprises a different material to that of another panel of the plurality of panels.

At least one of the panels at a lapped region comprises a different material to that of another panel at a lapped region.

The first panel comprises a different material to that of the second panel.

20 The second and third panels comprise the same material, which is a different material to that of the first panel.

Different materials comprise one or more of a different texture, softness, stiffness or flexibility, stretch properties, density, thickness, colour, frictional coefficient in relation to a reference material, breathability, or degree of
25 transparency or sheer.

Different materials comprise one or more of a directionally different: texture, softness, stiffness or flexibility, stretch property including extensibility and/or recoverability or in particular elasticity, or frictional coefficient in relation to a reference material.

30 The two opposed major faces of at least one panel of the plurality of panels comprises one or more of a different texture, frictional coefficient, or colour of the opposed major faces of the panel.

Exposed portions of major faces of the plurality of panels define an internal surface and an external surface of the headgear relative to the head of a patient in use, and wherein at least some of the plurality of panels each define part of the
35 internal surface and/or the external surface of the headgear.

The at least some of the plurality of panels comprise one or more of a different texture, softness, colour, or frictional coefficient in relation to a reference material.

5 The at least some of the panels defining part of the internal surface of the headgear comprise a greater surface softness than that of at least some of the panels defining part of the external surface of the headgear.

Only some of the plurality of panels define the internal surface and only some of the plurality of panels define the external surface.

10 Excluding the or each at least one non-lapped region, an exposed portion of a panel either defines part of one or the other of the internal surface and external surface.

The plurality of panels comprise a panel of first stretch material and a panel of second stretch material, where the stretchability of the first stretch material and the second stretch material are different.

15 The first stretch material is more stretchable than the second stretch material.

The plurality of panels comprise at least one elasticated fabric panel and at least one non-elasticated fabric panel.

20 The plurality of panels comprise:
a rear portion for location at the rear of the head of a patient,
a crown strap, and
at least two side straps for attachment to the patient interface.

The rear portion transfers loads between the at least two side straps, and the rear portion comprises at least one panel of a first material which laps a portion
25 of a side strap panel of each of the at least two side straps.

The rear portion comprises a plurality of panels of the first material, and each of the at least two side straps are lapped on respective sides by panels of the first material.

30 An extent of the rear portion to be located lowest on the rear of the head of a user comprises a lower panel of a second material.

The second material is non-unravelable material.

The lower panel is lapped to or between one or more of the plurality of panels of the first material.

35 The lower panel of the second material is more stretchable than the plurality of panels of the first material.

The lower panel of the first material is a stretch panel and the plurality of panels of the first material are non-stretch panels.

The lower panel of the second material is elasticised, and the plurality of panels of the first material are non-elasticised.

The lower panel of the second material has a greater elasticity than the plurality of panels of the first material.

5 The second material is an elastic material, and first material is a substantially inelastic material.

A portion of the lower panel is in a non-lapped region of the headgear, and the portion of the lower panel is substantially crescent-shaped.

10 At least a portion of the lower panel within a non-lapped region of the headgear is substantially crescent-shaped, having a concave edge and a convex edge, and wherein the concave edge forms at least a portion of a lower peripheral edge of the rear portion.

15 The rear portion comprises an upper edge panel, the upper edge panel forming at least a portion of an upper peripheral edge of the rear portion, the upper edge panel comprising a material that is thinner and/or softer than that of a panel to which it is lapped.

The upper edge panel is lapped to another panel at the rear portion so as to define an internal surface, relative to the head of a patient in use, of the headgear at an upper region of the rear portion.

20 The upper edge panel is provided within both a lapped region and a non-lapped region, and wherein the non-lapped region forms at least part of an upper peripheral edge of the rear portion.

25 The upper edge panel at the non-lapped region is configured, in use and towards the upper peripheral edge of the rear portion, to roll away from the head of the patient.

The upper edge panel at the non-lapped region extends away from an adjacent lapped region a distance of about 5 times to about 20 times the thickness of the upper edge panel.

30 The crown strap defines an internal surface oriented towards the head of the patient in use and an external surface oriented away from the head of the patient in use, and wherein the internal surface has a greater softness than that of the external surface.

The crown strap depends from the rear portion.

35 The crown strap depends from the rear portion and at least one side strap of each lateral side of the rear portion and/or crown strap.

The crown strap has a width greater than that of the at least two side straps.

The crown strap is of a different colour to that of the at least two side straps.

The crown strap comprises a pair of crown strap portions which are adjustably fixable to each other to provide a variable-length crown strap, each
5 crown strap portion comprising an internal crown strap portion panel and an external crown strap portion panel adhesively bonded to each other.

The internal crown strap portion panels have a greater softness than that of the external crown strap portion panels.

The internal and external crown strap portion panels respectively overlap
10 and underlap the panel or panels of the rear portion and/or side straps to which they are lapped.

The crown strap is relatively stiffer and/or denser than the rear portion.

The crown strap comprises one or more panels of a material having a greater stiffness and/or greater density than that of one or more panels comprising
15 the rear portion.

The at least two side straps comprise two lateral sets of an upper and a lower side strap, each set of side straps for connection to corresponding sides of the patient interface.

The two upper side straps comprise a unitary panel which extends across
20 the rear portion of the headgear.

The unitary panel is provided within a lapped region across at least part of the rear portion of the headgear and within a pair of distal non-lapped regions.

An upper and lower side strap comprise a unitary panel, the unitary panel configured to extend around a rear of the ear of a patient.

25 A lapped region of the upper side straps is respectively overlapped and underlapped by panels of the crown strap.

The lower side straps are overlapped and underlapped by a plurality of panels of the rear portion.

An ear loop for passing behind the ear of a patient defines a lateral
30 peripheral edge of the rear portion between each lateral set of upper and lower side straps.

The edge profile of each ear loop comprises a pair of straight-line portions.

The pair of straight-line portions form a V-shape, the tip of each V directed towards the other and into the rear portion of the headgear.

35 The two upper side straps comprise two respective panels, each provided within a lapping region at the rear portion of the headgear and within distal non-lapping regions.

Each of the two respective panels of the two upper side straps are overlapped and underlapped by panels of the rear portion of the headgear.

Terminal portions of either or both of the upper and lower side straps include gripping tabs comprising a first and second tab panels, the tab panels
5 respectively overlapping and underlapping the terminal portion at a first tab region and lapping each other at a more distal second tab region.

The first and second tab panels are of a material that is one or more of thinner, softer, of a different colour, or has a lower coefficient of friction with respect to a reference material than that of the material of the respective straps of
10 the sets of upper and lower side straps.

The first and second tab panels are of a plastics material that is one or more of thinner, harder, stiffer, of a different colour, or has a lower coefficient of friction with respect to a reference material than that of the material of the respective straps of the sets of upper and lower side straps.

15 The headgear at the second more distal tab region is of greater stiffness than the headgear at the first tab region.

The second more distal tab region is thinner than one or more of the upper and lower side straps at a non-lapped region.

The gripping tabs further comprise at one external surface a first half of a
20 hook and loop fastener.

The side straps are configured such that the strap surface which corresponds to the first half of the hook and loop fastener, when the strap is folded back on itself, comprises a second half of the hook and loop fastener.

The at least two side straps comprise a left and right side straps, each side
25 strap for connection to a corresponding side of the patient interface.

Each side strap of the set of side straps is configured to fold back onto and attach to itself to define a connection loop by which the patient interface may be retained.

Each side strap of the set of side straps comprises a series of visual
30 features along at least one surface of the side strap, the visual features for indicating adjustment points to the patient when folding a side strap back onto itself.

The visual features are regularly spaced along the surface of each side strap.

35 Each side strap of the set of side straps comprises a series of tactile features along at least one surface of the side strap, the tactile features for

providing a tactile feedback to a patient of different adjustment conditions of the respective strap.

The series of tactile features provide for indexing of the adjustment of each respective side strap.

5 An interaction of the tactile features with the patent interface provide the tactile feedback to the patient.

Each side strap comprises a strap panel, the strap panel lapped on at least one major face with a tactile feedback panel, wherein the tactile feedback panel is one or more of thinner, harder, and stiffer than the strap panel which it laps and
10 wherein the tactile feedback panel and the strap panel are bonded by an adhesive.

The tactile feedback panel comprises the tactile features, the tactile features provided by a series of voids through the tactile feedback panel.

The series of voids present the tactile feedback panel as having a series of ridges relative to the strap panel to which it is lapped.

15 The tactile feedback panel is harder and/or stiffer than the strap panel, and the series of ridges are for mechanically engaging with a buckle of the patent interface.

Each respective lateral extent of the crown strap and rear portion non-lappingly interface with each other and an end of a respective one of the side
20 straps.

Each respective lateral extent of the crown strap and rear portion and end of the respective side strap interface with each other in an edge-to-edge configuration.

Each respective lateral extent of the crown strap and rear portion and end
25 of the respective side strap are lapped on at least one set of major faces by a joint panel.

At least one major face of one or more of the crown strap, rear portion, and side straps is lapped along at least a portion towards their peripheries with a stiffening panel.

30 The stiffening panel comprises a stretch material which is less stretchable than the respective one or more of the crown strap, rear portion, and side straps.

The stiffening panel comprises a non-stretch material.

The stiffening panel comprises a substantially inextensible material.

The stiffening panel comprises a non-elasticated material.

35 At least a portion of at least one major face of one or more of the crown strap, rear portion, and side straps, is treated with a conditioner.

The conditioner is provided at least towards an edge of the at least a portion of the at least one major face of one or more of the crown strap, rear portion, and side straps.

The crown strap comprises a single unitary strap.

5 The rear portion comprises a single unitary strap.

The crown strap and rear portion comprise a closed loop.

The set of side straps depend from intersections of the crown strap and rear portion.

10 The intersections of the crown strap and the rear portion are, in use, located above the ear of a patient.

One or more of the set of side straps, the rear portion, and the crown strap comprise at least in part a first stretch panel which is overlapped and underlapped by a pair of second stretch panels, where the first stretch panel is more stretchable than the second stretch panels.

15 One or more of the set of side straps, the rear portion, and the crown strap comprise at least in part a relatively elastic panel which is overlapped and underlapped by respective relatively inelastic panels.

20 An entirety of one or both of the crown strap and rear portion comprise a first stretch panel which is overlapped and underlapped by a pair of second stretch panels, where the first stretch panel is more stretchable than the second stretch panels.

An entirety of one or both of the crown strap and rear portion comprise a relatively elastic panel which is overlapped and underlapped by respective relatively inelastic panels.

25 The rear portion and crown strap form a closed loop, and the rear portion and crown strap together comprise a relatively greater stretch panel and a relatively lesser stretch panel.

30 The rear portion and crown strap form a closed loop, and the rear portion and crown strap together comprise an elasticated panel and at least one non-elasticated panel.

The rear portion and crown strap comprise two relatively lesser stretch panels, the two relatively lesser stretch panels each at a respective first end are lapped with a relatively greater stretch panel and at the other ends are lapped with each other.

35 The rear portion and crown strap comprise two non-elasticated panels, the two non-elasticated panels each at a respective first end lapped with an elasticated panel and at the other ends lapped with each other.

The rear portion and crown portion comprise a single relatively lesser stretch panel, the single relatively lesser stretch panel lapped at two lateral ends to one or more relatively greater stretch panels.

5 The rear portion and crown portion comprise a single non-elasticated panel, the single non-elasticated panel lapped at two lateral ends to the panel of a substantially elasticated material.

The side straps depend from the closed loop of the crown strap and rear portion, and the closed loop at the side straps comprises a locally increased panel or combined panel width.

10 Terminal portions of either or both of the upper and lower side straps include gripping tabs comprising a first and second tab panels, the tab panels respectively overlapping and underlapping the terminal portion at a first tab region and lapping each other at a more distal second tab region.

15 The first and second tab panels are of a material that is one or more of thinner, softer, of a different colour, or has a lower coefficient of friction than that of the material of the respective straps of the sets of upper and lower side straps.

The headgear at the second more distal tab region is of greater stiffness than the headgear at the first tab region.

20 The gripping tabs further comprise at one external surface a first half of a hook and loop fastener.

The side straps are configured such that the strap surface which corresponds to the first half of the hook and loop fastener, when the strap is folded back on itself, comprises a second half of the hook and loop fastener.

25 At one or more lapped regions the headgear is at least partially one or both of overlapped and underlapped by an adhesive.

The adhesive comprises a hot-melt adhesive.

The adhesive is provided in a sheet or film-like form.

The adhesive is adhered to or adheres adjacent panels upon the application of heat, or heat and pressure, to the adhesive.

30 One or more of the plurality of panels comprise an unravelable material.

At least part of an edge of the headgear is treated by a conditioner.

An edge portion which is treated by the conditioner comprises increased fray resistance relative to a non-adhesive lapped edge portion of the same material.

At least part of an edge of the headgear is rolled back onto itself.

35 An adhesive is provided between the rolled-back portion and the portion onto which it is rolled back.

At least part of an edge of the headgear comprises an edge softening panel, a portion of which is lapped to a more interior panel, and wherein the edge panel comprises a material that is thinner and/or softer than that of the more interior panel to which it is lapped.

5 The edge panel is lapped to the more interior panel such that the edge panel defines an internal surface, relative to the head of a patient in use, of the headgear.

The edge panel is configured, in use and towards its outer end, to roll away from the head of the patient.

10 The edge panel at the non-lapped region extends away from an adjacent lapped region a distance of about 5 times to about 20 times the thickness of the more interior panel to which it is lapped.

The headgear has a weight of less than about 30 g.

The headgear has a weight of less than about 20 g.

15 The headgear has a weight of less than about 10 g.

The headgear has a weight of about 15 g to about 30 g.

The headgear has a weight of about 17.5 to about 27.5 g.

The headgear has a weight of about 25 g.

One or more of the plurality of panels comprise planar panels.

20 One or more of the plurality of panels comprise tubular panels.

According to another aspect, the present disclosure provides a headgear for a patient interface, the headgear comprising a first panel and a second panel which are lapped with each other and joined together, wherein the first panel comprises at least one darted portion which causes the headgear to assume a 3D shape.

25

One or more of the at least one darted portions of the first panel are covered at one major face of the first panel by the second panel.

One or more of the at least one darted portions are secured closed by a joining of the first panel and second panel together.

30 One or more of the at least one darted portions is provided at or towards a rear portion of the headgear and forms the headgear into a concave shape at a patient-facing side thereof.

According to another aspect, the present disclosure provides a headgear for a patient interface, the headgear comprising a plurality of panels which are lapped with each other, wherein two edges of a panel or respective panels are mated together so as to cause the headgear to define a 3D shape.

35

The panel or panels having the two edges are lapped by another panel at the edges.

The another panel retains the edges together by a joining of the panel or panels and the another panel at their lapped parts.

5 The two edges are located at or towards a rear portion of the headgear and when mated together form the headgear into a concave shape at a patient-facing side thereof.

More than two edges of a panel or respective panels are mated together.

10 More than two pairs of edges of a panel or panels are respectively mated together.

According to another aspect, the present disclosure provides a headgear for a patient interface, the headgear comprising a plurality panels which are lapped with each other and bonded together such that the headgear defines a 3D shape.

15 The headgear defines a concave shape at a patient-facing side of a rear portion of the headgear.

The panels are joined by bonding.

The bonding is by an adhesive.

The panels are joined by welding.

20 While the headgear is generally referred to in the context of a patient, it will be understood that the term patient may as appropriate be substituted for an assistant to the patient or a medical professional or otherwise anyone else who may use or interact with the headgear, whether for their own use or in association with aiding someone else's use of the headgear.

As used herein the term "and/or" means "and" or "or", or both.

25 As used herein "(s)" following a noun means the plural and/or singular forms of the noun.

For the purposes of this specification, the term "plastic" shall be construed to mean a general term for a wide range of synthetic or semisynthetic polymerization products, and generally consisting of a hydrocarbon-based polymer.

30 For the purpose of this specification, where method steps are described in sequence, the sequence does not necessarily mean that the steps are to be chronologically ordered in that sequence, unless there is no other logical manner of interpreting the sequence.

35 The term "comprising" as used in the specification and claims means "consisting at least in part of." When interpreting each statement in this specification that includes the term "comprising," features other than that or those

prefaced by the term may also be present. Related terms "comprise" and "comprises" are to be interpreted in the same manner.

Other aspects of the invention may become apparent from the following description which is given by way of example only and with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The patent or application file contains at least one drawing executed in colour. Copies of this patent or patent application publication with colour drawing(s) will be provided by the Office upon request and payment of the necessary fee.

Preferred embodiments of the invention will be described by way of example only and with reference to the drawings, in which:

Figures 1A and 1B are cross-sectional views of, respectively, a pre-lamination and a laminated configuration of two panels.

Figures 2A and 2B are cross-sectional views of a pre-lamination and laminated configuration of three panels.

Figures 3A and 3B are cross-sectional views of another pre-lamination and laminated configuration of three panels.

Figure 4A is a pre-lamination cross-sectional view of a first panel of a given thickness is a second thinner panel.

Figure 4B is a pre-lamination cross-sectional view as in Figure 4A, but where the first panel is lapped on the other side by another thinner panel.

Figures 5A and 5B are pre-lamination and post-lamination cross-sectional views of another configuration of two panels.

Figures 6A and 6B are pre-lamination and post-lamination cross-sectional views of a first and second panel, which are lapped against each other, and which are partially overlapped and underlapped by another pair of panels.

Figures 7A and 7B are pre-lamination and post-lamination cross-sectional views of a butt-join between two adjacent panels which are lapped on one side by another panel.

Figure 8 is the post-lamination configuration of Figure 7B, where the two adjacent panels are lapped on their other major faces by another panel at the butt join.

Figures 9A and 9B are pre-lamination and post-lamination views of a butt join between two adjacent panels as in Figure 8, but where the two adjacent panels are of different thicknesses.

Figure 10 is an example post-lamination cross-sectional view of a first panel which is overlapped and underlapped by another two panels which are, away from the first panel, lapped on each other, as in Figure 3B, but where the first panel and other two panels are further overlapped and underlapped by a pair of panels which are thinner than that of the other panels.

Figures 11A and 11B are pre-lamination and post-lamination cross-sectional views of one surface of edge of a panel which is treated with an adhesive.

Figures 12A and 12B are the configuration of Figures 11A and 11B, but where both major faces along the edge of the panel are treated with an adhesive.

Figures 13A and 13B are pre-lamination and post-lamination cross-sectional views of a panel which is rolled back and adhered to itself.

Figures 14A and 14B are pre-lamination and post-lamination cross-sectional views of two lapped panels, where the boundaries between the panels at each of their major faces is treated with an adhesive.

Figure 15 shows two panels which combine to form a part of a headgear.

Figure 16A is a lay-flat view of a headgear.

Figure 16B is a lay-flat view of another embodiment of a headgear.

Figures 17A and 17B are views of the drape configuration of a headgear when held by a patient.

Figures 18A and 18B are respectively inside and outside views of a headgear.

Figures 19A and 19B are close-up views of the configurations of Figures 18A and 18B.

Figure 20 is the headgear of Figures 18A and 18B on a patient's head.

Figure 21 is a lapped region between a side strap and the rear portion of a headgear.

Figure 22 is a close-up view of various lapped and non-lapped regions of part of a headgear.

Figure 23 is a partial view of another headgear.

Figure 24 is the headgear of Figures 23A and 23B on a patient's head.

Figures 25A and 25B are respectively outside and inside views of another headgear.

Figures 26A and 26B are respectively outside and inside views of another headgear.

Figure 27 is a view of another configuration of a headgear.

Figure 28 is a close-up view of a joint portion of the headgear of Figure 28.

Figures 29A and 29B are views of the headgear of Figure 27 on a patient's head.

Figure 30 is a view of another configuration of a headgear.

Figures 31A and 31B are views of the headgear of Figure 30 on a patient's head.

Figure 32A is a panel for part of a strap.

Figure 32B shows the panel of Figure 32A bonded to another strap panel.

Figure 33 shows another laminated strap panel.

Figure 34 shows a close-up view of a headgear.

Figure 35 shows another close-up view of a headgear.

Figure 36A and 36B are top and side views respectively of a strap end feature.

Figure 37 shows a panel for a headgear.

Figure 38A shows another view of the panel of Figure 37.

Figure 38B shows the panel of Figure 38A in a 3D configuration.

Figure 39A shows various panels for forming a headgear.

Figure 39B shows the panels of Figure 39A when lapped together.

Figure 39C shows another view of the lapped panels of Figure 39B.

Figure 40 shows another embodiment of a panel for a headgear.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Described herein are various embodiments of a headgear for a respiratory interface. Such a headgear may include a plurality of panels, configured to present the headgear with at least one lapped region in which at least two of the plurality of panels overlap and underlap each other, and at least one non-lapped region in which one or more of the panels are not lapped by another of the panels. Each of the panels at the one or more lapped regions are bonded to each other by an adhesive.

In a simplest form, the headgear may comprise only two panels at least one of which is partially lapped to the other, to form a lapped region where they respectively overlap and underlap, and one or two non-lapped regions where one or both panels exist without being lapped.

In various other forms, the headgear may comprise additional panels in either fully or partially lapping relationships with one or more of the other panels. By such a configuration of variously lapped panels a laminated headgear may be built up.

At least a portion of the headgear may be formed by such a configuration of lapped panels.

In some embodiments, at least a main part, or even an entirety or a substantial entirety of the headgear may be formed by a plurality of panels in
5 various lapped configurations.

According to some embodiments a headgear may consist only of a plurality of panels, to provide a headgear with at least one lapped region and at least one non-lapped region.

According to some embodiments a headgear may consist only of a plurality
10 of panels that are bonded together using adhesive.

In other words, the headgear may consist of a plurality of panels that have been joined without the use of stitching or welding.

Because adhesive forms a very thin layer, the bulk of the headgear is reduced relative to headgear in which panels are stitched or welded together. Also,
15 the material properties of the adhesive can be selected so that lapped region is relatively soft and flexible compared to a stitched or welded join.

The panels of the plurality of panels may be selected from any suitable panel-like material. This may include textiles being networks of natural and/or artificial fibres, and more particularly fabrics as may be made by weaving, knitting, spreading,
20 crocheting, bonding, or other available methods.

It may also include any other non-conventionally textile materials which may be provided in a panel-like form, such as a plastic or composite.

The panels may be of a sheet-like form or may comprise tubular panels.

In at least some embodiments, some or all of the plurality of panels may be
25 of flexible materials, and particularly materials which may drape under their own weight. Such materials may be particularly suited to forming parts of a headgear which is to conform to the shape of a patient's head.

Each panel of the plurality of panels that comprise the headgear defines two opposed major faces. In at least some embodiments it may be these major faces
30 which are to be lapped against each other and bonded together within the one or more lapped regions of the headgear.

The plurality of panels may be panels of the same material.

In various preferred forms at least some of the panels may be of different materials. Such different materials may have at least some different material
35 properties. Such properties may include the texture of the panel at one or both of its major faces, or at one or more of the edges bounding the two major faces. Another property may be the softness or hardness of one or both of the major faces

or one or more of the edges bounding the two major faces. Another material property may include the stiffness or flexibility of the panel, or its stretch properties. Stretch properties may include extensibility, recoverability, and elasticity. Further properties which one or more of the panels may have include
5 different densities, surface hardnesses, Young's moduli, thicknesses, colours at one or both of the major faces or bounding edges, coefficients of friction at one or both of the major faces relative to a reference material. The different material properties may also include different degrees of breathability, different degrees of hydrophobic or hydroscopic qualities, different permeability, or different transparencies or
10 sheers.

In addition to having any of such different material properties between panels, an individual panel itself may have one or more of such characteristics which are directionally different within the panel itself. For example, a panel may have a directionally different texture or softness. It may also have directionally
15 different stiffness or flexibility, stretch properties, or frictional coefficients in relation to a reference material.

In addition to different material properties, different panels of the plurality of panels may have different physical configurations, including both thickness and lateral dimensions.

20 Another example of a panel characteristic of a textile panel may be whether it comprises a cut or uncut pile. Whether the pile is cut or uncut may provide different surface characteristics. For example, an uncut pile may present loops of material at a panel surface. Such a material with an uncut pile may generally be known as an unbroken loop (UBL) material.

25 The presence of such loops may be desirable to act as the loop portion of a hook and loop fastener system. By this configuration a hook and loop fastener system may be provided without having to attach any additional loop-providing component to the panel. This may go at least some way to providing a headgear which is of reduced thickness.

30 The panels may further be selected of materials having any other material properties or panel configurations such as may provide for the desired functionality of a headgear which is to comprise the panels.

The stretch properties of a panel refer first to its in-plane extensibility or stretchability. This extensibility may be omnidirectional, such that the panel may
35 have the same in-plane extensibility in all directions. The stretch properties of a panel may differ directionally, so the panel has either different extensibilities or is extensible and inextensible in different in-plane directions.

A stretch panel may be one that has at least some degree of in-plane extensibility or stretchability. A non-stretch panel may be relatively inextensible in-plane in at least one direction.

5 A non-stretch panel may be one that has a lesser degree of extensibility than a stretch panel.

The panels may have differing stretch properties from each other. For example, a first panel may have a first stretchability, while a second panel has a second different stretchability. Where the panels are lapped against each other but not bonded together they may define another third stretchability. Finally, where the
10 panels are lapped and bonded they may define another fourth stretchability.

A panel which is extensible or stretchable may or may not be recoverable. In at least some preferred configurations the stretch properties of a stretch panel may include recoverability, so that a panel may be stretched then when the stretching load is removed it may return to or towards its original unstretched
15 shape.

Recoverability may for example be achieved by elasticating a panel. An elasticated panel includes at least one elastomeric, rubber, or rubberised component. For example, an elasticated panel may include at least some fibres of such an elastic material. Conversely, a non-elasticated panel is a panel which does
20 not include any such an elastomeric, rubber, or rubberised component. An elasticated panel has greater elasticity, due to the at least one elasticated component, than a non-elasticated panel of the same material but without the at least one elasticated component.

In addition to different physical characteristics provided by the properties
25 of different individual panels, composite characteristics may be provided by the bonding together of two or more lapped panels at the one or more lapped regions of the headgear. The properties of the two or more lapped panels, and in some configurations the properties of the adhesive which bonds them together, may provide for different properties of that lapped region of the headgear.

30 For example, the respective panel thicknesses will form a lapped region of a greater total thickness.

In another example, one panel at a lapped region is extensible in one direction, and another panel at the lapped region is extensible in another direction which is different or potentially perpendicular to the direction of the former panel.
35 Particularly where the panels are extensible only in directions which are perpendicular or substantially perpendicular to each other, a functionality may be

provided where the panels at the non-lapped regions may stretch in their respective directions, but at the lapped region may be substantially inextensible.

In another example, one panel at a lapped region is elasticised in one direction, and another panel at the lapped region is elasticised in another direction which is different or potentially perpendicular to the direction of the former panel. Particularly where the elasticised directions are perpendicular or substantially perpendicular, each panel at a non-lapped region may be able to be stretched along the elasticised direction, while at the lapped region the lapped panels may provide for a substantially non-elasticated overall characteristic.

Panels to be utilised in the headgear may be unravelable, meaning that their constituent fibres may be unravelled.

Panels to be utilised in the headgear may not be able to be unravelled, what may be known as a free-cut material. Such a material may be cut and may not or may at least be resistant to unravelling of the constituent fibres along the cut edge. Advantageously, such materials can be cut to shape with the cut edge of the panel forming an edge of the headgear without the need for further processing.

It will be appreciated that numerous other such combinations of panels having one or more different material properties may be configured so as to have desired properties both at non-lapped regions and lapped regions.

In addition to the use of panels having one or more different material properties, the characteristics of the headgear may be at least in part determined by different configurations of respectively lapped panels at the one or more lapped regions of the headgear.

Further details of various lapped and non-lapped regions and their associated panel configurations will now be described with relation to Figures 1A to 14B which illustrate various example forms and configurations of lapped and non-lapped regions.

Figure 1A and 1B are sectional views of one such lapped region in respectively a pre-lamination exploded configuration showing the constituent components before they are bonded, and a post-lamination configuration where the panels have been bonded together.

As seen in Figure 1A there is a first panel 1 and a second panel 2. The first panel 1 and second panel 2 may be of the same or different materials. An adhesive (such as will be described in further detail subsequently) is illustrated to be provided between the first panel 1 and second panel 2 at the region where they are to respectively overlap and underlap each other.

While shown as provided across a substantial entirety of the overlapping and underlapping portion of the first panel 1 and second panel 2, the adhesive 5 may be provided at only a part or parts of the lapped region, either or both across and/or into the into the page of the sectional view of Figure 1A.

5 Figure 1B shows the panels and adhesive of Figure 1A when bonded together to form a single laminate. The combined panels define a first non-lapped region 31 of the headgear at the portion where the first panel 1 is not lapped, a first lapped region 21 where the first panel 1 and second panel 2 lap each other, and a second non-lapped region 32 of the headgear at the portion where the
10 second panel 2 is not lapped.

While illustrated in Figures 1A and 1B as being panels of the same material and configuration, it will be appreciated that the panels of the lapping configuration of Figures 1A and 1B, and any of the subsequently described configurations including of Figures 2A-14B, may include panels which are of different materials or
15 configurations, such as is herein described.

It will be appreciated that any of the panels shown in illustrated sectional views of Figures 1A-14B may be of different lateral dimensions at the cross-section than are illustrated, and/or may be of different planar (either across or into/out of the page) dimensions at different parts of each respective panel. For example, one
20 or both of the first panel 1 and second panel 2 of Figure 1A and 1B may be of greater dimensions across the page, such that one or both of the non-lapped regions 31 and 32 and/or the lapped region 21 may be of greater lateral size across the page than illustrated. The cross-sectional panel configurations shown may also extend in a direction into or out of the page in the same configuration as seen in
25 the cross-sectional view, or one or more panels may vary in configuration in either direction.

In a first example the first panel 1 and second panel 2 of Figure 1A and 1B may extend in directions into and/or out of the page in substantially the same configuration, so as to provide a lapped region 21 extending in directions into
30 and/or out of the page and corresponding non-lapped regions 31 and 32 similarly extending in directions into and/or out of the page.

In a second example the first panel 1 of Figure 1A and 1B may extend in a direction into the page, but terminate in a direction out of the page, while the second panel 2 extends in a direction both into and out of the page. Such a
35 configuration would provide the part of the second panel 2 in the direction out of the page to comprise another non-lapped region.

In a third example the first panel 1 of Figure 1A and 1B may narrow in a lateral dimension along a length in a direction either into or out of the page, such that the non-lapped region 31 may narrow and eventually cease to exist.

It will be appreciated that the corresponding differences in the shown cross-sectional views or other parts of the panels not seen in the cross-sectional views may be made with one or more of the panels of any of Figures 1A-14B.

At least adjacent panels are to be joined to each other at a lapped region. As previously described, this may be by bonding through the use of an adhesive. Such an adhesive is illustrated by the adhesive 5 as seen in Figure 1A and 1B. This adhesive may be in the form of a solid, semi-solid, liquid, or gel adhesive which is applied to one or both of the panels.

The adhesive will be understood to encompass any one or more commonly available types or combinations of adhesives. The adhesive may for example be an acrylic adhesive, an anaerobic adhesive, or a cyanoacrylate adhesive.

The adhesive may for example be an ester or ether-based compound. More specifically it may comprise nylon-polyamide, be nylon-polyamide, ester-polyurethane, polyester, or polyolefin.

Particularly where the adhesive is provided as a solid or semi-solid, but potentially also where it is a liquid or a gel, the adhesive may need to be activated to initiate or accelerate the process of curing the adhesive to form the bond between the lapped panels. For example, in the case of a solid or semi-solid adhesive the adhesive may be activated by melting from its solid or semi-solid state. In other forms the adhesive may be activated by the combination of two components of the adhesive, such as in the case of a two-component acrylic adhesive.

While the process of forming a bond by an adhesive will herein be referred to as a curing of the adhesive, it will be understood that such curing may include the forming of bonds by one or more of a chemical reaction within the adhesive or combination of adhesives, by the presence of a particular environment (such as anaerobic environment) or contact with a particular type of material (such as an alkaline material), by drying, or by an application of one or more of pressure, heat, sound, or light, or any other commonly utilised method to transform the adhesive into a bonded state.

In an example, the adhesive may be in the form of a solid or semi-solid hot-melt adhesive. Heat may be applied to activate the adhesive by melting it, and the adhesive may cure such as by one of the above-referenced curing processes in order to form the bond between the respective lapped panels.

As illustrated in Figure 1A the adhesive 5 may be provided as a separate layer and assembled between the respective panels, where it may then be activated to create the bond.

Particularly where the adhesive is a liquid or gel adhesive, adhesive may be
5 applied to a region of one or both of the lapped panels during the assembly of the panels.

Where the adhesive 5 is in the form of a hot-melt adhesive, it may be provided as a tape. This tape or sheet of adhesive may be able to be cut to form desired plane shapes to provide the desired bonded regions of panels.

10 Such a tape or sheet hot-melt adhesive may additionally comprise a sticky or adhesive surface or surface coating, such that the adhesive 5 may provide at least some provisional hold of the panels to which it is assembled before the adhesive is activated.

As illustrated in Figure 1B, the first panel 1 and second panel 2 have been
15 bonded to each other by the adhesive 5. The adhesive 5 may exist as a layer of bond material between the two panels, as illustrated in Figure 1B. In other configurations, the adhesive may additionally permeate partially or fully through the thickness of one or both of the panels. This may form a stronger bond, or act to modify the characteristics of the lapped region itself due to the properties of the
20 permeated adhesive.

While illustrated in Figure 1B as existing in the laminated panels as a discrete layer of adhesive, the adhesive 5 may melt or otherwise permeate into the lapped panels such that there is either a thinner discrete layer of adhesive between the panels subsequent to bonding, or even no discrete layer of adhesive.

25 In addition to the type of adhesive and location within the lapped region at which the adhesive is provided, different amounts of adhesive may be provided to form bonds of different characteristics. For example, a relatively greater amount of adhesive may be provided to create a bond having a greater desired strength.

Different amounts of adhesive may be applied to different parts of a single
30 lapped region or between different layers of a lapped region where there are three or more layers. Different amounts of adhesive may further be provided to different lapped regions of the headgear.

The properties of the adhesive utilised for the bonding, or for various different bonds within the headgear, may also be changed to suit the characteristics
35 desired of each particular bonded area. For example, an adhesive may be provided having different levels of flexibility or stiffness when set, so as to suit the desired characteristics of the lapped region or part thereof at which it is utilised.

The properties of an adhesive may be selected to alter the properties of the panels where the panels are adhesively bonded. For example, the adhesive may provide increased stiffness or strength.

The properties of an adhesive may be selected to have certain similar
5 properties of the panels at the adhesively bonded region. Properties of the adhesive such as stiffness and stretch and recoverability, may be selected to be similar to or entirely correspond to the properties of the panels at the bonded region. By this configuration the headgear may be provided with substantially continuous
10 properties such as stiffness or stretch and recoverability through the relevant bonded regions. Such a headgear which has one or more continuous physical properties across the headgear, or at least across regions of the headgear, may provide increased comfort for a patient.

Such tailoring of the properties of an adhesive either to alter or be similar to the properties of the panels may be utilised at only specific lapped regions of the
15 or between particular panels within a lapped region, or it may be utilised across the whole of a headgear. As a result, where the properties of the adhesive are to be tailored at multiple different bonds, different adhesives may be used at each respective bond to achieve the desired alteration of or similarity with the properties of the bonded panels.

20 In other configurations panels at a lapped region may be bonded to each other by other non-adhesive bonds. For example, panels may be ultrasonically bonded to each other by an ultrasonic weld. Panels may also otherwise be melted to each other to provide a join.

Where there are more than two panels at a lapped region or part thereof
25 various ones of the interfacing panels may be joined by different methods.

Returning now to Figures 2A-14B, additional configurations of panels to form various lapped regions and non-lapped regions of a headgear will now be described.

Referring first to Figures 2A and 2B, a configuration comprising three
30 panels is shown. Seen in the pre-lamination exploded view of Figure 2A, a first panel 1 is to be lapped on both major faces by a second panel 2 and a third panel 3. An adhesive 5 is to be provided at the overlapping and underlapping portions of the panels.

The laminated panels as seen in Figure 2B form a first lapped region
35 where the first panel 1 is lapped on both sides by the second panel 2 and third panel 3. The second panel 2 and third panel 3 respectively lap opposed sides of the first panel.

The regions of overlap of the second panel with the first panel and the third panel with the first panel may be coextensive, with the second panel and third panel each lapping substantially identical areas of the opposed faces of the first panel. The regions of overlap may also be non-coextensive, with the second panel and third panel lapping the first panel over relatively lesser or greater areas, or in different regions of the opposed faces of the first panel.

The panels at the lapped region 22 are bonded together by the adhesive 5.

The laminated panels further form a second lapped region 22 at which the second panel 2 and third panel 3 may overlap and underlap each other. While illustrated in Figure 2B as separated from each other, it will be appreciated that due to draping of the material and/or deformation under loading, the second panel 2 and third panel 3 may contact each other, at least at a region away from the terminus of the first panel 1.

As seen at the lapped region 22 of Figure 2B, at some lapped regions an adhesive may not be provided between the lapped panels.

The panels of Figure 2B further define a non-lapped region 31, at which the first panel 1 is not lapped on either side by another panel.

The configuration of Figures 2A and 2B may be characterised as a double lapped joint, as one panel is lapped on both sides. This is in contrast to the joint of Figure 1A and 1B, which may be characterised as a single lapped joint, as each panel is only lapped on one side.

In comparison to a single lapped joint, a double lapped joint such as shown in Figure 2B may have the advantage of reducing the potential for inducing torsion in the joint under lateral loading of the respective panels. Such torsion may cause twisting or other deformation of the joint, so that at least part of the headgear does not lay flat. This may be undesirable in some circumstances, such as where the headgear is to lie flat against a patient's head, because any such torsion of the headgear may result in points of increased pressure against the patient's head, and thus discomfort.

Reduced or eliminated torsion at a bond may also increase the strength of the headgear at the bond. Torsion of the panels at the bond may cause them to be subjected generally to peel stresses and even to 180-degree (or "T") peel stresses when the panels are under tension. Bonded joints and particularly adhesively bonds may have limited strength under peel stresses, where the panels are pulled away from each other perpendicularly to the bonded surfaces. The reduction of torsion may mean that the panels are not twisted as much under loading, and consequently that they are not exposed to at least the same degree of peel

stresses, but rather to predominantly or only shear stresses. Some bonds, particularly adhesive bonds, may be able to provide greater strength under shear stresses than peel stresses. This means that the strength of the headgear may be increased by reducing torsion at lapped panels.

5 In other configurations, for example where loads are not such as to cause significant torsion in the joint, a single lapped joint may be preferable to a double lapped joint as it may provide a joint of lesser thickness.

 As illustrated in Figures 2A and 2B the first panel is of a different material than the second panel 2 and third panel 3, which are of the same material. For
10 example, the first panel may be of a relatively stronger material than that of the second panel 2 and third panel 3. As another example, one of the first panel 1 and the second and third panels 2 and 3 may be of a relatively greater extensibility while the other or others are of a relatively lesser extensibility.

 Figure 3A and 3B illustrate the panel lapping configuration of Figures 2A
15 and 2B, but where an adhesive 5 is provided between the second panel 2 and third panel 3 at the second lapped region 22.

 The second lapped region defines a bonded region unlike that of Figure 2B.

 The first lapped region 21 defines a double lapped joint, while the second lapped region 22 defines a single lapped joint.

20 Figures 4A and 4B illustrate two further configurations of a joint between panels. Each of Figures 4A and 4B show illustrative exploded views of the panels before they are laminated.

 Figure 4A shows a similar configuration to that of Figure 1A, with a first panel 1 bonded to a second panel 2 by an adhesive 5. However, in Figure 4A, the
25 first panel 1 is of a greater thickness than the second panel 2.

 Figure 4B shows the configuration of Figure 4A, but where the first panel is additionally lapped on its other main face by a third panel 3. The third panel 3 is similarly adhered to this first panel 1 by an adhesive 5. In the embodiment of Figure 4B, the third panel is thinner than the first panel. The third panel is of a
30 similar thickness as the second panel.

 The configuration of Figure 4B may provide for a joint such as has been described in Figure 2A and 2B, but which has a lesser overall thickness due to a relatively decreased thickness of the second panel 2 and third panel 3.

35 Where the second panel 2 and third panel 3 are of the same material or together have the same or similar strength as that of the first panel 1, a joint of the configuration of Figure 4B may be useful for transferring a load from the first panel

to the second and third panels, or in a reverse direction, such that the first panel is loaded in the same way as the second and third panels collectively.

The edges of the second panel 2 and the third panel 3 may be left without being adhered to each other, as has been described in relation to Figure 2A and 2B,
5 or may be adhered to each other as was described in relation to Figure 3A and 3B.

Figures 5A and 5B are respectively pre-lamination and post-lamination views of a further joint configuration. As seen in these figures, a first panel 1 is lapped on an entirety of one of its major faces by a second panel 2. As shown in Figure 5A and Figure 5B the first panel is located at an end of the second panel 2.
10 In this illustrated embodiment at least one edge of the first and second panels are coextensive. However, in other embodiments, the first panel 1 may be located away from an edge, for example in the middle of second panel 2.

An adhesive 5 is shown between the lapping portions of the first panel 1 and the second panel 2. As seen in Figure 5B when adhered together the panels
15 provide a first non-lapped region 31 at one end of the second panel 2. It then defines a first lapped region 21, at which the second panel 2 overlaps the entirety of the first panel 1.

Figures 6A and 6B are section views of another more complex joint arrangement between multiple panels. As seen in Figure 6A a first panel 1 and a
20 fourth panel 4 define the outer panels of the headgear at a lapped region of the first, second, third and fourth panels. Between the first panel 1 and the fourth panel 4 is the second panel 2 and third panel 3.

A whole major face of one or both of the second panel 2 and third panel 3 may be lapped by the other of the second panel 2 and third panel 3. The second
25 panel 2 and third panel 3 are provided with an adhesive 5 between them, and adhesive 5 is provided respectively between the first panel 1 and second panel 2 and third panel 3 and fourth panel 4 at the regions where they overlap. Finally, adhesive 5 is also provided between the ends of the first panel 1 and fourth panel 4.

30 Figure 6B is a laminated section view of the assembly of Figure 6A. The entire panel assembly of Figure 6B defines one overall lapped region 20.

Within the overall lapped region 20, the assembly defines three distinct lapped regions. At the first lapped region 21 the panels are in a multiply lapped configuration, with more than two panels being lapped against each other. The
35 second and third panels 2 and 3 are lapped to each other and are subsequently overlapped and underlapped respectively by the first panel 1 and fourth panel 4. At the second lapped region 22 the first panel 1 and fourth panel 4 are singly lapped

against each other and bonded together by the adhesive 5. Similarly, at the third lapped region 23 the second panel 2 and third panel 3 are lapped against each other in a single lapping configuration and bonded together by the adhesive 5.

Figures 6A and 6B illustrate how compound and complex joint configurations may be obtained by combinations of panels to define various singly and multiply lapped regions.

For illustration purposes the second panel 2 and third panel 3 are of a different material, including being of different thicknesses, similarly the first panel one and fourth panel 4 are of another panel type having a different thickness. It will be appreciated that any such configuration of same or different panels within a joint at a lapped region may be provided in order to enable the desired joint characteristics and overall characteristics of the headgear.

Similarly, as previously described, the characteristics, type, and quantity of the adhesive 5 between different respective panels of the panel layout of Figure 6A and 6B may be customised. That is, the adhesive between the first panel and second panel could be a different adhesive than the adhesive which is between the second and third panels, and so forth.

Figure 7A is an exploded view of a panel layup to join a first panel 1 and second panel 2 in a butt join, where the major faces of the panels are substantially aligned, and they are joined in end-to-end condition. As seen in Figure 7A the first panel 1 and second panel 2 are aligned end to end and are each underlapped or overlapped by a third panel 3. An adhesive 5 is provided between the lapping portions of the panels. Whilst shown in Figure 7A as being fully lapped with the first panel 1 and second panel 2, the third panel 3 may in other variant configurations only partially be lapped with one or both of the panels. For example, the third panel may have a portion that extends along an axis that is orthogonal to a longitudinal axis of the first and/or second panels. That is, the third panel may extend lengthwise into or out of the page whilst the first and/or second panels extend lengthwise across the page as illustrated in Figures 7A and 7B.

Figure 7B shows a laminated configuration of the panels of Figure 7A. As seen in Figure 7B, the first panel and second panel 2 are in a substantially aligned planar condition.

In addition to adhesive being provided at the lapped major faces of the panels, an adhesive may be provided also between the ends of the first panel one and second panel 2 at the butt join.

Whilst shown in Figure 7A and 7B as being of at least the same thickness, the first panel 1 and second panel 2 may in variant configurations be of different thickness or other material properties.

Figure 8 shows the panel layout of Figure 7B, but where the first panel 1 and second panel 2 are further overlapped by a fourth panel 4 corresponding to the third panel 3. Such a configuration may be desirable to provide an increased strength of the joint between the first panel 1 and second panel 2. This configuration may also be desired to reduce or eliminate torsion of the joint when loads are applied to the first panel 1 and second panel 2.

As illustrated in Figure 8, the panel layout of that figure defines a first non-lapped region 31 and second non-lapped region 32 at the distal ends at the first panel 1 and second panel 2, respectively. It also defines a first lapped region 21 at which the fourth panel 4 and third panel 3 sandwich the internal portions of the first panel 1 and second panel 2.

Figure 9A illustrates a variant of the panel layout shown in Figure 7A, where the first panel 1 and second panel 2 are of different thicknesses. In contrast to the layout shown and described in Figure 7A and 7B, the first lapped region 21 of Figure 9B changes in thickness along its length.

In addition to providing for a bond between the second panel 2 and first panel 1, the layout configuration of Figure 9B may provide for a smooth transition between the thickness of the first panel 1 and the second panel 2. This may particularly be the case where the third panel 3 and fourth panel 4 are provided of a relatively thin material when compared to at least the thicker of the first and second panels.

Figure 10 illustrates a panel layout of the configuration of Figure 3B, but where these panels are further overlapped and underlapped at and to both sides of the first lapped region 21 by respectively a fourth panel 4 and fifth panel 6.

As noted in relation to Figure 9B the fourth panel 4 and fifth panel 6, particularly where provided with a thinner material than the other panels or at least the second panel 2 and third panel 3, may provide a function of at least smoothing an edge transition in thickness between first, second and third panels 1, 2 and 3 at the lapped region 21.

According to various embodiments the surfaces or portions of the surfaces of one or more panels may be conditioned, and in particular the edges of panels may be conditioned. The conditioning may be by the addition of a conditioner to change the material properties of the panel at the treatment region. For example, conditioning may serve to increase the stiffness of the edge of a panel which is

treated or change the surface texture or hardness. In another example where the panel is of an unravelable material, conditioning an edge of the panel may serve to prevent the material from unravelling.

The conditioning may condition only a surface of the panel or may be provided to penetrate into or fully through the panel and condition a substantial entirety of the thickness of the panel at the conditioned region.

The conditioning may utilise any range of known substances or materials to provide the conditioning, for example a solid, semi-solid, liquid, gel, or paste. The conditioning substance or material may cure to form the desired conditioned properties, as with an adhesive as previously described. Various conditioning substances which cure, particularly where they are provided as a solid or semi-solid, may be activated such as by melting or combination of two parts in order to initiate or accelerate the curing process.

In other forms the conditioning substance or material may be provided to the panel or panels without requiring curing. For example, the conditioning may be provided by a material which is applied to the panel in its final form, such as in a solid as a tape. Any such material which is applied in its final form may be joined to the panel or panels by bonding by an adhesive, or by stitching, welding, or other commonly utilised methods of joining.

In some configurations an adhesive such as the adhesive 5 used to bond the panels to each other may be utilised to provide the conditioning. The adhesive used to both bond panels and provide conditioning may have a non-tacky finish when cured.

Various examples of applications of conditioning of panels are shown in Figures 11A to 13B.

As shown in Figure 11A, a first panel 1 may be treated with the conditioner 7. When applied to the panel and potentially as allowed to cure, dry, or harden, the conditioner 7 changes the material properties of the first panel 1 at the conditioned region. For example, where the conditioner 7 provides a relatively greater stiffness than that of the panel by itself, the panel 1 at the conditioned edge region may be caused to have a relatively increased stiffness with respect to the remainder of the first panel 1.

As a further example the conditioner 7 may provide for a modification of the surface characteristics of the panel, such as an increased hardness.

Figure 12A illustrates the configuration of Figure 11A, but where both major faces of the first panel 1 at the same edge have been provided with a surface treatment by a conditioner 7. Figure 12B correspondingly illustrates the applied,

bonded, cured, or otherwise treated configuration of Figure 12A, where both major faces at the edge region have been provided with a conditioning.

Where the panel is made of an unravelable material (which could be a knit or woven fabric), the conditioning of one or both major surfaces, or of an edge surface of the panel, may act to inhibit unravelling of the fibres of the material at that end.

Figures 13A and 13B show a further configuration of treating of an edge of a panel 1. As seen in Figure 13A, an edge of the first panel 1 is folded back onto itself and a conditioner in the form of an adhesive 5 is provided between the folded back portion and the remainder of first panel 1 which it overlaps. When laminated, as seen in Figure 13B, the panel presents as a first non-lapped region 31 and the first lapped region 21.

The rolled back edge configuration of Figure 13B may be desirable to provide an increased strength, stiffness, or thickness, at the edge of the panel. As described regarding the edge treatments of Figure 11, the adhesive 5 may be customised to match or to provide different desired characteristics to supplement those of the first panel 1 itself. The rolled back edge configuration may additionally act to prevent the unravelling or fraying of fibres of the first panel 1.

The panel configuration of Figures 13A and 13B additionally illustrate an example of a panel configuration of a single panel which may define both non-lapped regions such as 31 and lapped regions such as 21.

In addition to conditioning of edges of one or more panels, further applications of the use of a conditioner 7 as a surface finish are contemplated herein. Figure 14A shows the panel layup of Figure 1B, but where a conditioner 7 is provided to overlap and underlap the transitions between the first panel 1 and second panel 2. As seen in Figure 14A and 14B the conditioner 7 may be in the form of a tape, such as a plasticised tape for seam sealing.

In the laminated view of Figure 14B the conditioner 7 is shown to provide surface joining between the major surfaces of the first panel 1 and second panel 2 on both respective sides.

While shown for purposes of illustration in Figure 14B as resulting in a solid layer of conditioner 7 between the two panels, depending on the type and configuration of the conditioner 7 utilised the conditioner may not result in an appreciable increase in thickness of the panels, but rather simply condition the associated regions of each panel. For example, this could be to provide increased stiffness, hardness, or other such properties.

Figure 15 illustrates at top two panels, a first panel 1 and a second panel 2, which are to be bonded to each other to define a part of a headgear. While fully overlapping each other at their distal regions, the second panel 2 comprises a semi-circular cut out at a central part.

5 When bonded together as shown in the lower portion of Figure 15, the two panels combine to form a headgear portion defining a first lapped region 21 at the overlap of the first panel 1 and second panel 2, and a non-lapped region 31 at the part where the first panel 1 is not lapped by the second panel 2.

 Such a configuration may provide the laminated panel layup with location-specific characteristics. For example, where the second panel 2 is a relatively lesser stretch or even non-stretch panel and the first panel 1 is a relatively greater stretch panel, the layup may have less extensibility or even be inextensible at the lapped region 21, while maintaining extensibility at the non-lapped region 31.

 The bonding together of all or part of the lapped first panel 1 and second panel 2 at the lapped region may provide reduced stretch at the bonded region relative to that of either the first panel or second panel alone.

 The bonding together of all or part of the lapped first panel 1 and second panel 2 at the lapped region may provide reduced stretch at the bonded region relative to that of the lapped first and second panels at a non-bonded region.

20 As a further example, where the second panel 2 is a non-elasticated panel and the first panel 1 is an elasticated panel, the layup may have elastic stretch properties at the non-lapped region 31, but substantially inelastic properties at the lapped region 21.

 While the foregoing has described various example layups of different panels, it will be appreciated that any number of variations or combinations of such layups may be provided in order to form a headgear.

 While shown comprising various panels of particular illustrative thicknesses, it will be appreciated that the foregoing layups may be provided with panels of different thicknesses and combinations of thicknesses, among any other desired material properties.

 With reference to the foregoing description of panel configurations and panel layups to provide a headgear having lapped and non-lapped regions various particular embodiments of a headgear utilising lapped panels will now be described.

 Figure 16A is a lay-flat view of a headgear 10.

35 A headgear 10 may define an internal surface 14 and an external surface 15 of the headgear (not seen in Figure 16A). The internal surface is, in use, for

contact with the head of the patient. The external surface is conversely for facing away from the patient's head.

According to various embodiments the internal surface 14 and external surface 15 may be configured to be the same or different. In various preferred
5 embodiments the internal surface 14 and external surface 15 may be configured differently. This different configuration may be to reflect different use functions of the headgear at its inside and outside. They may additionally or alternatively be to signal to a patient which surface is which, to assist the patient in orienting and donning the headgear.

10 The headgear 10 comprises a rear portion 100 for location at the rear of a patient's head in use. A purpose of the rear portion 100 may be to transfer loads from straps 300, which connect to the interface, to the patient's head and enable the interface to be retained against the patient's face.

The headgear 10 of Figure 16A also includes a crown strap 200, for location
15 about a crown of the patient's head in use. The crown strap 200 may be provided as two or more discrete parts which are joined together to form a loop, such as is shown in Figure 16A. In alternative configurations the crown strap 200 may be provided as a continuous loop.

Where the crown strap 200 includes two parts which are joined together to
20 form a loop, the crown strap may include one or more crown strap fixture parts 210. For example, as seen in Figure 16A, one side of the crown strap comprises a slot and one half of a fastening system to couple with a corresponding half of a fastening system, such as a hook and loop fastener, on the other side of the crown strap.

25 The side straps 300 are for attachment to the patient interface, and for transferring loads variously to either or both of the rear portion 100 and crown strap 200.

In at least some configurations the side straps 300 may be of a non-stretch material such that they are substantially inextensible. As such they may transfer
30 loads between the patient interface and the rear portion of the headgear without extending to any significant extent.

As seen in Figure 16A, the side straps 300 may comprise sets of upper side straps 301 and 303 and lower side strap 302 and 304 of each side respectively. Where there are sets of side straps on each side, a region between the two side
35 straps may define an ear loop 320. The ear loop 320 comprises a portion of the headgear which extends between each respective upper side strap and lower side strap on one side of the headgear. Each upper side strap 301, 303 passes above

the ear, and each lower side strap 302, 304 passes beneath the ear. The ear loop 320 is located at least behind the ear. The edge of the ear loop between each upper strap and lower strap may be curved or may comprise a plurality of linear edges arranged about a nominal curve.

5 In other embodiments the headgear 10 may include only two side straps, one strap for connecting to each side of the interface.

In addition to illustrating the various parts of a headgear 10, Figure 16A illustrates some panel layups which are utilised to form the overall headgear 10.

For example, as seen in Figure 16A each set of upper and lower side
10 straps, 301 and 302, and 303 and 304 respectively, are defined by a single panel of material. At each side of the headgear, this panel is lapped in at least a single-lapping configuration to one or more panels of the rear portion 100. Such a configuration may substantially or entirely eliminate peel stresses and particularly
15 180-degree peel stresses under tensile loading of the strap and rear portion, and instead cause the stresses at the panel bonds to be substantially or entirely shear stresses. This may accordingly improve the load carrying capability of the bonded panels.

In Figure 16A the rear portion 100 comprises a first rear panel 110 and a second rear panel 120. These panels may be configured in the same manner as the
20 first panel 1 and second panel 2 of Figure 15, wherein the second rear panel 120 is fully laminated to the first rear panel 110, but for at the crescent shaped lower extent of the first rear panel 110.

In other configurations the first rear panel 110 may only be of a crescent shape such as is visible in Figure 16A and may be bonded to the second rear panel
25 120 by a lap join or butt join as previously described.

As the rear portion is to be located at the rear of a patient's head, the lower extent of the rear portion is to be located around the upper part of the patient's neck. This is a region which may have considerably variable geometry between people of different anatomies, and thus may be a point of discomfort for
30 patients using a given headgear.

Accordingly, as described in relation to Figure 15, the first rear panel 110 may be of a stretch material, such that it can stretch and allow the headgear 10 to take on different shapes to accommodate different neck anatomies. In particular, the first rear panel 110 may have a relatively greater stretchability than that of the
35 second rear panel 120.

The lower edge of the first rear panel 110 may be a free edge, without a seam. It may be provided either with some edge treatment, or preferably without

any edge treatment. Particularly where the lower edge of the first rear panel 110 does not have a seam or any edge treatment, the first rear panel may be of a non-unravelable material.

The absence of a seam and/or any edge treatment of the lower edge may increase the comfort of the headgear for a patient by providing continuous properties, such as stretch, stiffness, and thickness, across the whole of the first rear panel 110 from the second rear panel 120 down to the lower edge of the first rear panel.

As seen in Figure 16A the strap panel of each side is bonded to a first rear panel 110 and second rear panel 120 of the rear portion 100. The layup is such as to form a lapped region and a non-lapped region of the strap panel about each ear loop 320.

While shown as relatively short lengths, it will be appreciated that the straps 300 will be provided in sufficient length to reach and couple with an interface, given a range of different patient head sizes.

The crown strap 200 as shown in Figure 16A comprises a single crown strap panel 201 which extends across the rear portion 100 and is lapped against the second rear panel 120 and/or first rear panel 110 where it fully laps the second rear panel 120.

In addition to being lapped along an upper edge of the rear portion 100 the crown strap panel 201 may be lapped with at least a lateral part of the rear portion 100, as illustrated at 202 in Figure 16A. This may function to provide increased strength to the bond between the crown strap 200 and rear portion 100 and improve the ability to transfer loads between the two regions. In addition to providing potentially increased strength, bonding at the region 202 may increase resistance to peeling of the crown strap panel 201 and the rear portion 100 from each other.

Figure 16B shows another illustration of a headgear 10 similar to that of Figure 16A, but with various modifications to the rear portion and crown strap.

In Figure 16B the top of the second rear panel 120 of the rear portion 100 extends to an upper peripheral edge 401 which projects past the crown strap panel 201. By this configuration, the second rear panel 120 defines an upper edge 401 of the headgear around at least the rear of the patient's head.

The portion of the second rear panel 120 which extends from the crown strap panel 201 to the upper edge 401 comprises a non-lapped region of the headgear.

As the second rear panel 120 at the overhanging portion 121 beyond the crown strap panel 201 is unsupported and may not be substantially load bearing, when in contact with the head of a patient it may roll or curl away from the patient's head. This may create a region of reducing pressure against the patient's head from the upper edge of the crown strap panel 201 to the distal edge of the overhanging portion 121 of the second rear panel 120.

Such a zone of gradually reducing pressure may provide for increased comfort for a patient, as opposed to a sharp drop in pressure across a hard edge which may make the patient more aware of the presence of the headgear or cause pressure irritation of the tissue at the edge.

The function of such an overhanging portion 121 may be characterised as providing an edge softening, to create a region of reducing pressure towards the edge of the headgear and thus soften the feeling of the edge against a patient's head. An overhanging portion 121 to achieve this function may be provided as part of another panel of the headgear, such as part of the second rear panel 120 as seen in Figure 16B. An overhanging portion 121 may instead be provided as part of a separate panel, for example as a panel lapped to at least the crown strap panel 201 and overhanging past it to define the upper edge of the rear portion of the headgear.

As seen in Figure 16B, the upper panel 201 including the overhanging portion 121 is provided to be inside of the crown strap panel 20 relative to the patient's head. As such, the overhanging portion 121 will roll away from the head and preferably over the crown panel.

The panel comprising the overhanging portion 121 is at least one of thinner, softer, and less dense than the headgear panel which it overlies, in the case of Figure 16B the crown strap panel 201.

The edge softening effect of an overhanging portion 121 may be enhanced where the overhanging portion 121 is at least partially protected from exposure to tensile loading referred from the straps 300. For example, in relation to Figure 16B, the crown strap panel 201 may be configured to transfer minimal tensile loads from the upper side straps 301 and 303 to the overhanging portion 121. This may be achieved by limiting the stretch of the crown strap panel 201 or even providing it of an non-stretch material.

While described in relation to forming a pressure-graduating edge at the upper side of the rear portion 100 of the headgear, the described techniques may be applied to any other part of the headgear to achieve the same functionality. For

example, this panel configuration may be utilised at the lower periphery of the rear portion 100, and/or at the ear loops 320.

The panels of the headgear may be configured to give a particular overall shape or structure to the headgear, which it may have when it is not being worn.

5 Such shapes or structures may be important for signalling to a patient or person who will apply the headgear to a patient the nature of the various parts, and their intended orientations for donning. For example, it may be desirable that the headgear at rest presents an opening between the straps of each side within which the patient's head may be received. Similarly, it may be desirable that the
10 headgear at rest presents the side straps as distinct members, projecting away from the remainder of the headgear and potentially also individually of each other, to allow easy identification and grasping of each strap by the patient so that they may be connected to the interface.

This shape and structure may for instance be demonstrated when the
15 headgear 10 is held by a patient, or particularly when a portion of the headgear is grasped by the patient and the remainder of the headgear drapes or hangs from the grasped portion.

Figures 17A and 17B illustrate two different perspectives of a headgear 10 when draped from the patient's hand. As seen in Figures 17A and 17B, the
20 headgear 10 of this embodiment is configured to display certain shape and form when not worn.

The headgear 10 may have a crown strap 200 which has sufficient stiffness that it at rest retains an at least partially circular form. This is shown in the example of Figures 17A and 17B, where the remainder of the crown strap 200
25 draping from the patient's hand demonstrates a substantially circular form.

Also seen particularly in Figure 17B is the way in which the straps 300 may project away from the remainder of the headgear 10, and also discretely of each other. To provide such a configuration the panel or panels which comprise the straps 300 may be provided of a material of sufficient stiffness so as to drape with
30 a sufficiently low amount of curvature over their length. In addition or alternatively, either or both of the rear portion 100 and/or crown strap 200 to which the straps 300 attach may bias the straps to fall outwardly, away from each other and away from the remainder of the headgear 10.

To achieve such a configuration the straps 300 and/or the panels of the
35 remainder of the headgear to which they lap may be provided with a natural curl or curve to them.

In some embodiments, a base panel may be laminated with a more peripheral stretch panel which is pre-stretched when laminated to the base panel. This may induce a natural curvature in the laminated panels, to provide a desired natural shape and/or divergence away from each other of the straps 300.

5 In addition or alternatively to any panel configurations to provide a resting shape to the headgear to signal the nature of the different portions or their use or application to a patient, the headgear may be configured to visually or by tactile cues signal these things to a patient.

10 For example, as seen in Figures 17A and 17B, the crown strap and rear portion of the headgear may be provided of one or predominantly one colour. In order to differentiate themselves from the remainder of the headgear, one or more of the straps 300 may be provided having a different colour and/or texture than that of the crown strap 200. As seen in Figures 17A and 17B, the upper side straps 301 and 303 may be provided having a different colour and/or texture than that of
15 the lower side straps 302 and 304. Any such structural, visual, and/or tactile cues which may be built into the headgear may additionally or alternatively be utilised to aid a patient in differentiating between an internal surface 14 and an external surface 15 of the headgear 10.

20 For example, some or all of the panels which comprise the inner surface may be provided having a different colour or different colours than some or all of the panels which comprise the external surface 15 of the headgear.

In other configurations, some or all of the panels which comprise the internal surface 14 of the headgear may have a different texture than some or all of the panels defining the external surface 15. In particular, the texture of the inner
25 surface 14 may be in part or whole softer than the external surface 15, to aid in signalling to the patient that this part should be in proximity to their head as well as to provide enhanced comfort when worn.

30 Figures 18A and 18B show respectively views of the external surface 15 and internal surface 14 of an embodiment of the headgear 10. Various exemplary features of this embodiment will now be described.

The headgear 10 comprises a rear portion 100, crown strap 200, and side straps 300 as previously described.

35 The upper side straps 301 and 303 comprise a unitary panel or laminate of panels 305 which extend across the rear portion 100 of the headgear. By such a configuration the upper side straps 301 and 303 may transfer loads to the back of the patient's head whilst minimising undesirable loads in other regions of the headgear.

In the view of the outside of the headgear in Figure 18A the top strap panel 305 is visible at a middle part of the rear portion 100, and also extends below an upper rear portion panel 114.

In some configurations the lower side straps 302 and 304 may also
5 comprise a unitary panel. However, in the embodiment of Figures 18A and 18B they are separate panels.

The lower side straps 302 and 304 each connect to panels of the rear portion. The rear portion 100 includes a first rear panel 110 which may be of a stretch material and a second rear panel 120 which may be of a relatively lesser
10 stretch material.

More particularly, the first rear panel 110 may be of an elasticated material and the second rear panel 120 may be of a non-elasticated material.

Figures 19A and 19B show close-up views of Figures 18A and 18B, respectively. In discussion of the configuration of various components of the rear
15 portion 100 and crown strap 200 reference will now be made to Figures 19A and 19B.

The second rear panel 120 is preferably configured to receive loads from the upper side straps 301 and 303 and/or the lower side straps 302 and 304, and transfer and equalise loads received from the straps within the remainder of the
20 headgear.

The lower side straps 302 and 304 may be laminated to the second rear panel 120 in a single lapping configuration such as has been described in relation to Figures 1A and 1B.

The lower side straps 302 and 304 may alternatively be double lapped,
25 such as was described in relation to Figures 3A and 3B by the provision of supplementary rear panels 116. These supplementary rear panels may be provided to sandwich the strap panels against the second rear panel 120. Such double lapping may aid in ensuring that the lapped portion of the lower side straps 302 and 304 do not twist in-plane when they experience loads.

30 The supplementary rear panels 116 may be of a similar or the same relatively lesser stretch material as the second rear panel 120, so as to aid in the transfer of loads from the lower side straps 302 and 304 to the rear portion 100 and particularly the second rear panel 120.

Where the lower side straps 302 and 304 connect to the rear portion 100
35 across the first rear panel 110, loads on the lower side straps 302 and 304 may additionally function to stretch the first rear panel 110. The stretch and where applicable elasticity afforded by the first rear panel 110 may accordingly provide for

greater tolerance for a patient to adjust the length of the straps to provide a desired retention force of the interface to their face.

However, particularly in configurations where the loads from the straps are not substantially transferred through the first rear panel 110 but instead are transferred through the second rear panel 120, such as in Figures 18A and 18B, the first rear panel 110 may stretch at least primarily to conform to the geometry of the patient's neck. Advantageously, by passing the side strap loads through the second rear panel 120, tension through the first rear panel 110 is reduced, in particular at its lower edge. This reduces the possibility of creating a hard edge at the lower edge of the first rear panel 110 that cuts into the patient's neck (which might especially occur if the lower edge reaches its limit of extensibility or elastic limit).

In addition to stretching to accommodate different neck geometries, a relatively greater stretch first rear panel 110 may also cause the headgear at that region to conform more continuously and snugly to the patient's head than would a relatively lesser stretch or non-stretch panel. The fit of a stretch panel to the patient's head at this neck region may aid in the comfort and stability of the headgear, or at least the kinaesthetic perception of stability to the patient.

The crown strap 200 may connect to the rear portion and/or the upper side straps 301 and 303. As seen in the view of the outside of the headgear of Figure 18A, the crown panel 201 extends across the top of the rear portion 100. In Figure 18B it extends behind the edge softening panel 114.

As seen in Figures 19A and 19B, the crown strap 200 may comprise a pair of laminated crown strap panels 201, each of which respectively laps one major face of the side strap and/or rear portion panel to which they lap. This is particularly visible at the intersection 220 of the upper side straps 301 and 303 with the crown strap 200, with a respective crown strap panel 201 overlapping the associated top strap in both the view of the outside of the headgear in Figure 19A and the view of the inside of the headgear in Figure 19B.

The rear portion 100 or crown strap 200 may additionally comprise one or more edge softening panels 114. The function of such an edge softening panel may be substantially as described previously in relation to the embodiment of Figure 16B.

As seen in the view of the outside of the headgear in Figure 19A, the edge softening panel 114 projects past the top of the crown strap panel 201, the second rear panel 120, and the upper side straps 301 and 303. As such, the edge softening panel 114 defines an upper edge 401 of the headgear at the rear portion.

A further feature of the embodiment of Figures 18 and 19 is the configuration of the ear loops 320. Unlike the embodiment of Figures 16A and 16B, the ear loops 320 are defined by both the upper and lower straps and the lateral peripheries of the rear portion 100.

5 With reference to Figure 19A showing a view of the outside of the headgear, a cut-out 402 is shown in the second rear panel 120, which exposes the top strap running beneath it. Particularly where panels are of different colours or textures, configurations such as this may be utilised for creating differences in appearance between the inside and outside of the headgear, and/or to create
10 signals to a patient as to how or where that part of the headgear is to be oriented in-use.

The ear loops 320 of Figures 19A and 19B define, between the respective upper and lower side straps, two substantially straight-line portions. These straight-line portions extend in a V-shape inwardly into the rear portion 100. Due to the in-
15 use load conditions on the straps, the provision of ear loops comprising such straight-line portions may reduce a degree of crumpling or out-of-plane deformation warping of the rear portion peripheral edges at the ear loops 320.

Figure 20 is a view of the headgear 10 of Figures 18A-B and 19A-B on an example patient's head.

20 Figure 20 illustrates the load transfers adaptations of the crown strap panels 201 which respectively overlap and underlap the top strap 303.

Also seen is the first rear panel 110 and how it may stretch to fit the neck of the patient, and how loads from the lower side straps 302 and 304 may be transferred at least in part to the stretchable first rear panel 110.

25 Figure 21 shows a close-up view of the region at which a lower side strap 302 is connected to the rear portion 200. The second rear panel 120 overlaps the proximate end of the lower side strap 302 and is adhesively bonded to it. The strap panel is double lapped between the second rear panel 120 and the supplementary rear panel 116. This panel layup at the intersection of the lower side strap 302,
30 second rear panel 120, and supplementary panel 116 may be substantially as is illustrated in cross-section in Figures 2A and 2B.

Also shown in Figure 21 is the first rear panel 110. This panel may be singly lapped to the second rear panel 120, and/or may be doubly lapped between the second rear panel 120 and the supplementary rear panel 116.

35 The various lapped panels in the close-up of Figure 21 illustrate a lapped region 20 of the headgear 10, while the distal portion of the lower side strap 302 illustrates a non-lapped region 31.

Figure 22 shows another close-up of a region of the headgear of Figures 18-20, in particular the intersection of the crown strap panels 201 with the upper side strap 301.

Where the crown strap panels 201 singly lap each other defines a first lapped region 21 of the headgear. This first lapped region 21 may have a cross-section such as is illustrated in Figures 1A and 1B.

Where the crown strap panels 201 respectively overlap and underlap the upper side strap 301 defines a second lapped region 22. This second lapped region 22 may be in cross-section similar to the first lapped region 21 of the layout described in relation to Figure 3B.

The second rear panel 120 and edge softening panel 114 may be singly lapped to each other to define a third lapped region 23.

The edge softening panel 114 between the third lapped region 23 and first lapped region 21 is not lapped by any other panel and defines a first non-lapped region 31.

The edge softening panel 114 may be lapped between the pair of crown straps panels 201 or may be lapped against the outer face of one of the crown strap panels 201.

At the fourth lapped region 24 the lapped together second rear panel 120 and edge softening panel 114 are at least partly lapped between the pair of crown strap panels 201. The cross-sectional configuration of the headgear at the fourth lapped region 24 may be similar to that described in relation to Figures 6A and 6, with two outer panels (the crown strap panels 201) overlapping and underlapping two other lapped panels (the second rear panel 120 and the edge softening panel 114).

Figure 23 is a view of an inside surface of another embodiment of a headgear 10. As seen in Figure 23, the rear portion 100 of the headgear has a first rear panel 110 of a relatively wider configuration than has been described in previous embodiments. The first rear panel 110 is singly lapped to the second rear panel 120.

The second rear panel 120 defines ear loops 320 of a substantially rounded configuration. The crown strap panel 201 is singly lapped across the top region of the second rear panel 120, with a portion of the second rear panel 120 extending past the crown strap panel 201 to define the upper peripheral edge 401 of the rear portion 100. This projecting portion of the second rear panel 120 may act as a rollaway edge as previously described.

As seen in Figure 23, the lower side straps 302 and 304 connect directly to the first rear panel 110, at its lower portion where it is not lapped by the second rear panel 120. By this configuration loads from the lower side straps 302 and 304 will be transferred first through the relatively greater stretch first rear panel 110 before they are transferred into remaining relatively lesser stretch parts of the headgear. This may result in increased stretching of the rear panel 110 at its non-lapped region.

As seen in Figure 23 the crown strap 200 may comprise a single crown strap panel 201 which is singly lapped to the second rear panel 120, or it may comprise a pair of crown strap panels 201 which lap either side of the second rear panel 120 (or the laminate of the first rear panel 110 and second rear panel 120, where the two panels are laminated to each other at this upper region of the rear portion 100).

Regardless of the configuration of the crown strap panel or panels 201, a portion of one or both of the first rear panel 110 and second rear panel 120 may extend past the crown strap panel or panels 201 to provide the previously described function of an edge softening panel 114.

Figure 24 illustrates another embodiment of a headgear 10 on an example patient's head. Of particular note in the embodiment of Figure 24 is the configuration of the headgear around the ear loops 321. At the ear loops 320 the headgear comprises an ear loop strap panel 321, which passes around the ear loop and connects between the upper side strap 301 and lower side strap 302.

This configuration of an ear loop strap panel 321 may be desirable to aid in transferring loads between the respective upper side straps 301 and 303 lower side straps 302 and 304 on each side of the headgear, such as to reduce of the load which is directly transferred to the first rear panel 110.

The ear loop strap panel 321, particularly as seen in Figure 24 where it is a contrasting colour to the adjacent parts of the rear portion, may additionally provide a visual cue to the patient to distinguish this part of the headgear from others, and to prompt the correct orientation of the headgear for use.

In Figure 24 the second rear panel 120 laps with the ear loop strap panel 321 and may extend beyond the ear loop strap panel 321 to a free edge 322 past the ear loop strap panel 321.

Figure 25A is a view of an exterior surface 15 of another embodiment of the headgear, and Figure 25B is a view of the internal surface 14 of the same embodiment.

In this embodiment, the upper side straps 301 and 303 and lower side straps 302 and 304, comprise one panel or laminate of panels which passes about and defines the ear loop 320.

5 The rear portion 100 comprises a first rear panel 110, which as previously described may be a panel of relatively greater stretch than other panels, or particularly other adjacent panels. The rear portion then comprises a second rear panel 120. The second rear panel 120 may be of relatively lesser stretch than the first rear panel. The second rear panel includes a cut-out to expose a portion of the first rear panel 110, which may provide a non-lapped region when the first rear
10 panel 110 and second rear panel 120 have been bonded together.

As seen between Figure 25A and Figure 25B, the unitary strap panels 310 of each of the set of upper and lower side straps 301/302 and 303/304, are partially double lapped between the first rear panel 110 and second rear panel 120 about the ear loops 320. This double lapping of at least part of the unitary strap
15 panels 310 at the ear loops 320 may be in cross-section similar to the configuration described in relation to Figure 3B and may accordingly provide for similar advantages in strength of the panel connection and reduction of induced torques.

In the embodiment of Figure 25 the second rear panel 120 is relatively extended, so that it forms the two sides of the crown strap 200. In this way it may
20 replace the need for separate crown strap panels 20 as described in relation to various other embodiments herein.

As seen in Figure 25B, the second rear panel 120 may similarly as previously described extend beyond the first rear panel 110 to which it is otherwise lapped, so that may form the upper peripheral edge 401 of the rear portion and
25 function as a roll-away edge as elsewhere described.

Figure 26A is a view of an external surface 15 of a further embodiment of a headgear 10, and Figure 26B is a view of an internal surface 14 of the same.

In this configuration the first rear panel 110 may only comprise a crescent shape and be lapped to the second rear panel 120 around the corresponding arc-
30 shaped cut-out in it. The first rear panel 110 may be only singly lapped to the second rear panel 120, or there may be two second rear panels 120, and the first rear panel 110 may be double lapped between the two rear panels 120.

Where there are two second rear panels 120 and the first rear panel 110 is lapped between them, the first rear panel 110 may comprise only the exposed non-
35 lapped region seen in Figures 26A and 26B and a lapped region sufficient to lap with and bond to the two second rear panels 120.

In other forms the first rear panel 110 may, but for the cut-out region of the second rear panel 120, substantially correspond to the size and shape of the second rear panel or panels 120. An example of this configuration is seen in first rear panel 110 and second rear panel 120 of Figure 15.

Whether the first rear panel laps the second rear panel or panels 120 only around a small interface to form a bond or laps the substantial entirety of the second rear panel or panels 12, may be determined according to the nature of the respective panels and the structure and function which the headgear 10 is to perform.

In the embodiment of Figures 26A and 26B the unitary ear loop strap panels 321 are singly lapped to one face of the combined first rear panel 110 and second rear panel 120, rather than double lapped between them as described in relation to Figures 25A and 25B.

In the embodiment of Figures 26A and 26B the crown strap 200 is comprised by the crown strap panel 201, which may be lapped to the first and/or second rear panels 110 and 120.

As illustrated in Figure 26A, one or more of the side straps 301-304 may include respective parts 331 and 332 of a fastener system by which the ends of the straps may be fastened back onto themselves. These may for example be respective halves of a hook-and-loop fastener system, such as with a hook part 331 and loop part 332.

In various configurations the loop part 332 may be provided as an additional component which is bonded to the underlying panel. In other configurations such as where the underlying panel is of an unbroken loop material having an uncut pile, the loops of the uncut pile of the panel itself may provide the loop part 332 of the hook and loop fastener system.

In various embodiments a headgear 10 may only comprise only one set of side straps 301 and 302, one strap each for connecting to a respective side of the respiratory interface.

One such embodiment is illustrated in Figure 27. The headgear 10 includes a rear portion 100, a crown strap 200, and a set of side straps 301 and 302. While the headgear may achieve the same functions as other embodiments described herein, particularly the crown strap 200 and rear portion 100 may be of a comparatively simplified form.

As seen in Figure 27, the rear portion 100 comprises the rear panel 140 and the crown strap 200 comprises the crown panel 240. The rear panel 140 and

crown panel 240 each meet at respective ends where they are joined with each other and with one end of a respective side strap 301 and 302.

As seen in Figure 27, each of the rear panel 140 and crown panel 240, and at least portion of the side straps 301 and 302 proximal to the rear portion 100 and the crown strap 200, may comprise the same or substantially the same panel or panel layup configuration.

Where they are made of a similar panel layup, they may be made by the lamination together of a base panel 51 which is to define the inside surface 14 of the headgear and contact a patient's head in use, and another reinforcing panel 52. The reinforcing panel may have a relatively greater strength or stiffness than the material of the base panel.

The reinforcing panel 52 may be a continuous sheet which corresponds in dimensions to the base panel 51. In other configurations the reinforcing panel may be at least partially cut-out, such as is illustrated in Figure 27. Providing the reinforcing panel 52 with cut-outs may reduce the weight of the combined panel layup. It may also only provide the strength or rigidity or other features of the material of the reinforcing panel 52 at regions of the base panel 51 where these characteristics are desired, for example along the edges of the panel layup.

As seen in Figure 27, the reinforcing panel 52 may be solid along at least lateral edges and having an internal region which has one or more cut-outs.

The ends of the rear panel 140, crown strap panel 240, and a respective side strap 301 or 302 may be joined together at a join 70 by any suitable panel lapping configuration such as is described herein.

In particular, these panels may be joined together in a butt join, for example as was described in relation to Figures 7A-B and Figure 8.

Figure 28 is a close-up view of the join 70 between the rear panel 140, crown strap panel 240, and a side strap 310. A respective end of the rear strap 140 and the crown panel 240 and side strap 301 may be aligned in at least the same plane if not also in end-to-end contact. A joint panel 60 may then lap each of the three other panels and be bonded to them at the join 70.

Such a joint panel 60 may be provided at only one surface, preferably an external surface, of the headgear, so as to provide an uninterrupted planar internal surface of the headgear at the join 70.

In other configurations two joint panels 60 may be provided, one to lap either major face of the three panels at the joint.

The use of a single joint panel 60 may provide for the connection of the three panels in a joint 70 having a layup thickness of only the joint panel 60 and

the greatest of the thickness of the rear strap 140, the crown panel 240, and the side strap 301 or 302. This may provide for a thinner panel layup at the joint than would otherwise be possible by over and underlapping each of the different headgear panels together to form the join 70.

5 Figures 29A and 29B are views of a two-strap headgear such as of the embodiment of Figures 27 and 28 when on the head of an example patient.

As seen in Figures 29A and 29B, the join 70 may be configured to sit above the ear of the patient.

10 Figure 30 illustrates a further embodiment of a headgear 10 having only two side straps 301 and 302.

As seen in Figure 30, the rear portion 100 and crown strap 200 of this embodiment may comprise a continuous loop 150. The continuous loop 150 may comprise a single loop of material, a single panel which is bonded to itself, or a plurality of panels which are adhesively bonded together.

15 The side straps 301 and 302 depend from the respective lateral peripheries of the loop 150.

In Figure 30 the loop 150 includes one or more panels of a first type, which may be a relatively decreased stretch material. More particularly it may be a non-stretch material and/or a non-elasticated material. It also includes an stretch panel 160 at the rear portion 100. The stretch panel 160 is of a relatively increased stretch than the one or more panels of the first type. The stretch panel 160 may act to allow the size of the loop 150 to expand and contract under load, and/or to conform to the shape of the patient's neck.

The stretch panel 160 may be an elasticated panel.

25 The loop 150 at the rear portion 100 may additionally comprise one or more lower stretch panels 170. These lower stretch panels 170 may connect between the stretch panel 160 and more lateral parts of the loop 150, particularly in the vicinity of where the side straps connect. These lower stretch panels 170 may in use be located lower on the rear of the patient's head than the remainder of the loop 150 and may act to provide further compensation for different patient head geometries in this area and additional stability of the headgear on the patient's head.

35 Various details of the headgear of Figure 30 are shown in the views of Figures 31A and 31B, which are different perspectives of the headgear 10 of Figure 30 on the head of an example patient.

As seen in Figures 31A and 31B, the loop 150 may be of a variable width. The loop may have relatively wider portions in the vicinity of the connection to the

side straps and at least relatively narrower portions towards a top of the crown strap 200.

The side straps 300 of a headgear 10 may include one or more strap panels which are laminated together.

5 As elsewhere described, and as illustrated in for example Figure 20, the ends of the side straps may pass through a fixture on the respiratory interface and fold back onto and fasten to themselves. To enable this there may be a two-part fastener system provided on the side strap, such as a hook-and-loop fastener.

10 However, when tightening a side strap back against itself it may be desirable to provide some form of feedback to the patient as to how tight the mask is and/or to provide some regular steps to which the straps may be adjusted to aid in easily equalising the amount that different straps are tightened.

15 Figure 32A shows an index panel 335 which is to be laminated onto a base panel 310 to form a side strap. The index panel 335 includes at least a series of step-like formations 337 which extend at least partially between the two sides of the index panel 335.

20 The index panel 335 may comprise a material which is relatively stronger, stiffer, denser, and/or harder than the underlying base panel 310 to which it is to be laminated.

Figure 32B illustrates the index panel 335 of Figure 32A laminated to a base panel 310.

25 By providing the index panel 335 on the external surface 15 of the headgear relative to the base panel 310, the index panel 335 may come in contact with a fixture of the respiratory interface as the strap end is passed through it and pulled back towards the rear portion 100 of the headgear.

30 When there is tension on the two sides of the strap 301 across the fixture of the respiratory mask, the step formations 337 of the index panel 335 may provide tactile feedback to the patient as the straps are tightened on the respiratory interface.

35 A further function of such an index panel 335 which is of a relatively stronger, stiffer, denser, and/or harder material than the base panel 310 may be to provide wear resistance to the strap 301 as it engages with and passes over the fixture of the respiratory interface. For at least this purpose, a strap may include an index panel 335 without the defined cut-outs 336 to provide tactile feedback but may instead have a substantially continuous panel 335 without cut-outs.

Figure 33 illustrates a further configuration of a side strap 301 which includes a base panel 310 and an index panel 335 laminated to it.

As seen in Figure 33, a distal portion of the strap 301 has within cut-outs of the index panel 335 a first part 331 of a fastener system which corresponds with second part 332 of a fastener system. The second part 332 may be provided by the material of the base panel 310 itself, or by another material laminated thereto.

While shown in Figures 32A-B and 33 as comprising a unitary panel with a plurality of cut-outs 336 to define the step formations 337, according to other embodiments the index panel 335 may be provided just as the step formations 337. In other words, the index panel 335 may instead comprise a plurality of step formations 337 without any linking material to define a single unitary panel.

The step formations 337 preferably present a raised surface above the surface of an underlying strap panel, such that the step formations provide resistance to movement of the strap relative to the interface. The spacing of the step formations may provide for an indication of indexing of each strap by a patient as they adjust the tension on the headgear straps.

To provide the indexed resistance the step formations 337 may be of a different and preferably harder or denser material than that of the underlying strap panel.

As previously described particularly in relation to Figures 11A-13B, various panels of the plurality of panels of the headgear may be given various edge treatments to provide different properties to one or more of the edge regions. Changes to the properties of an edge or edges of one or more panels may also influence the overall properties of the headgear.

Figure 34 illustrates an example of a rolled-back hem 411, such as is shown in section view in Figures 13A and 13B.

At the rolled-back hem 411 the panel or laminate of panels have been rolled back a distance onto themselves and bonded thereto by an adhesive.

A further example of a rolled-back hem 411 is shown in Figure 35, showing a close-up view of another part of an embodiment of a headgear 10.

A rolled-back hem 411 may provide for an effective doubling of the thickness of the panel or laminate of panels at the edge. The thickness may be further increased by the presence of the adhesive between the panel and its rolled-back portion.

In addition to increasing the thickness at the edge region, a rolled-back hem 411 may also increase the strength of the panel or laminate of panels at the

edge region. As previously described, the properties of the adhesive may be customised to contribute desired properties to at the rolled-back hem 411. For example, the adhesive may be stiffer than the panel or laminate of panels, or it may be of substantially the same stiffness as the panel or laminate of panels at the rolled-back hem 411.

As loads may be concentrated at edge regions of panels the use of a rolled-back hem 411 may allow for the whole panel or laminate of panels to have reduced thickness or reduced strength requirements, but to still be able to service the same loads due to the strengthened edge region.

While generally described and shown as being at a peripheral edge of the headgear, a rolled-back hem 411 or any other edge conditioning may be provided at other non-peripheral portions of the headgear.

Figure 35 also illustrates the application of an edge conditioning method previously described in relation to Figures 11A to 12B. The panel or laminate of panels at the treated edge 412 may be treated on one or both major faces with an adhesive. Particularly where this adhesive when set has greater stiffness than the panel or laminate of panels to which it is applied, the result may be to provide the panel or laminate of panels at the stiffened edge 412 with an increased stiffness. In other configurations the treatment may perform other functions in addition to or instead of increased stiffness, for example it may aid in preventing an unravelling of the panel material at the edge.

The ends of the side straps 300 are in use to be grasped by a patient, passed through a fixture of the respiratory interface, and then attached back onto themselves or otherwise secured to provide tension to retain the respiratory interface to the patient's face.

As a patient is to grasp the ends the side straps, it may be desirable to provide for strap ends which are able to be easily differentiated from the remainder of the strap by either or both of visual and tactile differentiation.

To this end, in some embodiments the ends of one or more of the side straps 300 may be lapped by one or more additional panels to form a strap-end feature 350.

By being lapped by one or more additional panels the strap-end feature 350 may have a different thickness to that of a strap panel 310, and thus be identifiable by touch by a patient.

In addition to or alternatively to a physically identifiable difference in thickness, the strap-tab feature may have a different colour, texture, softness, or other surface characteristic.

An example of such a strap-end feature 350 is illustrated in Figures 36A and 36B. As seen in Figure 36A, the strap-end feature 350 may include a first tab panel 351 which is at least partially lapped to the strap panel 310. As seen in Figure 36A, the first tab panel 351 has a greater surface smoothness than that of the strap panel 310, and thus may be able to be distinguished from it by touch.

On top of the first tab panel 351 is a first half 331 of a hook and loop fastener. In some embodiments the outer surface of the strap panel 310 may form the second half 332 of the hook and loop fastener, to engage the strap end with the strap when the strap end is folded back onto itself.

As seen in the configuration of Figure 36A the strap panel 310 may integrally comprise the second half 332 of the hook and loop fastener. For example, the strap panel 310 may be of an unbroken loop material, and loops presented at the surface of the strap panel 310 may be utilised as the loops of the hook and loop fastener.

The strap panel 310 may be singly lapped by the first tab panel 351, or it may be lapped on its other major face by a corresponding second tab panel 352, as is illustrated in the side view of Figure 36B.

While the presence of a first and/or second tab panel 351 and 352 may provide a desired degree of ability to differentiate between the strap end and the remainder of the strap, adhesive may be utilised to enhance this differentiation. For example, the adhesive may provide the strap end feature 350 with an increased stiffness relative to the strap panel 310. This difference in stiffness may act the or an additional physical cue to the patient as to the presence of the strap end.

The first and second tab panels 351 and 352 may be fully lapped against the strap panel 310 to provide a three-panel laminate, such as is shown at the first lapped region 21 of Figure 36B.

In other configurations the tab panels 351 and 352 may extend distally of the end of the strap panel 310, as is seen in Figure 36B, to form a second lapped region 22.

The difference in thickness between the first lapped region 21 and second lapped region 22 may provide a further tactile cue for patient as to the location of the end of a strap.

Where the tab panels 351 and 352 comprise a second lapped region 22 at which they only singly lap each other, rather than lap either sides of the strap panel 310, an additional amount, or different type, of adhesive may be utilised at the second lapped region 22. This may provide the second lapped region 22 with

an increased stiffness relative to that of either the first lapped region 21 or the strap panel 310 by itself and may be another potential form of cue to a patient that they are grasping the tab ends.

While various embodiments of the headgear may have a 2D shape and be able to lay flat or substantially flat on a flat surface, some embodiments of the headgear may have a 3D shape such that it does not lay flat on a flat surface.

Such 3D shapes may be provided by a shape of one or more of the panels before they are lapped and joined together.

A 3D shape may additionally or alternatively be provided to part or all of the headgear once some or all of the panels have been lapped with each other. For example, the panel or panels, either before or after they are joined together, may be placed inside a 3D mould to provide a 3D shape to the panels, such as by a stretching and/or a melting of the panels.

Figure 37 shows a view of a first panel 1 which includes two darts 9. As seen in Figure 37 the darts 9 are tapered slots that have been formed in the first panel 1. The tapered slots are widest at an edge of the panel and decrease in width as they extend into the panel.

When the parts of a panel such as the panel 1 of Figure 37 are gathered together across a dart the panel will be drawn into a 3D shape.

The sides of a dart may each define single straight lines, so the width of dart tapers linearly along its length.

In other forms one or both of the sides of a dart may define more than one straight line segment, so the width of the dart tapers linearly along each straight-line segment but not along the entire length of the dart.

In still other forms one or both of the sides of a dart may have one or more non-straight-line segments, so the width of the dart tapers non-linearly along its length.

One or more combinations of such configurations in one dart or a plurality of darts may be utilised in order to provide a panel or the headgear with a desired 3D shape.

While the darts 9 of Figure 37 are tapered slots formed into the first panel 1, in other forms one or more darts may be formed by a folding of the panel along the sides of the dart. No slots are formed in the panel in such embodiments.

Figure 38A shows a perspective view of the panel 1 of Figure 37, and Figure 38B shows the same panel 1 where the respective sides 421 and 422, and 423 and 424, of the darts have been drawn together.

The drawing together of the sides of darts where the darts are formed as a slot of the panel may close the slot and redefine a panel surface without gaps in it.

The drawing together of the sides of darts may involve the respective
5 sides, such as the sides 421 and 422, and 423 and 424 of Figure 38A and 38B, being brought to or at least towards edge-to-edge contact.

In other forms, the sides of one or more darts may partially or wholly respectively overlap and underlap each other when they are drawn together. Where drawn together such that the dart sides overlap and underlap each other, a
10 relatively greater 3D deformation of the panel may be affected than where the sides are just brought to or towards edge-to-edge contact.

As seen in Figure 38B the gathering of the panel at the respective sides 421 and 422, and 423 and 424 of the darts 9 causes the panel to assume a 3D shape.

When the darts 9 are closed, the parts of the panel either side of the dart sides are rotated around a focal point of the dart at a point of the tapered slot. As the darts 9 are widest at the lower edge of the panel away from the upper side of the panel with its two lateral extensions, when the darts 9 are closed the bottom part of the panel 1 decreases in lateral size the most. The decrease in lateral size
20 progressively reduces along the length of the dart 9.

As a result, the panel 1 which may previously have been of a 2D shape is drawn into a 3D shape as the darting induces out-of-plane curvature of the panel.

As seen in Figure 38A and 38B, the panel 1 has two darts 9. The darts each extend from their widest part at a relatively more lateral part of the panel and
25 towards a relatively more central part of the panel. The darts 9 each both extend from a lower part of the panel 1 towards an upper part of the panel.

The centrelines 81 and 82 of the two darts 9 are shown in Figure 38A.

As seen in Figure 37 the two darts are located so that the extension of their centrelines 81 and 82 beyond their narrowed ends intersect with each other
30 at the notional intersection point 83.

In other forms the centrelines of two or more darts may extend parallel to each other or diverge from each other. Where the centrelines of two darts meet at a notional point of convergence, this point may be located on the panel, as in the configuration shown in Figure 37 or may be located outside the extents of the
35 panel. As seen in Figure 37 the notional point of convergence is located on a central vertical axis of the panel.

As seen in Figures 37 and 38A and 38B, the darts 9 are arranged to cause the panel 1 to assume a convex shape at one side, the side visible in Figure 38B for example, and a concave shape at the other side of the panel.

The gathering of the panel 1 at the two darts 9 which taper towards each other causes the panel 1 to assume a 3D curved shape in at least the part of the first panel 1 between the two darts 9 and laterally adjacent regions of the panel either side of the darts. Particularly, it may define a 3D curved surface which decreases in radius from a lower extent of the panel towards an upper extent of the panel.

By the incorporation of one or more darts one or more panels of the headgear may be formed into a 3D shape. The 3D shape may be any desired shape, but particularly a shape or shapes which may correspond to the shape of the head of a patient where the headgear is intended to be located in use.

A headgear having a 3D shape may provide increased comfort for a user, and particularly potentially a reduction in locations of pressure concentration as may occur where a 2D headgear stretches to conform to the 3D shape of a patient's head.

A headgear having a 3D shape may provide increased stability and reduced deformation of the headgear from a non-worn shape. The reduced degree of deformation of the headgear in use may decrease the likelihood of any slipping of the headgear relative to the patient's head, or of curling or folding of the headgear during use. As a more stable headgear may be provided, it may be possible to reduce an amount of material needed to form the headgear and accordingly decrease the bulk and/or weight of the headgear.

A headgear having a 3D shape may also better signal a desired orientation and/or positioning of the headgear to the patient.

A darted panel may be joined together at the darts to make a 3D shape by for example the application of a tape or particularly adhesive tape at the darts, by welding of the dart sides together, or by stitching.

In other forms the darted panel may be placed in a 3D mould corresponding to the darted 3D shape of the panel. One or more other panels may then be lapped with the darted panel to at least partially cover the darts and joined to it by any of the methods described herein, including particularly by the use of an adhesive or adhesive tape.

Figure 39A shows a first panel 1 with two darts 9, and a second panel 2 provided in two parts 2a and 2b. The second panel parts 2a and 2b are to be overlaid on the first panel in order to form the headgear.

As seen in Figure 39A the second panel 2 includes the two parts of the top strap 200.

In various forms one or the other of the panels may include parts to fully or partially define one or more of the straps 301-304 or 200.

5 While shown in Figure 39A as being provided in two parts 2a and 2b, the second panel 2 may be provided as a single piece, or as more than two pieces.

Figure 39B shows a view of the first panel 1 with its darts 9 closed to form a 3D shape, and the first panel is lapped by the two parts 2a and 2b of the second panel 2. As seen in Figure 39B the second part 2b of the second panel is sized and
10 shaped to overlap the darts.

The second part 2b may cover the darts 9 to visually obscure them and present a seamless surface at that side of the headgear.

The second part 2b may at least in part aid in retaining the darts 9 in a closed position by bonding of the second part 2b to the first panel 1.

15 While shown in Figure 39B as overlapping the closed darts, a panel which laps the first panel 2 may not overlap part or all of one or more of the darts.

Where the darts are not lapped by another panel, they may be secured closed such as by one of the previously described dart closure methods.

As seen in Figure 39B the second panel parts 2a and 2b assume a 3D
20 shape on the first panel 1, to define a headgear 10 having a 3D shape. To ensure any non-darted panel smoothly assumes a 3D shape the panel may be selected to be at least relatively extensible.

In some forms a panel which laps a darted panel, such as the second panel 2 in Figure 39B, may be of a stretchable material such that it conforms to the
25 shape of the darted panel with minimal or no wrinkling.

Figure 39C illustrates another view of a 3D headgear 10. In the configuration of Figure 39C the location of the two top strap parts 200 are switched from that of the headgear 10 of Figure 39B.

As seen in Figure 39C the darts 9 of the first panel 1 are such as to cause
30 the headgear to have an internally concave surface at its rear portion 100, such as may correspond to the shape of the rear of a patient's head.

While shown in Figures 37-39A-C as having the second panel 2 lapped to the first panel 1 at an external side of the headgear, where the first panel 1 has a convex shape, it will be appreciated that the second panel may instead be lapped
35 to the inside surface of the headgear. Similarly, both sides of the first panel 1 may be fully or partially lapped by other panels.

A panel which is darted may be overlaid with a non-darted panel or panels, such as is illustrated in Figures 39A-C.

In other forms, multiple darted panels may be overlaid on each other.

Where multiple darted panels are overlaid on each other they may be
5 darted so that one or more of their darts align with each other when the panels are in their desired lapped placement.

In some forms where multiple darted panels are overlaid on each other at least some or even all of their darts may not align with each other. This may provide for relatively increased strength of the headgear. Where the joining of the
10 panels at their darts results in a seam or region of increased thickness, this may also provide for a reduction in the thickness of the headgear.

A panel which is darted will be caused to deform when its darts are closed. If the panel is extensible, at least part or even all of the deformation of the panel as a result of its darting may be experienced in-plane rather than out-of-plane to
15 form a 3D shape.

Accordingly, at least one darted panel in a headgear may be of a limited extensibility to ensure a desired amount of out-of-plane deformation occurs due to its darting.

While shown in Figures 37-39A-C as including a first panel 1 having two
20 darts 9, it will be appreciated that one or more panels may include one or more darts, such allow for the desired 3D shape of the headgear. The darts may extend either further into or less far into a panel than is illustrated of the panel 1 of for example Figure 37. The darts may also have a relatively lesser or relatively greater angle between their adjacent sides. These parameters may be configured
25 such as to provide the desired shape to a headgear, including particularly a shape corresponding to the shape of a patient's head.

In other forms the panel or panels to form a 3D shape may be provided in multiple pieces which when their adjacent edges are brought together define a 3D shape.

30 As illustrated in Figures 37-39 a dart may be a tapered slot formed in a panel. As previously described, a dart may also be a tapered fold made in a panel, where the material within the tapered region is not removed to define a slot.

More generally a dart may be provided by any in-plane rotation of part of a panel relative to another part of a panel, about an axis normal or substantially
35 normal to the surface of the panel.

Such rotation is provided by the darts 9 of Figures 37-39 when they are closed, as the lateral parts of the panel 1 are rotated relative each other towards the central part of the panel.

While an in-plane rotation of part of a panel relative to another part of the same panel may be affected by closing one or more slot-like darts formed in a panel, it may also be provided by the joining together of edges of different panels or panel parts.

An example of this is seen in Figure 40 where a first panel 1 is provided in three parts 1a-1c. The shape of each of the parts 1a-1c is such that their edges 421-428 cannot all be brought together without causing a deformation of one or more parts of the panel.

When their adjacent edges 421-428 are aligned with each other one or more of the panel parts will be caused to deform to a 3D shape.

The 3D shape of the panel parts 1a-1c of Figure 40 when the adjacent edges 421-428 are brought together may be configured by control of the length of each edge and their angles relative to each other to provide the same 3D panel shape as may be provided by a panel with darts defined by tapered slots, such as that of Figure 38A and 38B.

While the foregoing description has made reference to various general concepts of lapping panels together and various features of particular embodiments of headgear formed by such lapped panels, it will be appreciated that any of the general concepts or features of particular embodiments may be combined in a multiplicity of different ways to provide a headgear.

According to various aspects of the disclosure a headgear comprising a plurality of panels each of which is at least partially lapped with another of the panels and which are bonded together at their laps by an adhesive may have a reduced weight relative to a headgear formed by other methods.

A headgear according to the disclosure may have a weight of less than about 30 g, of less than about 20 g, or of less than about 10 g.

In particular, various embodiments of a headgear according to the disclosure may have a weight of about 17.5 g to about 27.5 g, and more particularly of about 25 g.

As an example, a headgear of an embodiment shown and described in relation to Figures 18A-19B may have a weight of about 10 g to about 30 g. More specifically, a headgear of the embodiment of Figure 18A-19B may have a weight of about 20 g.

CLAIMS

1. A headgear for a patient interface, the headgear comprising a plurality of panels, each panel having two opposed major faces,

5 wherein the headgear has at least one lapped region in which at least two of the plurality of panels respectively overlap and underlap each other, and at least one non-lapped region in which one or more of the plurality of panels is not lapped by another of the plurality of panels, and

10 wherein at the or each at least one lapped region the panels are bonded to each other by an adhesive.

2. The headgear of claim 1, wherein a first panel of the plurality of panels comprises a different material to that of a second panel of the plurality of panels, and the different materials comprise one or more of a different texture, softness, stiffness or flexibility, stretch properties, density, thickness, colour, 15 frictional coefficient in relation to a reference material, breathability, or degree of transparency or sheer.

3. The headgear of claim 1 or 2, wherein the plurality of panels comprise at least one panel having a first extensibility and at least one panel having a second, relatively lesser, extensibility.

20 4. The headgear of any one of claims 1 to 3, wherein the plurality of panels define:

a rear portion for location at the rear of the head of a patient,

a crown strap, and

at least two side straps for attachment to the patient interface.

25 5. The headgear of claim 4, wherein the rear portion transfers loads between the at least two side straps, and the rear portion comprises at least one panel of a first material which laps a portion of a side strap panel of each of the at least two side straps.

30 6. The headgear of claim 4 or 5, wherein an extent of the rear portion to be located lowest on the rear of the head of a patient comprises a lower panel of a second material.

7. The headgear of claim 6, wherein the lower panel of the second material is of a relatively greater extensibility than the plurality of panels of the first material.

35 8. The headgear of claim 6 or 7, wherein a portion of the lower panel is in a non-lapped region of the headgear, and the portion of the lower panel is substantially crescent-shaped.

9. The headgear of any one of claims 4 to 8, wherein the crown strap comprises a pair of crown strap portions which are adjustably fixable to each other to provide a variable-length crown strap, each crown strap portion comprising an internal crown strap portion panel and an external crown strap portion panel which are adhesively bonded to each other.

10. The headgear of any one of claims 4 to 9, wherein the at least two side straps comprise two lateral sets of an upper and a lower side strap, each set of side straps for connection to corresponding sides of the patient interface, and wherein the two upper side straps comprise a unitary panel which extends across the rear portion of the headgear and the unitary panel is provided within a lapped region across at least part of the rear portion of the headgear and within a pair of distal non-lapped regions.

11. The headgear of claim 10, wherein a set of upper and lower side strap comprise a unitary panel, the unitary panel configured to extend around a rear of an ear of a patient.

12. The headgear of claim 11, wherein an edge profile of each ear loop comprises a pair of straight-line portions.

13. The headgear of any one of claims 10 to 12, wherein terminal portions of either or both of the upper and lower side straps include gripping tabs comprising a first and second tab panels, the tab panels respectively overlapping and underlapping the terminal portion at a first tab region and lapping each other at a more distal second tab region.

14. The headgear of claim 13, wherein the headgear at the second more distal tab region is of greater stiffness than the headgear at the first tab region.

15. The headgear of any one of claims 10 to 14, wherein each side strap of the set of side straps comprises a series of tactile features along at least one surface of the side strap, the tactile features for providing tactile feedback to a patient of different adjustment conditions of the respective strap.

16. The headgear of claim 15, wherein the series of tactile features provide for indexing of the adjustment of each respective side strap.

17. The headgear of any one of claims 10 to 16, wherein each side strap comprises a strap panel, the strap panel lapped on at least one major face with a tactile feedback panel, wherein the tactile feedback panel is one or more of thinner, harder, and stiffer than the strap panel which it laps and wherein the tactile feedback panel and the strap panel are bonded by an adhesive.

18. The headgear of claim 17, wherein the tactile feedback panel comprises the tactile features, the tactile features provided by a series of voids

through the tactile feedback panel which present the tactile feedback panel as having a series of ridges relative to the strap panel to which it is lapped.

19. The headgear of claim 18, wherein the tactile feedback panel is one or both of harder and stiffer than the strap panel, and the series of ridges are for mechanically engaging with a buckle of the patent interface.

20. The headgear of any one of claims 4 to 19, wherein an edge of one or more of the crown strap, rear portion, and side straps, is treated with a conditioner.

21. The headgear of any one of claims 4 to 20, wherein one or more of the set of side straps, the rear portion, and the crown strap comprise at least in part a relatively elastic panel which is overlapped and underlapped by respective relatively inelastic panels.

22. The headgear of any one of claims 1 to 21, wherein at one or more lapped regions the headgear is at least partially one or both of overlapped and underlapped by an adhesive.

23. The headgear of any one of claims 1 to 22, wherein the adhesive comprises a hot-melt adhesive which is interposed between the panels at the or each at least one lapped region.

24. The headgear of any one of claims 1 to 23, wherein the adhesive is provided in a sheet or film-like form.

25. The headgear of any one of claims 1 to 24, wherein at least part of a panel at an edge of the headgear is rolled back onto itself and an adhesive is provided between the rolled-back part of the panel and a part of the panel onto which it is rolled back.



26. The headgear of any one of claims 1 to 25, wherein at least part of an edge of the headgear comprises an edge softening panel, a portion of which is lapped to a more interior panel, and wherein the edge panel comprises a material that is thinner and/or softer than that of the more interior panel to which it is lapped.

27. The headgear of claim 26, wherein the edge softening panel is lapped to a more interior panel of the headgear such that the edge softening panel defines at least part of an internal surface, relative to the head of a patient in use, of the headgear.

28. The headgear of claim 26 or 27, wherein an edge softening panel is provided at an upper side of the rear portion, and the edge softening panel is provided within both a lapped region and a non-lapped region, and wherein the non-lapped region forms at least part of an upper peripheral edge of the rear portion, and wherein the edge softening panel at the non-lapped region is

configured, in use and towards the upper peripheral edge of the rear portion, to roll away from the head of the patient.

29. The headgear of claim 28, wherein the edge softening panel at the non-lapped region extends away from an adjacent lapped region a distance of
5 about 5 times to about 20 times a thickness of the edge softening panel.

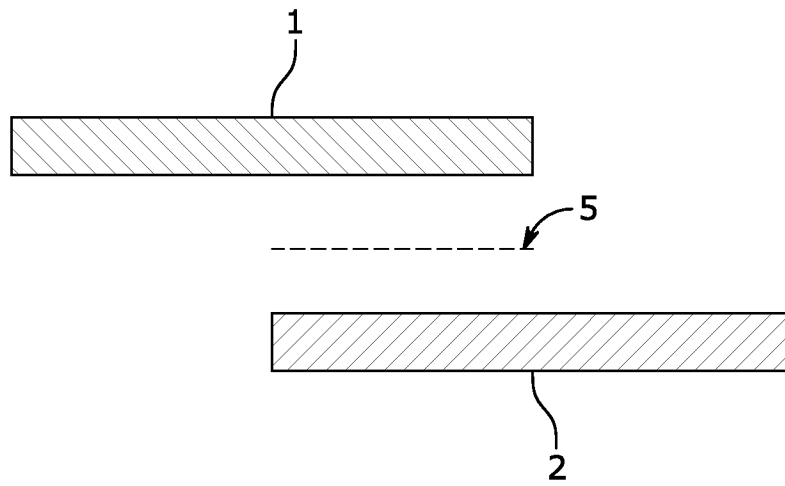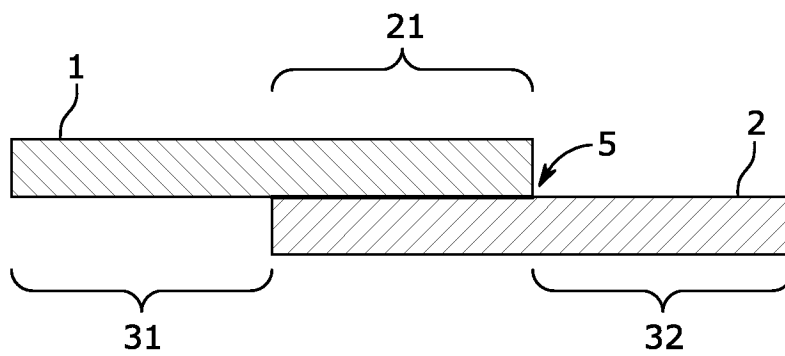**FIGURE 1A****FIGURE 1B**

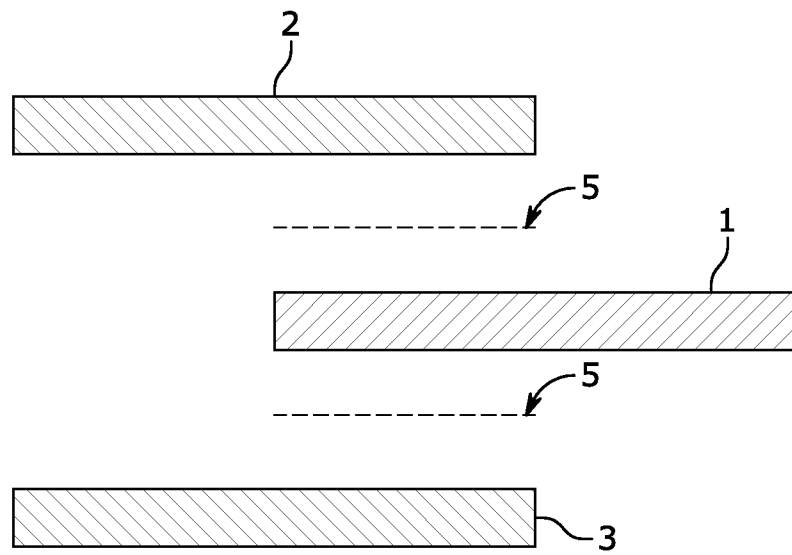


FIGURE 2A

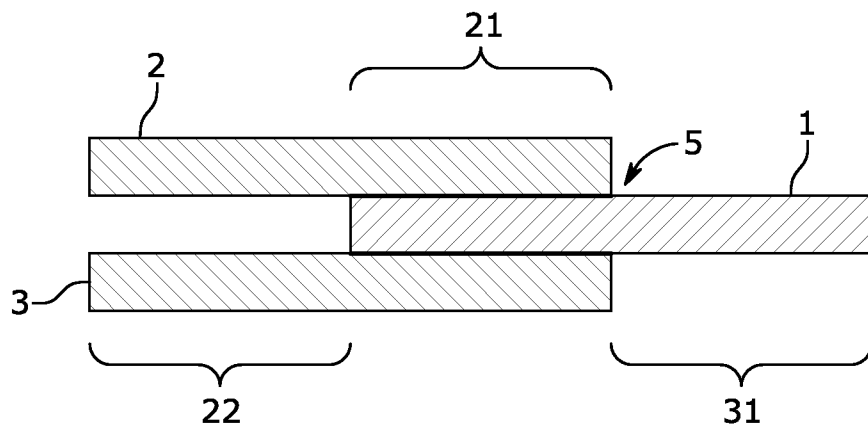


FIGURE 2B

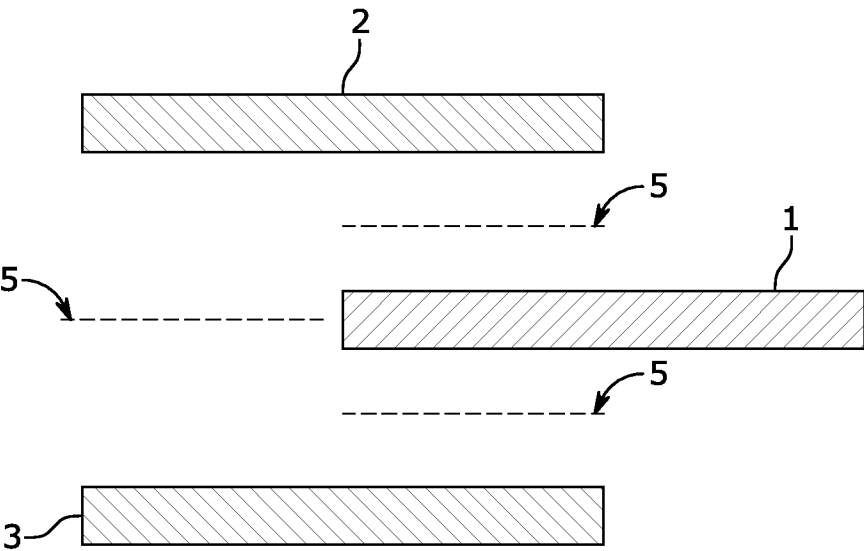


FIGURE 3A

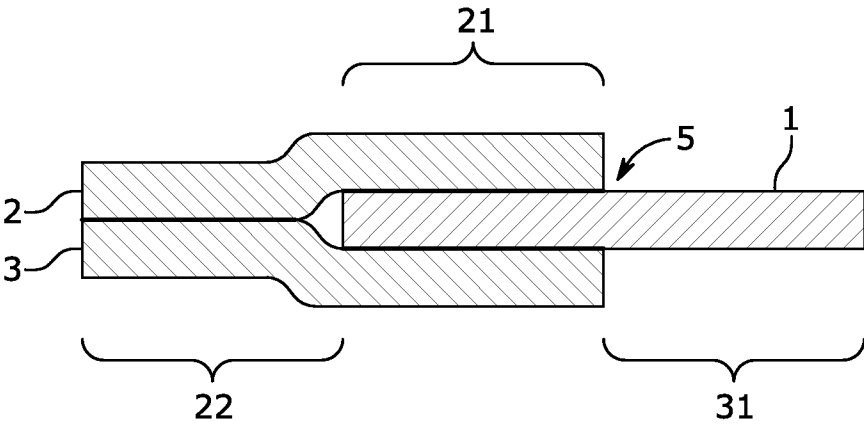


FIGURE 3B

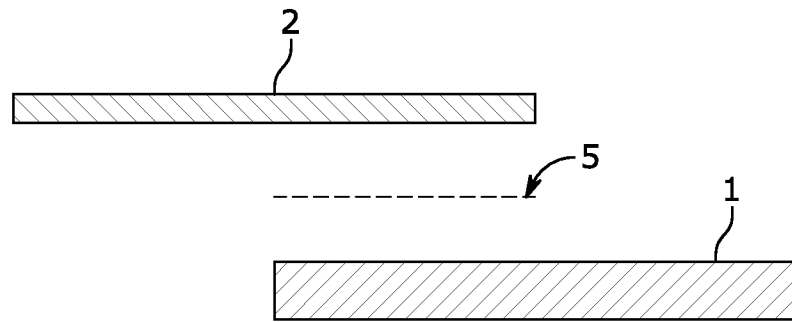


FIGURE 4A

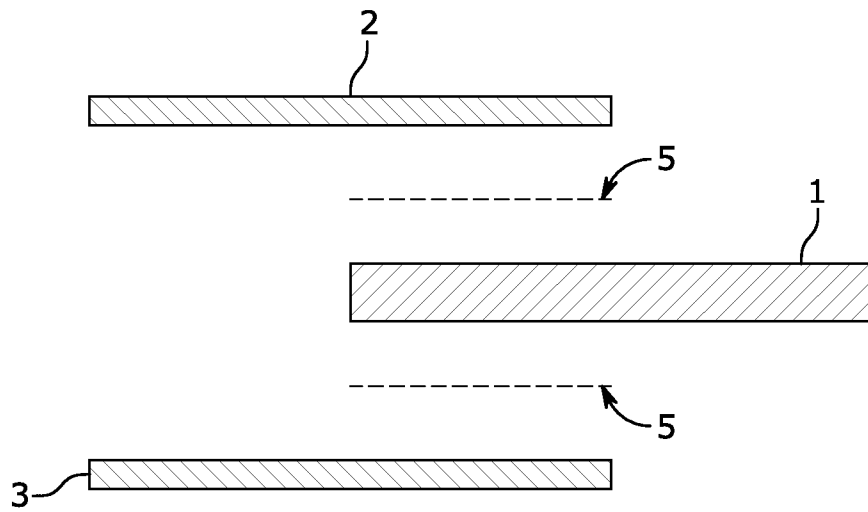


FIGURE 4B

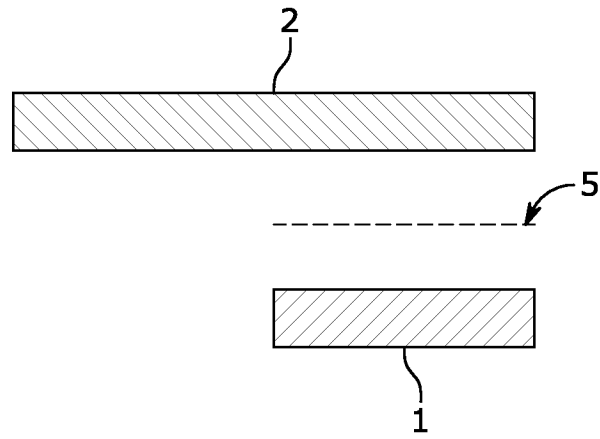


FIGURE 5A

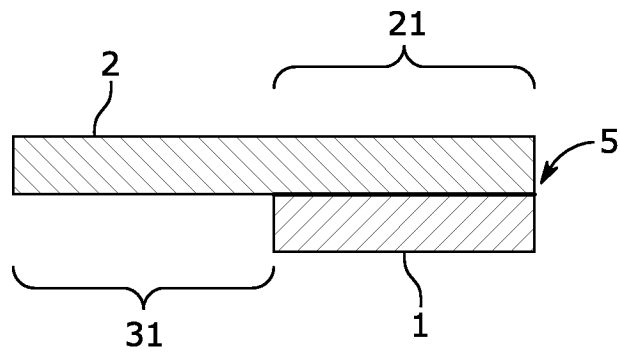


FIGURE 5B

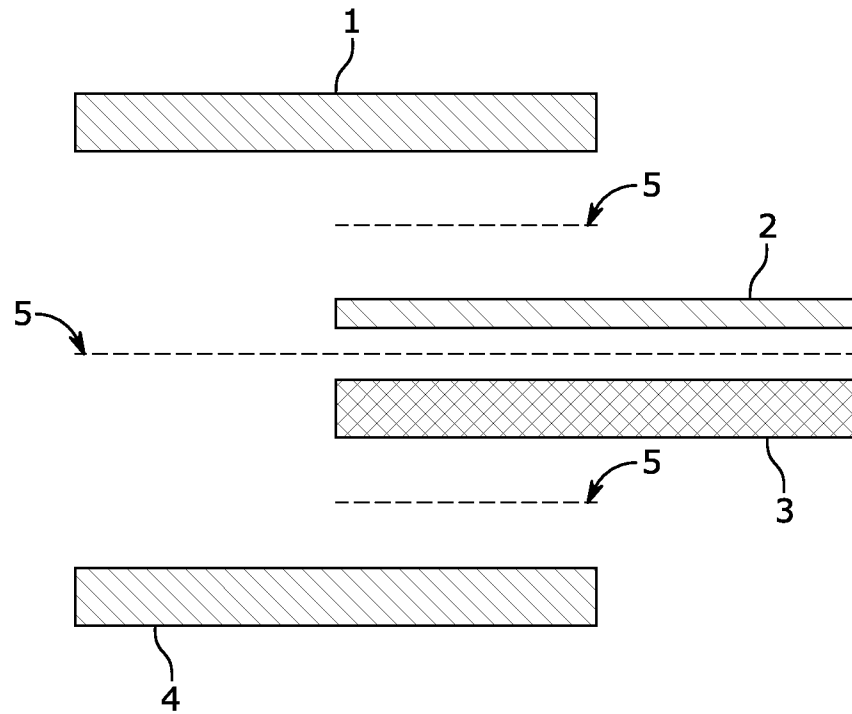


FIGURE 6A

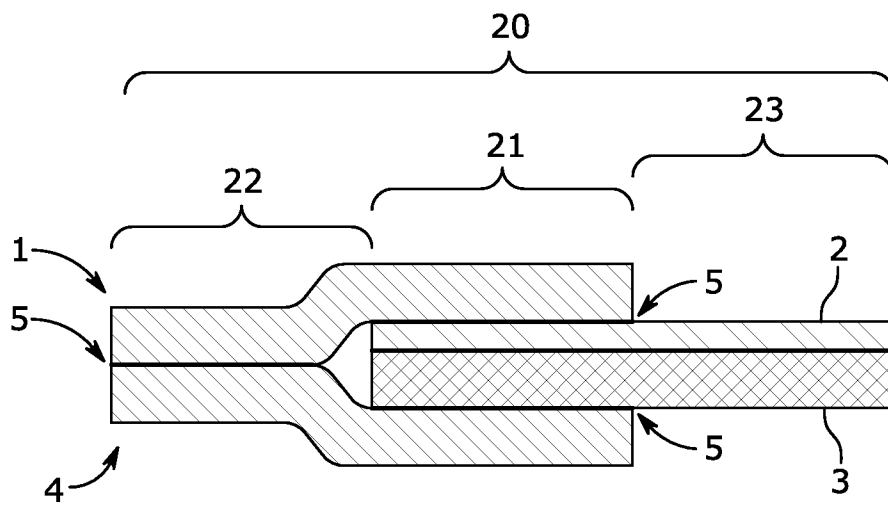


FIGURE 6B

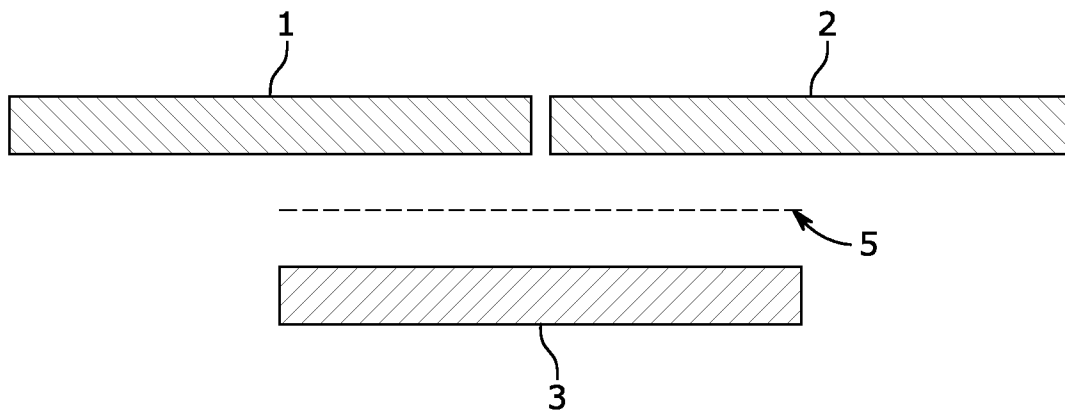


FIGURE 7A

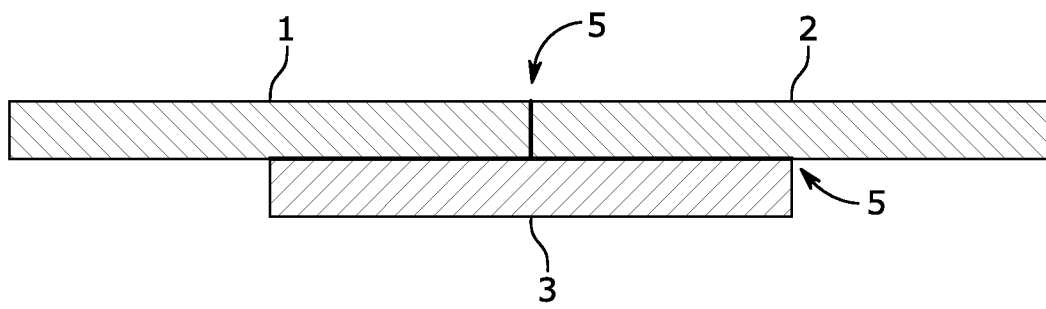


FIGURE 7B

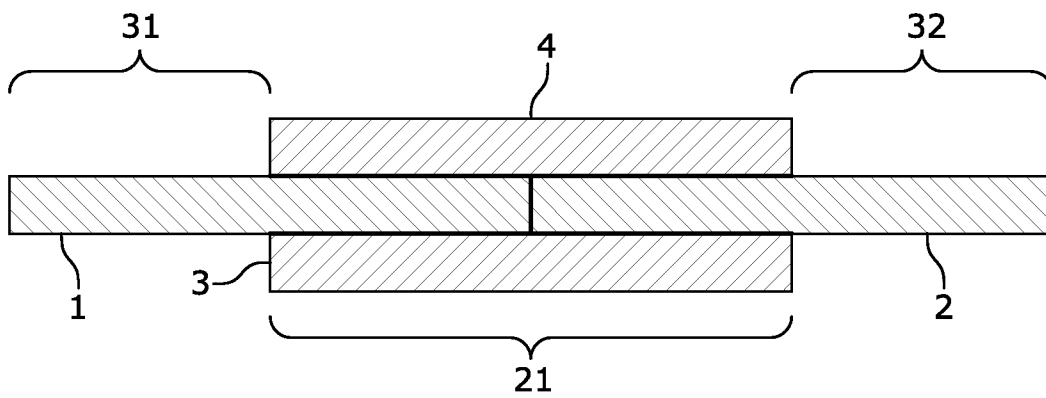


FIGURE 8

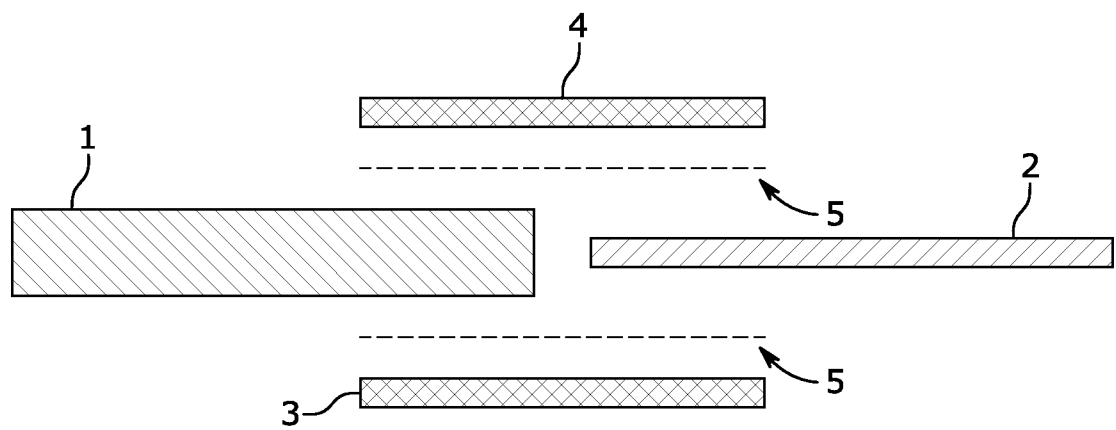


FIGURE 9A

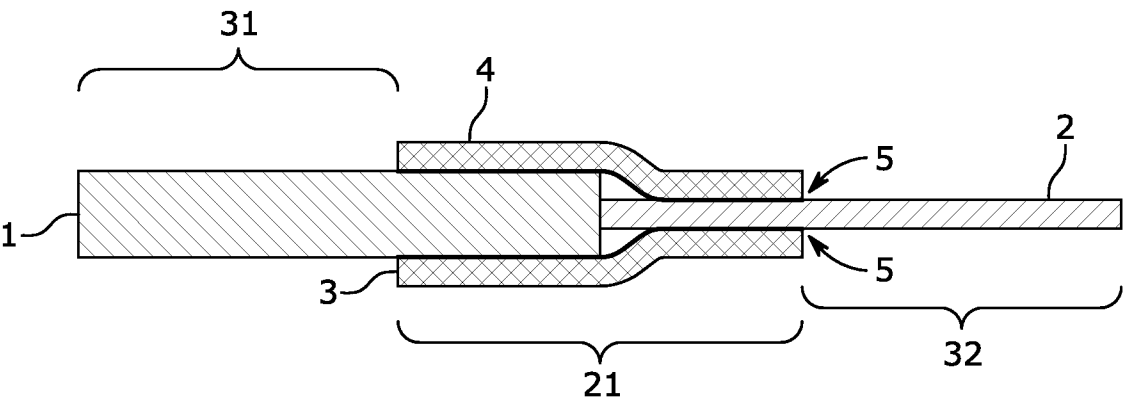


FIGURE 9B

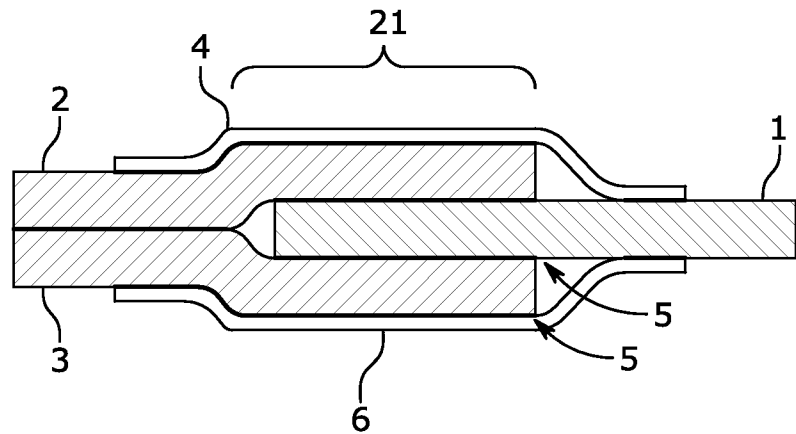


FIGURE 10

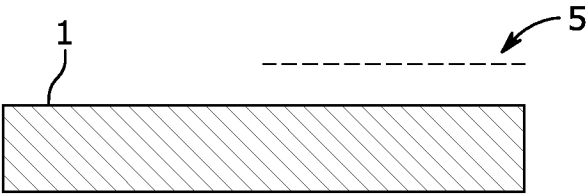


FIGURE 11A

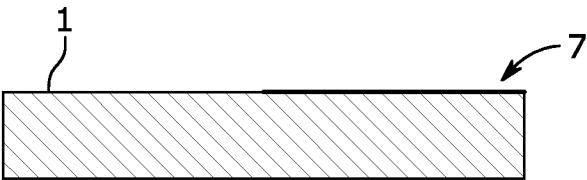


FIGURE 11B

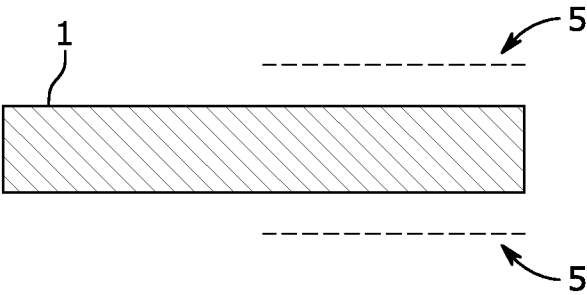


FIGURE 12A

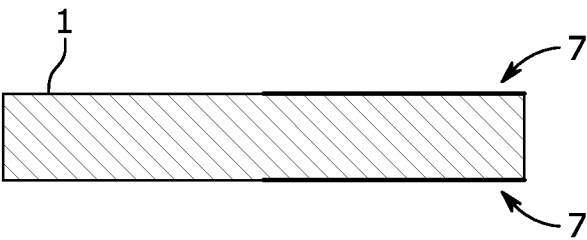


FIGURE 12B

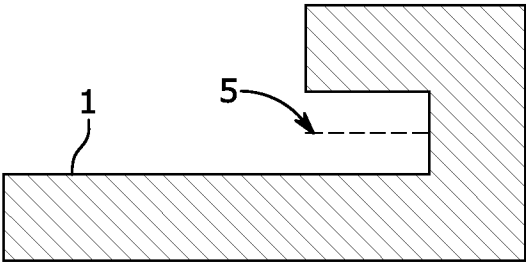


FIGURE 13A

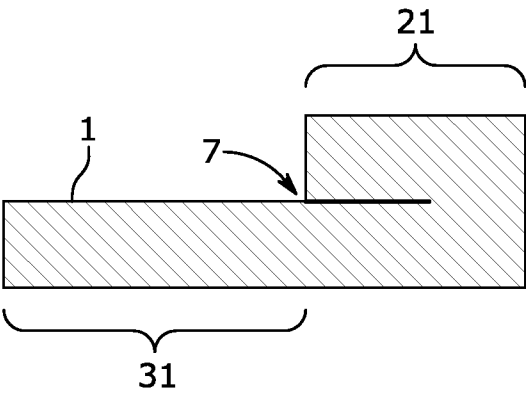


FIGURE 13B

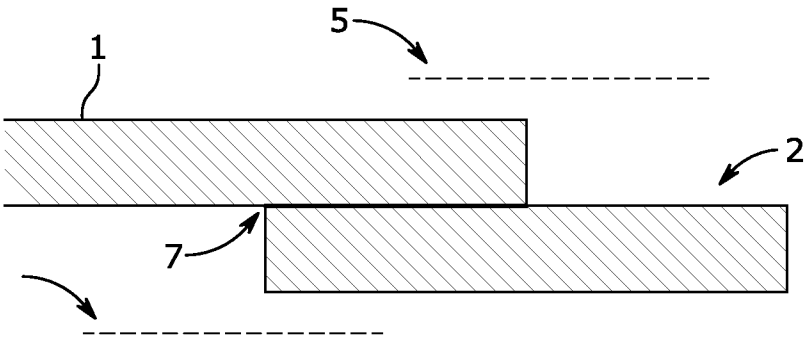


FIGURE 14A

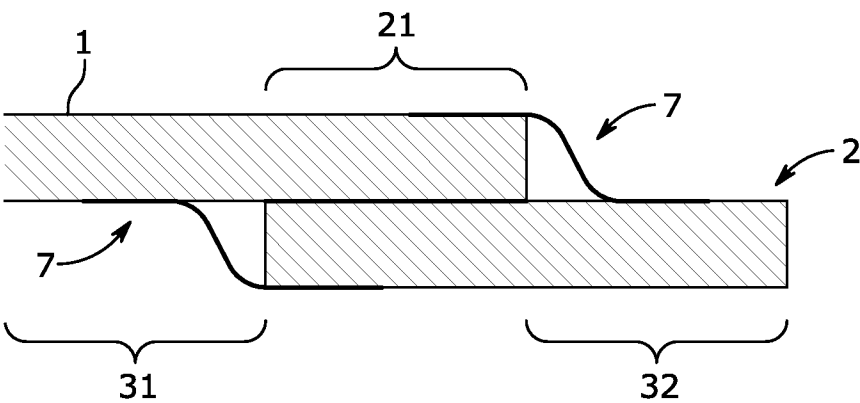


FIGURE 14B

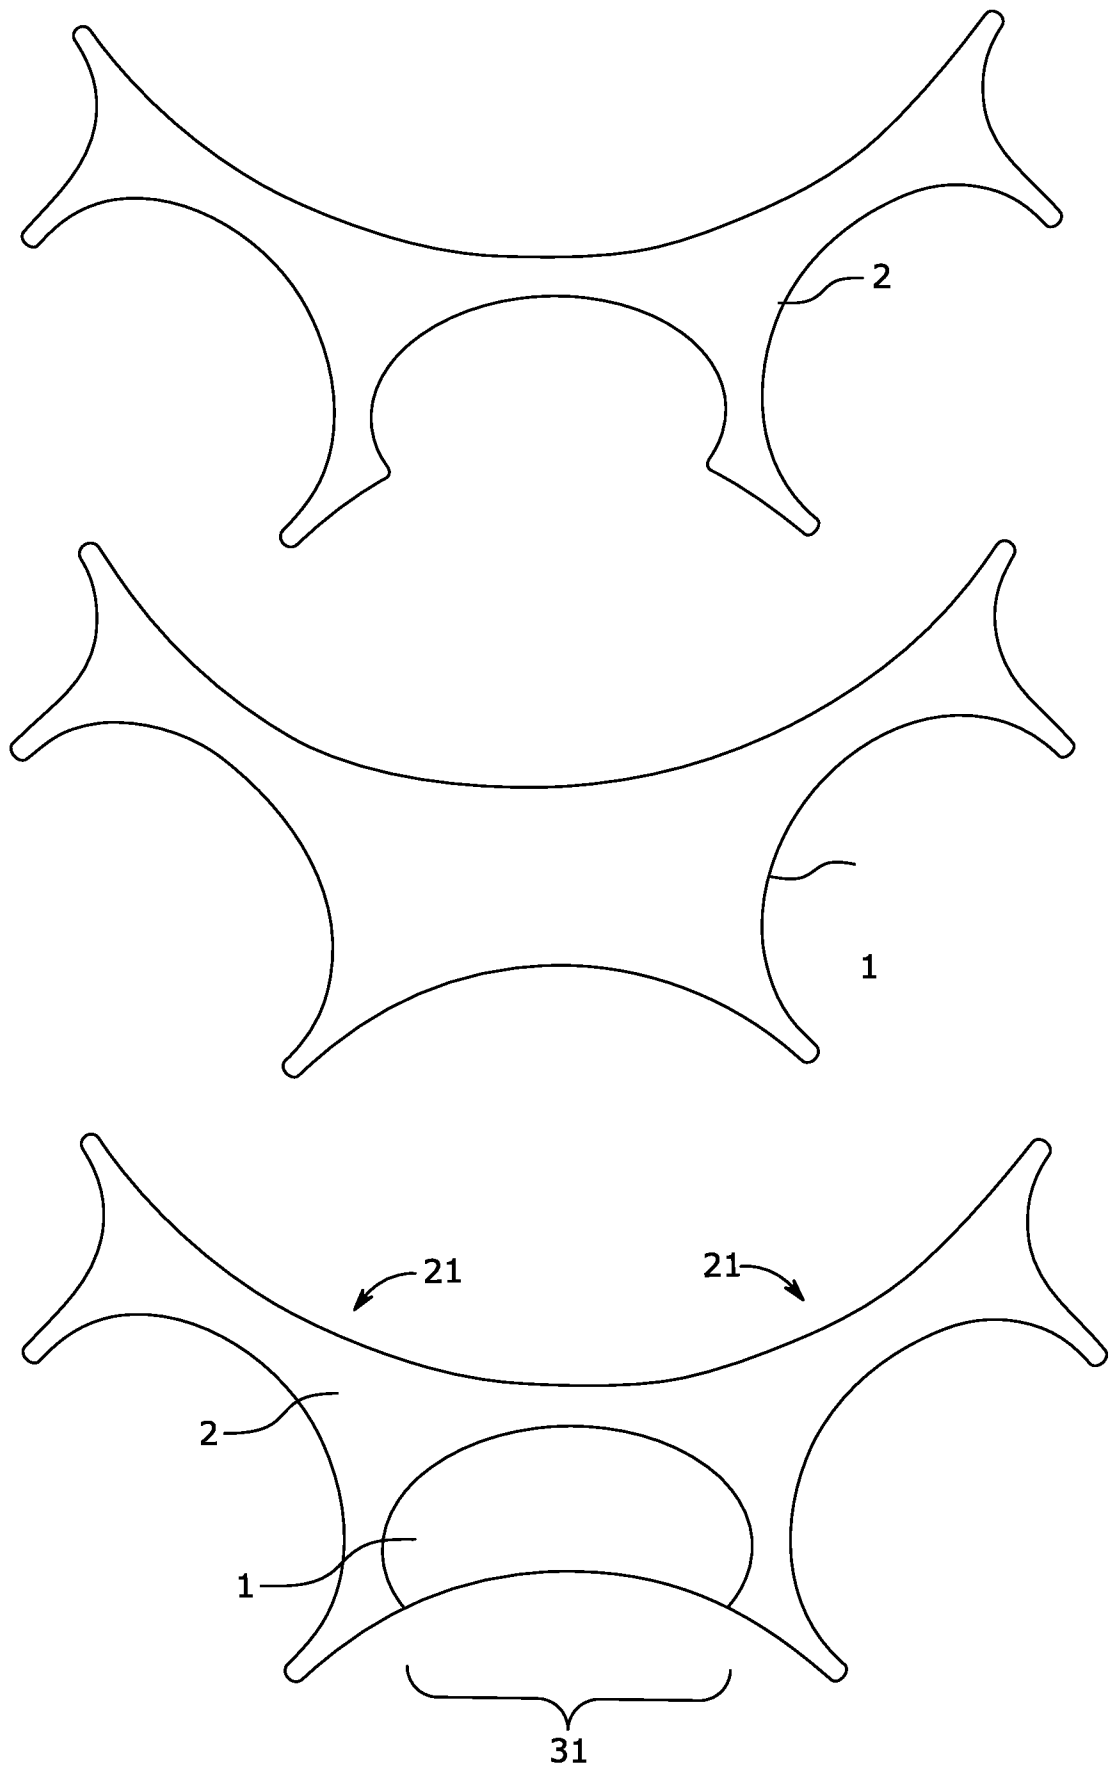


FIGURE 15

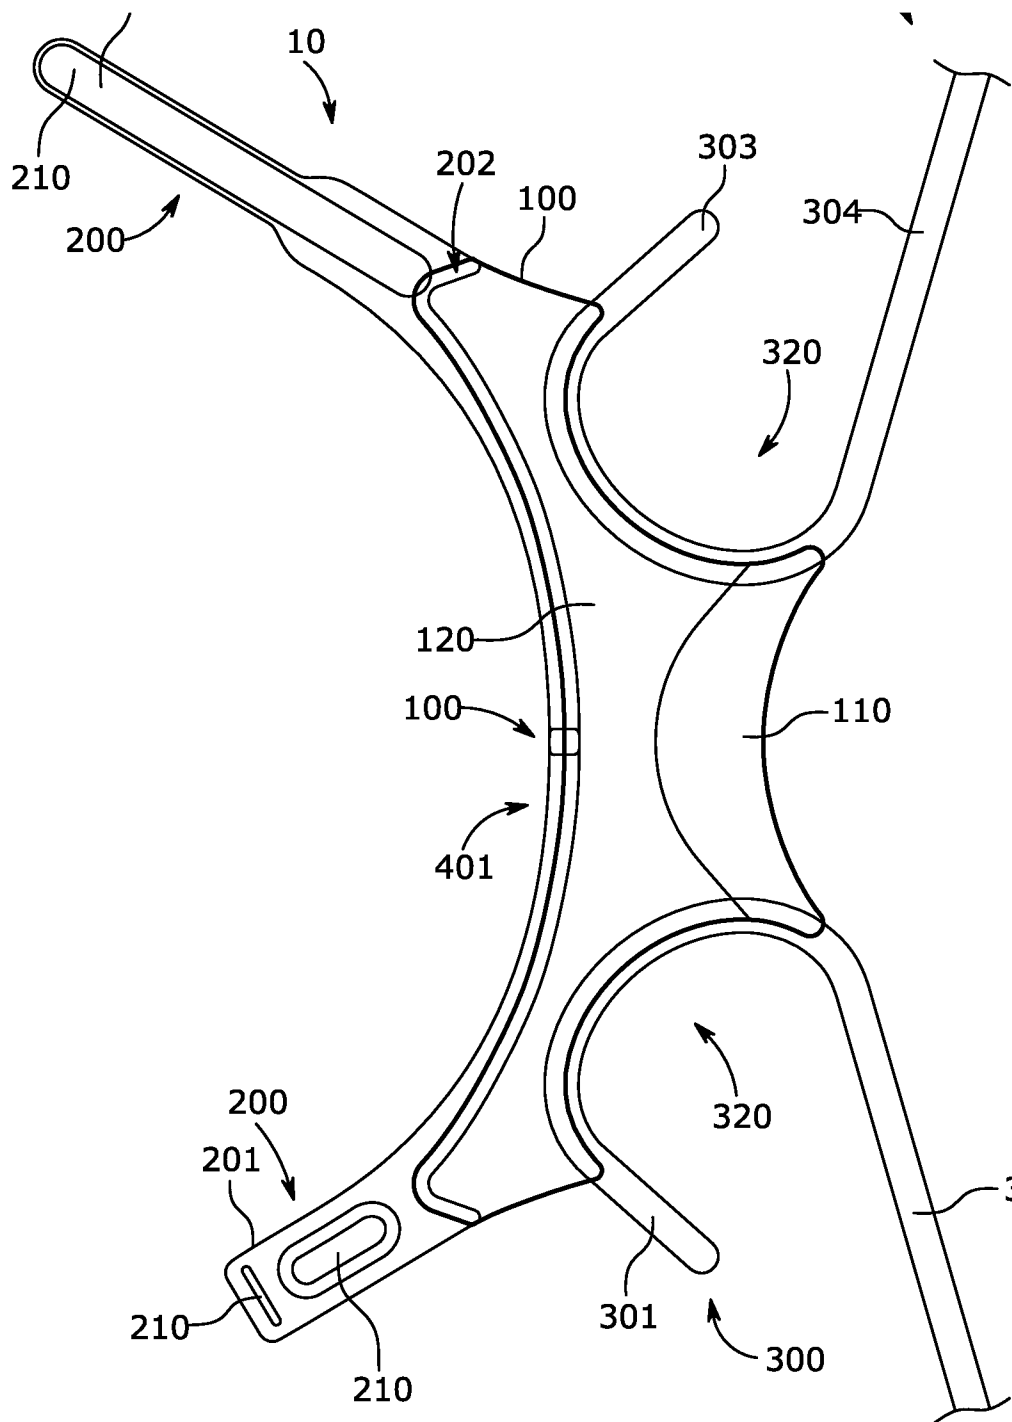


FIGURE 16A

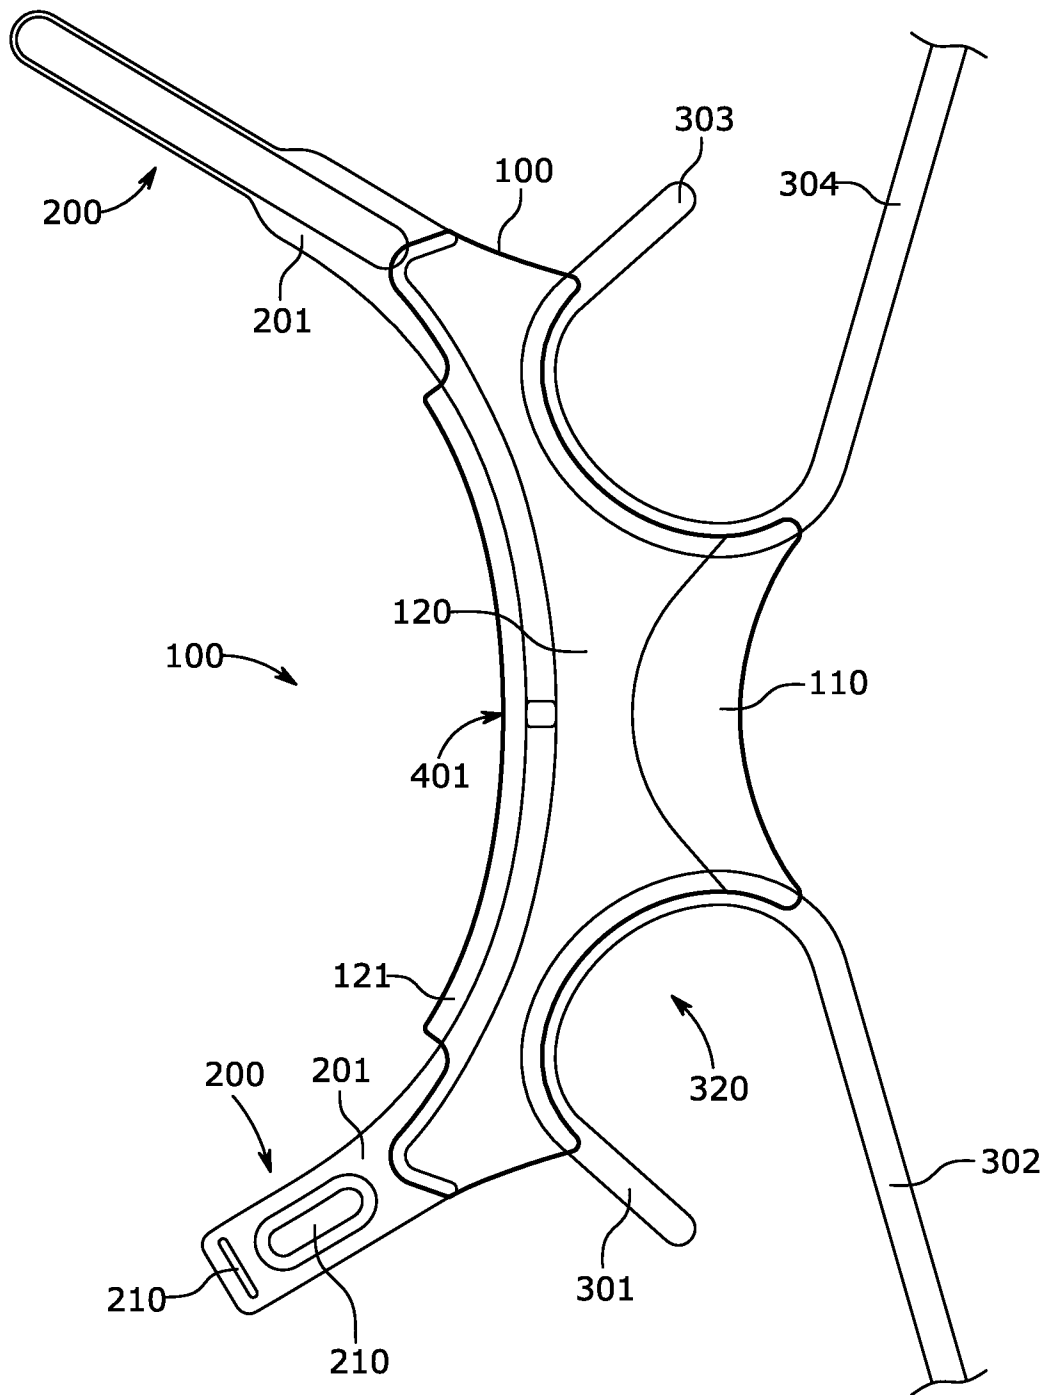


FIGURE 16B

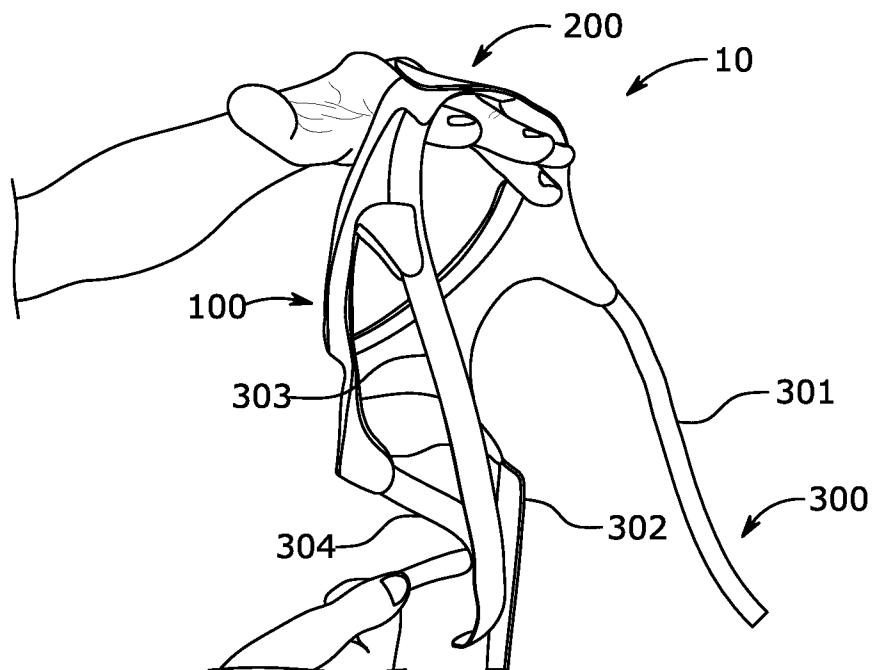


FIGURE 17A

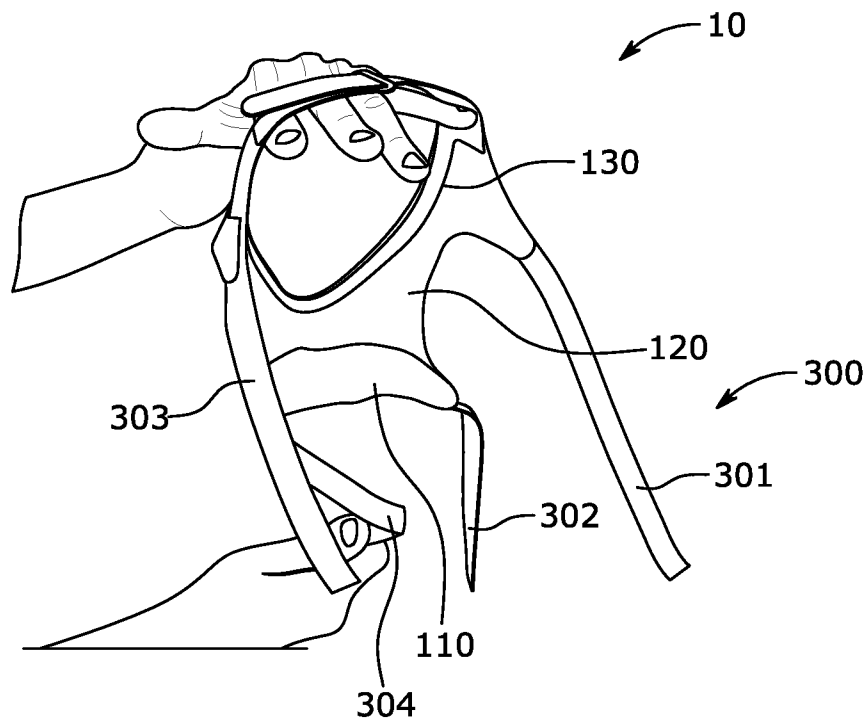


FIGURE 17B

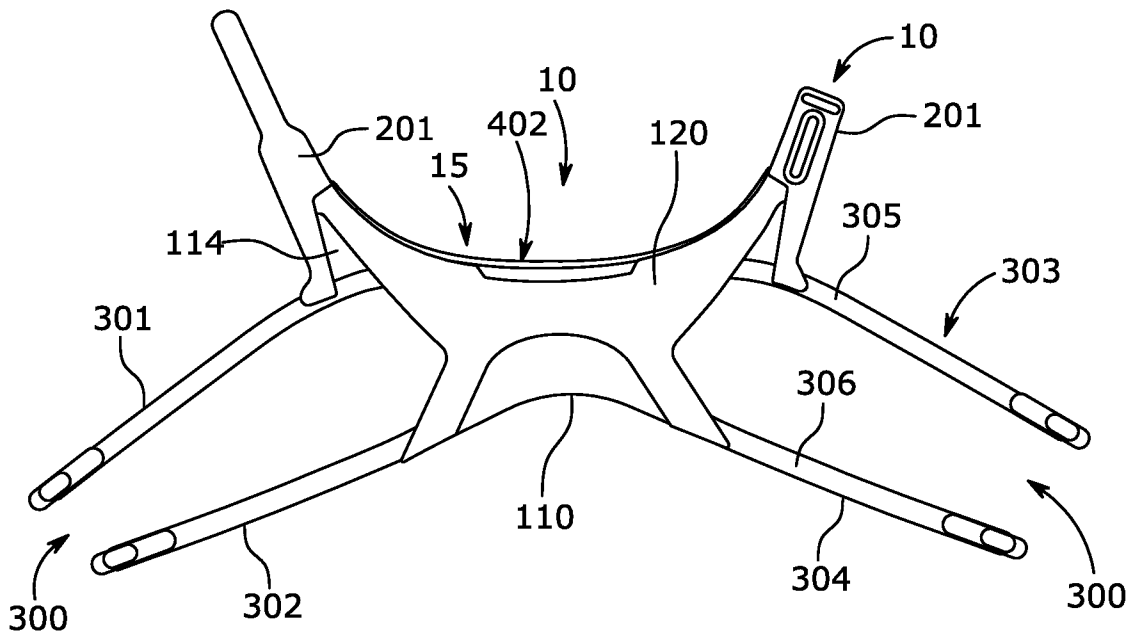


FIGURE 18A

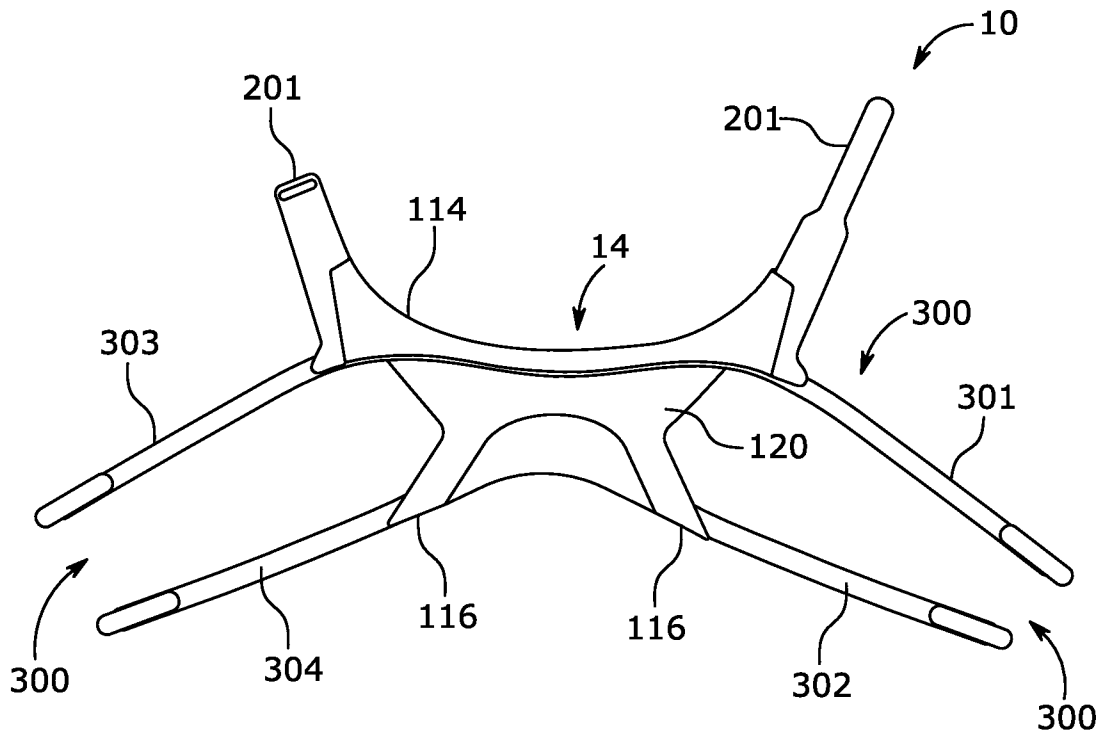


FIGURE 18B

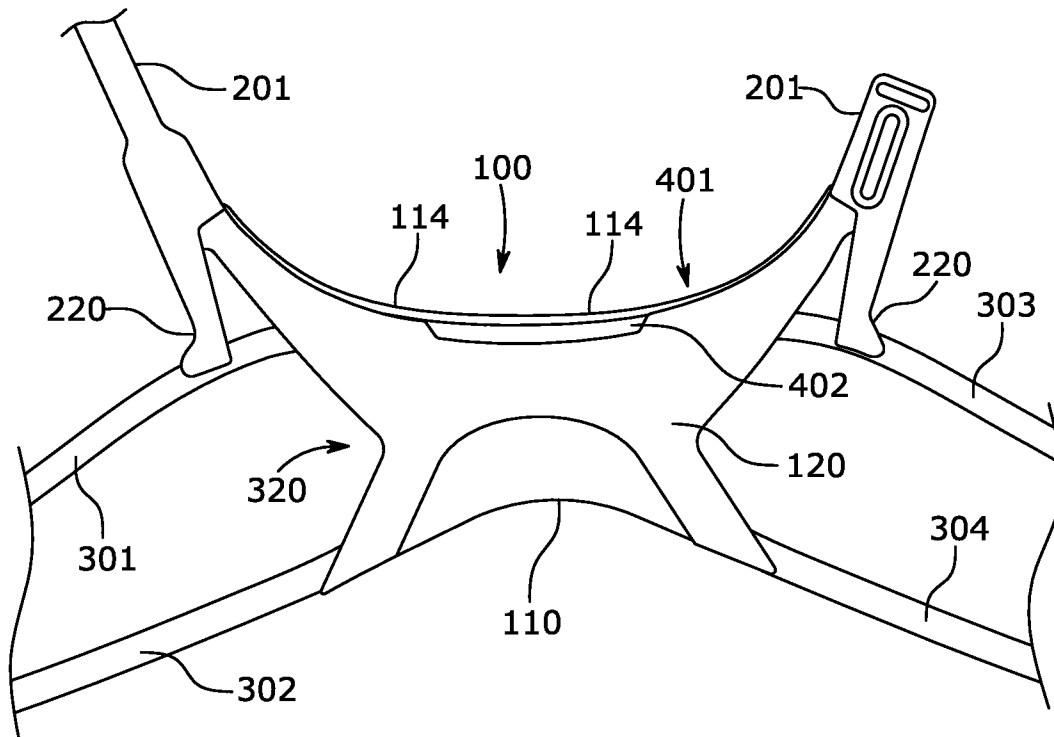


FIGURE 19A

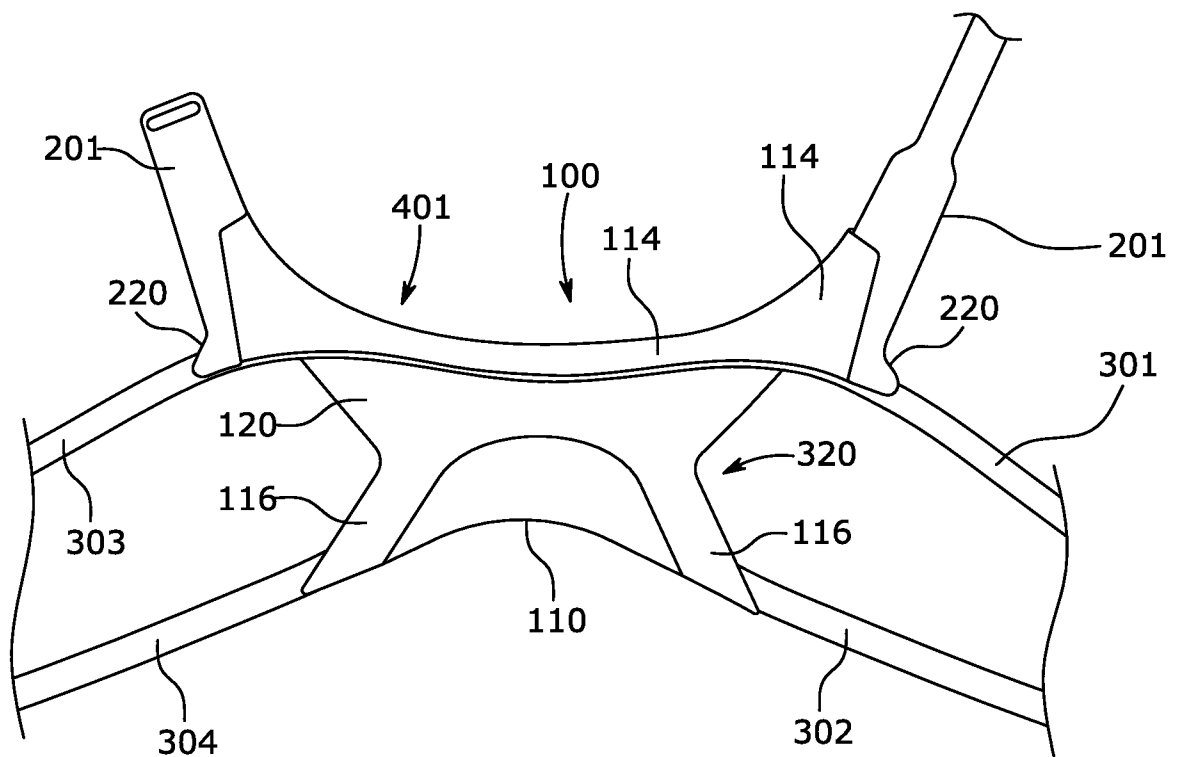


FIGURE 19B

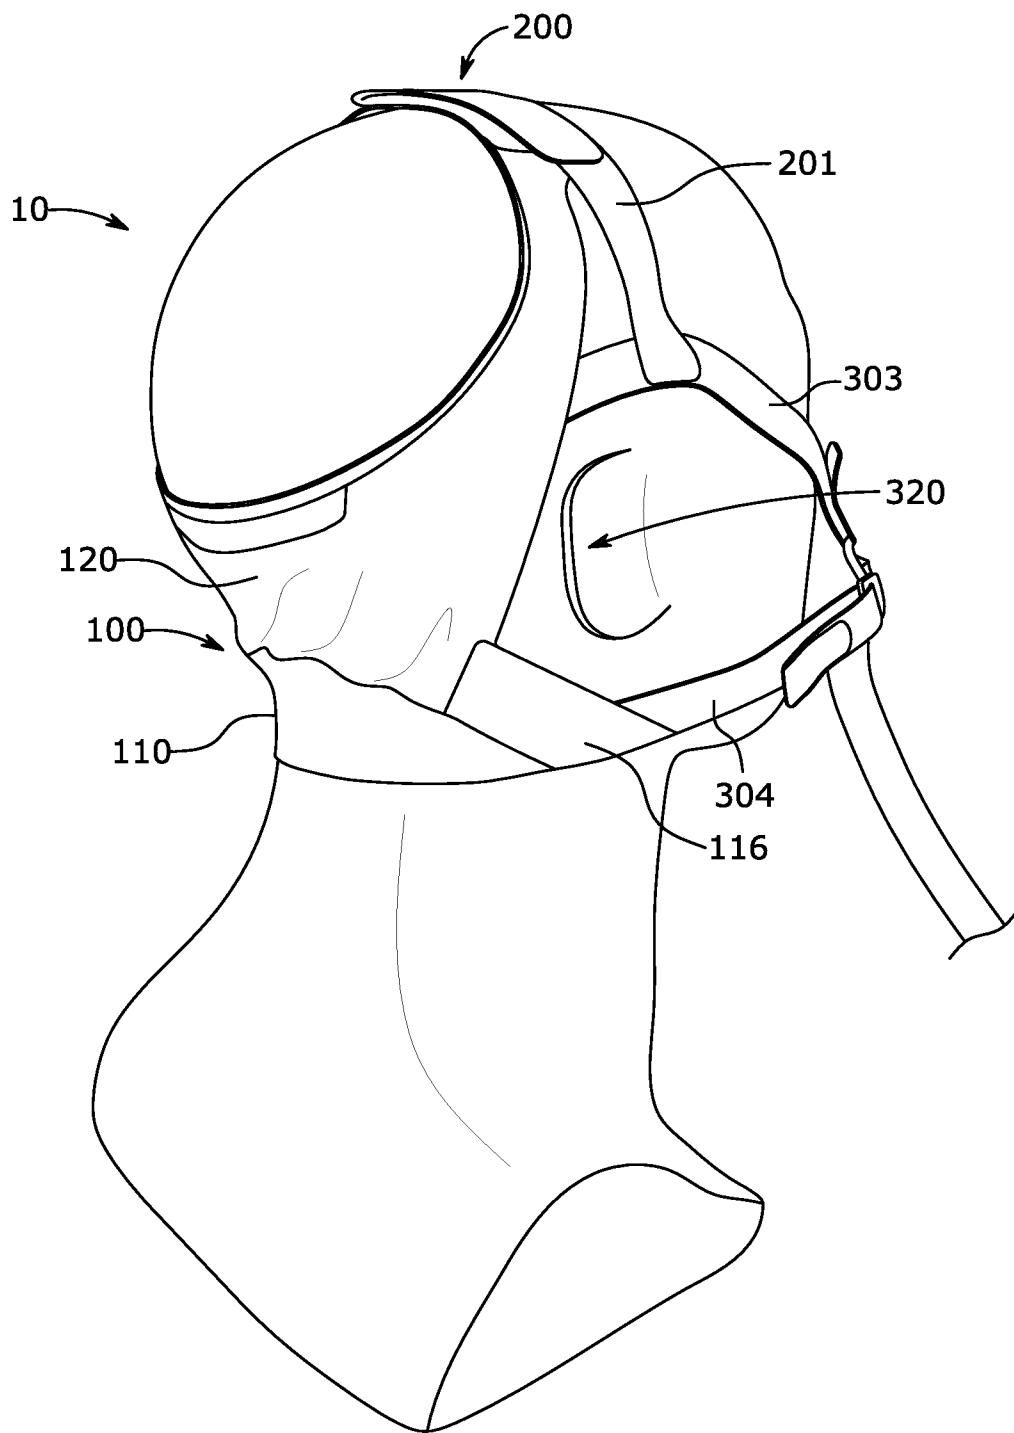


FIGURE 20

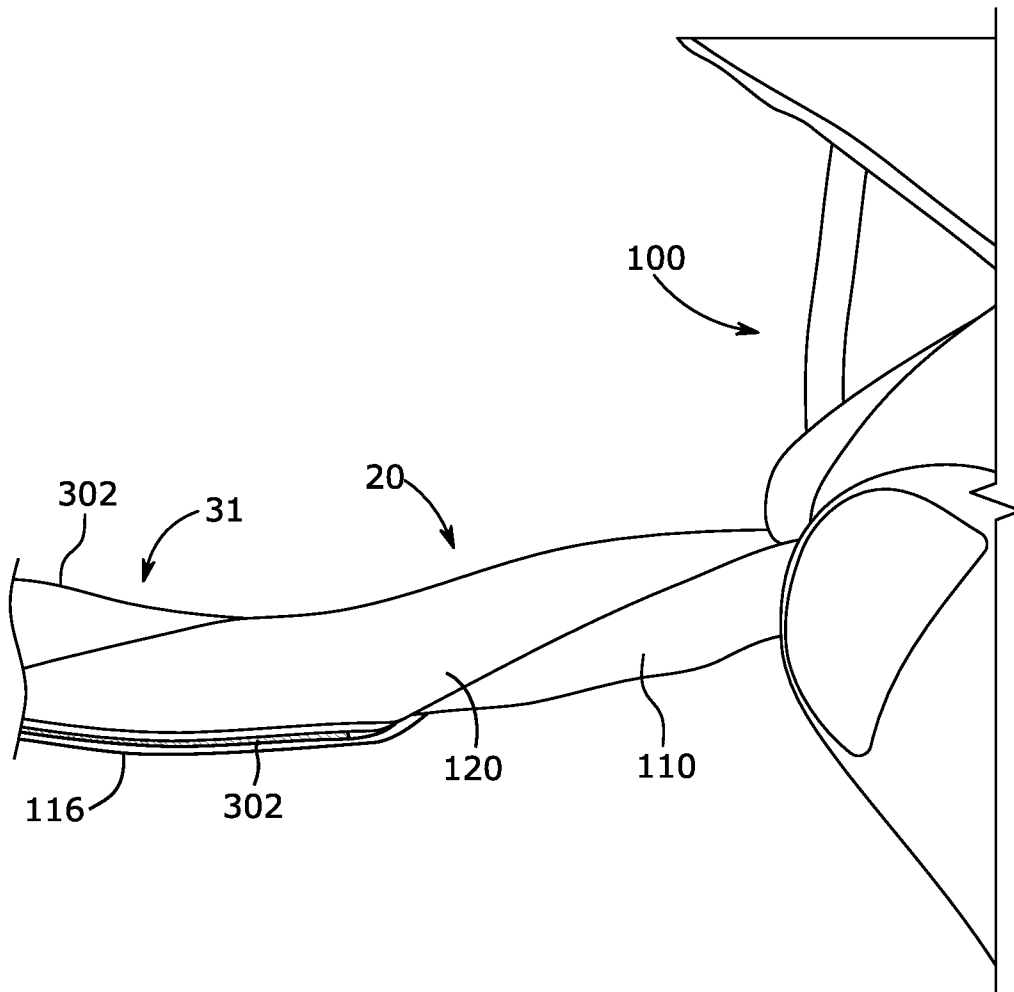


FIGURE 21

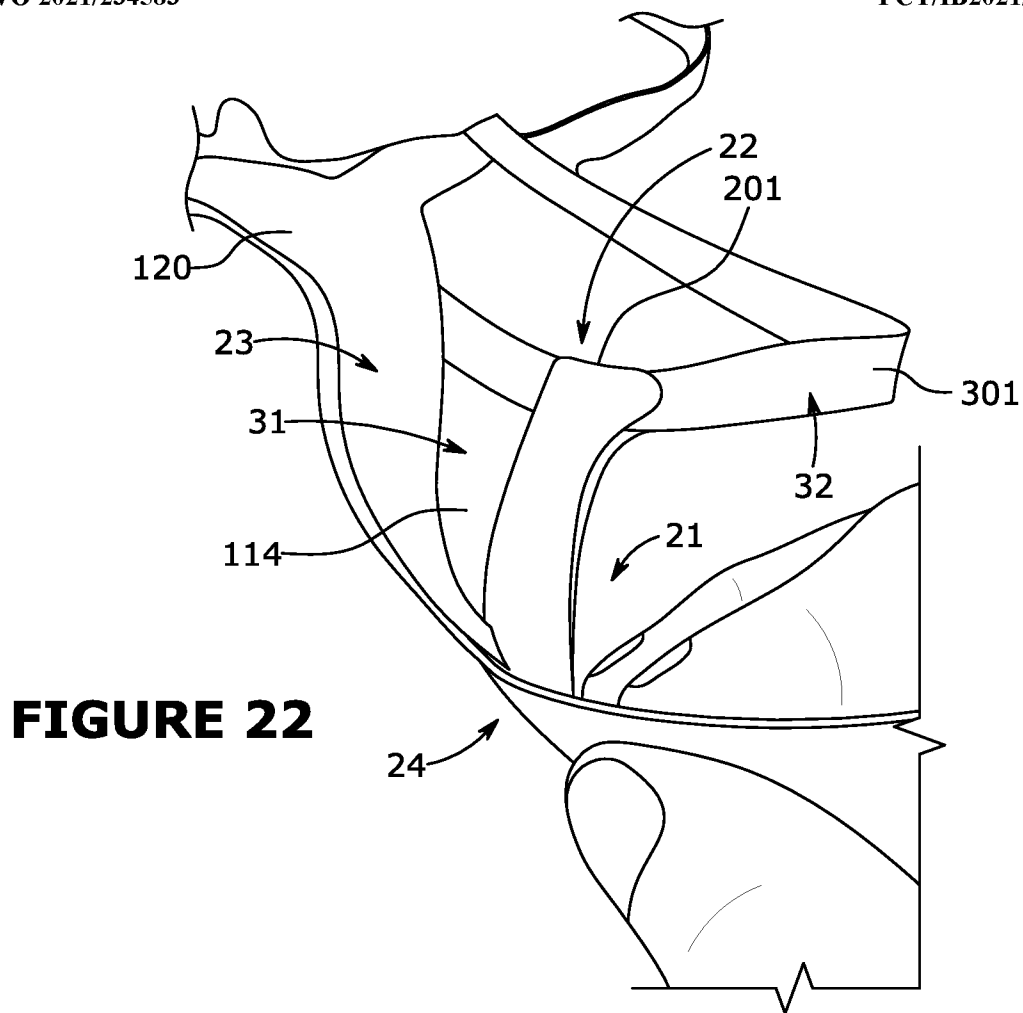


FIGURE 22

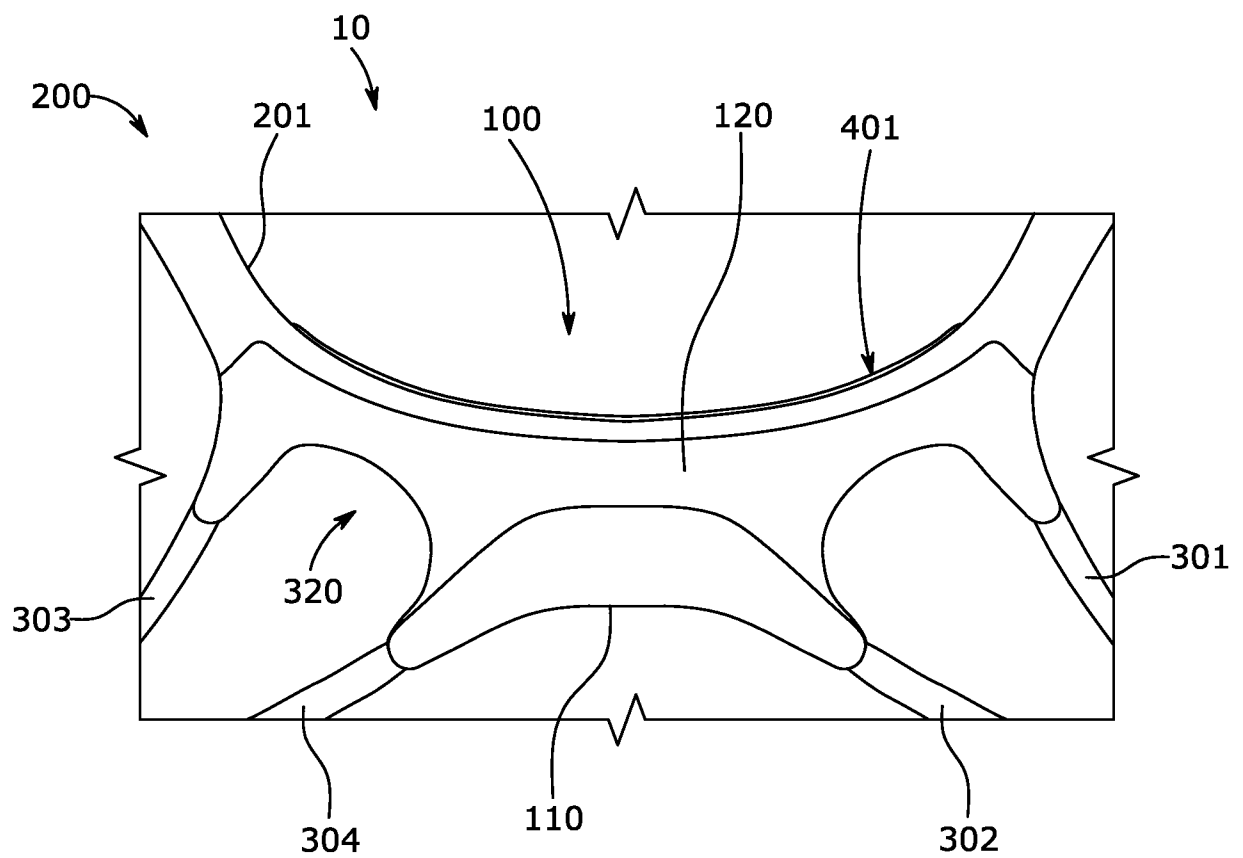


FIGURE 23

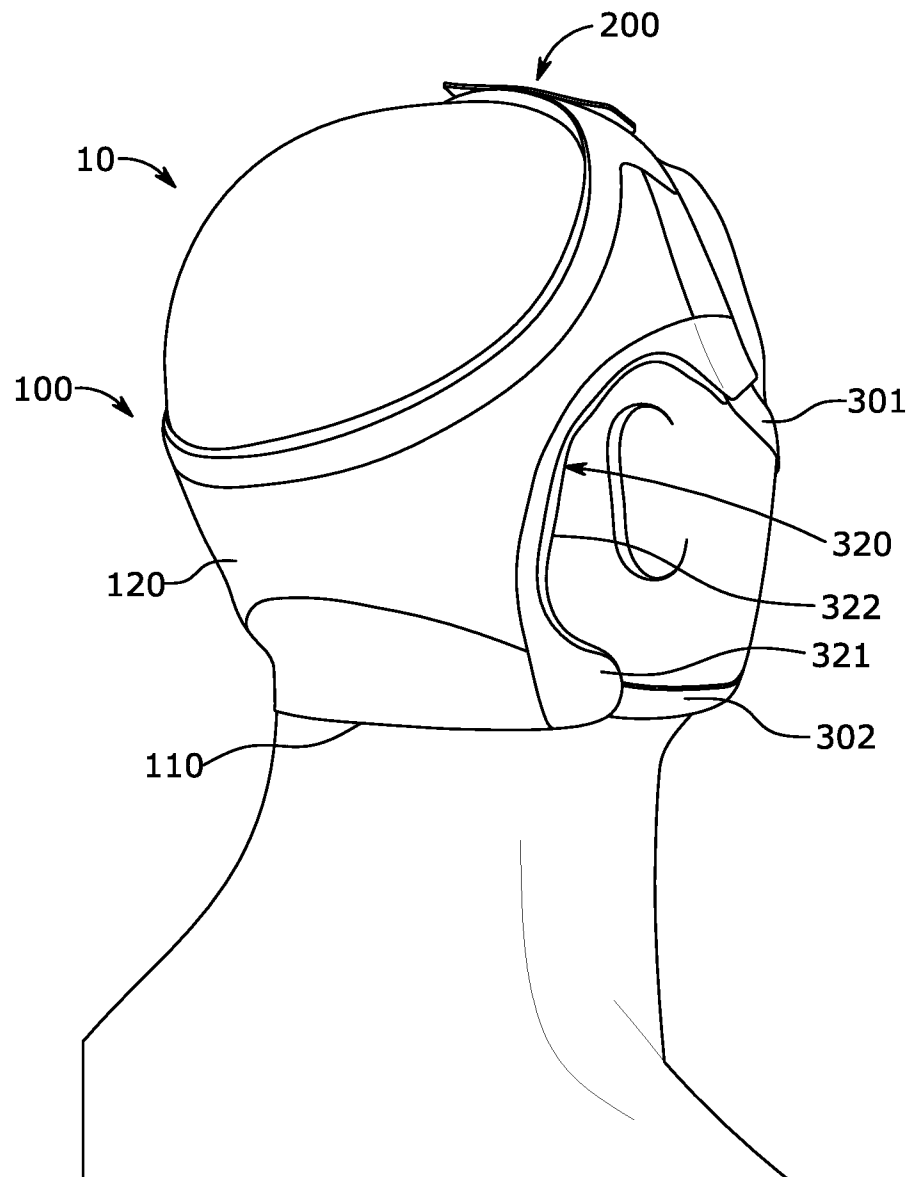


FIGURE 24

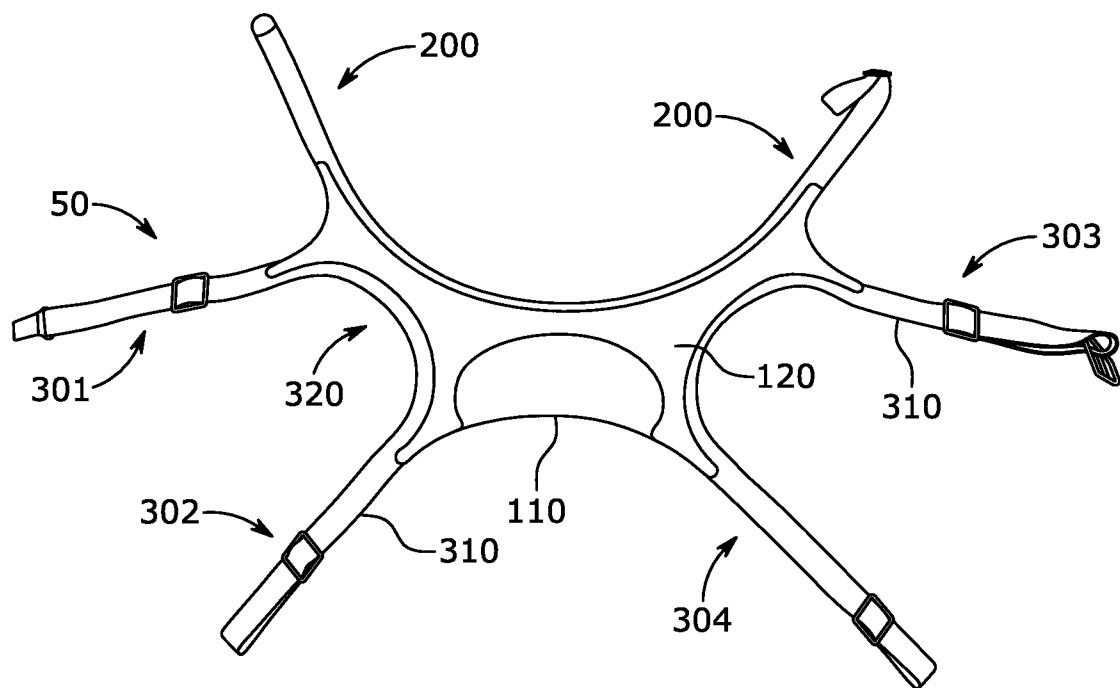


FIGURE 25A

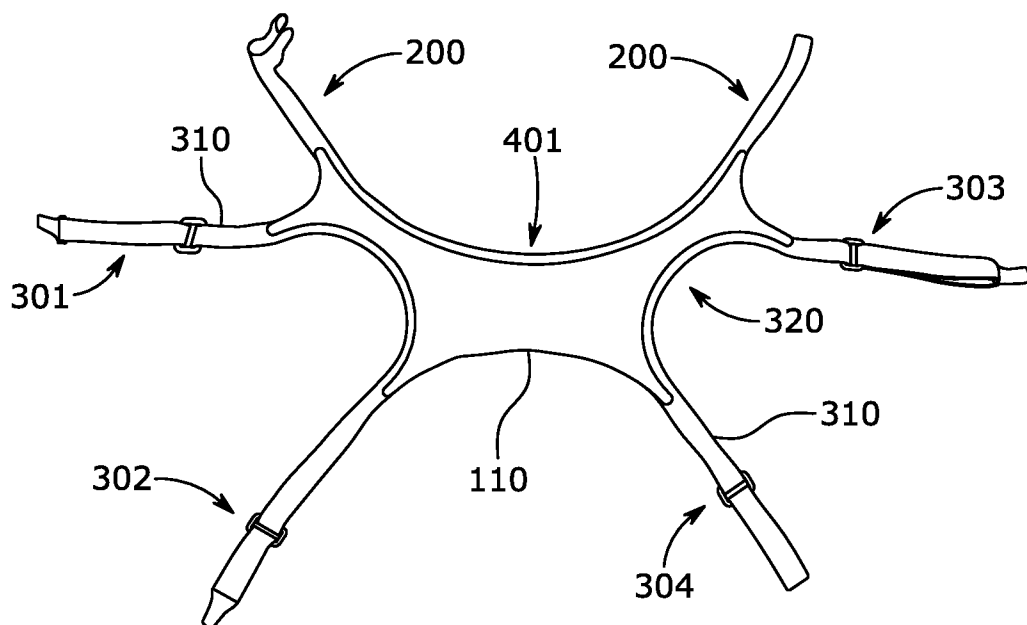


FIGURE 25B

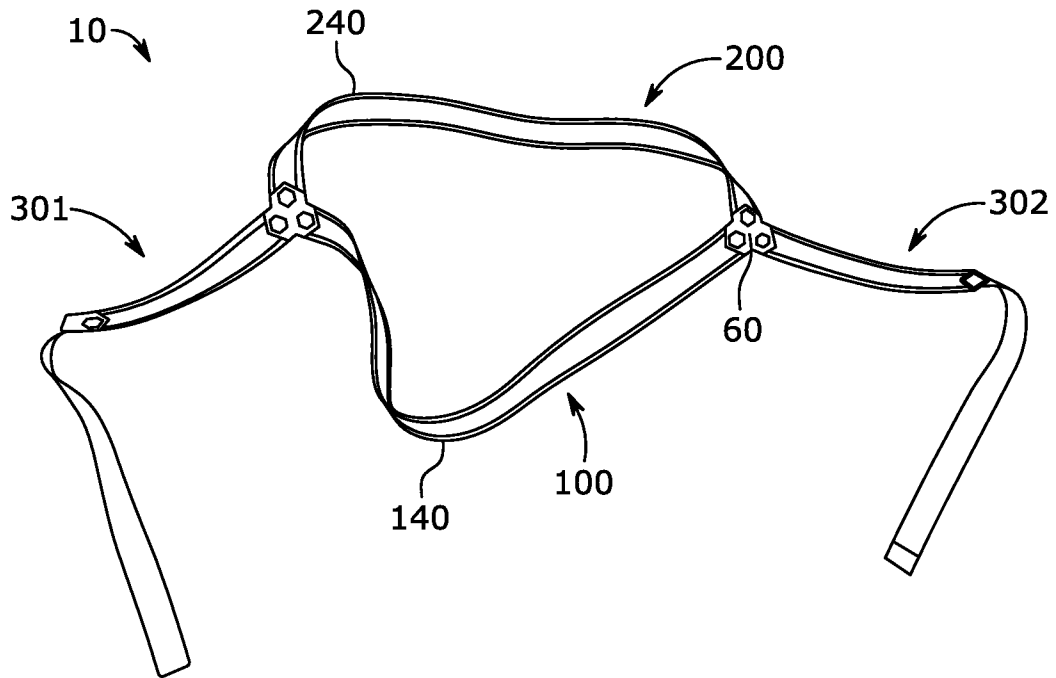


FIGURE 27

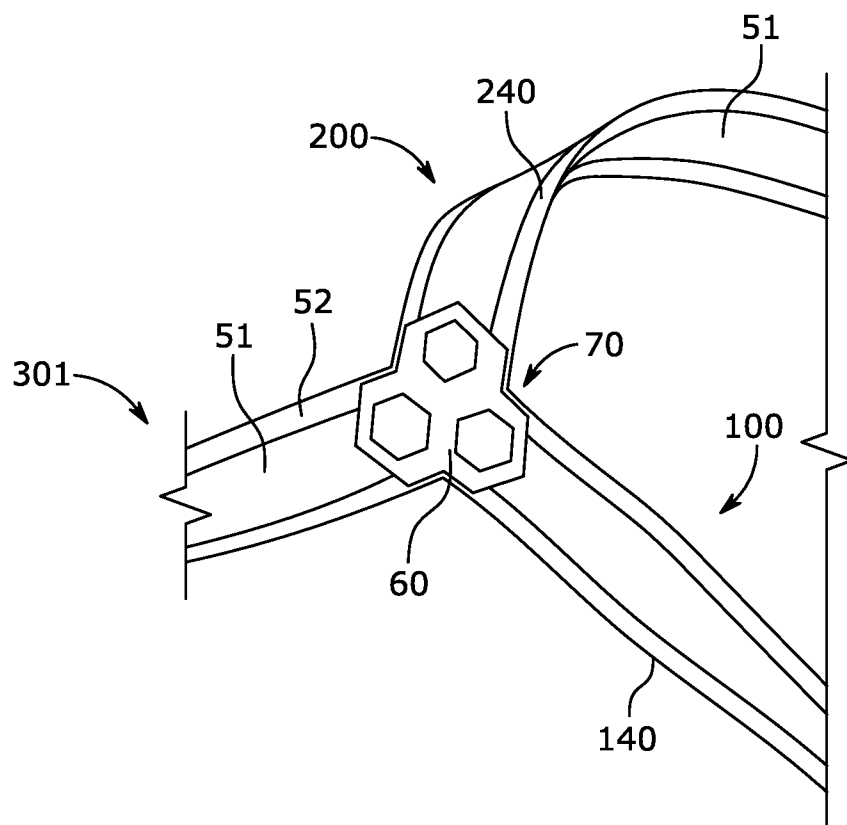


FIGURE 28

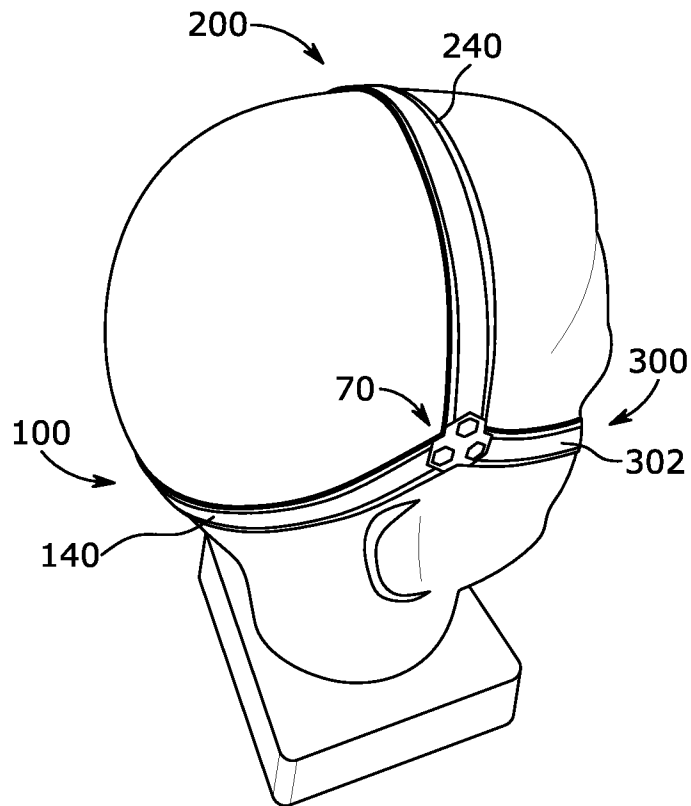


FIGURE 29A

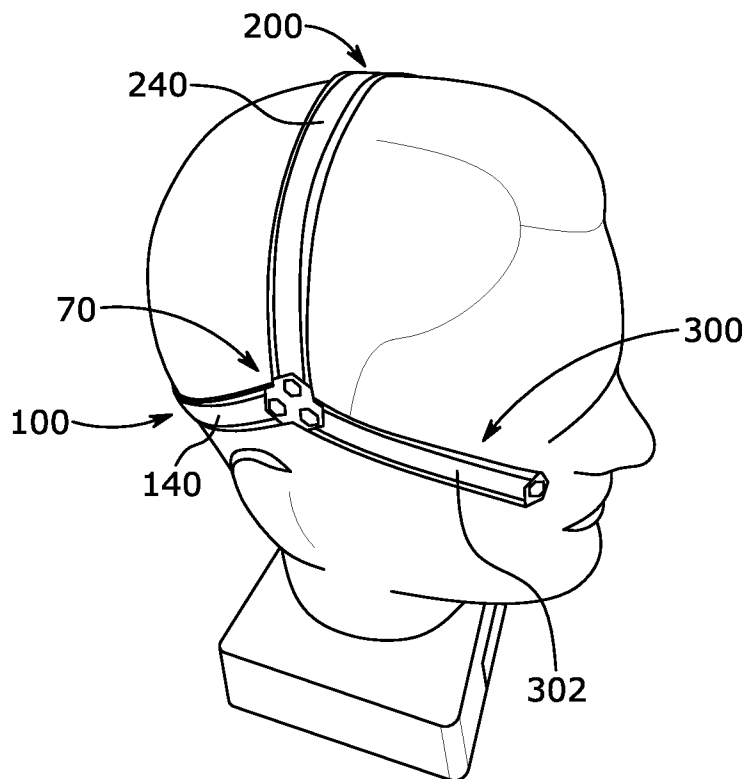


FIGURE 29B

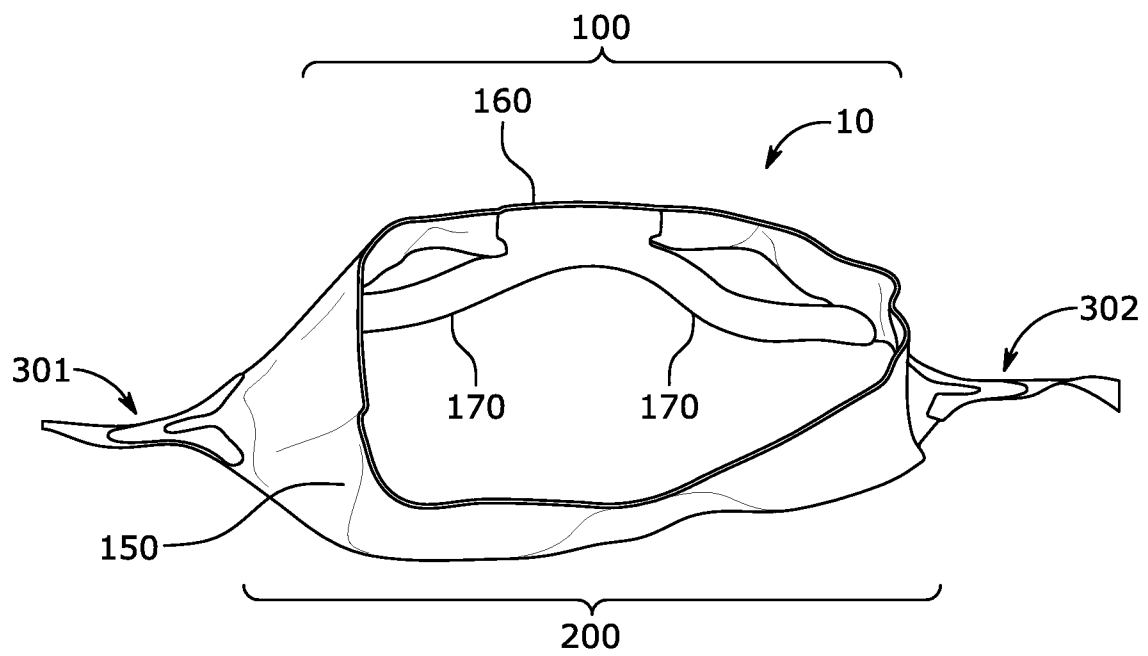


FIGURE 30

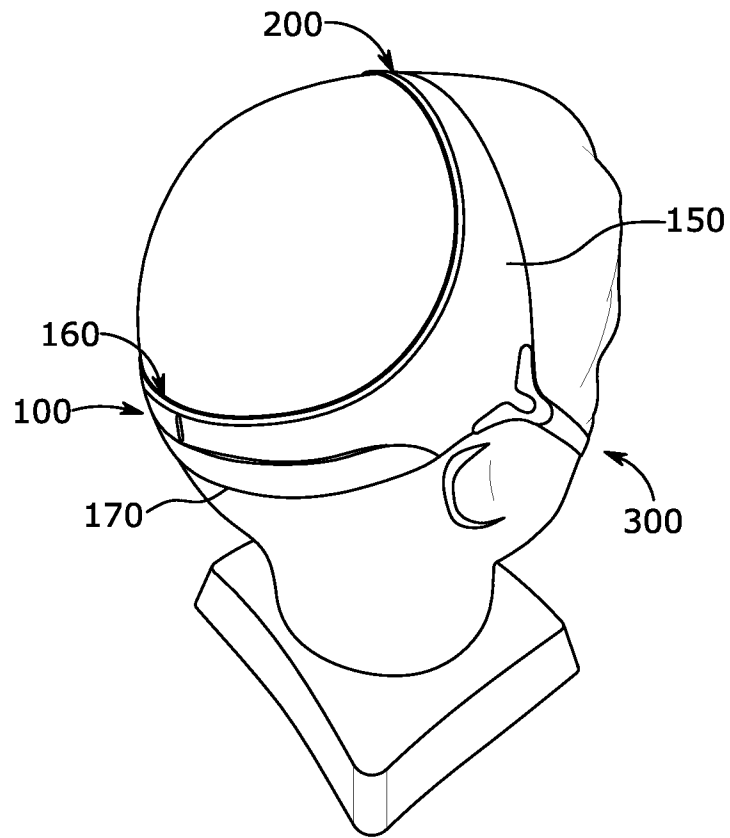


FIGURE 31A

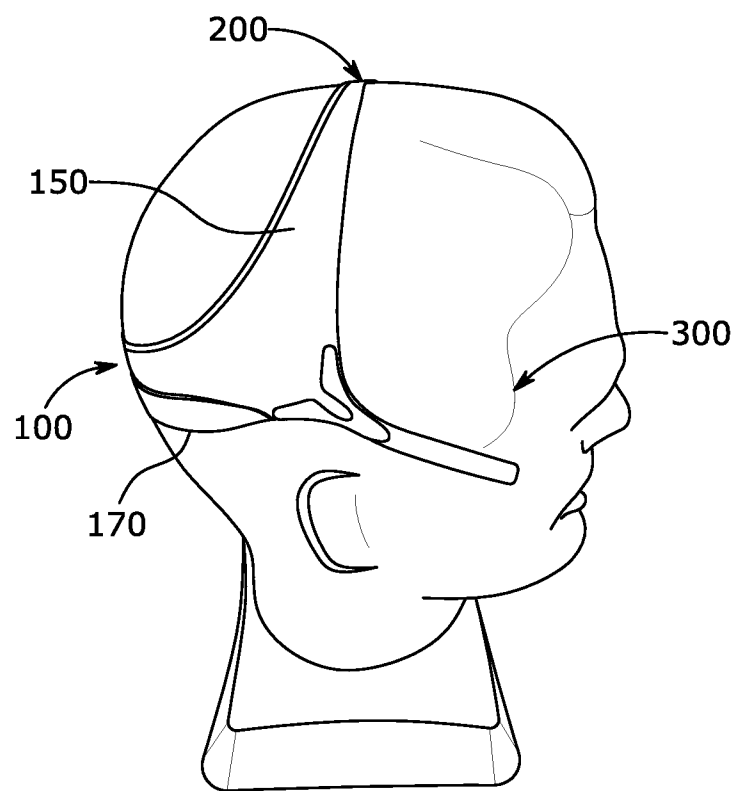


FIGURE 31B

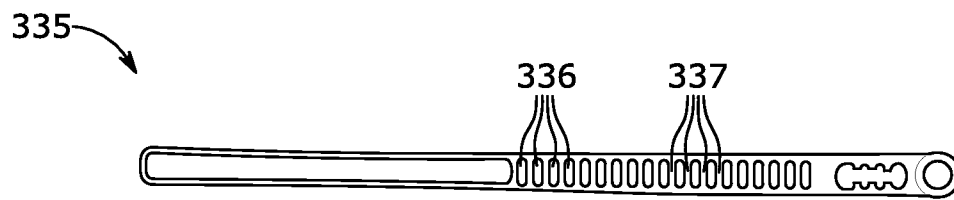


FIGURE 32A

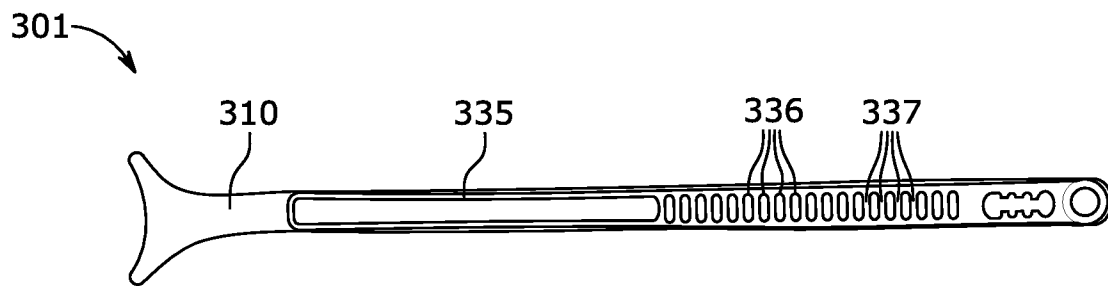


FIGURE 32B

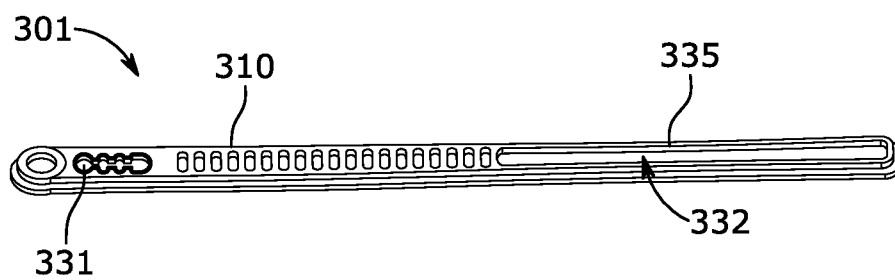


FIGURE 33

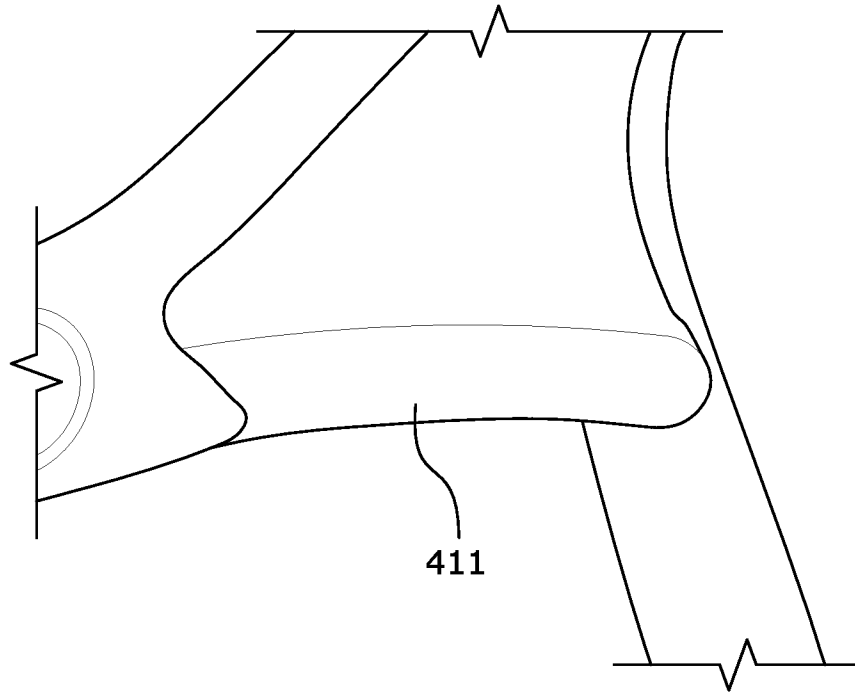


FIGURE 34

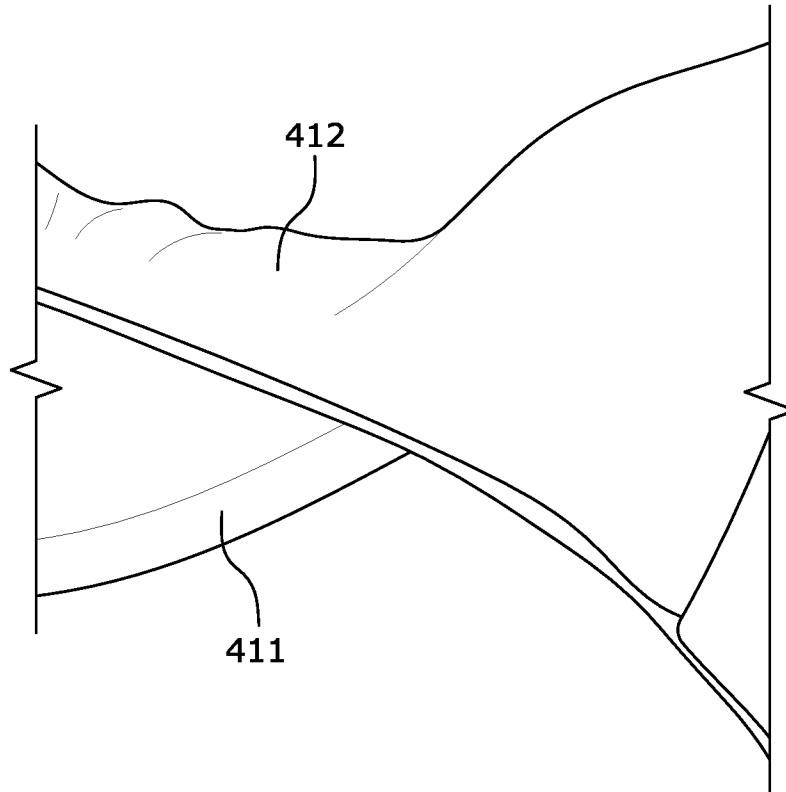


FIGURE 35

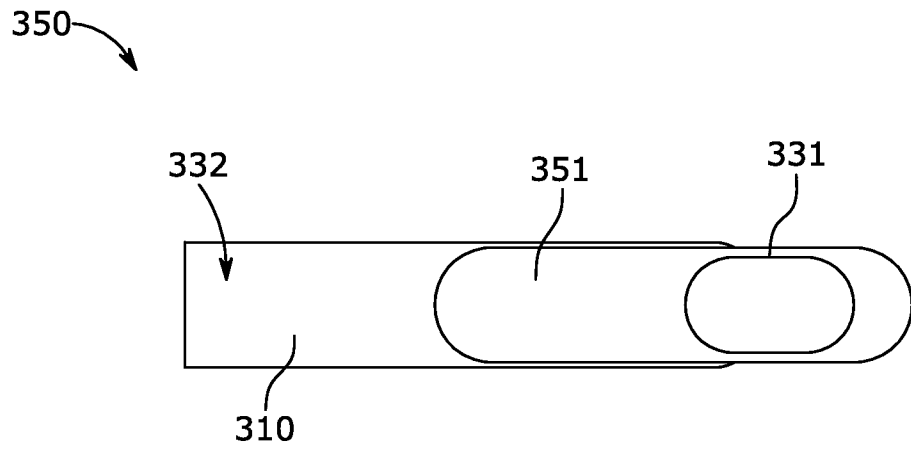


FIGURE 36A

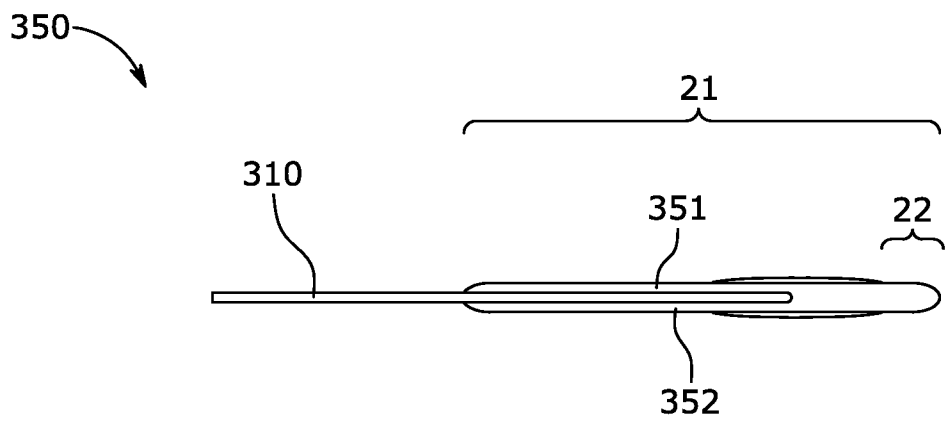
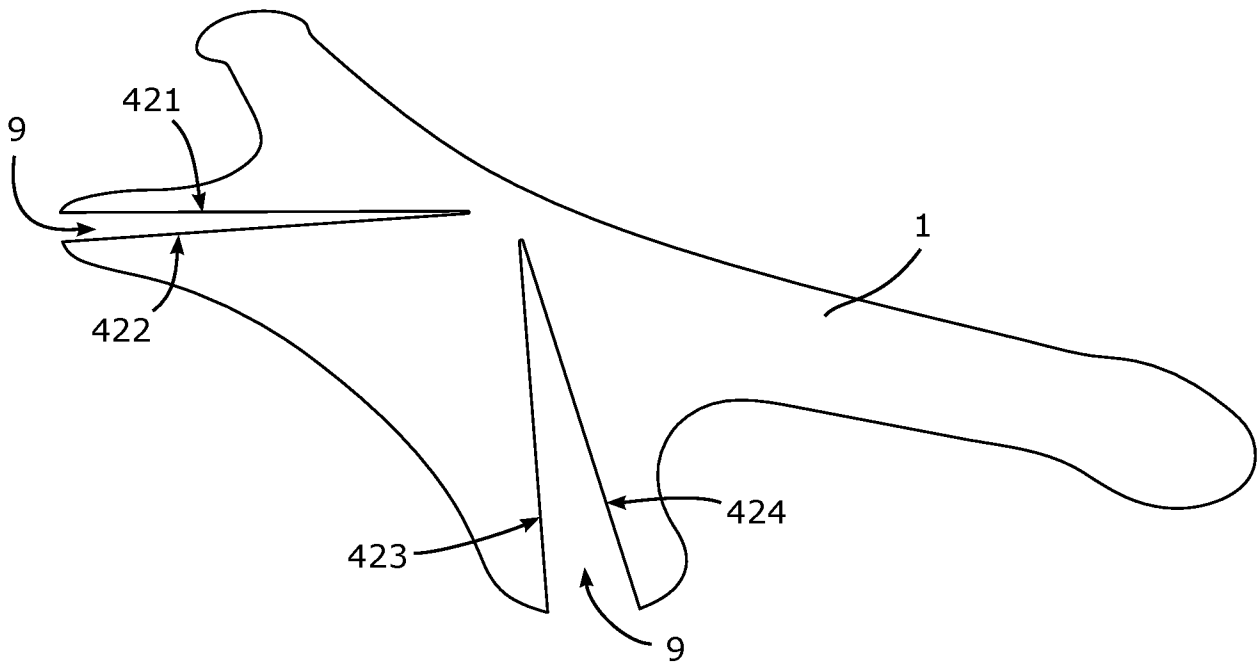
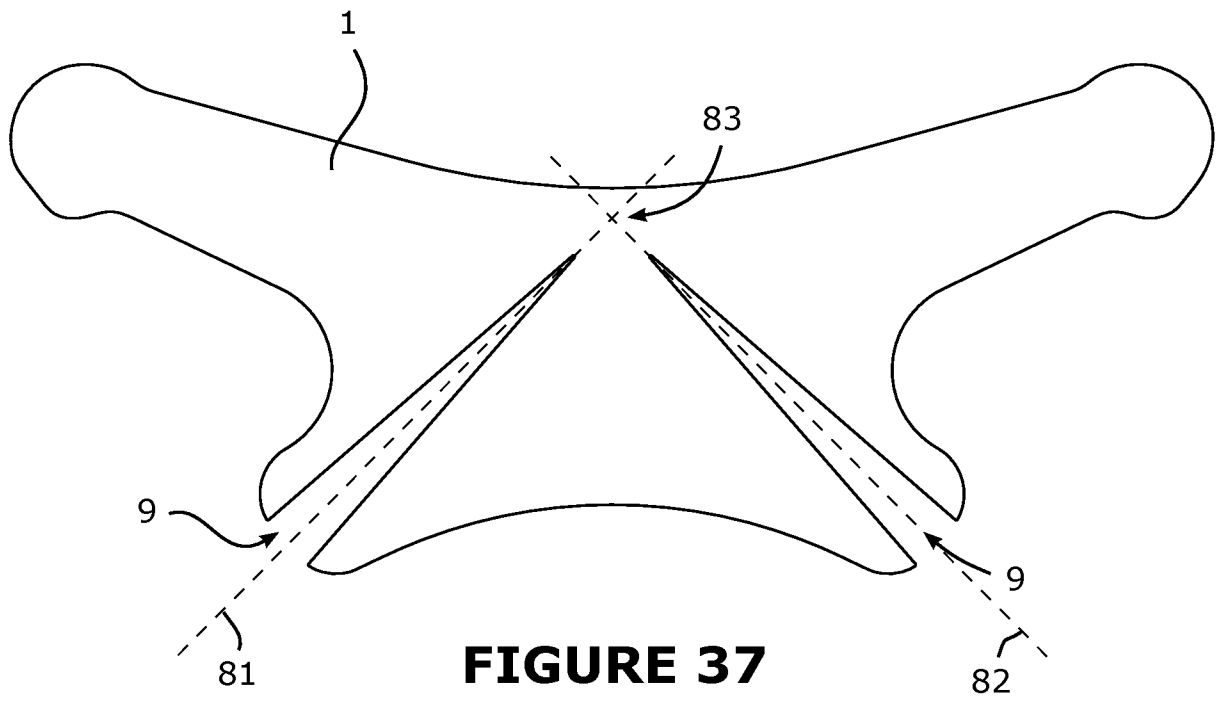


FIGURE 36B



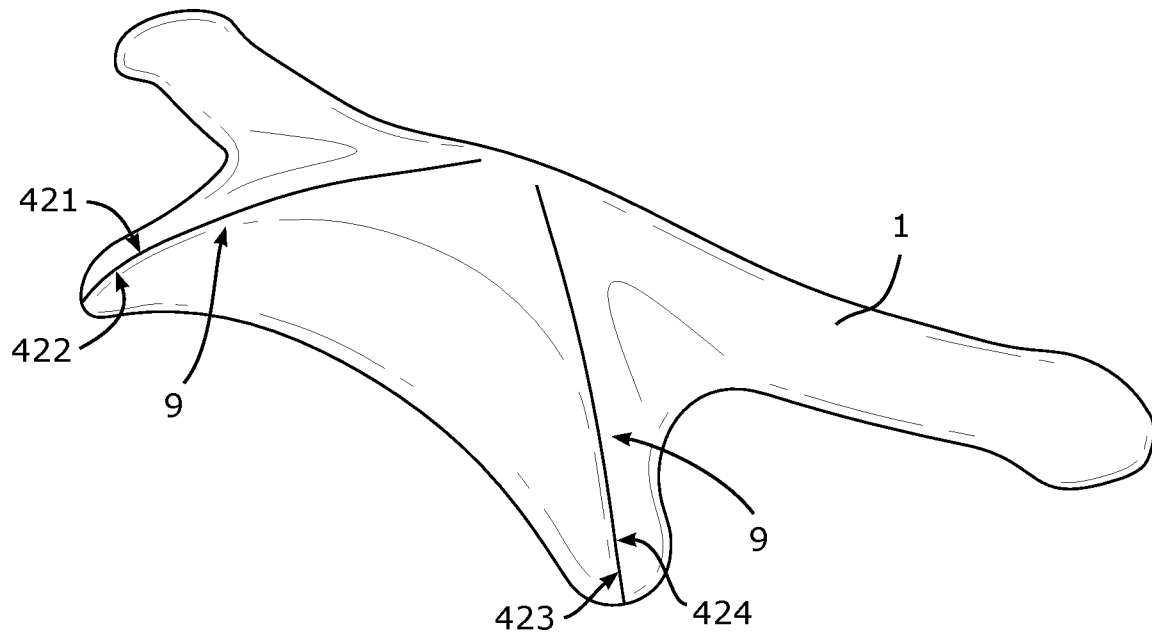


FIGURE 38B

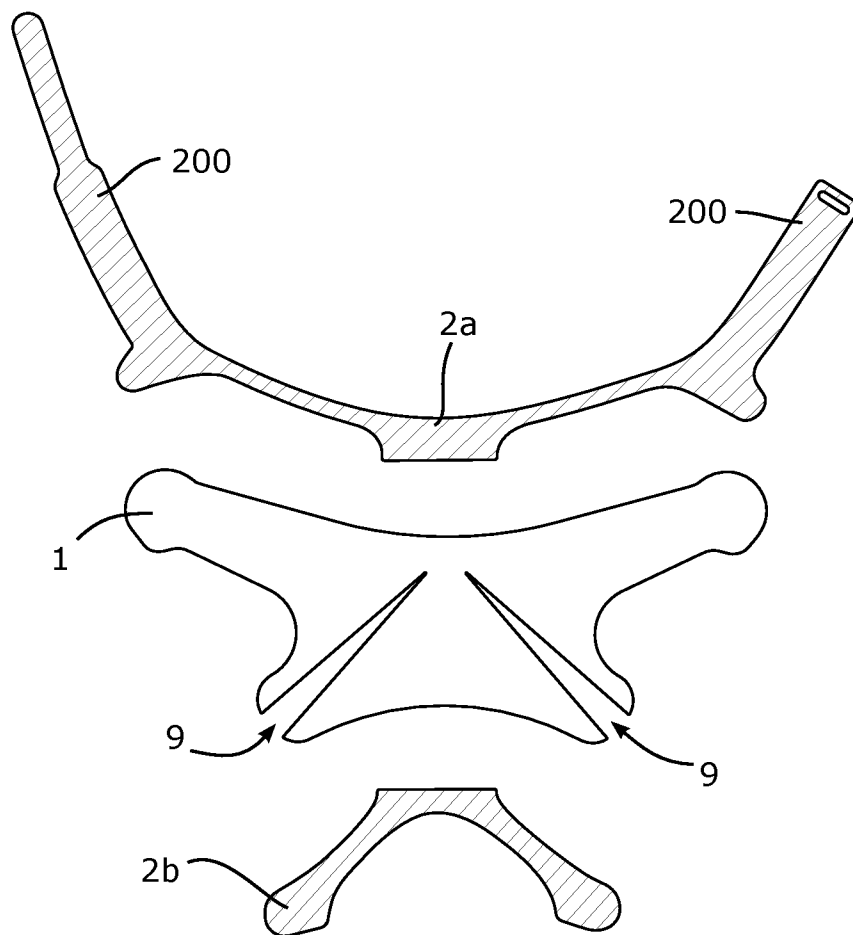


FIGURE 39A

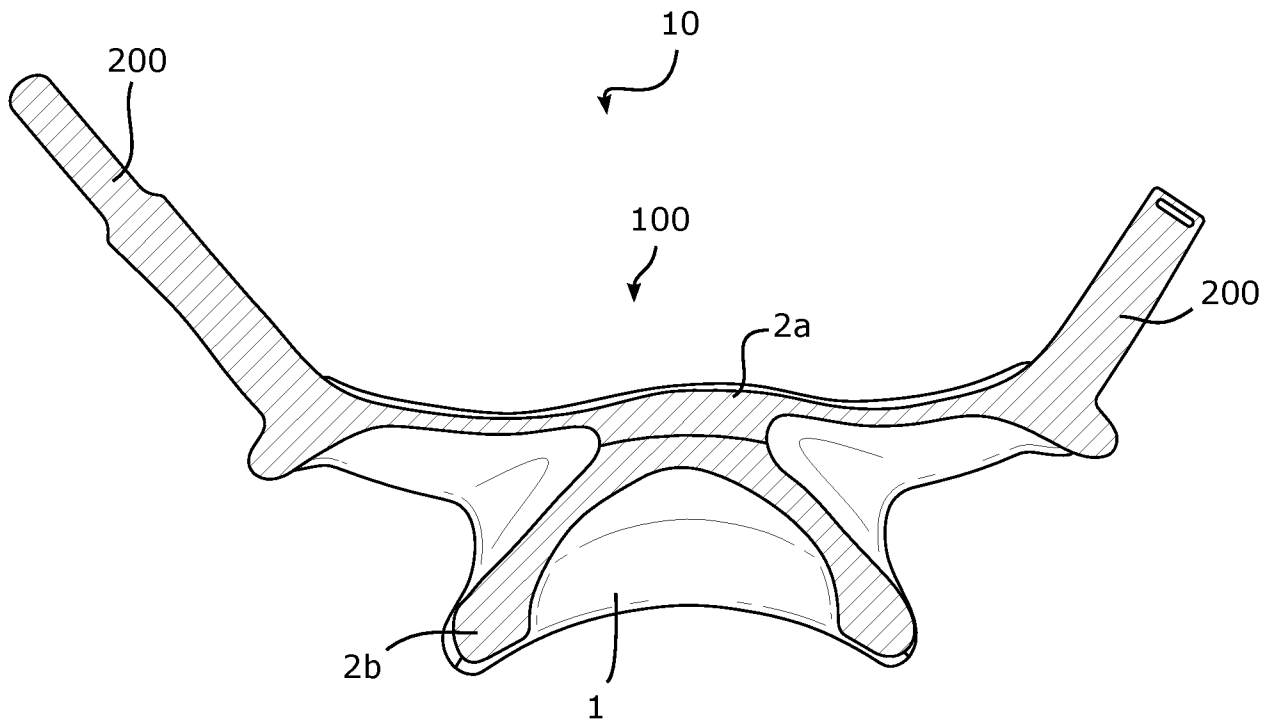


FIGURE 39B

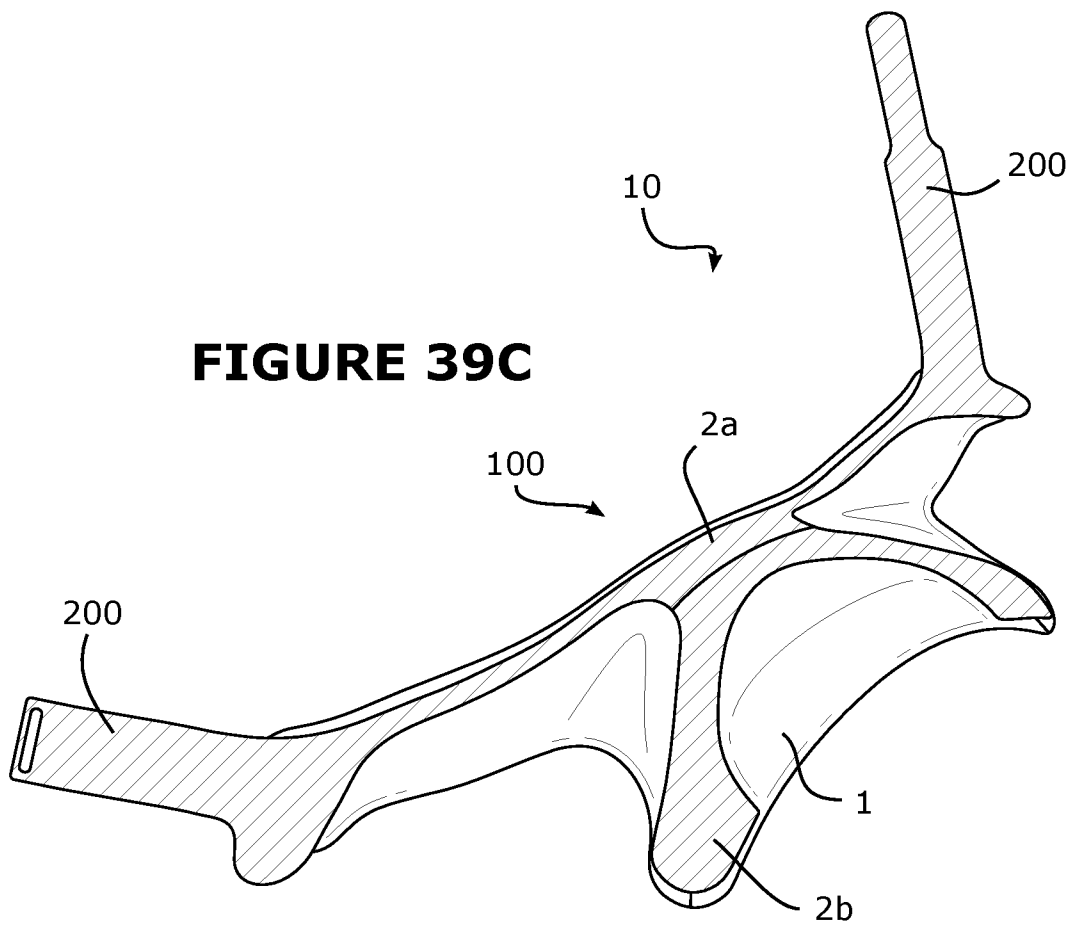


FIGURE 39C

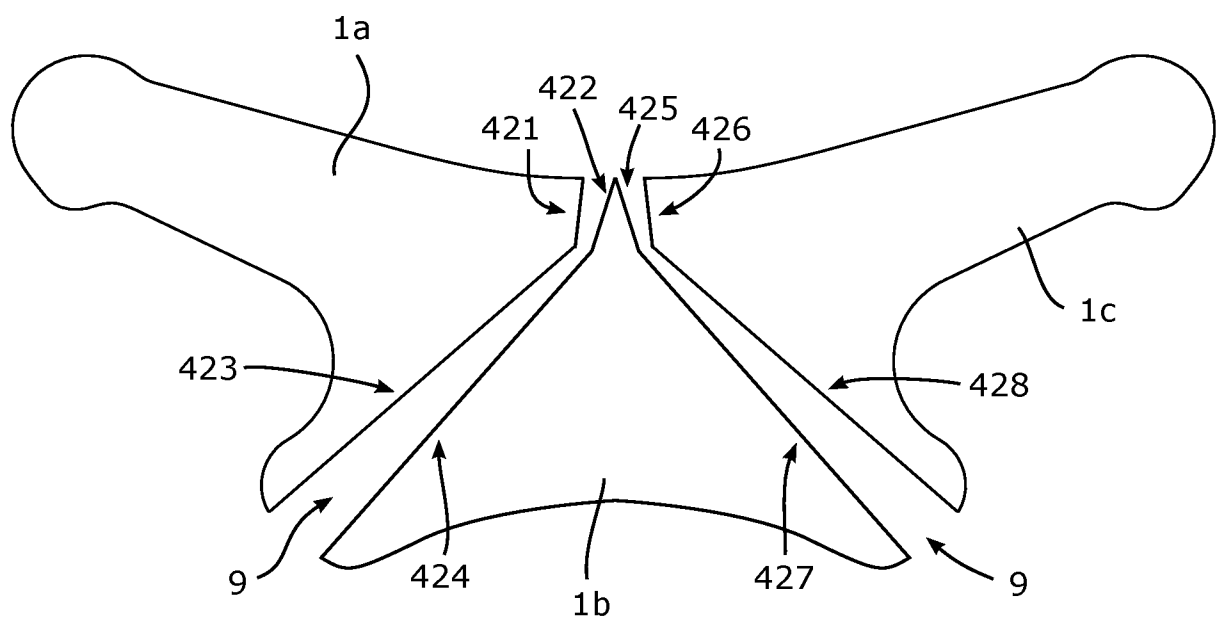


FIGURE 40

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2021/054290

A. CLASSIFICATION OF SUBJECT MATTER

A61M 16/06 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PATENW cluster (EPODOC, WPIAP, TXTE Cluster); CPC/IPC as appropriate: A61M16/0605/LOW, A61M16/0683/LOW, A61M16/0688, A61M2205/582, A61M2207/00. Classification used in various combinations and with selected keywords: cross over, overlap, over hang, strap, headgear, panel, crown, rear, back, top, adhesive, glue, melt, laminate, bond, stiffen, reinforce, second, dual, double, pile, composite, sheet, feedback, tactile, void, aperture, protrusion, clip, buckle, adjust and similar terms. Applicant and inventor names searched in PATENW and IP Australia internal databases.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"D" document cited by the applicant in the international application	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

27 August 2021

Date of mailing of the international search report

7 September 2021

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
Email address: pct@ipaustalia.gov.au

Authorised officer

Catriona Condon
AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No. +61262832326

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/IB2021/054290
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2018/0214655 A1 (RESMED LIMITED) 02 August 2018 Figs. 4A-4Y; [0148-0170].	1-7, 20-24
X	WO 2014/175753 A1 (FISHER & PAYKEL HEALTHCARE LIMITED) 30 October 2014 Fig. 41, 47, 48; [0272, 0286-0288].	1-6, 9-11, 13, 14, 21, 23
X Y	US 2016/0038708 A1 (RESMED LIMITED) 11 February 2016 Figs. 1-10; [0035, 0036, 0039, 0040-0044, 0048]. Figs. 1-10; [0035, 0036, 0039, 0040-0044, 0048].	1-4, 8, 10-12, 23 15-19
X	US 2017/0274167 A1 (FISHER & PAYKEL HEALTHCARE LIMITED) 28 September 2017 Figs. 138, 141, 174, 175A, [0868, 0870, 0878, 0880, 0993, 0934-0936].	1, 2, 4, 5, 23, 25-29
Y	US 2009/0178680 A1 (CHANG) 16 July 2009 Figs. 8, 9; [0027, 0028].	15, 16
Y	US 2019/0298959 A1 (RESMED PTY LTD) 03 October 2019 Figs. 15-18; [0141-144].	15-19
A	WO 2017/021836 A1 (FISHER & PAYKEL HEALTHCARE LIMITED) 09 February 2017 Whole document	

Form PCT/ISA/210 (fifth sheet) (July 2019)

INTERNATIONAL SEARCH REPORT		International application No.			
Information on patent family members		PCT/IB2021/054290			
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.					
Patent Document/s Cited in Search Report		Patent Family Member/s			
Publication Number	Publication Date	Publication Number	Publication Date		
US 2018/0214655 A1	02 August 2018	US 2018214655 A1	02 Aug 2018		
		US 10722673 B2	28 Jul 2020		
		CN 106714886 A	24 May 2017		
		CN 107683160 A	09 Feb 2018		
		CN 107683160 B	17 Aug 2021		
		CN 107920608 A	17 Apr 2018		
		EP 3193994 A1	26 Jul 2017		
		EP 3223894 A1	04 Oct 2017		
		EP 3223894 B1	23 Dec 2020		
		EP 3324767 A1	30 May 2018		
		EP 3324767 B1	08 Jul 2020		
		EP 3777942 A1	17 Feb 2021		
		EP 3865167 A1	18 Aug 2021		
		JP 2018520801 A	02 Aug 2018		
		JP 6878399 B2	02 Jun 2021		
		JP 2017529158 A	05 Oct 2017		
		JP 2017535370 A	30 Nov 2017		
		JP 2021000557 A	07 Jan 2021		
		US 2017259022 A1	14 Sep 2017		
		US 10632275 B2	28 Apr 2020		
		US 2017326320 A1	16 Nov 2017		
		US 10888681 B2	12 Jan 2021		
		US 2020306481 A1	01 Oct 2020		
		US 2021069442 A1	11 Mar 2021		
		WO 2016041008 A1	24 Mar 2016		
		WO 2016082001 A1	02 Jun 2016		
		WO 2017015701 A1	02 Feb 2017		
		WO 2014/175753 A1	30 October 2014	WO 2014175753 A1	30 Oct 2014
				AU 2014258012 A1	12 Nov 2015
				AU 2014258012 B2	12 Sep 2019
				AU 2019275639 A1	02 Jan 2020
				BR 112015026821 A2	25 Jul 2017
				CA 2909993 A1	30 Oct 2014
CN 105339031 A	17 Feb 2016				
CN 105339031 B	18 Sep 2018				

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.
Form PCT/ISA/210 (Family Annex)(July 2019)

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.
Form PCT/ISA/210 (Family Annex)(July 2019)

INTERNATIONAL SEARCH REPORT Information on patent family members		International application No. PCT/IB2021/054290	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		CN 108992756 A	14 Dec 2018
		EP 2988813 A1	02 Mar 2016
		EP 2988813 B1	21 Apr 2021
		EP 3777943 A1	17 Feb 2021
		GB 2527994 A	06 Jan 2016
		GB 2527994 B	17 Jun 2020
		JP 2016519958 A	11 Jul 2016
		JP 6336575 B2	06 Jun 2018
		JP 2018130564 A	23 Aug 2018
		SG 10201702822Q A	29 Jun 2017
		SG 11201508589Q A	27 Nov 2015
		US 2016067441 A1	10 Mar 2016
		US 10668242 B2	02 Jun 2020
		US 2020289777 A1	17 Sep 2020
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. Form PCT/ISA/210 (Family Annex)(July 2019)			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2021/054290	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
US 2016/0038708 A1	11 February 2016	US 2016038708 A1	11 Feb 2016
		US 10639445 B2	05 May 2020
		AU 2003257272 A1	07 Jun 2004
		AU 2003257272 B2	13 Aug 2009
		CN 1684733 A	19 Oct 2005
		CN 1684733 B	21 Jul 2010
		CN 101837156 A	22 Sep 2010
		CN 101837156 B	04 Jul 2012
		EP 1558320 A1	03 Aug 2005
		EP 1558320 B1	27 Apr 2016
		EP 2583712 A2	24 Apr 2013
		EP 2591818 A2	15 May 2013
		EP 2591818 B1	16 Dec 2015
		EP 2878328 A1	03 Jun 2015
		EP 2878328 B1	27 Nov 2019
		JP 2006505310 A	16 Feb 2006
		JP 4625699 B2	02 Feb 2011
		JP 2010274137 A	09 Dec 2010
		JP 5243506 B2	24 Jul 2013
		JP 2013017854 A	31 Jan 2013
		JP 5624105 B2	12 Nov 2014
		JP 2014128713 A	10 Jul 2014
		JP 6081397 B2	15 Feb 2017
		JP 2016034593 A	17 Mar 2016
		JP 6306562 B2	04 Apr 2018
		JP 2017051675 A	16 Mar 2017
		NZ 538696 A	31 Jan 2009
		NZ 573197 A	30 Jul 2010
		NZ 602732 A	31 Jan 2014
		NZ 604214 A	27 Jun 2014
		NZ 622333 A	29 Jan 2016
		NZ 712109 A	31 Mar 2017
		NZ 729130 A	26 May 2017
		NZ 731635 A	30 Nov 2018
		NZ 747187 A	29 May 2020
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			
Form PCT/ISA/210 (Family Annex)(July 2019)			

INTERNATIONAL SEARCH REPORT Information on patent family members		International application No. PCT/IB2021/054290	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2004112377 A1	17 Jun 2004
		US 7509958 B2	31 Mar 2009
		US 2009038622 A1	12 Feb 2009
		US 8042543 B2	25 Oct 2011
		US 2012024290 A1	02 Feb 2012
		US 8443805 B2	21 May 2013
		US 2013233320 A1	12 Sep 2013
		US 9168349 B2	27 Oct 2015
		WO 2004041341 A1	21 May 2004
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. Form PCT/ISA/210 (Family Annex)(July 2019)			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2021/054290	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
US 2017/0274167 A1	28 September 2017	US 2017274167 A1	28 Sep 2017
		US 10874814 B2	29 Dec 2020
		AU 2015318728 A1	02 Mar 2017
		AU 2015318728 B2	15 Oct 2020
		AU 2020286321 A1	21 Jan 2021
		BR 112017004877 A2	12 Dec 2017
		CA 2958120 A1	24 Mar 2016
		CN 107197624 A	22 Sep 2017
		CN 107197624 B	28 May 2021
		EP 3193993 A1	26 Jul 2017
		GB 2557693 A	27 Jun 2018
		GB 2557693 B	14 Apr 2021
		GB 2586927 A	10 Mar 2021
		GB 2586927 B	04 Aug 2021
		GB 2588738 A	05 May 2021
		GB 2589527 A	02 Jun 2021
		GB 2590040 A	16 Jun 2021
		GB 2591662 A	04 Aug 2021
		JP 2017531464 A	26 Oct 2017
		SG 10201902311R A	29 Apr 2019
		SG 11201701205T A	27 Apr 2017
		TW 201628517 A	16 Aug 2016
		TW I708572 B	01 Nov 2020
		TW 202114552 A	16 Apr 2021
		US 2016144146 A1	26 May 2016
		US 10646680 B2	12 May 2020
		US 2016074614 A1	17 Mar 2016
		US 10828452 B2	10 Nov 2020
		US 2020230344 A1	23 Jul 2020
		US 2021016041 A1	21 Jan 2021
		US 2021077763 A1	18 Mar 2021
		WO 2016043603 A1	24 Mar 2016
US 2009/0178680 A1	16 July 2009	US 2009178680 A1	16 Jul 2009
US 2019/0298959 A1	03 October 2019	US 2019298959 A1	03 Oct 2019
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			
Form PCT/ISA/210 (Family Annex)(July 2019)			

INTERNATIONAL SEARCH REPORT Information on patent family members		International application No. PCT/IB2021/054290	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
WO 2017/021836 A1	09 February 2017	AU 2011313825 A1	02 May 2013
		AU 2011313825 B2	16 Jul 2015
		AU 2015242960 A1	29 Oct 2015
		EP 2624902 A1	14 Aug 2013
		EP 2624902 B1	05 Sep 2018
		EP 3470102 A1	17 Apr 2019
		EP 3470102 B1	05 May 2021
		NZ 609162 A	27 Feb 2015
		US 2013220327 A1	29 Aug 2013
		US 9517320 B2	13 Dec 2016
		US 2017080173 A1	23 Mar 2017
		US 10369318 B2	06 Aug 2019
		WO 2012045127 A1	12 Apr 2012
		WO 2017021836 A1	09 Feb 2017
		AU 2016303454 A1	22 Feb 2018
		CA 2994060 A1	09 Feb 2017
		CN 109414555 A	01 Mar 2019
		EP 3328475 A1	06 Jun 2018
		JP 2018528042 A	27 Sep 2018
		SG 10201913686X A	30 Mar 2020
US 2019001095 A1	03 Jan 2019		
End of Annex			

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.
 Form PCT/ISA/210 (Family Annex)(July 2019)