

(No Model.)


2 Sheets—Sheet 1.

K. HOEFELMAYR.
PAD FOR WATER CLOSETS.

No. 542,706.

Patented July 16, 1895.

FIG. 1

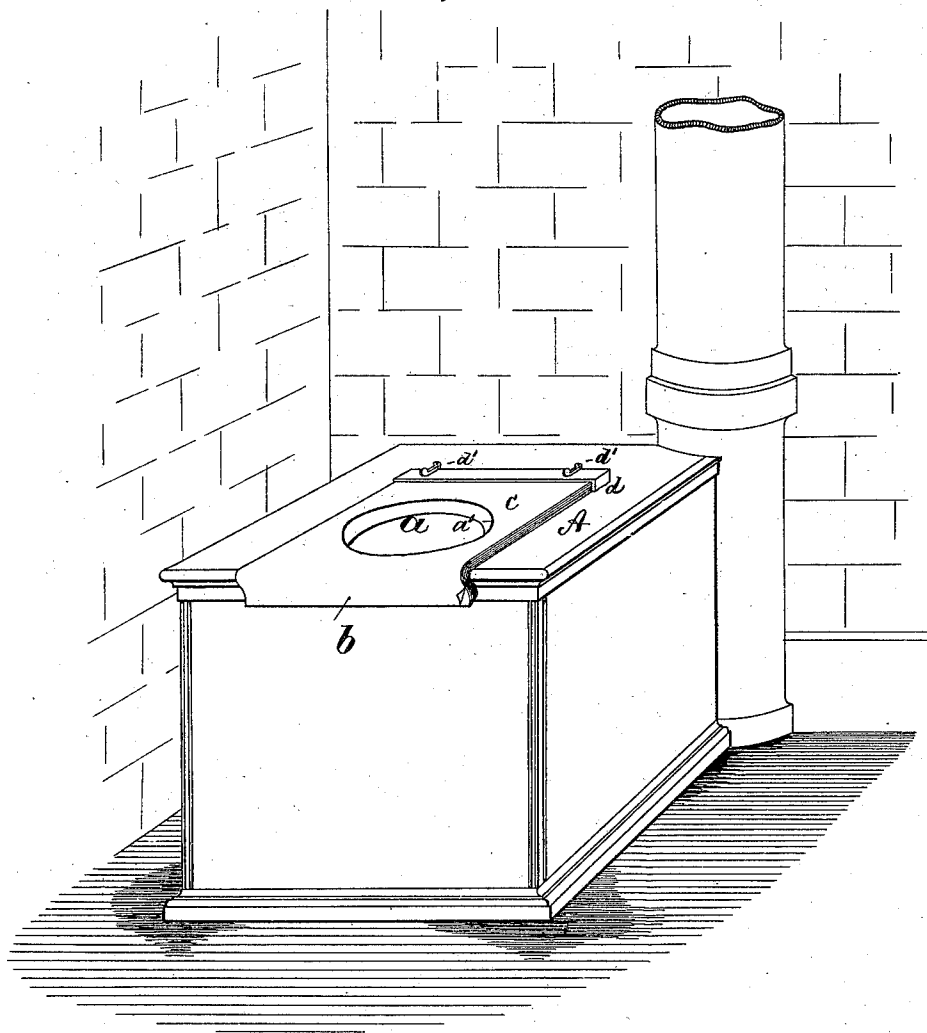

Witnesses:

John Becker
William Schulz

Inventor:

Karl Hoefelmayer
by his attorneys
Rueder & Briesen

(No Model.)

2 Sheets—Sheet 2.

K. HOEFELMAYR.
PAD FOR WATER CLOSETS.

No. 542,706.

Patented July 16, 1895.

FIG. 2.


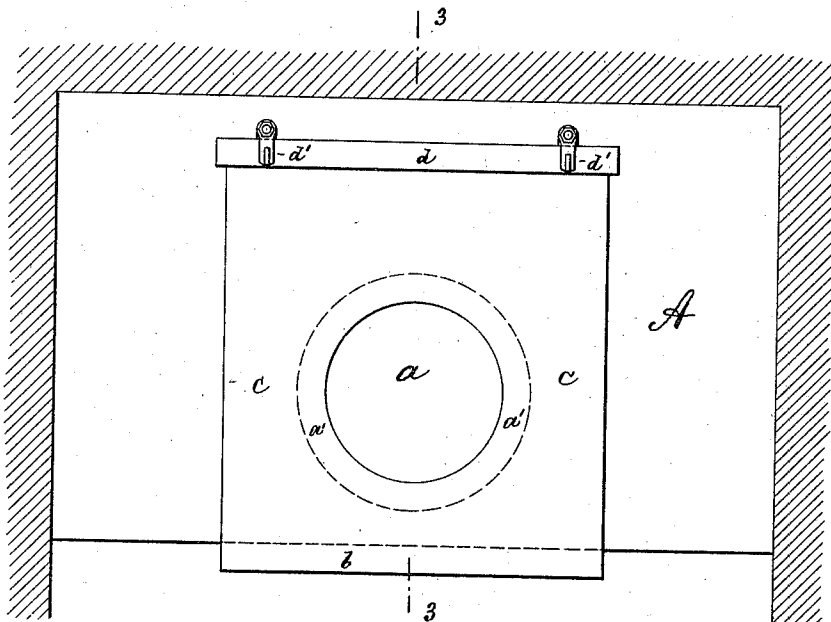


FIG. 3.

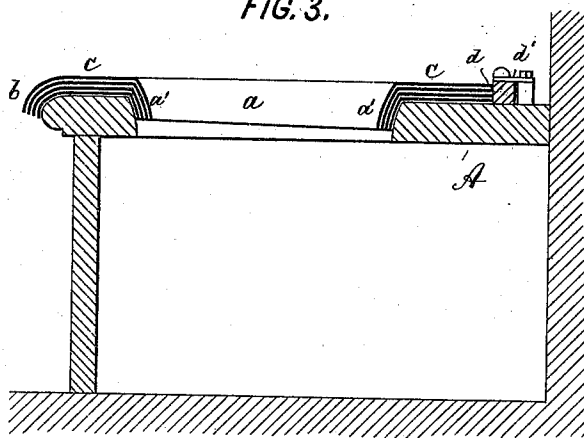

Witnesses:

John Becker
Theodore Becker.

Inventor:

Karl Hoefelmays
by his attorneys
Roeder & Briesen

UNITED STATES PATENT OFFICE.

KARL HOEFELMAYR, OF MUNICH, GERMANY.

PAD FOR WATER-CLOSETS.

SPECIFICATION forming part of Letters Patent No. 542,706, dated July 16, 1895.

Application filed September 11, 1894. Serial No. 522,684. (No model.)

To all whom it may concern:

Be it known that I, KARL HOEFELMAYR, of Munich, Bavaria, Germany, have invented certain new and useful Improvements in Pads for Water-Closets, of which the following is a specification.

This invention relates to a pad adapted to fit the seat of a water-closet, and composed of a set of detachable sheets, so that the surface may be readily renewed.

In the accompanying drawings, Figure 1 is a perspective view of a closet provided with my improved pad. Fig. 2 is a plan thereof; and Fig. 3, a section on line 3 3, Fig. 2.

The letter A represents the seat of a closet, and c is a pad composed of a set of detachable sheets adapted to be placed upon the seat. The sheets constituting the pad are formed of paper or textile fabric and may be saturated with an antiseptic or waterproof solution. They are provided with a central opening a, which corresponds to the opening of the seat A. The forward edge b of the pad is turned down over the edge of seat A, while at

its center it is provided with the downwardly-turned flange a' to protect the occupant from direct contact with the seat.

The pad is held to the seat A by the flanges a' b and is provided with a back rail d, which is secured to the seat by clasps d'. 30

In use the top sheet of the pad is removed before the closet is occupied, and thus a fresh surface is always exposed. In this way cleanliness is obtained, contagion prevented, and hygienic purposes generally are served. 35

What I claim is—

The combination of a water closet seat with clasps d', and with an annular pad c, having flanges a', b, and a rear rail d, adapted to be engaged by the clasps, substantially as specified. 40

In testimony that I claim the foregoing as my invention I have signed my name in presence of two subscribing witnesses.

K. HOEFELMAYR.

Witnesses:

ALBIN KLEIN,
CARL MAYER.