



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B25G 3/12, 3/00, B23D 71/04	A1	(11) International Publication Number: WO 96/14188 (43) International Publication Date: 17 May 1996 (17.05.96)
--	----	--

(21) International Application Number: PCT/SE95/01325

(22) International Filing Date: 8 November 1995 (08.11.95)

(30) Priority Data:
9403842-9 8 November 1994 (08.11.94) SE(71) Applicant (for all designated States except US): AB KOM-
POSITPRODUKTER [SE/SE]; Vikmanshyttan, P.O. Box 2,
S-776 02 Vikmanshyttan (SE).


(72) Inventor; and

(75) Inventor/Applicant (for US only): LINDGREN, Mats [SE/SE];
Museivägen 4, S-776 70 Vikmanshyttan (SE).(74) Agents: AXELSSON, Rolf et al.; Kransell & Wennborg AB,
P.O. Box 27834, S-115 93 Stockholm (SE).(81) Designated States: DE, FI, JP, NO, SE, US, European patent
(AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).**Published***With international search report.
In English translation (filed in Swedish).*

(54) Title: TOOL HANDLE

(57) Abstract

A handle for hand-held tools, particularly files, that have an end portion (3) for insertion into the handle (1). The handle includes at least two parts (4, 5) which are separated in the insertion direction of the end portion of the tool and includes end-portion guides (6). One guide has the form of a hole (6) in one handle part (4). A surface on the guide in the other handle part (5) intended for coaction with the end portion (3) of the tool is displaced laterally in relation to a corresponding surface in the hole (6). The two handle parts (4, 5) are resiliently movable relative to one another, to permit reduction in the displacement between the surfaces in conjunction with inserting the end portion (3) of the tool into the handle (1). The end portion of the tool is automatically clamped firmly in the handle as the handle parts tend to spring back to their original positions.

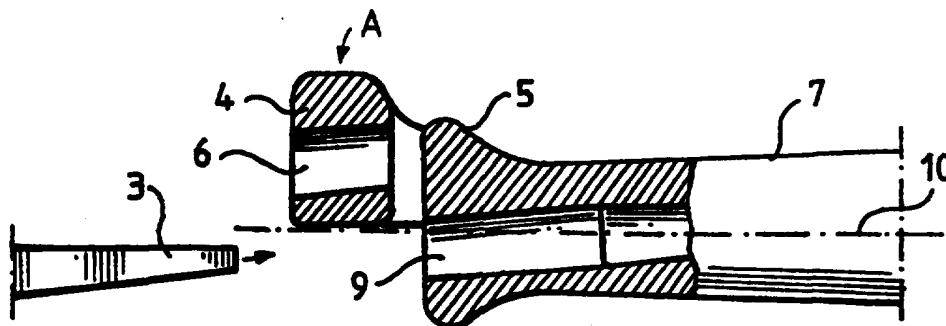

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Tool handle

The present invention relates to handles for hand-held tools and then particularly, but not exclusively, for files of the kind provided with a tang which is inserted into the handle, said handle including at least two parts which are separated in the tang-insertion direction and provided with tang guide means.

Several different designs of handles for hand-held files and like tools are known to the art. The majority of these handles fall into the following two main types.

The first and the simplest type of handle includes an axially extending hole or passage into which the file tang is pressed. The file tang is normally provided with a slightly conical, four-cornered attachment means. The handle thus has the simplest conceivable design, which enables it to be manufactured at low cost. One drawback with handles of this design, however, is that the handle cannot always be relied upon to grip the file firmly, and there is a risk of the file loosening in the handle and sliding therefrom while being used. This drawback has become particularly pronounced with handles that are made of plastic material, as is now more usually the case, which generates a low coefficient of friction between file and handle.

In the case of handles that belong to the second main type or category, the axially extending hole intended to receive the file tang is surrounded by thin, resilient jaws. The tang has a screw-threaded part and when the file has been inserted into the handle a nut is fitted over the file and tightened on the screw-threaded part of the tang. The resilient jaws are therewith pressed against the file and hold the file firmly in the handle. Manufacture of this handle, however, is a complicated process and the cost of manufacture is commensurately high.

US-A 1,436,556 describes a file handle comprised of two halves of a metal shell which are pressed one against the other. Each shell half has cut therefrom two tongues which are pressed into the handle. By pressing the two shell halves together, a file can be inserted into the shaft and clamped firmly between said tongues, due to a tendency of the shell halves to spring back.

In addition to the manufacture of this handle being relatively complicated, another serious drawback with this known handle is that as the file is used it tends to loosen in the handle as a result of the workman involuntarily squeezing together the two handle halves with his/her hand during a working operation.

The main object of the present invention is to provide a handle for hand-held tools which avoids the aforesaid problems and which can be manufactured in a highly rational manner in one single piece.

According to the present invention, a handle of the kind described in the first paragraph is characterized in that one guide means has the form of a hole in the one handle part, and that a guide surface in the other handle part intended for coaction with the tang of the file is displaced transversely in relation to a corresponding surface in said hole; and in that the two handle parts are resiliently movable in relation to one another so as to permit a reduction in the displacement between said surfaces as the tang is inserted into the handle.

A handle of this kind can be manufactured from a suitable plastic material in a simple plastic tool. A tool inserted into the handle will be securely held therein during a working operation, by virtue of the fact that the forces which secure the tool in the handle increase as the tool is pressed against the workpiece in the intended direction. The

tool can be released easily from the handle, by pressing one of said handle parts in the direction opposite to the direction in which it is pressed during a working operation.

5 Other characteristic features of the invention will be apparent from the dependent Claims.

The invention will now be described in more detail with reference to exemplifying embodiments thereof and also with
10 reference to the accompanying drawings, in which

Fig. 1 illustrates a first embodiment of a file handle during insertion of a file thereinto;

15 Fig. 2 is a partial sectioned view of the front end of the handle and shows the two parts of the handle in a starting position;

Fig. 3 is a partially sectioned view of the front end of the
20 handle with a file inserted therein;

Figs. 4 and 5 are respective schematic views of a second embodiment of an inventive handle prior to and after inserting a file thereinto; and
25

Fig. 6 is a schematic view of a third embodiment of an inventive handle after having inserted a file thereinto.

The file handle 1 shown in Fig. 1 is a one-piece structure
30 made from a suitable plastic material, such as acetal plastic, which retains good spring properties even after having been used for a long period of time. In the illustrated case, the handle is intended to receive a round file 2 having a tapered tang 3.

35 The handle includes a front part 4 and a rear part 5, as seen in the file insertion direction. In the case of this embodi-

ment, both parts include a hole 6, 9, see Fig. 2, in which the tang is received, wherein the walls of said holes form guide surfaces therefor. The holes have a configuration which will suit both round files and flat files.

5

The front part 4 of the handle 1 forms the front part of a frame-like portion 6 which surrounds a tongue 7 whose forward part forms the rear handle part as seen in the file insertion direction. The tongue 7 is separated from the frame 6 by means of a U-shaped slot 8, with the exception of the base part of the tongue 7 which merges directly with the frame part 6. As a result of the elasticity of the plastic material, the handle parts 4 and 5 can be moved relative to one another in a direction generally perpendicular to the file insertion direction.

10

15

Prior to inserting the file, the part 4 is displaced laterally in relation to the part 5, and the hole 6 provided in the part 4 will not therefore be in line with the hole 9 provided in the part 5, see Fig. 2.

20

In order to enable the tang 3 to be inserted into the holes 6 and 9, the handle part 4 is pressed down in the Figure with a force A, or alternatively the handle part 5 is pressed up. Whatever the procedure adopted, the parts 4 and 5 are moved relative to one another so as to bring the holes 6 and 9 into mutual alignment so that the tang 3 can be inserted.

25

When the force A is removed, the part 4 will strive to return to its original starting position relative to the part 5, therewith firmly clamping the file 2 and holding the file securely in the handle, see Fig. 3. This file-holding force is increased when the file can be inserted into the handle to such an extent that a part of its cutting surface is located in the hole 6 in the front part of the handle, since this will increase the friction between the file and the coacting guide surface in the hole 6.

30

35

When the handle is used in the position illustrated in Fig. 1, the force by which the file is held in the handle will be further increased by virtue of a force that acts upwardly as the file is pressed against the surface of a workpiece. The file thus generates a self-locking action.

As will be evident from Fig. 2 for instance, the hole 9 is not parallel with the longitudinal centre line 10 of the handle 7. The angle of the hole to the centre line is such as to enable the tool used to form the hole in the handle during its manufacture to be withdrawn in the longitudinal direction of said hole without being obstructed by the handle part 4. In order to simplify the process of manufacture of both the hole-forming tool and the handle, the hole 6 may also define a corresponding angle with the longitudinal axis of the handle.

Since the tang 3 of the file 2 tapers conically, the longitudinal axis of the file will adopt a certain angle to the longitudinal axis of the hole 9 as a result of the upwardly acting force exerted on the tang 3 by the handle part 4. This means that in practice the longitudinal axes of the file and the file handle will essentially coincide, see Fig. 3.

The hole 6 in the part 4 may be slightly conical, thereby obtaining a greater edge pressure against the file 2 at the inner edge of the hole, which further enhances the force with which the file is held. The hole 9 may also be slightly conical.

The file can be released from the handle, simply by pressing the handle part 4 downwards so as to bring the holes 6 and 9 into mutual alignment.

Fig. 4 illustrates a simplified handle 1 in which the resilient handle part 4 projects out in the form of a tongue 13, forwardly of the main handle part 11 provided with the

hole 9.

5 In order to enable a file 2 to be inserted into the handle, it is necessary to bend the tongue 13 downwards so as to bring the holes 6 and 9 into mutual alignment, as illustrated in Fig. 5. When the force exerted on the tongue 13 is relieved, the tongue will strive to return to its original position and therewith clamp the file 2 firmly in the handle.

10 Fig. 6 illustrates an alternative embodiment in which the part 4 is provided with an open guide surface 12 for coaction with the file 2, instead of having a through-penetrating hole. In the case of this embodiment, the handle part 4 covers the hole in the main handle part 11 when in its
15 starting position. When wishing to insert the file 2 into the handle, it is necessary to press the tongue 13 upwards so that the file can be inserted, whereafter the tongue is released and allowed to return to its original position in which the file is pressed firmly in the handle.

20 In the case of the illustrated embodiments, the rear hole is not a through-penetrating hole, meaning that the inner end of the file lies protected in the hole. This eliminates the risk of damage to the hand of the workman, for instance
25 should the workman fall while holding the file in his/her hand.

However, it is feasible to provide the handle with an open rear guide, provided that the guide provided in the front handle part 4 has the form of a relatively long hole or the
30 like.

Although the invention has been described above with reference to a number of embodiments thereof, it will be understood that modifications can be made in several respects without departing from the described tool-clamping principle.
35 It will also be understood that an inventive handle can be used with hand-held tools other than files, the shape of the handle being adapted to the use concerned.

CLAIMS

1. A handle for hand-held tools, particularly files, that comprise an end portion (3) for insertion into the handle (1), wherein the handle includes at least two parts (4, 5) which are separated in the tool insertion direction and which are provided with guides (6, 9; 12) for the end portion (3) of said tool, characterized in that one guide has the form of a hole (6, 9) provided in one handle part (4, 5); in that a guide surface in the other handle part (4, 5) intended for coaction with the end portion (3) is displaced laterally in relation to a corresponding guide surface in said hole (6, 9); and in that the two handle parts (4, 5) are resiliently movable in relation to one another to permit reduction of the displacement between said surfaces in conjunction with inserting the end portion (3) into the handle (1).

2. A handle according to Claim 1, characterized in that both guides have the form of holes (6, 9) in respective handle parts (4, 5).

3. A handle according to Claim 1 or Claim 2, characterized in that the second guide, seen in the insertion direction, is comprised of a blind hole (9) for receiving the end of the end portion (3).

4. A handle according to any one of Claims 1-3, characterized in that the handle is a one-piece structure, and in that the handle part (5) having the second guide (9), seen in the insertion direction, has the form of a resilient tongue (7).

5. A handle according to Claim 4, characterized in that the tongue (7) is positioned centrally in the handle (1) and is separated from the handle part (6) which surrounds the tongue in the form of a frame by means of a slot (8) with the exception of the base of the tongue which merges directly with the frame-like part (6).

6. A handle according to any one of Claims 1-3, characterized in that the handle is a one-piece structure, wherein the handle part (4) having the first guide (6), seen in the insertion direction, has the form of a resilient tongue (10) which projects forwardly from the remaining part (11) of the handle (1).

7. A handle according to any one of Claims 1-6, characterized in that the guide surfaces of said two guides (6, 9) coacting with the end portion (3) define a small angle with the axial centre line of the handle.

8. A handle according to any one of Claims 1-7, characterized in that the guides in the form of holes (6, 9) taper in the tool insertion direction.

9. A handle according to any one of Claims 1-9, characterized in that the handle is made of a resilient plastic material, preferably acetal plastic.

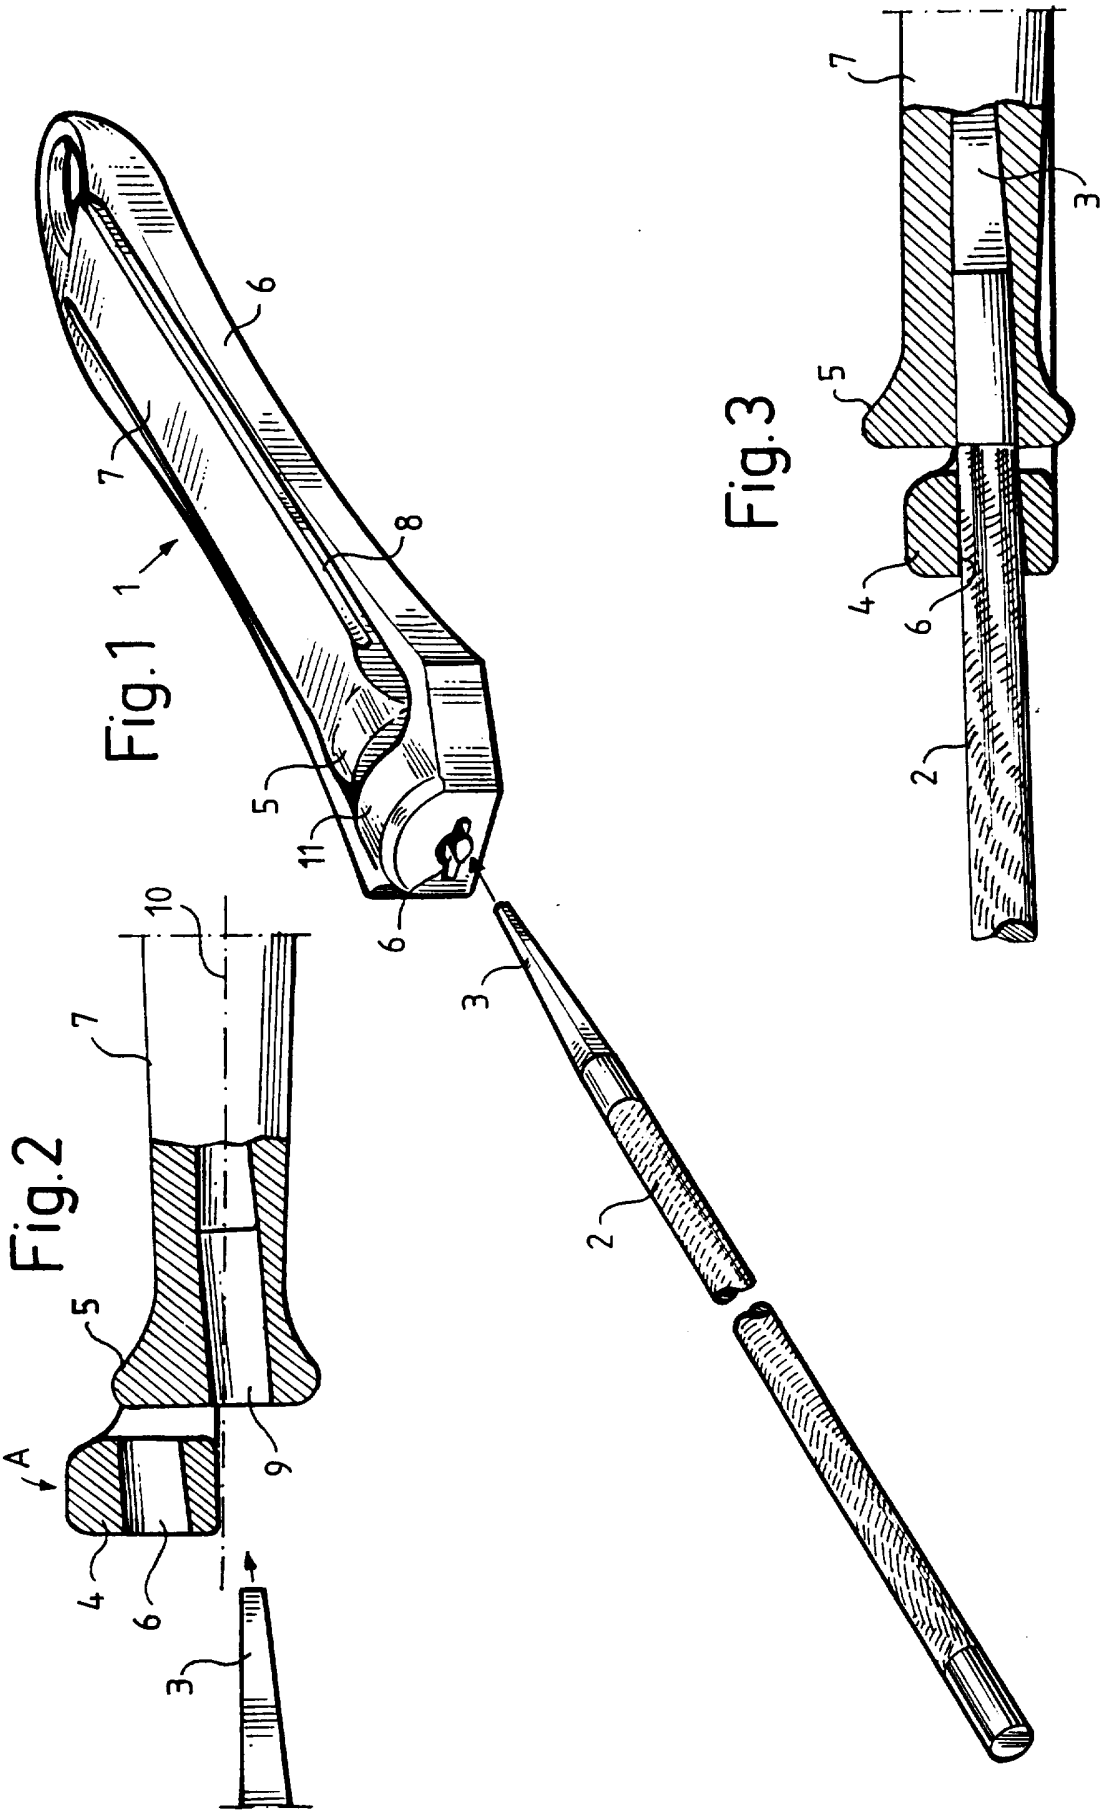


Fig.4

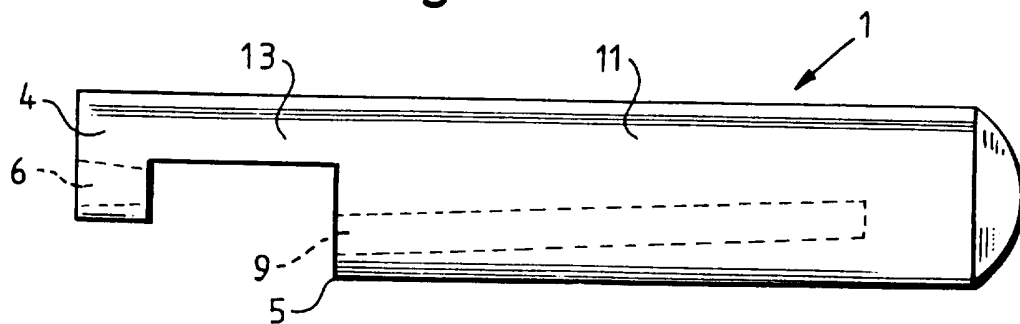


Fig.5


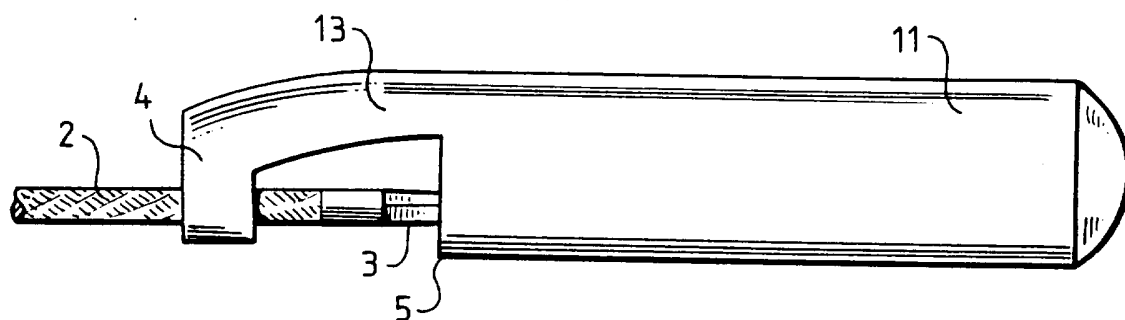


Fig.6

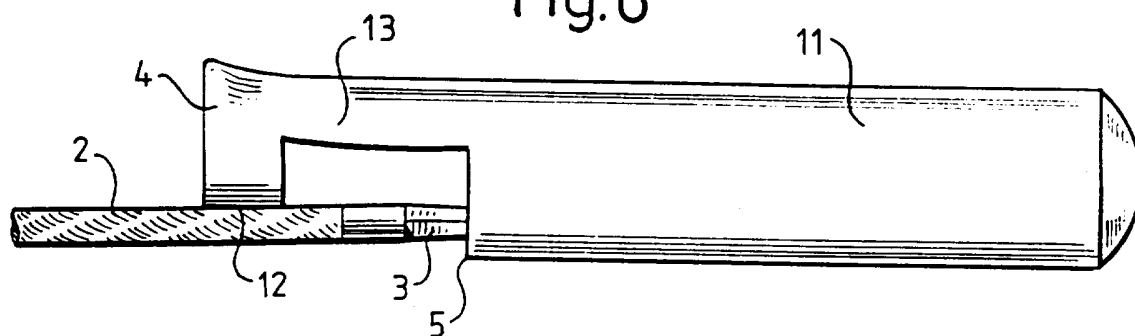

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01325

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B25G 3/12, B25G 3/00, B23D 71/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B25G, B23D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 1436556 A (J.V. WOODWORTH), 21 November 1922 (21.11.22), see the handle portions (6) and the claims --	1
A	US 2435654 A (F.P. PLEVA), 10 February 1948 (10.02.48), see the damping spring (12) and the openings (15 and 16), and the claims --	1
A	US 2229453 A (W.E. HEUER), 21 January 1941 (21.01.41), see the loop (7) with two leg portions (5 and 6) and the perforations (12 and 13). Observe the screw (15) which is drawing the leg portions toward each other --	1

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 February 1996

Date of mailing of the international search report

14-02-1996

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Maria Lundström

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01325

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2917813 A (H. ACKERMANN ET AL), 22 December 1959 (22.12.59), see the projections (b and c) and the slots (d and e) and the hemispherical portion (j) with grooves (i) -- -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

05/01/96

International application No.

PCT/SE 95/01325

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US-A-	1436556	21/11/22	NONE	
US-A-	2435654	10/02/48	NONE	
US-A-	2229453	21/01/41	NONE	
US-A-	2917813	22/12/59	NONE	