



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 457 345 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.09.2004 Bulletin 2004/38

(51) Int Cl.7: **B41J 2/36, B41J 2/375**

(21) Application number: **04100796.4**

(22) Date of filing: **01.03.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(71) Applicant: **AGFA-GEVAERT**
2640 Mortsel (BE)

(72) Inventors:
• **De Meutter, Stefaan c/o AGFA-GEVAERT**
2640, Mortsel (BE)
• **Kaerts, Eric c/o AGFA-GEVAERT**
2640, Mortsel (BE)

(30) Priority: **12.03.2003 EP 31006224**

(54) **Thermal head printer and process for printing substantially light-insensitive recording materials.**

(57) A thermal head printer with image-invariant printing speeds for printing a substantially light-insensitive thermographic material having a print density-driving power level characteristic, the thermal head printer comprising a transport means, one or more thermal heads each having an array of heating elements, a thermal print head drive system capable of supplying power to each of the printing elements, and a calibration means based on the print density-driving power level characteristic of the thermographic material; a process for calibrating a thermal head printer with image-invariant printing speeds, the thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to $P_{\max}$, to each heating element for printing a substantially light-insensitive thermographic material by image-wise heating the thermographic material with the heating elements, the process comprising the steps of: (i) putting the printer into a calibration mode; (ii) printing one or more step-wedges of print densities by heating the thermographic material with the heating elements at different DPLN's; (iii) determining the optical density of each step of the step-wedge(s) of print densities with a densitometer thereby obtaining the dependence of the print density upon

DPLN; (iv) deriving from the dependence, or all the dependences of the print density upon DPLN, a single smoothed dependence of the rate of change of print density, D , with DPLN, $\Delta D/\Delta DPLN$, as a function of DPLN for the thermographic material; (v) establishing a threshold rate of print density change per DPLN for the specific thermographic material being printed; and (vi) setting up the thermal head printer so that the threshold rate of print density increase per DPLN cannot be undercut; and a process for printing a substantially light-insensitive thermographic material with a thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to $P_{\max}$, the process comprising the steps of:

calibrating the thermal head printer according to the above-described calibration process, transporting the substantially light-insensitive thermographic material past the thermal head, and image-wise heating of the substantially light-insensitive thermographic material by means of the heating elements.

EP 1 457 345 A1

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention concerns a process for calibrating a thermal head printer for use with a substantially light-insensitive recording material.

BACKGROUND OF THE INVENTION

10 **[0002]** Thermography is an image-forming process including a heating step and hence includes photothermography in which the image-forming process includes image-wise exposure and direct thermal processes in which the image-forming process includes an image-wise heating step.

[0003] In direct thermal printing a visible image pattern is produced by image-wise heating of a recording material e.g. image signals can be converted into electric pulses and then via a driver circuit selectively transferred to a thermal head, which consists of microscopic heat resistor elements, thereby converting the electrical energy into heat via the Joule effect. This heat brings about image formation in the substantially light-insensitive thermographic material. In thermal heads, only those regions which produce heat higher than a certain value are effective for printing, and the regions capable of generating sufficient heat for the printing spread in proportion to voltage applied to the heating resistors. If, therefore, higher voltage is applied to the heating resistors, the size of the printing dots increases in proportion.

[0004] US 6,462,766 discloses a method and an apparatus for limiting the peak power consumed by a thermal recorder connected to portable battery-powered equipment. The battery-powered equipment is designed with a filter and an electronic circuit breaker. A circuit breaker current sense resistor and an output capacitor form an RC filter and provide a large current reservoir for the thermal recorder which averages the peak current demands seen at the circuit input. The electronic circuit breaker provides a current limit function and will not allow a current greater than a predetermined amperage level to be drawn. The thermal recorder has a CPU which provides pulses to a thermal print head in dependence on data incorporated in a pulse-width limit table. The values in the pulse-width limit table can be substituted for calculated pulse widths that would produce peak currents large enough to trip the circuit breaker.

[0005] US 6,234,695 discloses a printer using a power reduction logic based upon reducing the speed of printing when the dot utilization calculation exceeds a particular power level for that printer. There is also provided a method for printing information at a given power supply capacity level, comprising the steps of: examining the a group of rows of dots to be printed; calculating the maximum dot utilization value for the group; selecting a print speed based on the maximum dot utilization value; printing the first row of the group of rows; and repeating above steps until the information is printed.

[0006] US 6,503,006 discloses a printer using a power reduction logic based upon reducing the speed of printing when the dot utilization calculation exceeds a particular power level for that printer. There is also provided a method for printing information at a given power supply capacity level, comprising the steps of: examining the a group of rows of dots to be printed; calculating the maximum dot utilization value for the group; selecting a print speed based on the maximum dot utilization value; printing the first row of the group of rows; and repeating above steps until the information is printed.

[0007] US 5,528,275 discloses a gradational printing method for performing a gradational printing by energizing a plurality of heat emitting elements arranged on a thermal head correspondingly to respective bits of digital gradation data representing a gray level. In case of this method, the plurality of heat emitting elements are divided into two or more blocks and the blocks are energized correspondingly to different bits of the digital gradation data. Thus, an energizing time, during which a maximum current should be supplied, can be reduced.

[0008] EP-A 0 453 714 further discloses a gradation record printer in which an amount of energy applied to a thermal head is controlled in response to a gradation level of an image signal to print an image on a printing medium with gradations, said printer comprising: gradation density detecting means for storing data of standard density patterns with respect to address values corresponding to gradation levels, and for outputting a coincidence signal when data supplied from an outside of said gradation density detection means substantially coincides with said data of standard density patterns; a gradation test print circuit for applying data of different amounts of printing energy to said thermal head sequentially to make a gradation test print on said printing medium; density detecting sensor means for detecting densities of said gradation test print and for applying a detection output from said density detecting sensor means to said gradation density detection means; and a first memory element for storing said data of different amounts of energy with respect to address values corresponding to said gradation levels, in response to said coincidence signal from said gradation density detecting means.

[0009] EP-A 1 247 654 discloses that the traditional technique for calibrating a thermal printer is as follows: first, a first calibration page is printed with a limit setting to produce the desired maximum density and a full range of print

settings. The next step is to determine whether this is the desired limit setting by visually inspecting the printed page. The normal objective is to find the minimum exposure required to print the full range of desired densities. The lower the limit setting, the more nearly continuous the grey scale in the printed film. The process of printing and adjusting the maximum limit setting is repeated until a desired limit setting is determined. Next, a second calibration page is printed with the limit system setting selected and with a subset of print system settings which cover the full range of print settings. The resulting densities of the printed page are then measured and a print setting to density table created for the full range of print settings. An output lookup table that can be used to set exposure to produce the desired density for any digital image value is created using the print setting to density table. Thereafter the thermal printer prints pages with this output lookup table to produce the desired densities while the same maximum exposure is appropriate.

[0010] EP-A 1 247 654 further discloses a method for calibrating a thermal printer comprising a thermal head incorporating a plurality of energisable heating elements, said method comprising the steps of: supplying to said thermal printer a thermographic material m , a plurality of printer data P_i each intended to be recorded as a pixel having a density D_i , and default reference values for printing parameters II comprising a value P_{ref} for a reference printing power; printing a calibration pattern for said plurality of printer data P_i , said calibration pattern comprising a multiple step density wedge such that a whole range of a relation $D_i(P_i)$ between said printer data P_i and said density D_i is covered; measuring a density D_{expi} for each patch of said density wedge of said calibration pattern in relation to said plurality of printer data P_i and storing a first set $S1 = (P_{ref}, P_i, D_{expi})$ in a first memory $M1$; calculating, for a desired density D_{wantj} , a corresponding value $P_{refnewj}$ for said reference printing power and storing a second set $S2 = (D_{wantj}, P_{refnewj})$ in a second memory $M2$; calculating, for said desired density D_{wantj} , for each printer data P_i a corresponding density D_i and storing a third set $S3 = (D_{wantj}, P_{refnewj}, P_i, D_i)$ in a third memory $M3$.

[0011] US 5,711,621 discloses in a printer having a print region defined by a thermal print head and a rotatable platen adapted to draw a print media therebetween, a method for calibrating the printer comprises the steps of: identifying a type of print media which is selected for use on said printer, wherein said selected type of print media has unknown printer parameter values; printing a series of test labels onto said selected type of print media using a parameter of said printer having a unique value for each individual one of said test labels of said series with identifying information of said unique parameter value being printed thereon; after printing said series of test labels, inspecting said series of test labels to select one of said test labels of said series having a desired level of image quality; and specifying said unique parameter value of said selected one of said test labels for further operation of said printer with said selected type of print media.

[0012] US 2001/004284 discloses a calibration pattern printing method for a printer that prints an image in an image recording area on a recording paper, comprising the steps of: printing a calibration pattern in a marginal area on the recording paper outside said image recording area; and cutting said marginal area with said calibration pattern off the recording paper after the image is printed in said image recording area.

[0013] Thermographic materials are increasingly being used for graphic arts, medical and other applications which require high maximum print densities. Attaining such high print densities in thermographic materials requires that the heating elements be driven at higher powers and hence to higher temperatures, which increases the probability of premature heating element failure due to overheating and of image faults in the thermographic materials due to overheating. A means is therefore required to avoid such failure of the heating elements due to overheating and to avoid such image faults in the thermographic materials without significant loss in maximum print density and significant loss in image information.

ASPECTS OF THE INVENTION

[0014] It is therefore an aspect of the present invention to provide a means to avoid failure of the heating elements due to overheating and to avoid such image faults in the thermographic materials due to overheating without significant loss in image information.

[0015] It is a further aspect of the present invention to provide a thermal head printer capable of printing a substantially light-insensitive thermographic material without unacceptable heating element failure and image faults in the thermographic materials due to overheating without significant loss in image information.

[0016] It is also an aspect of the present invention to provide a calibration process for printing a substantially light-insensitive thermographic material to avoid failure of the heating elements due to overheating and to avoid such image faults in the thermographic materials due to overheating without significant loss in image information during the printing of the thermographic material.

[0017] It is also an aspect of the present invention to provide a printing process for a substantially light-insensitive thermographic material which avoids heating element failure and image faults in the thermographic materials due to overheating without significant loss in image information.

[0018] Further aspects and advantages of the invention will become apparent from the description hereinafter.

SUMMARY OF THE INVENTION

[0019] Whereas prior art approaches have sought to avoid premature failure of the heating elements due to over-heating and image faults in the thermographic materials due to overheating by reducing the printing speed, it has been surprisingly found that premature failure of the heating elements due to overheating and image faults in the thermographic materials due to overheating can be avoided without reducing the printing speed, i.e. with image-invariant printing speeds and hence invariant print throughput, by calibrating the drive characteristics of the heating elements for the specific thermographic material on the basis of the print density-driving power level characteristic of the thermographic material enabling printing quality independent of the thermal printing head conditions i.e. thermal printing head, installation variations and environmental conditions, all of which affect heat transfer from the heating elements to the thermographic material.

[0020] Aspects of the present invention are realized by a thermal head printer with image-invariant printing speeds for printing a substantially light-insensitive thermographic material having a print density-driving power level characteristic, the thermal head printer comprising a transport means, one or more thermal heads each having an array of heating elements, a thermal print head drive system capable of supplying power to each of the printing elements, and a calibration means based on the print density-driving power level characteristic of the thermographic material.

[0021] Aspects are also realised by a process for calibrating a thermal head printer with image-invariant printing speeds, the thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to $P_{\max}$, to each heating element for printing a substantially light-insensitive thermographic material by image-wise heating the thermographic material with the heating elements, the process comprising the steps of: (i) putting the printer into a calibration mode; (ii) printing one or more step-wedges of print densities by heating the thermographic material with the heating elements at different DPLN's; (iii) determining the optical density of each step of the step-wedge(s) of print densities with a densitometer thereby obtaining the dependence of the print density upon DPLN; (iv) deriving from the dependence, or all the dependences of the print density upon DPLN, a single smoothed dependence of the rate of change of print density, D , with DPLN, $\Delta D/\Delta DPLN$, as a function of DPLN for the thermographic material; (v) establishing a threshold rate of print density change per DPLN for the specific thermographic material being printed; and (vi) setting up the thermal head printer so that the threshold rate of print density increase per DPLN cannot be undercut.

[0022] Aspects of the present invention are also realized by a process for printing a substantially light-insensitive thermographic material with a thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to $P_{\max}$, the process comprising the steps of: calibrating the thermal head printer according to the above-described calibration process, transporting the substantially light-insensitive thermographic material past the thermal head, and image-wise heating of the substantially light-insensitive thermographic material by means of the heating elements.

[0023] Preferred embodiments of the present invention are disclosed in the detailed description of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0024] The present invention will be described in greater detail in the following with reference to the accompanying drawings, wherein:

Figure 1 shows the dependence of print density, D , represented by $[D \times 100]$, upon driving power level number (DPLN) for maximum powers of 46.4 mW (curve 1) and 38.2 mW (curve 2) respectively for substantially light-insensitive thermographic material type 1.

Figure 2 shows the dependencies of the slope of the dependence of print density (D) upon driving power level number (DPLN), $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon DPLN for the results of curve 1 and 2 of Figure 1 in curves 3 and 4 respectively.

Figure 3 shows the dependence of the maximum print density, $D_{\max}$, represented by $[D_{\max} \times 100]$, upon the threshold rate of print density change with driving power level number Th i.e. threshold value of $\Delta D/\Delta DPLN$ (curve 5), represented by $[Th \times 100]$, and the corresponding maximum densities, represented by $[D_{\max} \times 100]$, without applying a threshold value of $\Delta D/\Delta DPLN$, Th (curve 6).

Figure 4 shows the dependence of print density, D , represented by $[D \times 100]$, upon driving power level number (DPLN) for maximum powers of 47.6 mW (curve 7), 44.6 mW (curve 8) and 41.7 mW (curve 9) respectively for

substantially light-insensitive thermographic material type 2.

Figure 5 shows the dependences of the slope of the dependence of print density (D) upon driving power level number (DPLN), $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon DPLN for the results of curves 7, 8 and 9 of Figure 4 in curves 10, 11 and 12 respectively.

Figure 6 shows the dependence of the slope of the dependence of print density (D) upon driving power level number (DPLN), $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon DPLN for substantially light-insensitive thermographic material type 1 printed with a DRYSTAR 5300 printer with a maximum power of 62.4 mW and a line time of 8.35 ms.

Figure 7 shows the dependence of the slope of the dependence of print density (D) upon driving power level number (DPLN), $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon D, represented by $[D \times 100]$, for substantially light-insensitive thermographic material type 1 printed with a DRYSTAR 5300 printer with a maximum power of 62.4 mW and a line time of 8.35 ms.

Definitions

[0025] A heating element as used in disclosing the present invention is a resistor, which becomes hot upon being energized.

[0026] Transport speed, i.e. the speed of the substantially light-insensitive thermographic material, as used in disclosing the present invention, is the distance between adjacent lines of image dots in the transport direction divided by the line time.

[0027] Printing speed, as used in disclosing the present invention, is the speed at which the printing medium is transported through a printer.

[0028] The term "image-invariant printing speed", as used in disclosing the present invention, means that the image density has no influence upon the printing speed.

[0029] The term "dimensionless by normalization", as used in disclosing the present invention, means dividing a quantity by a reference value of that quantity e.g. the maximum value of that quantity which can be realized.

[0030] The term "single smoothed dependence of the rate of change of print density", as used in disclosing the present invention, means that all the measured values are represented by a dependence in the form of a smooth curve.

[0031] A transport means, as used in disclosing the present invention, can, for example, consist of a moving belt, a motor-driven drums, capstans or a combination thereof.

[0032] The print density-driving power level characteristic of a substantially light-insensitive thermographic recording material, according to the present invention, is the dependence of print density upon the driving power level of heating elements upon printing the thermographic material in the thermal head printer, according to the present invention.

[0033] According to the present invention, the available driving power range from 0 to a maximum driving power, P_{max} , is divided into a sufficient number of dimensionless i.e. normalized sub-units (the power increment between successive DPLN's being preferably constant) to enable the printing of sufficient grey tones to obtain prints without significant loss of imaging information, while providing the number of sub-units necessary to be able to achieve these grey tones with every heating element in the one or more thermal heads used in the printing process. These dimensionless sub-units are referred to as heating element driving power level numbers (DPLN's) in disclosing the present invention. In the disclosure of the present invention DPLN will refer to the actual DPLN, if there is no variation in heating effect between the heating elements of the one or more thermal heads, or to the reference DPLN, if there is variation in heating effect between the heating elements of the one or more thermal heads.

[0034] The term " $\Delta D/\Delta DPLN$ " is the rate of change of print density per heating element driving power level number.

[0035] The foot of the dependence of the print density upon DPLN is that part of the S-shaped print density upon DPLN dependence forming the bottom of the "S" and observed from the lowest DPLN at which an optical density above the background density D_{min} is observed.

[0036] The shoulder of the dependence of the print density upon DPLN is that part of the S-shaped print density upon DPLN dependence forming the top of the "S" and ends with the maximum density D_{max} .

[0037] The threshold rate of change of print density per DPLN for the specific thermographic material being printed i.e. threshold $\Delta D/\Delta DPLN$, as used in disclosing the present invention, is that rate of change of print density per DPLN at an optical density level above the foot of the dependence of the print density upon DPLN, which corresponds to an acceptably high optical density, an acceptable level of information loss, an acceptable level of heating element failure and an acceptable level of damage to the thermographic material.

[0038] Substantially rectangular means having angles which deviate from 90° by no more than 20°.

[0039] Substantially light-insensitive means not intentionally light sensitive.

[0040] A leuco-dye is a colourless or weakly coloured compound derived from a dye. Colourless or light coloured dye precursor leuco-dye systems include leuco triarylmethane, indolyl phthalide, diphenylmethane, 2-anilino-fluoran, 7-anilino-fluoran, xanthene and spiro compounds such as disclosed in EP-A 754 564.

5 Thermal head printer

[0041] Aspects of the present invention are realized by a thermal head printer with image-invariant printing speeds for printing a substantially light-insensitive thermographic material having a print density-driving power level characteristic, the thermal head printer comprising a transport means, one or more thermal heads each having an array of heating elements, a thermal print head drive system capable of supplying power to each of the printing elements, and a calibration means based on the print density-driving power level characteristic of the thermographic material.

[0042] According to a first embodiment of the thermal head printer, according to the present invention, the maximum driving power applied to the thermographic material during the printing process is adjusted as a function of the print density-driving power level characteristic of the thermographic material.

[0043] According to a second embodiment of the thermal head printer, according to the present invention, the driving power level in the print density-driving power level characteristic of the thermographic material is rendered dimensionless by normalization.

[0044] According to a third embodiment of the thermal head printer, according to the present invention, the thermal head printer further comprises at least one densitometer capable of measuring the print density of a print produced with the thermal head printer.

[0045] According to a fourth embodiment of the thermal head printer, according to the present invention, the thermal print head drive system is capable of being calibrated by using the dependence of print density upon power supply level for the substantially light-insensitive thermographic material.

[0046] According to a fifth embodiment of the thermal head printer, according to the present invention, the thermal head printer is battery powered.

[0047] According to a sixth embodiment of the thermal head printer, according to the present invention, the thermal head printer is mains powered.

[0048] According to a seventh embodiment of the thermal head printer, according to the present invention, the thermal head printer has a single printing speed.

[0049] The calibration process according to the present invention excludes setting a maximum allowable temperature of a heating element.

Process for calibrating a thermal head printer

[0050] Aspects are realised by a process for calibrating a thermal head printer with image-invariant printing speeds, the thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to P_{max} , to each heating element for printing a substantially light-insensitive thermographic material by image-wise heating the thermographic material with the heating elements, the process comprising the steps of: (i) putting the printer into a calibration mode; (ii) printing one or more step-wedges of print densities by heating the thermographic material with the heating elements at different DPLN's; (iii) determining the optical density of each step of the step-wedge(s) of print densities with a densitometer thereby obtaining the dependence of the print density upon DPLN; (iv) deriving from the dependence, or all the dependences of the print density upon DPLN, a single smoothed dependence of the rate of change of print density, D , with DPLN, $\Delta \text{Density} / \Delta \text{DPLN}$, as a function of DPLN for the thermographic material; (v) establishing a threshold rate of print density change per DPLN for the specific thermographic material being printed; and (vi) setting up the thermal head printer so that the threshold rate of print density increase per DPLN cannot be undercut.

[0051] The DPLN's for the printing of the step wedges can be default settings or these DPLN's can be determined from a reference print density-DPLN dependence obtained by determining the print density as a function of DPLN over the whole range of DPLN's. In the case of a variation in heating effect for a given DPLN between different heating elements in the one or more printing heads, each heating element exhibiting a different heating effect will exhibit a different dependence of print density upon DPLN which will be manifested as a variation in print density at each DPLN used. The data obtained by measuring this print density variation at each DPLN can be used to derive a reference print density-DPLN dependence, i.e. the reference DPLN required to obtain a particular print density, e.g. by plotting the average print density obtained at each DPLN versus DPLN. This can be used to determine the reference print density-DPLN dependence i.e. the reference DPLN's necessary to realize a particular density.

[0052] According to a first embodiment of the process for calibrating a thermal head printer, according to the present invention step (ii) is preceded by a determination of the dependence of print density upon DPLN i.e. the reference print

density-DPLN dependence for the particular thermographic material.

[0053] If there is a difference in heating effect at a given DPLN between different heating elements in the one or more printing heads, a compensation procedure is necessary to determine the print-density-DPLN characteristic for each heating element. In practice it is not necessary to determine experimentally the DPLN necessary to realize every grey tone with each heating element, it being sufficient to determine the DPLN's required for each heating element required to achieve a particular print density e.g. a print density of 1.0. The DPLN's required to obtain this reference density for each heating element can be represented as percentage changes in DPLN with respect to the reference DPLN obtained from the reference print density-DPLN dependence. It has been experimentally established that these percentage changes in DPLN with respect to the reference DPLN are practically independent of print density for the print density range within which image information is to be found. Therefore the look-up tables of DPLN's required to obtain a particular print density for each heating element can be drawn up, which are valid until the following compensation procedure is carried out. In practice this compensation procedure is carried out at regular time intervals during printer operation, so that this look-up table is constantly varying as the printing environment changes e.g. as the thermal heads heat up during extended use. This procedure is described, for example, in EP-A 1 247 654, herein incorporated by reference.

[0054] Calibration of the drive characteristics of the heating elements for the specific thermographic material being printed independent of the thermal printing head conditions i.e. thermal printing head, installation variations and environmental conditions, is achieved, according to the present invention, by normalizing the print density-driving power characteristic by dividing the available driving power range from 0 to a maximum driving power level number, corresponding to P_{max} , into a given number of power levels (DPLN's), printing a step-wedge at predetermined DPLN's, measuring the print density at each of the predetermined DPLN's, differentiating the resulting print density-DPLN characteristic, establishing a threshold rate of change of print density per driving power, Th , for the specific thermographic material being printed i.e. the threshold value of $\Delta D/\Delta DPLN$, and then setting the thermal head printer so that the thermal printing head is driven in such a way that the rate of change of print density per driving power level does not undercut the threshold rate of print density per DPLN i.e. the threshold value of $\Delta D/\Delta DPLN$.

[0055] According to a second embodiment of the process for calibrating a thermal head printer, according to the present invention, the threshold rate of print density change per DPLN is in the shoulder of the S-shaped print density upon DPLN dependence.

[0056] According to a third embodiment of the process for calibrating a thermal head printer, according to the present invention, the one or more step wedges of print densities are printed simultaneously i.e. substantially at an angle of 90° to the transport direction and substantially parallel to the thermal head or thermal heads.

[0057] According to a fourth embodiment of the process for calibrating a thermal head printer, according to the present invention, steps (i) to (iii) are repeated at different places on the thermographic material to obtain further dependencies of the print density upon the heat produced by the heating elements for the thermographic material.

[0058] According to a fifth embodiment of the process for calibrating a thermal head printer, according to the present invention, the step-wedges of print densities are printed in the transport direction.

[0059] The threshold rate of change of print density per DPLN for the specific thermographic material being printed (threshold slope) can, for example, be established by first determining the print density at which the highest rate of print density per DPLN is observed, then determining the dependence of print density upon the rate of change of print density per DPLN for print densities higher than that corresponding to the maximum rate of change of print density per DPLN and selecting a DPLN, the critical DPLN, at which an acceptable rate of heating element failure and an acceptable rate of damage of the thermographic material is observed and at which there is an insignificant loss of imaging information. This last criterion means that the critical DPLN will be in the shoulder of the "S"-shaped dependence of print density upon DPLN. A type of damage to thermographic materials frequently observed is the appearance of pinholes and hence a possible criterion with respect to thermographic material damage can be the incidence of pinholes as shown in INVENTION EXAMPLE 1. A possible measure of the failure rate of heating elements could be the drift in heating element heating characteristics, which could be obtained from the above-mentioned compensation procedure data. The rate of change of print density per DPLN corresponding to this critical DPLN i.e. the threshold rate of change of print density per DPLN, Th , is the threshold $\Delta D/\Delta DPLN$ value below which unacceptable printing conditions obtain.

[0060] The print density-DPLN characteristics are determined by printing an array of areas of the thermographic material, each area being printed with heating elements each supplied with the power to give the same grey level response, these areas being sufficiently large to enable the print density to be determined by a densitometer, preferably being wide enough to enable sufficient densitometric measurements to be carried out that a reliable and consistent print density value can be established by taking the average of values left after rejecting measurements which vary by more than a predetermined percentage from the average print density value. These areas may form an array substantially parallel to the printing head or printing heads or form an array in the transport direction of the printer. If more than one print density-DPLN characteristic is combined to produce a master characteristic, the print density-DPLN characteristic used can be generated at the same or different power level numbers. If the heating effect of the heating elements

varies from heating element to heating element, the DPLN value in the above-mentioned print density-DPLN characteristics will be the reference DPLN value.

[0061] The delay between printing and optical density measurement should be as constant as possible to allow for print density variation subsequent to printing.

[0062] According to a sixth embodiment of the process for calibrating a thermal head printer, according to the present invention, there is a predetermined delay-time between printing of an area with the same grey level and measuring the print density thereof e.g. 50 s.

[0063] According to a seventh embodiment of the process for calibrating a thermal head printer, according to the present invention, the densitometric measurements are performed on the array or arrays of areas with different print densities corresponding to different DPLN's with one or more static densitometers while the thermographic material is transported under the densitometer head(s). This can be on-line with or without stopping the transport of the thermographic material between the printing and the densitometric measurements or off-line. If performed on-line without stopping the transport of thermographic material, the delay after printing is the transport time between the thermal head and the densitometer head i.e. the quotient of the distance between the thermal head and the densitometer head and the transport speed.

[0064] According to an eighth embodiment of the process for calibrating a thermal head printer, according to the present invention, the densitometric measurements are performed with the thermographic material stationary and with one or more dynamic densitometers scanning over the array or arrays of areas with different print densities corresponding to different DPLN's or different reference DPLN's. Such measurements can be carried out on-line i.e. in the printer itself by stopping the transport of the thermographic material and scanning the array or arrays of areas with different print densities corresponding to different DPLN's or reference DPLN's, or off-line. If dynamic densitometry is used, it is preferred that the array or arrays of areas with different print densities corresponding to different DPLN's or reference DPLN's be printed substantially parallel to the thermal head or thermal heads and that the one or more dynamic densitometers scan in a direction substantially parallel to the thermal head or thermal heads.

[0065] Since the thermographic material may vary in its thermal response over the area thereof, it is advantageous to combine data obtained from different areas of the thermographic material e.g. by combining print density-DPLN or reference DPLN characteristics from different areas of the thermographic material. These arrays of printed areas can be substantially at 90° to or substantially parallel to the transport direction of the thermographic material.

[0066] If print density-DPLN or reference DPLN data from different areas of the thermographic material with slightly different thermal response characteristics are combined into a master curve before differentiating to obtain the rate of print density per DPLN as a function of DPLN, prior smoothing of the raw print density-DPLN or reference DPLN data is preferred. Any of the standard smoothing procedures may be used, but the floating point method is preferred.

[0067] The width of the area traversed by the densitometer should be sufficient to enable multiple densitometric measurements to be carried out and will depend upon the scanning speed of the densitometer, if it is dynamic, the transport speed of the thermographic material, if it is moving, the available light intensity, the spot size, the degree of overlap from measurement to measurement and the measurement rate of the densitometer. These factors will also determine the number of areas that can be printed. If several print density-DPLN or reference DPLN characteristics are used to yield a master curve, as few as eight points per characteristic has been found to be sufficient to yield a reliable master curve after smoothing.

[0068] The densitometer can be a transmission or reflection densitometer depending if the thermographic material is transparent, but only a reflection densitometer if the thermographic material is opaque.

Process for printing a substantially light-insensitive thermographic material

[0069] Aspects of the present invention are realized by a process for printing a substantially light-insensitive thermographic material with a thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to $P_{\max}$, the process comprising the steps of: calibrating the thermal head printer according to the above-described calibration process, transporting the substantially light-insensitive thermographic material past the thermal head, and image-wise heating of the substantially light-insensitive thermographic material by the driving power levels to the heating elements.

[0070] The operating temperature of common thermal heads is in the range of 300 to 400°C and the pressure contact of the thermal printhead with the recording material to ensure a good transfer of heat being e.g. 200-1000g/linear cm i.e. with a contact zone (nip) of 200 to 300 μm a pressure of 5000 to 50,000 g/cm². Activation of the heating elements can be power-modulated or pulse-length modulated at constant power.

Substantially light-insensitive thermographic material

[0071] The term substantially light-insensitive thermographic material includes all materials which produce a change in optical density upon the application of heat.

[0072] According to a first embodiment of the process for printing a substantially light-insensitive thermographic material and a seventh embodiment of the process for calibrating a thermal head printer, according to the present invention, the substantially light-insensitive thermographic material is a black and white material.

[0073] According to a second embodiment of the process for printing a substantially light-insensitive thermographic material and an eighth embodiment of the process for calibrating a thermal head printer, according to the present invention, the substantially light-insensitive thermographic material is a two sheet material in which an ingredient necessary for the image-forming process is transferred upon image-wise application of heat from one sheet to the other where it reacts with one or more further ingredients to produce an image.

[0074] According to a third embodiment of the process for printing a substantially light-insensitive thermographic material and a ninth embodiment of the process for calibrating a thermal head printer, according to the present invention, the substantially light-insensitive thermographic material is a monosheet material.

[0075] According to a fourth embodiment of the process for printing a substantially light-insensitive thermographic material and a tenth embodiment of the process for calibrating a thermal head printer, according to the present invention, the substantially light-insensitive thermographic material contains a thermosensitive element comprising one or more layer, the one or more layers containing an image-forming system.

[0076] Suitable image-forming systems include monosheet substantially light-insensitive thermographic materials such as colourless or light coloured dye precursor leuco-dye systems, as disclosed in US-P 4,370,370, EP-A 479 578 and EP-A 754 564, diazo systems, as disclosed in JP 60-01077A, or two-sheet thermal dye transfer systems, such as disclosed in EP-A 656 264 and US-P 4,943,555. Alternatively the image-forming systems may comprise at least one substantially light-insensitive organic silver salt and at least one organic reducing agent therefor either in a two-sheet material in which upon image-wise application of heat at least one organic reducing agent is image-wise transferred to a sheet containing the at least one substantially light-insensitive organic silver salt whereupon the image-forming reaction takes place or in a monosheet material in which the at least one substantially light-insensitive organic silver salt is in thermal working relationship with the at least one organic reducing agent therefor.

[0077] According to a fifth embodiment of the process for printing a substantially light-insensitive thermographic material and an eleventh embodiment of the process for calibrating a thermal head printer, according to the present invention, the substantially light-insensitive thermographic material is a monosheet material comprising a thermosensitive element and a support, the thermosensitive element comprising at least one substantially light-insensitive organic silver salt, at least one organic reducing agent therefor in thermal working relationship therewith, i.e. during the thermal development process the organic reducing agent must be present in such a way that it is able to diffuse to the substantially light-insensitive organic silver salt particles so that reduction of the substantially light-insensitive organic silver salt can take place, and a binder. Such materials include the possibility of one or more substantially light-insensitive organic silver salts and/or one of more organic reducing agents therefor being encapsulated in heat-responsive microcapsules, such as disclosed in EP-A 0 736 799 herein incorporated by reference.

[0078] All substantially light-insensitive thermographic materials exhibit a print density-driving power characteristic, which has a weak print density-driving power response at very low driving powers, a strong print density-driving power response to low to high driving powers and a weak print density-driving power response at very high driving powers, which may even become negative at extremely high driving powers due to image defects such as pin-holes. A balance has to be struck in thermographic materials between shelf-life stability and thermosensitivity, which means that, if very high print densities are required, the maximum density required is often to be found in the weak print density-driving power response at very high driving powers.

Organic silver salts

[0079] Preferred substantially light-insensitive organic silver salts for use in the thermosensitive element of the substantially light-insensitive elongated imaging material used in the present invention, are silver salts of aliphatic carboxylic acids known as fatty acids, wherein the aliphatic carbon chain has preferably at least 12 C-atoms, which silver salts are also called silver soaps.

Organic reducing agents

[0080] Suitable organic reducing agents for the reduction of the substantially light-insensitive organic silver salts are organic compounds containing at least one active hydrogen atom linked to O, N or C. The choice of reducing agent influences the thermal sensitivity of the imaging material and the gradation of the image. Imaging materials using

gallates, for example, have a high gradation. In a preferred embodiment of the present invention the thermosensitive element contains a 3,4-dihydroxyphenyl compound with ethyl 3,4-dihydroxybenzoate, n-butyl 3,4-dihydroxybenzoate, 3,4-dihydroxy-benzophenone and 3,4-dihydroxy-benzonitrile being particularly preferred.

Binder

[0081] The thermosensitive element of the substantially light-insensitive elongated imaging material used in the present invention may be coated onto a support in sheet- or web-form from an organic solvent containing the binder dissolved therein or may be applied from an aqueous medium using water-soluble or water-dispersible binders.

[0082] Suitable binders for coating from an organic solvent are all kinds of natural, modified natural or synthetic resins or mixtures of such resins, wherein the organic heavy metal salt can be dispersed homogeneously or mixtures thereof.

[0083] Suitable water-soluble film-forming binders include: polyvinyl alcohol, polyacrylamide, polymethacrylamide, polyacrylic acid, polymethacrylic acid, polyethyleneglycol, polyvinylpyrrolidone, proteinaceous binders such as gelatin and modified gelatins, such as phthaloyl gelatin, polysaccharides, such as starch, gum arabic and dextrin, and water-soluble cellulose derivatives. Suitable water-dispersible binders are any water-insoluble polymers. Poly(vinylbutyral) is the preferred binder.

[0084] In the case of substantially light-insensitive thermographic materials containing substantially light-insensitive organic silver salts, the binder to organic silver salt weight ratio decreases the gradation of the image increasing. Binder to organic silver salt weight ratios of 0.2 to 6 are preferred with weight ratios between 0.5 and 3 being particularly preferred.

[0085] The above mentioned binders or mixtures thereof may be used in conjunction with waxes or "heat solvents" to improve the reaction speed of the image-forming reaction at elevated temperatures.

Toning agents


[0086] In order to obtain a neutral black image tone in the higher densities and neutral grey in the lower densities, the substantially light-insensitive thermographic material used in the present invention may contain one or more toning agents. In the case of substantially light-insensitive thermographic materials containing substantially light-insensitive organic silver salts, the toning agents should be in thermal working relationship with the substantially light-insensitive organic silver salt and reducing agents during thermal processing.

[0087] Suitable toning agents are described in US 3,074,809, US 3,446,648 and US 3,844,797 and US 4,082,901. Other particularly useful toning agents are the heterocyclic toning compounds of the benzoxazine dione or naphthoxazine dione type as disclosed in GB 1,439,478, US 3,951,660 and US 5,599,647.

[0088] According to an seventh embodiment of the process, according to the present invention, the substantially light-insensitive thermographic material contains a thermosensitive element, the thermosensitive element containing one or more toning agents selected from the group consisting of phthalazinone, benzo[e][1,3]oxazine-2,4-dione, 7-methyl-benzo[e][1,3]oxazine-2,4-dione, 7-methoxy-benzo[e][1,3]oxazine-2,4-dione and 7-(ethylcarbonato)-benzo[e][1,3]oxazine-2,4-dione.

Stabilizers and antifoggants

[0089] In order to obtain improved shelf-life, archivability and reduced fogging, stabilizers and antifoggants may be incorporated into the substantially light-insensitive thermographic material used in the present invention. Suitable stabilizers compounds for use in the substantially light-insensitive thermographic material used in the present invention include benzotriazole, tetrachlorophthalic acid anhydride and those compounds represented by general formula I:



(I)

where Q are the necessary atoms to form a 5- or 6-membered aromatic heterocyclic ring, A is selected from hydrogen, a counterion to compensate the negative charge of the thiolate group or a group forming a symmetrical or an asymmetrical disulfide.

Surfactants and dispersants

[0090] Surfactants and dispersants aid the dispersion of ingredients which are insoluble in the particular dispersion medium. The substantially light-insensitive thermographic material used in the present invention may contain one or more surfactants, which may be anionic, non-ionic or cationic surfactants and/or one or more dispersants. Suitable dispersants are natural polymeric substances, synthetic polymeric substances and finely divided powders, e.g. finely divided non-metallic inorganic powders such as silica.

Support

[0091] According to a eighth embodiment of the processes, according to the present invention, the substantially light-insensitive thermographic material has a transparent or translucent support and is preferably a thin flexible carrier made transparent resin film, e.g. made of a cellulose ester, e.g. cellulose triacetate, polypropylene, polycarbonate or polyester, e.g. polyethylene terephthalate. The support may be in sheet, ribbon or web form and subbed if needs be to improve the adherence to the thereon coated thermosensitive element. The support may be dyed or pigmented to provide a transparent coloured background for the image.

Protective layer

[0092] In a preferred embodiment of the present invention a protective layer is provided for the thermosensitive element. In general this protects the thermosensitive element from atmospheric humidity and from surface damage by scratching etc. and prevents direct contact of printheads or other heat sources with the recording layers. Protective layers for thermosensitive elements which come into contact with and have to be transported past a heat source under pressure, have to exhibit resistance to local deformation and good slipping characteristics during transport past the heat source during heating. A slipping layer, being the outermost layer, may comprise a dissolved lubricating material and/or particulate material, e.g. talc particles, optionally protruding from the outermost layer. Examples of suitable lubricating materials are a surface active agent, a liquid lubricant, a solid lubricant or mixtures thereof, with or without a polymeric binder.

Coating techniques

[0093] The coating of any layer of the substantially light-insensitive thermographic material used in the present invention may proceed by any coating technique e.g. such as described in Modern Coating and Drying Technology, edited by Edward D. Cohen and Edgar B. Gutoff, (1992) VCH Publishers Inc., 220 East 23rd Street, Suite 909 New York, NY 10010, USA. Coating may proceed from aqueous or solvent media with overcoating of dried, partially dried or undried layers.

[0094] The invention is illustrated hereinafter by way of comparative examples and invention examples. The percentages and ratios given in these examples are by weight unless otherwise indicated.

EXAMPLES

preparation of type 1 and type 2 substantially light-insensitive thermographic materials

[0095] Type 1 and type 2 substantially light-insensitive thermographic materials were prepared by coating a 175 µm thick blue-pigmented poly(ethylene terephthalate) support with a subbing layer with the following composition:

copolymer of 88% vinylidene chloride, 10% methyl acrylate and 2% itaconic acid	79.1 mg/m ²
Kieselso ^l ® 100F, a colloidal silica from BAYER	18.6 mg/m ²
Mersolat® H, a surfactant from BAYER	0.4 mg/m ²
Ultravon® W, a surfactant from CIBA-GEIGY	1.9 mg/m ²

[0096] This subbing layer was then coated with thermosensitive element types 1 and 2 respectively as given below from coating dispersions in 2-butanone to a coating thickness of 100 µm:

	Thermosensitive element types	
	1 [g/m ²]	2 [g/m ²]
silver behenate	4.40	4.42
S-LEC BL5HP, a polyvinyl butyral from SEKISUI	17.60	16.79
3,4-dihydroxybenzonitrile	0.394	0.618
ethyl 3,4-dihydroxybenzoate	0.866	0.515
7-(ethylcarbonato)-benzo[e][1,3]oxazine-2,4-dione	0.124	0.226
7-methyl-benzo[e][1,3]oxazine-2,4-dione	0.261	-
glutaric acid	0.312	0.287
tetrachlorophthalic acid anhydride	0.139	0.139
benzotriazole	0.115	0.116
BAYSILON, a silicone oil from BAYER	0.039	0.039

[0097] The thermosensitive elements were then further coated with an aqueous composition with the following ingredients, which was adjusted to a pH of 3.8 with IN nitric acid, to a wet layer thickness of 85 µm and then dried at 50°C for 15 minutes to produce a protective layer with the composition:

	[g/m ²]
ERCOL TM 48 20, a polyvinylalcohol from ACETEX EUROPE	2.1
LEVASIL TM VP AC 4055, a 15% aqueous dispersion of colloidal silica with acid groups predominantly neutralized with sodium ions and a specific surface area of 500 m ² /g from BAYER AG, which has been converted into the ammonium salt	1.05
ULTRAVON TM W, a 75-85% concentrate of a sodium arylsulfonate from Ciba Geigy converted into acid form by passing through an ion exchange column	0.075
SYLOID TM 72, a silica from Grace	0.09
SERVOXYL TM VPDZ 3/100, a mono[isotridecyl polyglycoether (3 EO)] phosphate from SERVO DELDEN B.V.	0.075
SERVOXYL TM VPAZ 100, a mixture of monolauryl and dilauryl phosphate from SERVO DELDEN B.V.	0.075
MICROACE TALC P3, an Indian talc from NIPPON TALC	0.045
RILANIT TM GMS, a glycerine monotallow acid ester from HENKEL	0.15
TMOS tetramethylorthosilicate hydrolyzed in the presence of methanesulfonic acid	0.87*

* assuming that the TMOS was completely converted to SiO₂

[0098] After coating the protective layer was hardened by heating the substantially light-insensitive thermographic material at 45°C for 7 days at a relative humidity of 70%.

INVENTION EXAMPLE 1

[0099] Four step-wedges were simultaneously printed with the type 1 substantially light-insensitive thermographic material in an environment with a temperature of 25°C and a relative humidity of 50% relative humidity with a DRYSTARTM 4500M printer with a line time of 7ms from AGFA-GEVAERT N.V. consisting each of 13 areas 4 mm in width and ca. 200 mm in length along the transport direction of the printer with a maximum power level of 38.2 mW. Each of the 52 areas was printed at a different DPLN from a total number of 13bit (8192) with each of the 13 areas covering the whole DPLN range. The optical densities were measured with a built in dynamic transmission densitometer with a spot size of 0.6 mm by taking the average of 10 measurements. The densitometer scanned over the areas at substantially 90° to the transport direction with the substantially light-insensitive thermographic material stationary. The four sets of print density-DPLN data were combined into a single smoothed master curve, see curve 1 of Figure 1, in which

[D x 100] is plotted against DPLN, and the slope, $\Delta D/\Delta DPLN$, calculated as a function of DPLN, see curve 3 of Figure 2, in which $[\Delta D \times 100]/\Delta DPLN$ is plotted against DPLN. This experiment was then repeated with a maximum power level of 46.4 mW, see curve 2 of Figure 1 and curve 4 of Figure 2 respectively.

[0100] Curve 5 of Figure 3, in which $[D_{\max} \times 100]$ is plotted against $[Th \times 100]$, shows the influence of increasing the threshold value of print density change with DPLN, Th , i.e. the threshold $\Delta D/\Delta DPLN$ value, from 0.0003 to 0.0010 upon the maximum print density $D_{\max}$ upon printing in an environment with a temperature of 30°C and 80% relative humidity i.e. more critical conditions for print quality. Table 1 provides the maximum print density values $D_{\max}$ obtained with different threshold slopes and the incidence of pin-holes. The incidence of pin-holes was assessed as follows:

- pin-hole assessment 0 = no pin-holes observable
- pin-hole assessment 1 = occasional pin-hole barely observable
- pin-hole assessment 2 = a few pin-holes, difficult to see
- pin-hole assessment 3 = moderate number of pin-holes
- pin-hole assessment 4 = large number of pin-holes
- pin-hole assessment 5 = very large number of pin-holes

[0101] A threshold slope setting of 0.00045 represented an acceptable compromise between acceptable $D_{\max}$ reduction of 0.15 together with an acceptable level of pin-holes.

Table 1:

Dmax without threshold slope setting	Threshold slope, Th	$D_{\max}$ with threshold slope setting	Assessment of pinholes
2.99	0.0003	2.90	4
3.00	0.00035	2.89	4
3.01	0.0004	2.87	3
3.01	0.00045	2.85	2
2.98	0.0005	2.77	1
2.99	0.001	2.15	0

INVENTION EXAMPLE 2

[0102] Four step-wedges were simultaneously printed with the type 2 substantially light-insensitive thermographic material in an environment with a temperature of 25°C and a relative humidity of 50% relative humidity with a DRYSTAR™ 4500 printer with a line time of 7ms from AGFA-GEVAERT N.V. consisting each of 13 areas 4 mm in width and ca. 200 mm in length along the transport direction of the printer with a maximum power level of 47.6 mW. Each of the 52 areas was printed at a different DPLN from a total number of 13bit (8192) with each of the 13 areas covering the whole DPLN range. The optical densities were measured with a built in dynamic transmission densitometer with a spot size of 0.6 mm by taking the average of 10 measurements. The densitometer scanned over the areas at an angle of substantially 90° to the transport direction with the substantially light-insensitive thermographic material stationary. The four sets of print density-DPLN data were combined into a single smoothed master curve, see curve 7 of Figure 4, in which $[D \times 100]$ is plotted against DPLN, and the slope calculated as a function of DPLN, see curve 10 of Figure 5, in which $[\Delta D \times 100]/\Delta DPLN$ is plotted against DPLN. This experiment was then repeated with maximum power levels of 44.6 mW (see curve 8 of Figure 4 and curve 11 of Figure 5 respectively) and 41.7 mW (see curve 9 of Figure 4 and curve 12 of Figure 5 respectively).

[0103] Figure 5 shows the dependencies of the slope of the dependence of print density (D) upon DPLN, $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon DPLN for the results of curves 7, 8 and 9 of Figure 4 in curves 10, 11 and 12 respectively.

[0104] Printing experiments in an environment with a temperature of 30°C and 80% relative humidity using a threshold slope setting of 0.045 enabled a $D_{\max}$ of 3.70 to be realized without observation of pinholes in the thermographic material, i.e. with a pinhole assessment of 0, and without significant loss of image information.

INVENTION EXAMPLE 3

[0105] Two step-wedges consisting each of 16 areas, 337mm in width and ca. 9.5mm in length along the transport

direction of the printer were simultaneously printed on the type 1 substantially light-insensitive thermographic material at a temperature of 25°C and a relative humidity of 50% with a DRYSTAR™ 5300 printer from AGFA-GEVAERT N.V. with a maximum power level of 62.4mW and a line time of 8,35ms. Each of the 32 areas was printed at a different DPLN from a total number of 13bit (8192) with the 16 areas covering the whole DPLN range. The optical densities were measured with a built-in static transmission densitometer with a spot size of 30x70mm by taking the average of 13 measurements. The densitometer scanned over the areas in the transport direction while the substantially light-insensitive thermographic material moved to the output tray. The two sets of print density-DPLN data were combined into a single smoothed master curve and the dependence of slope, $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon DPLN is shown in Figure 6. Figure 7 shows the dependence of the slope, $\Delta D/\Delta DPLN$, represented by $[\Delta D \times 100]/\Delta DPLN$, upon optical density D, represented by $[D \times 100]$.

[0106] The initial threshold slope setting of 0.04 gives a maximum density of 302. The threshold slope of this system was decreased to 0.03 in order to achieve a better compromise between Dmax and an acceptable level of thermal print head contamination.

[0107] The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof irrespective of whether it relates to the presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

Claims

1. A thermal head printer with image-invariant printing speeds for printing a substantially light-insensitive thermographic material having a print density-driving power level characteristic, said thermal head printer comprising a transport means, one or more thermal heads each having an array of heating elements, a thermal print head drive system capable of supplying power to each of said printing elements, and a calibration means based on said print density-driving power level characteristic of said thermographic material.
2. Thermal head printer according to claim 1, wherein the maximum driving power applied to said thermographic material during said printing process is adjusted as a function of said print density-driving power level characteristic of said thermographic material.
3. Thermal head printer according to claim 1 or 2, wherein the driving power level in said print density-driving power level characteristic of said thermographic material is rendered dimensionless by normalization.
4. Thermal head printer according to any of the preceding claims, wherein said thermal head printer further comprises at least one densitometer capable of measuring the print density of a print produced with said thermal head printer.
5. Thermal head printer according to any of the preceding claims, wherein said thermal print head drive system is capable of being calibrated by using the dependence of print density upon power supply level for said substantially light-insensitive thermographic material.
6. A process for calibrating a thermal head printer with image-invariant printing speeds, said thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to P_{max} , to each heating element for printing a substantially light-insensitive thermographic material by image-wise heating said thermographic material with said heating elements, said process comprising the steps of:
 - (i) putting said printer into a calibration mode;
 - (ii) printing one or more step-wedges of print densities by heating said thermographic material with said heating elements at different DPLN's;
 - (iii) determining the optical density of each step of said step-wedge(s) of print densities with a densitometer thereby obtaining the dependence of said print density upon DPLN;
 - (iv) deriving from said dependence, or all said dependences of said print density upon DPLN, a single smoothed dependence of the rate of change of print density, D, with DPLN, $\Delta D/\Delta DPLN$, as a function of DPLN for said thermographic material;
 - (v) establishing a threshold rate of print density change per DPLN for the specific thermographic material being printed; and

(vi) setting up said thermal head printer so that said threshold rate of print density increase per DPLN cannot be undercut.

7. Process according to claim 6, wherein said one or more step wedges of print densities are printed simultaneously.

8. Process according to claim 6 or 7, wherein steps (i) to (iv) are repeated at different places on said thermographic material to obtain further dependencies of said print density upon said heat produced by said heating elements for said thermographic material.

9. A process for printing a substantially light-insensitive thermographic material with a thermal head printer comprising one or more thermal heads each having an array of heating elements connected to a power supply capable of supplying a given number of heating element driving power levels from 0 to a maximum driving power level number, corresponding to $P_{\max}$, said process comprising the steps of: calibrating said thermal head printer according to any of claims 6 to 8, transporting the substantially light-insensitive thermographic material past the thermal head, and image-wise heating of the substantially light-insensitive thermographic material by means of said heating elements.

FIG. 1

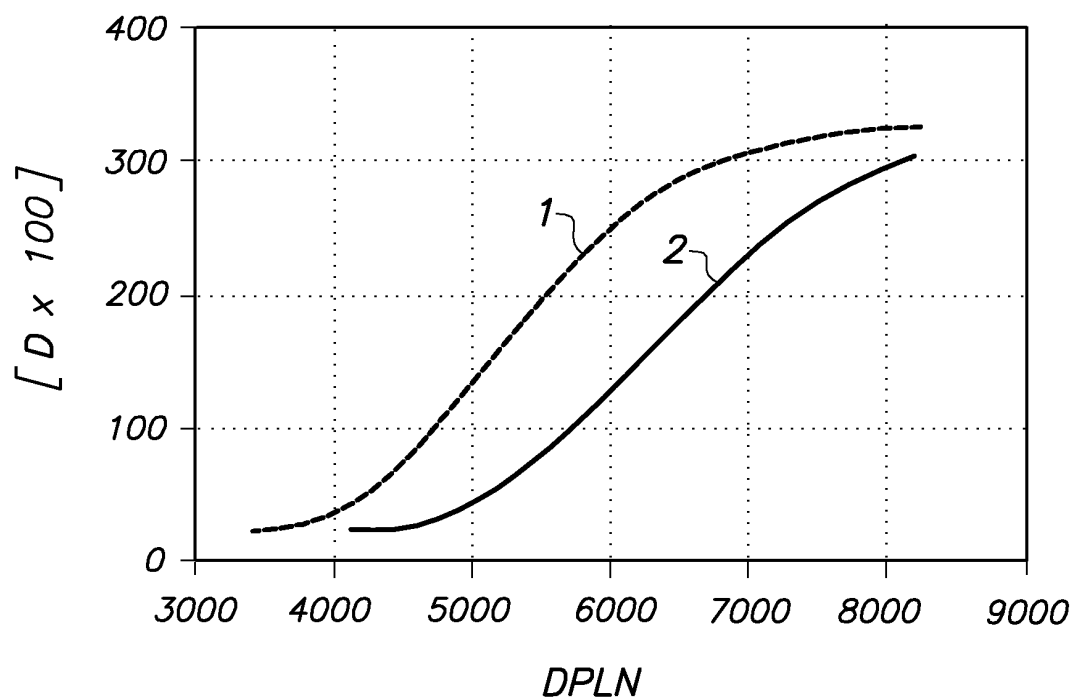


FIG. 2

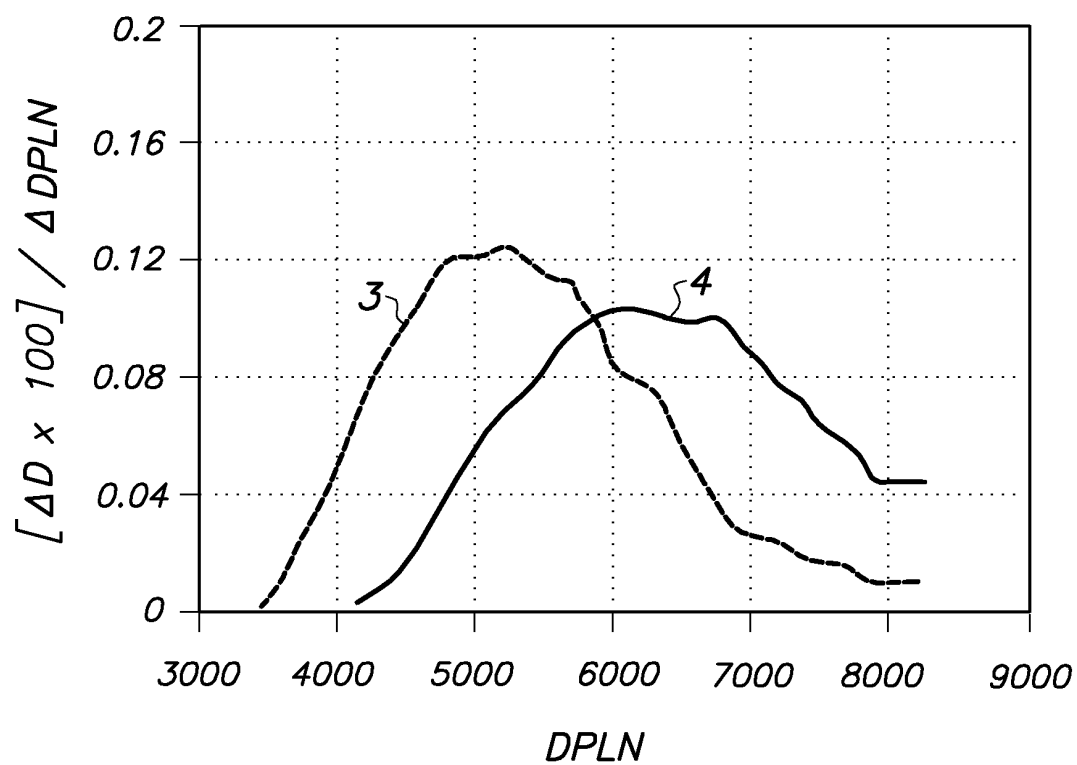


FIG. 3

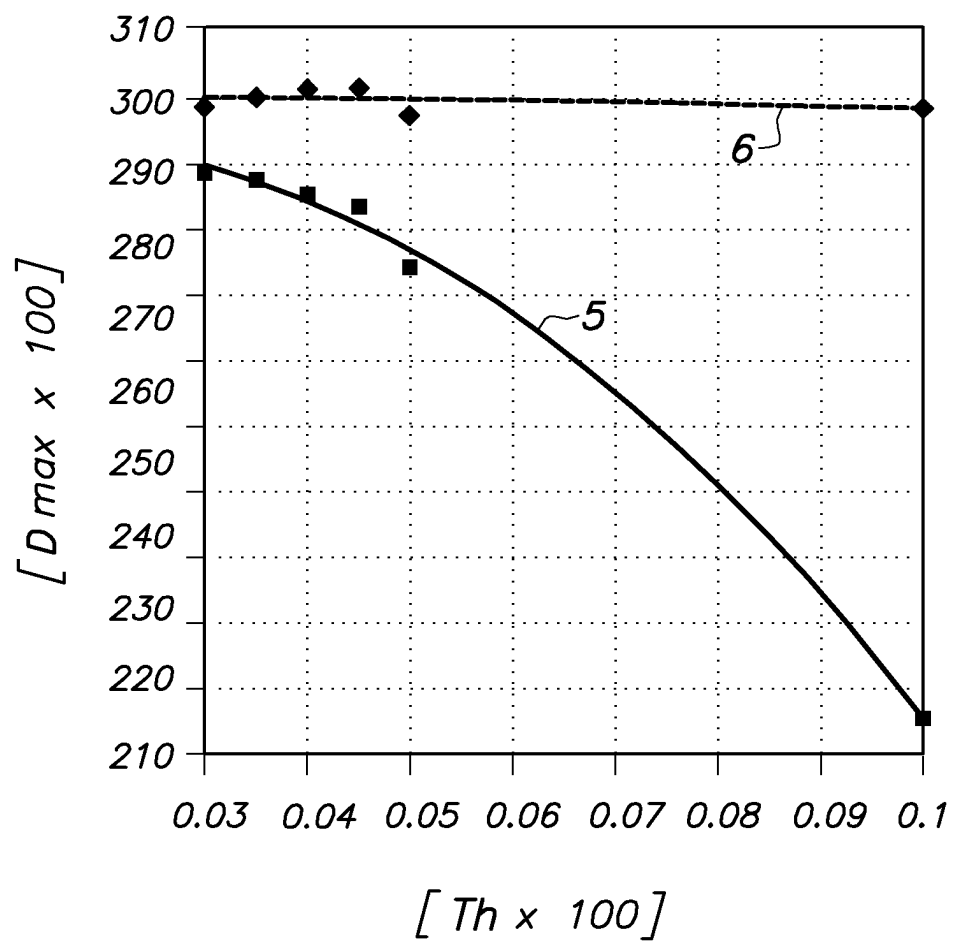


FIG. 4

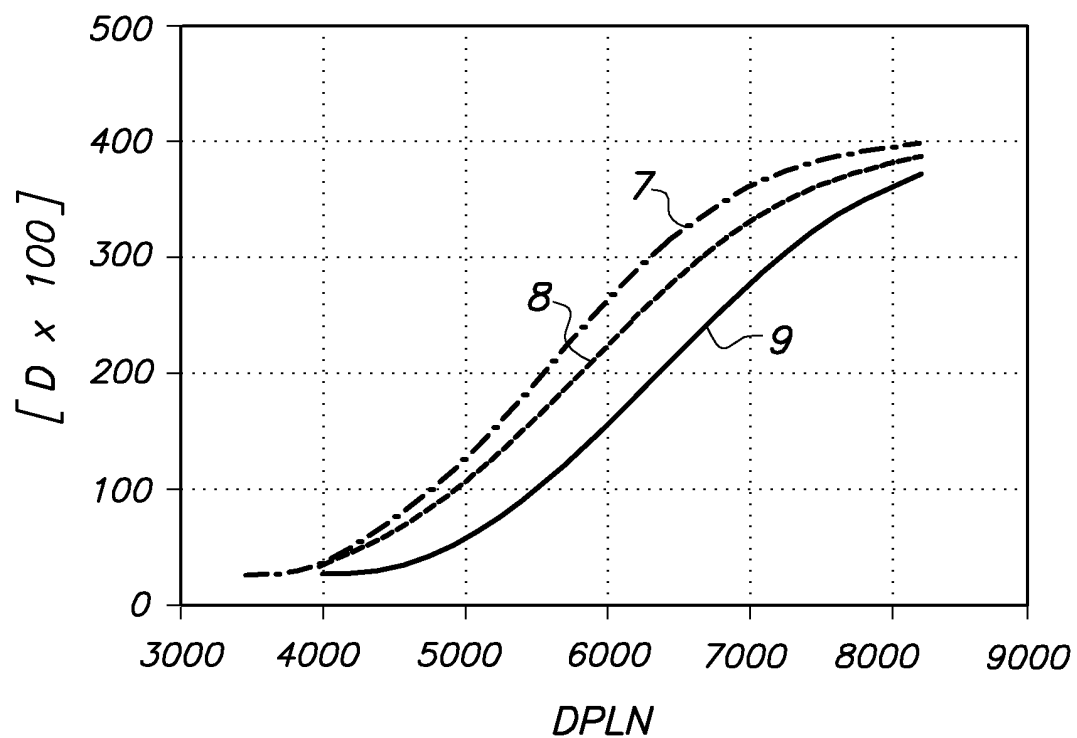


FIG. 5

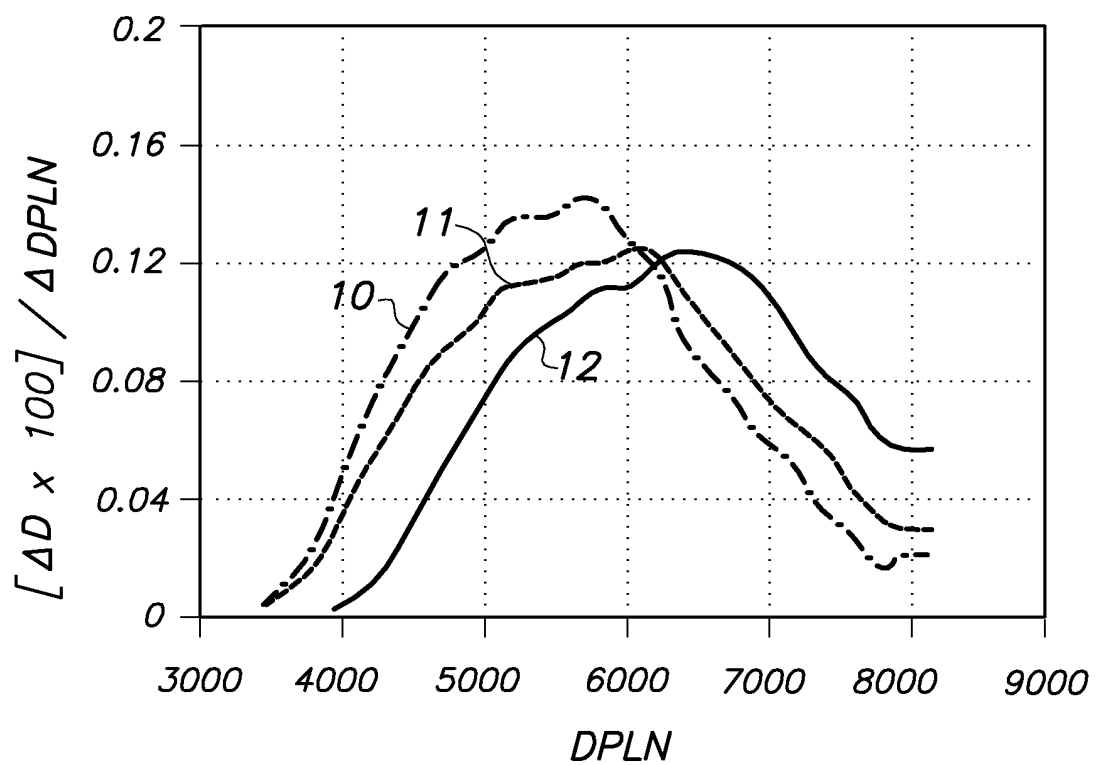


FIG. 6


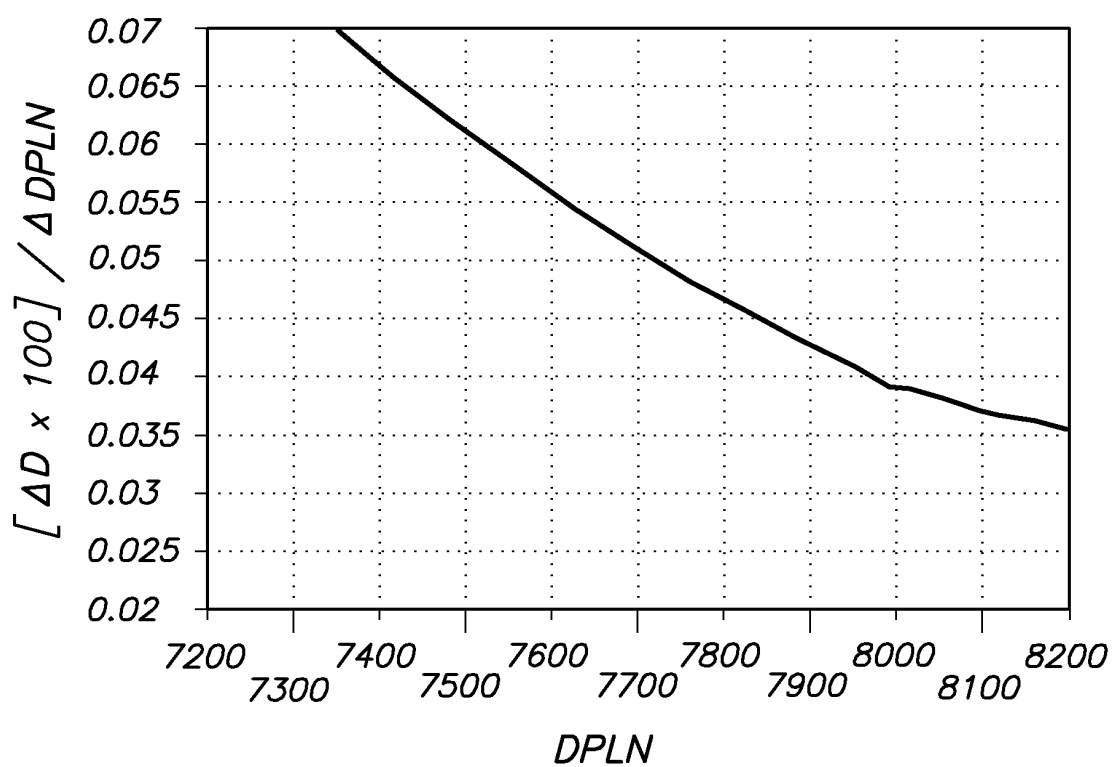


FIG. 7



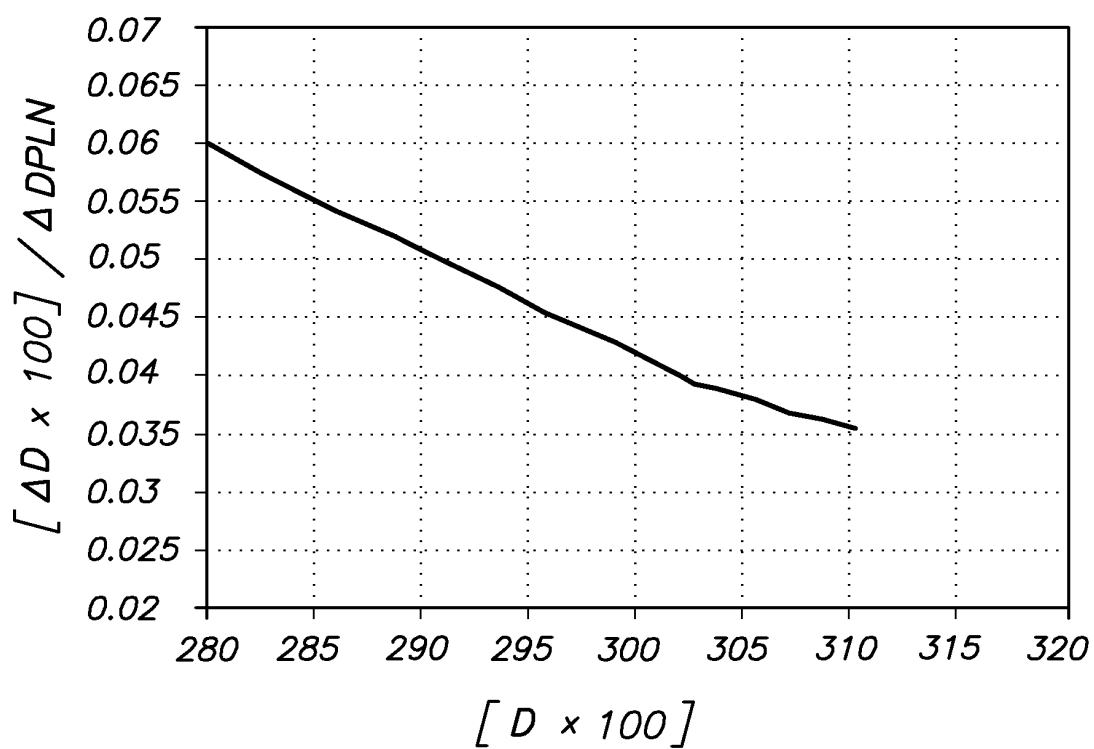

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 10 0796

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 922 585 A (FUJI PHOTO FILM CO LTD) 16 June 1999 (1999-06-16)	1,3-5	B41J2/36 B41J2/375
Y	* paragraph [0037] *	2	
A	* paragraph [0041] - paragraph [0057]; figure 9 *	6-9	

Y	US 4 939 581 A (SHALIT HANOCH) 3 July 1990 (1990-07-03)	2	
A	* column 5, line 29 - line 32 * * column 10, line 41 - line 51 *	1,3-5	

X,D	EP 0 453 714 A (MITSUBISHI ELECTRIC CORP) 30 October 1991 (1991-10-30)	1,3-5	
A	* the whole document *	2,6-9	

X	US 6 411 318 B1 (SAWANO MITSURU ET AL) 25 June 2002 (2002-06-25)	1,3-5	
A	* column 5, line 5 - column 7, line 13 *	2,6-9	

A,D	EP 1 247 654 A (AGFA GEVAERT) 9 October 2002 (2002-10-09)	1-9	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
	* the whole document *		

A	EP 1 006 404 A (AGFA GEVAERT) 7 June 2000 (2000-06-07)	1-9	B41J
	* paragraph [0060] - paragraph [0075]; tables *		

The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 25 June 2004	Examiner Urbaniec, T
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 10 0796

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-06-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0922585	A	16-06-1999	JP	11170589 A	29-06-1999
			EP	0922585 A2	16-06-1999
			US	6313857 B1	06-11-2001

US 4939581	A	03-07-1990	EP	0737000 A2	09-10-1996
			EP	0489758 A1	17-06-1992
			WO	9200650 A1	09-01-1992
			US	5115229 A	19-05-1992
			US	5345315 A	06-09-1994
			AT	188322 T	15-01-2000
			DE	69033408 D1	03-02-2000
			DE	69033408 T2	11-05-2000

EP 0453714	A	30-10-1991	JP	2110685 C	21-11-1996
			JP	3247469 A	05-11-1991
			JP	8032462 B	29-03-1996
			CA	2035372 A1	28-08-1991
			DE	69102008 D1	23-06-1994
			DE	69102008 T2	22-09-1994
			EP	0453714 A1	30-10-1991
			US	5214446 A	25-05-1993

US 6411318	B1	25-06-2002	JP	11055534 A	26-02-1999

EP 1247654	A	09-10-2002	EP	1247654 A1	09-10-2002
			JP	2002331699 A	19-11-2002
			US	2003085982 A1	08-05-2003

EP 1006404	A	07-06-2000	EP	1006404 A1	07-06-2000
			DE	69916406 D1	19-05-2004
			JP	2000246927 A	12-09-2000
			US	6375371 B1	23-04-2002
