

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number
WO 03/090910 A1

(51) International Patent Classification⁷: **B01D 63/02**,
63/08, 67/00

(21) International Application Number: PCT/SE03/00655

(22) International Filing Date: 23 April 2003 (23.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0201207-8 23 April 2002 (23.04.2002) SE

(71) Applicants (for all designated States except US): **GAMBRO LUNDIA AB** [SE/SE]; P.O. Box 10101, S-220 10 Lund (SE). **FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG e.V.** [DE/DE]; Fraunhofer - Patentstelle, Hansastrasse 27c, 80686 München (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MÜLLER, Michael**

[DE/DE]; Allgäustrasse 17d, 70599 Stuttgart (DE). **OEHR, Christian** [DE/DE]; Robert-Schumann-Strasse 15, 71083 Herrenberg (DE). **MALTHANER, Heinrich** [DE/DE]; Schmelbachstrasse 19, 70565 Stuttgart (DE). **GOEHL, Hermann** [DE/DE]; Rosengarten 2, 72406 Bisingen-Zimmern (DE). **DEPPISCH, Reinhold** [DE/DE]; Graf-Friedrich-Weg 21, 72379 Hechingen (DE). **STORR, Markus** [DE/DE]; Hinterhofstrasse 41/1, 70771 Leinfelden-echterdingen (DE).


(74) Agent: **AWAPATENT AB**; Box 5117, S-200 71 Malmö (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: A PROCESS FOR PRODUCTION OF A REGIOSELECTIVE MEMBRANE

Membrane adsorption device with regioselectively functionalized microporous hollow fibre membranes

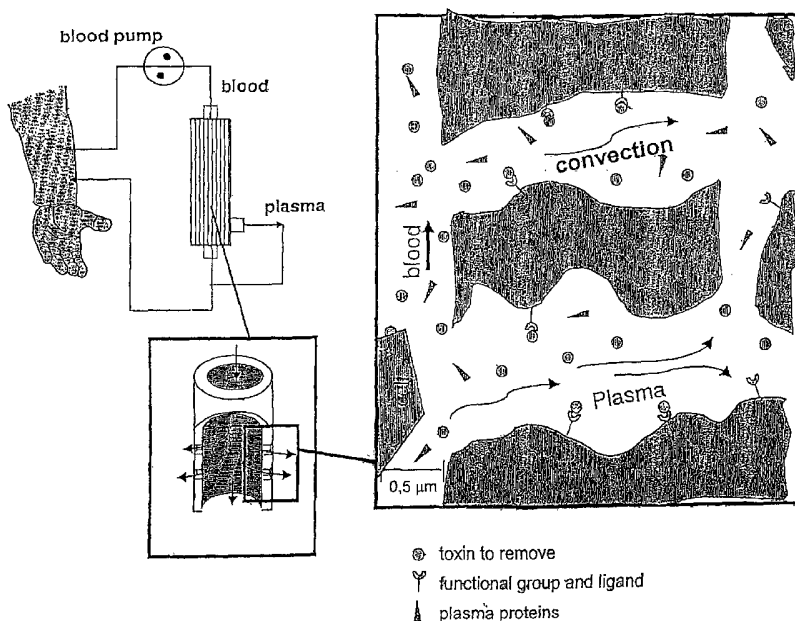

(57) Abstract: A process for production of a microporous affinity membrane having regioselective affinity for compounds in blood or other biologically active fluids to be removed during purification of blood or said fluids is disclosed, as well as a microporous affinity membrane produced by said process, an adsorption device containing such a microporous affinity membrane, and use of such a microporous affinity membrane.



(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A PROCESS FOR PRODUCTION OF A
REGIOSELECTIVE MEMBRANE

Technical field of the invention

5 The present invention relates to a process for production of a microporous affinity membrane having regio-selective affinity for compounds in blood or other biologically active fluids to be removed during purification of blood or said fluids, to a microporous affinity mem-
10 brane produced by said process, to an adsorption device containing such a microporous affinity membrane, and to use of such a microporous affinity membrane.

Background art

15 Microporous hollow fibre membranes and flat sheet membranes are examples of microporous affinity membranes having a blood side and a filtrate side. Such membranes are well known for analytical, diagnostic or therapeutic purposes. For example, such microporous hollow fibre membranes and flat sheet membranes are useful for
20 the treatment of blood or other biologically active fluids with a view to eliminating undesired compounds therefrom, i.e. in therapeutic apheresis. Microporous hollow fibre membranes are normally composed of a bundle of separate microporous hollow fibres. For detoxification
25 of whole blood, e.g. dialysis and plasmapheresis, the membrane bundle is normally potted at each end of a polycarbonate tube fitted with two ports in a shell. The blood is normally extracorporeally pumped through a lumen representing the blood side, of each fibre, and a part of
30 the blood plasma penetrates, i.e. is filtrated, through the pores of the fibre wall into an outer compartment representing the filtrate side, surrounding each fibre in the bundle. The concentrated blood containing blood cells, too large to enter the pores, and the remaining
35 non-filtered part of blood plasma passes through the lumen. In a venous blood line the filtrated blood plasma

stream is normally added to the non-filtered blood stream and returned to the patient.

With a view to eliminating undesired compounds from the blood, the surfaces and pores of the microporous affinity membranes, e.g. microporous hollow fibre membranes and flat sheet membranes, are provided with activated sites or ligands specific for binding to the undesired blood compounds to be eliminated. Such activated sites or ligands are normally based on or bound to functional groups, e.g. amino, carboxy, or sulfonic acid groups, on the microporous membrane surface. The undesired compounds to be eliminated from the blood are normally toxins of different kinds, e.g. bacterial derived toxins. Further examples of such undesired compounds are presented below.

The lumen surfaces on the blood side of microporous hollow fibre membranes, the surfaces on the blood side of flat sheet membranes, the surfaces of the pores and the surfaces on the filtrate side of such membranes are often provided with such activated sites or ligands, particularly for purification of blood or biologically active fluids.

In blood purification applications activated sites or ligands, e.g. positive amino groups as functional groups for heparin or endotoxin adsorption, on the surface on the blood side of such membranes may activate certain blood constituents, e.g. thrombocytes. In such a case, these blood constituents are activated and/or adhered to the ligands and are significantly reduced from the blood. Such an adhesion is undesired. Other blood constituents, e.g. leucocytes, red blood cells and proteins, may in some extent also be adhered to such ligands or activated sites on the blood side of the membrane.

This undesired activation of blood constituents in such membranes has since long been a great problem, in particular the accompanying undesired elimination of thrombocytes from the blood. Several attempts have been

made to solve this problem to prepare microporous hollow fibre membranes and flat sheet membranes lacking the above-mentioned ligands or activated sites on the blood side of the membrane, but so far only complicated processes requiring large amounts of reaction chemicals and solvents have been found. Moreover, these processes are also expensive, ineffective and not environmental friendly, thereby creating problems highly needed to solve.

WO 80/02805 describes, inter alia, a process for the treatment of and/or removal of undesired compounds from whole blood and a membrane therefor. A biologically activated material is immobilised, i.e. ligands are arranged in the pores, and/or on the surface of said membrane that faces away from said whole blood, i.e. faces the filtrate side of the membrane. Further, processes for immobilising different kinds of biologically active material, i.e. ligands, by treatment with chemicals are disclosed. Thus, an asymmetric immobilisation, i.e. creation of regioselective affinity, is disclosed with a view to avoiding contact between blood corpuscles and the immobilising reagent and, thus, pyrogen and/or anaphylactic reactions.

US-A-5,868,936, WO 97/48483, US-A-5,766,908, and EP-A2-0,341,413 disclose immobilising techniques for attaching ligands to the surface of the pores in hollow fibre membranes.

US-A-6,090,292 discloses an asymmetric dialysis hollow fibre coated with albumin essentially on the side facing away from the blood, i.e. facing the filtrate side.

Plasma treatment is known as an effective method for modification of surfaces. It is, inter alia, used to increase the wettability and thus the adsorption properties of surfaces.

EP-A1-0,683,197, US-A-6,022,902, US-A-5,591,140, and US-A-6,013,789 disclose treatment of a surface with plasma with a view to immobilising certain ligands.

US-A-5,597,456 discloses atmospheric pressure plasma treatment of surfaces of medical devices.

EP-A2-0,695,622 discloses plasma modification of flat porous articles using low pressure plasma treatment.

5 Summary of the Invention

 The object of the present invention is to solve the above problem with defective procedures for production of microporous affinity membranes having regioselective affinity for undesired compounds in blood or other bio-
10 logically active fluids with a view to avoiding undesired activation of constituents in blood or other biologically active fluids in microporous affinity membranes during the purification treatment of blood or said fluids.

 This object is achieved with a microporous affinity
15 membrane, produced by a process for production of a microporous affinity membrane having regioselective affinity for compounds in blood or other biologically active fluids to be removed during purification of blood or said fluids, wherein a microporous affinity membrane
20 substrate having a blood side and a filtrate side is subjected to one or more cycles of plasma ignition in the presence of a gas mixture comprising a functional group containing modifying gas, wherein functional groups are regioselectively bound to pore surfaces of the micro-
25 porous affinity membrane substrate. In a further process step ligands having affinity for said compounds in blood or said fluids may be bound to the functional groups.

 In one embodiment functional groups are also regio-
30 selectively bound to surfaces on the filtrate side of the microporous affinity membrane substrate.

 The present invention also relates to a microporous affinity membrane produced by said process, to an adsorption device containing such a microporous affinity membrane and to use of such a microporous affinity membrane.

35 Other objects, features, advantages and preferred embodiments of the present invention will become more apparent from the following detailed description when

taken in conjunction with the drawings and the appended claims.

Brief Description of the Drawings

Fig. 1 shows a system comprising a microporous membrane adsorption device with regioselectively functionalized microporous hollow fibre membranes produced according to a preferred embodiment of the present invention and having functional groups with ligands bound thereto. Further, in the right part of Fig. 1 such a membrane is shown in an enlarged cross-sectional view.

Fig. 2a shows outside plasma treatment of a membrane substrate at low pressure.

Fig. 2b shows outside plasma treatment of a membrane substrate at high pressure.

Fig. 2c shows inside plasma treatment of a membrane substrate at low pressure.

Fig. 2d shows inside plasma treatment of a membrane substrate at high pressure.

Fig. 3 shows plasma treatment of a microporous flat sheet membrane substrate according to another embodiment of the present invention.

Detailed Description of Preferred Embodiments

In a preferred embodiment the present invention relates to a process for production of a microporous hollow fibre membrane having regioselective affinity.

In another preferred embodiment the present invention relates to a process for the preparation of a microporous flat sheet membrane having regioselective affinity.

Throughout the application text and the claims the following abbreviations are used.

PES = polyethersulfone

PVP = polyvinylpyrrolidone

PP = polypropylene

DACH = diaminocyclohexane

DETA = diethylenetriamine

ESCA = electrospectroscopy for chemical analysis

PFBA = pentafluorobenzaldehyde
sccm = standard cubic centimeter

The term "functional group containing modifying gas" or "modifying gas" used throughout the application text means the gaseous form of the molecule leading to surface modification during gas plasma treatment. In the gas plasma these molecules comprising the functional groups are converted to activated species, i.e. radicals or ions. During the gas plasma treatment there is a surface retention of functional groups resulting in a functional membrane surface, i.e. a membrane with regioselective affinity, having the ability to covalently bind different ligands.

The term "blood" used throughout the application text is intended to cover whole blood and different modifications thereof in which one or more of the constituents thereof have been separated off.

The term "other biologically active fluids" used throughout the application text means pharmaceutically useful solutions or pharmaceutical preparations which contain a biologically active component, such as a coagulation factor.

The term "blood side" used throughout the application text means the membrane side on which blood or another biologically active fluid is brought to flow during purification by use of a microporous affinity membrane, i.e. either the outer (shell) side or the inner (lumen) side of a microporous hollow fibre membrane, and any of the both sides of a microporous flat sheet membrane.

The term "filtrate side" used throughout the application text means the membrane side on which the filtered part of blood or another biologically active fluid reaches after having passed through the pores of a microporous affinity membrane, i.e. either the outer (shell) side or the inner (lumen) side of a microporous hollow

fibre membrane, and any of the both sides of a micro-porous flat sheet membrane.

The term "compound in blood..." used throughout the application text means an undesired compound intended to be removed from the blood.

The terms "blood constituent" and "constituents in blood" used throughout the application means components normally existing in blood, e.g. different blood cells and proteins.

The term "gas mixture" used throughout the application text means the mixture between modifying gas and carrier gas, but is also used, for simplicity reasons, for the embodiment when the carrier gas is absent.

The term "gas plasma mixture" used throughout the application means the medium resulting from the plasma ignition of the gas mixture and containing the activated species providing the binding of functional groups to the surfaces in question.

The terms "microporous affinity membrane substrate" and "membrane substrate" used throughout the application text means an untreated, not functionalised microporous affinity membrane, i.e. lacking regioselective affinity and intended as a start material in the process according to the present invention.

The term "microporous hollow fibre membrane" used throughout the application text is intended to cover everything from one microporous single hollow fibre up to several single hollow fibres and one or more bundles of such microporous hollow fibres, each fibre having a filtrate side and a blood side.

The term "microporous flat sheet membrane" used throughout the application text means a micropore containing flat membrane having a filtrate side and a blood side.

In one preferred embodiment of the present invention microporous hollow fibre membranes are regioselectively modified or functionalised only on the outer surface,

i.e. the filtrate side, and on the surfaces within the pores in an improved way compared to known techniques. The membrane lumen surface, i.e. on the blood side, which comes into contact with whole blood when the membranes are used for blood treatment in therapeutic apheresis, is to remain unmodified. This is achieved by avoiding affinity on the blood side, thereby inhibiting the interaction between certain blood constituents and the ligands bound to functional groups introduced regioselectively during the membrane modification process. This is an important requirement for selective removal of compounds from whole blood or other biologically active fluids within a membrane adsorption device.

Referring to Fig 1 the right part thereof shows a preferred embodiment of a regioselective microporous hollow fibre membrane for treatment of blood in an enlarged cross-sectional view. The flow of blood is marked with an arrow on the blood side. The membrane wall pores connects the blood side with the filtrate side. The flow of blood plasma containing the compounds to remove from blood is marked with arrows in the pores. On the surfaces of the pores and on the outer surface on the filtrate side functional groups, to which ligands are attached, have been bound. To some of said ligands compounds to be eliminated have been bound. As appears, no functional groups are attached to the lumen surface on the blood side.

A major advantage of the present invention compared to prior art, e.g. WO 80/02805, is that the need for reaction chemicals and solvents is highly reduced and that the total costs, e.g. the cost for disposal of chemicals, is lowered. Moreover, the present invention provides a more environmental friendly process compared to prior art processes for the production of such regioselective membranes. The present invention does not require any organic solvent or chemicals that needs to be eliminated after the treatment, i.e. the gas mixture used reacts

totally and no side products are left to be taken care of afterwards.

Further advantages of the present invention include that the microporous affinity membranes having regio-
5 selective affinity are much easier to manufacture compared to the conventional wet-chemical approaches. This is due to the gas plasma treatment process. Moreover, the present invention provides high versatility in that a variety of different functional groups can be arranged to
10 immobilise compounds to be eliminated. This is possible due to independence of the chemicals used in prior art processes. By means of the gas plasma treatment it is possible to introduce reactivity in almost all molecules as long as the molecules can ignite to plasma, why a wide
15 variety of functional groups may be chosen. Further, high efficiency due to improved mass transport properties is obtained, i.e. convective transport of blood compounds to eliminate, e.g. toxins, to the binding sites, i.e. ligands, compared to the corresponding diffusion transport in affinity columns.
20

In another preferred embodiment of the present invention a microporous flat sheet membrane having regio-selective affinity is produced with a process corresponding to the process for preparing microporous hollow
25 fibre membranes having corresponding properties. This process is described in detail below, e.g. in Example 3.

The functional groups to be introduced on the membrane substrate surfaces of interest are preferably amino groups originating from such molecules as amino compounds
30 (diamines, triamines), e.g. diaminocyclohexane (DACH) and diethylenetriamine (DETA), preferably diaminocyclohexane, but also from all organic precursors with primary amino groups or mixtures of hydrogen with nitrogen or ammonia, provided their vapour pressure is high enough to give a
35 substantial amount of the molecule containing the functional groups in the vapour phase. Further, other functional groups than amino groups can be introduced, e.g.

carboxyl, hydroxyl, sulfonic acid, ester or epoxy groups, when precursors comprising corresponding functions are used instead of compounds containing amino functions.

The microporous affinity membranes produced according to the present invention are made of a biocompatible polymeric material, e.g. polyethersulfone (PES), polyvinylpyrrolidone (PVP), polypropylene (PP), polysulfone (PSU), polymethylmethacrylate (PMMA), polycarbonate (PC), polyacrylonitrile (PAN), polyamide (PA), polytetrafluoroethylene (PTFE), cellulose acetate (CA), cellulose nitrate or regenerated cellulose.

The inner diameter of the hollow fibres is normally 200-1000 μm , the wall thickness is normally 20-200 μm and the pore diameter 0.1-2.0 μm . The fibres are normally arranged in modules e.g. containing a bundle of 10 to more than 1000 fibres, but single hollow fibres are also possible to treat. Experimental modules contain 10-100 fibres. Final modules for blood treatment contain more than 1000 fibres. Modules with more fibres may also be modified according to this procedure.

According to the present invention the hollow fibres used for the microporous hollow fibre membrane are preferably made of a blend of polyethersulfone and polyvinylpyrrolidone with an inner diameter of 330 μm , a wall thickness of 110 μm and a pore diameter of 0.4 μm .

The flat sheet membrane is preferably made of a mixture of polyethersulfone and polyvinylpyrrolidone with a wall thickness of 20-200 μm , preferably 110 μm , and a pore diameter of 0.1-0.8 μm , preferably 0.4 μm .

As stated above, the regioselective introduction of amino groups, i.e. the preferred functional groups, only on the pore surfaces, in practice gradually less towards the blood side, and on the filtrate side, but not at all on the blood side of the microporous affinity membrane substrate, is achieved by gas plasma treatment of the membrane substrate, preferably using DACH or DETA, most preferably DACH, as the functional group containing modi-

5 fying gas, and a stabilising carrier gas, which is chemi-
cally inert during the gas plasma reaction. Preferably
helium is used as carrier gas due to the wide pressure
range used for ignition of gas plasma. The use of low gas
plasma power is beneficial with respect to the preser-
10 vation of the functional groups. As alternative carrier
gases nitrogen, hydrogen and argon or corresponding mix-
tures may be used. A further possibility is to work with-
out any carrier gas. During the gas plasma treatment this
15 mixture of modifying gas and carrier gas includes the
activated species described above and provides the regio-
selective introduction of the amino groups on the sur-
faces of interest, however, not on the blood side of the
microporous affinity membrane substrate, due to deactiva-
15 tion of activated species on the way from the plasma glow
discharge zone to the blood side. The proportion between
the functional group containing modifying gas and the
carrier gas is normally 1:10 - 1:1, preferably 1:4.

20 The most important parameters are the direction of
the gas plasma mixture flow in relation to the membrane
substrate to be treated, the mean free path length of the
activated species and the flow rate of the gas plasma
mixture.

25 The ligands to be bound to the functional groups
introduced on the surface of the membrane substrate filt-
rate side and on pore surfaces are chosen dependent on
the type of compounds to be removed from the blood or any
other biologically active fluid. Examples of ligands are
proteins, peptides, amino acids, carboxylic acids, oligo-
30 nucleotides and mixtures of two or more thereof or any
other convenient biomolecules. The ligands are added to
the functional groups in a separate wet-chemical process,
known per se.

35 Some basic principles behind the plasma ignition
(plasma glow discharge) processes used in connection with
the present invention will now be discussed.

Plasma can be ignited when the dimension of the gas containment is much higher than the mean free path length at a given gas pressure. The mean free path length is inversely proportional to the gas pressure. In the low
5 pressure case the mean free path length is dependent on the gas type or composition, ranging from 60 μm to about 400 μm .

With the pore diameter and the membrane wall thickness of the membrane structure to be treated according to
10 the present invention, plasma ignition will normally take place only on the outer side of the membrane or, in certain circumstances, e.g. in the presence of helium, on the lumen side, when the contact between the excited gas molecules and the wall is minimised due to an axial laminar
15 helium gas flow and application of a wobbling frequency with high harmonic overtone additives. When there is no pressure gradient between the outer side of the membrane and the lumen side, the activated particles can enter the pore structure only by diffusion from the
20 plasma zone (may be outside in most cases, or from the lumen side in special cases). The diffusing activated particles will collide with gas molecules and with the walls of the pores on their way from the plasma zone into the pore structure and dissipate their energy. The amount
25 of gas molecule or wall contacts which is necessary for losing the activating energy could previously only be determined empirically. In consequence, there will be a decreasing chemical modification density of the pore walls from the plasma zone area into the membrane structure.
30 The chemical plasma modification density distribution can be influenced by the pore geometry, the plasma intensity, the pressure, the gas composition, the pressure difference over the membrane structure, and the power spectrum of electric frequency input.

35 The regioselective introduction of the functional groups can be achieved in four different ways for microporous hollow fibre membrane substrates, comprising four

different embodiments of the process according to the present invention, as appears from Figs 2a-2d, i.e.

2a) outside low pressure treatment (diffusion control)

2b) outside high pressure treatment (laminar or convective control)

2c) inside low pressure treatment (laminar or convective control)

2d) inside high pressure treatment (diffusion control)

The processes shown in Figs 2a and 2b represent a first main mode and provide a regioselective functionalisation of the outer surface and the pore surface; the processes shown in Figs 2c and 2d represent a second main mode and provide a regioselective functionalisation of the inner surface and the pore surface. Thus, these four different embodiments (or two main modes) are intended for different uses, i.e. depending on if the lumen surface is intended to be on the blood side or the filtrate side of the microporous hollow fibre membrane.

As appears from Fig. 2a, showing one embodiment of outside low pressure treatment, diffusion controlled outside plasma treatment under low pressure (0.1-10 mbar), preferably about 1.6 mbar (0.3 mbar modifying gas)) is performed by adding the gas mixture to the outside of the microporous hollow fibre membrane substrate. A fibre module of a hollow fibre membrane substrate is placed between two electrodes, preferably ring electrodes, around a polycarbonate housing. Openings in the housing allow a gas flow along the outer surface of the membrane substrate. After appropriate evacuation the gas mixture is introduced and ignition is performed creating a gas plasma mixture. The gas plasma mixture penetrates the membrane substrate structure by diffusion, i.e. the driving force from mass transfer equals the concentration gradient. The process preferably involves one to ten cycles of plasma ignition at 13.56 MHz during 1 to 10 sec under the gas mixture atmosphere, followed by a plasma-off period of 2-3 minutes. During the flow of the gas

plasma mixture functional groups, e.g. amino groups, are attached to the outer surfaces and the pore surfaces of the hollow fibre membrane substrate. Finally, the fibre modules are evacuated for 1-60 min, normally about 15 min, to remove non-adsorbed modifying gas present in the gas mixture. The inlet and outlet openings for the gas mixture are preferably located at the opposite ends of the housing. This embodiment gives highly satisfactory results as to regioselective affinity for a hollow fibre membrane for whole blood treatment and is therefore the most preferred embodiment of the present invention.

As appears from Fig. 2b outside plasma treatment under high pressure (50 mbar - 1.1 bar) is performed in the same way as for the low pressure treatment except for the fact that the gas plasma mixture penetrates the membrane substrate structure by convection or laminar flow.

As appears from Fig. 2c convection or laminar flow controlled inside plasma treatment under low pressure (0.01-50 mbar) is performed by adding the gas mixture into both ends of the fibre bundle, wherein the gas mixture penetrates the pores from the lumen side to the outer side of the hollow fibres, i.e. to the polycarbonate housing space, and then exits the housing space through the gas mixture exits arranged perpendicular or substantially perpendicular to the fibre bundle direction. Further, the electrodes are preferably arranged in such a way that the gas mixture exits are arranged between the electrodes.

As appears from Fig. 2d diffusion controlled inside plasma treatment under high pressure (50 mbar - 1.1 bar) is performed by adding gas mixture at one end of the fibre bundle, wherein the gas mixture exits shown in Fig. 2c are closed and the concentric polycarbonate housing or casing surrounding the fibre bundle is filled with a blocking fluid, e.g. polyethylene glycole, thereby allowing the gas mixture to more or less fill the pores but preventing it from passing out from the pores to the

outer surface. Instead, the gas mixture exits the fibre bundle at the opposite end.

In the process for preparation of a microporous hollow fibre membrane according to the present invention, the ignition frequency during the plasma ignition is 1 kHz - 13.56 MHz or multiples of 13.56 MHz or microwave frequency, the power is 0.5-20 W, the voltage of the electrodes is 50-500 volts, the pressure is 0.01-10 mbar, the flow rate is 0.1-200 sccm/min, and the gas plasma mixture flow period is up to 20 min.

The plasma treatment experiments and the analyses described below were carried out, if not otherwise stated, for a microporous hollow fibre membrane having regio-selective affinity produced according to the most preferred embodiment according to the present invention, i.e. wherein DACH/helium as gas mixture was added to the membrane substrate during the plasma treatment.

For microporous flat sheet membranes the regio-selective introduction of the functional groups is achieved as follows.

Fig. 3 shows the preparation of a microporous flat sheet membrane having regioselective affinity for undesired compounds in blood or other biologically active fluids by use of plasma ignition. The flat sheet membrane substrate is enclosed in a housing or casing, having a first and a second compartment separated from each other by the flat sheet membrane substrate. During the plasma ignition treatment the gas mixture is initially introduced in the first compartment, also comprising a plasma chamber with two electrodes connected to a power supply. After the plasma ignition of the gas mixture the gas plasma mixture obtained flows against and passes the flat sheet membrane substrate perpendicularly arranged in relation to the gas plasma mixture flow. The flat sheet membrane substrate surface facing the first compartment, i.e. on the intended filtrate side of said membrane substrate, and the pore surfaces are regioselectively pro-

vided with functional groups. No functional groups are bound to the flat sheet membrane substrate surface facing the second compartment, i.e. on the intended blood side of the membrane. Excess gas continues to flow through the second compartment and is then evacuated therefrom. A vacuum pump connected to the second compartment provides the flow through the whole arrangement. Appropriate ligands are then bound to the functional groups in a conventional way.

10 In the process for preparation of a microporous flat membrane according to the present invention, the ignition frequency during the plasma ignition is 1 kHz - 13.56 MHz or multiples of 13.56 MHz or microwave, the power is 1-20 W, preferably about 5 W, the voltage of the electrodes is 15 50-300 volts, the pressure is 0.1-5 mbar, preferably about 0.3 mbar, the flow rate is 1-100 sccm/min, preferably 10 sccm/min, and the gas plasma mixture flow period is up to 30 min, preferably about 5 min. The parameters during this plasma ignition treatment are further 20 described in Example 3.

It is to be understood that the housings or casings, inlets, outlets, electrodes etc in the devices shown in Figs 2a-2d and 3 may be altered as to size, mutual arrangement, type and geometry, still giving the beneficial effects desired for the present invention.

25 An electron spectroscopy for chemical analysis (ESCA) was performed with a view to quantitatively evaluating the amino group distribution resulting from the plasma treatment.

30 First a sample of a microporous affinity membrane with regioselective affinity is illuminated with Al k-alpha rays (1486.6 eV), and the energy of emitted electrons is measured. Fluorine is used only as a marker for the functionality arranged at the membrane surfaces, 35 which itself does not contain any fluorine. Instead, the membrane surface functionalities are derivatised with a fluorine containing compound, e.g.

pentafluorobenzaldehyde, with a view to quantifying the functional groups bound to the membrane surfaces.

The derivatisation procedure is preferred as follows: 300 µl stock solution of 0.1 M PFBA in pentane is added to 15 ml pentane. After addition of the test material the solution is brought to react during 2 hours at 39°C in a water bath and under reflux. This is followed by washing during the night in pentane in a Soxhlet device at 43°C (one cycle: 20 min).

In the table below the distribution of atoms in the functional groups on the outer (shell) and inner (lumen) surface of microporous hollow fibre membranes is shown. It appears that, due to the preferred embodiment of the process according to the present invention, the presence of primary amino groups on the inner surface is zero (no fluorine-signal!). The 1.4 atom% nitrogen is due to the PVP content of the membrane.

Table: Atom distribution (ESCA) of plasma-modified PES/PVP membranes after derivatisation with pentafluorobenzaldehyde

Surface	Distribution of elements [%]				
	C	O	S	N	F
Shell	73.0	10.2	0.7	8.3	7.8
Lumen	74.5	21.7	2.4	1.4	-

Further, an ESCA analysis was performed with a PP membrane treated with different plasma treatment modes. The table below shows the atom distribution of plasma treated (DACH) PP membrane substrates on inner (lumen) and outer (shell) surfaces of hollow fibre membranes.

Atom distribution (ESCA) of plasma treated (DACH) PP membranes

N may here be used as marker as PP does not contain N.

Treatment mode	Surface	Distribution of elements [%]		
		C	O	N
Gas stream outside, parallel to fibres (diffusion controlled)	shell	90.0	6.9	3.1
	lumen	94.8	5.2	-
Gas stream through the membrane wall of hollow fibre (convection controlled)	shell	84.7	7.2	8.1
	lumen	94.2	4.5	1.3

This indicates an approximate 5-fold surplus of amino groups on the outer surface relative to the inner surface for a convection controlled process and the absence of amino groups on the inner surface for a diffusion controlled process.

Moreover, the table below shows the concentration of introduced active amino groups depending on the treatment mode used to introduce them for a PES/PVP hollow fibre membrane.

Treatment mode	NH ₂ concentration [mmol/g]
Outside plasma, low pressure (Fig. 2a)	0.08-0.09
Outside plasma, high pressure (Fig. 2b)	0.03
Inside plasma, low pressure (Fig. 2c)	0.02
Inside plasma, high pressure+blocking fluid (Fig. 2d)	0.06

The highest concentrations are achieved with the outside plasma/low pressure mode treatment (see Fig 2A). These concentrations come close the ones required for the monomolecular immobilisation of peptides of several 1000 Da.

Thus, regioselective modification of membrane substrates with a higher selectivity for the outer surface can be achieved. This makes the membranes interesting for arranging ligands selectively on their surfaces. As

stated above the regioselectively arranged ligands enable a selective removal of toxins or other target compounds by adsorption during therapeutic purification of blood or other biologically active fluids, while the interaction of constituents in blood or such fluids with the ligands or adsorbed toxins is avoided.

Examples of compounds of interest to remove from blood or other biologically active fluids are e.g. endotoxins and inflammatory mediators in septic patients, pathogenic antibodies in several immune diseases, low-density lipoproteins in patients with coronary heart disease and drug resistant hypercholesterolemia, and fibrinogen used for the treatment of microcirculatory disorders.

The present invention also relates to use of the microporous affinity membrane produced according to the present invention and having regioselective affinity in therapeutic apheresis, for diagnostic applications when enrichment of trace materials is necessary (e.g. pesticides in food or water, metabolites and drugs in plasma, urine, and saliva), and for drug development applications. Common for these different applications is that blood constituents are not activated during the use of the microporous affinity membrane.

In the following examples of the process according to the present invention, functionalisation, i.e. providing regioselective affinity, with amino groups for a single hollow fibre, a fibre bundle modification and a flat sheet membrane substrate, respectively, is shown for PES-PVP microfiltration membranes.

Example 1: Single hollow fibre modification

The plasma treatment mode shown in Fig 2a) was used. The fibre length was 15 cm and the tube diameter 1.2 cm. The system was evacuated at a pressure below 0.01 mbar during 15 min. DACH was added at a flow rate of 0.5 sccm/min; applicable range: 0.1-200 sccm/min) at a pressure of 0.3 mbar (applicable range: 0.1-10 mbar). The

plasma ignition was performed at 13.56 MHz (1kHz to 13.56 MHz) and multiples of 13.56 MHz and microwave at 15 W (applicable range: 0.5-200 W) during 1 sec (applicable range: 0.1 sec - 10 min). After the plasma treatment step the system was flushed with H₂ at 10 mbar during 5 min, followed by venting with N₂ to minimize oxidation of the membrane.

Example 2: Fibre bundle modification (50 hollow fibres)

The steps in Example 1 were repeated with the exceptions that 2 sccm/min (applicable range: 1-100 sccm/min) helium was added as carrier gas together with the DACH, that the total pressure was 1.2 mbar (applicable range: 0.1-10 mbar), that the effect at the plasma ignition step was 2 W (applicable range: 1-20 W) and that the plasma time was 15 min (applicable range: 10 sec - 30 min). This parameter set results in proper amino functionalisation of outer surfaces and inner pore surfaces of all 50 hollow fibres.

Example 3: Modification of a microporous flat sheet membrane substrate

The plasma treatment mode according to Fig. 3 was used. The system was evacuated at a pressure below 0.01 mbar. H₂ was added at a flow rate of 10 sccm/min together with DACH at a total pressure of 0.3 mbar. The plasma ignition was performed at 13.56 MHz and an effect of 5 W and the plasma time was 5 min.

The result obtained is a flat sheet membrane regio-selectively functionalised with amino groups on the surface on the filtrate side and on the pore surfaces, but not on the surface on the blood side.

CLAIMS

1. A process for production of a microporous affinity membrane having regioselective affinity for compounds in blood or other biologically active fluids to be removed during purification of blood or said fluids, wherein a microporous affinity membrane substrate having a blood side and a filtrate side is subjected to one or more cycles of plasma ignition in the presence of a gas mixture comprising a functional group containing modifying gas, wherein functional groups are regioselectively bound to pore surfaces of the microporous affinity membrane substrate.

2. The process according to claim 1, wherein a microporous hollow fibre membrane substrate is subjected to the plasma ignition.

3. The process according to claim 1, wherein a microporous flat sheet membrane substrate is subjected to the plasma ignition.

4. The process according to any one of the preceding claims, wherein ligands having affinity for the compounds in blood or other biologically active fluids are bound to the functional groups.

5. The process according to any one of the preceding claims, wherein the functional groups also are regioselectively bound to surfaces on the filtrate side of the microporous affinity membrane substrate.

6. The process according claim 4, wherein the ligands are proteins, peptides, amino acids, carboxylic acids, nucleotides, oligonucleotides, antigens or antibodies, and mixtures of two or more thereof.

7. The process according to any one of the preceding claims, wherein the functional group containing modifying gas comprises an amino, aldehyde, ester, epoxy, hydroxi or sulfonic acid group, preferably an amino group.

8. The process according to claim 7, wherein the functional group containing modifying gas is diamino-cyclohexane (DACH) or diethylenetriamine (DETA), preferably diaminocyclohexane.

5 9. The process according to any one of the preceding claims, wherein the gas mixture also contains a carrier gas.

10 10. The process according to claim 9, wherein the carrier gas is any gas which is chemically inert during the process, preferably helium, nitrogen, hydrogen, argon or mixtures thereof, most preferably helium.

11. The process according to any one of the preceding claims, wherein the flow rate of gas plasma mixture obtained by the plasma ignition is 0.1-200 sccm/min.

15 12. The process according to any one of the preceding claims, wherein the proportion between the functional group containing modifying gas and the carrier gas is 1:100 to 1:1, preferably 1:4.

20 13. The process according to any one of the preceding claims, wherein up to 10 cycles of plasma ignitions are performed.

25 14. The process according to any one of claims 2 and 4-13, wherein the microporous hollow fibre membrane substrate is enclosed in a housing or a casing throughout the process, preferably a concentric housing or casing.

15. The process according to claim 2 or 14, wherein the gas plasma mixture obtained by the plasma ignition is flowing axially along the outer or inner surface of the microporous hollow fibre membrane substrate.

30 16. The process according to claim 2, 14 or 15, wherein the microporous hollow fibre membrane substrate is made up of a mixture of polyethylenesulfide and polyvinylpyrrolidone having an inner diameter of 200-1000 μm , preferably about 330 μm , a wall thickness of 20-200 μm ,
35 preferably about 110 μm , a pore diameter of 0.1-0.8 μm , preferably about 0.4 μm , and is assembled in modules each

having 1 hollow fibre or bundles or modules of up to more than 1000 fibres.

17. The process according to claim 2 or any one of claims 14-16, wherein the ignition frequency during the
5 plasma ignition is 1 kHz - 13.56 MHz or multiples of 13.56 MHz or microwave frequency, the power is 0.5-20 W, the voltage of the electrodes is 50-500 volts, the pressure is 0.01-10 mbar, the flow rate is 0.1-200 sccm/min, and the gas plasma mixture flow period is up to 20 min.

10 18. The process according to claim 2 or any one of claims 14-17, wherein the gas mixture is added to the housing or casing space surrounding the outer surface of the microporous hollow fibre membrane substrate in a diffusion controlled way at a pressure of 0.01-50 mbar.

15 19. The process according claim 2 or any one of claims 14-17, wherein the gas mixture is added to the housing or casing space surrounding the outer surface of the microporous hollow fibre membrane substrate in a laminar flow or convection controlled way at a pressure
20 of 50 mbar-1.1 bar.

20. The process according to claim 2 or any one of claims 14-17, wherein the gas mixture is added to the lumen of the microporous hollow fibre membrane substrate in a laminar or convection controlled way at a pressure
25 of 0.01-50 mbar.

21. The process according to claim 2 or any one of claims 14-17, wherein the gas mixture is added to the lumen of the microporous hollow fibre membrane substrate in a diffusion controlled way at a pressure of 50 mbar-
30 1.1 bar, and wherein the housing space surrounding the outer surface of the microporous hollow fibre membrane substrate is filled with a blocking fluid, preferably polyethylene glycol.

22. The process according to any one of claims 3-13,
35 wherein the microporous flat sheet membrane substrate throughout the process is enclosed in a housing or casing having a first and a second compartment separated from

each other by said membrane substrate, wherein the surface on the filtrate side of said membrane substrate is facing the first compartment and the surface of the blood side is facing the second compartment, and wherein the gas mixture is added to said first compartment and the functional groups during the plasma ignition in the presence of the gas mixture are bound to pore surfaces and the surface on the filtrate side of the microporous flat sheet membrane substrate.

23. The process according to claim 22, wherein the flow rate of the gas plasma mixture obtained by the plasma ignition is 1-100 sccm/min, preferably about 10 sccm/min.

24. The process according to claim 3, 22 or 23, wherein the microporous flat sheet membrane substrate is made up of a mixture of polyethersulfone and polyvinylpyrrolidone having a wall thickness of 20-200 μm , preferably about 110 μm , and a pore diameter of 0.1-0.8 μm , preferably about 0.4 μm .

25. The process according to claim 3 or any one of claims 22-24, wherein the ignition frequency during the plasma ignition is 1 kHz - 13.56 MHz or multiples of 13.56 MHz or microwave, the power is 1-20 W, preferably about 5 W, the voltage of the electrodes is 50-300 volts, the pressure is 0.1-5 mbar, preferably about 0.3 mbar, the flow rate is 1-100 sccm/min, preferably 10 sccm/min, and the gas plasma mixture flow period is up to 30 min, preferably about 5 min.

26. The process according to any one of the preceding claims, wherein excessive gas is evacuated from the housing or casing spaces after the plasma ignition.

27. A microporous affinity membrane produced according to any one of the preceding claims and having regioselective affinity for compounds in blood or other biologically active fluids to be removed during purification of blood or said fluids, wherein said membrane is provided

ed with functional groups, bound only to the pore surfaces.

28. The microporous affinity membrane according to claim 27, wherein the functional groups are amino groups.

5 29. The microporous affinity membrane according to claim 27, wherein the functional groups also are bound to the surfaces on the filtrate side.

30. The microporous affinity membrane according to any one of claims 27-29, wherein ligands having specificity for the components in blood or other biologically
10 active fluids to be removed are bound to the functional groups.

31. The microporous affinity membrane according to any one of claims 27-30, wherein it is a microporous
15 hollow fibre membrane or a microporous flat sheet membrane.

32. A microporous affinity membrane according to claim 30, wherein the ligands are proteins, peptides, amino acids, carboxylic acids, nucleotides, oligonucleo-
20 tides, antigens, or antibodies, and mixtures of two or more thereof.

33. An adsorption device containing the microporous affinity membrane according to any one of claims 27-32.

34. Use of a microporous affinity membrane according
25 to any one of claims 27-32 for therapeutic apheresis.

35. Use of a microporous affinity membrane according to claims 27-32 for diagnostic applications.

36. Use of a microporous affinity membrane according to claims 27-32 for drug development applications.

30 37. Use according to any one of claims 34-36, wherein blood constituents are not activated during said use.

Fig 1

Membrane adsorption device with regioselectively functionalized microporous hollow fibre membranes

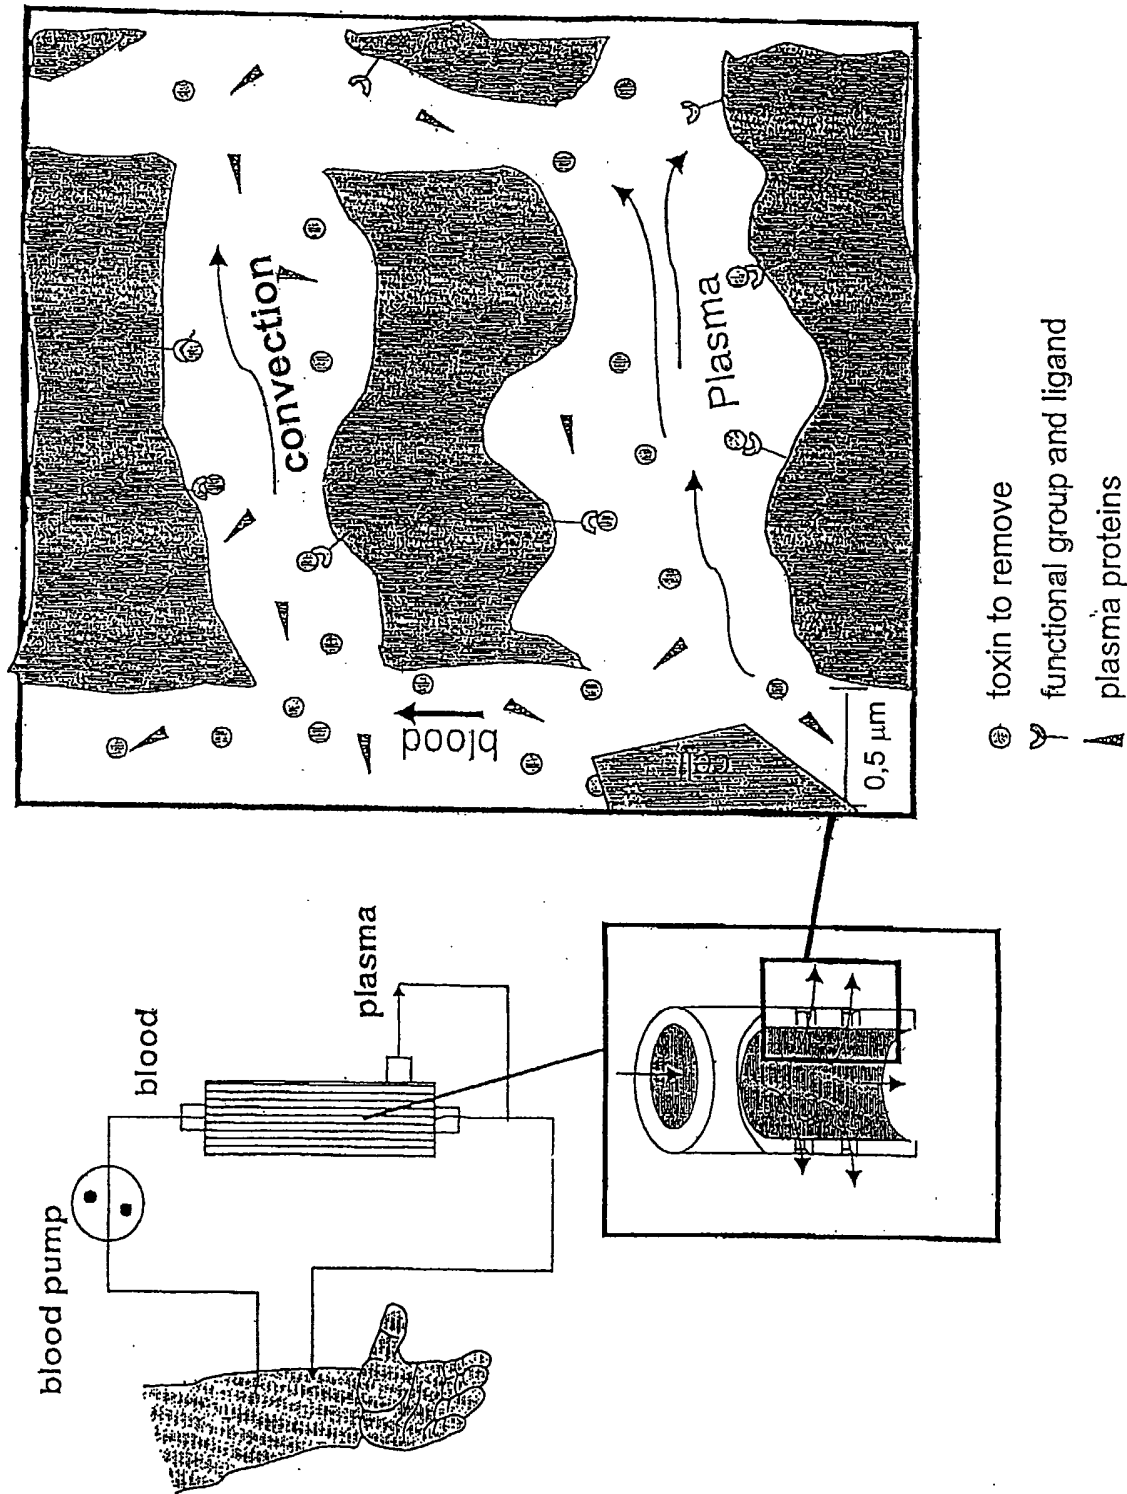


Fig 2
Plasma Treatment Modes


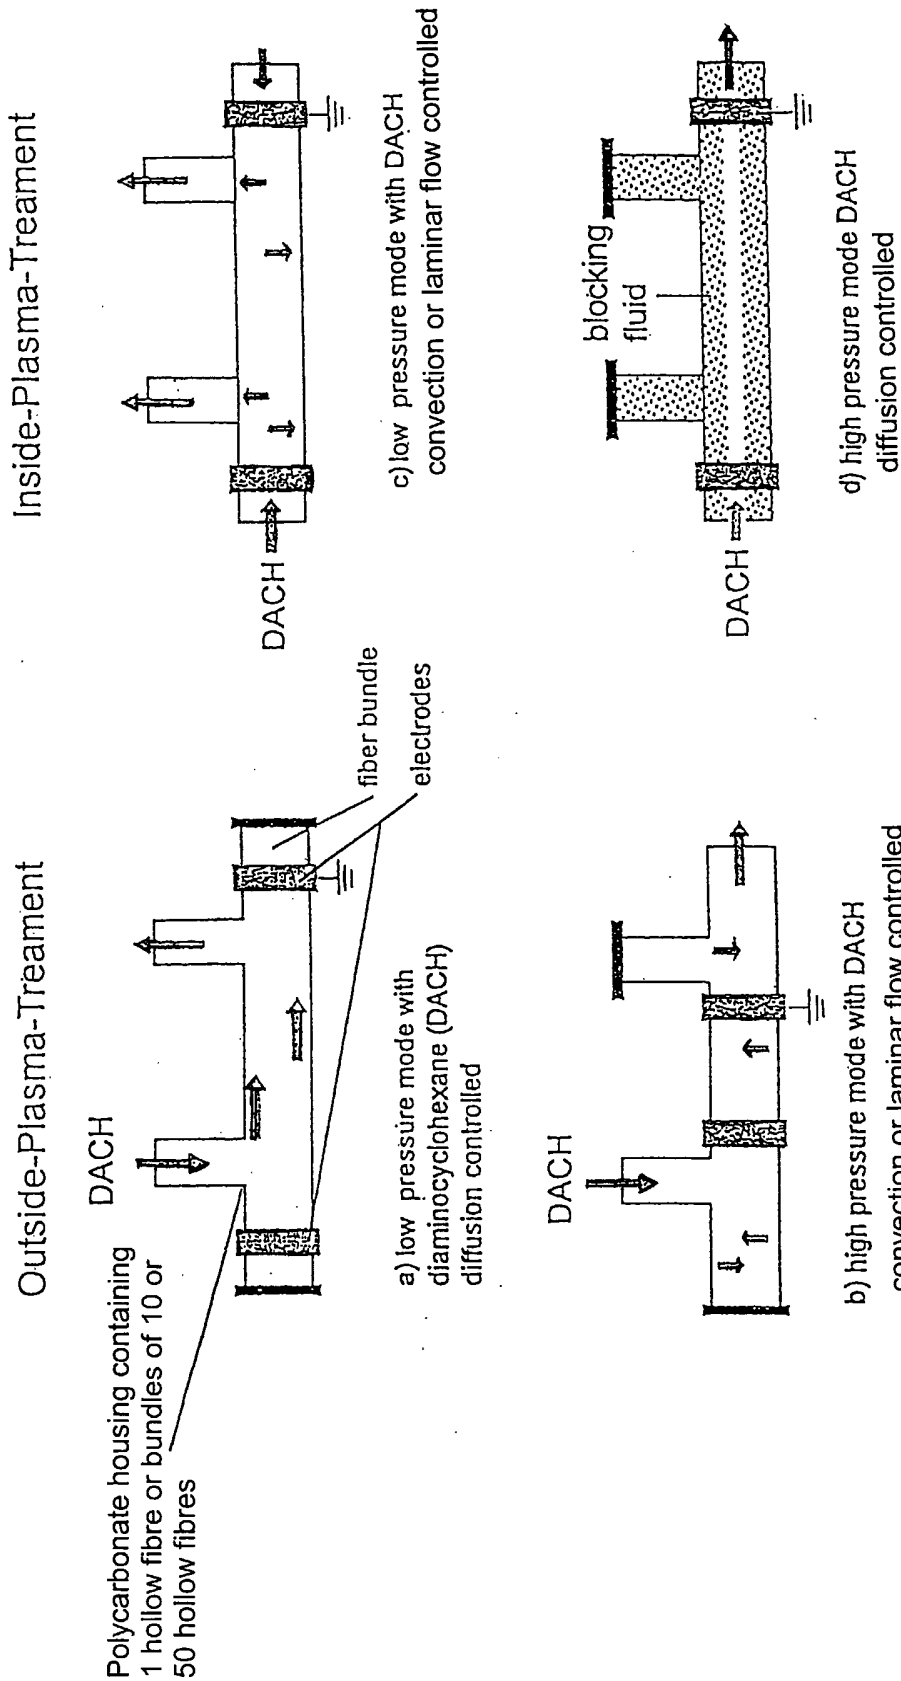


Fig 3

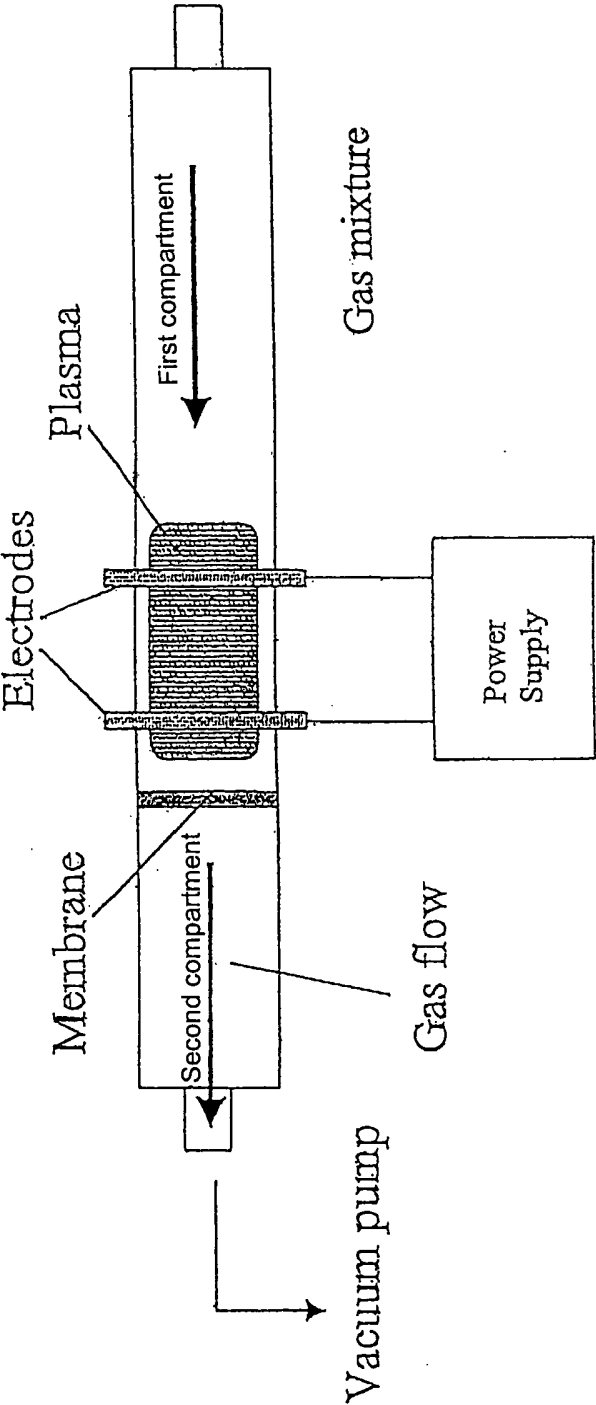

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00655

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B01D 63/02, B01D 63/08, B01D 67/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01D, A61M, C07K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI DATA, EPO-INTERNAL, CHEM ABS DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 8002805 A1 (GAMBRO AB), 24 December 1980 (24.12.80), the whole document --	1-37
Y	WO 9015883 A1 (SALT LAKE CITY), 27 December 1990 (27.12.90), page 8, line 31 - page 12; page 9 --	1-37
A	US 5202025 A (MAKOTO ONISHI ET AL), 13 April 1993 (13.04.93), column 3, line 21 - line 35 --	1-37
A	WO 0131339 A1 (UNIVERSITY OF SHEFFIELD), 3 May 2001 (03.05.01), the whole document --	1-37

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 July 2003

Date of mailing of the international search report

25 -07- 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Susanna Lindfors/MP
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00655

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5591140 A (PALLASSANA V. NARAYANAN ET AL), 7 January 1997 (07.01.97), the whole document --	1-37
A	US 6022902 A (STEVEN L. KOONTZ), 8 February 2000 (08.02.00), the whole document -- -----	1-37

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/06/03

International application No.

PCT/SE 03/00655

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	8002805	A1	24/12/80	AT	16456 T	15/11/85
				DE	2967545 D	00/00/00
				DK	6480 A	09/07/80
				EP	0037394 A,B	14/10/81
				SE	0037394 T3	
				JP	2018858 B	26/04/90
				JP	56500756 T	11/06/81
				NO	800037 A	09/07/80
				SE	426872 B,C	14/02/83
				SE	7900132 A	09/07/80
				US	4361484 A	30/11/82

WO	9015883	A1	27/12/90	CA	2058943 A	15/12/90
				EP	0476072 A	25/03/92
				JP	5508761 T	09/12/93
				NO	914939 A	05/05/92
				US	5112736 A	12/05/92

US	5202025	A	13/04/93	JP	2263845 A	26/10/90

WO	0131339	A1	03/05/01	AU	1036901 A	08/05/01
				CA	2387902 A	03/05/01
				EP	1222461 A	17/07/02
				GB	9925016 D	00/00/00

US	5591140	A	07/01/97	US	5409696 A	25/04/95
				NL	9201301 A	16/02/94
				US	5132108 A	21/07/92
				US	5244654 A	14/09/93
				US	5486357 A	23/01/96

US	6022902	A	08/02/00	AU	4065497 A	18/08/98
				WO	9832789 A	30/07/98
				US	5798261 A	25/08/98
				US	5935845 A	10/08/99
				US	5939314 A	17/08/99
				US	6074871 A	13/06/00
				US	5369012 A	29/11/94
				US	5332551 A	26/07/94
				US	5215790 A	01/06/93
				US	5314857 A	24/05/94
				US	5141806 A	25/08/92
