




(86) Date de dépôt PCT/PCT Filing Date: 2014/03/14
(87) Date publication PCT/PCT Publication Date: 2014/09/18
(45) Date de délivrance/Issue Date: 2022/03/29
(85) Entrée phase nationale/National Entry: 2015/09/14
(86) N° demande PCT/PCT Application No.: US 2014/028259
(87) N° publication PCT/PCT Publication No.: 2014/144026
(30) Priorité/Priority: 2013/03/15 (US61/802,142)

(51) Cl.Int./Int.Cl. *F16L 37/091* (2006.01),
F16L 37/084 (2006.01), *F16L 37/098* (2006.01)
(72) Inventeurs/Inventors:
HENNEMANN, THOMAS L., US;
BERGER, THOMAS JAMES, US
(73) Propriétaire/Owner:
AQSEPTENCE GROUP, INC., US
(74) Agent: BRION RAFFOUL

(54) Titre : RACCORD DE TUYAUTERIES
(54) Title: PIPE COUPLING

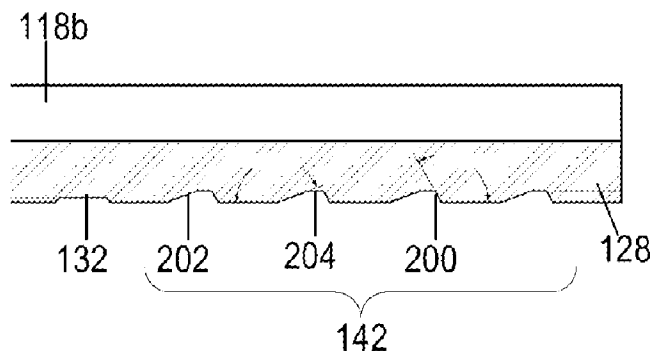

(57) **Abrégé/Abstract:**

A pipe coupling for connecting adjacent pipes. The pipe coupling has a connection type at each end that may be male or female. A female end may have an interior surface defining a receiving chamber. An interior circumferential groove is formed in the interior surface in which a band is seated. A plurality of rigid fingers is extends from the band into the receiving chamber. The receiving chamber receives a male end of an adjacent pipe, the male end having an exterior surface. An exterior circumferential groove is defined on the exterior surface to receive the plurality of rigid fingers. A variety of connection types and combinations are disclosed. The female end may define a sight window to permit viewing of the position of a male end of an adjacent pipe. The receiving chamber may have a reduced diameter proximate to the middle of the coupling to improve sealing.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2014/144026 A3

(43) International Publication Date
18 September 2014 (18.09.2014)

(51) International Patent Classification:
F16L 25/00 (2006.01)

(21) International Application Number:
PCT/US2014/028259

(22) International Filing Date:
14 March 2014 (14.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/802,142 15 March 2013 (15.03.2013) US

(71) Applicant: **BILFINGER WATER TECHNOLOGIES, INC.** [US/US]; 1950 Old Highway 8, New Brighton, Minnesota 55112 (US).

(72) Inventors: **HENNEMANN, Thomas L.**; 7987 River Acres Road, Cottage Grove, Minnesota 55016 (US). **BERGER, Thomas James**; 2840 Aquila Avenue South, Saint Louis Park, Minnesota 55426 (US).

(74) Agent: **WITSIL, Matthew W.**; Moore & Van Allen, PLLC, P.O. Box 13706, Research Triangle Park, North Carolina 27560 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

[Continued on next page]

(54) Title: PIPE COUPLING

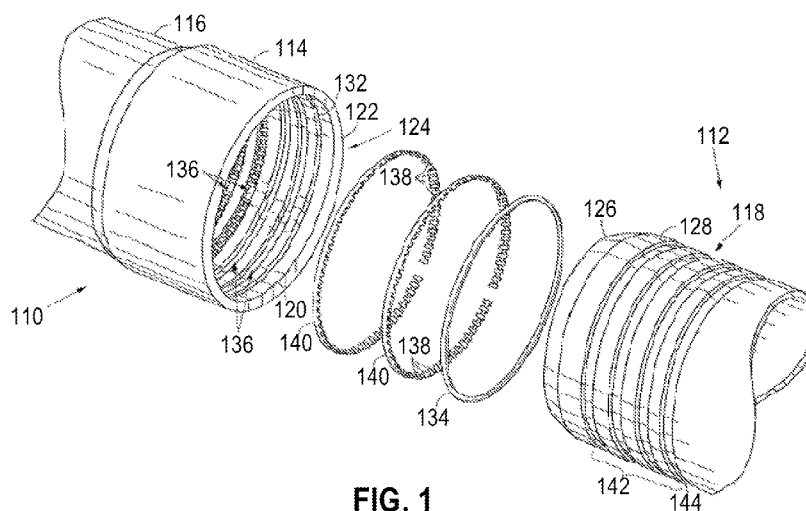


FIG. 1

(57) Abstract: A pipe coupling for connecting adjacent pipes. The pipe coupling has a connection type at each end that may be male or female. A female end may have an interior surface defining a receiving chamber. An interior circumferential groove is formed in the interior surface in which a band is seated. A plurality of rigid fingers extends from the band into the receiving chamber. The receiving chamber receives a male end of an adjacent pipe, the male end having an exterior surface. An exterior circumferential groove is defined on the exterior surface to receive the plurality of rigid fingers. A variety of connection types and combinations are disclosed. The female end may define a sight window to permit viewing of the position of a male end of an adjacent pipe. The receiving chamber may have a reduced diameter proximate to the middle of the coupling to improve sealing.

WO 2014/144026 A3

WO 2014/144026 A3



(88) Date of publication of the international search report:

11 June 2015

PIPE COUPLING

[0001] Intentionally left blank.

5

FIELD

[0002] Embodiments disclosed herein relate generally to pipe couplings and methods of securely connecting pipes with the couplings, regardless of the material from which the pipes are manufactured, and in particular may relate to providing restrained connections of pipe joints between fittings such as couplings when connecting to adjacent pipe.

10

BACKGROUND

[0003] In piping systems, there is a variety of ways to connect or join two separate lengths of pipe. In general, connections between two lengths of pipe traditionally have been achieved through one of four ways: (1) gluing or cementing; (2) welding; (3) threading; or (4) external connections such as collars and flanges. In gluing or cementing, an adhesive is applied to the male end, to the female end, or to both ends of the pipes being joined. The male end of one pipe is inserted into the female end of the adjacent pipe being joined and the adhesive cures, permanently joining the pipes. With welding, two metal pipes are joined using molten metal. In threading, the male end of a pipe has external threads and the female end of the adjacent pipe has internal threads. The male end is inserted into the female end of the adjacent pipe, the pipes are rotated, and the threads engage each other. With external connections such as collars and flanges, some sort of threaded fastener interacts with the external connecting structure to securely lock the connection between the two pipes.

[0004] Each of the aforementioned connection types has certain disadvantages. For example, a glued or cemented connection can be cumbersome and time consuming. The pipe surfaces must be cleaned and the adhesive applied and allowed to cure before the connection can withstand tensile force. Further, the pipes cannot be disconnected without destruction of at least a portion of the pipe. In threaded connections, the connection can be achieved quicker and the pipes usually can be disconnected and reused, but threaded connections typically cannot withstand high tensile forces. In addition, threaded connections can be cross-threaded relatively easily and require tools to grip, hold, and turn the pipes. Welded connections can

withstand significant tensile forces but can only be used on metal pipes. Further, creating the weld is a time-consuming task, and, once the weld is formed it is difficult to remove and may not be possible without pipe destruction. With external connections, the connection often can be removed and can withstand significant tensile forces, but forming the connection is also a time-consuming task.

[0005] Accordingly, there is a need for a pipe coupling that allows a connection that will withstand large tensile forces, can be quickly formed with similar adjacent pipes, and can be easily disconnected with the proper tool, regardless of the material from which the pipe is made.

SUMMARY

[0006] The pipe coupling of embodiments disclosed herein may provide a connection that can be quickly formed between pipes of the same or different materials. Furthermore, embodiments disclosed herein enable adjacent pipes with the same or different connective ends to be coupled together in a variety of configurations—female end to male end, female end to female end, or male end to male end. Embodiments disclosed herein may also enable the conversion of a pipe's male or female end from a standard fitting (e.g., threaded, welded, adhesive, or another type of coupling method) to the push-lock connection system described herein. In addition, the connection formed between two adjacent pipes may have comparatively high tensile yield strengths. Embodiments disclosed herein may offer a quick connection of two lengths of pipe without gluing, threading, or welding, as well as other advantages.

[0007] In some embodiments, the pipe coupling has a female end for receiving a male end of an adjacent pipe. In other embodiments, the pipe coupling has a male end to be received by a female end of an adjacent pipe. In still other embodiments, the pipe coupling has two female ends for receiving two male ends of similar adjacent pipes. In alternative embodiments, the pipe coupling has two male ends to be received by two female ends of similar adjacent pipes.

[0008] The female end of the pipe coupling has a female leading edge and an interior surface, which defines a male end receiving chamber within the female end. The male end receiving chamber will ultimately receive the male end of a similar adjacent pipe. The male end of the pipe coupling has a male leading edge, which leads the male end into the male end receiving chamber of the female end of a similar adjacent pipe. The male end has an outer

circumference which is smaller in diameter than the diameter of the male end receiving chamber on the female end.

[0009] In some embodiments, the interior surface of the female end has at least one and preferably a plurality of interior circumferential grooves disposed on it. Rigid fingers extend from these interior circumferential grooves into the male end receiving chamber. Preferably, the rigid fingers extending from each interior circumferential groove are connected to a band seated within each of the interior circumferential grooves. Disposed on the exterior surface of the male end are at least one and preferably a plurality of exterior circumferential grooves. The number of exterior circumferential grooves will typically correspond to the number of interior circumferential grooves disposed on the interior surface of the female end of a similar adjacent pipe. The exterior circumferential grooves on the male end are configured to receive the rigid fingers extending into the male end receiving chamber of the female end on the pipe coupling or a similar adjacent pipe. During the insertion of the male end into the male end receiving chamber, the rigid fingers are displaced toward the interior surface of the female end so that the male end can be fully inserted into the female end. When the male end is fully inserted into the male end receiving chamber the rigid fingers extending from the interior circumferential grooves on the female end are positioned within corresponding exterior circumferential grooves on the male end. The rigid fingers and their positioning within the corresponding exterior circumferential grooves prevent the male end from being withdrawn.

[0010] Alternatively, the male end and/or the female end of the pipe coupling or a similar adjacent pipe may have no circumferential grooves and may include threading, a weld, an adhesive, or another type of connection.

[0011] In accordance with one embodiment disclosed herein, a pipe coupling for connecting adjacent pipes is provided. The pipe coupling includes a first end of a body of the pipe coupling of a first connection type, and a second end of a body of the pipe coupling opposite from, integral with, and seamless with the first end and of a second connection type. The second connection type includes a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling. The interior surface of the female end defines a receiving chamber. At least one interior circumferential first groove is formed in the interior surface of the female end. A band is seated within the at least one circumferential first groove. A plurality of rigid fingers is formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, with the plurality of rigid fingers being displaceable. A separate

removal tool may be required to disconnect the coupling from an adjacent pipe; the necessity for such a tool may prevent accidental disconnects.

[0012] In some embodiments and in combination with the above embodiment, the receiving chamber is configured to receive a male end of an adjacent pipe, the male end
5 having a male leading edge and an exterior surface. The exterior surface has a circumference smaller in diameter than an inside diameter of the receiving chamber of the female end. At least one exterior circumferential groove is defined on the exterior surface of the male end being sized and positioned to receive therein the plurality of rigid fingers extending from a corresponding at least one interior first circumferential groove in the female end. In some
10 such embodiments, the female end defines a sight window comprising an opening extending through the thickness of the female end and configured to permit viewing of the position of a male end of an adjacent pipe within the receiving chamber. In some such embodiments, the pipe coupling has a longitudinal axis, and the sight window is elongated in a direction perpendicular to the pipe coupling longitudinal axis and is proximate to the female leading
15 edge.

[0013] In some embodiments and in combination with any of the above embodiments, the first connection type is the same as the second connection type. In some embodiments and in combination with any of the above embodiments, the first connection type is a female threaded end, configured to at least partially receive a threaded male end of an adjacent pipe,
20 or a threaded male end configured to be at least partially received by a threaded female end of an adjacent pipe. In some embodiments and in combination with any of the above embodiments, the first connection type is a smooth female end configured to at least partially receive a smooth male end of an adjacent pipe, or a smooth male end configured to be at least partially received by a smooth female end of an adjacent pipe.

[0014] In some embodiments and in combination with any of the above embodiments, the first connection type is a male end having a male leading edge and an exterior surface, the exterior surface having a circumference smaller in diameter than an inside diameter of the receiving chamber of the female end. At least one exterior circumferential groove is defined on the exterior surface of the male end being sized and positioned to receive therein the
30 plurality of rigid fingers extending from a corresponding at least one interior first circumferential groove in a female end of an adjacent pipe configured as the second connection type. In some such embodiments, the female end defines a sight window including an opening extending through the thickness of the female end and configured to permit viewing of the position of a male end of an adjacent pipe within the receiving

chamber, and wherein the exterior surface of the male end includes an indication that when viewed through the sight window indicates that the male end has been fully inserted into the female end. In some such embodiments, the indication on the exterior surface of the male end includes a coating differing in appearance from the exterior surface. In other such

5 embodiments, the indication on the exterior surface of the male end comprises a groove defined in the exterior surface.

[0015] In some embodiments and in combination with any of the above embodiments, the receiving chamber has a first diameter in a first portion of the receiving chamber proximate to the female leading edge, and a lesser, second diameter in a second portion of the
10 receiving chamber adjacent to the first portion.

[0016] In some embodiments and in combination with any of the above embodiments, the second joint type further comprises at least one interior circumferential second groove formed in the interior surface of the female end within the second portion, and a sealing ring disposed in the second groove.

15 [0017] In accordance with another embodiment disclosed herein, another pipe coupling for connecting adjacent pipes is provided, including a first end of a body of a first connection type and a second end of a body opposite from, integral with, and seamless with the first end and of a second connection type. The second connection type includes a male end having a male leading edge and an exterior surface, the exterior surface having a
20 circumference, where at least one exterior circumferential groove is defined on the exterior surface of the male end being sized and positioned to receive therein a plurality of rigid fingers. The male end is configured to be received by a third connection type on an adjacent pipe. The third connection type includes a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling. The interior surface of
25 the female end defining a receiving chamber with an interior diameter larger than the diameter of the exterior of the male end. At least one interior circumferential groove is formed in the interior surface of the female end, and a band is seated within the at least one circumferential groove. A plurality of rigid fingers is formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the
30 female leading edge, with the plurality of rigid fingers being displaceable to be received in a corresponding exterior circumferential groove of the male end.

[0018] In some embodiment and in combination with the above embodiment, the first connection type is the same as the second connection type. In some embodiments and in combination with any of the above embodiments, the first connection type is a female

threaded end, configured to at least partially receive a threaded male end of an adjacent pipe, or a threaded male end configured to be at least partially received by a threaded female end of an adjacent pipe. In some embodiments and in combination with any of the above embodiments, the first connection type is a smooth female end configured to at least partially receive a smooth male end of an adjacent pipe, or a smooth male end configured to be at least partially received by a smooth female end of an adjacent pipe.

5 [0019] In some embodiments and in combination with any of the above embodiments, the exterior surface of the male end includes an indication configured to indicate that the male end has been fully inserted into the female end when viewed through a sight window defined in the female end, the sight window comprising an opening extending through the thickness of the female end to permit viewing of the position of a male end of an adjacent pipe within the receiving chamber. In some such embodiments, the indication on the exterior surface of the male end includes a coating differing in appearance from the exterior surface. In other such embodiments, the indication on the exterior surface of the male end comprises a groove defined in the exterior surface.

10 [0020] In accordance with another embodiment disclosed herein, a method of coupling adjacent pipes is provided. A first connection type is provided on one end of a pipe or a pipe coupling, including a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling. The interior surface of the female end defines a receiving chamber. The female end defines a sight window comprising an opening extending through the thickness of the female end and configured to permit viewing of the position of a male end of an adjacent pipe within the receiving chamber. A second connection type is provide on one end the other of a pipe or a pipe coupling, including a male end having a male leading edge and an exterior surface. The exterior surface has a circumference smaller in diameter than an inside diameter of the receiving chamber of the female end, where at least one exterior circumferential groove is defined on the exterior surface of the male end being sized and positioned to receive therein the plurality of rigid fingers extending from a corresponding at least one interior first circumferential groove in a female end of an adjacent pipe configured as the second joint type. The male end exterior surface includes an indication that when viewed through the sight window indicates that the male end has been fully inserted into the female end. The method includes inserting the male end into the female end and continuing such insertion until the indication on the exterior surface of the male pipe can be viewed through the sight window.

[0020a] In another aspect, this document discloses a pipe coupling for connecting adjacent pipes, comprising: a first end of a body of the pipe coupling comprising a first connection type; a second end of a body of the pipe coupling opposite from, integral with, and seamless with the first end and comprising a second connection type, wherein the second connection type comprises: a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling, the interior surface of the female end defining a receiving chamber; at least one interior circumferential first groove formed in the interior surface of the female end; a band seated within the at least one circumferential first groove; and a plurality of rigid fingers formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, the plurality of rigid fingers being displaceable, wherein the first connection type is a male end having a male leading edge and an exterior surface, the exterior surface having a circumference smaller in diameter than an inside diameter of the receiving chamber of the female end, wherein at least one exterior circumferential groove is defined on the exterior surface of the male end, said at least one exterior circumferential groove having a trapezoidal groove cross-section, said at least one exterior circumferential groove defined by a first sidewall, a second sidewall and a bottom surface with said at least one exterior circumferential groove being sized and positioned to receive therein the plurality of rigid fingers extending from a corresponding at least one interior first circumferential groove in a female end of an adjacent pipe configured as the second connection type.

[0020b] In another aspect, this document discloses a pipe coupling for connecting adjacent pipes, comprising: a first end of a body comprising a first connection type; a second end of a body opposite from, integral with, and seamless with the first end and comprising a second connection type, wherein the second connection type comprises: a male end having a male leading edge and an exterior surface, the exterior surface having a circumference, wherein at least one exterior circumferential groove is defined on the exterior surface of the male end, said at least one exterior circumferential groove having a trapezoidal groove cross-section, said at least one exterior circumferential groove defined by a first sidewall, a second sidewall and a bottom surface with said at least one exterior circumferential groove being sized and positioned to receive therein a plurality of rigid fingers, wherein the male end is configured to be received by a third connection type on an adjacent pipe, the third connection type comprising: a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling, the interior surface of the female end defining a receiving chamber with an interior diameter larger than the diameter of the exterior of the

male end; at least one interior circumferential groove formed in the interior surface of the female end; a band seated within the at least one circumferential groove; and a plurality of rigid fingers formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, the plurality of rigid fingers being displaceable to be received in a corresponding exterior circumferential groove of the male end.

[0020c] In another aspect, this document discloses a pipe coupling for connecting adjacent pipes, comprising: a first end of a body of the pipe coupling comprising a first connection type; a second end of a body of the pipe coupling opposite from, integral with, and seamless with the first end and comprising a second connection type, wherein the second connection type comprises: a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling, the interior surface of the female end defining a receiving chamber; at least one interior circumferential first groove formed in the interior surface of the female end; a band seated within the at least one circumferential first groove; and a plurality of rigid fingers formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, the plurality of rigid fingers being displaceable, wherein the first connection type is a male end having a male leading edge and an exterior surface, the exterior surface having a circumference smaller in diameter than an inside diameter of the receiving chamber of the female end, wherein at least one exterior circumferential groove is defined on the exterior surface of the male end, said at least one exterior circumferential groove having a trapezoidal groove cross-section, said at least one exterior circumferential groove defined by a first sidewall, a second sidewall and a bottom surface, said first and second sidewalls residing in non-perpendicular arrangement to the bottom surface, with said at least one exterior circumferential groove being sized and positioned to receive therein the plurality of rigid fingers extending from a corresponding at least one interior first circumferential groove in a female end of an adjacent pipe configured as the second connection type.

[0020d] In another aspect, this document discloses a pipe coupling for connecting adjacent pipes, comprising: a first end of a body comprising a first connection type; a second end of a body opposite from, integral with, and seamless with the first end and comprising a second connection type, wherein the second connection type comprises: a male end having a male leading edge and an exterior surface, the exterior surface having a circumference, wherein at least one exterior circumferential groove is defined on the exterior surface of the male end, said at least one exterior circumferential groove having a trapezoidal groove cross-

section, said at least one exterior circumferential groove defined by a first sidewall, a second sidewall and a bottom surface, said first and second sidewalls residing in non-perpendicular arrangement to the bottom surface, with said at least one exterior circumferential groove being sized and positioned to receive therein a plurality of rigid fingers, wherein the male end is configured to be received by a third connection type on an adjacent pipe, the third connection type comprising: a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling, the interior surface of the female end defining a receiving chamber with an interior diameter larger than the diameter of the exterior of the male end; at least one interior circumferential groove formed in the interior surface of the female end; a band seated within the at least one circumferential groove; and a plurality of rigid fingers formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, the plurality of rigid fingers being displaceable to be received in a corresponding exterior circumferential groove of the male end.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] Having thus described embodiments of the invention in general terms, reference will now be made to the accompanying drawings, where:

5 [0022] FIG. 1 is an exploded perspective view of a female end of one pipe and a male end of a similar adjacent pipe, each configured to form an embodiment of a unique push-lock connection system for a joint.

[0023] FIG. 2 is a cross sectional side view of the push-lock pipe connection system of FIG. 1.

10 [0024] FIG. 3 is a cross sectional side view of the push-lock pipe connection system of FIG. 1 with the male end being partially inserted within the female end.

[0025] FIG. 4 is a cross sectional side view of the push-lock pipe connection system of FIG. 1 with the male end being fully inserted within the female end (also referred to as a male end receiving chamber) and a plurality of rigid fingers being positioned within their corresponding exterior circumferential grooves on the male end.

15 [0026] FIG. 5 is a cross sectional view showing a side profile of an interior circumferential groove on the female end of one pipe and a rigid finger from the plurality of rigid fingers extending from a band seated within the groove.

[0027] FIG. 6 is a cross sectional view showing a side profile of an exterior circumferential groove on the male end of one pipe.

20 [0028] FIG. 7A is back view of a portion of a set of rigid fingers extending from a band to be seated within an interior circumferential groove on a female end of one pipe.

[0029] FIG. 7B is a front view of a portion of the set of rigid fingers of FIG. 7A.

[0030] FIG. 7C is a side view of a single finger from the set of rigid fingers of FIG. 7A.

25 [0031] FIG. 8 is a cross sectional side view showing another embodiment of the push-lock pipe connection system of FIG. 1 with the male end being fully inserted within the female end (also referred to as a male end receiving chamber) and a plurality of rigid fingers being positioned within their corresponding exterior circumferential grooves on the male end.

30 [0032] FIG. 9 is an end view of a female-by-female pipe coupling having a female end of the push-lock connection system of FIG. 1 at both ends of the pipe coupling, in accordance with embodiments disclosed herein.

[0033] FIG. 10 is a cross sectional side view of the coupling of FIG. 9 taken along line 10—10 of FIG. 9.

- [0034] FIG. 11 is a detailed partial cutaway view of one end of the coupling of FIG. 9 showing interior circumferential grooves.
- [0035] FIG. 12 is another end view of the coupling of FIG. 9, rotated 90 degrees from the view of FIG. 9, showing a representation of a window cutting wheel.
- 5 [0036] FIG. 13 is a side view of the coupling of FIG. 9, rotated 90 degrees from the view of FIG. 10, showing an embodiment of a sight window.
- [0037] FIG. 14 is an end view of a male-by-male pipe coupling having a male end of the push-lock connection system of FIG. 1 at both ends of the pipe coupling, in accordance with embodiments disclosed herein.
- 10 [0038] FIG. 15 is a side view of the coupling of FIG. 14.
- [0039] FIG. 16 is a detailed view of a portion of one end of the coupling of FIG. 14.
- [0040] FIG. 17 is a front view of a set of rigid fingers extending from a band with a finger removed from each end of the band prior to bending the fingers, in accordance with embodiments disclosed herein.
- 15 [0041] FIG. 18 is a front view of a set of rigid fingers of FIG. 17 after the fingers have been bent, in accordance with embodiments disclosed herein.
- [0042] FIG. 19 is a detailed front view of rigid fingers of FIG. 17 prior to bending the fingers.
- [0043] FIG. 20 is a top view of the rigid-fingered band of FIG. 17 with ends of the
20 band being welded together after the fingers have been bent.
- [0044] FIG. 21 is a detailed top view of ends of the welded rigid-fingered band of FIG. 20.
- [0045] FIG. 22 is a side profile view of a finger extending from a band after it has been bent, in accordance with embodiments disclosed herein.
- 25 [0046] FIG. 23 is an end view of a pipe coupling having a female end with the push-lock connection system of FIG. 1 at a first end and an opposite female end that is threaded at a second end of the pipe coupling, in accordance with embodiments disclosed herein.
- [0047] FIG. 24 is a cross sectional side view of the coupling of FIG. 23 taken along line 24—24 of FIG. 23.
- 30 [0048] FIG. 25 a detailed partial cutaway view of one end of the coupling of FIG. 23 showing interior circumferential grooves.
- [0049] FIG. 26 is an end view of a pipe coupling having a female end with the push-lock connection system of FIG. 1 at a first end and an opposite female end that is plain and

unthreaded at a second end of the pipe coupling, configured to receive an adhesive, in accordance with embodiments disclosed herein.

[0050] FIG. 27 is a cross sectional side view of the coupling of FIG. 26 taken along line 27—27 of FIG. 26.

5 [0051] FIG. 28 is detailed partial cutaway view of one end of the coupling of FIG. 23 showing interior circumferential grooves and a sight window.

[0052] FIG. 29 is an end view of a pipe coupling having a male end with the push-lock connection system of FIG. 1 at one end and a threaded female end at a second end of the pipe coupling, in accordance with embodiments disclosed herein.

10 [0053] FIG. 30 is a cross sectional side view of the coupling of FIG. 29 taken along line 30—30 of FIG. 29.

[0054] FIG. 31 is detailed partial cutaway view of one end of the coupling of FIG. 23 showing exterior circumferential grooves.

[0055] FIG. 32 is an end view of a pipe coupling having a male end with the push-lock connection system of FIG. 1 at one end and an unthreaded female end configured to receive an adhesive at a second end of the pipe coupling, in accordance with embodiments disclosed herein.

[0056] FIG. 33 is a cross sectional side view of the coupling of FIG. 32 taken along line 33—33 of FIG. 32.

20 [0057] FIG. 34 is a detailed partial cutaway view of the coupling of FIG. 32 showing exterior circumferential grooves in the male end of the coupling.

[0058] FIG. 35 is an end view of a pipe coupling having a male end with the push-lock connection system of FIG. 1 at one end and a female end of the push-lock connection system of FIG. 1 at a second end of the coupling, in accordance with embodiments disclosed herein.

25 [0059] FIG. 36 is a cross sectional side view of the coupling of FIG. 35 taken along line 36—36 of FIG. 35.

[0060] FIG. 37 is a detailed partial cutaway view of the coupling of FIG. 35 showing exterior circumferential grooves in the male end of the coupling.

[0061] FIG. 38 is a detailed partial cutaway view of the coupling of FIG. 32 showing interior circumferential grooves in the female end of the coupling and sight window, in accordance with embodiments disclosed herein.

30 [0062] FIG. 39 is an end view of a pipe coupling having a male end with a push-lock connection system similar to that of FIG. 1 at one end and a plain, unthreaded male end

configured to receive an adhesive at a second end of the pipe coupling, in accordance with embodiments disclosed herein.

[0063] FIG. 40 is a cross sectional side view of the coupling of FIG. 39 taken along line 40—40 of FIG. 39.

5 [0064] FIG. 41 is a detailed partial cutaway view of the coupling of FIG. 39 showing exterior circumferential grooves in the male end of the coupling with the push-lock connection system.

[0065] FIG. 42 is an end view of a pipe coupling having a male end with the push-lock connection system similar to that of FIG. 1 at one end and a threaded male end at a second end
10 of the pipe coupling, in accordance with embodiments disclosed herein.

[0066] FIG. 43 is a cross sectional side view of the coupling of FIG. 42 taken along line 43—43 of FIG. 42.

[0067] FIG. 44 is a detailed partial cutaway view of the coupling of FIG. 42 showing exterior circumferential grooves in the male end of the coupling with the push-lock connection
15 system.

[0068] FIG. 45 is an end view of a pipe coupling having a female end with the push-lock connection system of FIG. 1 at one end and a threaded female end at a second end of the pipe coupling, as an opposite view of FIG. 24, in accordance with embodiments disclosed herein.

20 [0069] FIG. 46 is a cross sectional side view of the coupling of FIG. 45 taken along line 46—46 of FIG. 45, as a reverse view of FIG 24 and showing an exemplary band with rigid fingers seated in an interior circumferential groove of the female end.

[0070] FIG. 47 is a detail view of the female end of the coupling of FIG. 45 showing the band of rigid fingers seated in one of a plurality of interior circumferential grooves similar
25 to the push-lock connection system of FIG. 1.

DETAILED DESCRIPTION

[0071] The following detailed description of embodiments refers to the accompanying drawings. Other embodiments having different structures and operation do not depart from the scope of the present disclosure. Certain terminology is used herein for
30 convenience only and is not to be taken as a limitation on the embodiments described. For example, words such as “top,” “bottom,” “upper,” “lower,” “left,” “right,” “horizontal,” “vertical,” “upward,” and “downward” merely describe the configuration shown in the figures or the orientation of a part in the installed position. Indeed, the referenced

components may be oriented in any direction and the terminology, therefore, should be understood as encompassing such variations unless specified otherwise. Throughout this disclosure, where a process or method is shown or described, the method may be performed in any order or simultaneously, unless it is clear from the context that the method depends on certain actions being performed first. Like reference numerals refer to the same or similar parts throughout the drawings and specification.

[0072] Referring to FIGS. 1-8, a pipe **110** and a similar adjacent pipe **112** are shown for describing an embodiment of a “push-lock connection system” as referred to herein. In practice, the pipe **110** has the same structure as the similar adjacent pipe **112** and therefore, a description of structure that is present for the similar adjacent pipe **112** in the figures applies equally to a description of the structure for the pipe **110**, and vice versa. Various coupling embodiments are disclosed herein for use with the unique “push-lock connection system” described herein. Some of the couplings disclosed herein may be used to convert male ends of pipes using the push-lock connection system to female ends and vice versa. Additionally, some of the couplings may be used to convert portions of existing pipe systems to a push-lock connection system without having to remove and replace the entire existing pipe system.

[0073] The pipe **110** has a female end **114**, an intermediate length **116**, and a male end **118**. Referring to FIGS. 1 and 2, the female end **114** has an interior surface **120** and a female leading edge **122** that terminates the female end **114**. The female end **114** may have an outside diameter **D1** and an inside diameter **D2**, enlarging from the outside diameter **D4** and the inside diameter **D5** of the intermediate length **116**. The interior surface **120** of the female end **114** defines a male end receiving chamber **124**, which is essentially the interior space within the female end **114**. The male end **118** of the pipe **110** has a male leading edge **126** and an exterior surface **128** with a circumference (exterior diameter **D3**) that is smaller in diameter than diameter **D2** of the male end receiving chamber **124** on the female end **114**. Preferably the male end receiving chamber **124** will ultimately receive the male end **118** of the similar adjacent pipe **112** with minimal clearance when the pipes are connected and may create an interference fit; however, it is anticipated that certain applications may require a large clearance between connected pipes. The pipe **110** is sized according to the outer diameter **D4** of its intermediate length **116** and has a tensile yield strength that is largely dependent on the material from which pipe **110** is made.

[0074] A stop member **130** is disposed within the pipe **110** preferably at the interior end of the male end receiving chamber **124**. In the preferred embodiment, as shown in FIGS. 1-4, the diameter **D2** of the male end receiving chamber **124** is larger than the interior

diameter **D5** of the intermediate length **116**. As such, the stop member **130** in the preferred embodiment is a circumferential shoulder **156** formed by the reduction in diameter **D2** from the male end receiving chamber **124** to the interior diameter **D5** of the intermediate length **116**. However, it is anticipated that stop member **130** could be other forms of circumferential shoulders, such as those present in “Flush Mount” connections or a shoulder on the exterior surface **128** of the male end **118**. Additionally, in the preferred embodiment, at least one circumferential sealing groove **132** with an O-ring **134** seated therein is disposed on the interior surface **120** of the female end **114**. However, it is anticipated that in certain applications the circumferential sealing groove **132** and the O-ring **134** may not be present, as the pipe **110** may include a different coupling mechanism.

[0075] The interior surface **120** of the female end **114** has a plurality of interior circumferential grooves **136** disposed on it. In the preferred embodiment, the number of interior circumferential grooves **136** is four. However, it is anticipated that this number could be greater than four, less than four, or even as few as one, depending upon the application.

[0076] A plurality of sets of rigid fingers **138** extend from each of the interior circumferential grooves **136** and into the male end receiving chamber **124**, forming an acute angle α between each of the rigid fingers **138** and the interior surface **120** of the female end **114** and directed away from the female leading edge **122** (see FIG. 5). In the preferred embodiment, the angle α formed between each of the rigid fingers **138** and the interior surface **120** measures between 27 degrees and 30 degrees inclusive.

[0077] Although rigid, each of the rigid fingers **138** is displaceable and can be radially displaced toward and away from the interior surface **120** of the female end **114**. Further, each of the rigid fingers **138** is biased toward a non-displaced position (as shown in FIG. 7C) in the female end **114** and within the male end receiving chamber **124** unless acted upon by some force. Preferably, the rigid fingers **138** are made of stainless steel. However, any number of substantially rigid materials could be used, depending on the application and the tensile forces involved. In the preferred embodiment, each set of rigid fingers **138** extends from a band **140** (see FIGS. 7A, 7B, & 7C) that is seated within each of the interior circumferential grooves **136**.

[0078] In some embodiments and as shown in FIG. 5, the interior circumferential grooves **136** have a generally rectangular cross section profile with a first side wall **150**, a second sidewall **152**, a bottom surface **154**, and a shoulder **156** positioned adjacent the first side wall **150**. The shoulder **156** has a top surface **158** and a side surface **160**. In this embodiment, the band **140** is seated between the second sidewall **152** of the interior

circumferential grooves **136** and the side surface **160** of the shoulder **156** such that the rigid fingers **138** extend above and over the shoulder **156**. When the male end **118** is inserted into the female end **114**, the minimal clearance there between will cause each set of rigid fingers **138** to be displaced at least partially, if not totally, into the interior circumferential grooves **136**. In this regard, the distal end **148** of each of the rigid fingers **138** (see FIGS. 7A, 7B, & 7C) displaces into the space between the top surface **158** of the shoulder **156** and the top edge of the first sidewall **150** of the interior circumferential grooves **136**.

[0079] Disposed on the exterior surface **128** of the male end **118** is a plurality of exterior circumferential grooves **142** with each groove having a sidewall **144** at the side of the groove nearest the male leading edge **126**. A bottom surface **146** extends from the bottom edge of the sidewall **144** and slopes at an angle to the exterior surface **128** of the male end **118**, forming acute angle **B** with the exterior surface **128** (see FIG. 6). Preferably, the angle **B** formed between the bottom surface **146** of the exterior circumferential grooves **142** and the exterior surface **128** of the male end **118** is approximately 16 degrees. As a result and depicted in FIG. 6, in the preferred embodiment the exterior circumferential grooves **142** have a triangular cross section profile formed by the sidewall **144** and the bottom surface **146**. Preferably, the number of exterior circumferential grooves **142** on the male end **118** will correspond with the number of interior circumferential grooves **136** on the interior surface **120** of the female end **114**.

[0080] FIG. 3 shows the male end **118** of the similar adjacent pipe **112** partially inserted into the male end receiving chamber **124** of the female end **114** of the pipe **110**. As shown, the male leading edge **126** of the male end **118** is beveled in the preferred embodiment of the pipe **110**, with the bevel being set at an approximately 20 degrees radially inward angle with respect to the exterior surface **128** of the male end **118**. The angling of the rigid fingers **138** away from the female leading edge **122** allows the male end **118** to be inserted into the male end receiving chamber **124**, and, the insertion is facilitated by the bevel at the male leading edge **126** as well as the triangular cross section profile of the exterior circumferential grooves **142**. As the male end **118** is inserted, the exterior surface **128** of the male end **118** contacts the sets of rigid fingers **138** and causes the rigid fingers **138** to be displaced toward the interior surface **120** of the female end **114**.

[0081] FIG. 4 shows the male end **118** of the similar adjacent pipe **112** fully inserted into the male end receiving chamber **124** on the female end **114** of the pipe **110**. When fully inserted, the male leading edge **126** abuts the stop member **130**. With the male end **118** fully inserted into the female end **114** the sets of rigid fingers **138** are positioned over their

corresponding exterior circumferential grooves **142** on the male end **118**, allowing each set of rigid fingers **138** to spring back toward its non-displaced position such that the rigid fingers **138** are received within the corresponding exterior circumferential grooves **142** on the exterior surface **128** of the male end **118**. Preferably, a set of the rigid fingers **138** becomes positioned within each exterior circumferential groove such that a distal end **148** (see FIGS. 7A, 7B, & 7C) of each of the rigid fingers **138** abuts the sidewall **144** of the exterior circumferential grooves **142**. The abutment of the distal ends **148** of the rigid fingers **138** against the sidewall **144** prevents movement of the male end **118** of the similar adjacent pipe **112** out of the male end receiving chamber **124** of the female end **114** of the pipe **110**, thereby locking the pipe **110** and the similar adjacent pipe **112** together.

[0082] FIGS. 7A and 7B show a portion of a set of rigid fingers **138** extending from the band **140**. As noted, in the preferred embodiment the band **140** is seated between the second sidewall **150** of the interior circumferential grooves **136** and the side surface **160** of the shoulder **156**. FIG. 7C shows a side view of a set of rigid fingers **138** along section line 7C-7C (see FIG. 7B) and effectively illustrates the side profile of a single finger extending from the band **140**. The finger extends from the band **140** through a bend **162**. The bend **162** causes the rigid fingers **138** to extend out of the interior circumferential grooves **136** and into the male end receiving chamber **124** at the acute angle α away from the female leading edge **122**, as shown in FIG. 5.

[0083] The number, shape, and size of rigid fingers **138** in each set of rigid fingers **138** is a design choice that depends on the application of the invention. With a 4.5 inch PVC pipe, a preferred embodiment has **135** stainless steel fingers in each set, with one set per interior circumferential groove. Each of the rigid fingers **138** is 0.060 inches wide and the sets of rigid fingers **138** have a 0.060 inch gap between each finger. The band **140** is approximately 0.155 inches long from its bottom edge to the bend **162**, and the rigid fingers **138** are approximately 0.209 inches long from the bend **162** to their distal ends **148**.

[0084] As noted and shown in FIGS. 5 and 6, in the preferred embodiment the acute angle α created between the interior surface **120** of the female end **114** and the rigid fingers **138** is larger than the angle β between the bottom surface **146** of the exterior circumferential grooves **142** and the exterior surface **128** of the male end **118**. As a result, the rigid fingers **138** bias against the bottom surface **146** of the exterior circumferential grooves **142** when fully received therein and will exert a continuous radially inward force on the bottom surface **146**.

[0085] FIG. 8 shows an alternative embodiment having a different type of connection than the connection present in the previously described embodiment. The connection shown

in FIG. 8 is referred to as a "Flush Mount" connection because the outer diameter of the female end **114** is substantially equal to the outer diameter of the intermediate length **116** between the male end **118** and the female end **114**. In the Flush Mount connection, the male end receiving chamber **124** still has a diameter **D2** that is greater than the interior diameter **D5** of the intermediate length **116**, but the male end receiving chamber **124** is formed by machining out the chamber and not by belling the female end **114** with a mandrel.

[0086] FIG. 8 also shows different embodiments that can be present regardless of whether a Flush Mount connection is used. For example, one aspect that differs from the previous embodiment is the interior circumferential grooves **142** do not have a shoulder **156**. Consequently, each band **140** is wider and is seated between the sidewalls of each of the interior circumferential grooves **142**. Another aspect that differs from the previous embodiment is that the male leading edge **126** is not beveled in FIG. 8. Finally, FIG. 8 shows the alternative embodiment where the bottom surface **146** of the exterior circumferential grooves **142** is not angled and the exterior circumferential grooves **142** have a substantially rectangular cross section profile.

[0087] Referring to FIGS. 9 through 47, embodiments disclosed herein include a pipe coupling generally designated as **188**, but are discussed in specific embodiments designated as **188a-188i**. A pipe coupling **188** is a fitting used to connect the ends of adjacent pipes together. Embodiments of the pipe coupling **188** can be arranged in a variety of configurations of a body and may be used to connect two female ends **114**, two male ends **118**, or a female end **114** to a male end **118**. The pipe coupling **188** can also be used as an adapter to convert a male end **118** to a female end **114** or a female end **114** to a male end **118**. In some embodiments, the pipe coupling **188** uses one or two portions, either a male end or a female end, to form a push-lock connection system with one or two adjacent pipes. This may result in the ends of the pipe coupling **188** securely interfacing with and engaging pipes **110**, **112** as described herein to provide a seal and a restrained joint. In other embodiments, the pipe coupling **188** may also be configured to accept threaded ends or smooth/plain ends (configured for application of adhesive) as the female ends **114** or male ends **118** of pipes **110**, and may be used to convert the connection type from a threaded **192** or smooth **194** end to an end configured with the push-lock coupling system as described herein. Connection types may include, for example, male push-lock connection, female push-lock connection, male threaded connection, female threaded connection, male smooth/plain end connection, and female smooth/plain end connection.

[0088] The pipe coupling may include a first end and a second end opposite from and integral with, of unitary construction with, and one seamless piece with the first end through a very short central portion (if existing at all), meaning that the material that the body of the coupling is made from, for example, PVC, and is continuous. Other materials may be selected as appropriate for the application.

[0089] Referring to FIGS. 9 through 13, a female-by-female embodiment of a pipe coupling **188a** is shown. In this embodiment, the pipe coupling **188a** has a first female end **114a** of a body, a second female end **114b** of the body, and a central portion **115** of the body therebetween at which location the two ends **114a**, **114b** meet. The central portion **115** of each embodiment is designated for reference and may not exist in reality, as it is in general merely the connection between the two ends. Each of the female ends **114a**, **114b** of the coupling **188a** defines an outside diameter **D1** and has an interior surface **120** that defines a male end receiving chamber **124** and an inside diameter **D2**. The female ends **114a**, **114b** terminate at a female leading edge **122**, which may or may not be beveled. The female ends **114a**, **114b** in FIGS. 9-13 are each configured to receive a male end **118** of adjacent pipe **112** by means of the push-lock connection system as described herein. The male ends **118** may be inserted at least partially into the male end receiving chambers **124** of the pipe coupling **188**. The central portion **115** between the two female ends **114a**, **114b** of the pipe coupling **188a** may also define an interior diameter **D5**, which in this case is the smallest dimension of the coupling **188a**. The pipe coupling **188** may further define an exterior diameter **D1** of each female end **114a**, **114b**. The largest outside diameter **D6** of each female end **114a**, **114b** may in some embodiments include a bulge **196**, a taper, a protective ring or sleeve, or a similar outer shell feature, where **D6** is greater than the exterior diameter **D1** of the female ends **114a**, **114b**.

[0090] The male end receiving chamber **124** of the female ends **114a**, **114b** is configured to receive a male end **118** of an adjacent pipe **112** with the push-lock connection system of FIG. 1 with minimal clearance between the interior surface **120** of the female ends **114a**, **114b** when the adjacent pipe **112** (not shown) is connected. It should be noted that pipe couplings **188** disclosed herein are sized to correspond with the adjacent pipe **112** and have a tensile yield strength that is largely dependent on the material from which the pipe couplings **188** are made. In some embodiments, the couplings **188** may be made of PVC.

[0091] Referring again to FIGS. 9-13, a stop member **130** is disposed within each of the female ends **114a**, **114b** of the pipe coupling **188a** preferably at the interior end **120** of the male end receiving chamber **124**. In this regard, a diameter **D2** of the male end receiving

chamber **124** near the stop member **130** is larger than an interior diameter **D5** of the central portion **116**. As such, the stop member **130** may be a circumferential shoulder formed by the reduction in diameter **D2** from the male end receiving chamber **124** to the interior diameter **D5** of the central portion **115**. Additionally, in the preferred embodiment, at least one and preferably two circumferential sealing grooves **132** (FIG. 11) are available to receive and seat an O-ring **134** (FIGS. 1-4) therein. These circumferential sealing grooves **132** are preferably disposed on the interior surface **120** of the female end **114** between interior circumferential grooves **136** (discussed infra) and the stop member **130**. However, it is anticipated that in certain applications the circumferential sealing grooves **132** may be elsewhere on the interior surface **120** or may not be present, or alternatively may be located on the male end **118**.

[0092] It should also be noted that the male end receiving chamber **124** as shown has at least two differing diameters, namely **D2** and **D4**, along the length where the male end **118** of the pipe **112** is received. The first diameter **D4** is near the stop member **130** as previously discussed. The second diameter **D2** is along the interior surface **120** of the female ends **114a**, **114b** where interior circumferential grooves **136** (discussed infra) are disposed. Typically, diameter **D4** is slightly smaller than diameter **D2**. The differing diameters allow an increased depth of the preferred circumferential sealing grooves **132** so the O-ring **134** can be seated deeper therein. In this regard, the diameter **D2** is sized to accommodate an insertion member of a removal tool (not shown) and narrowing **D4** as compared to **D2** allows the insertion member to insert into **D2** while providing for a deeper depth for the circumferential sealing grooves **132** at **D4**. The reduced diameter **D4** also assists in proper alignment of the male end **118** of the pipe **112** being connected.

[0093] FIGS. 9, 10, 12, and 13 also show that this embodiment of a coupling **188a** includes sight windows **190** between the leading edge **122** of the female ends **114a**, **114b** and the first of the interior circumferential grooves **136**. A sight window **190** is an opening that extends fully through the wall of the female end **114** of the coupling **188a**. In operation, a male end **118** of an adjacent pipe **112** having the push-lock connection system described herein may have a portion colored or marked with a line or otherwise, and may also be designated with a groove, so that the color or other marking appears in the sight window **190** to signal a full insertion into one or more of the female ends **114a**, **114b** of the pipe coupling **188a**. In one embodiment the sight window **190** may be approximately 1.50 inches in width at the opening on the outside surface of the coupling **188a**, approximately 0.188 inches in length along the female end **114a**, **114b**, and may be cut or similarly machined using an approximately 2.25 inch diameter sight window cutting wheel **191**. In one embodiment the

sight window **190** may be offset from the female leading edge **122** by approximately 0.41 inches.

[0094] In one embodiment, the pipe coupling **188a** may be a 6-inch nominal size for use as a mining well casing. In some such embodiments, the pipe coupling **188a** may be approximately 14 inches in length (e.g., from the first end to the second end). Each end may be, for example, approximately 6.68 inches in length, while the central portion **116** may be approximately 0.64 inches in length. The exterior diameter **D4** of the central portion **116** may be approximately 6.6 inches. In some embodiments, the exterior diameter **D1** of the female end **114** is approximately 7.6 inches, while the exterior diameter **D6** of the female end **114** including the bulge **96** is approximately 7.7 inches.

[0095] As mentioned, the interior surfaces **120** of the female ends **114a**, **114b** each have a plurality of interior circumferential grooves **136** disposed on them. In the preferred embodiment, the number of interior circumferential grooves **136** is four. However, it is anticipated that this number could be more or less than four and even as few as one, depending upon the application.

[0096] The interior circumferential grooves **136** may be cut or similarly machined into the interior surface **120** of the male end receiving chamber **124** at various depths. The inside surface **120** of the male end receiving chamber **124** may include sloped or angled sections at various angles including approximately **130** degrees from horizontal as the inside surface **120** slopes from diameter **D2** toward the stop member **130** at diameter **D5**.

[0097] FIGS. 14-16 show a male-by-male embodiment of the pipe coupling **188b**. In this embodiment, the pipe coupling **188b** has a first male end **118a**, a second male end **118b**, and central portion **115** between (which has been removed from FIG. 15, however, for illustration purposes). Each of the male ends **118a**, **118b** terminates in a male leading edge **126** which may or may not include a bevel and has an exterior surface **128** with a circumference and diameter **D3** that is smaller than diameter **D2** of the male end receiving chamber **124** on the female ends **114a**, **114b**.

[0098] The male end **118** (**118a**, **118b**) may vary in length according to its application. Typically, the exterior diameter **D3** defined by the exterior surface **128** of the male end **118** is approximately 6.625 inches, which is smaller than the approximate interior diameter **D2** of the male end receiving chamber **124**. The male end **118** may be beveled as shown in FIG. 13 to a diameter **D7** and at an approximate angle of 10 degrees and length of approximately 0.5 inches so that the beveled male end **118** securely fits against the stop member **130** and corresponds to the interior diameter **D5** of the central portion **115** of the male end receiving chamber **124**.

[0099] Disposed on the exterior surface **128** of the male end **118** is a plurality of exterior circumferential grooves **142**. In some embodiments, each of the exterior circumferential grooves **142** may have a generally trapezoidal cross-section with a first sidewall **200**, an opposite sidewall **202**, and a bottom surface **204**. Although preferably
5 trapezoidal, it is anticipated that the exterior circumferential grooves **142** could have a variety of cross-sections.

[00100] The exterior circumferential grooves **142** on the male end **118** may be offset along the length of the male end **118** from the bevel by approximately 2 inches. The exterior circumferential grooves **142** may be spaced apart from one another along the length of the
10 male end **118**. The exterior circumferential grooves **142** on the male end **118** may be cut into the male end **118** at an approximate depth of 0.075 inches. The bottom surface **204** of the exterior circumferential grooves **142** on the male end **118** may have an approximate width of 0.1 inches. The side wall **200** of the male end **118** may be angled or sloped at an approximate angle of 60 degrees from horizontal, while the opposite side wall **202** may be at an angle of 20
15 degrees from horizontal.

[00101] Reference is sometimes made herein to the male ends **118a**, **118b** of the pipe coupling **188** being inserted into female ends **114a**, **114b**. When such reference is made, it is merely provided for explanation purposes. While the male ends **118a**, **118b** of the pipe coupling **188** are intended to be inserted into the female end of an adjacent pipe with the push-
20 lock connection system described herein (not shown), the male ends **118a**, **118b** could be inserted into the female ends **114a**, **114b** of a separate pipe coupling **188**, though doing so may not be practical. Similarly, the female ends **114a**, **114b** are intended to receive a male end **118** of an adjacent pipe **112** with the push-lock connection system described herein, though for explanation purposes herein reference is made to the male ends **118a**, **118b**. Again, such a
25 connection could be made between a pipe coupling **188** having one of more of the male ends **118a**, **118b** and a separate pipe coupling **188** having one or more female ends **114a**, **114b**, though doing so may not be practical.

[00102] As shown in FIG. 5, in the preferred embodiment of the female ends **114a**, **114b**, the interior circumferential grooves **136** have a generally rectangular cross section
30 profile with a first side wall **150**, a second sidewall **152**, a bottom surface **154**, and a shoulder **156** positioned adjacent the first side wall **150**. The shoulder **156** has a top surface **158** and a side surface **160**. In this embodiment, the band **140** is seated between the second sidewall **152** of the interior circumferential grooves **136** and the side surface **160** of the shoulder **156** such that the rigid fingers **138** extend above and over the shoulder **156**. It should also be noted that

the sidewall **150** of the interior circumferential grooves **136** may be sloped as shown in FIG. 16, giving the interior circumferential groove **136** a trapezoidal profile. When one of the male ends **118a**, **118b** is inserted into one of the female ends **114a**, **114b**, the minimal clearance there between will cause each set of rigid fingers **138** to be displaced at least partially, if not totally, into the interior circumferential grooves **136**. In this regard, the distal end **148** of each of the rigid fingers **138** (see FIG. 5) displaces into the space between the top surface **158** of the shoulder **156** and the top edge of the first sidewall **150** of the interior circumferential grooves **136**.

[00103] As shown in FIG. 15, the male leading edge **126** of the male ends **118a**, **118b** is preferably beveled. The angling, bending, or biasing of the rigid fingers **138** away from the female leading edge **122** allows the male ends **118a**, **118b** to be inserted into the male end receiving chamber **124**, and, the insertion is facilitated by the bevel at the male leading edge **126** as well as the triangular cross section profile of the exterior circumferential grooves **142**. As the male ends **118a** or **118b** are inserted, the exterior surface **128** of the male ends **118a**, **118b** contacts the sets of rigid fingers **138** and causes the rigid fingers **138** to be displaced toward the interior surface **120** of the female end **114**.

[00104] Once one of the male ends **118a**, **118b** is fully inserted into the male end receiving chamber **124** of the female end **114**, the male leading edge **126** abuts the stop member **130**. Upon full insertion of the male ends **118a**, **118b**, the female ends **114a**, **114b** the sets of rigid fingers **138** are positioned over their corresponding exterior circumferential grooves **142** on the male ends **118a**, **118b**, allowing each set of rigid fingers **138** to spring back toward its non-displaced position such that the rigid fingers **138** are received within the corresponding exterior circumferential grooves **142** on the exterior surface **128** of the male ends **118a**, **118b**. Preferably, a set of the rigid fingers **138** becomes positioned within each exterior circumferential groove such that the distal end **148** of each of the rigid fingers **138** abuts the sidewall **200** of the exterior circumferential grooves **142**. The abutment of the distal ends **148** of the rigid fingers **138** against the sidewall **200** prevents movement of the male ends **118a**, **118b** out of the male end receiving chamber **124** of the female ends **114a**, **114b**, thereby locking together the pipe coupling **188b** and the adjacent pipe **112** with the push-lock connection system described herein.

[00105] As noted and shown in the embodiment of FIGS. 5 and 6, the acute angle α created between the interior surface **120** of the female ends **114a**, **114b** and the rigid fingers **138** may be larger than the angle between the bottom surface **146** of the exterior circumferential grooves **142** and the exterior surface **128** of the male ends **118a**, **118b**. As a

result, the rigid fingers **138** bias against the bottom surface **146** of the exterior circumferential grooves **142** when fully received therein and will exert a continuous radially inward force on the bottom surface **146**.

[00106] A plurality of sets of rigid fingers **138** extend from each of the interior
 5 circumferential grooves **136** and into the male end receiving chamber **124** of the female ends **114a, 114b**. A set of these rigid fingers **138** and the fingers **138** themselves are shown in FIGS. 17-22. The rigid fingers **138** extend from the band **140** as described in the push-lock connection system described herein and shown in the enclosed FIGS. 5 and 6. In this regard, as shown in FIG. 5, an acute angle α is formed between each of the rigid fingers **138** and the
 10 interior surface **120** of the female end **114** and directed away from the female leading edge **122**. In one embodiment, the angle α formed between each of the rigid fingers **138** and the interior surface **120** may measure between 27 degrees and 30 degrees inclusive.

[00107] In some embodiments, each of the rigid fingers **138**, as well as the band **140**, may be approximately 0.030 inches thick. The band **140** may be approximately 0.04 inches
 15 tall, with extruded portions that connect the individual rigid fingers **138** to the band **140** along a bend line **182** being 0.09 inches tall. The height of each rigid finger **138** before bending is approximately 0.3 inches. The height of the band **140** in addition to the rigid fingers **138** is approximately 0.44 inches. The rigid fingers **138** may be spaced apart from one another by approximately 0.06 inches and approximately 0.24 inches to center. Each rigid finger **138** is
 20 approximately 0.18 inches wide. Teeth may be, for example, for PVC pipe couplings of nominal size 4-inch, 64 teeth, and 6-inch, 92 teeth. More than 20, 40, 60, or 80 teeth may be provided.

[00108] Although rigid, each of the rigid fingers **138** is displaceable and can be radially displaced toward and away from the interior surface **120** of the female end **114**. Further, each
 25 of the rigid fingers **138** may be biased toward a non-displaced position (as shown in FIG. 22) at an approximate angle of 40 degrees in the male end receiving chamber **124** unless acted upon by some force. Preferably, the rigid fingers **138** are made of stainless steel. However, any number of substantially rigid materials could be used, depending on the application and the tensile forces involved. In the preferred embodiment, each set of rigid fingers **138** extends
 30 from a band **140** (see FIGS. 17, 19, and 21) that is seated within each of the interior circumferential grooves **136**.

[00109] As shown in FIGS. 17-19, the band **140** may have one or more fingers **138** removed from its ends. Doing so allows for the ends of the band **140** to be attached as shown in FIG. 20. Attaching the ends of the band **140** may be accomplished by overlapping its ends

and applying a spot weld as shown in FIG. 21. In some embodiments, the two ends of the band **140** overlap approximately 0.3 inches.

[00110] FIGS. 23-25 disclose an adapter embodiment of a pipe coupling **188c** to convert an existing pipe system **110** having a threaded **192** male end **118** (not shown) into one having the female end **114a** of the push-lock connection system described herein. In this regard, the pipe coupling **188c** has a threaded **192** female end **114b** configured to receive the threaded **192** male end **118** at one end and a female end **114a** of the push-lock connection system described herein at the other end. The threaded **192** female end **114b** may be coupled to the threaded **192** male end **118** of the adjacent pipe **110** (not shown) by threading the threaded **192** female end **114b** on the threaded **192** male end **118**. Conversely, the female end **114a** of the push-lock connection system described herein of the pipe coupling **188** may be coupled as disclosed above to a male end **118** of the push-lock connection system described herein.

[00111] External male threads **192** are preferably NPT (American National Standard Taper Pipe Threads) threads **192** and are intended to be threaded into internal female threads **192** to provide a watertight connection. Internal female end threads **192** are also preferably NPT threads **192**. NPT threads **192** are typically triangular with flat crests and roots. However, it is anticipated that triangular threads **192**, square threads **192**, or other thread profiles might also be utilized.

[00112] FIGS. 26-28 disclose an adapter embodiment of the pipe coupling **188d** to convert an existing pipe system **110** having a male end **118** (not shown) that is smooth/plain and configured for receiving adhesive into one having the female end **114a** of the push-lock connection system described herein. In this regard, the pipe coupling **188d** has a female end **114b** configured to receive a plain male end **118** at one end and a female end **114a** of the push-lock connection system described herein at the other end. The male end **114b** may be coupled to the male end **118** of the existing pipe **110** (not shown) via gluing (or another adhesive) or welding the exterior surface **128** of the smooth **194** male end **118** to the interior surface **120** of the smooth **194** female end **114b**. Conversely, the female end **114a** of the push-lock connection system described herein of the pipe coupling **188** may be coupled as disclosed above to a male end **118** of the push-lock connection system described herein.

[00113] FIGS. 29-31 disclose an adapter embodiment of the pipe coupling **188e** to convert an existing pipe system **110** having a threaded **192** male end **114** (not shown) to having a male end **118a** of the push-lock connection system described herein. In this regard, the pipe coupling **188** has a threaded **192** female end **114b** configured to receive the threaded

192 male end **118** at one end and a male end **118a** of the push-lock connection system described herein at the other end. The threaded **192** male end **118** of the existing pipe **110** (not shown) may be threaded into the threaded **192** female end **114b** of the pipe coupling **188**. Conversely, the male end **118a** of the push-lock connection system described herein of the pipe coupling **188** may be coupled as disclosed above to a female end **114** of the push-lock connection system described herein.

[00114] FIGS. 32-34 disclose an adapter embodiment of the pipe coupling **188f** to convert an existing pipe system **110** having a male end **118** (not shown) into a male end **118** having the push-lock connection system described herein. In this regard, the pipe coupling **188** has a smooth female end **114a** at one end and a male end **118b** of the push-lock connection system described herein at the other end. The exterior surface **128** of the smooth male end **118** of the existing pipe **110** (not shown) may be coupled to the interior surface **120** of the smooth female end **114a** of the pipe coupling **188f**. Conversely, the male end **118b** of the push-lock connection system described herein of the pipe coupling **188f** may be coupled as disclosed above to a female end **114** of the push-lock connection system described herein.

[00115] FIGS. 35-38 disclose a pipe coupling **188g** to extend an existing pipe system **110** having one type of end of the push-lock connection system described herein (i.e., a male **118** or female end **114**). In this regard, the pipe coupling **188g** has a female end **114a** of the push-lock connection system described herein at one end and a male end **118b** of the push-lock connection system described herein at the other end. The female end **114a** of the push-lock connection system described herein of the pipe coupling **188g** may be coupled as disclosed above to a male end of the push-lock connection system described herein. Conversely, the male end **118b** of the push-lock connection system described herein of the pipe coupling **188** may be coupled as disclosed above to a female end **114** of the push-lock connection system described herein of the adjacent pipes **110**, **112**.

[00116] FIGS. 39-41 disclose a pipe coupling **188h** to convert an existing pipe system **110** having a smooth female end **114** (not shown) to a male end **118** having the push-lock connection system described herein. In this regard, the pipe coupling **188h** has a male end **118a** that is smooth **194** at one end and a male end **118b** having the push-lock connection system described herein at the other end. The interior surface **120** of the smooth **194** female end **114** of the adjacent pipe **110** (not shown) may be coupled to the exterior surface **128** of the male end **118a** of the pipe coupling **188h**. Conversely, the male end **118b** of the push-lock connection system described herein of the pipe coupling **188** may be coupled as disclosed above to a female end **114** of the push-lock connection system described herein.

[00117] FIGS. 42-44 disclose a pipe coupling **188i** to convert an existing pipe system **110** having a threaded **192** female end **114** (not shown) to a male end **118** having the push-lock connection system described herein. In this regard, the pipe coupling **188** has a threaded **192** male end **118a** of the push-lock connection system described herein at one end and a male end **118b** having the push-lock connection system described herein at the other end. The threaded **192** female end **114** of the existing pipe **110** (not shown) may be threaded onto the threaded **192** male end **118a** of the pipe coupling **188**. Conversely, the male end **118b** of the push-lock connection system described herein of the pipe coupling **188i** may be coupled as disclosed above to a female end **114** of the push-lock connection system described herein of the existing pipe system **110** or a similar adjacent pipe **112**.

[00118] FIGS. 45-47 disclose a pipe coupling **188a** as shown in FIGS. 9-13 to convert a pipe having a threaded male end **118** (not shown) to a female end **114b** of the push-lock connection system described herein. In this regard, the pipe coupling **188a** has a threaded **192** female end **114a** at one end and a female end **118b** having the push-lock connection system described herein at the other end. The threaded **192** male end **118** of an adjacent pipe (not shown) may be threaded into the threaded **192** female end **114a** of the pipe coupling **188a**. Conversely, the female end **114b** of the push-lock connection system described herein having the pipe coupling **188a** may be coupled as disclosed above to a male end **118** of the push-lock connection system described herein of an adjacent pipe. As depicted in FIGS. 46 and 47 the band **140** of rigid fingers **138** may be installed in the grooves **136** in the interior surface **120** of the female end **114b**.

[00119] Although specific embodiments have been illustrated and described herein, those of ordinary skill in the art appreciate that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiments shown and that the embodiments herein have other applications in other environments. This application is intended to cover any adaptations or variations of the present disclosure. The following claims are in no way intended to limit the scope of the disclosure to the specific embodiments described herein. While the foregoing is directed to embodiments of a pipe coupling, other and further embodiments may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

What is claimed is:

1. A pipe coupling for connecting adjacent pipes, comprising:
 - a first end of a body of the pipe coupling comprising a first connection type;
 - a second end of a body of the pipe coupling opposite from, integral with, and seamless with the first end and comprising a second connection type, wherein the second connection type comprises:
 - a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling, the interior surface of the female end defining a receiving chamber;
 - at least one interior circumferential first groove formed in the interior surface of the female end;
 - a band seated within the at least one circumferential first groove; and
 - a plurality of rigid fingers formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, the plurality of rigid fingers being displaceable,
 - wherein the first connection type is a male end having a male leading edge and an exterior surface, the exterior surface having a circumference smaller in diameter than an inside diameter of the receiving chamber of the female end, wherein at least one exterior circumferential groove is defined on the exterior surface of the male end, said at least one exterior circumferential groove having a trapezoidal groove cross-section, said at least one exterior circumferential groove defined by a first sidewall, a second sidewall and a bottom surface, said first and second sidewalls residing in non-perpendicular arrangement to the bottom surface, with said at least one exterior circumferential groove being sized and

positioned to receive therein the plurality of rigid fingers extending from a corresponding at least one interior first circumferential groove in a female end of an adjacent pipe configured as the second connection type.

2. The pipe coupling of claim 1, wherein the female end defines a sight window comprising an opening extending through the thickness of the female end and configured to permit viewing of the position of a male end of an adjacent pipe within the receiving chamber, and wherein the exterior surface of the male end includes an indication that when viewed through the sight window indicates that the male end has been fully inserted into the female end.

3. The pipe coupling of claim 2, wherein the indication on the exterior surface of the male end comprises a coating differing in appearance from the exterior surface.

4. The pipe coupling of claim 2, wherein the indication on the exterior surface of the male end comprises a groove defined in the exterior surface.

5. A pipe coupling for connecting adjacent pipes, comprising:
a first end of a body comprising a first connection type;
a second end of a body opposite from, integral with, and seamless with the first end and comprising a second connection type, wherein the second connection type comprises:
a male end having a male leading edge and an exterior surface, the exterior surface having a circumference, wherein at least one exterior circumferential groove is defined on the exterior surface of the male end, said at least one exterior circumferential

groove having a trapezoidal groove cross-section, said at least one exterior circumferential groove defined by a first sidewall, a second sidewall and a bottom surface, said first and second sidewalls residing in non-perpendicular arrangement to the bottom surface, with said at least one exterior circumferential groove being sized and positioned to receive therein a plurality of rigid fingers, wherein the male end is configured to be received by a third connection type on an adjacent pipe, the third connection type comprising:

a female end with an interior surface, a thickness, and a female leading edge terminating the female end of the coupling, the interior surface of the female end defining a receiving chamber with an interior diameter larger than the diameter of the exterior of the male end; at least one interior circumferential groove formed in the interior surface of the female end;

a band seated within the at least one circumferential groove; and

a plurality of rigid fingers formed continuously with and extending from the band into the receiving chamber at an acute angle directed away from the female leading edge, the plurality of rigid fingers being displaceable to be received in a corresponding exterior circumferential groove of the male end.

6. The pipe coupling of claim 5, wherein the first connection type is the same as the second connection type.

7. The pipe coupling of claim 5, wherein the first connection type is a female threaded end, configured to at least partially receive a threaded male end of an adjacent pipe, or a threaded

male end configured to be at least partially received by a threaded female end of an adjacent pipe.

8. The pipe coupling of claim 5, wherein the first connection type is a smooth female end configured to at least partially receive a smooth male end of an adjacent pipe, or a smooth male end configured to be at least partially received by a smooth female end of an adjacent pipe.

9. The pipe coupling of claim 5, wherein the exterior surface of the male end includes an indication configured to indicate that the male end has been fully inserted into the female end when viewed through a sight window defined in the female end, the sight window comprising an opening extending through the thickness of the female end to permit viewing of the position of a male end of an adjacent pipe within the receiving chamber.

10. The pipe coupling of claim 9, wherein the indication on the exterior surface of the male end comprises a coating differing in appearance from the exterior surface.

11. The pipe coupling of claim 9, wherein the indication on the exterior surface of the male end comprises a groove defined in the exterior surface.

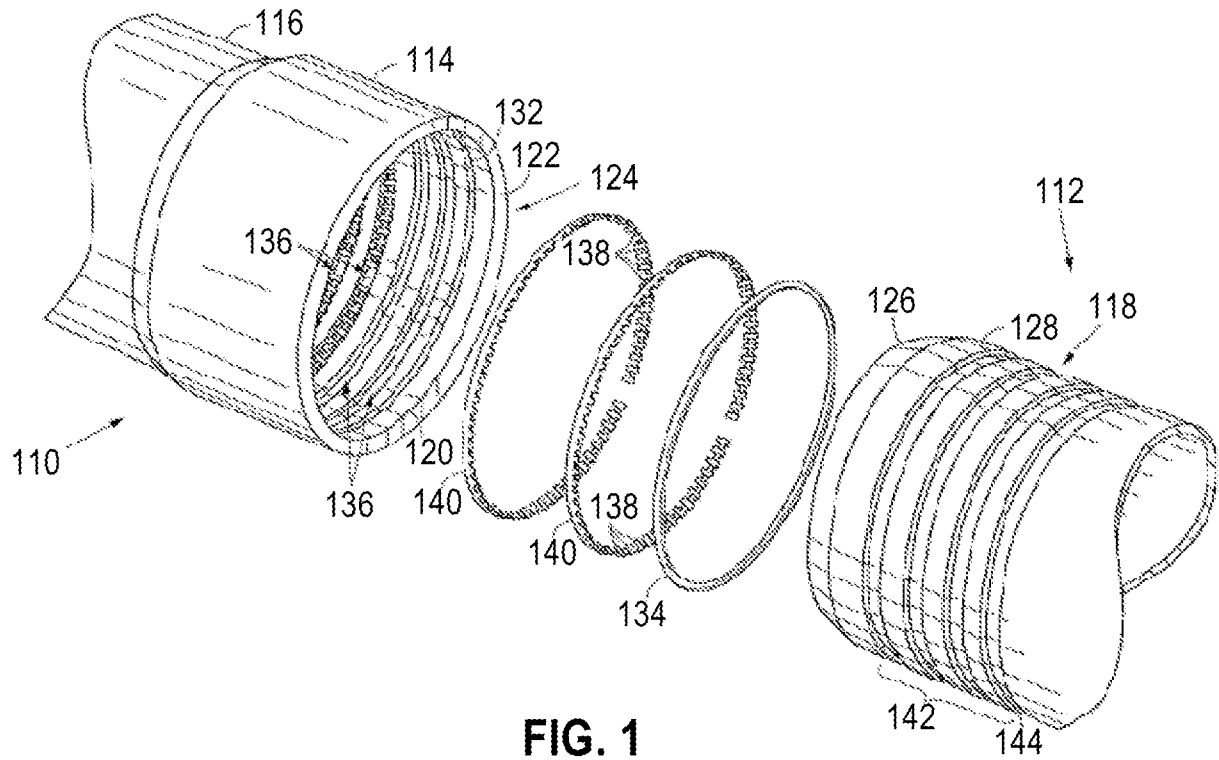


FIG. 1

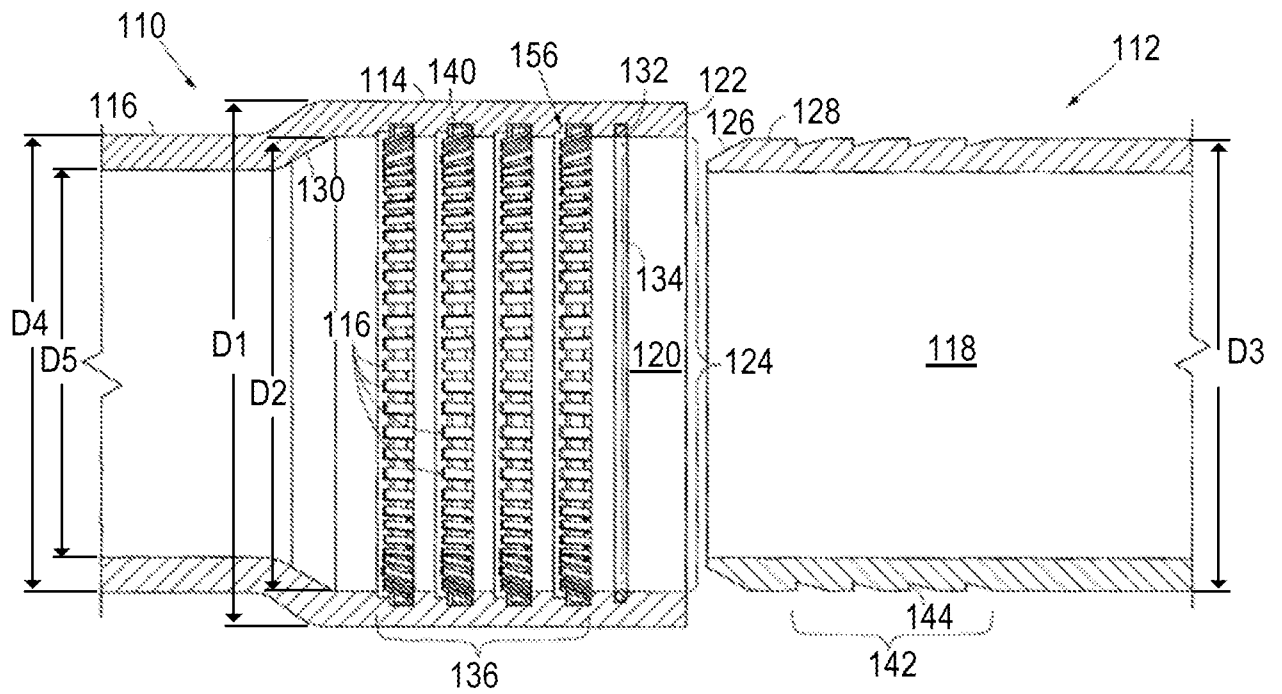


FIG. 2

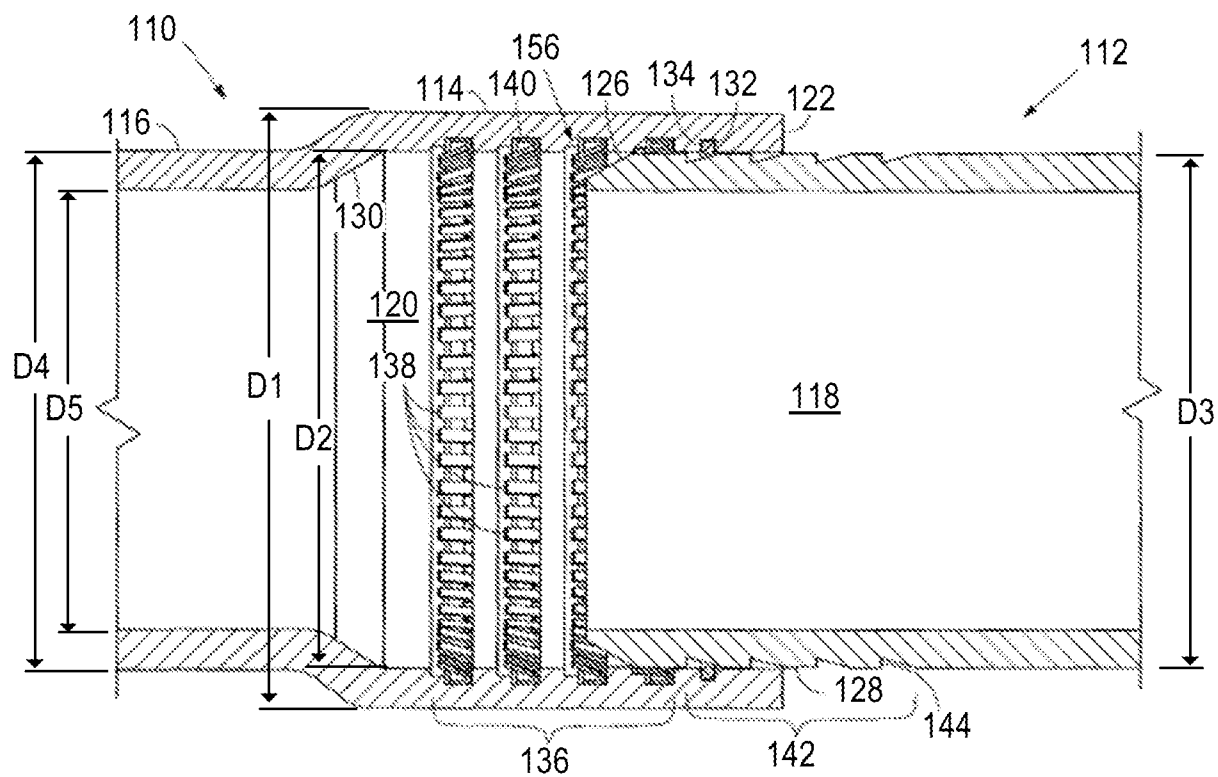


FIG. 3

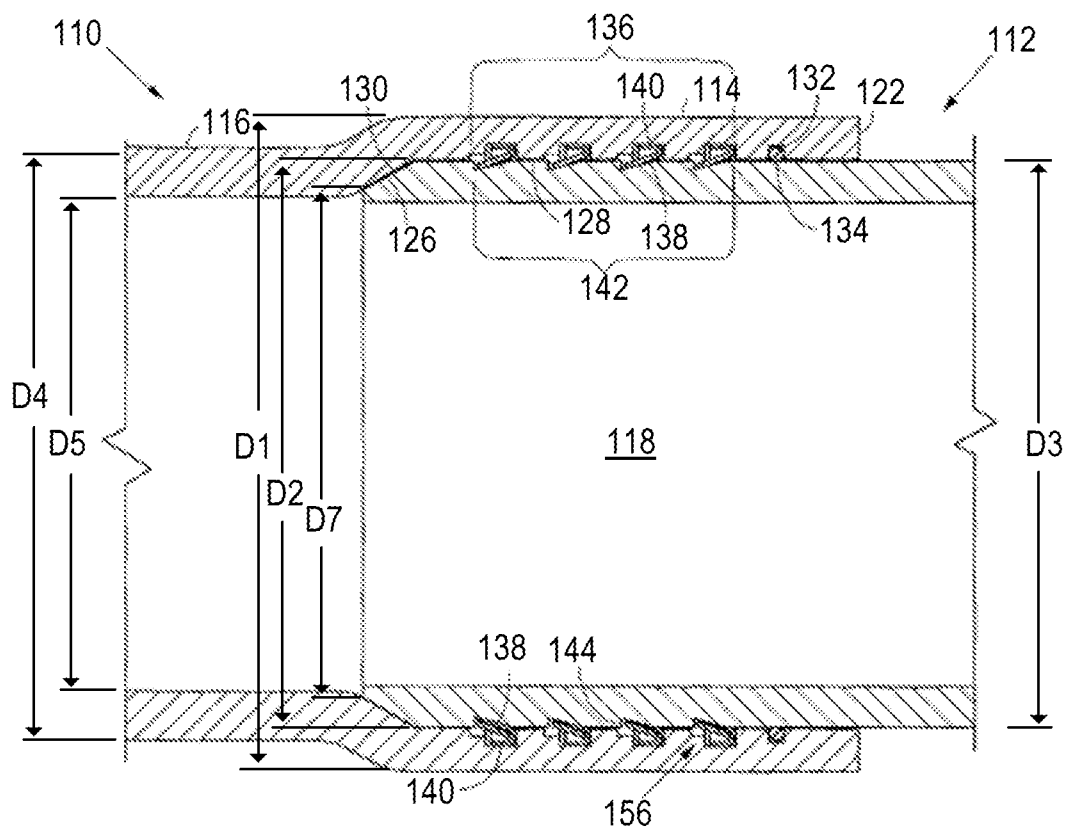


FIG. 4

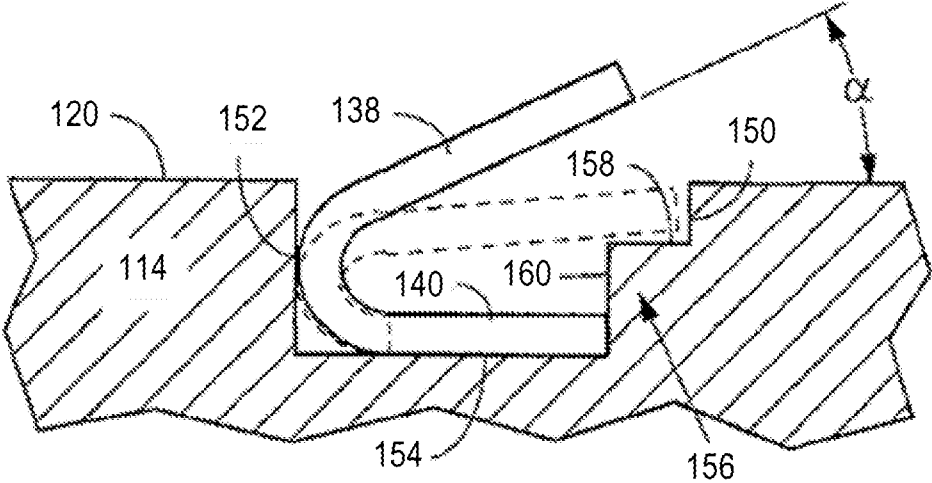


FIG. 5

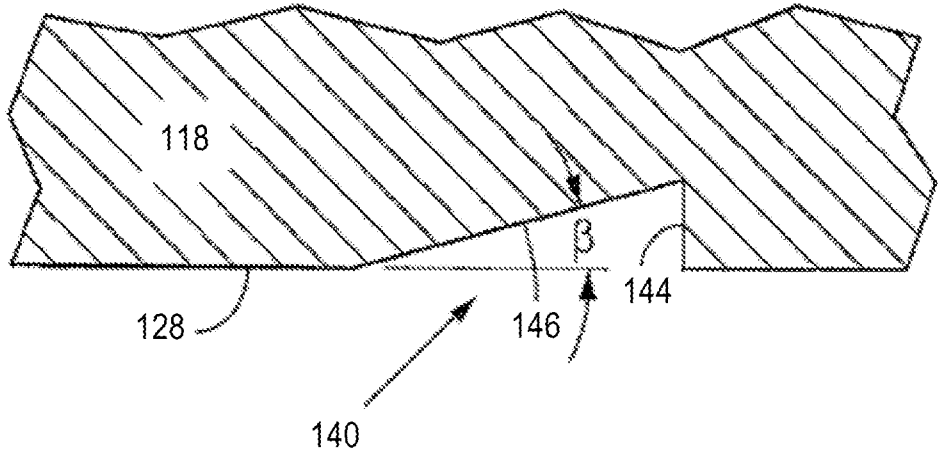


FIG. 6

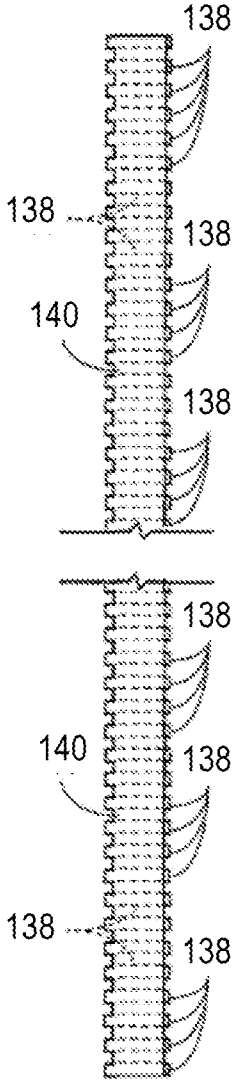


FIG. 7A

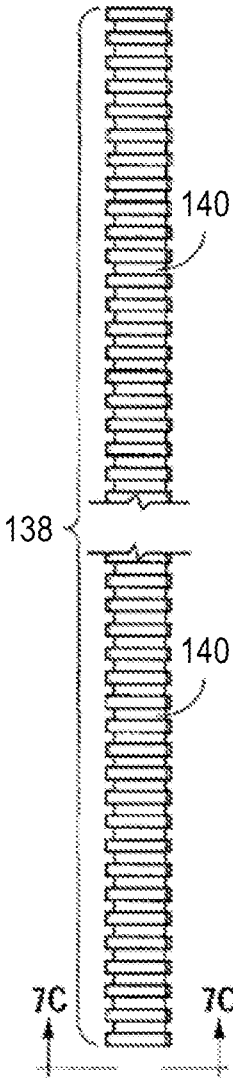


FIG. 7B

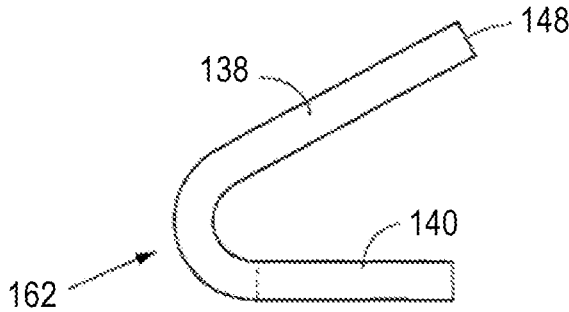


FIG. 7C

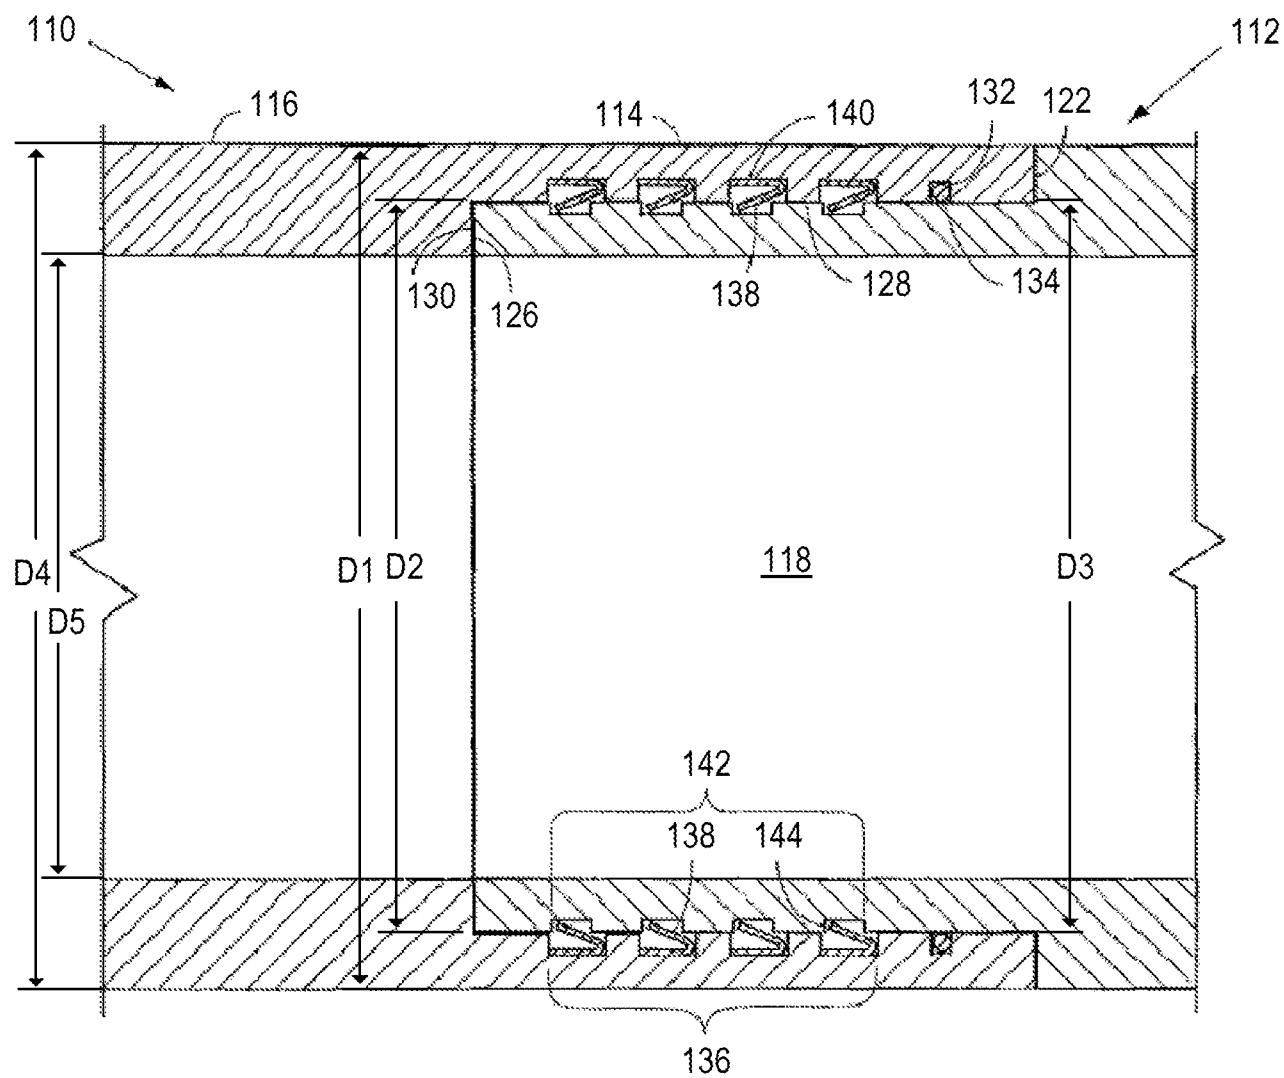
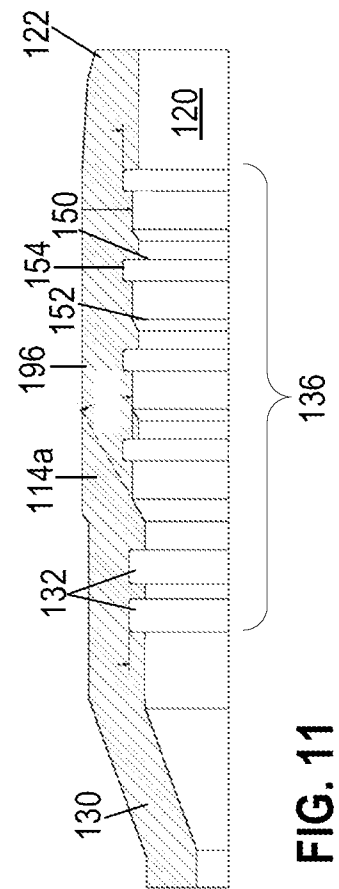
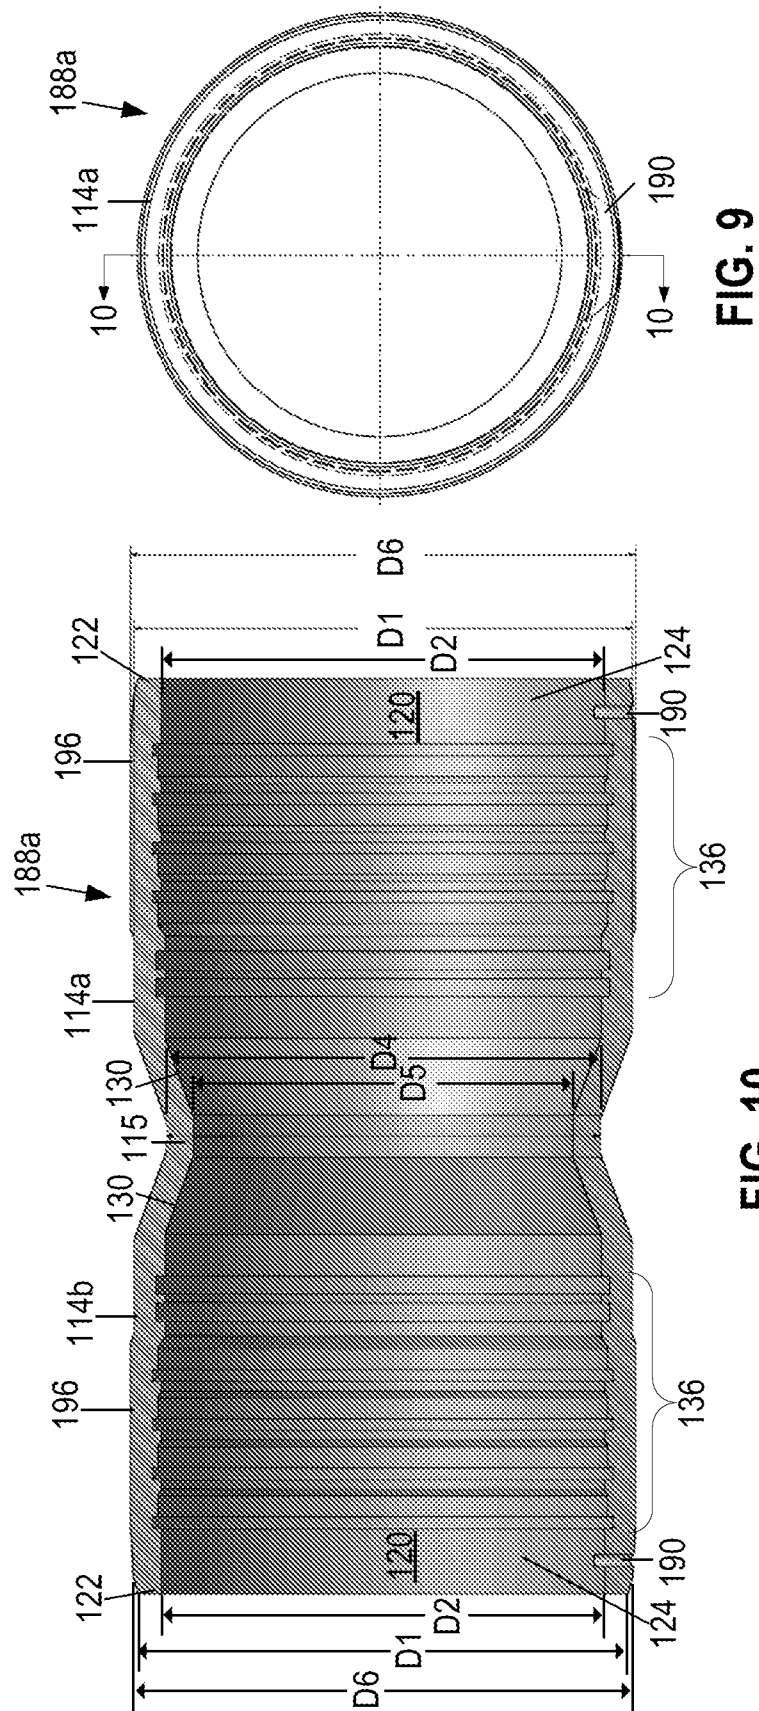


FIG. 8




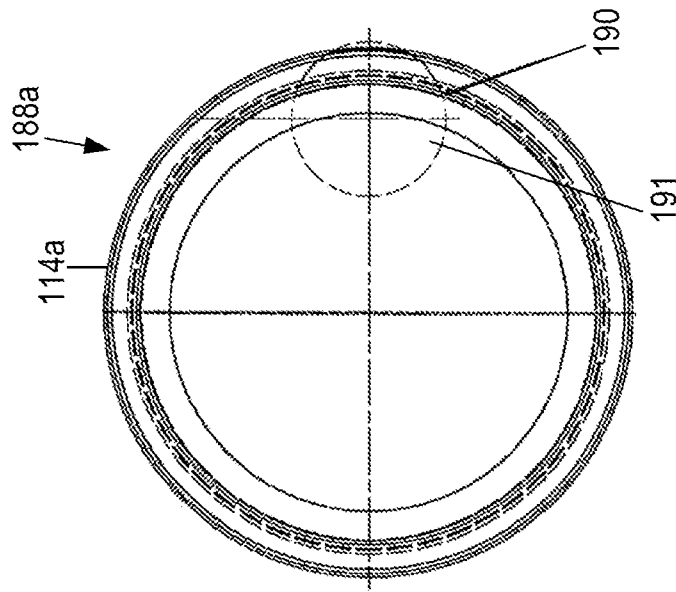


FIG. 12

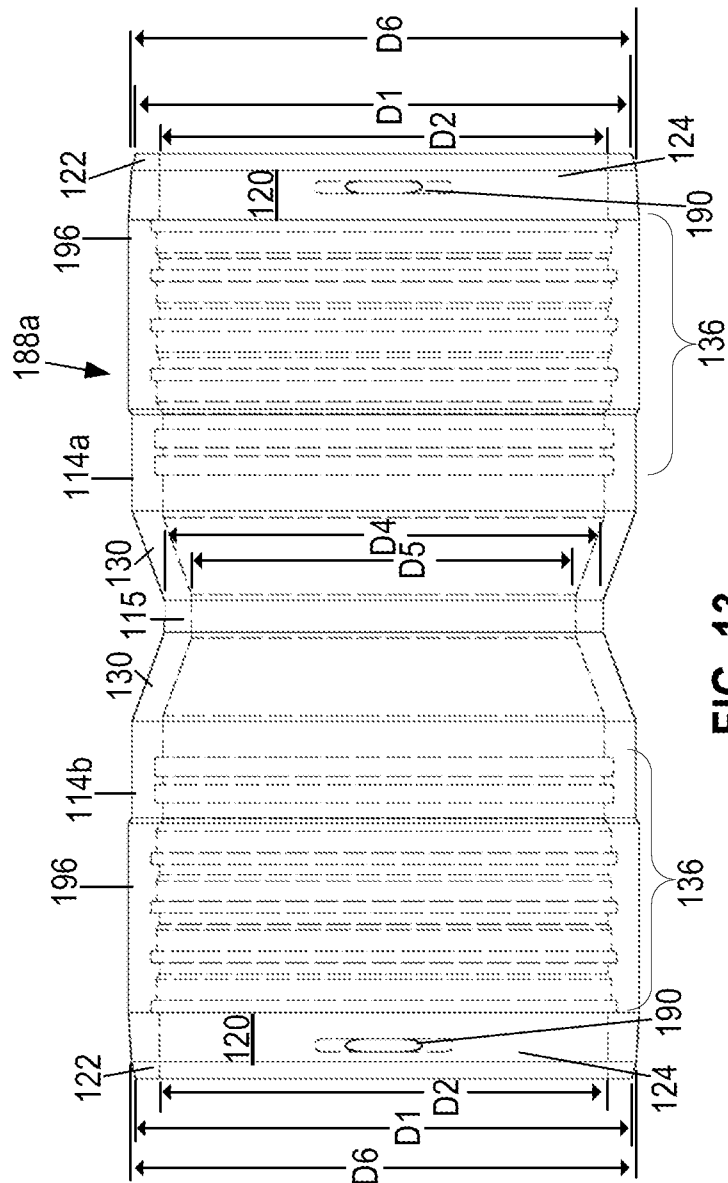

13
G.
F.

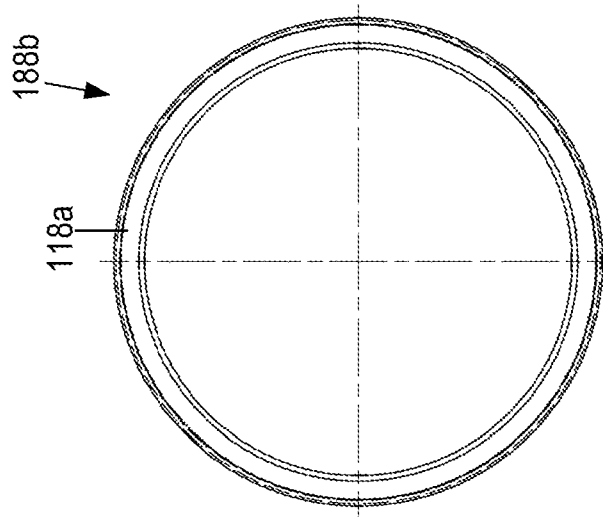


FIG. 14

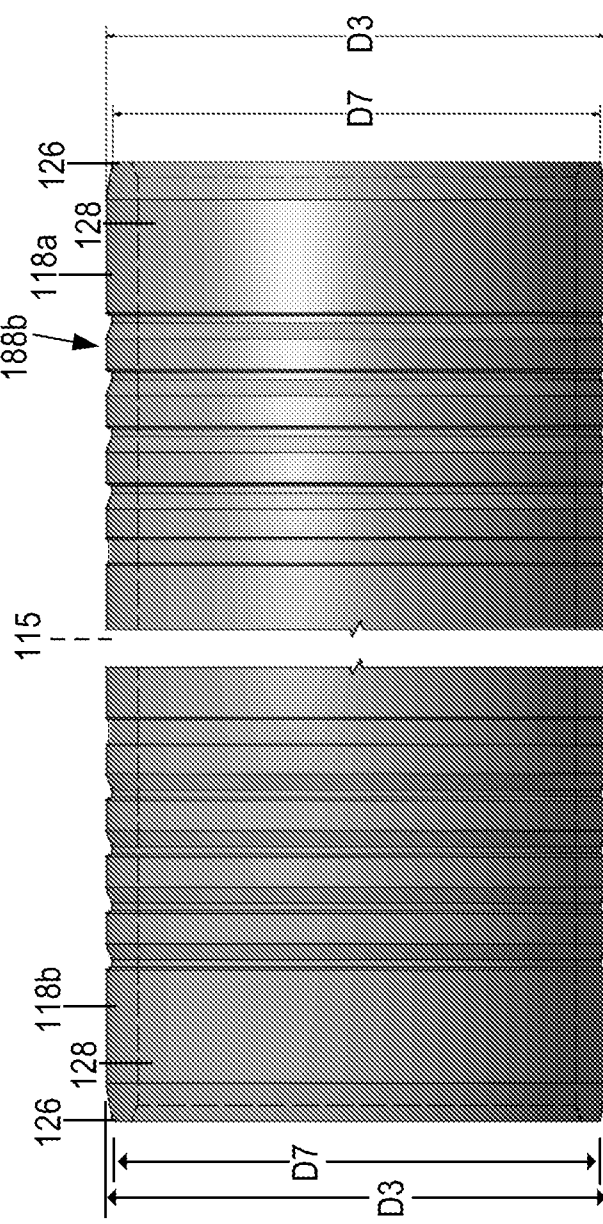


FIG. 15

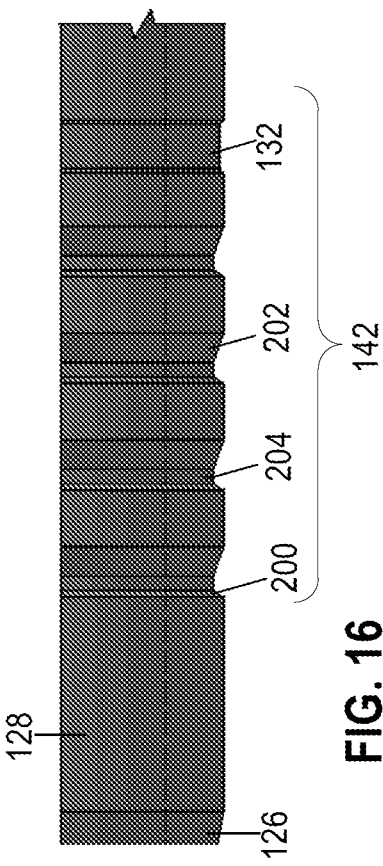


FIG. 16

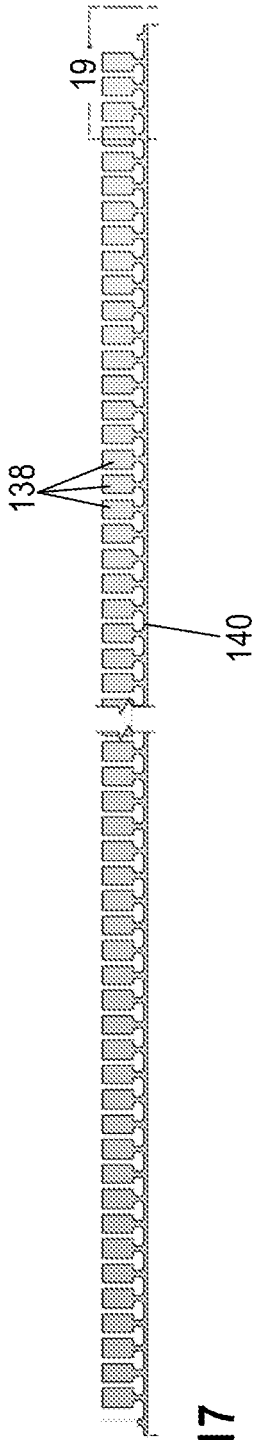


FIG. 17

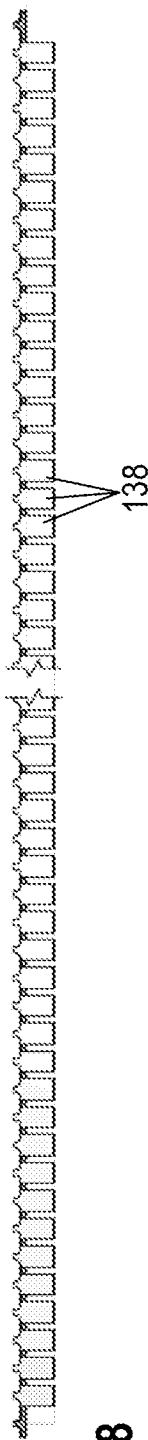


FIG. 18

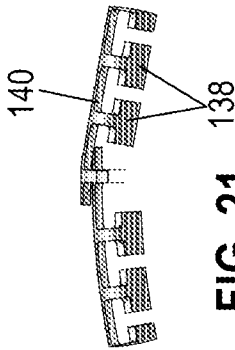


FIG. 21

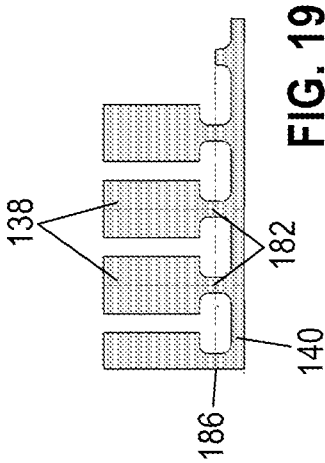


FIG. 19

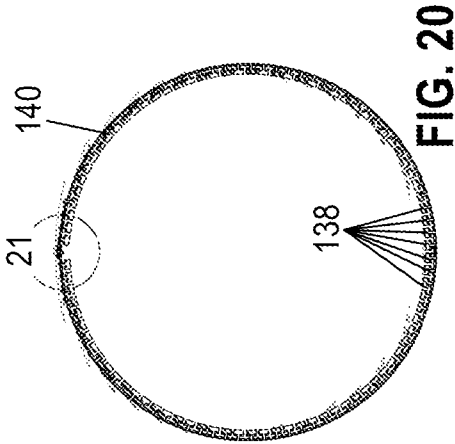


FIG. 20

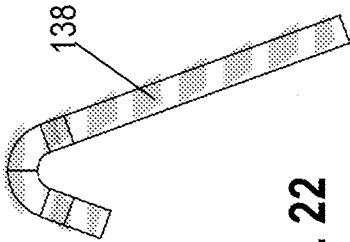


FIG. 22

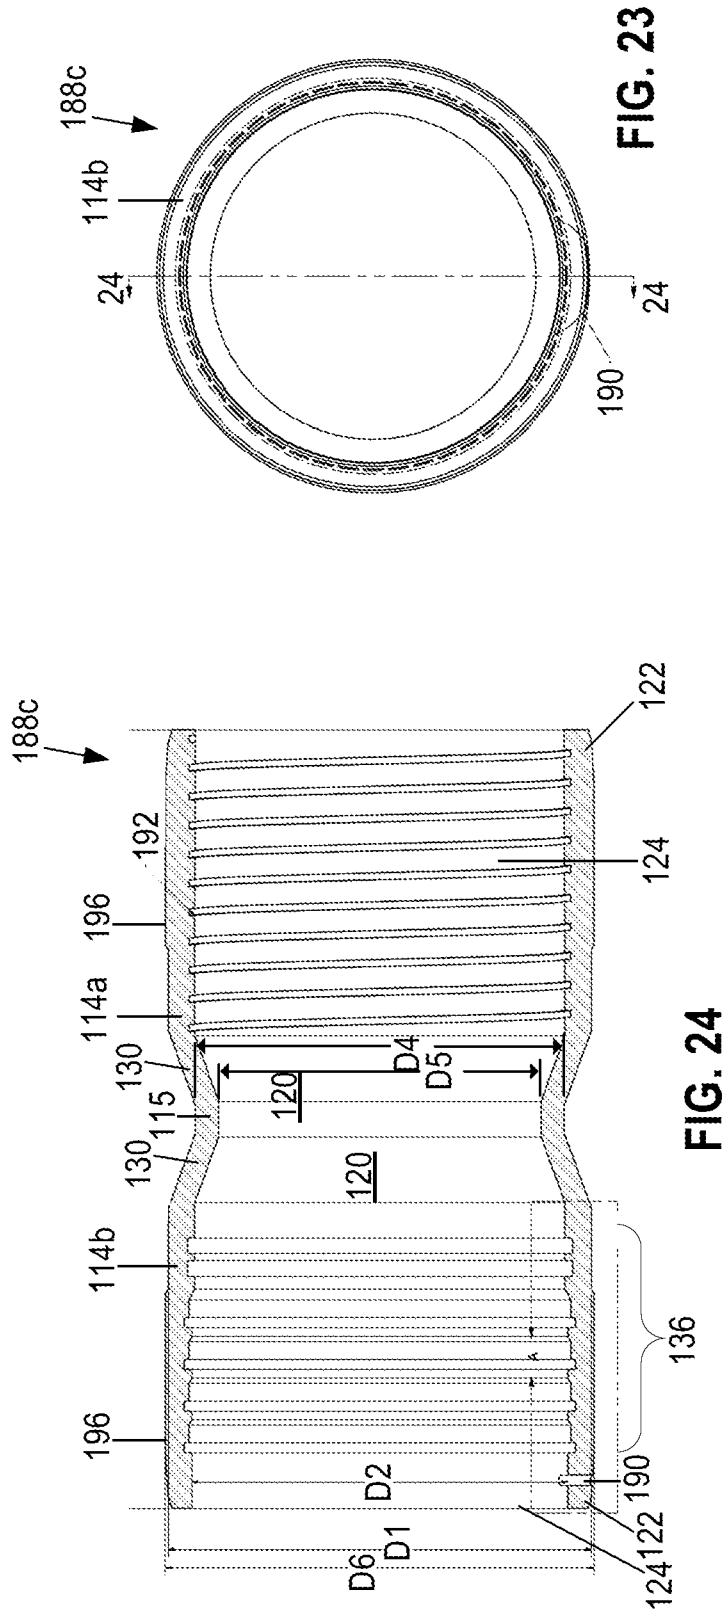


FIG. 23

FIG. 24

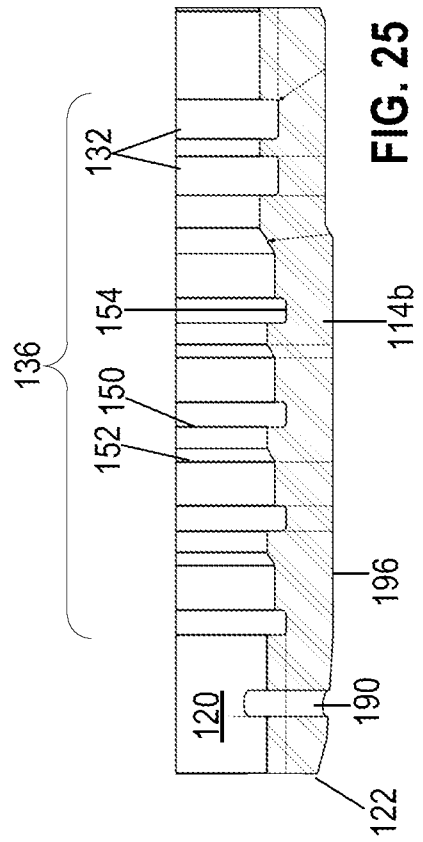
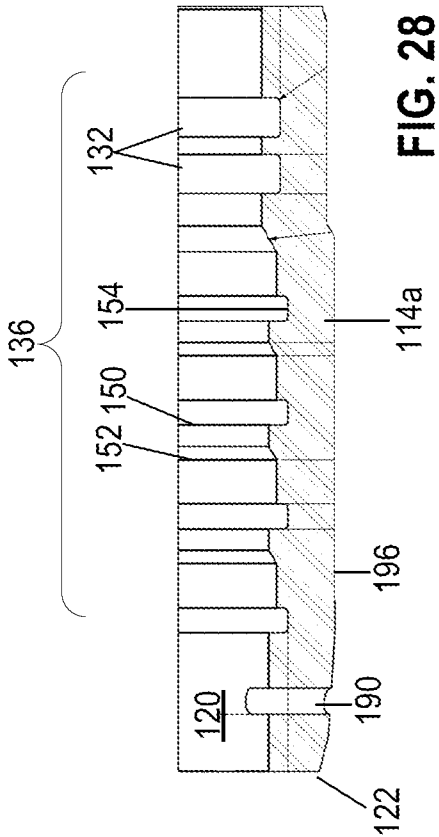
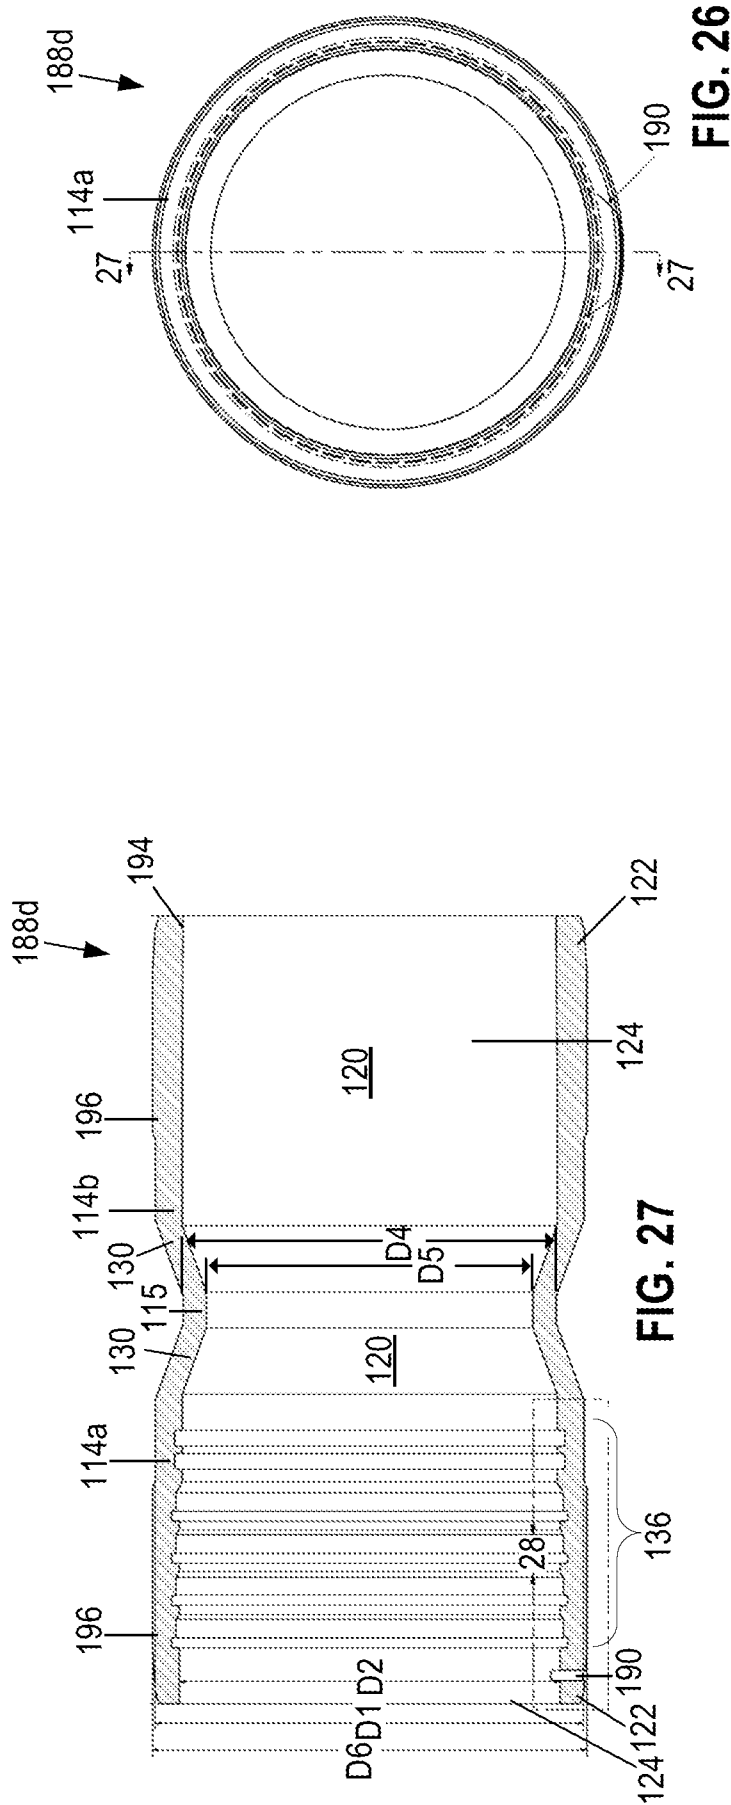


FIG. 25



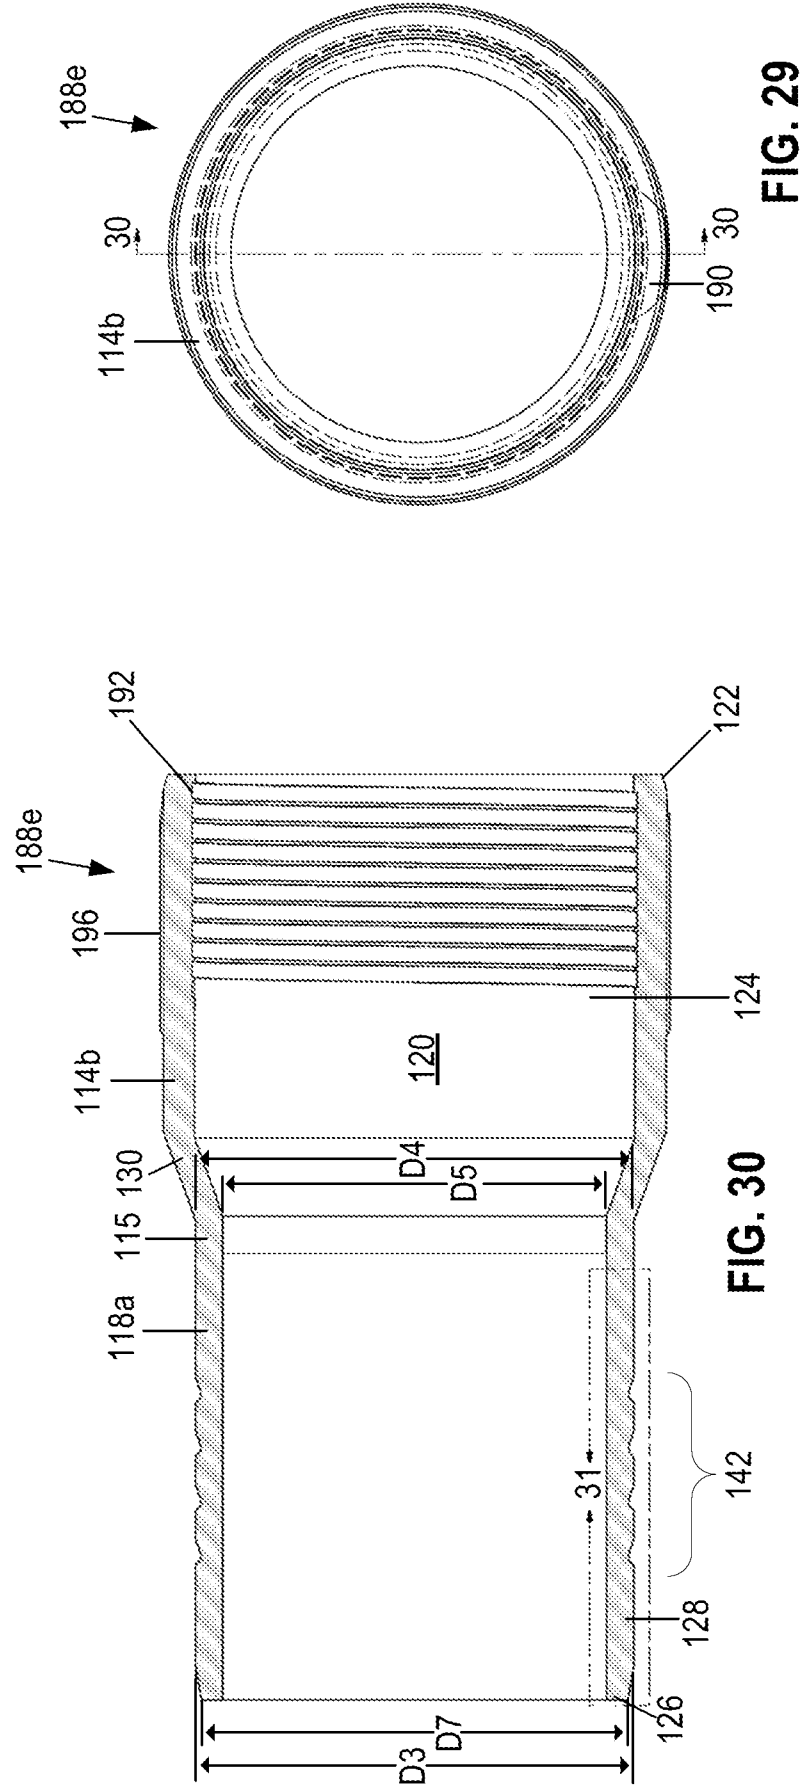


FIG. 29

FIG. 30

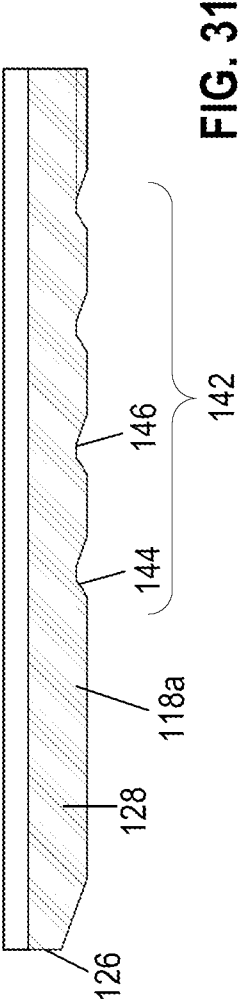


FIG. 31

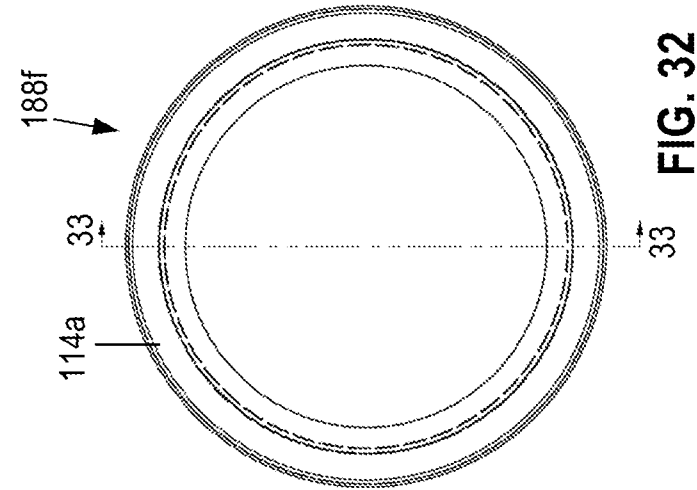


FIG. 32

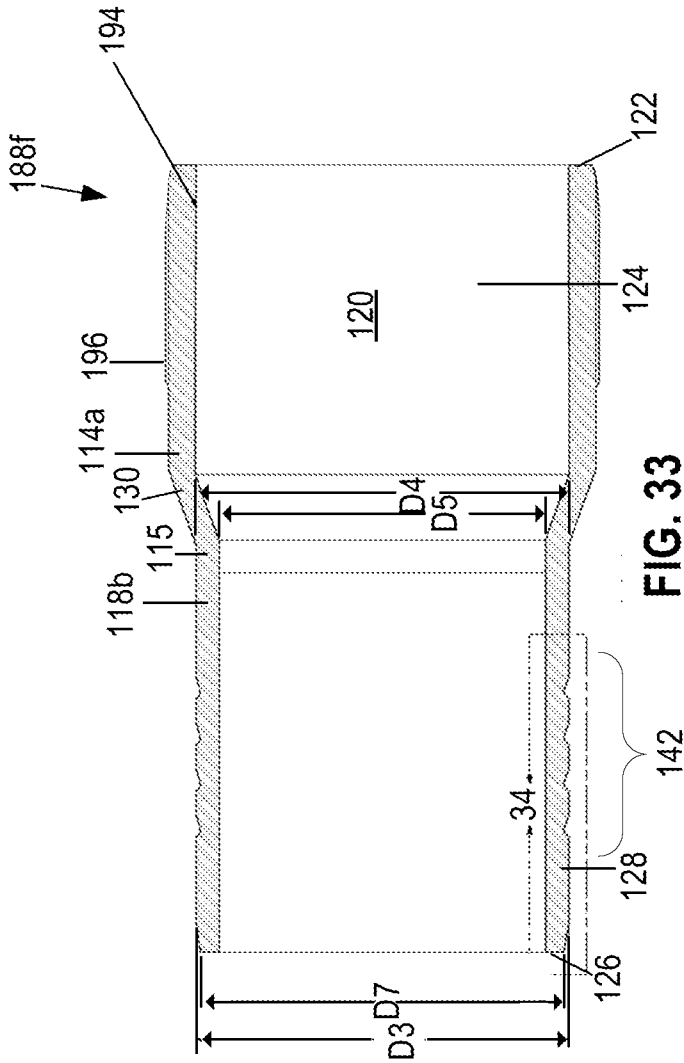


FIG. 33

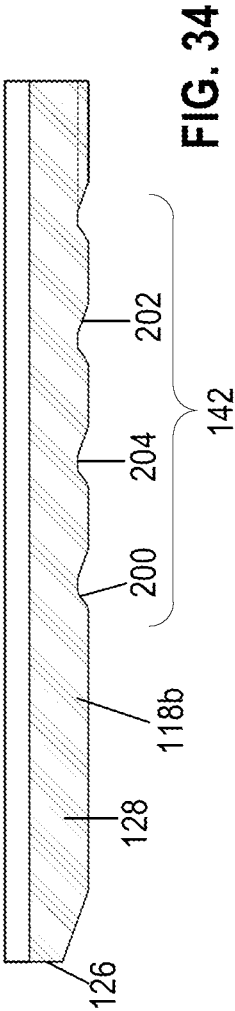
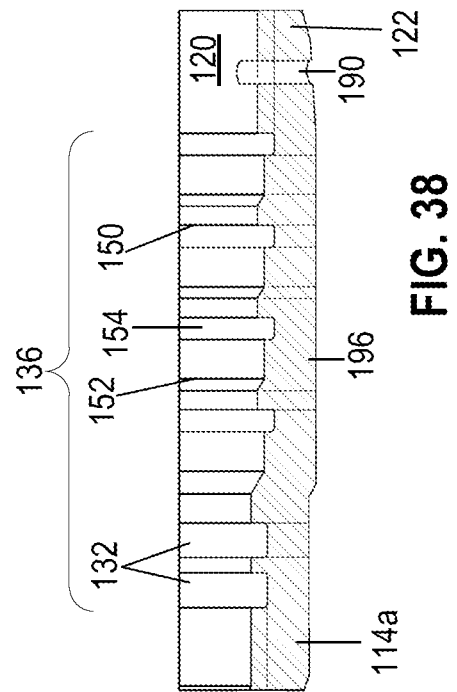
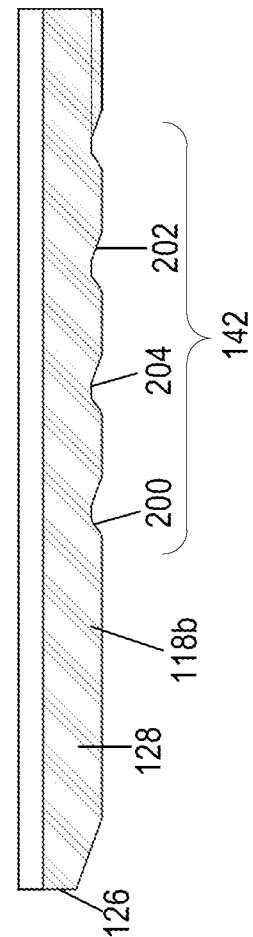
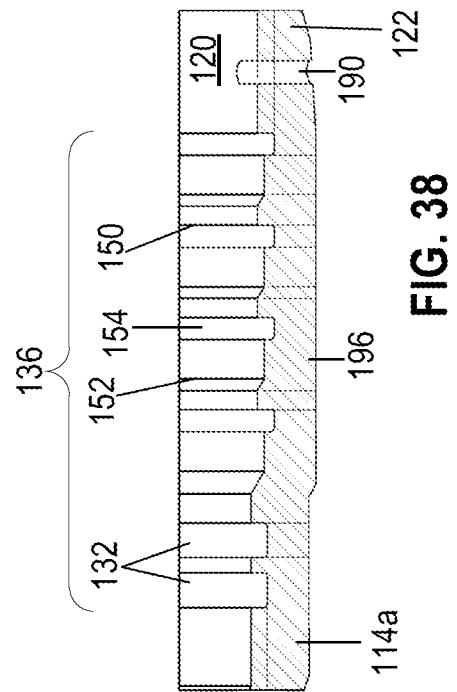
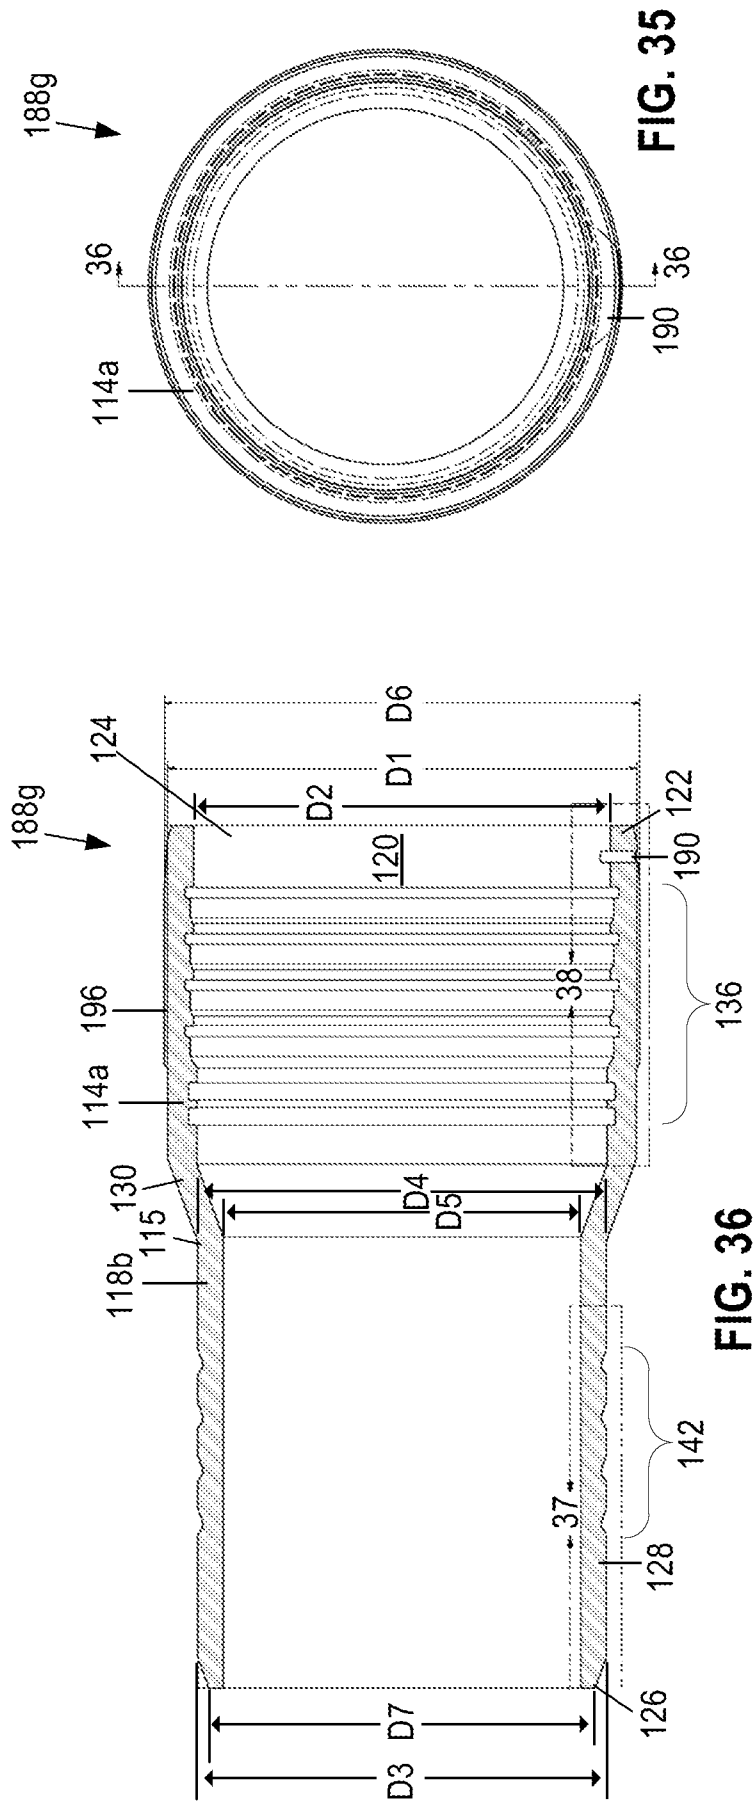


FIG. 34



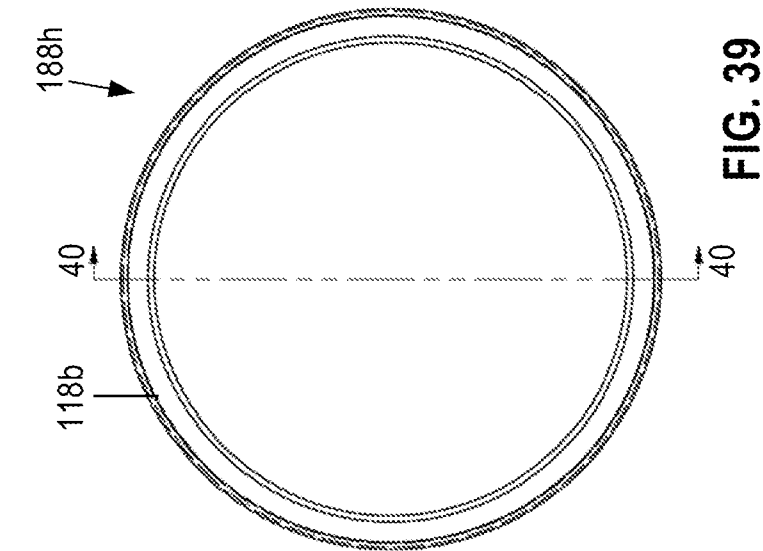


FIG. 39

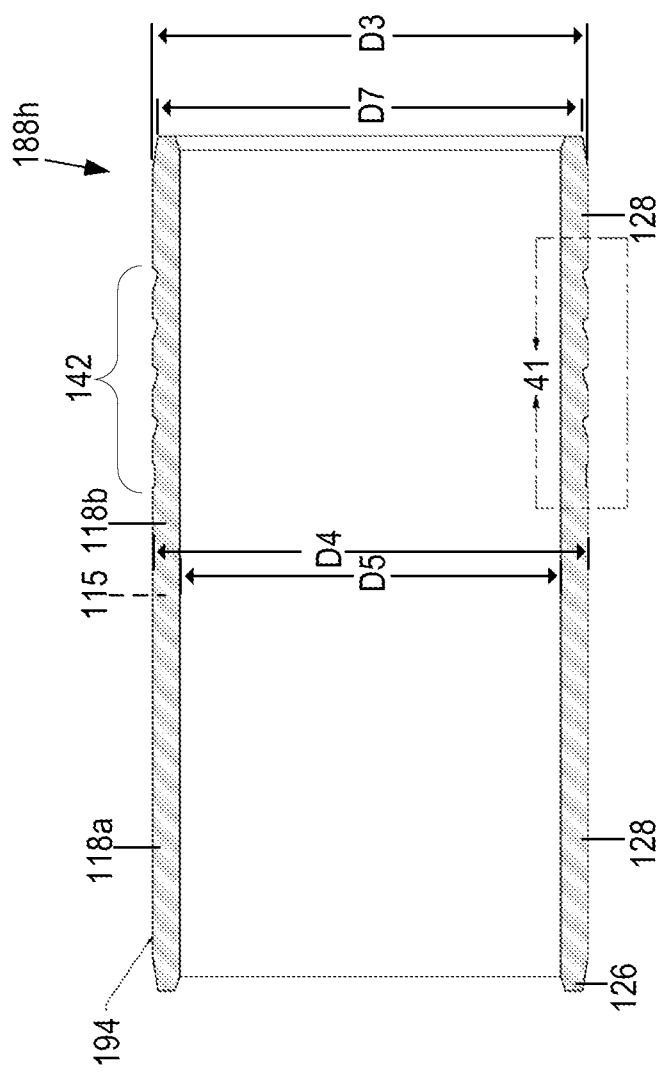


FIG. 40

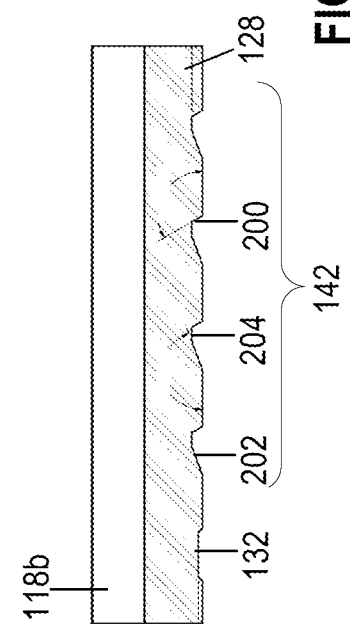


FIG. 41

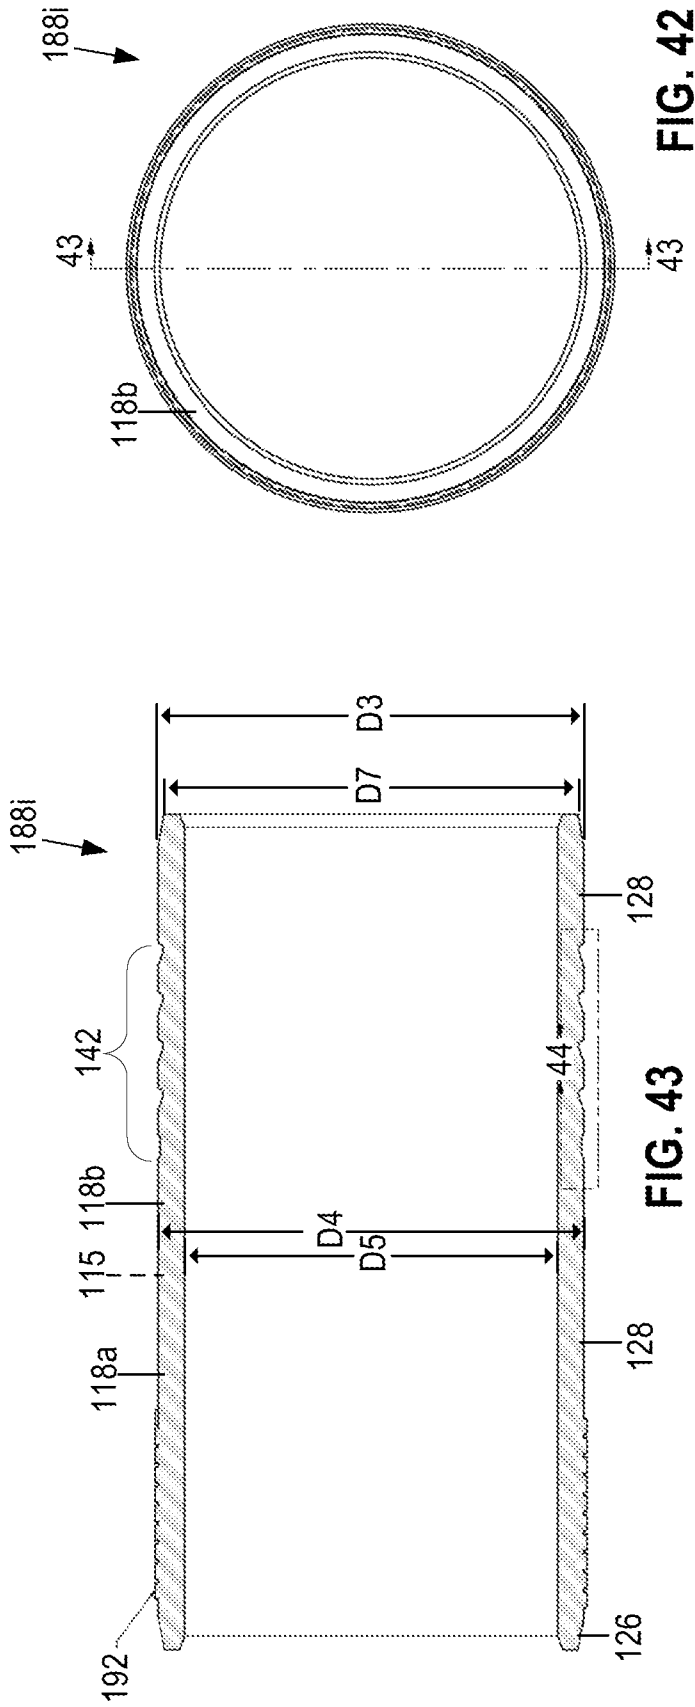


FIG. 42

FIG. 43

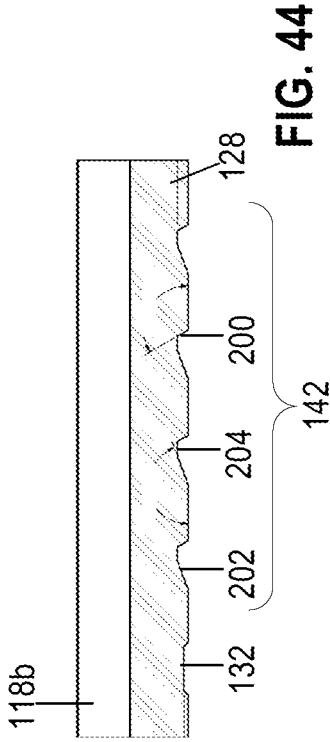


FIG. 44

