



US0D1033656S

(12) **United States Design Patent**  
**Osse**

(10) **Patent No.:** **US D1,033,656 S**

(45) **Date of Patent:** **\*\* Jul. 2, 2024**

- (54) **DUAL-ARM RETENTION SLING**
- (71) Applicant: **ARMBIE LLC**, Tulsa, OK (US)
- (72) Inventor: **Christian Osse**, Tulsa, OK (US)
- (73) Assignee: **ARMBIE LLC**, Tulsa, OK (US)
- (\*\*) Term: **15 Years**
- (21) Appl. No.: **29/771,100**

- 3,371,663 A \* 3/1968 Apgar ..... A61F 5/3738  
602/4
- 4,071,022 A \* 1/1978 Ewers ..... A61F 5/3738  
602/4
- 4,526,164 A \* 7/1985 Bihl ..... A61F 5/3738  
D24/190

(Continued)

**FOREIGN PATENT DOCUMENTS**

- GB 6067462 \* 8/2019 ..... A41D 27/20

**OTHER PUBLICATIONS**

Armbie, [site visited Feb. 23, 2023]. Available from Internet. URL: <https://www.youtube.com/watch?v=nIekJ3fjYGA> (Year: 2021).\*

*Primary Examiner* — T Chase Nelson  
*Assistant Examiner* — Kelly L Gross  
(74) *Attorney, Agent, or Firm* — Oliff PLC

(57) **CLAIM**

The ornamental design for a dual-arm retention sling, as shown and described.

- (22) Filed: **Feb. 19, 2021**
- (51) **LOC (14) Cl.** ..... **24-04**
- (52) **U.S. Cl.**  
USPC ..... **D24/190**
- (58) **Field of Classification Search**  
USPC ..... D24/168, 186, 187, 188–190, 191, 192;  
D29/101.1–101.4; D2/719, 718, 741,  
D2/823, 826, 796; D6/602, 603  
CPC ..... A41B 13/06; A41B 13/065; A47G 9/083;  
A61F 5/3738; A41D 27/20  
See application file for complete search history.

(56) **References Cited**


**U.S. PATENT DOCUMENTS**

- 1,156,757 A \* 10/1915 Collett ..... A41B 9/06  
2/113
- D59,772 S \* 11/1921 Pruzan ..... A61F 5/3738  
D2/706
- 1,621,323 A \* 3/1927 Horn ..... A61F 5/3746  
2/92
- 1,797,226 A \* 3/1931 Chumbley ..... A41D 23/00  
2/91
- D159,816 S \* 8/1950 Leser ..... D2/707
- 2,539,677 A \* 1/1951 Teare ..... A61F 5/3738  
D24/190
- 2,560,243 A \* 7/1951 Peterson ..... A61F 5/3746  
D24/190
- 2,575,791 A \* 11/1951 Brown ..... A41D 1/18  
2/106
- 3,144,660 A \* 8/1964 Portaro ..... A41D 15/00  
2/84

**DESCRIPTION**

FIG. 1 is a front, left-side, top perspective view of the dual-arm retention sling in use, showing the new design; FIG. 2 is a front, top perspective view thereof; FIG. 3 is a front elevational view thereof; FIG. 4 is a rear elevational view thereof; FIG. 5 is a right-side elevational view thereof; FIG. 6 is a top plan view thereof; FIG. 7 is a front elevational view thereof, in use; FIG. 8 is a rear elevational view thereof, in use; FIG. 9 is a left-side elevational view thereof, in use; FIG. 10 is a right-side elevational view thereof, in use; and, FIG. 11 is a top plan view thereof, in use. The broken lines depict environment and form no part of the claimed design.

**1 Claim, 11 Drawing Sheets**

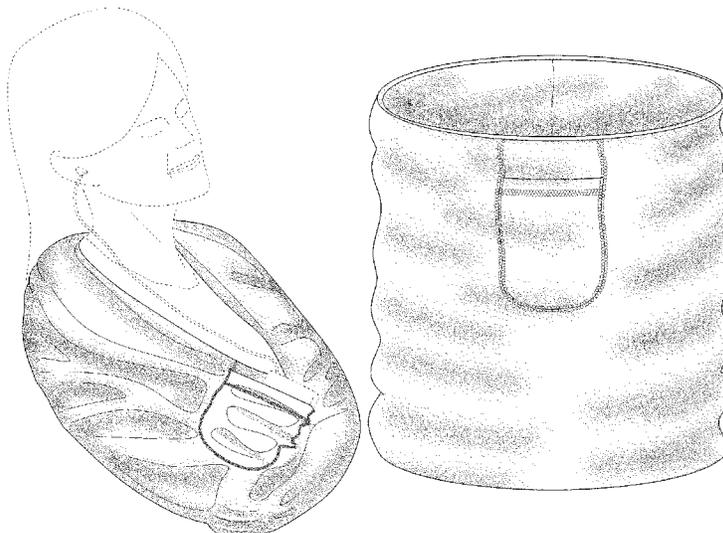



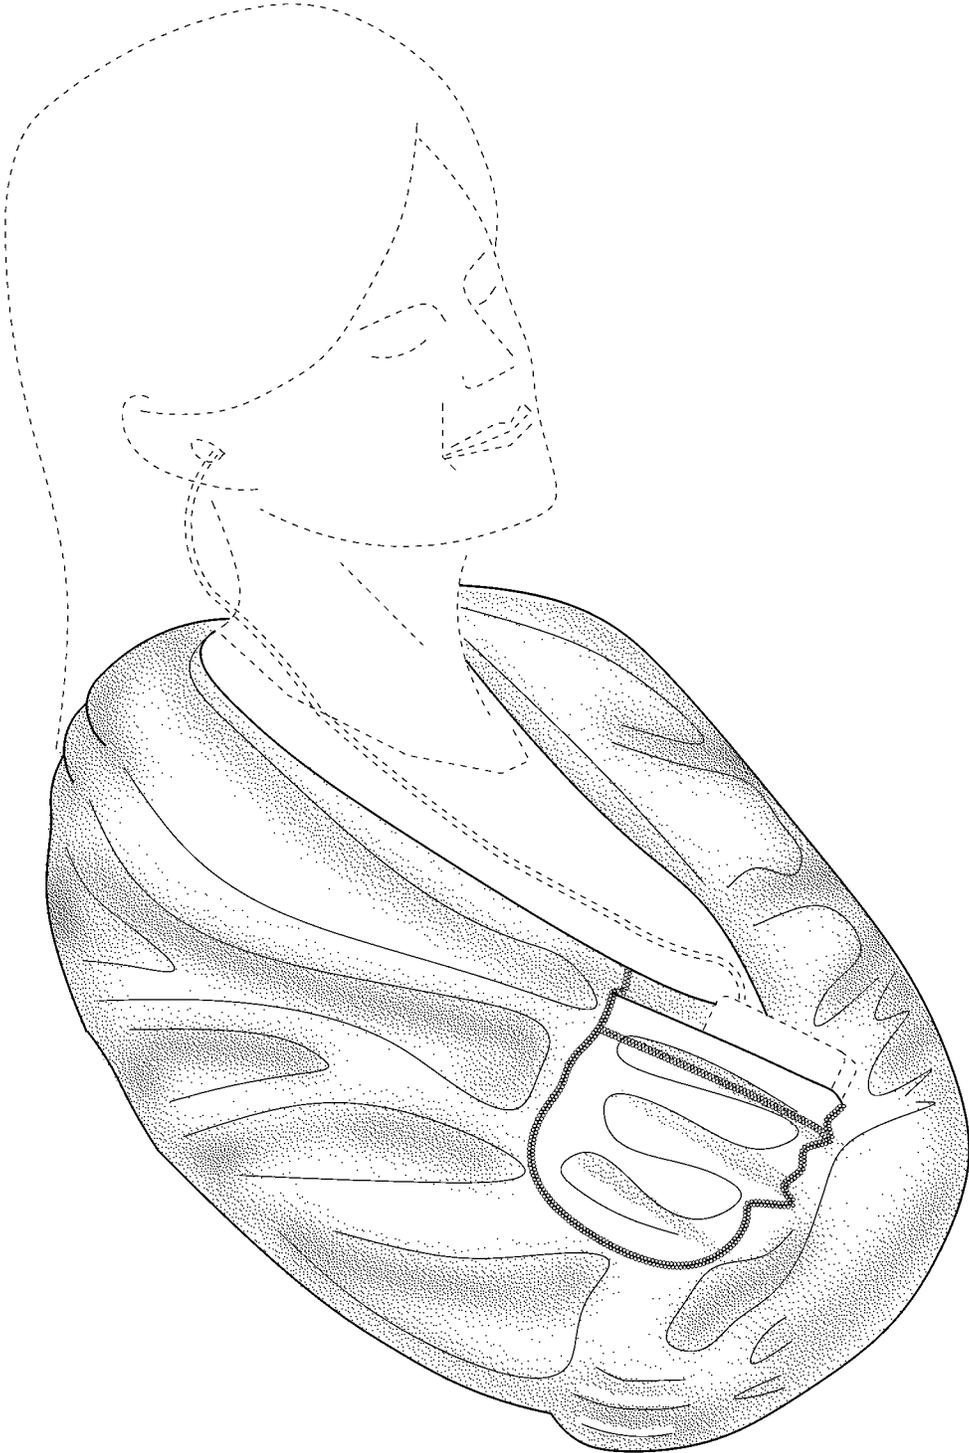


FIG. 1

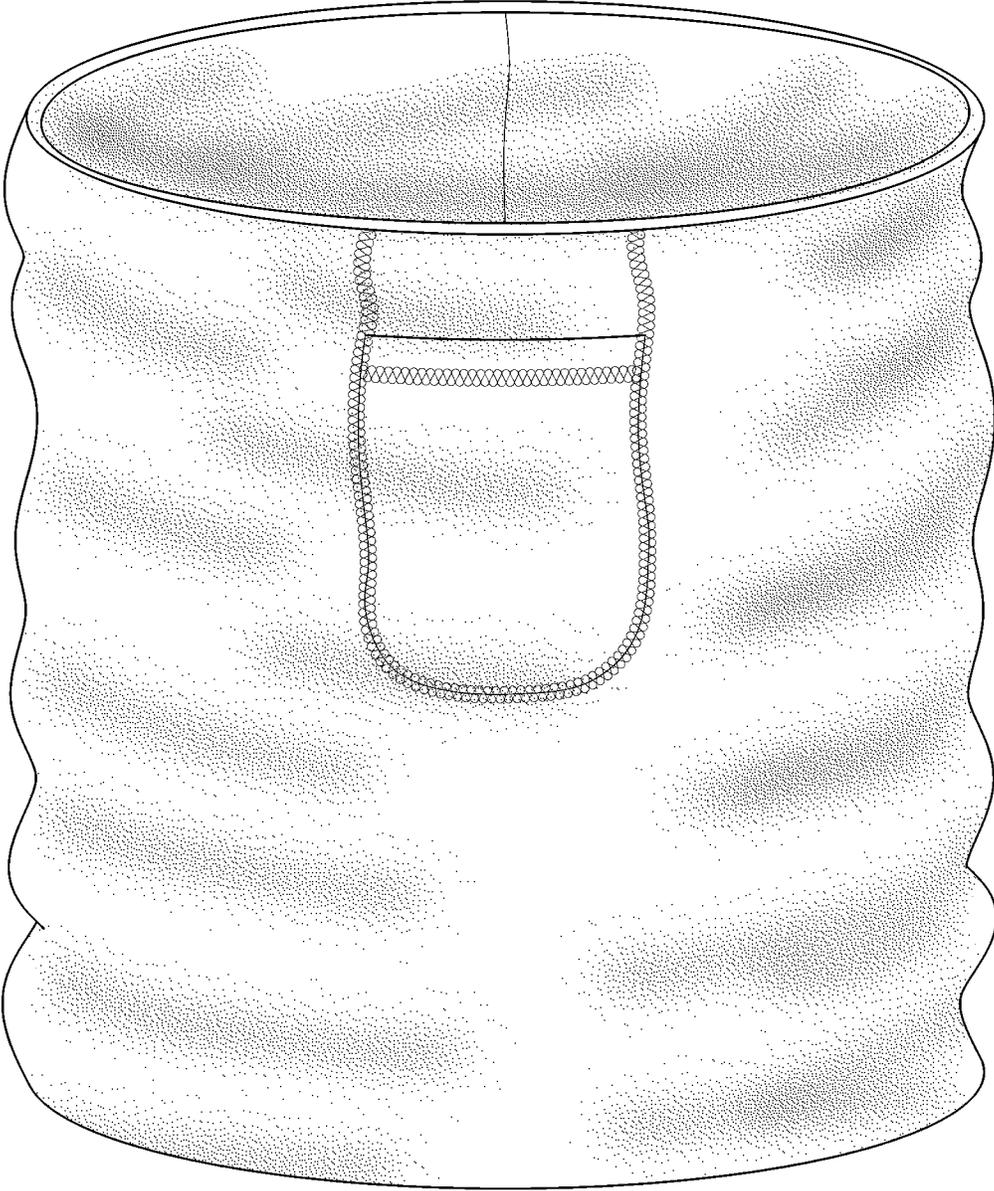


FIG. 2

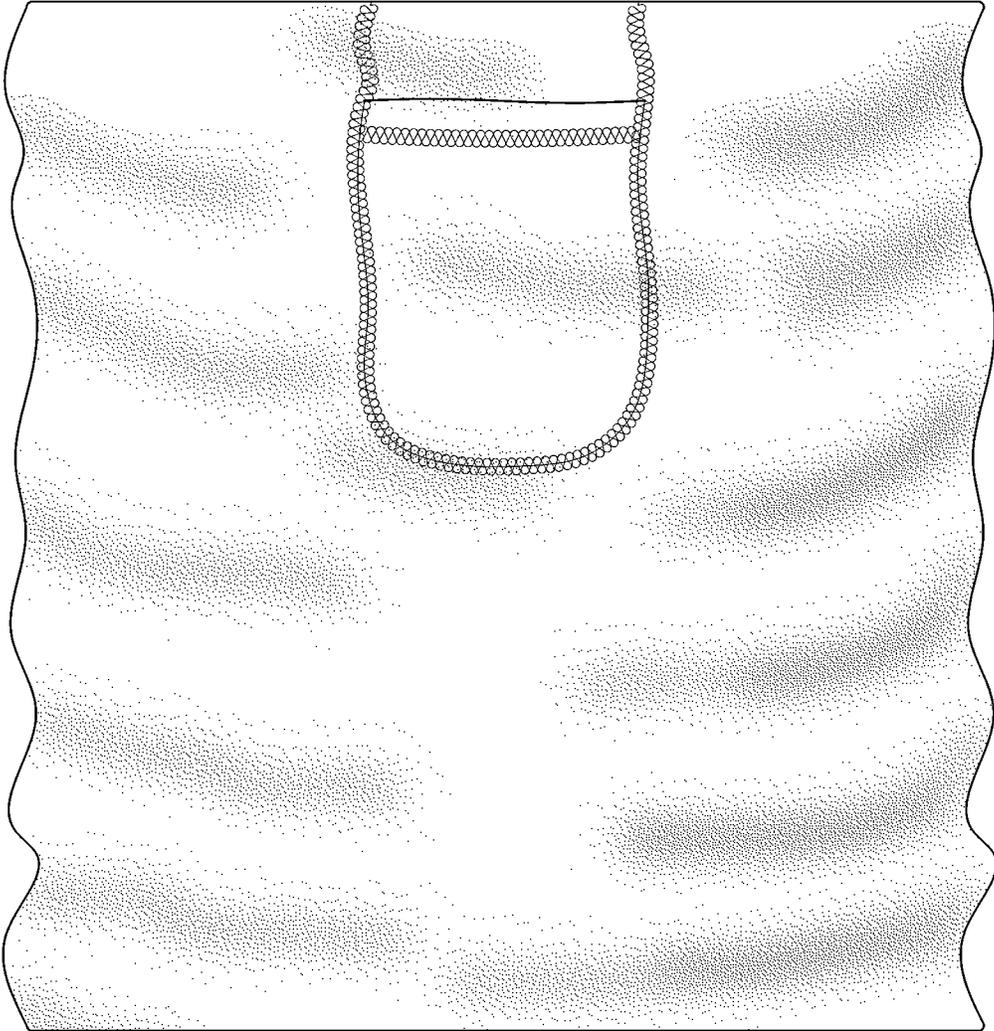


FIG. 3

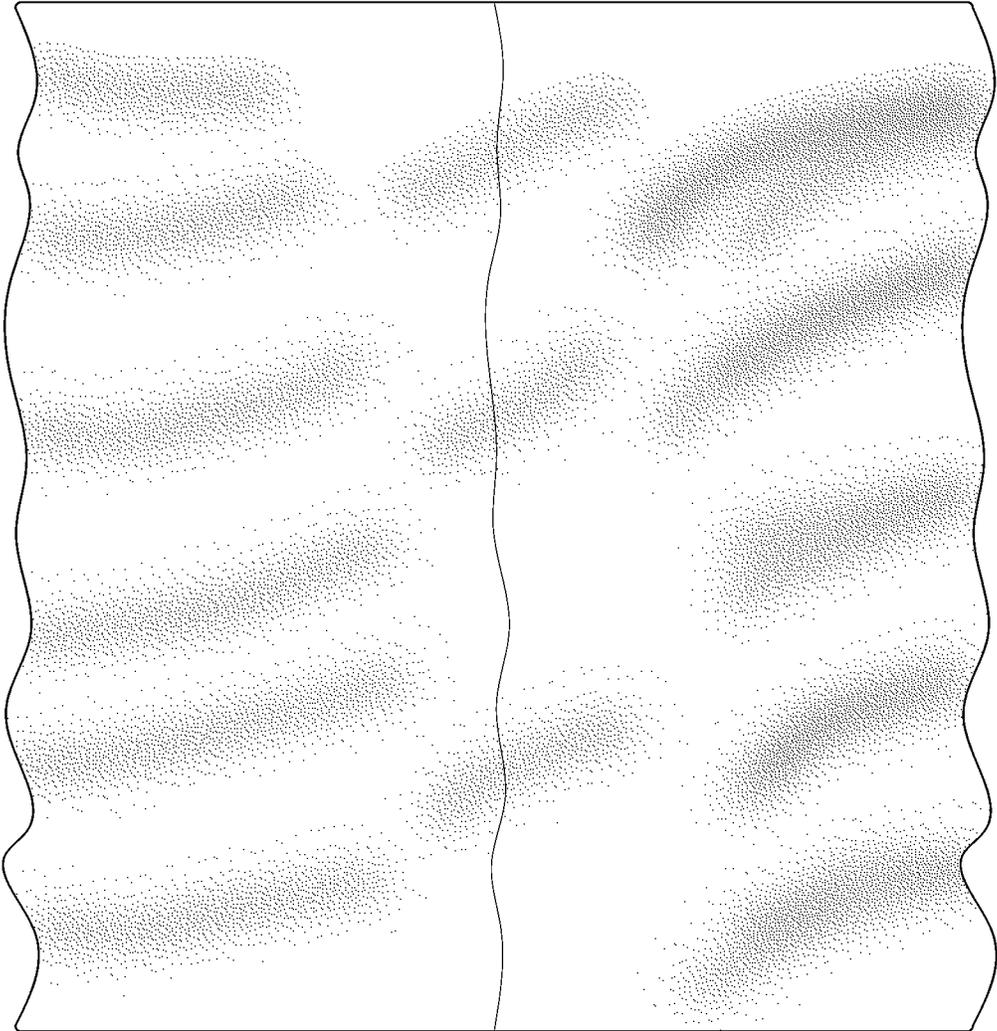


FIG. 4

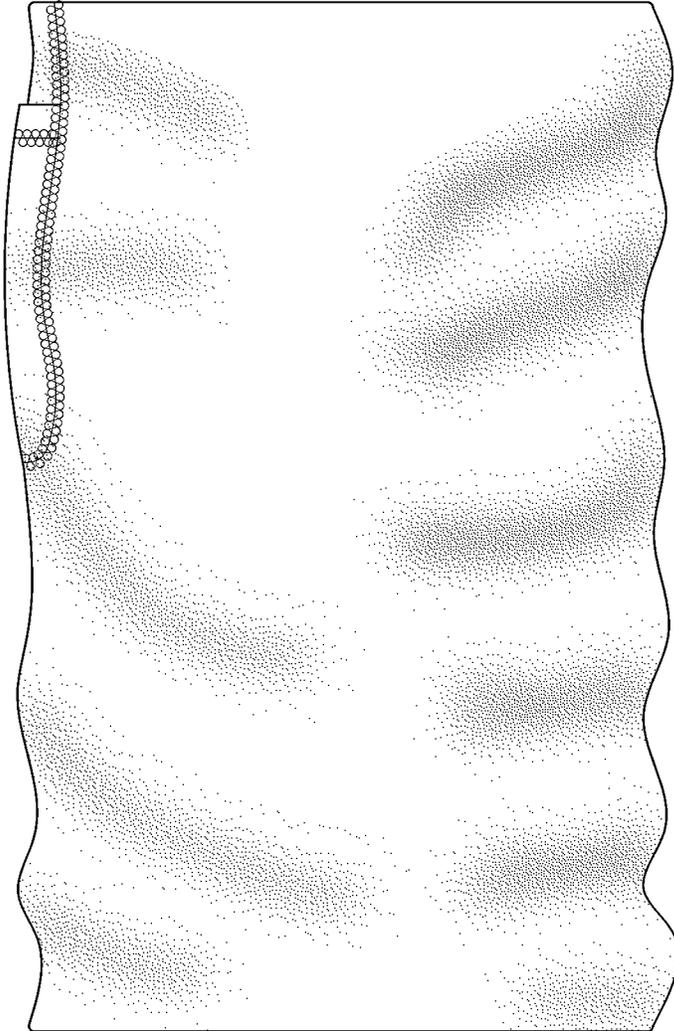


FIG. 5

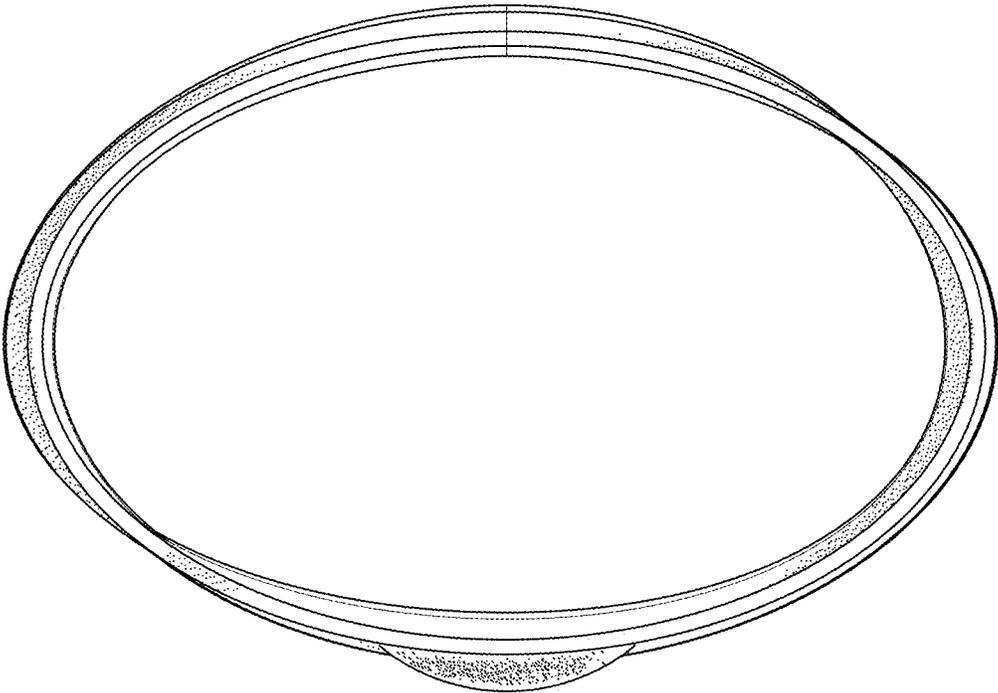


FIG. 6

FIG. 7

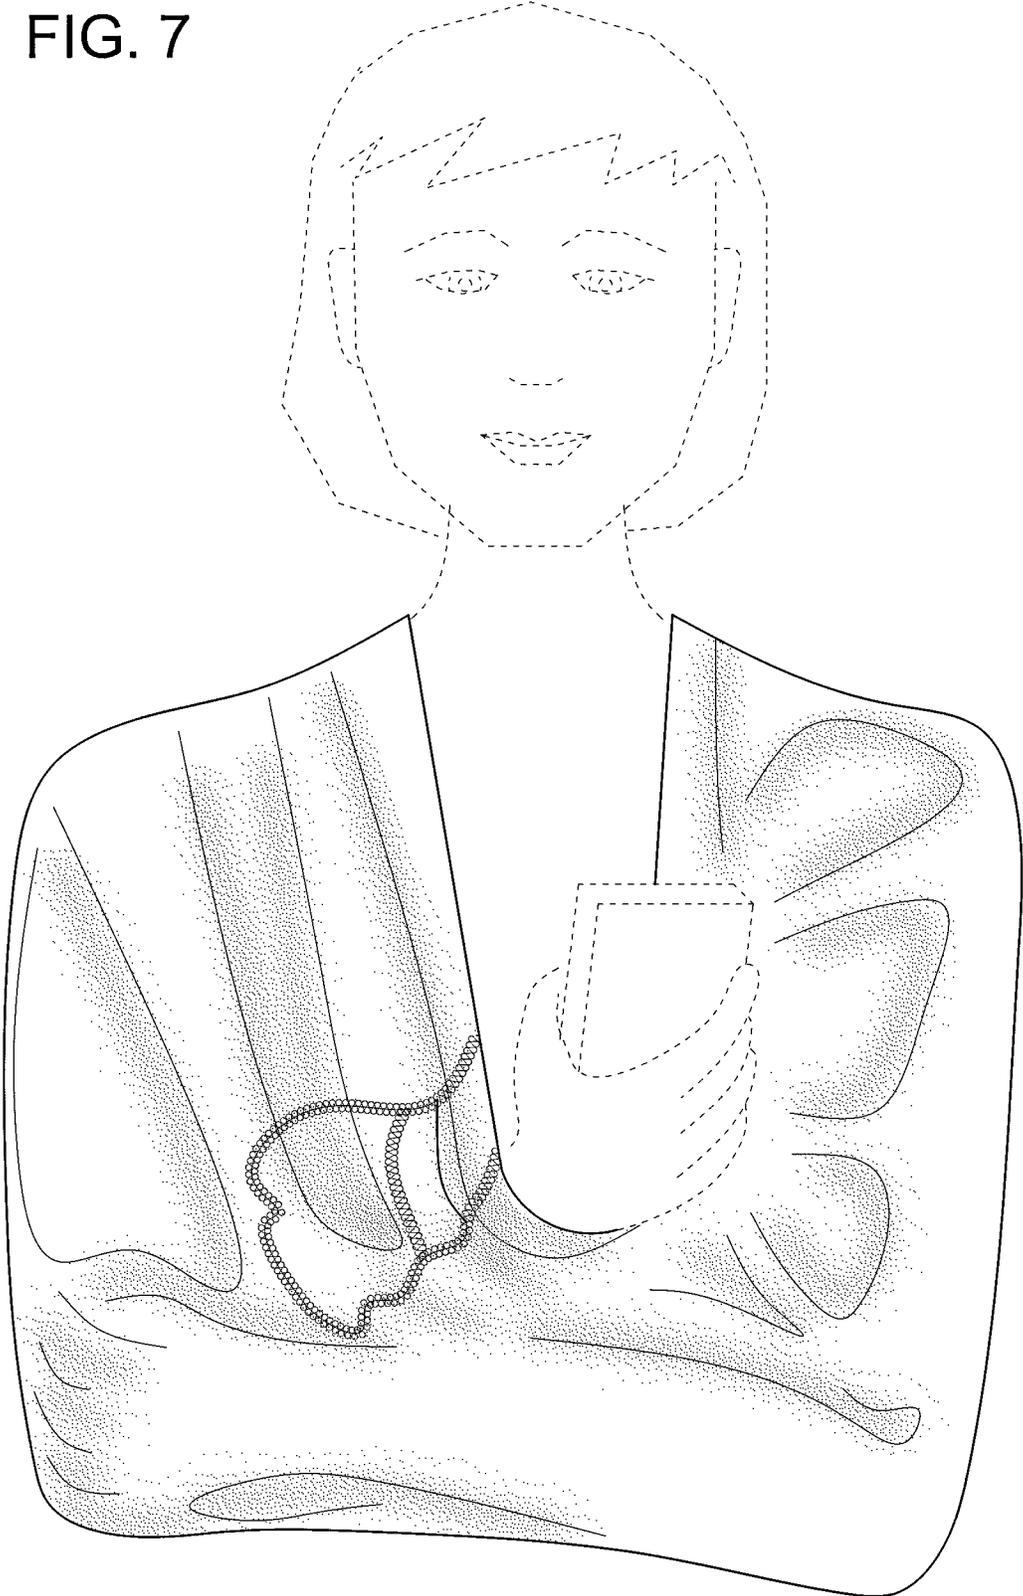


FIG. 8

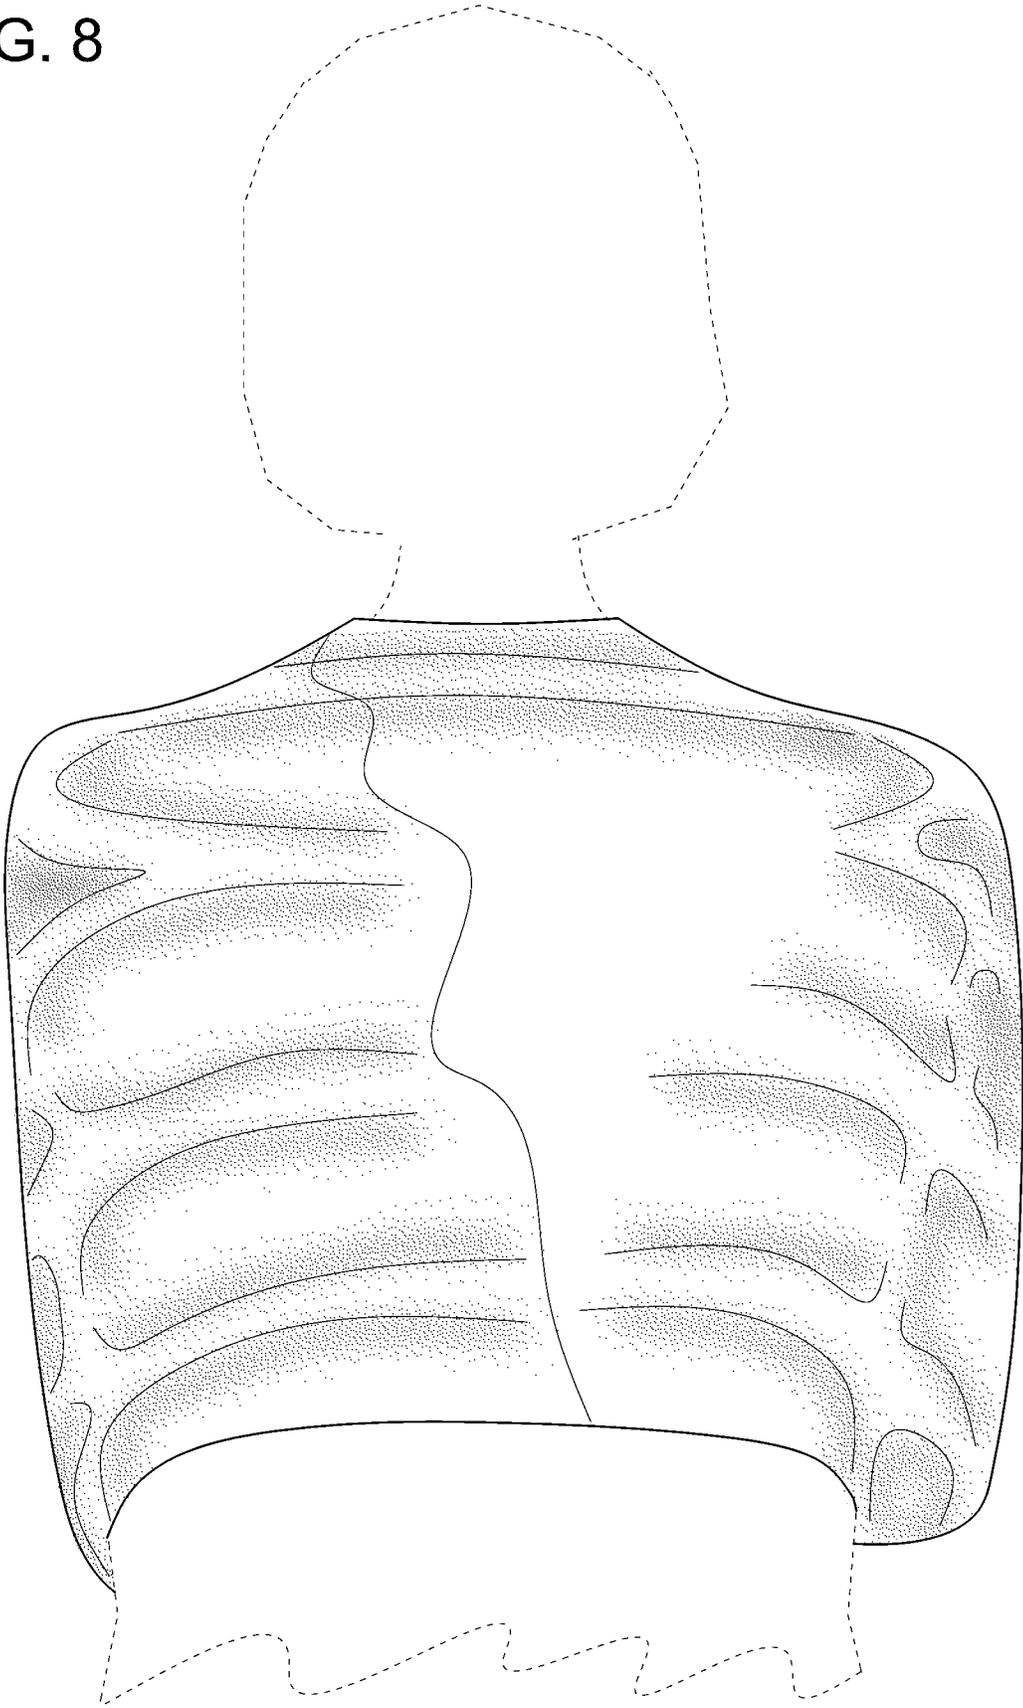


FIG. 9

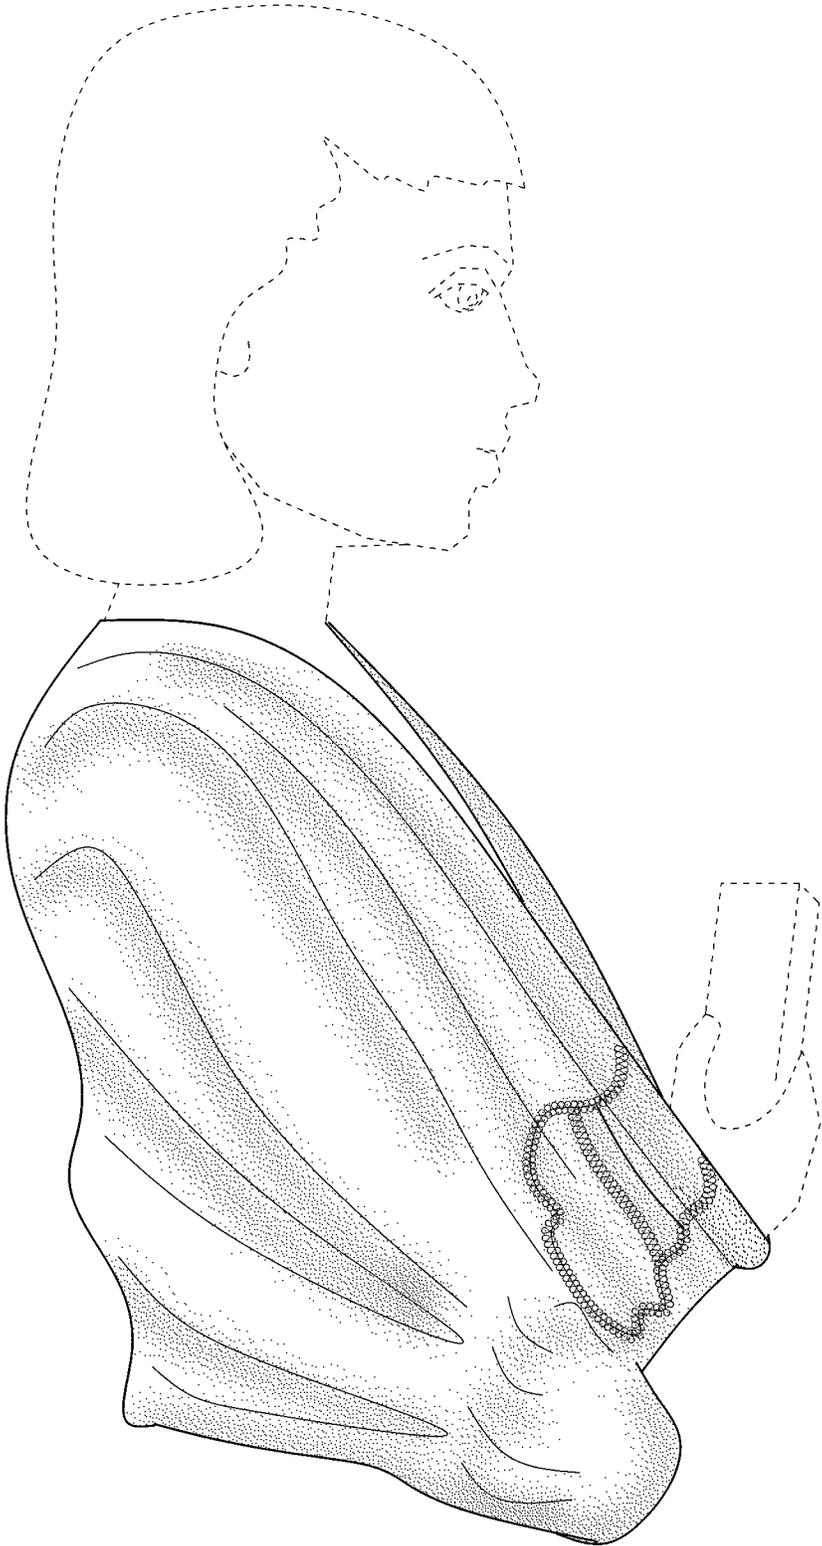
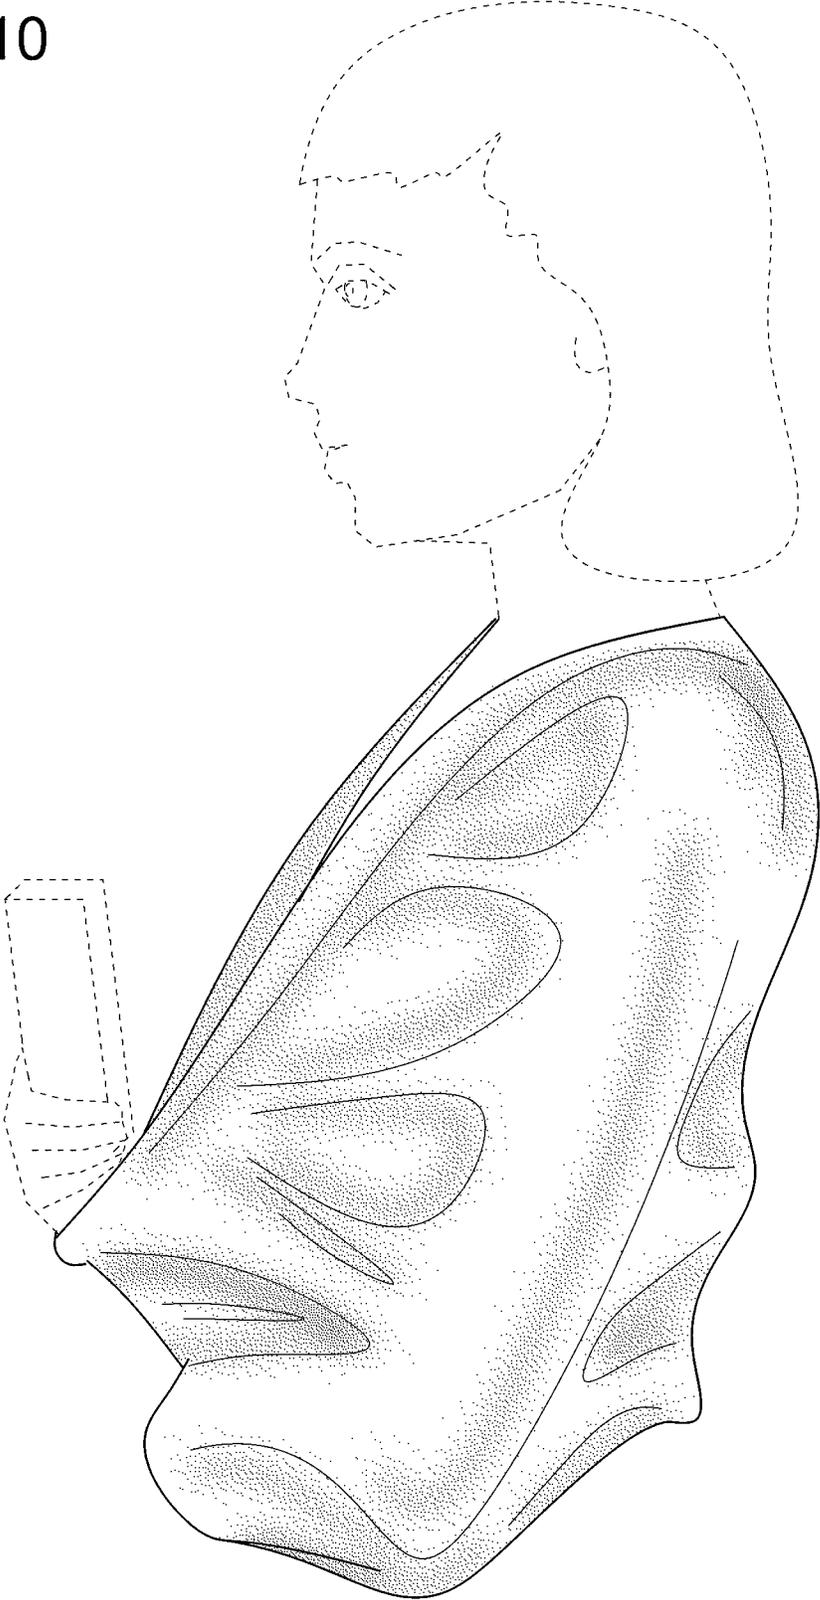


FIG. 10



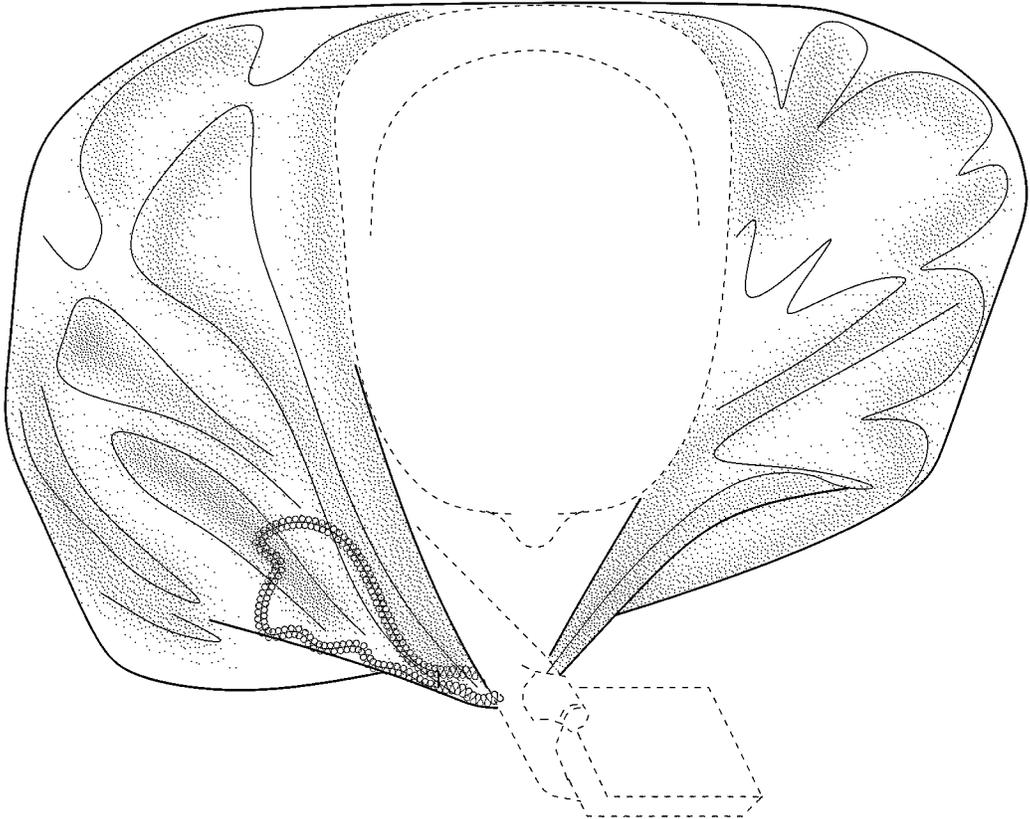


FIG. 11