

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 September 2011 (22.09.2011)

(10) International Publication Number
WO 2011/116037 A1

(51) International Patent Classification:
C11D 1/62 (2006.01) *C11D 11/00* (2006.01)
C11D 3/00 (2006.01)

(74) Common Representative: **THE PROCTER & GAMBLE COMPANY**; c/o Eileen L. Hughett, Global Patent Services, 299 East Sixth Street, Sycamore Building, 4th Floor, Cincinnati, Ohio 45202 (US).

(21) International Application Number:
PCT/US2011/028579

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
16 March 2011 (16.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/726,419 18 March 2010 (18.03.2010) US

(71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CULVER, Gayle, Elizabeth** [US/US]; 3989 Hedgewood Dr., Lawrenceburg, Indiana 47025 (US). **OMNITZ, Jeffrey, Frank** [US/US]; 1440 W. Kemper Rd. - Apt. 1404, Cincinnati, Ohio 45240 (US). **COROMINAS, Francesc** [ES/BE]; Smaragdstraat 8, B-1850 Grimbergen (BE). **SHEETS, Connie, Lynn** [US/US]; 3824 Drake Ave., Cincinnati, Ohio 45209 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LOW ENERGY METHODS OF MAKING PEARLESCENT FABRIC SOFTENER COMPOSITIONS

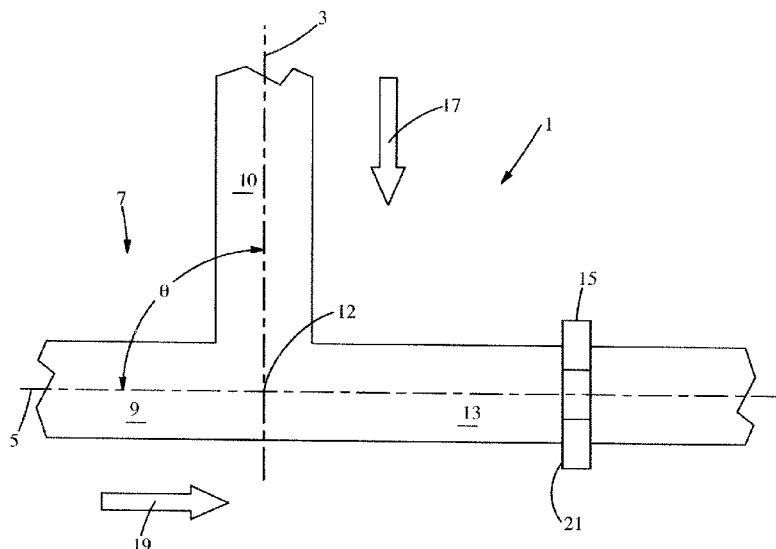


Fig. 1

(57) Abstract: The present invention relates to low energy (e.g., below 1 J/ml) methods of making pearlescent liquid fabric softener compositions.

WO 2011/116037 A1

Published:

— with international search report (Art. 21(3))

DETAILED DESCRIPTION OF THE INVENTION

Fabric softener actives

Fabric softener compositions, such as those sold under the brand name DOWNY and LENOR, typically comprise a fabric softener active. One class of fabric softener actives includes cationic surfactants. Examples of cationic surfactants include quaternary ammonium compounds. Exemplary quaternary ammonium compounds include alkylated quaternary ammonium compounds, ring or cyclic quaternary ammonium compounds, aromatic quaternary ammonium compounds, diquaternary ammonium compounds, alkoxyated quaternary ammonium compounds, amidoamine quaternary ammonium compounds, ester quaternary ammonium compounds, and mixtures thereof. A final fabric softener composition (suitable for retail sale) may comprise from about 1% to about 30%, alternatively from about 10% to about 25%, alternatively from about 15 to about 20%, alternatively from about 1% to about 5%, alternatively 17% to 22%, alternatively combinations thereof, of fabric softening active by weight of the final composition. Fabric softener compositions, and components thereof, are generally described in US 2004/0204337. In one embodiment, the fabric softener composition is a so called rinse added composition. In such embodiment, the composition is substantially free of deterative surfactants, alternatively substantially free of anionic surfactants. In another embodiment, the pH of the fabric softening composition is acidic, for example between pH 2 and 5, alternatively between pH 3 and pH 4. In yet another embodiment, the fabric softening active is DEEDMAC (e.g., ditallowoyl ethanolester dimethyl ammonium chloride). DEEDMAC means mono and di-fatty acid ethanol ester dimethyl ammonium quaternaries, the reaction products of straight chain fatty acids, methyl esters and/or triglycerides (e.g., from animal and/or vegetable fats and oils such as tallow, palm oil and the like) and methyl diethanol amine to form the mono and di-ester compounds followed by quaternization with an alkylating agent. *See* U.S. Pat. Nos.: 4,767,547; 5,460,736; 5,474,690; 5,545,340; 5,545,350; 5,562,849. A suitable supplier of fabric softening active may include Evonik Degussa Corporation.

Pearlescent

“Pearlescent” means any effect comprising shimmer, brilliance, iridescence, glitter, or sparkling. A pearlescent fabric softener is desirable because it may suggest to some consumers a luxurious or high quality product. Without wishing to be bound by theory, a pearlescent composition may be produced by reflection of light. Light is reflected from the plurality of fabric

softener active particle as they lie essentially parallel to each other at different levels in the composition to create a sense of depth and luster. Some light is reflected off the particles, and the remainder will pass through the particles. Light passing through the plurality of particles may pass directly through or be refracted. Reflected refracted light produces a different color, brightness, and luster. A “Pearlescence Determination” method is described in US 2009/0156455 A1 at paragraphs [0045] to [0047].

The present invention achieves the desired fabric softener particle structure and thus pearlescent composition, through a manufacturing process that imparts kinetic energy into the system by a confluence of hot active and cold water, and passing the resulting water / active mixture through an orifice. Figure 1 is a non-limiting example of the inventive method (1).

In one embodiment, the pearlescent fabric softener compositions of the present invention are free or essentially free of pearlescing chemical agents including inorganic natural substances, such as mica, bismuth oxychloride and titanium dioxide, and organic compounds such as fish scales, metal salts of higher fatty acids, fatty glycol esters and fatty acid alkanolamides. These chemicals are often expensive and introduce formulation complexity (compatibility etc.). The present invention avoids these problems.

Cold Water

A step in the present method of making a pearlescent fabric softening composition comprising piping cold water through a cold water pipe (9). The cold water pipe (9) may be a 6 inch diameter pipe made of 316 stainless steel having a wall thickness of 0.065 inch. Of course other materials, thickness, and dimensions may be used. The water temperature of the cold water seat is from about 0° C to about 30° C, alternatively from 5° C to about 27° C, alternatively from 10° C to about 25° C, alternatively from 15° C to about 25° C, alternatively from about 17° C to about 23° C, alternatively from 19° C to about 21° C, alternatively about 20° C, alternatively combinations thereof. The water may be optionally chilled to bring the water to the desired temperature. If chilled, the water is chilled before being mixed with hot fabric softener active.

The term “pipe” is used throughout the specification, but should be construed broadly to include any appropriate conduit. A second center line (5) passes through the center of the cold water pipe (9).

In one embodiment, the water is pH adjusted (before being mixed with the hot softener active). The pH may be adjusted to an acidic pH (i.e., less than 7), preferably between 2 and 5,

alternatively from 2 to 4, alternatively from 2 to 3, alternatively from 2 to 4, alternatively combinations thereof. The pH may be adjusted, for example, with hydrochloric acid or formic acid.

In another embodiment, salt (e.g., sodium chloride or calcium chloride) is added to the water (before the cold water is mixed the hot softener active). The amount of salt is added such that the final concentration of salt in the fabric softener composition is from 0.01% to about 0.5% salt by weight of the final fabric softener composition. The amount of salt in the cold water may comprises from 100 parts per million (ppm) to 4000 ppm.

Without wishing to be bound theory, its surprisingly observed that adding salt at this early stage in the process provides for better composition rheology control as opposed to adding salt at a later downstream finishing step (e.g., post feeding through an orifice step). Salt is typically added as a finishing step to reduce viscosity of the fabric softener “white base.” However, it is observed that adding salt in this traditional manner under this inventive method of making a pearlescent fabric softener composition does not provide the desired rheology range to create an acceptable consumer product. It is surprising observed that adding salt at this early step (i.e., cold water addition) provides a composition that exhibits a consumer acceptable viscosity profile (e.g., 100 – 400 cps).

Table 1

Examples	CaCl ₂ , ppm	Mill, rpm	Viscosity - at discharge	Viscosity- 1hr	Viscosity- 3-5 days	Viscosity- 10wks
1	2054	no	490	870	960	>5000
2	2054	2282	320	465	810	>5000
3	1000	2282	275	370	530	2050
4	1000	3511	185	280	410	795
5	750	3511	210	255	330	370

The data of Table 1 demonstrates that a CaCl₂ level below 2,054 ppm (parts per million) provides a fabric softener composition that exhibits an acceptable rheology profile. Five samples are each conducted having the same: fabric softener active and level (14% DEEDMAC); orifice size (3.37 mm diameter); water temperature (15° C). Viscosity is assessed using a Brookfield™ Viscometer and reported as cps.

In one embodiment, an electrolyte, such as CaCl₂, is added to the water, before active addition, such that final finished fabric softener product comprises at or less than 1500 ppm,

alternatively less than 1000 ppm, alternatively less than 750, alternatively from about 1500 ppm to about 500 ppm, alternatively combinations thereof.

Hot Active

5 Another step in the present method of making a pearlescent fabric softening composition comprises piping a hot fabric softener active composition (or simply “hot active”) through a hot active pipe (10).

The temperature of the fluidized fabric softener active composition “melt” is from 60° C to about 100° C, alternatively from 65° C to 85° C, alternatively from 60° C to 80° C,
10 alternatively from 65° C to 75° C, alternatively about 70° C, alternatively combinations thereof. The fabric softener active composition that is received from the supplier is heated to a molten mixture before being piped in the hot active pipe (10). The exact temperature of the active is dependent upon, in part, on the melting point of the active and a generalized desire to not subject the active to too high temperatures that may result in the degradation and financial costs
15 associated with heating. In one embodiment, the fabric softener active composition (or “hot active”) comprises at least 50%, alternatively at least 60%, alternatively at least 70%, alternatively at least 80%, alternatively at least 90%, alternatively from 50% to 100%, alternatively combinations thereof, of fabric softening active by weight of the fabric softener active composition.

20 The hot active pipe (10) may be a 4 inch diameter pipe made of 316 stain steel having a wall thickness of 0.065 inch. Of course other materials, thickness, and dimensions may be used. The hot active pipe (10) may or may not be heated (to help heat or keep heated the hot active contained herein).

In one embodiment, the diameter ratio between the cold water pipe (9) to the hot active
25 pipe (10) is from about 2:1 to 6:5 respectively, alternatively 3:2, alternatively combinations thereof.

In another embodiment the temperature difference between the cold water being piped in the cold water pipe (9) and that of hot active being pipe in the hot active pipe (10) is at least 30° C, alternatively is at least 35° C, alternatively is at least 40° C, alternatively is at least 50° C,
30 alternatively is at least 55° C, alternatively is at least 60° C, alternatively from 30° C to about 60 °C, alternatively from 40° C to about 60 °C, alternatively from 45° C to about 60 °C, alternatively from 45° C to about 55 °C, alternatively combinations thereof. Without wishing to be bound by

theory, the temperature differential between the cold water seat and the hot fabric softener active composition helps to drive the microstructure necessary for the desired pearlescence. In one embodiment this temperature differential is at least 20° C, alternatively at least 30° C, alternatively at least 40° C, alternatively at least 50° C, alternatively at least 60° C.

5

Confluence

Angle theta (7) describes the angle between the first center line (3) and the second center line (5). Angle theta (7) is shown at 90 degrees in figure 1; but angle theta (7) may be, in one embodiment, from 45 degrees to 135 degrees, alternatively from 60 degrees to 120 degrees, alternatively from 80 degrees to 100 degrees, alternatively combinations thereof.

10

The direction (17) of the hot active through the hot active pipe (10) is toward the center line intersection (12). The direction (19) of the cold water flow through the cold water pipe (9) is also toward the center line intersection (12). The mixing chamber (13) is downstream of the center line intersection and the orifice (15) is downstream of the mixing chamber (13).

15

Without wishing to be bound by theory, this angled confluence of the hot active and cold water may impart some of the kinetic energy necessary to drive pearlescent microstructure of the fabric softener compositions.

Mixing Chamber

20

Another step in the present method of making a pearlescent fabric softening composition comprises mixing water (received from the cold water pipe (9)) and hot active (received from the hot active pipe (10)) in a mixing zone (13) to form a water / active mixture.

25

The mixing chamber (13) is the area of piping from the centerline intersection (12) to the upstream side (21) of the orifice (15). This distance is 11.75 inches in figure 1, but it can be from about 5 inches to 28 inches, alternatively 6 inches to 20 inches, alternatively 8 inches to 14 inches, alternatively from 10 to 19 inches, alternatively combinations thereof. In figure 1, the mixing chamber is essentially an extension of the cold water pipe (10) having the same diameter, thickness, and material as previously described for the cold water pipe (10). Of course other materials, thickness, and dimensions may be used. Without wishing to be bound by theory, the mixing chamber allows the hot active and cold water to interact before being subjected to the orifice.

30

Orifice

Another step in the present method of making a pearlescent fabric softening composition comprises feeding the water / active mixture through an orifice under feed pressure to extrude the pearlescent fabric softener composition. The orifice may have a circular or polygonal cross section. When polygonal, it is preferred to have a regular polygonal cross section. “Regular polygonal” means each side of the polygon has the same dimension and each side of the polygon is connected to each other by the same angle. Examples of polygons include those having 3, 4, 5, 6, 7, 8, 9, 10, 11, 12 or more sides. In one embodiment, the orifice may be a “dynamic orifice” as described in the US equivalent patent publication of CA 2 675 704 A1. A dynamic orifice may be obtained from Emile Egger & Company Ltd, Pump and Machine Manufacturer, Route de Neuchatel 36, CH-2088 Cressier/NE, Switzerland, IRIS Diaphragm Control Valve – BS.

The cross sectional area of the orifice may range from about 2 mm² to about 2500 mm². Generally the smaller the cross sectional area of the orifice, the greater the kinetic energy density is imparted to the water / active mixture being extruded. In one embodiment, the orifice has a regular hexagonal cross section having a width measure from side-to-side (perpendicular to the flow mixture through the orifice) from about 25 mm to about 45 mm, alternatively from about 15 mm to about 55 mm, alternatively combinations thereof. The orifice may have thickness from about 5 mm to about 15mm, alternatively from about 8 mm to about 12 mm, alternatively combinations thereof.

The feed pressure may be from about 34.5 kPa to about 1200 kPa, alternatively from about 50 kPa to about 1,000 kPa, alternatively from about 100 kPa to about 500 kPa, alternatively from about 250 kPa to about 750 kPa, alternatively combinations thereof.

The pressure difference between the feed pressure of the water / active mixture immediately before going through the dynamic orifice and immediately after going through the orifice is from about 1 psid (pounds per square inch) to about 100 psid, alternatively from about 25 psid to about 75 psid. Without wishing to be bound by theory, a change in the opening (holding feeding pressure constant) will generally change kinetic energy densities (but obviously not under all conditions).

The dimension of the pipe downstream of the orifice can be the same or different from the dimensions of the pipe comprising the mixing chamber.

Milling

Another potential step in the present method of making a pearlescent fabric softening composition comprises milling the composition after the extruding step. Preferably an in-line mill is used. Without wishing to be bound by theory, milling may reduce the length of any
5 laminar sheets in the composition with an objective to reduce viscosity. A non-limiting example of milling equipment may include an IKA Dispax Reactor.

Microstructure

The method described herein provides a fabric softener composition comprising active
10 particles having a suitable microstructure to exhibit a pearlescent composition. These active particles, in one embodiment, have an average size ranging from 0.1 to 50 μm . The Dynamic Light Scattering Method measures the average diameter of the particles by light scattering data techniques, which is an intensity-weighted average diameter. One suitable machine to determine the average diameter is a Brookhaven *90Plus* Nanoparticle Size Analyzer.

15

Energy density

The liquid fabric softener compositions of the present invention require relatively low energy density. One aspect of the invention provides an energy density of less than 1 J/ml, alternatively less than 0.9 J/ml, alternatively less than 0.8 J/ml, alternatively from 0.01 J/ml to 0.9
20 J/ml, alternatively from 0.02 J/ml to 0.8 J/ml, alternatively 0.025 J/ml to 0.6 J/ml, alternatively from 0.046 J/ml to 0.46 J/ml. Low energy methods are desirable since generally it requires less expensive capital and generally use less electricity to operate.

Energy density is described in 2009/0156455 A1 paragraph [0068]. Power density is described in 2009/0156455 A1 at paragraphs [0069] to [0071].

25

EXAMPLES

Various concentrations of pearlescent fabric softening compositions are made. Water is piped in the cold water pipe at 20° C. Active in the form of DEEDMAC at a concentration of X% by weight of the fabric softening active composition is piped in the active pipe at a temperature at 75° C. The two pipes confluence at a theta angle of 90 degrees. The upstream
30 side of the orifice is about 11.75 inches from the center line intersection. The orifice has a hexagonal cross section. This cross section is measured from one side of the regular hexagon to the other opposite side, i.e., width of the regular hexagon. In a first example, a 40.31 mm orifice

(i.e., the width of the regular hexagon) is used for making the pearlescent fabric softener composition having 10% DEEDMAC (i.e., 10 % fabric softening active) by weight of the composition. A flow rate of 1900 lb/min (861.8 kg/min) is used to feed the water / active mixture comprising 10% DEEDMAC through the hexagonal shaped orifice to provide the pearlescent fabric softener composition. In a second example, a 35.35 mm orifice (i.e., the width of the regular hexagon) is used for making a pearlescent softener composition having 12.2% DEEDMAC with a flow rate at 1770 lb/min and 2000 lb/min. In a third example, a 31 mm orifice (i.e., the width of the regular hexagon) is used for making a pearlescent softener composition having 17.3% DEEDMAC with a feed pressure at 30 psid. In a final example, a 25.1 mm orifice (i.e., the width of a the regular hexagon) is used for a pearlescent softener composition having 21.1% DEEDMAC with a flow rate at 1770 lb/min and 2000 lb/min. In one embodiment, the flow rate of the water/active mixture to the orifice is from about 1,000 lb/min to about 3,000 lb/min. The energy densities of the examples are from 0.046 J/ml to 0.46 J/ml.

Adjunction ingredients may be subsequently included including perfume.

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm”.

Every document cited herein, including any cross referenced or related patent or application, is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any invention disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such invention. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

CLAIMS

What is claimed is:

1. A method of making a pearlescent fabric softener composition comprising the steps:
 - (a) piping water having a temperature from 5° C to 30° C through a cold water pipe,
 - (b) piping a fluidized fabric softener active composition at a temperature from 60° C to about 100° C through a hot active pipe, wherein the fabric softener active is an ester quaternary ammonium compound having an Iodine Value from 15 to 25 (alternatively from 18 – 22);
 - (c) mixing water received from the cold water pipe and fluidized fabric softener active composition received from the hot active pipe in a mixing zone to form a water / active mixture;
 - (d) feeding the water / active mixture through an orifice under feed pressure to form the pearlescent fabric softener composition.
2. The method of claim 1, wherein the temperature of the wherein the temperature of the fluidized fabric softener active composition piped in the active pipe is at least 40° C higher than the temperature of the water piped in the cold water pipe.
3. The method of claim 2, further comprising the step of adding an electrolyte to the water, but before the water is mixed with the fluidized fabric softener active composition, such that the pearlescent fabric softening composition comprises from 500 ppm to 1500 ppm of said electrolyte.
4. The method of claim 3, wherein the temperature of the fluidized fabric softener active composition is from 60° C to about 100° C through the hot active pipe.
5. The method of claim 4, wherein the temperature of the water is from 15° C to 25° C through the cold water pipe.
6. The method of claim 5, wherein the water has a pH from 3 to 5.
7. The method of claim 6, wherein the orifice comprises a cross sectional area from 2 mm² to 2500 mm².

8. The method of claim 7, wherein the feed pressure is from 34.5 kPa to 1200 kPa.
9. The method of claim 8, wherein the energy density is less than 1 J/ml.
10. The method of claim 9, wherein the hot active pipe comprises a first center line and the cold water pipe comprises a second center line, wherein the first center line and the second center line form angle theta, and wherein theta is from 45 degrees to 135 degrees.
11. The method of claim 10, wherein the electrolyte is CaCl_2 .

1/1

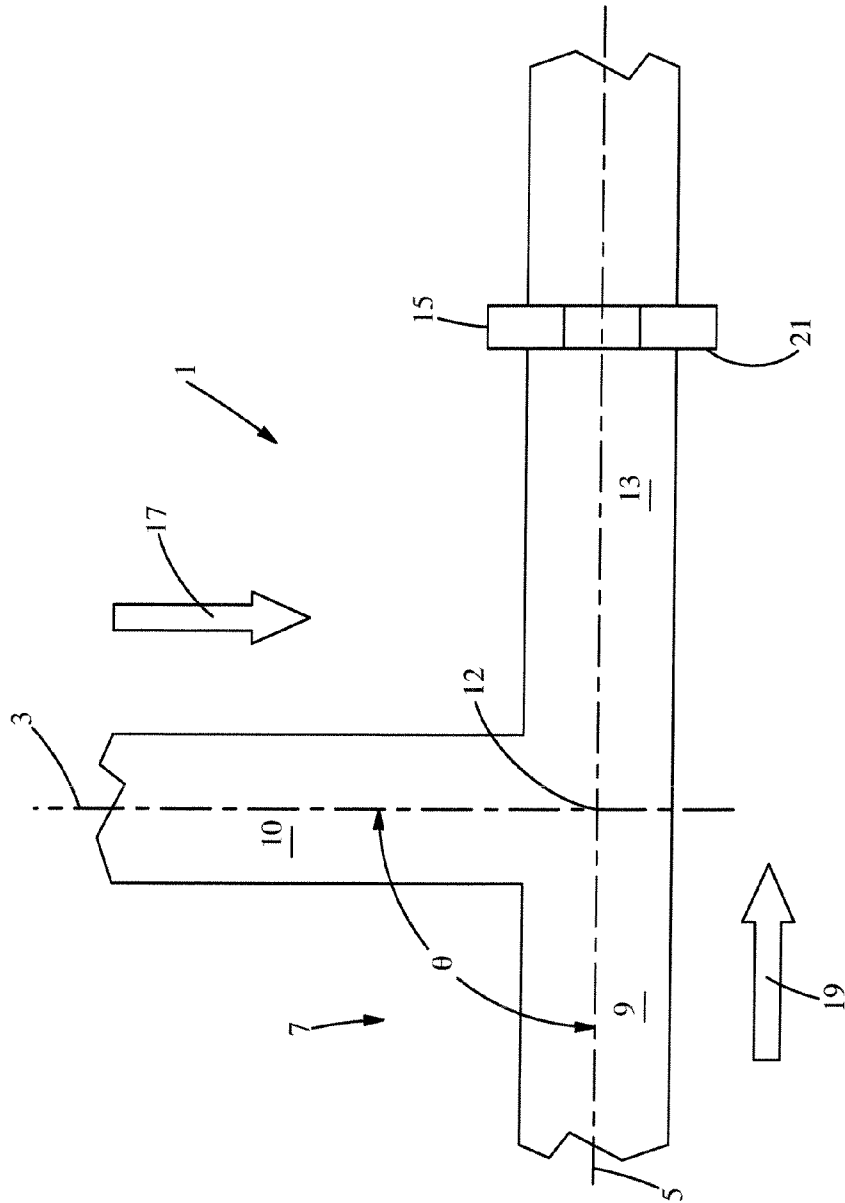


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No PCT/US2011/028579

A. CLASSIFICATION OF SUBJECT MATTER INV. C11D1/62 C11D3/00 C11D11/00 ADD.				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) C11D				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	WO 2009/057009 A1 (PROCTER & GAMBLE [US]; COROMINAS FRANCESC [BE]) 7 May 2009 (2009-05-07) cited in the application page 18, paragraph 3 - page 21, paragraph 1 -----	1-11		
A	CA 2 675 704 A1 (PROCTER & GAMBLE [US]) 5 November 2009 (2009-11-05) cited in the application claims 1-15 -----	7,8		
A	US 2006/264352 A1 (SAJIC BRANKO [US] ET AL) 23 November 2006 (2006-11-23) paragraph [0123] ----- -/--	1-11		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
* Special categories of cited documents : <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
22 June 2011	05/07/2011			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Richards, Michael			

INTERNATIONAL SEARCH REPORT

International application No PCT/US2011/028579

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2008/021892 A1 (PROCTER & GAMBLE [US]; GIZAW YONAS [US]; NUNES RAUL VICTORINO [US]; QU) 21 February 2008 (2008-02-21) page 14, line 12 - line 19 -----	1-11
A	WO 97/28244 A1 (PROCTER & GAMBLE [US]) 7 August 1997 (1997-08-07) claims 1-7 -----	1-11
A	EP 0 922 755 A1 (PROCTER & GAMBLE [US]) 16 June 1999 (1999-06-16) paragraph [0085] - paragraph [0090] -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2011/028579

Patent document cited in search report	A1	Publication date	Patent family member(s)	Publication date
WO 2009057009	A1	07-05-2009	CA 2700678 A1 EP 2055351 A1 JP 2011501788 T	07-05-2009 06-05-2009 13-01-2011

CA 2675704	A1	05-11-2009	EP 2287283 A1 US 2011124548 A1	23-02-2011 26-05-2011

US 2006264352	A1	23-11-2006	US 2011028381 A1	03-02-2011

WO 2008021892	A1	21-02-2008	CA 2660305 A1 CN 101501171 A EP 2049639 A1 EP 2049640 A2 JP 2009544869 T JP 2010500483 T US 2008263780 A1 WO 2008021893 A1 WO 2008021895 A2	21-02-2008 05-08-2009 22-04-2009 22-04-2009 17-12-2009 07-01-2010 30-10-2008 21-02-2008 21-02-2008

WO 9728244	A1	07-08-1997	BR 9707326 A CA 2243954 A1 CN 1214729 A JP 2000501146 T US 5728673 A	13-04-1999 07-08-1997 21-04-1999 02-02-2000 17-03-1998

EP 0922755	A1	16-06-1999	BR 9813440 A CA 2312065 A1 CN 1281503 A EP 1042445 A1 JP 2001526304 T WO 9929823 A1	10-10-2000 17-06-1999 24-01-2001 11-10-2000 18-12-2001 17-06-1999
