




(86) Date de dépôt PCT/PCT Filing Date: 2005/06/20
(87) Date publication PCT/PCT Publication Date: 2006/01/05
(45) Date de délivrance/Issue Date: 2013/08/20
(85) Entrée phase nationale/National Entry: 2007/01/18
(86) N° demande PCT/PCT Application No.: IB 2005/052022
(87) N° publication PCT/PCT Publication No.: 2006/000985
(30) Priorité/Priority: 2004/06/21 (US10/874,294)

(51) Cl.Int./Int.Cl. *A61F 5/44* (2006.01)
(72) Inventeurs/Inventors:
SCHENA, KENNETH R., US;
SCHENA, BLAINE M., US
(73) Propriétaire/Owner:
SCHENA OSTOMY TECHNOLOGIES, INC., US
(74) Agent: MCCARTHY TETRAULT LLP

(54) Titre : SYSTÈME DE NETTOYAGE DE SAC DE COLOSTOMIE
(54) Title: COLOSTOMY BAG CLEANING SYSTEM

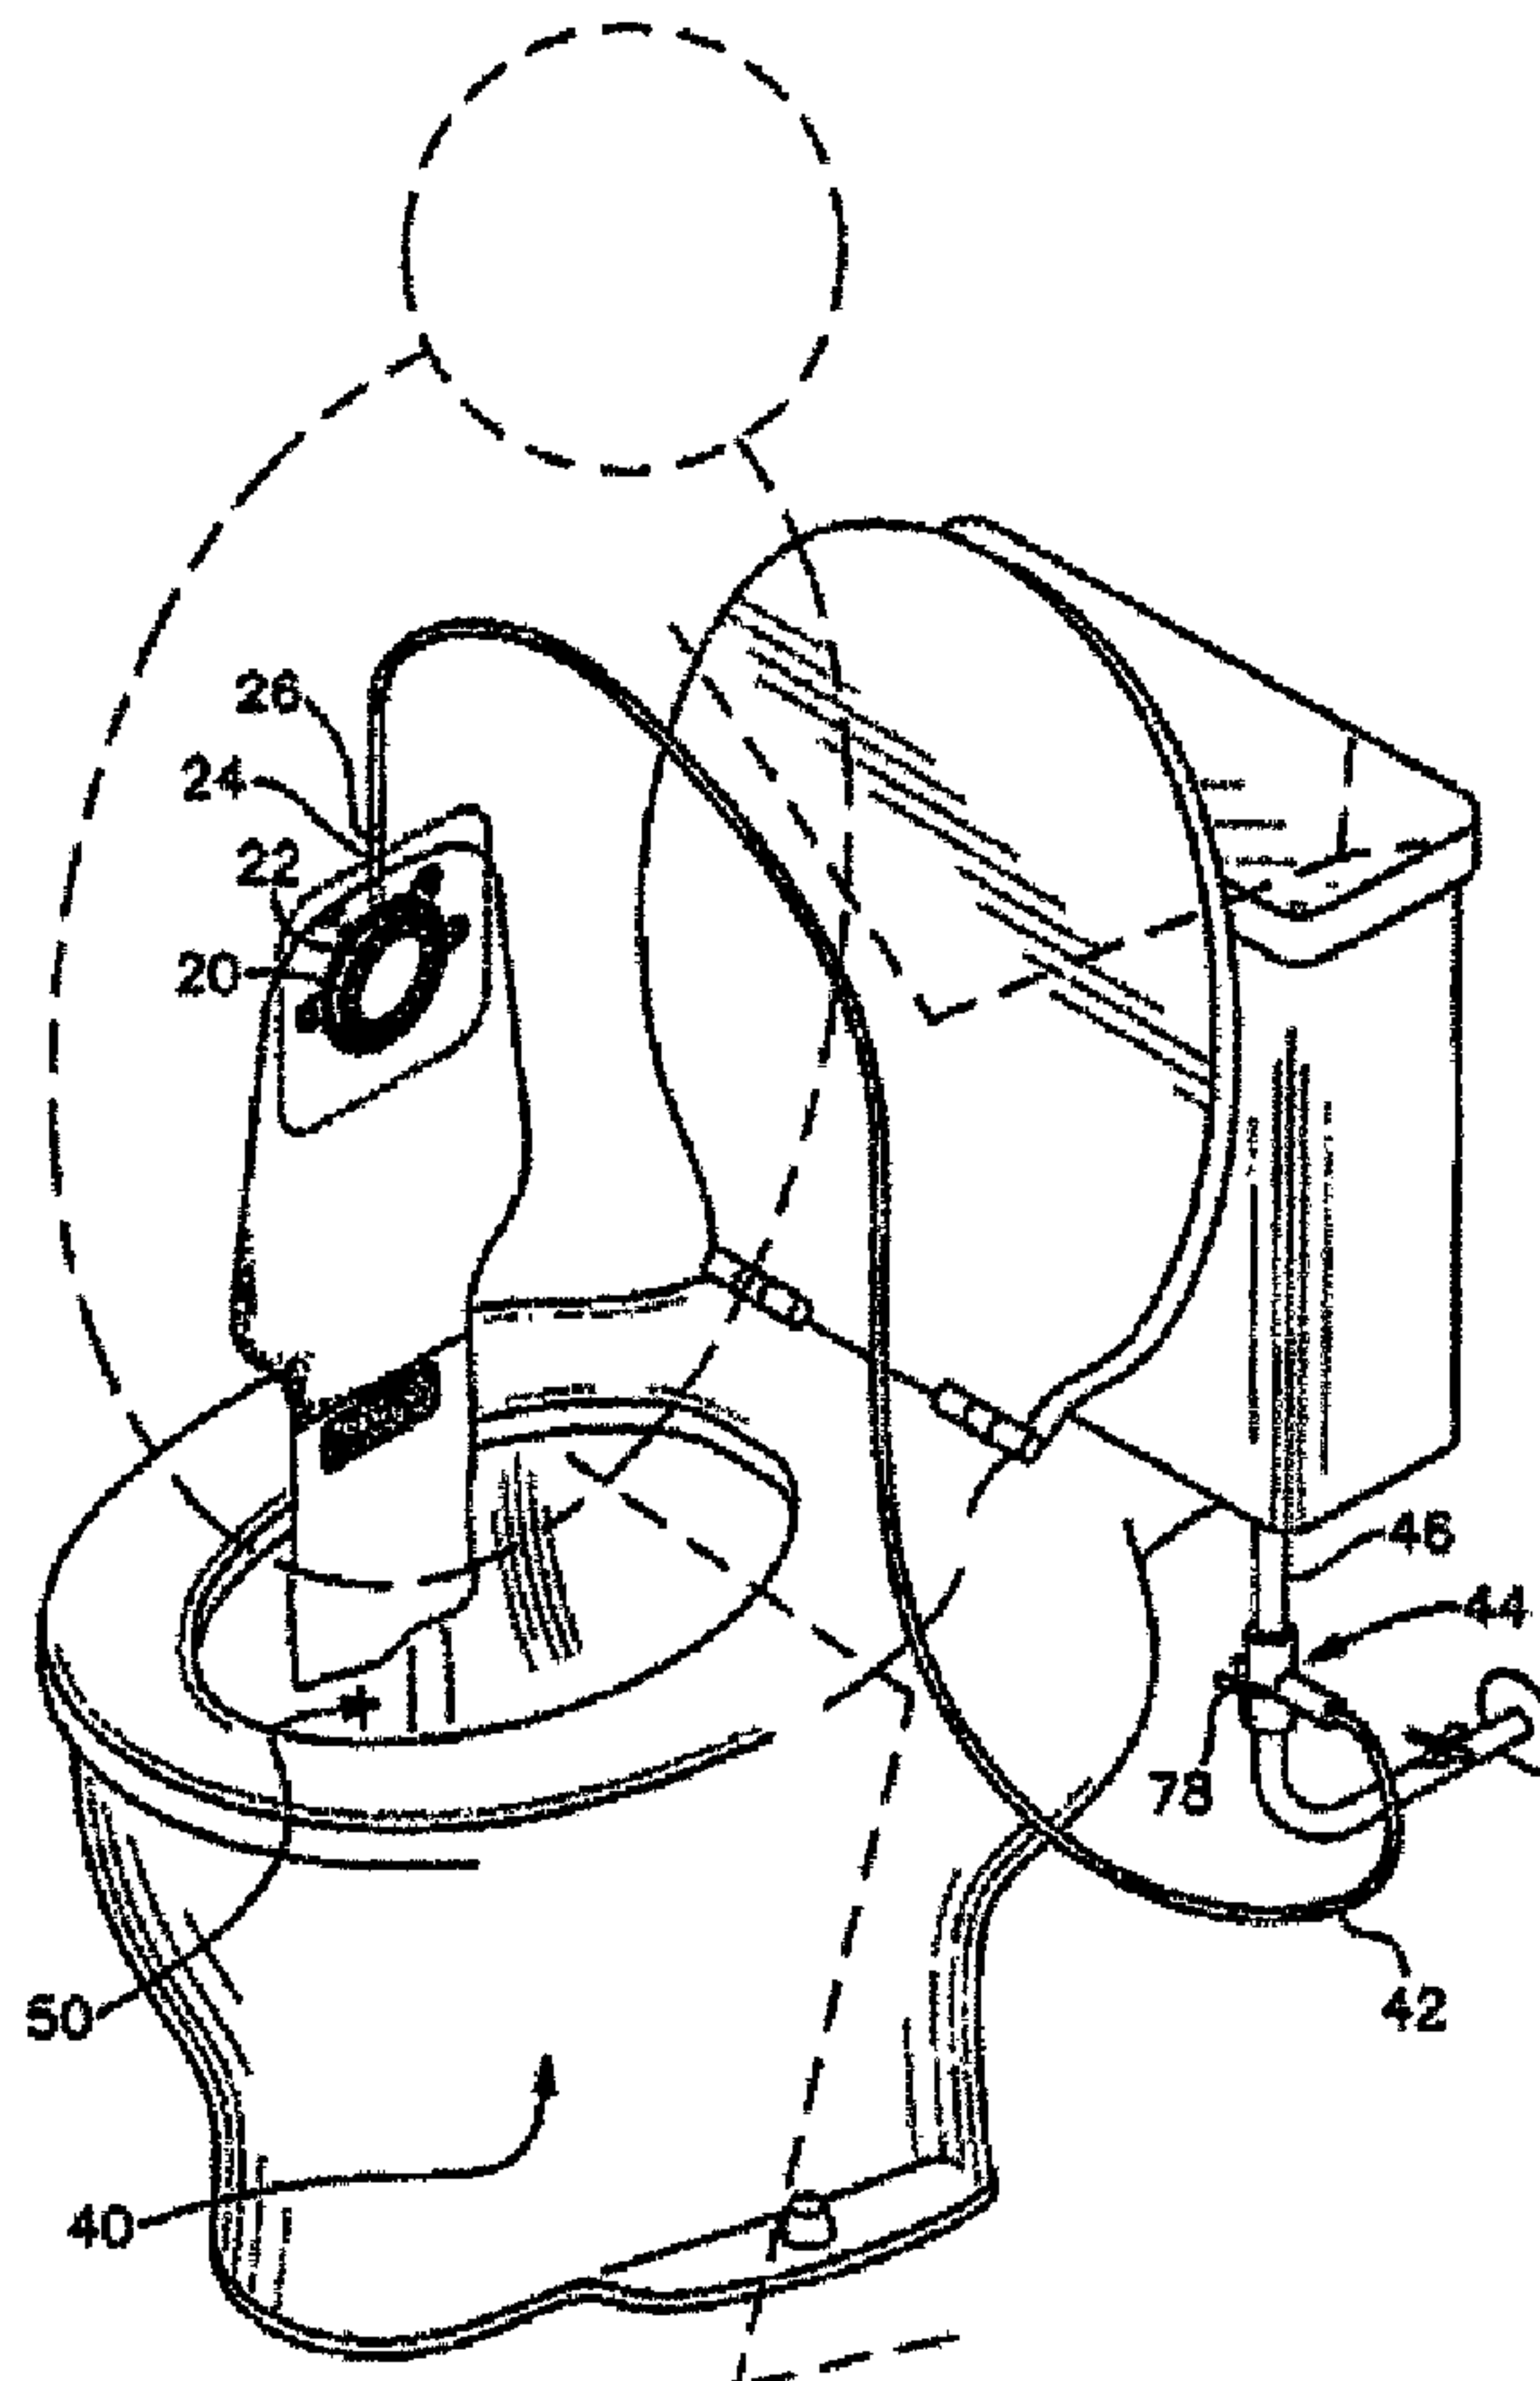

(57) Abrégé/Abstract:

A closed drainage system for irrigating colostomy bags wherein the bag (10) is irrigated and cleaned while in its operable position associated with the person eliminating messy removal and the possibility of spillage, odors and spread of infectious disease.. More



(57) **Abrégé(suite)/Abstract(continued):**

specifically, a manifold (20) is mounted within the colostomy bag (10) with an access (24) to a water pressure from outside. The manifold (20) provides a spray dispersion of fluid, preferably water, at the top of the bag (10) and then drips it down due to gravity through the bag and out the open bottom (30), preferably with the residue of the bag being washed out by the water and passing into a toilet. The user flushes the bag until it is completely free of all residue. A water source (42) from the toilet (40), or other suitable water supply, provides the pressured water to the manifold (20) inside the top of the colostomy bag (10).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 January 2006 (05.01.2006)

PCT

(10) International Publication Number
WO 2006/000985 A3

(51) International Patent Classification:

A61F 5/44 (2006.01)

(21) International Application Number:

PCT/IB2005/052022

(22) International Filing Date: 20 June 2005 (20.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10/874,294 21 June 2004 (21.06.2004) US

(71) Applicants and

(72) Inventors: **SCHENA, Kenneth R.** [US/US]; 2313 Harrier Run, Naples, FL 34105-2568 (US). **SCHENA, Blaine M.** [US/US]; Naples, FL (US).(74) Agents: **OLDHAM, Scott M.** et al.; Suite 300, One GOJO Plaza, Akron, OH 44311-1076 (US).(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- with amended claims and statement

(88) Date of publication of the international search report:
13 July 2006

[Continued on next page]

(54) Title: COLOSTOMY BAG CLEANING SYSTEM

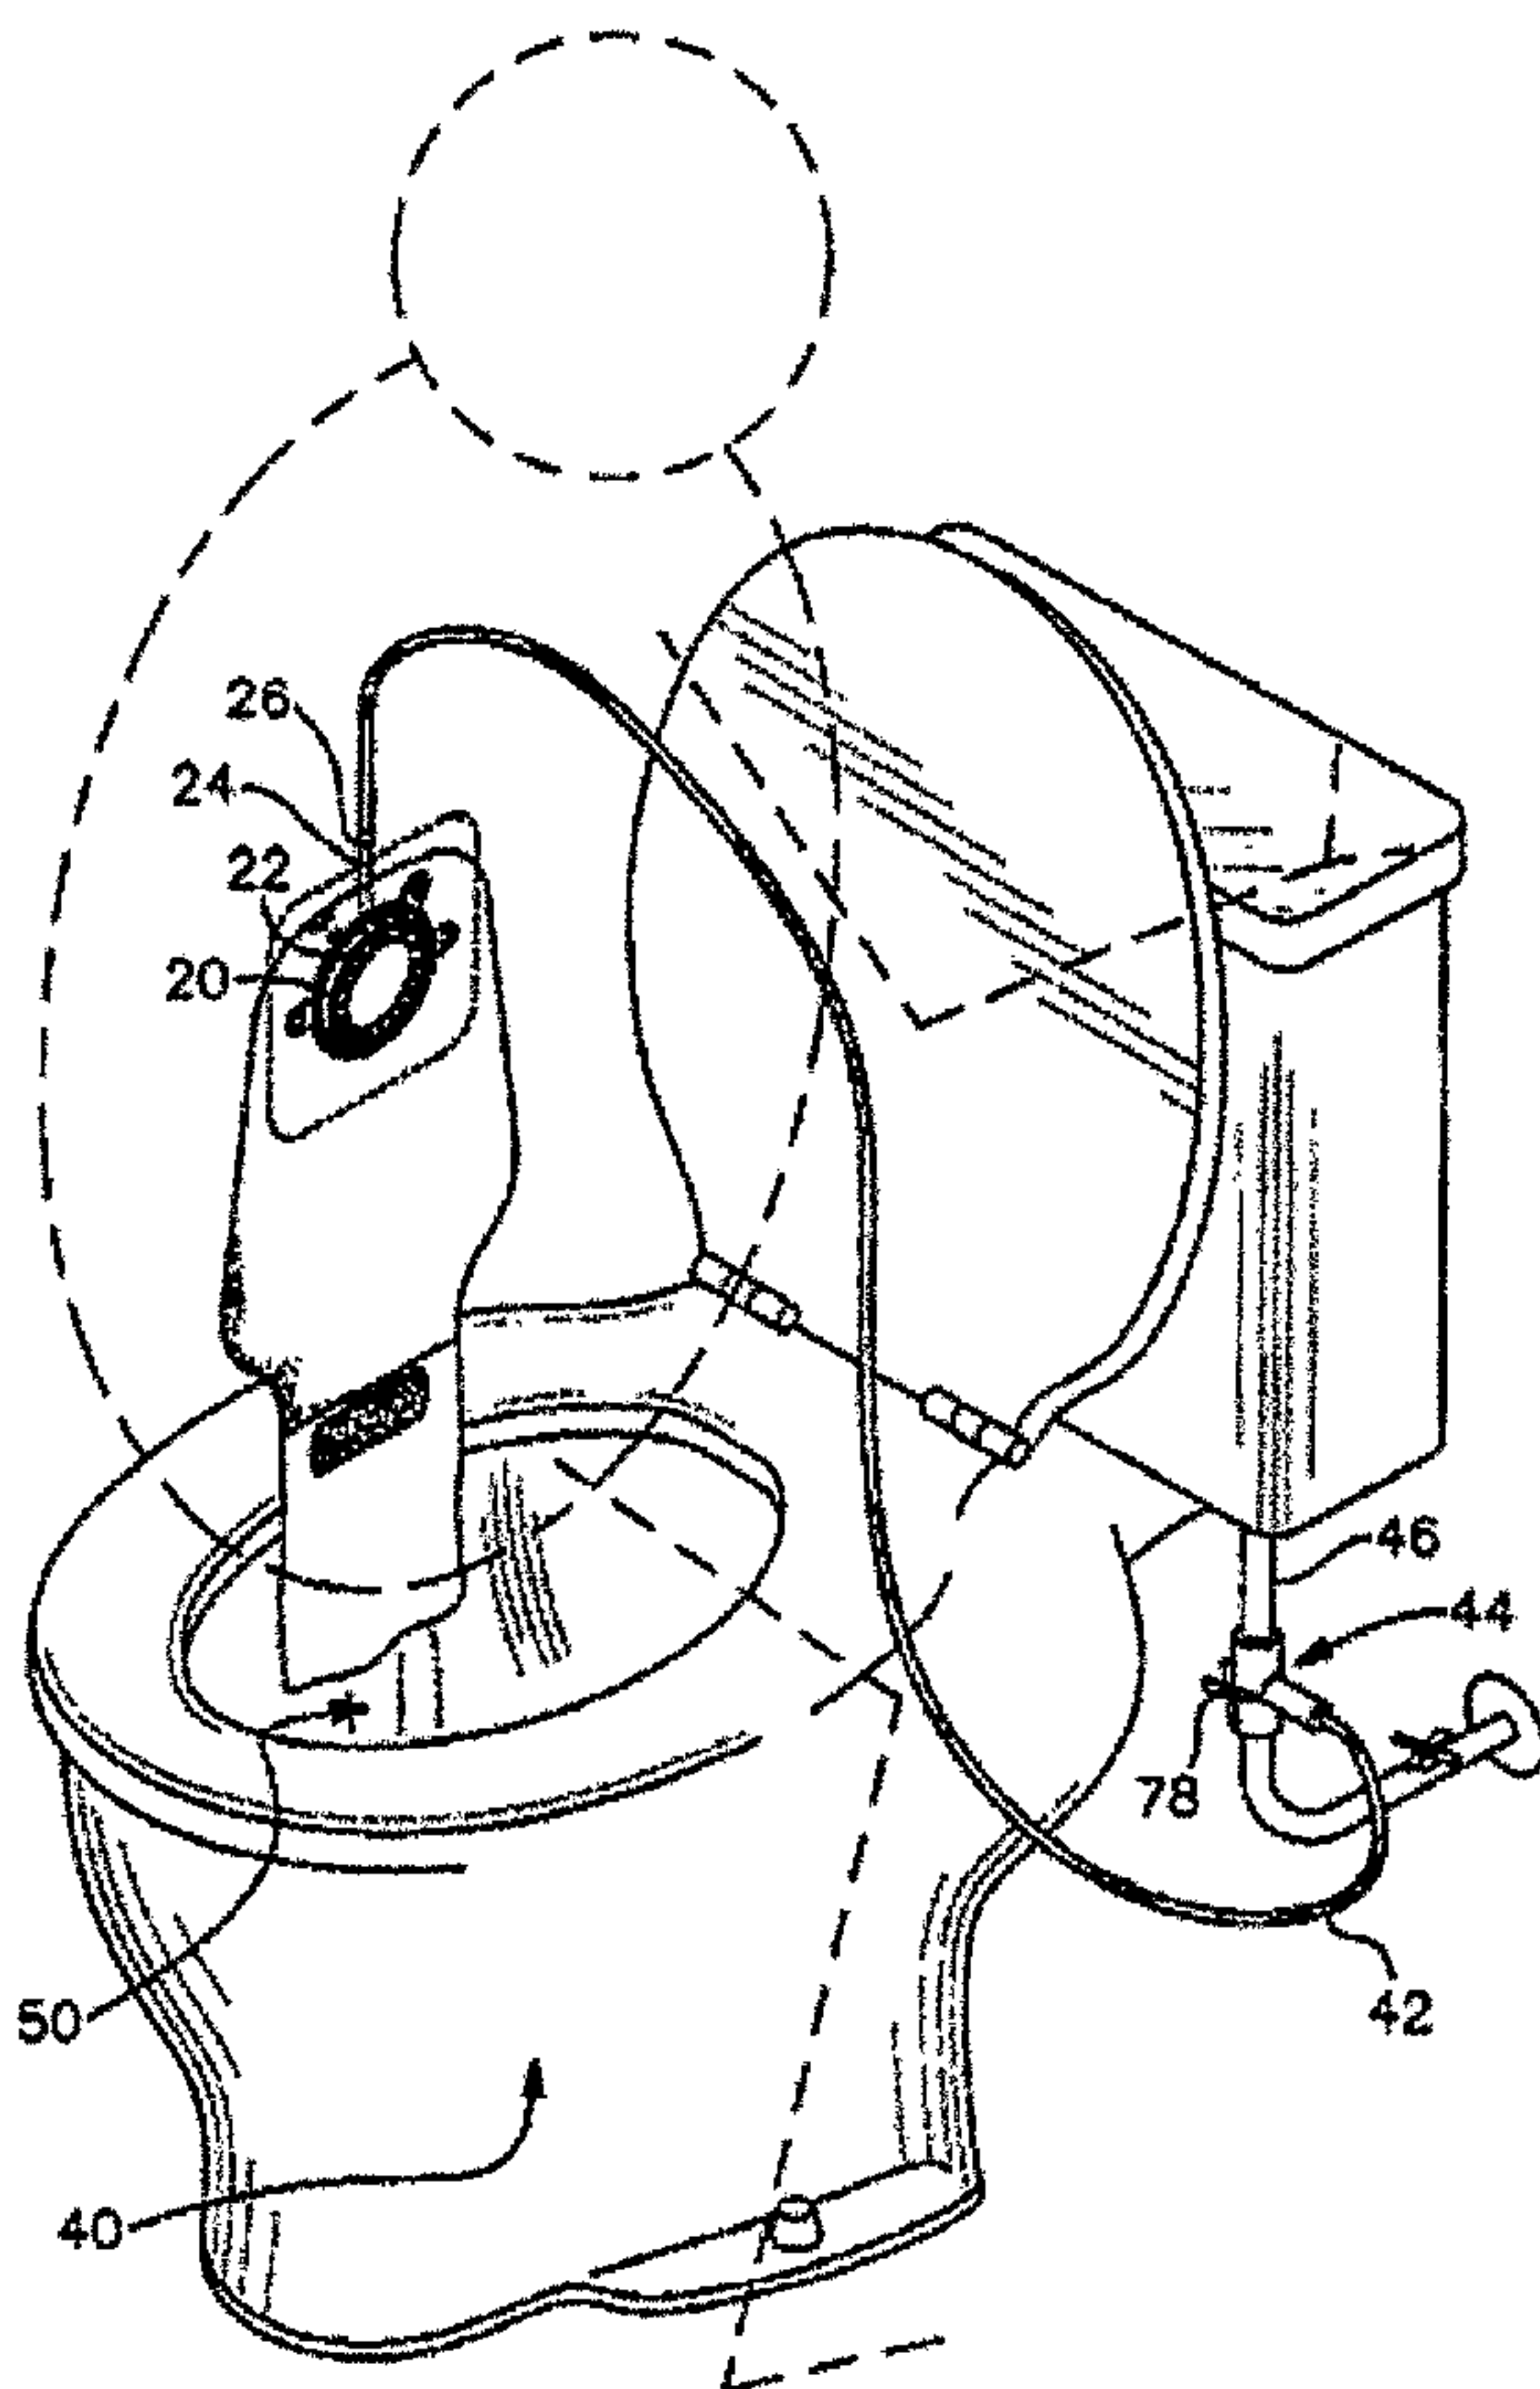

(57) Abstract: A closed drainage system for irrigating colostomy bags wherein the bag (10) is irrigated and cleaned while in its operable position associated with the person eliminating messy removal and the possibility of spillage, odors and spread of infectious disease.. More specifically, a manifold (20) is mounted within the colostomy bag (10) with an access (24) to a water pressure from outside. The manifold (20) provides a spray dispersion of fluid, preferably water, at the top of the bag (10) and then drips it down due to gravity through the bag and out the open bottom (30), preferably with the residue of the bag being washed out by the water and passing into a toilet. The user flushes the bag until it is completely free of all residue. A water source (42) from the toilet (40), or other suitable water supply, provides the pressured water to the manifold (20) inside the top of the colostomy bag (10).

WO 2006/000985 A3

WO 2006/000985 A3



Date of publication of the amended claims and statement:

28 September 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Description

COLOSTOMY BAG CLEANING SYSTEM

BACKGROUND OF THE INVENTION

- [1] A colostomy is a surgical procedure in which the colon or a portion thereof is removed and the digestive tract is attached to an opening created in the abdominal wall, thereby, allowing digested waste to pass through the abdomen. Typically, the waste is then collected by an impervious bag that is secured over the opening. The opening that results from a colectomy is known as an "ostomy" or a "stoma," and the impervious bag that collects the digestive waste is known as a colostomy bag.
- [2] An individual who has had a colostomy must typically remove and empty the colostomy bag several times a day, and must irrigate the ostomy at least every other day to maintain good health and sanitation. An ostomy is irrigated by applying flowing water into the ostomy and then allowing the water to drain.
- [3] Examples of ostomy irrigating devices in the prior art or cleansing systems are provided by US Patent Application Publication No. US2003/0229324, which features a closed drainage system that eliminates the necessity to stand over a toilet as it has its own collection system, but it is a difficult system to use and almost requires the person to be lying down as illustrated in Figure 1 for any satisfactory use. US Patent No. 6,408,861 illustrates a urine bag cleaning manifold, which is a very complicated system associated with a shower in a bathtub, and again, is difficult to operate and very elaborate in design. Patent No. 5,454,389 teaches an ostomy bag cleaning device that incorporates a mechanism for introducing water into a colostomy bag and then evacuate the waste material into a storage chamber. This device is cumbersome to use and does not provide for a simple cleaning of the colostomy bag without removal from the person.
- [4] Patent Nos. 5,096,503 and 4,194,506 both teach the general concept of insertion rods being inserted from the bottom of the colostomy bag up into the bag itself, and in both of these systems it's awkward to have to insert a rod up through the bottom of the colostomy bag with whatever drippings and materials that would be coming out, and this is not a satisfactory technique for cleaning the colostomy bag while having the bag still maintained on the person. A similar patent is 5,738,668, which again inserts a probe up into the bag for cleaning, and again the same problems are inherent. Patent No. 6,532,971 teaches a sanitary pouch washer that is designed for simultaneously cleaning the inside and outside of the colostomy bag and is a complicated mechanism and, again, is done with the colostomy bag removed from the person. US Patent No. 6,224,581 teaches a colostomy bag cleaning appliance having a mounting plate and,

again, this is a cleaning method with the bag removed from the person and creates significant complications in achieving the cleaning in a simple and effective manner.

SUMMARY OF THE INVENTION

- [5] The present invention is a closed draining system for irrigating ostomies and cleaning colostomy bags utilizing a manifold physically located near the top of the bag that provides a stream of water in a sprayed fashion into the top of the bag for internally cleaning the bag and simultaneously cleaning the ostomy, and with the amount of water added being controlled by the user, the bag still being in place on the person, and the flow from the bag coming out the bottom with the normal opening type bags available today.
- [6] Accordingly, it is a principal object of the invention to facilitate cleaning of the colostomy bag and simultaneously irrigating the ostomy by providing a manifold near the top of the colostomy bag that is connected to a source of water under some pressure that can then controllably sprinkle water into the colostomy bag for cleaning and irrigation of the bag and the ostomy, with the flow then directed out the bottom of the normal opening-type colostomy bags. The person still has the colostomy bag attached to their body, and the cleaning takes place preferably in association with drainage into a toilet or other suitable drainage facility.
- [7] A further object of the invention is to provide that the cleaning of the colostomy bag take place with the bag still attached to the body of the person, and it can be done quickly and very effectively on a regular basis during the day.
- [8] It is a further object of the invention to provide the manifold in conjunction with a standard colostomy bag flange, which is a flanged ring with adhesive backing that is typically secured to the abdomen of a person with an ostomy. The flange allows a colostomy bag to be easily attached and detached. The colostomy bag attaches to the flanged ring much like a Tupperware lid attaches to a Tupperware bowl, i.e., the colostomy bag and flange snap together to form an airtight seal. Consequently, an irrigating system that uses the same flanged ring is also easily attached and detached and, further, does not necessitate the removal of the bag from the person for the irrigation.
- [9] Finally, it is an object of the invention to provide improved elements and arrangements thereof for the purposes described, which is inexpensive, dependable and fully effective in accomplishing its intended purposes.
- [10] These and other objects of the present invention will become readily apparent upon further review of the following specifications and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- [11] Figure 1 is a perspective view of the colostomy bag utilizing a manifold around the

flanged opening on the bag itself, which then attaches to the flanged fitting positioned on the body of the person, and snaps together to form a fluid-tight seal between the bag and the person;

[12] Figure 2 is a perspective illustration showing a stick figure utilizing the invention by irrigating and flushing the colostomy bag by controlling a valve from the water supply to the toilet with the bottom of the colostomy bag open and flow taking place from the manifold through the bag and into the toilet;

[13] Figure 3 is a perspective illustration of the manifold associated with the flanged ring and adhesive backing attached to the person and engaging in the snapped fluid-tight relationship with the fitting on the colostomy bag, but wherein the manifold is associated with the fitting carried by the person and functions to clean and irrigate by water pressure coming in sprayed fashion from this manifold; and

[14] Figure 4 illustrates a colostomy bag with the manifold positioned around the top of the formed snap connection for the bag itself and water inlet being provided to the manifold around the top of the bag connection opening.

[15] Referring now to Figure 1 of the drawings, the numeral 10 indicates a colostomy bag, which has an opening 12 that is surrounded by a plastic ring 14 and attached in a fluid-tight fashion to the bag 10 by suitable means, such as adhesively or by other suitable known means. The ring 14 is formed with a flange that is designed to mate with a similarly formed ring and flange 14a on the person mounted colostomy bag attachment patch 16. The patch 16 is attached by pressure-sensitive adhesive on the back of the patch itself and the respective ring flanges 14 and 14a when snapped together form a fluid-tight seal between the ostomy 18 and the interior of the colostomy bag 12.

[16] The irrigating and cleansing technique of the invention is provided by a circular manifold, generally indicated by numeral 20, which is preferably a soft plastic and encircles the interior of the opening 12 into the colostomy bag 10. A plurality of small holes 22 around the perimeter of the manifold 20 are provided to allow the passage of spray in multiple and random directions of water pressure introduced through an access tube 24 that is connected to a water source (not shown) via fitting 26.

[17] The colostomy bag 10 in the usual fashion is designed to be opened at the bottom end, generally identified by numeral 30, and effectively, this is a rolled up sealing procedure utilizing Velcro tape indicated by the loop material 32 and the hook material 34. It is well understood that when this is folded up and the Velcro attachment is in place the bag is sealed at the bottom, but for the purposes of the irrigation and cleansing of the instant invention, the bag is opened and positioned over the toilet so that irrigation cleansing water passing through the manifold 20 and orifices 22 will flow down through the bag and out the bottom opening 30 and into the toilet as is

shown in more detail in Figure 2 of the drawings.

[18] Referring now to Figure 2, this illustrates a normal toilet indicated generally by numeral 40, and the individual normally sits backward on the toilet seat to operate the invention. A flexible water hose 42 is connected to the fitting 26 to provide water pressure through the conduit 24 and to the manifold 20 for spray out the orifices 22. The water source is by a fitting indicated generally by numeral 44 that fits into the normal water supply tubing to the toilet, indicated by numeral 46, and has the ability to control the amount of flow by a valve, indicated by numeral 48, associated with the conduit 42.

[19] Thus, with reference to Figure 2, it can be understood that the individual sits backward on the toilet seat, connects the conduit 42 to fitting 26 and then, by adjustively controlling the valve 48, provides a sufficient amount of water pressure into the manifold to cause a flow to irrigate the ostomy 18 as seen in Figure 1, and to provide a cleansing and irrigating action within the colostomy bag 10 at with the residue dripping out at the bottom into the toilet as shown generally by numeral 50.

[20] Referring now to Figure 3 of the drawing, this shows the embodiment, where the manifold, identified generally as numeral 20a, is associated with the ring 14a of the patch 16 that is attached to the skin of the person over the ostomy opening 18, and in this instance, includes an access fitting 24a adaptively connected to the water line 42 so that regulated water pressure provides the spray illustrated generally by the numeral 60.

[21] Referring now to Figure 4, this shows a further embodiment of the invention where the manifold, indicated generally by numeral 20b, as can be seen is positioned above the opening 12 in the colostomy bag 10. A similar water inlet 24b is utilized in this embodiment.

[22] It should be understood that while Figure 2 illustrates the water pressure as coming from a water line 46 that normally provides water to the toilet itself, the invention contemplates that any suitable source of water and some pressure will meet the objects of the invention. For example, a bottle of water with the ability to squeeze the bottle will provide pressure. Similarly, a small battery operated pump with a water source would provide the pressure. It is believed that the invention will best be set up for a person to utilize in their own bathroom in their own home, However, there may be instances when they are traveling or not provided with a facility set up with the ability to hook the water hose to the adaptor 26 and feed the conduit 24 into the manifold, and thus any pressure source will be suitable.

[23] It is also to be understood that the spray holes 22 in the manifold are of no particular consequence except to provide a suitable, fairly fine, spray that will tend to both wash and clean and irrigate the residue inside the colostomy bag itself so as to

facilitate cleaning in the shortest possible time. It has been found that this system can provide cleaning in just a few minutes and can be done several times a day very conveniently by virtue of the very simple application of water pressure through the manifold to clean the colostomy bag itself.

[24] It is to be understood that the ease and the functioning of this invention is the fact that the manifold is positioned high in the colostomy bag, thus, with a large spray pattern clears the bag from the top down, and we have found it is desirable to have the manifold positioned no lower than the opening 12 in the colostomy bag for the stoma for attachment to the stoma flange 14a. This then provides for good gravity flow of the water being used in the irrigating and cleansing system, allowing it to flow down through the bag, picking up all residue and out the bottom opening 30. It also should be understood that any colostomy bag that opens at the bottom end will work with the invention.

[25] It is to be understood that the scope of the invention is not to be limited by the descriptions and explanations set forth above, but that the invention encompasses any and all embodiments within the scope of the following claims.

CLAIMS


What is claimed is:

1. A cleansing system for a flexible colostomy bag, comprising:
a colostomy bag having an upper portion, a bottom drain opening which is selectively closeable, a stoma opening, and a supply opening defined therein;
a manifold having a plurality of spaced openings, the manifold being connected to the supply opening and positioned in the upper portion of the colostomy bag;
a fluid supply system to provide fluid under pressure into the manifold, whereby such fluid is delivered throughout the upper portion of the colostomy bag and drains down and out the bottom drain opening to thereby clean the colostomy bag of waste material while still attached to the abdomen around the stoma of a patient; and
a rim attached to said colostomy bag, about the stoma opening, said rim being adapted for attachment to an ostomy flange attached around a patient's stoma and forming a watertight seal with the patient,
wherein the manifold is formed in an arrangement around said rim so as to irrigate the stoma when the colostomy bag is positioned in association therewith.
2. The cleansing system for a colostomy bag according to claim 1, wherein the manifold is formed in a circular relationship about the rim to direct fluid under pressure toward the rim from the fluid supply system.
3. The cleansing system for a colostomy bag according to claim 1, wherein the manifold is formed having the spaced openings along its circumference to dispense fluid throughout the upper portion of the colostomy bag.
4. The cleansing system for a colostomy bag according to claim 1, wherein the manifold is coupled to the fluid supply system by a conduit, such that fluid is supplied into the manifold under pressure and dispensed from the plurality of spaced openings under pressure in a spray pattern.


5. The cleansing system for a colostomy bag according to claim 1, wherein the manifold is positioned at the top portion of the colostomy bag, and the openings therein are positioned in a spray pattern to dispense fluid downwardly from the top of the colostomy bag.

6. The cleansing system for a colostomy bag according to claim 1, wherein the manifold is positioned at the top portion of the colostomy bag, and the openings therein are positioned in a spray pattern toward the walls of the colostomy bag to dispense fluid outwardly against the sides of the colostomy bag and downwardly from the top of the colostomy bag.


[Fig. 1]

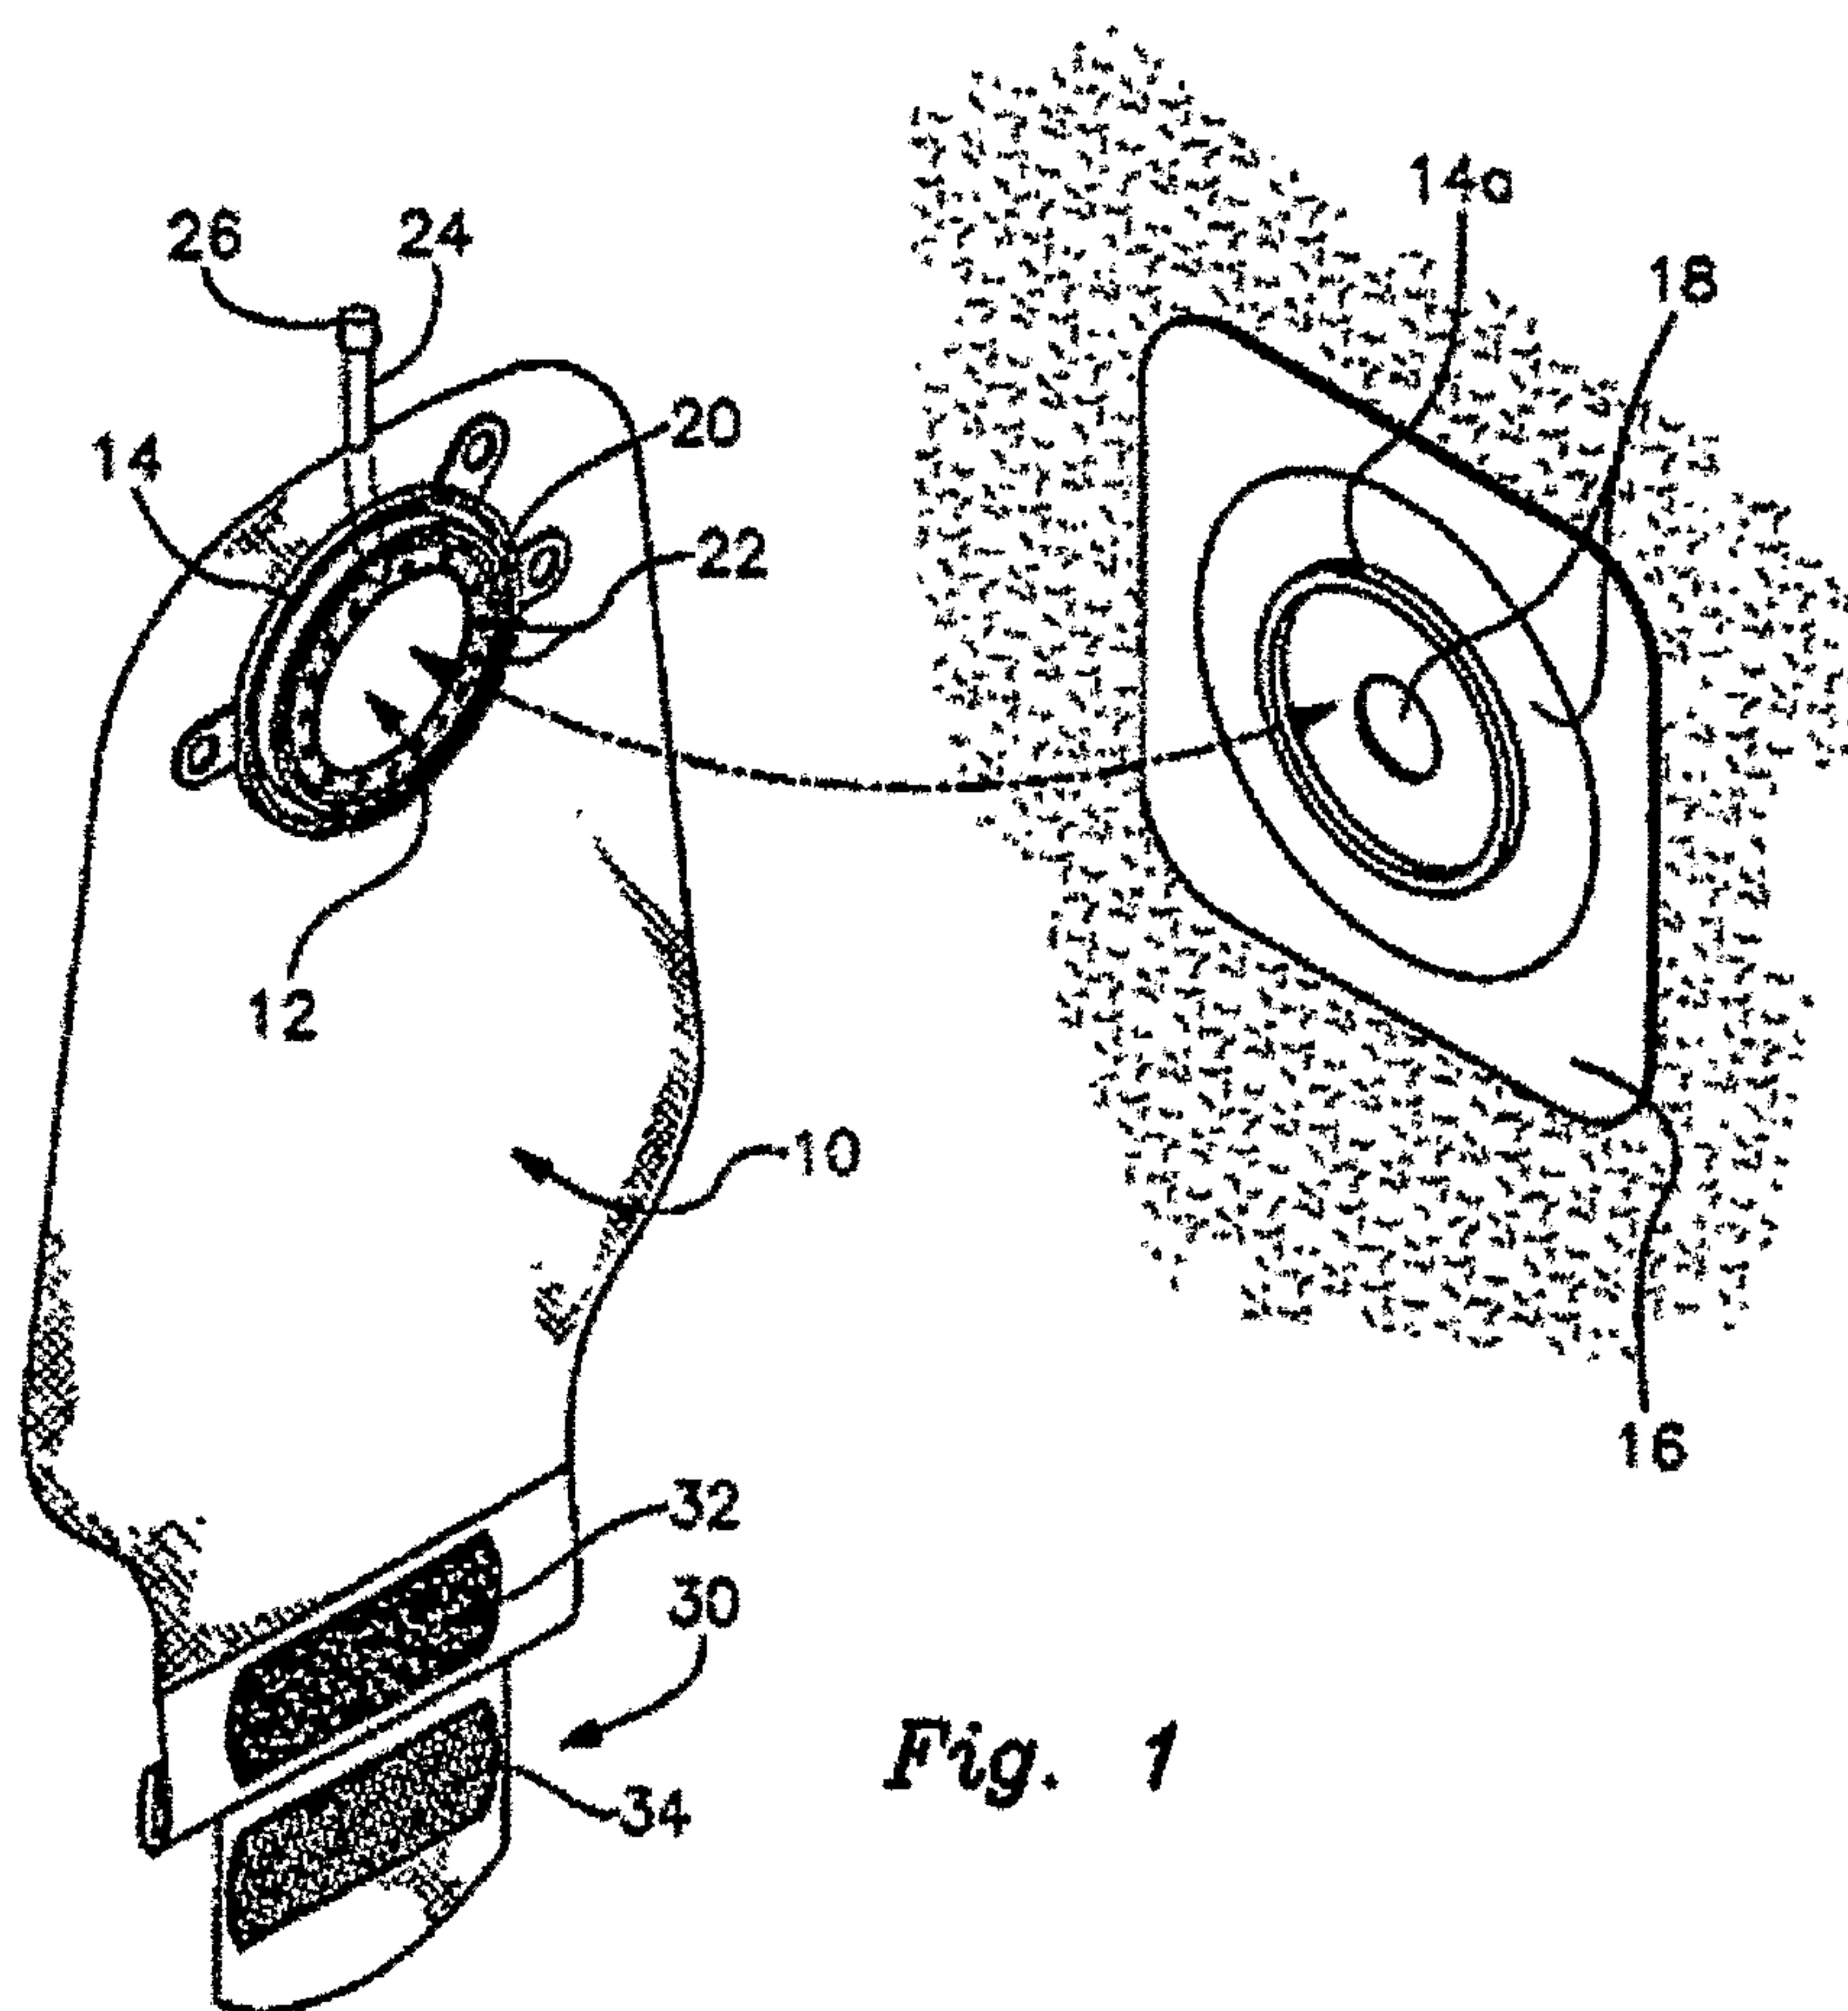


[Fig. 2]

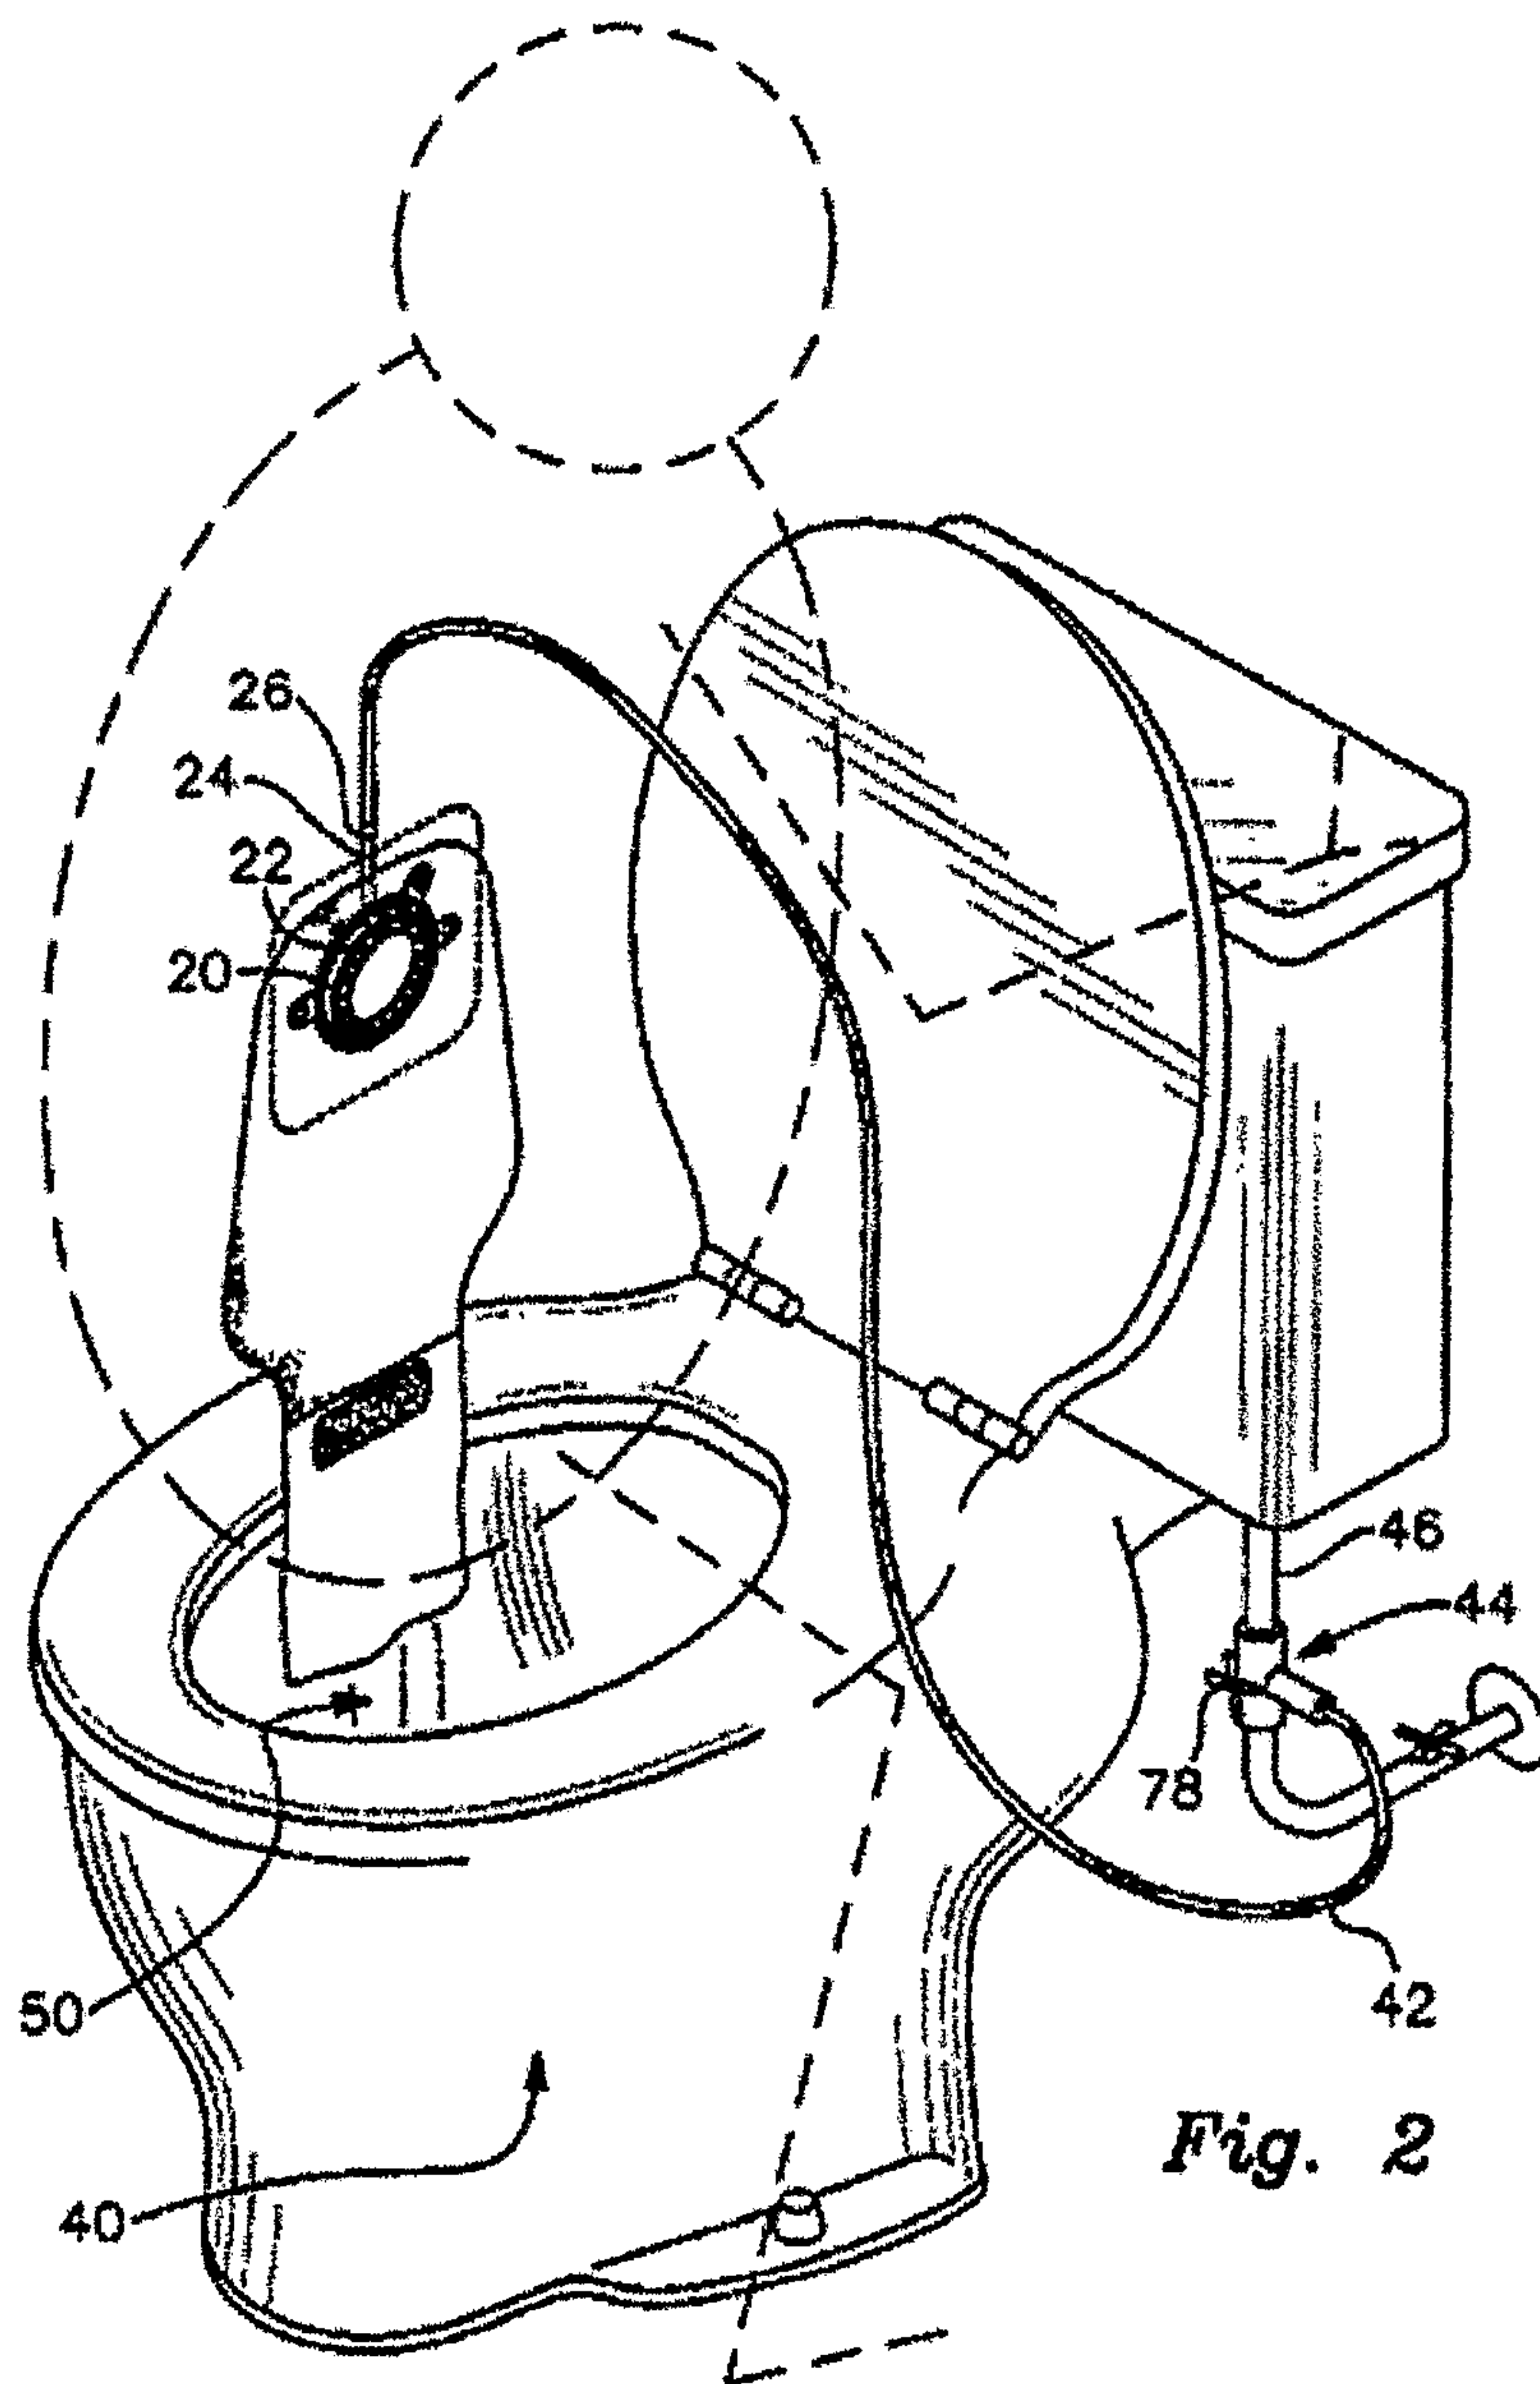

[Fig. 3]

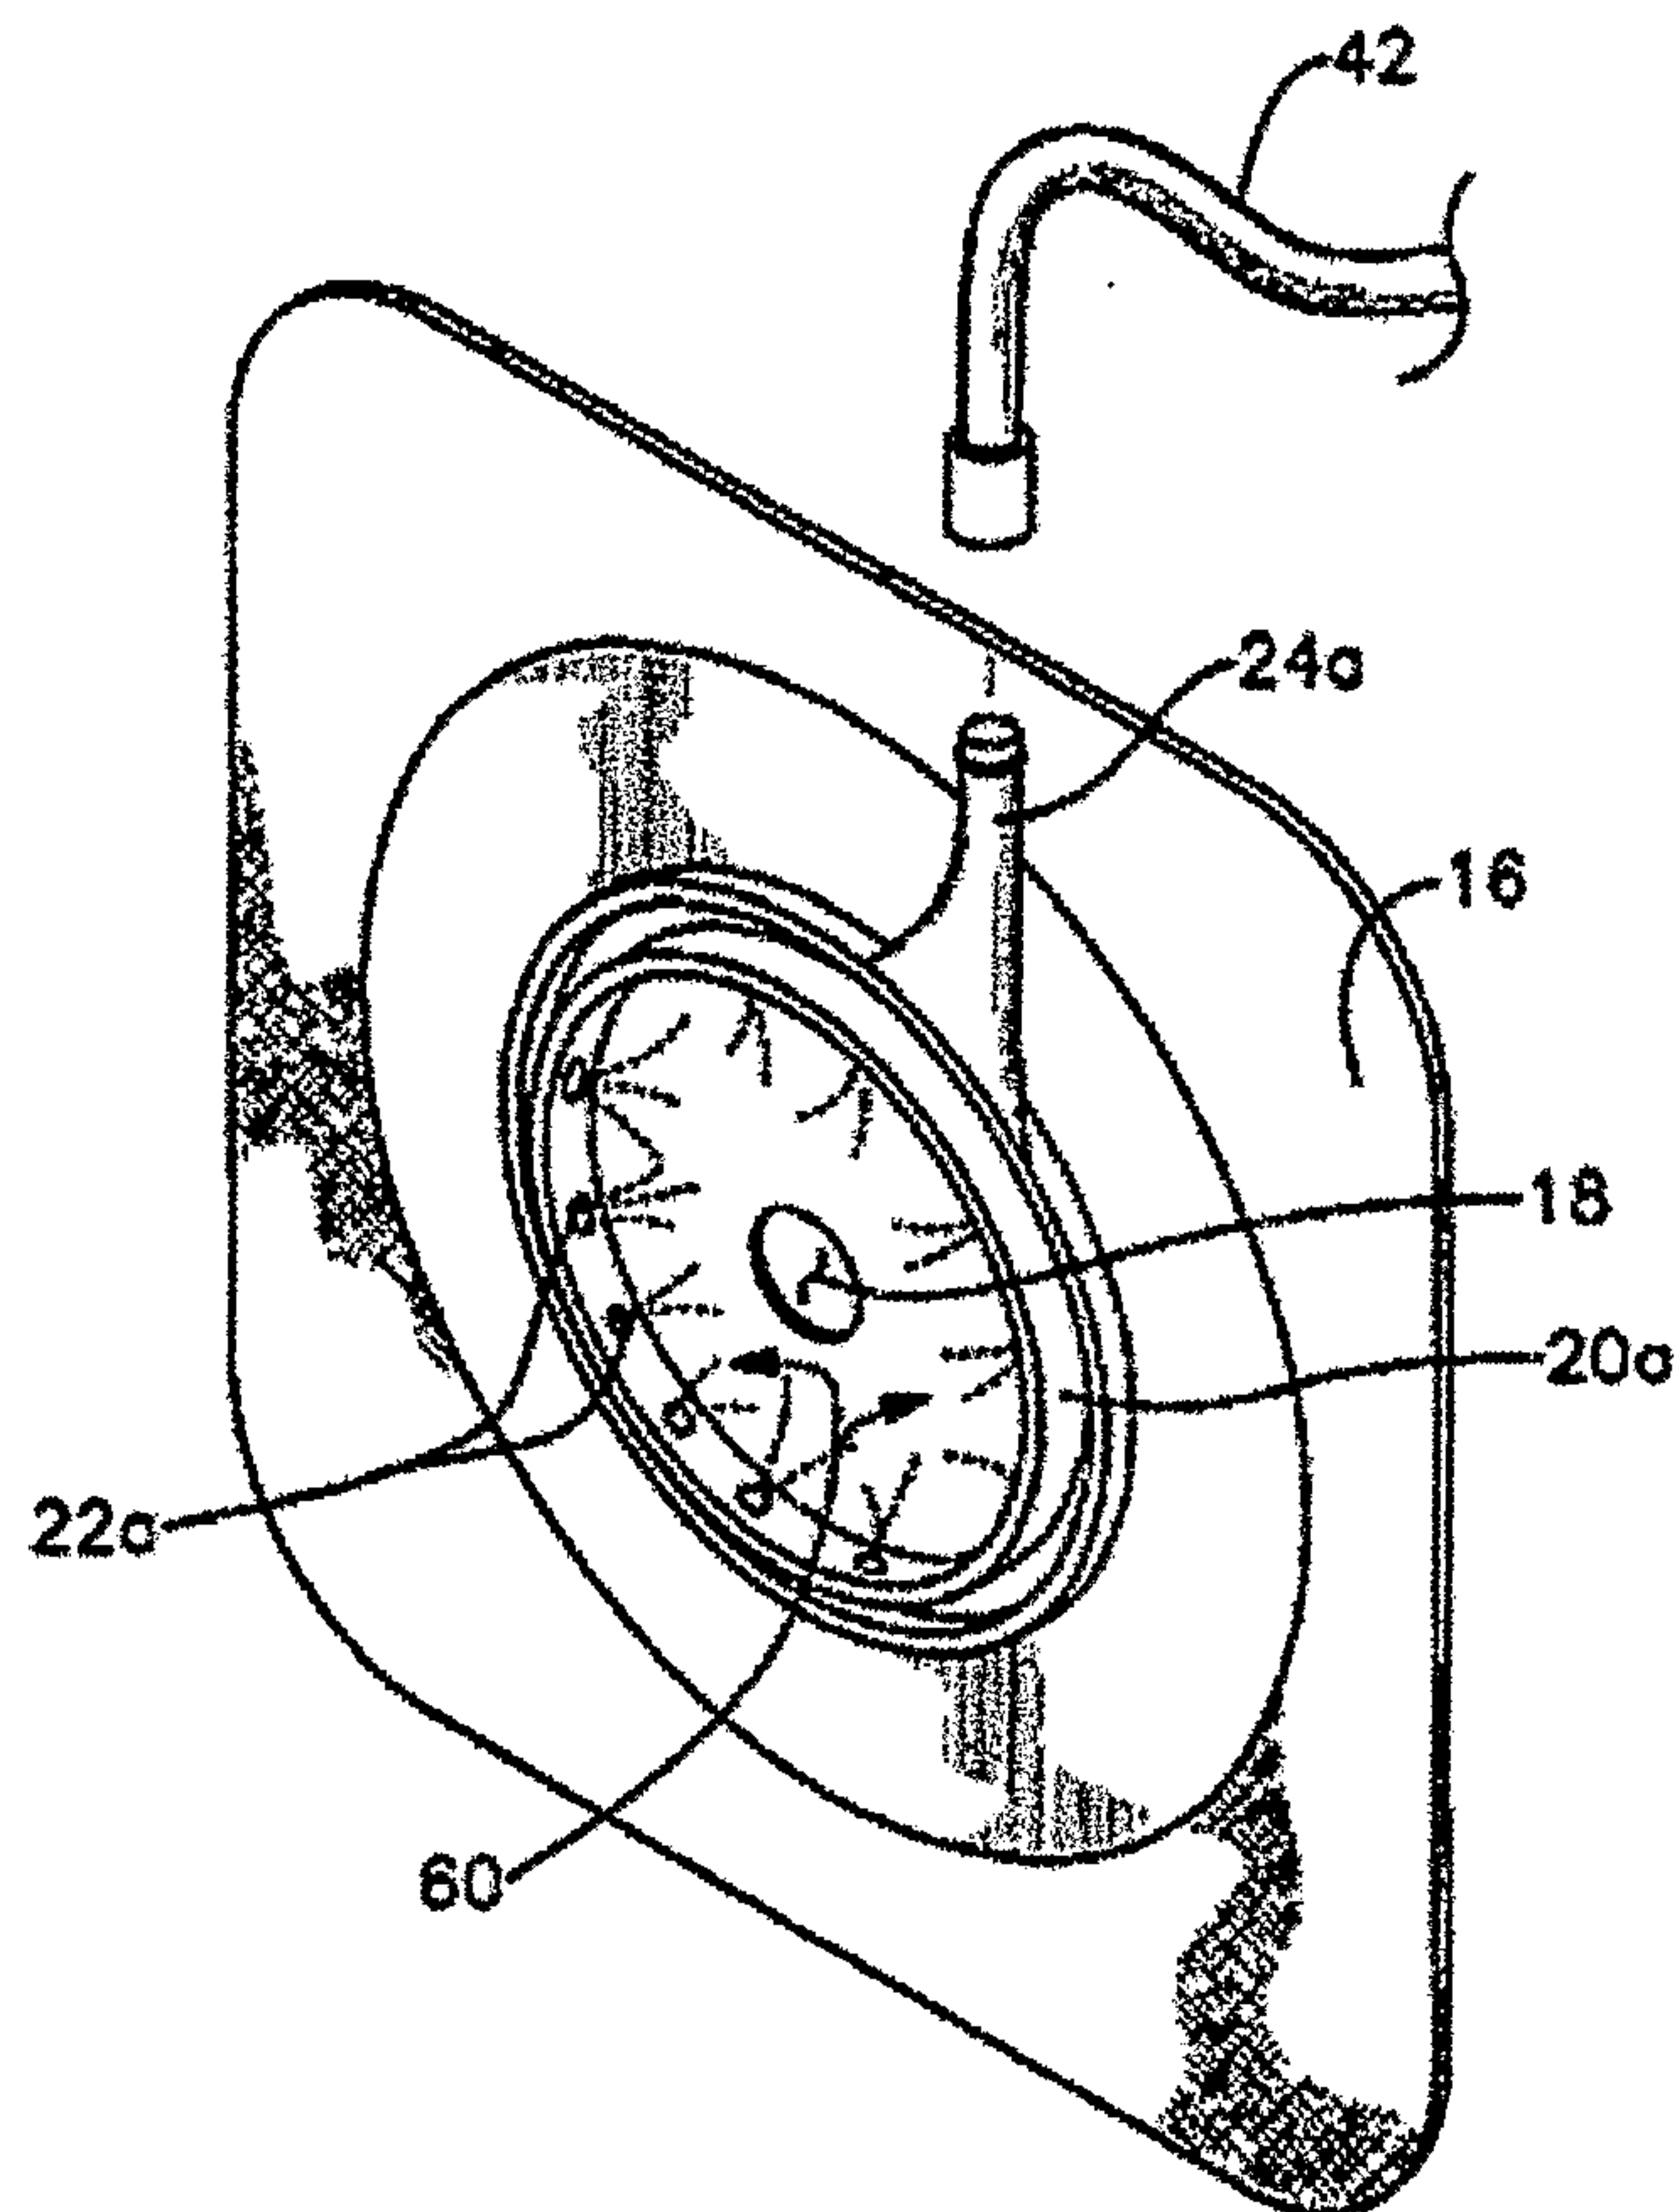*Fig. 3*

[Fig. 4]

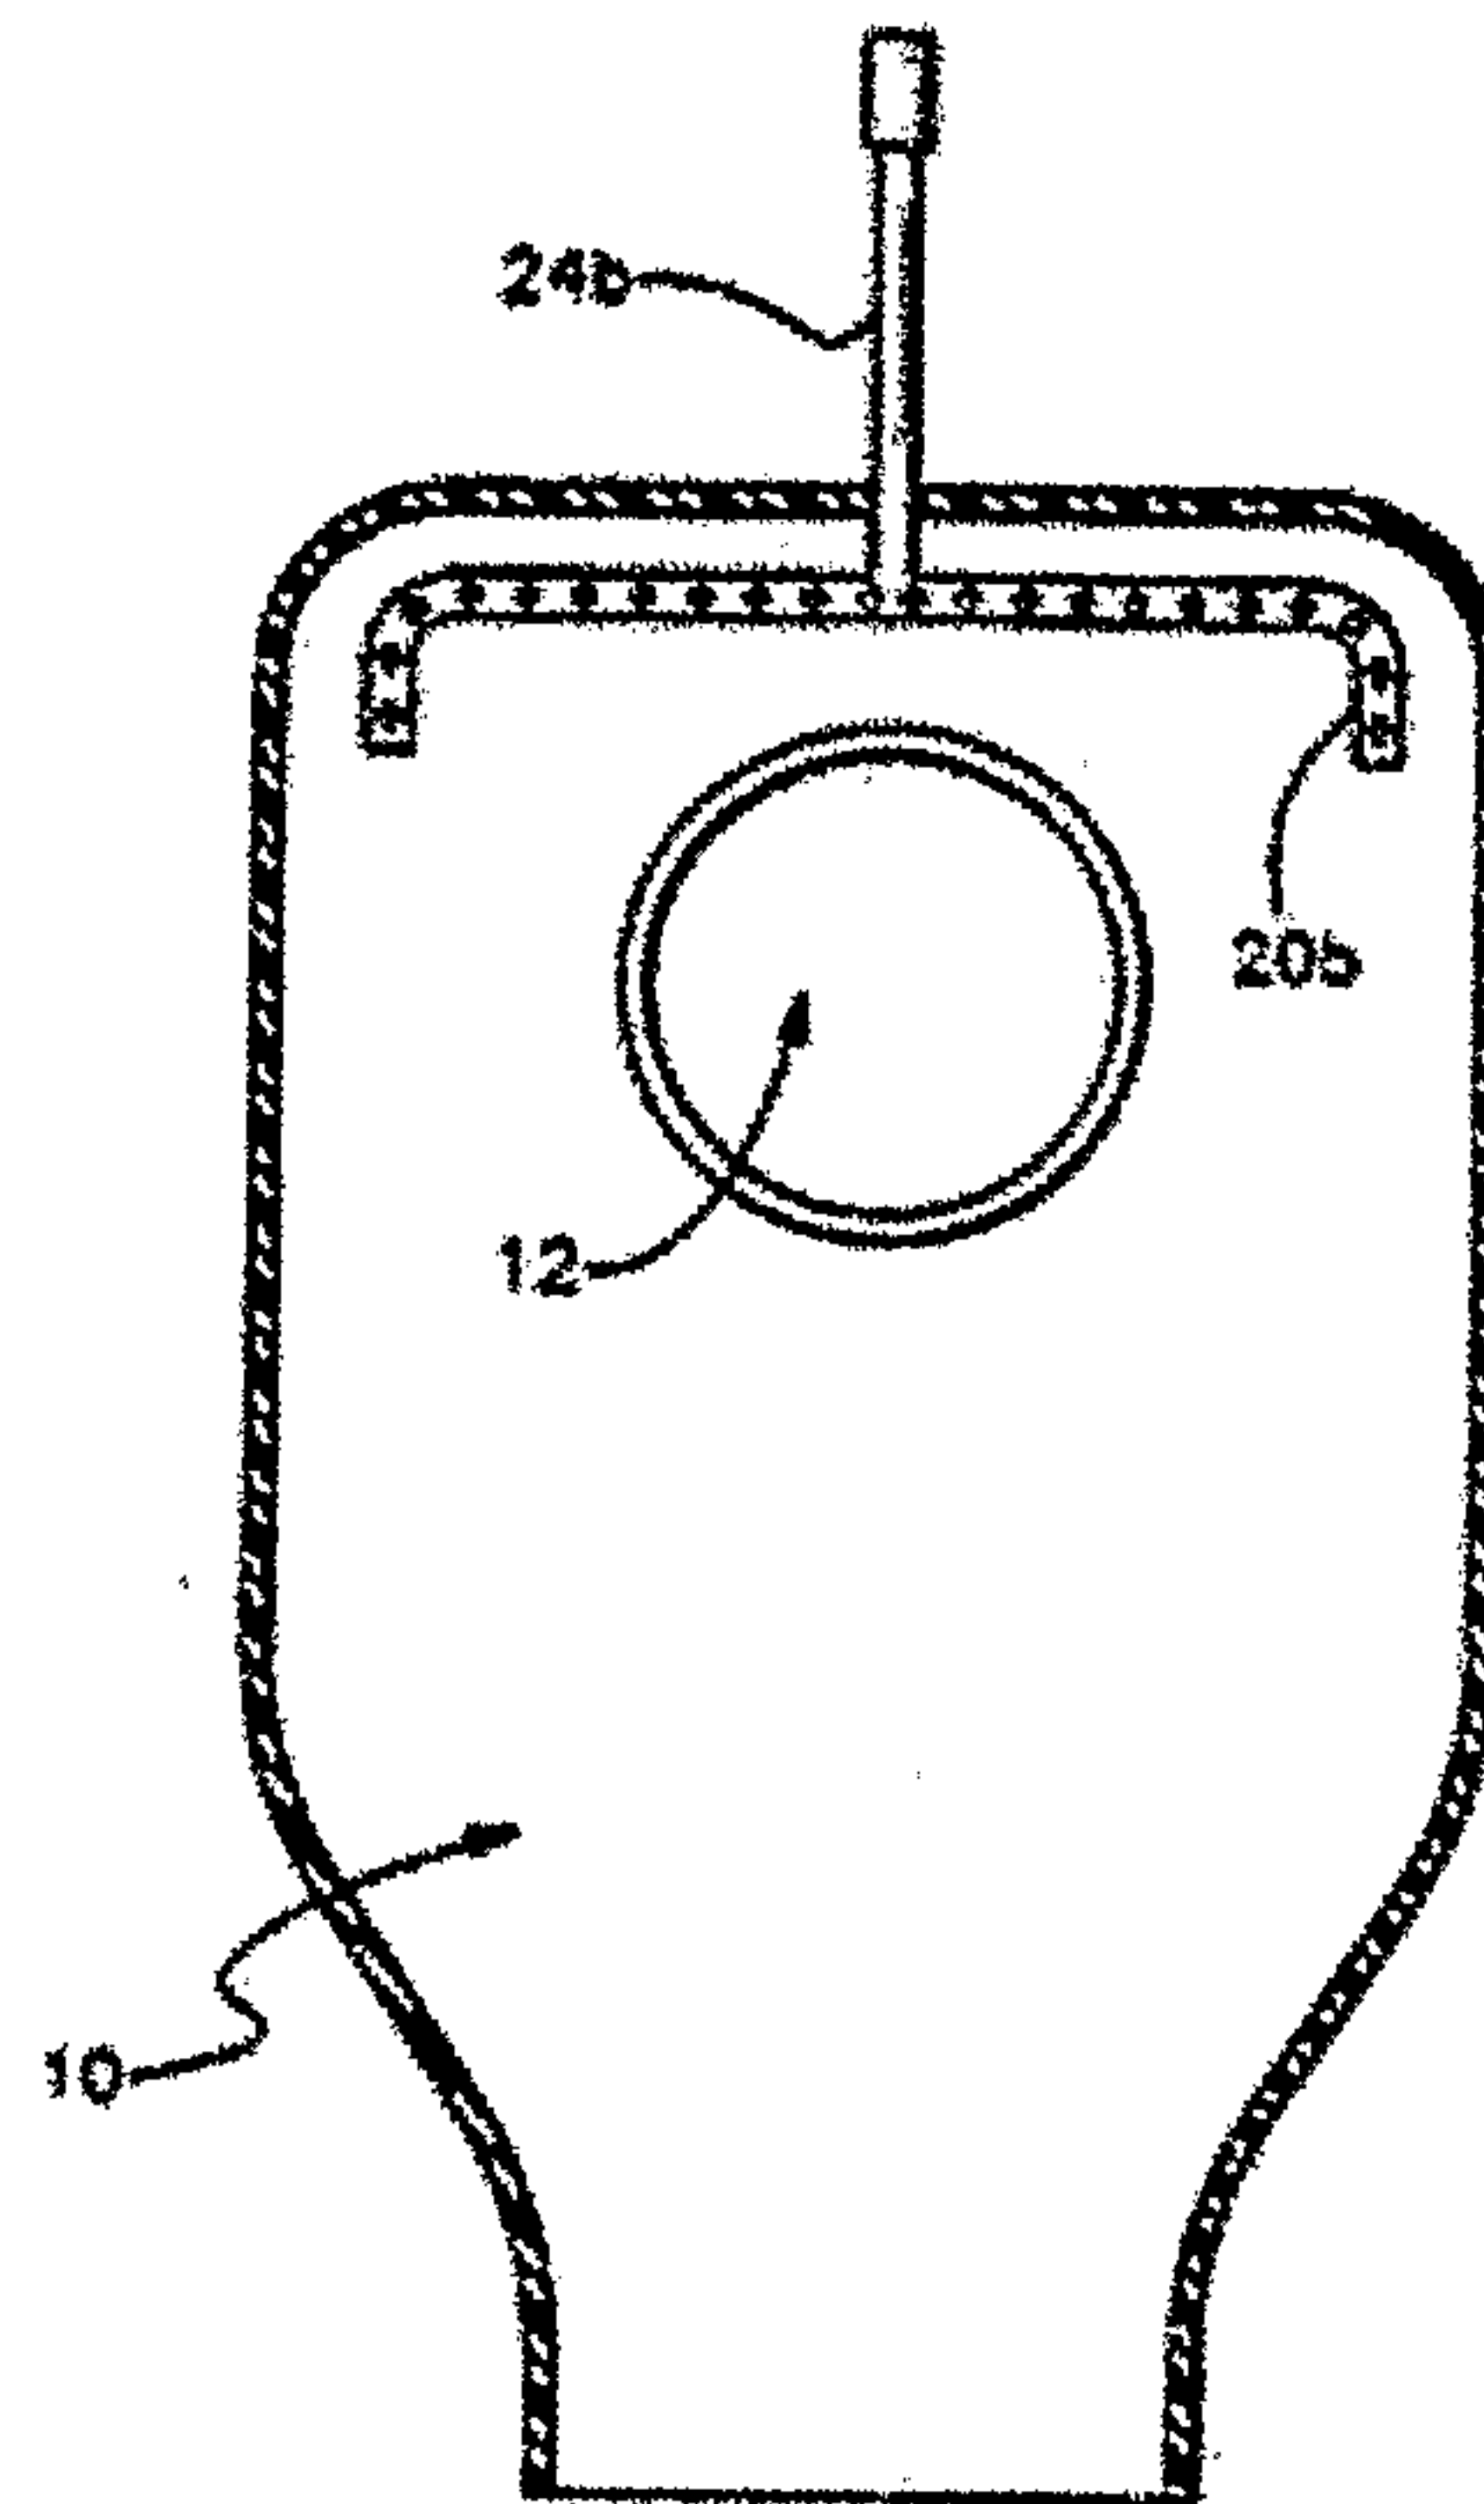*Fig. 4*

