



(51) International Patent Classification:

H01L 33/02 (2010.01) H01L 33/32 (2010.01)

H01L 33/06 (2010.01) H01L 33/00 (2010.01)

(21) International Application Number:

PCT/IB2019/054821

(22) International Filing Date:

10 June 2019 (10.06.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/684,283 13 June 2018 (13.06.2018) US

(71) Applicant: **KING ABDULLAH UNIVERSITY OF SCIENCE AND TECHNOLOGY** [SA/SA]; 4700 King Abdullah University of Science and Technology, Thuwal, 23955-6900 (SA).

(72) Inventor: **LI, Xiaohang**; 4700 King Abdullah University of Science and Technology, Thuwal, 23955-6900 (SA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: LIGHT EMITTING DIODE WITH A GRADED QUANTUM BARRIER LAYER

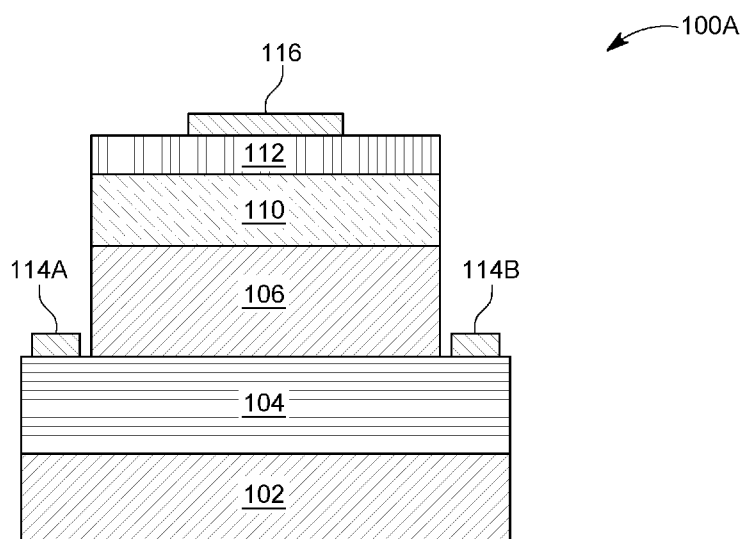


FIG. 1A

(57) Abstract: A light-emitting diode includes an n-type aluminum nitride layer formed on a substrate, a multiple quantum well formed on the n-type aluminum nitride layer, and a p-type aluminum nitride hole-injection layer formed adjacent to the multiple quantum well. The multiple quantum well includes a first aluminum nitride quantum well layer having a fixed composition and surrounded by first and second aluminum nitride quantum barrier layers, and a second aluminum nitride quantum well layer having a fixed composition and surrounded by the second aluminum nitride quantum barrier layer and a third aluminum nitride quantum barrier layer. At least one of the first, second, and third aluminum nitride quantum barrier layers has a graded aluminum composition. The first aluminum nitride quantum barrier layer is adjacent to the n-type aluminum nitride layer and the third aluminum nitride quantum barrier layer is adjacent to the p-type aluminum nitride hole-injection layer.

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

LIGHT EMITTING DIODE WITH A GRADED QUANTUM BARRIER LAYER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Patent Application No. 62/684,283, filed on June 13, 2018, entitled "REMOVAL OF ELECTRON BLOCKING LAYER BY GRADING QUANTUM BARRIER IN MULTIPLE QUANTUM WELLS FOR LIGHT EMITTING DEVICES," the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND

TECHNICAL FIELD

[0002] Embodiments of the subject matter disclosed herein generally relate to a light emitting diode having a multiple quantum well with quantum well layers having a fixed aluminum composition and at least one quantum barrier layer having a graded aluminum composition.

DISCUSSION OF THE BACKGROUND

[0003] Deep ultraviolet light sources are used in numerous important applications including water and air purification, biological analysis, medical sensors, and curing. Compared to the most widely used mercury-based deep ultraviolet sources, AlGaIn-based semiconductor deep ultraviolet light emitting diodes (light emitting diodes) are environment-friendly, compact, and long-lasting. However, unlike the highly efficient blue light emitting diodes, deep ultraviolet light emitting

diodes still suffer from single-digit wall plug efficiency (WPE) even though the highest external quantum efficiency (EQE) is over 20%. The use of an electron blocking layer (EBL) is a significant constraint on wall plug efficiency. In III-nitride light emitting diodes, electrons have much higher mobility than holes and thus the electrons tend to flow over the active region, typically comprising multiple quantum wells (MQWs), into the p-type region. These overflowed electrons do not participate in radiative recombination in the active region and are wasted. Moreover, the overflowed electrons can recombine with holes in the p-type region, which reduces hole injection efficiency. Thus, electron overflow is one major contributing factors to lower wall plug efficiency.

[0004] To address the electron overflow, the electron blocking layer, which is commonly a wider-bandgap and higher-Al-composition layer or structure, has typically been employed between the p-type region and the active region. However, the electron blocking layer can hinder hole injection and increase serial resistance constraining the wall plug efficiency due to two intrinsic material properties. First, the band alignment determines that the heterojunctions formed by InAlGa_N alloys are type-I (straddling gap), which indicates that the desirable conduction band barrier of the electron blocking layer blocking electrons on the active region side also leads to simultaneous formation of a valence band barrier blocking holes on the p-type region side, thereby impeding hole injection. Second, excellent p-type doping is necessary for the electron blocking layer to achieve low layer resistance. However, the activation energy of the Mg acceptor in III-nitride layers increases rapidly with the Al composition, which makes the p-doping challenging for Al-rich III-nitride layers such

as AlGa_N. In state-of-the-art deep ultraviolet light emitting diodes emitting at technically-important wavelength range of 225-280 nm, the Al compositions of the p-type AlGa_N electron blocking layers can be up to 95%, posing major challenges for the p-doping. Accordingly, the higher Al compositions can lead to lower hole injection efficiency in the active region and more challenging Mg activation in the electron blocking layer, which are both negative for wall plug efficiency improvement. Because of the technical importance of the deep ultraviolet light emitting diode, both issues of the electron blocking layer have attracted enormous interest and attention.

[0005] To address the valence band barrier issue, some researchers have employed an AlGa_N/AlGa_N superlattice electron blocking layer to modify the energy band to facilitate hole injection to the active region. Other solutions involve a graded electron blocking layer and inverted-V-shaped graded Al-composition electron blocking layer. In addition, an electron blocking layer with a thin AlGa_N insertion layer with a smaller energy bandgap has been utilized to acquire the intraband-tunneling-assisted hole injection, which can bring down the valence band barrier height of electron blocking layer as well as enhance the hole tunneling effect.

[0006] To improve the p-doping in the AlGa_N electron blocking layer with higher Al compositions, researchers have proposed polarization doping to induce three-dimensional hole gas by grading the Al composition in AlGa_N layer. Moreover, a p-AlGa_N/AlGa_N superlattice with the average composition of 60% has been demonstrated where activation energy for Mg dopants is reduced to 17 meV. In addition, Mg-delta doping and Mg-Si co-doping have been investigated. However, those approaches could possess the optical absorption problem, suffer complex

epitaxial condition, or fail to decrease the valence band barrier in the electron blocking layer.

[0007] Thus, there is a need for a way to simultaneously suppress electron overflow and enhance hole injection so as to improve wall plug efficiency.

SUMMARY

[0008] According to an embodiment, there is a light-emitting diode, which includes an n-type aluminum nitride layer formed on a substrate, a multiple quantum well formed on the n-type aluminum nitride layer, and a p-type aluminum nitride hole-injection layer formed adjacent to the multiple quantum well. The multiple quantum well includes a first aluminum nitride quantum well layer having a fixed composition and surrounded by first and second aluminum nitride quantum barrier layers, and a second aluminum nitride quantum well layer having a fixed composition and surrounded by the second aluminum nitride quantum barrier layer and a third aluminum nitride quantum barrier layer. At least one of the first, second, and third aluminum nitride quantum barrier layers has a graded aluminum composition. The first aluminum nitride quantum barrier layer is adjacent to the n-type aluminum nitride layer and the third aluminum nitride quantum barrier layer is adjacent to the p-type aluminum nitride hole-injection layer.

[0009] According to another embodiment, there is a method for forming light-emitting diode. An n-type aluminum nitride layer is formed on a substrate. A multiple quantum well is formed on the n-type aluminum nitride layer, which involves forming a first aluminum nitride quantum barrier layer on the n-type aluminum nitride

layer, forming a first aluminum nitride quantum well layer having a fixed composition on the first aluminum nitride quantum barrier, forming a second aluminum nitride quantum barrier layer on the first aluminum nitride quantum well layer, forming a second aluminum nitride quantum well layer having a fixed composition on the second aluminum nitride quantum barrier layer, and forming a third aluminum nitride quantum barrier layer on the second aluminum nitride quantum well layer. At least one of the first, second, and third aluminum nitride quantum barrier layers has a graded composition. A p-type aluminum nitride hole-injection layer is formed adjacent to the multiple quantum well.

[0010] According to a further embodiment, there is a multiple quantum well, which includes a first aluminum nitride quantum barrier layer, a first aluminum nitride quantum well layer having a fixed composition and arranged on the first aluminum nitride quantum barrier layer, a second aluminum nitride quantum barrier layer arranged on the first aluminum nitride quantum well layer, a second aluminum nitride quantum well layer having a fixed composition and arranged on the second aluminum nitride quantum barrier layer, and a third aluminum nitride quantum barrier layer arranged on the second aluminum nitride quantum well layer. At least one of the first, second, and third aluminum nitride quantum barrier layers has a graded aluminum composition.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate one or more embodiments and, together with the description, explain these embodiments. In the drawings:

[0012] Figure 1A is a schematic diagram of a light emitting diode according to an embodiment;

[0013] Figure 1B is a schematic diagram of a light emitting diode according to an embodiment;

[0014] Figure 1C is a schematic diagram of a multiple quantum well according to an embodiment;

[0015] Figure 1D is a schematic diagram of a multiple quantum well according to an embodiment;

[0016] Figures 2A and 2B are flow diagrams of a method for forming a light emitting diode according to an embodiment;

[0017] Figures 3A-3C illustrate aluminum composition grading of quantum barrier layers of three different light emitting diodes according to embodiments;

[0018] Figures 4A-4C are band diagrams of the active regions and electron blocking layers of three different light emitting diodes according to embodiments;

[0019] Figures 5A-5C are graphs of the electron concentration, hole concentration, and radiative recombination rate, respectively, of three different light emitting diodes according to embodiments;

[0020] Figure 6 is a graph of the electron concentration in the p-Al_{0.6}Ga_{0.4}N hole-injection layer of three different light emitting diodes according to embodiments;

[0021] Figure 7A illustrates the peak carrier concentration and peak radiative recombination rates in the middle of the quantum well of the active region versus the end aluminum composition of the increasing-aluminum-composition grading;

[0022] Figure 7B is a graph illustrating the electron concentration in the p- $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ hole-injection layer of three increasing-aluminum-composition grading according to embodiments;

[0023] Figure 8 is a graph of the output power and forward voltage as a function of the end aluminum composition of increasing-aluminum-composition grading according to embodiments;

[0024] Figures 9A-9C are graphs of the electron concentration, hole concentration, and radiative recombination rate, respectively, of three different light emitting diodes according to embodiments;

[0025] Figure 10A is a graph of the electron concentration in a p- $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ layer of three different light emitting diodes according to embodiments; and

[0026] Figure 10B is a graph of the output power and forward voltage as a function of current for four different light emitting diodes according to embodiments.

DETAILED DESCRIPTION

[0027] The following description of the exemplary embodiments refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. The following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims. The

following embodiments are discussed, for simplicity, with regard to the terminology and structure of a light emitting diode.

[0028] Reference throughout the specification to “one embodiment” or “an embodiment” means that a particular feature, structure or characteristic described in connection with an embodiment is included in at least one embodiment of the subject matter disclosed. Thus, the appearance of the phrases “in one embodiment” or “in an embodiment” in various places throughout the specification is not necessarily referring to the same embodiment. Further, the particular features, structures or characteristics may be combined in any suitable manner in one or more embodiments.

[0029] Turning first to Figures 1A and 1B, a light-emitting diode 100A and 100B includes a substrate 102 and an n-type aluminum nitride layer 104 formed on the substrate 102. A multiple quantum well 106 is formed on the n-type aluminum nitride layer 104. A p-type aluminum nitride hole-injection layer 110 is formed adjacent to the multiple quantum well 106.

[0030] Turning now to Figure 1C, the multiple quantum well 106 includes a first aluminum nitride quantum well layer 132 having a fixed composition and surrounded by first 130 and second 134 aluminum nitride quantum barrier layers. The multiple quantum well 106 also includes a second aluminum nitride quantum well layer 136 having a fixed composition and surrounded by the second aluminum nitride quantum barrier layer 134 and a third aluminum nitride quantum barrier layer 138. At least one of the first 130, second 134, and third 138 aluminum nitride quantum barrier layers has a graded aluminum composition. The first aluminum nitride quantum barrier layer 130 is adjacent to the n-type aluminum nitride layer 104

and the third aluminum nitride quantum barrier layer 138 is adjacent to the p-type aluminum nitride hole-injection layer 110. In this embodiment, as well as embodiments below, at least one of the aluminum nitride quantum barrier layers has a graded aluminum composition, and thus more than one, or even all, of the aluminum nitride quantum barrier layers can have a graded composition.

[0031] Moreover, the light emitting diodes 100A and 100B include a p-type gallium nitride contact layer 112 arranged on the p-type aluminum nitride hole-injection layer 110, a first electrode 116 arranged on the p-type gallium nitride contact layer 112, and a second electrode 114A and 114B arranged on the n-type aluminum nitride layer 104. As an alternative to the p-type contact layer 112 being a gallium nitride contact layer, the p-type contact layer 112 can be an aluminum gallium nitride layer, an aluminum indium nitride layer, or an aluminum gallium indium nitride layer. The n-type aluminum nitride layer 104 can be a binary III-nitride layer consisting of aluminum and nitride, a tertiary III-nitride layer consisting of, for example, aluminum gallium nitride or aluminum indium nitride, or a quaternary III-nitride layer consisting of aluminum gallium indium nitride. Although these different types of layers are described as consisting of certain elements, it should be recognized that these layers can consist of those elements while also including insignificant concentrations of additional elements. These insignificant concentrations of additional elements can arise due to contaminants or impurities becoming part of the layer during the process of forming the layer. These contaminants or impurities typically comprise less than 0.1% of the overall composition of the layer.

[0032] As will be appreciated from the discussion above, the light emitting diodes 100A and 100B have a similar structure. The difference between these two light emitting diodes is that in the light emitting diode 100A the p-type aluminum nitride hole-injection layer 110 is directly adjacent to the multiple quantum well 106 without an intervening electron blocking layer, whereas in the light emitting diode 100B an electron blocking layer 108 is arranged between the p-type aluminum nitride hole-injection layer 110 and the multiple quantum well 106. Thus, the light emitting diode 100A does not include an electron blocking layer.

[0033] Although the multiple quantum well illustrated in Figure 1C includes two quantum well layers, the multiple quantum well can include more quantum well layers, an example of which is illustrated in Figure 1D. The multiple quantum well illustrated in Figure 1D includes five quantum well layers. In addition to the layers discussed above in connection with Figure 1C, the multiple quantum well illustrated in Figure 1D includes a quantum well layer 140 arranged between quantum barrier layers 138 and 142, quantum well layer 144 arranged between quantum barrier layers 142 and 146, and quantum well layer 148 arranged between quantum barrier layers 146 and 150.

[0034] In an embodiment, the various layers are ternary III-nitride layers. For example, the n-type aluminum nitride layer, first 132 and second 136 aluminum nitride quantum well layers, first 130, second 134, and third 138 aluminum nitride quantum barrier layers, and p-type aluminum nitride hole-injection layer 110 further comprise gallium. Accordingly, these layers are aluminum gallium nitride (AlGaN) layers.

[0035] In an embodiment, at least one of the aluminum nitride quantum barrier layers 130, 134, and 138 (or 130, 134, 138, 142, 146, and 150) is graded so that the amount of aluminum increases in the vertical direction in the figures so that the graded aluminum composition increases from a portion of the at least one aluminum nitride quantum barrier layers closest to the substrate 102 to a portion of the at least one aluminum nitride quantum barrier layers furthest from the substrate 102. The grading of the aluminum composition can be a linear grading or a non-linear grading (e.g., exponential, logarithmic, etc.). In an embodiment, the change in the grading across the at least one aluminum nitride quantum barrier layer in the vertical direction in the figures is a change of between two and ten percent in the amount of aluminum. Thus, when the at least one aluminum nitride quantum barrier layer also comprises gallium, as the amount of aluminum increases in the vertical direction in the figures, the amount of gallium decreases by a corresponding amount.

[0036] Figures 2A and 2B are flow diagrams of a method for forming a light emitting diode according to an embodiment. Turning first to Figure 2A, an n-type aluminum nitride layer 104 is formed on a substrate 102 (step 210). A multiple quantum well 106 is then formed on the n-type aluminum nitride layer (step 220). Specifically, referring now to Figure 2B, a first aluminum nitride quantum barrier layer 130 is formed on the n-type aluminum nitride layer 104 (step 220A). A first aluminum nitride quantum well layer 132 having a fixed composition is formed on the first aluminum nitride quantum barrier 130 (step 220B). A second aluminum nitride quantum barrier layer 134 is formed on the first aluminum nitride quantum well layer 132 (step 220C). A second aluminum nitride quantum well layer 136 having a fixed

composition is formed on the second aluminum nitride quantum barrier layer 134 (step 220D). A third aluminum nitride quantum barrier layer 138 is formed on the second aluminum nitride quantum well layer 136 (step 220E). At least one of the first 130, second 134, and third 138 aluminum nitride quantum barrier layers has a graded composition. Returning to Figure 2A, a p-type aluminum nitride hole-injection layer 110 is formed adjacent to the multiple quantum well 106 (step 230).

[0037] In the method above, the formation of the p-type aluminum nitride hole-injection layer 110 can involve forming the p-type aluminum nitride hole-injection layer 110 directly adjacent to the multiple quantum well 106 so that the light emitting diode 100A does not include an electron blocking layer. Alternatively, the method can further involve forming an aluminum nitride electron blocking layer 108 on the multiple quantum well 106 so that the p-type aluminum nitride hole-injection layer 110 is formed on the aluminum nitride electron blocking layer 108. The formation of at least one of the first, second, and third aluminum nitride quantum barrier layers can further involve forming the at least one the first, second and third aluminum nitride quantum barrier layers so that the graded aluminum composition increases from a portion of the at least one of first, second, and third aluminum nitride quantum barrier layers closest to the substrate to a portion of the at least one of first, second, and third aluminum nitride quantum barrier layers furthest from the substrate.

[0038] The method can also involve forming a p-type gallium nitride contact layer 112 on the p-type aluminum nitride hole-injection layer 110, forming a first electrode 116 on the p-type gallium nitride contact layer 112, and forming a second electrode 114A and 114B on the n-type aluminum nitride layer 104. The method

described above can be performed using any type of epitaxial technologies, such as metal organic chemical vapor deposition (MOCVD) and molecular beam epitaxy (MBE).

[0039] In order to evaluate the effectiveness of grading the aluminum composition of the quantum barrier layers on electron containing capability, hole injection, and radiative recombination rate, three light emitting diodes, having the structure of the light emitting diode 100B illustrated in Figure 1B, were subjected to evaluation using Advanced Physical Models of Semiconductor Devices (APSYS) software. These light emitting diodes included an aluminum nitride substrate 102, a 3 μm thick n- $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ layer 104 with an Si doping concentration of $5 \times 10^{18} \text{ cm}^{-3}$, a multiple quantum well 106 having five-3 nm thick $\text{Al}_{0.5}\text{Ga}_{0.5}\text{N}$ quantum well layers 132, 136, 140, 144, and 148, six-12 nm thick aluminum gallium nitride quantum barrier layers 130, 134, 138, 142, 146, and 150, a 20 nm thick p- $\text{Al}_{0.7}\text{Ga}_{0.3}\text{N}$ electron blocking layer 108 with an Mg doping concentration of $3 \times 10^{19} \text{ cm}^{-3}$, a 100 nm thick p- $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ layer 110 with an Mg doping concentration of $2 \times 10^{19} \text{ cm}^{-3}$, and a 20 nm thick p-GaN layer 112 with an Mg doping concentration of $1 \times 10^{20} \text{ cm}^{-3}$.

[0040] As illustrated in Figure 3A, the first light emitting diode (hereinafter “Sample A”) included an aluminum gallium nitride quantum barrier with a constant grading in the vertical direction in Figures 1B and 1D (“(0001)” refers to the vertical direction in Figures 1A-1D) and having a composition of $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$. As illustrated in Figure 3B, the second light emitting diode (hereinafter “Sample B”) included aluminum gallium nitride quantum barrier having an aluminum composition grading that increased in the vertical direction in Figures 1B and 1D (hereinafter “increasing-

aluminum-grading”), so that it was linearly graded from $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ to $\text{Al}_{0.65}\text{Ga}_{0.35}\text{N}$. As illustrated in Figure 3C, the third light emitting diode (hereinafter “Sample C”) included aluminum gallium nitride quantum barrier having an aluminum composition grading that decreased in the vertical direction in Figures 1B and 1D (hereinafter “decreasing-aluminum-grading”), so that it was linearly graded from $\text{Al}_{0.65}\text{Ga}_{0.35}\text{N}$ to $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$.

[0041] The chip size of the light emitting diodes was maintained at $300 \times 300 \mu\text{m}^2$ and the emission wavelength was designed to be 270 nm, a technically-important wavelength range for sterilization, sensing, and other applications. The activation energy of n-type $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ layer 104 was set to 15 meV according to experimental data. The Mg activation energy of p-type $\text{Al}_{0.7}\text{Ga}_{0.3}\text{N}$ electron blocking layer 108 and the p-type $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ layer 110 were set to 71 meV and 60 meV, respectively. The Mg activation energy of the p-type GaN contact layer 112 was set to 118 meV based on an experimental report. However, it should be noted that the Mg activation energy of p-type GaN did not affect the trends or conclusions of this evaluation. The hole and electron mobility of AlGaN is based on previous reports and the alloy mobility model inside the APSYS software.

[0042] The Shockley-Read-Hall (SRH) recombination lifetime, the Auger recombination coefficient, the radiative recombination coefficient, and the light extraction efficiency were set to be 15 ns, $2.88 \times 10^{-30} \text{ cm}^6/\text{s}$, $2.13 \times 10^{-11} \text{ cm}^3/\text{s}$, and 10%, respectively. The bowing factor of the bandgap and the band offset ratio of AlGaN materials were set to be 0.94 and 0.67/0.33, respectively. Effective mass parameters were determined according to the Reference Document [1]. The

interface charge densities were assumed to be 50% of total charges considering the screening effect of defects. The charge densities screened by injected carriers under forward bias are taken into account self-consistently.

[0043] Figure 4A-4C illustrate the band diagrams of Samples A, B, and C at 90 mA, where the gray area on the right side of the band diagrams represents the location of the electron blocking layer. As illustrated, the grading considerably impacts the slope of the conduction and valence bands of the quantum barrier. Regarding the quantum barrier conduction band, Sample B exhibited a steeper potential barrier due to the increasing-aluminum-composition grading as compared to Sample A, while Sample C exhibited flatter barrier due to compensation of existing interface charge by the decreased-aluminum-composition grading. For the quantum barrier valence band, however, Samples B and C exhibited flatter and steeper quantum valence bands, respectively, which is the opposite behavior to the quantum barrier conduction bands. In addition, the quantum barrier grading can cause considerable changes to the electron blocking layer conduction and valence band offsets E_c and E_v because the last quantum barrier is adjacent to the electron blocking layer. E_c for electron blocking in Samples A, B, and C were 263, 188, and 243 meV, respectively. Notably, Sample B possessed the smallest E_c while those of Samples A and C were similar.

[0044] E_v related to hole injection in Samples A, B, and C were 180, 168, 171 meV, respectively. The hole barriers of Sample B and C were slightly lower than that of Sample A. If the active regions of Samples A, B, and C were the same, one would assume that Sample B would have the largest electron overflow and Sample C

would have larger hole concentration than Sample A in the quantum wells.

However, this is not necessarily the case, because the slopes of the quantum barrier conduction and valence bands can strongly influence the carrier transport that is the key to the electron containing capability.

[0045] Figure 5A-5C illustrate electron concentration $[N_{QW}]$ and hole concentration $[P_{QW}]$ in the quantum wells from the band diagram of Figures 4A-4C. Overall, the electron concentration $[N_{QW}]$ was larger than the hole concentration $[P_{QW}]$, which is mainly due to the lower activation energy of electrons than holes. Specifically, Sample C had the highest average electron concentration $[N_{QW}]$, Sample B had the highest average hole concentration $[P_{QW}]$, and Sample A exhibited intermediate behavior. For electrons, the higher electron concentration $[N_{QW}]$ in Sample C was attributed to the flatter quantum barrier conduction band, which is in favor of the electron injection in quantum wells. For Samples A and B, although Sample B has steeper quantum barrier conduction band, electrons can still overcome it due to large mobility, eventually causing the electron concentration $[N_{QW}]$ of Sample B to be just slightly reduced from that of Sample A. A further discussion regarding the relationship between the steeper quantum barrier conduction band and the electron concentration $[N_{QW}]$ is presented below in connection with Figure 7A. For holes, on the other hand, the highest hole concentration $[P_{QW}]$ of Sample B is due to flatter quantum barriers and thus lower effective transport barrier. At the same time, the slightly lower hole concentration $[P_{QW}]$ in Sample C than that of Sample A can be explained by the lower electron

blocking layer barrier of Sample C being compensated by the steeper quantum barrier and thus higher transport barrier.

[0046] As will be appreciated from Figures 5A and 5B, the comparisons of the electron concentration $[N_{QW}]$ and the hole concentration $[P_{QW}]$ between Samples A, B, and C indicate that the slope of the quantum barrier can play a profound role in the carrier concentration in the active region. Moreover, it is essential to understand the electron containing capability of the active regions with different quantum barrier grading schemes. Figure 6 illustrates the electron concentration in the p-Al_{0.6}Ga_{0.4}N hole-injection layer $[N_{p-AlGaN}]$ of Samples A, B, and C as the indicator of the electron overflow. Interestingly, Sample B exhibited lower electron concentration $[N_{p-AlGaN}]$ compared to Samples A and C despite the fact that E_c at its electron blocking layer (188 meV) is much lower than those of Samples A and C. The lower electron concentration $[N_{p-AlGaN}]$ unambiguously demonstrates the electron containing ability of the active region of Sample B due to the quantum barrier increasing-aluminum-composition grading and the resulting higher quantum barrier conduction slope which makes it more difficult for electrons to transport to the p-type region.

[0047] Figure 5C illustrates the radiative recombination rate R_{rad} in the quantum wells of Samples A, B, and C. For Samples A, the hole concentration $[P_{QW}]$ is significantly lower than the electron concentration $[N_{QW}]$, but Sample C exhibits the largest imbalance. As an electron-hole pair is required for radiative recombination, the lower hole concentration $[P_{QW}]$ indicates that the hole concentration $[P_{QW}]$ dominates the radiative recombination, leading to a lower radiative recombination rate R_{rad} for Sample A compared with Sample B. For Sample C, the hole

concentration $[P_{QW}]$ is the lowest, leading to the lowest radiative recombination rate R_{rad} . For Sample B, the hole concentration $[P_{QW}]$ still dominates the radiative recombination but it is much higher and closer to the electron concentration $[N_{QW}]$. Accordingly, Sample B exhibits the highest radiative recombination rate R_{rad} , as reflected in Figure 5C.

[0048] As the quantum barrier increasing-aluminum-composition grading can lead to the electron-containing capability and the higher radiative recombination rate R_{rad} as shown by Sample B, it is important to investigate the carrier concentrations and radiative recombination rate R_{rad} amid a wider increasing-aluminum-composition grading range for optimum configuration. Thus, the ending aluminum composition of the increasing-aluminum-composition grading was varied from 0.61 to 0.75 with steps of 0.02, while keeping the starting aluminum composition (0.60) and the quantum barrier thickness (12 nm) the same. The peak electron and hole concentrations and radiative recombination rates in the middle quantum well of the active region are illustrated in Figure 7A. The effects of the increasing-aluminum-composition grading (Sample B) are two-fold as compared with the fixed-composition quantum barrier (Sample A). The quantum barrier valence and conduction bands become flatter and steeper, respectively. It will be appreciated that the effects are proportional to the increasing-aluminum-composition grading range because the quantum barrier thickness remains the same. In Figure 7A, the electron concentration $[N_{QW}]$ reduces slowly with the ending aluminum compositions of 0.61–0.71, which reflects the electron containing capability, albeit the reducing rate is small because the large electron mobility can compensate for the increase of the

quantum barrier valence band slope. However, the decrease of $[N_{QW}]$ accelerates when the ending composition is larger than 0.71, where the quantum barrier conduction band becomes too steep for electron transport, which means there is a greater electron containing capability. Hole concentration $[P_{QW}]$ increases quickly in a linear manner as the quantum barrier valence band flattens before saturating at higher ending compositions above 0.71, demonstrating that the increasing-aluminum-composition grading can greatly facilitate hole transport and injection.

[0049] Figure 7B illustrates the overflown electron concentration $[N_{p-AlGaN}]$ in the p-type $Al_{0.6}Ga_{0.4}N$ hole-injection layer with four different ending compositions of increasing-aluminum-concentration grading: 0.60 (i.e., no grading, Sample A), 0.65 (i.e., Sample B), 0.70, and 0.75. The overflown electron concentration $[N_{p-AlGaN}]$ reduces significantly by more than one-order-of-magnitude when the ending composition increases from 0.60 to 0.70, which indicates greatly-strengthened electron containing capability with steeper quantum barrier conduction band due to the increasing-aluminum-composition grading. Also, it is notable that the overflown electron concentration $[N_{p-AlGaN}]$ is not significantly reduced when the ending composition increased from 0.70 to 0.75, which suggests that the two grading ranges have similar electron containing capability. Returning to Figure 7A, R_{rad} first increases and peaks at the ending composition of 0.67, which coincides with both high electron concentration $[N_{QW}]$ and hole concentration $[P_{QW}]$ before dropping.

[0050] Figure 8 illustrates the forward voltage and output power of the deep ultraviolet light emitting diodes at 90 mA as a function of the ending composition of the increasing-aluminum-composition grading. With a higher ending aluminum

composition, and thus enhanced electron containing capability, the forward voltage barely increases. This is important and meaningful for the pursuit of high wall plug efficiency. The change trend of the output power is consistent with that of R_{rad} , which peaks at the ending composition of 0.69. The slight difference in the end compositions between the peaks of R_{rad} (0.67) of Figure 7A and the output power (0.69) of Figure 8 is caused by the fact that R_{rad} is extracted from the middle quantum well, while the output power integrates the emission from the entire active region of the light emitting diode.

[0051] The performance of a light emitting diode without an electron blocking layer (i.e., the structure illustrated in Figure 1A) was also evaluated. Specifically, one light emitting diode (hereinafter “Sample D”) was modified from Sample A by removing the electron blocking layer and using a 20-nm thicker p- $\text{Al}_{0.6}\text{Ga}_{0.4}\text{N}$ hole-injection layer (120 nm) to compensate the removal of the 20 nm electron blocking layer. A second light emitting diode (hereinafter “Sample E”) has the same structure as Sample D except that increasing-aluminum-composition grading was applied to quantum barriers, starting with an aluminum composition of 0.60 and ending with an aluminum composition of 0.70.

[0052] Figure 9A and 9B respectively illustrate the electron concentration $[N_{\text{QW}}]$ and the hole concentration $[P_{\text{QW}}]$ in the quantum wells of Samples D and E, with the addition of Sample A as reference. On one hand, hole concentration $[P_{\text{QW}}]$ of Sample E is higher than that of Sample A, due to the IAC grading, resembling the situation of Sample B. On the other hand, electron concentration $[N_{\text{QW}}]$ of Sample E is slightly lower than that of Sample A, which is consistent with the observation of

Figure 5(a) due to steeper quantum barrier valence band. Electron concentration $[N_{QW}]$ and hole concentration $[P_{QW}]$ of Sample D are significantly lower than those of Sample A, as the removal of the electron blocking layer leads to severe electron leakage into the p-type region that not only reduces electron concentration $[N_{QW}]$ but also compromises hole injection into the quantum wells. Consequently, Sample D exhibits the lowest radiative recombination rate R_{rad} , as illustrated in Figure 9C. Moreover, the radiative recombination rate R_{rad} of Sample E is higher than that of Sample A due to higher hole concentration $[P_{QW}]$, indicating that the electron blocking layer-free deep ultraviolet light emitting diode can have R_{rad} higher than the conventional deep ultraviolet light emitting diode with the fixed-composition AlGaIn electron blocking layer.

[0053] The graph in Figure 10A provides additional evidence for the excellent electron containing capability of the quantum barrier increasing-aluminum-content grading. As illustrated, the overflow electron concentration in the p-Al_{0.6}Ga_{0.4}N layer hole-blocking layer $[N_{p-AlGaIn}]$ of Sample E without the electron blocking layer is similar to that of Sample A with the electron blocking layer in the center of the p-Al_{0.6}Ga_{0.4}N layer, both being close to $1 \times 10^{15} / \text{cm}^{-3}$. Not surprisingly, Sample D had much larger overflow electron concentration $[N_{p-AlGaIn}]$ due to the lack of the electron blocking layer versus Sample A.

[0054] Figure 10B is also consistent with Figure 9C. The output power of Sample D without the electron blocking layer is very low because the overflow of electrons into the p-type region is severe, causing poor injection for both electrons and holes. The high electron leakage can be greatly alleviated by adding an electron

blocking layer such as in Sample A, reaffirming the importance of the electron blocking layer in conventional III-nitride deep ultraviolet light emitting diodes. More importantly, Figure 10B indicates that higher (13.5% higher at 90 mA) output power than that of the conventional deep ultraviolet light emitting diode (Sample A) can be achieved by utilizing the electron containing capability of the increasing-aluminum-composition graded quantum barriers even without the electron blocking layer (Sample E). Moreover, the forward voltage of Sample E is slightly lower (1.2% lower at 90 mA) than that of Sample A, while that of Sample D is the lowest due to the removal of the electron blocking layer.

[0055] With the structures of Samples A and E, one could argue that the results are not unexpected because the last quantum barrier (LQB) reaches Al composition of 0.7 after grading, which is the same Al composition as the electron blocking layer of Sample A. To confirm, another sample was evaluated, the sample was based on Sample E except that the increasing-aluminum-composition grading only applies to the last quantum barrier (0.6→0.7) and the other four quantum barriers have a constant Al composition of 0.6. As shown in Figures 10A and 10B, this sample exhibits worse electron containing capability and much lower output power than Samples A and E, thereby suggesting that the electron blocking layer design requires the application of the increasing-aluminum-composition grading to all quantum barriers to realize optimized electron containing and hole injection. Nevertheless, the deep ultraviolet light emitting diode without the p-type electron blocking layer is feasible, which could avoid the issues related to the electron blocking layer especially p-type doping, hole injection, and epitaxial complexity.

[0056] To eliminate issues related to the p-type Al-rich electron blocking layer including p-doping difficulty, valence band barrier, and epitaxial complexity, an electron blocking layer-free AlGa_N deep ultraviolet light emitting diode has been described, which shifts the paradigm from electron blocking in the p-type region to electron containing in the active region. By employing the linearly-graded-composition AlGa_N quantum barriers, the carrier concentration in the quantum wells and overflowed electron concentration in the p-type region can be significantly changed due to variation of the slope of the quantum barrier conduction and valence bands and thus carrier transport barrier. This can further result in modification of the radiative recombination rate. Specifically, when grading the Al composition of the AlGa_N quantum barriers from low to high along the growth direction, i.e., the c-axis, the active region exhibits the remarkable electron containing capability that reduces the electron overflow. In addition, the hole injection and thus hole concentration increases in the quantum well due to flattening of the quantum barrier valence band and thus lower hole transport barrier, that can enhance the radiative recombination rate.

[0057] For two deep ultraviolet light emitting diodes emitting at 270 nm, the electron blocking layer-free one with the graded Al_xGa_{1-x}N ($x = 0.60 \rightarrow 0.70$) quantum barriers exhibits similar degree of electron overflow ($\sim 1 \times 10^{15} / \text{cm}^3$) and higher hole concentration in the quantum wells simultaneously, leading to 13.5% higher output power as compared with the other conventional one with the p-type electron blocking layer. As the disclosed quantum barrier grading is straightforward and effective, it can be easily adopted by the deep ultraviolet light emitting diode and laser

community to incorporate the electron containing capability in the device design to replace or complement the p-type electron blocking layer. Further, although the quantum barrier grading has been described in connection with deep ultraviolet light emitting diodes, the quantum barrier grading can be employed with III-nitride light emitters having other spectral ranges.

[0058] The grading rate of the 10% compositional change in a 12 nm AlGaIn layer (Sample E) can be realized by mainstream epitaxial technologies such as metal organic chemical vapor deposition (MOCVD) and molecular beam epitaxy (MBE). Because the compositional change is relatively small and no intentional doping is needed amid the quantum barrier growth, for instance, the grading can be achieved by varying Al/In molar ratio in a MOCVD process. The discussion above demonstrates that a deep ultraviolet light emitting diode without an electron blocking layer can achieve slightly better output power (i.e., wall plug efficiency) performance, as opposed to the conventional deep ultraviolet light emitting diode. However, in practice one can optionally combine both the quantum barrier increasing-aluminum-grading and the electron blocking layer to obtain even less electron spill-over (see Figure 10A) and higher output power (see Figure 10B) as shown by Sample B. It should be noted that the inclusion of the electron blocking layer will inevitably increase the forward voltage as exhibited by Sample B in Figure 10B as well as epitaxial and doping difficulty, especially when the goal is to make shorter-wavelength deep ultraviolet light emitting diode. Therefore, the skilled artisan can make the proper choice and compromise amid the device design processes.

[0059] The disclosed embodiments provide a light emitting diode with a multiple quantum well having at least one graded quantum barrier layer. It should be understood that this description is not intended to limit the invention. On the contrary, the exemplary embodiments are intended to cover alternatives, modifications and equivalents, which are included in the spirit and scope of the invention as defined by the appended claims. Further, in the detailed description of the exemplary embodiments, numerous specific details are set forth in order to provide a comprehensive understanding of the claimed invention. However, one skilled in the art would understand that various embodiments may be practiced without such specific details.

[0060] Although the features and elements of the present exemplary embodiments are described in the embodiments in particular combinations, each feature or element can be used alone without the other features and elements of the embodiments or in various combinations with or without other features and elements disclosed herein.

[0061] This written description uses examples of the subject matter disclosed to enable any person skilled in the art to practice the same, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the subject matter is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims.

REFERENCES

[0062] “Valence Band Effective-Mass Hamiltonians for the Group-III Nitrides from Quasiparticle Self-Consistent GW Band Structures” by Punya et al., *Phys. Rev. B*, vol. 85, 2012, Art. No. 195147.

WHAT IS CLAIMED IS:

1. A light-emitting diode (100A, 100B), comprising:
 - a substrate (102);
 - an n-type aluminum nitride layer (104) formed on the substrate (102);
 - a multiple quantum well (106) formed on the n-type aluminum nitride layer;and
 - a p-type aluminum nitride hole-injection layer (110) formed adjacent to the multiple quantum well (106),wherein the multiple quantum well (106) comprises
 - a first aluminum nitride quantum well layer (132) having a fixed composition and surrounded by first (130) and second (134) aluminum nitride quantum barrier layers, and
 - a second aluminum nitride quantum well layer (136) having a fixed composition and surrounded by the second aluminum nitride quantum barrier layer (134) and a third aluminum nitride quantum barrier layer (138), wherein at least one of the first (130), second (134), and third (138) aluminum nitride quantum barrier layers has a graded aluminum composition,wherein the first aluminum nitride quantum barrier layer (130) is adjacent to the n-type aluminum nitride layer (104) and the third aluminum nitride quantum barrier layer (138) is adjacent to the p-type aluminum nitride hole-injection layer (110).

2. The light emitting diode of claim 1, wherein the p-type aluminum nitride hole-injection layer is directly adjacent to the multiple quantum well and the light emitting diode does not include an electron blocking layer.
3. The light emitting diode of claim 1, wherein an aluminum nitride electron blocking layer is arranged between the p-type aluminum nitride hole-injection layer and the multiple quantum well.
4. The light emitting diode of claim 1, wherein the graded aluminum composition of the at least one of the first, second, and third aluminum nitride quantum barrier layers increases from a portion of the at least one of the first, second, and third aluminum nitride quantum barrier layers closest to the substrate to a portion of the at least one of the first, second, and third aluminum nitride quantum barrier layers furthest from the substrate.
5. The light emitting diode of claim 1, further comprising:
 - a p-type nitride contact layer arranged on the p-type aluminum nitride hole-injection layer;
 - a first electrode arranged on the p-type nitride contact layer; and
 - a second electrode arranged on the n-type aluminum nitride layer.

6. The light emitting diode of claim 1, wherein the aluminum composition of the at least one of the first, second, and third aluminum nitride quantum barrier layers is linearly graded.
7. The light emitting diode of claim 1, wherein the aluminum composition of the at least one of the first, second, and third aluminum nitride quantum barrier layers is non-linearly graded.
8. The light emitting diode of claim 1, wherein the aluminum composition of the at least one of the first, second, and third nitride quantum barrier layers has a change in grading between two and ten percent.
9. The light emitting diode of claim 1, wherein the n-type aluminum nitride layer, first and second aluminum nitride quantum well layers, first, second, and third aluminum nitride quantum barrier layers, and p-type aluminum nitride hole-injection layer further comprise gallium.
10. The light emitting diode of claim 9, wherein an amount of aluminum and gallium in the n-type aluminum nitride layer is the same as an amount of aluminum and gallium in a portion of the first aluminum nitride quantum well that is closest to the n-type aluminum nitride layer.

11. A method for forming light-emitting diode (100A, 100B), the method comprising:

forming (210) an n-type aluminum nitride layer (104) on a substrate (102);

forming (220) a multiple quantum well (106) on the n-type aluminum nitride layer by

forming (220A) a first aluminum nitride quantum barrier layer (130) on the n-type aluminum nitride layer (104);

forming (220B) a first aluminum nitride quantum well layer (132) having a fixed composition on the first aluminum nitride quantum barrier (130);

forming (220C) a second aluminum nitride quantum barrier layer (134) on the first aluminum nitride quantum well layer (132);

forming (220D) a second aluminum nitride quantum well layer (136) having a fixed composition on the second aluminum nitride quantum barrier layer (134); and

forming (220E) a third aluminum nitride quantum barrier layer (138) on the second aluminum nitride quantum well layer (136), wherein at least one of the first (130), second (134), and third (138) aluminum nitride quantum barrier layers has a graded composition;

forming (230) a p-type aluminum nitride hole-injection layer (110) adjacent to the multiple quantum well (106).

12. The method of claim 11, wherein the formation of the p-type aluminum nitride hole-injection layer comprises:

forming the p-type aluminum nitride hole-injection layer directly adjacent to the multiple quantum well, wherein the light emitting diode does not include an electron blocking layer.

13. The method of claim 11, wherein the method further comprises:

forming an aluminum nitride electron blocking layer on the multiple quantum well, wherein the p-type aluminum nitride hole-injection layer is formed on the aluminum nitride electron blocking layer.

14. The method of claim 11, wherein the formation of the first, second, and third aluminum nitride quantum barrier layers comprises:

forming the at least one of the first, second and third aluminum nitride quantum barrier layers so that the graded aluminum composition increases from a portion of the at least one of the first, second, and third aluminum nitride quantum barrier layers closest to the substrate to a portion of the at least one of the first, second, and third aluminum nitride quantum barrier layers furthest from the substrate.

15. The method of claim 11, further comprising:

forming a p-type nitride contact layer on the p-type aluminum nitride hole-injection layer;

forming a first electrode on the p-type nitride contact layer; and

forming a second electrode on the n-type aluminum nitride layer.

16. A multiple quantum well (106), comprising:
- a first aluminum nitride quantum barrier layer (130);
 - a first aluminum nitride quantum well layer (132) having a fixed composition and arranged on the first aluminum nitride quantum barrier layer (130);
 - a second aluminum nitride quantum barrier layer (134) arranged on the first aluminum nitride quantum well layer (132);
 - a second aluminum nitride quantum well layer (136) having a fixed composition and arranged on the second aluminum nitride quantum barrier layer (134); and
 - a third aluminum nitride quantum barrier layer (138) arranged on the second aluminum nitride quantum well layer (136), wherein at least one of the first (130), second (134), and third (138) aluminum nitride quantum barrier layers has a graded aluminum composition.
17. The multiple quantum well of claim 16, wherein the graded aluminum composition of the at least one of the first, second, and third aluminum nitride quantum barrier layers increases from a portion of the at least one of the first, second, and third aluminum nitride quantum barrier layers closest to the substrate to a portion of the at least one of the first, second, and third aluminum nitride quantum barrier layers furthest from the substrate.

18. The multiple quantum well of claim 16, wherein the aluminum composition of the at least one of the first, second, and third aluminum nitride quantum barrier layers is linearly graded.

19. The multiple quantum well of claim 16, wherein the aluminum composition of the at least one of the first, second, and third aluminum nitride quantum barrier layers is non-linearly graded.

20. The multiple quantum well of claim 16, wherein the first and second aluminum nitride quantum well layers and the first, second, and third aluminum nitride quantum barrier layers further comprise gallium.

1/19

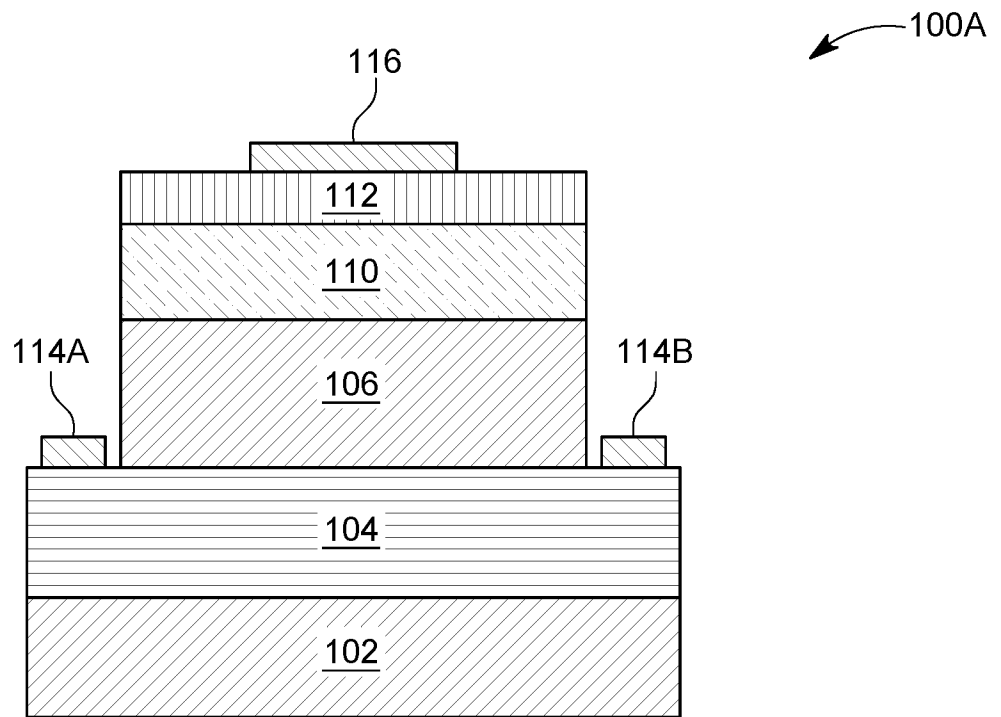


FIG. 1A

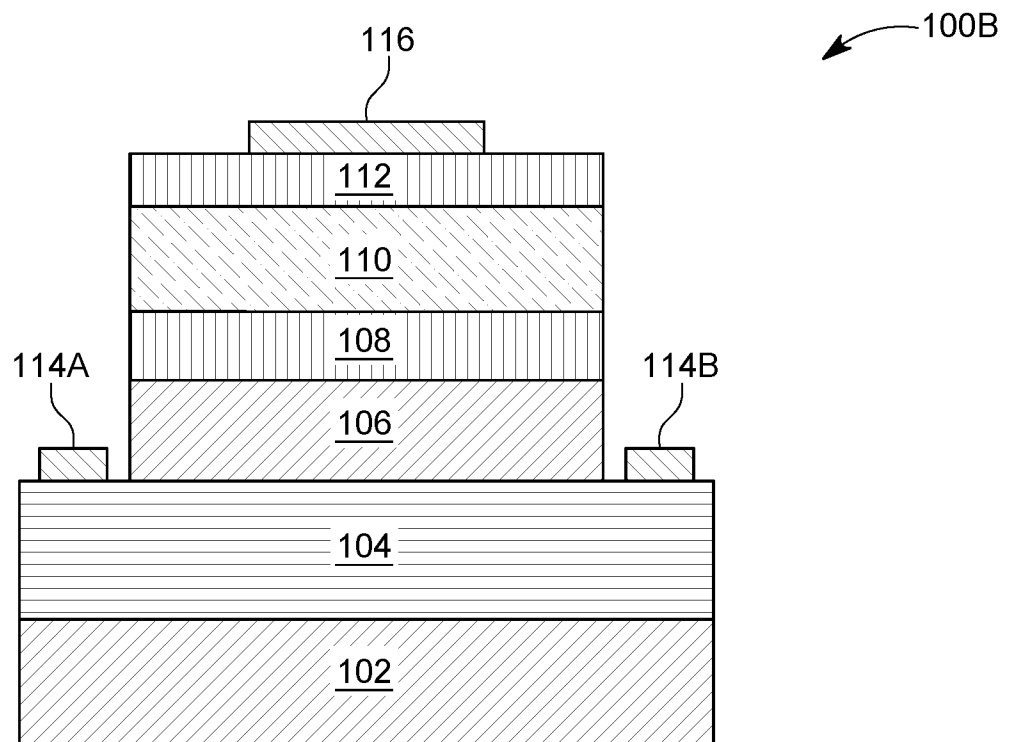


FIG. 1B

2/19

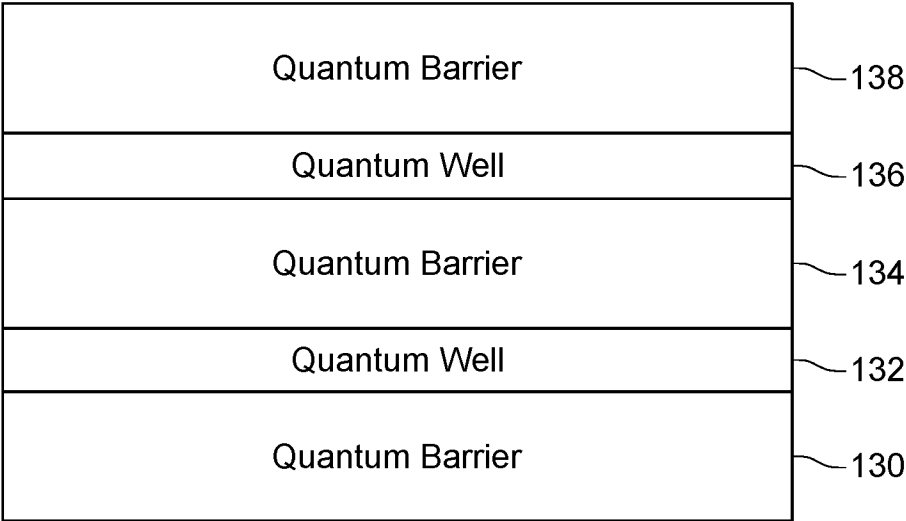


FIG. 1C

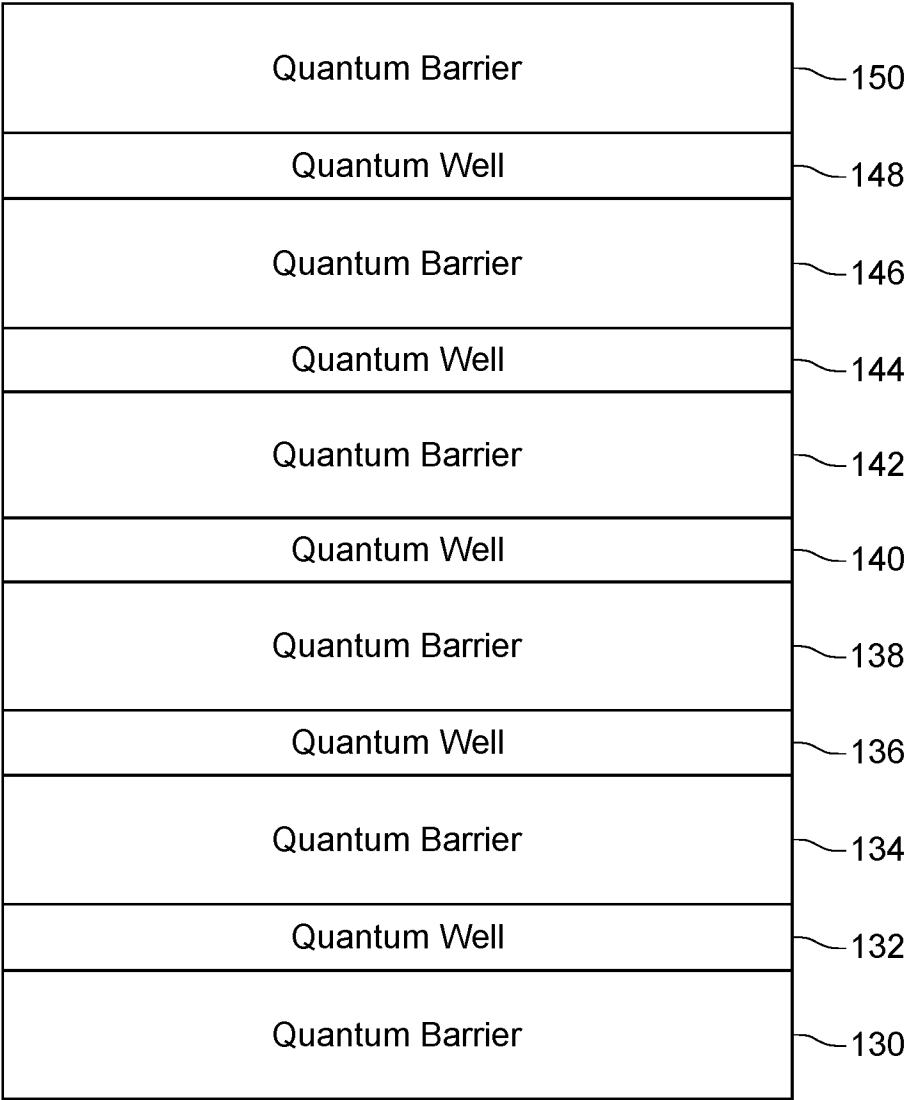


FIG. 1D

3/19

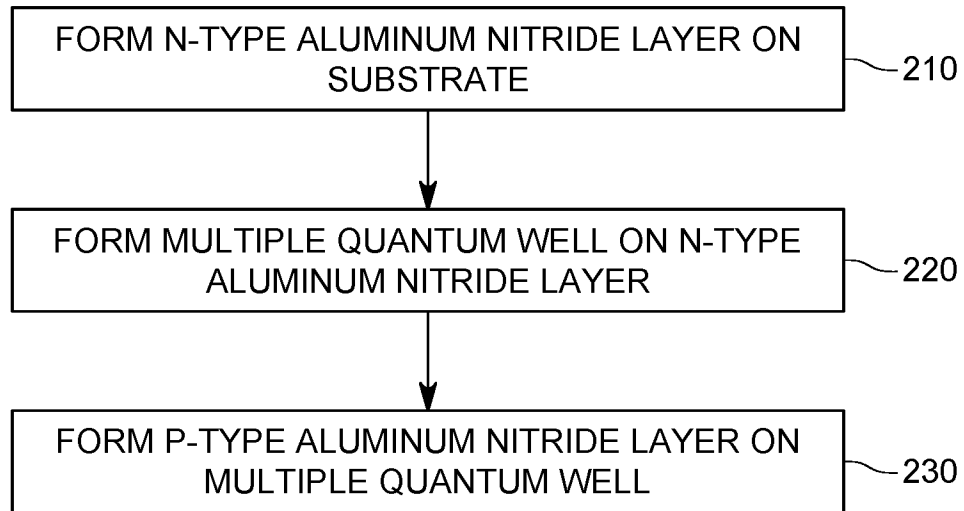


FIG. 2A

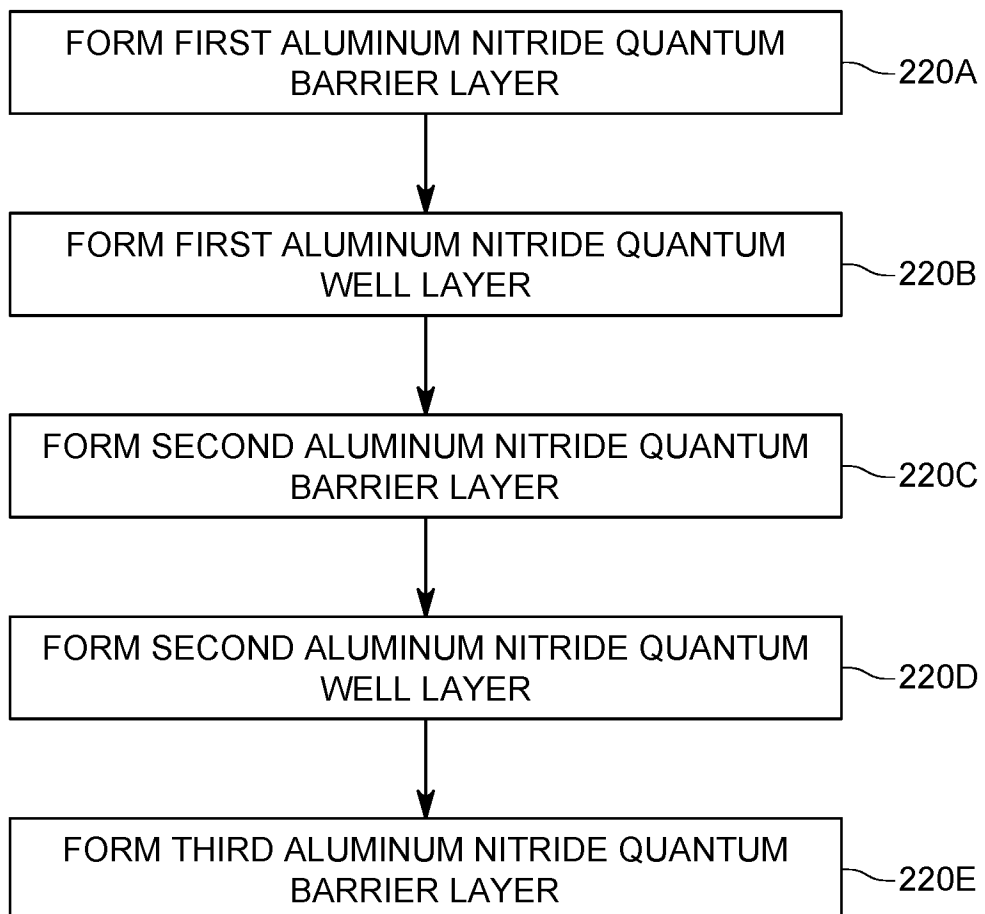


FIG. 2B

4/19

(0001)




FIG. 3A

(0001)

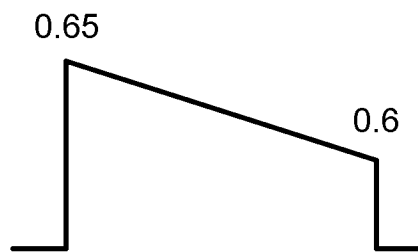


FIG. 3B

(0001)



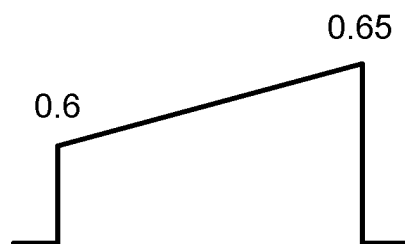


FIG. 3C

5/19

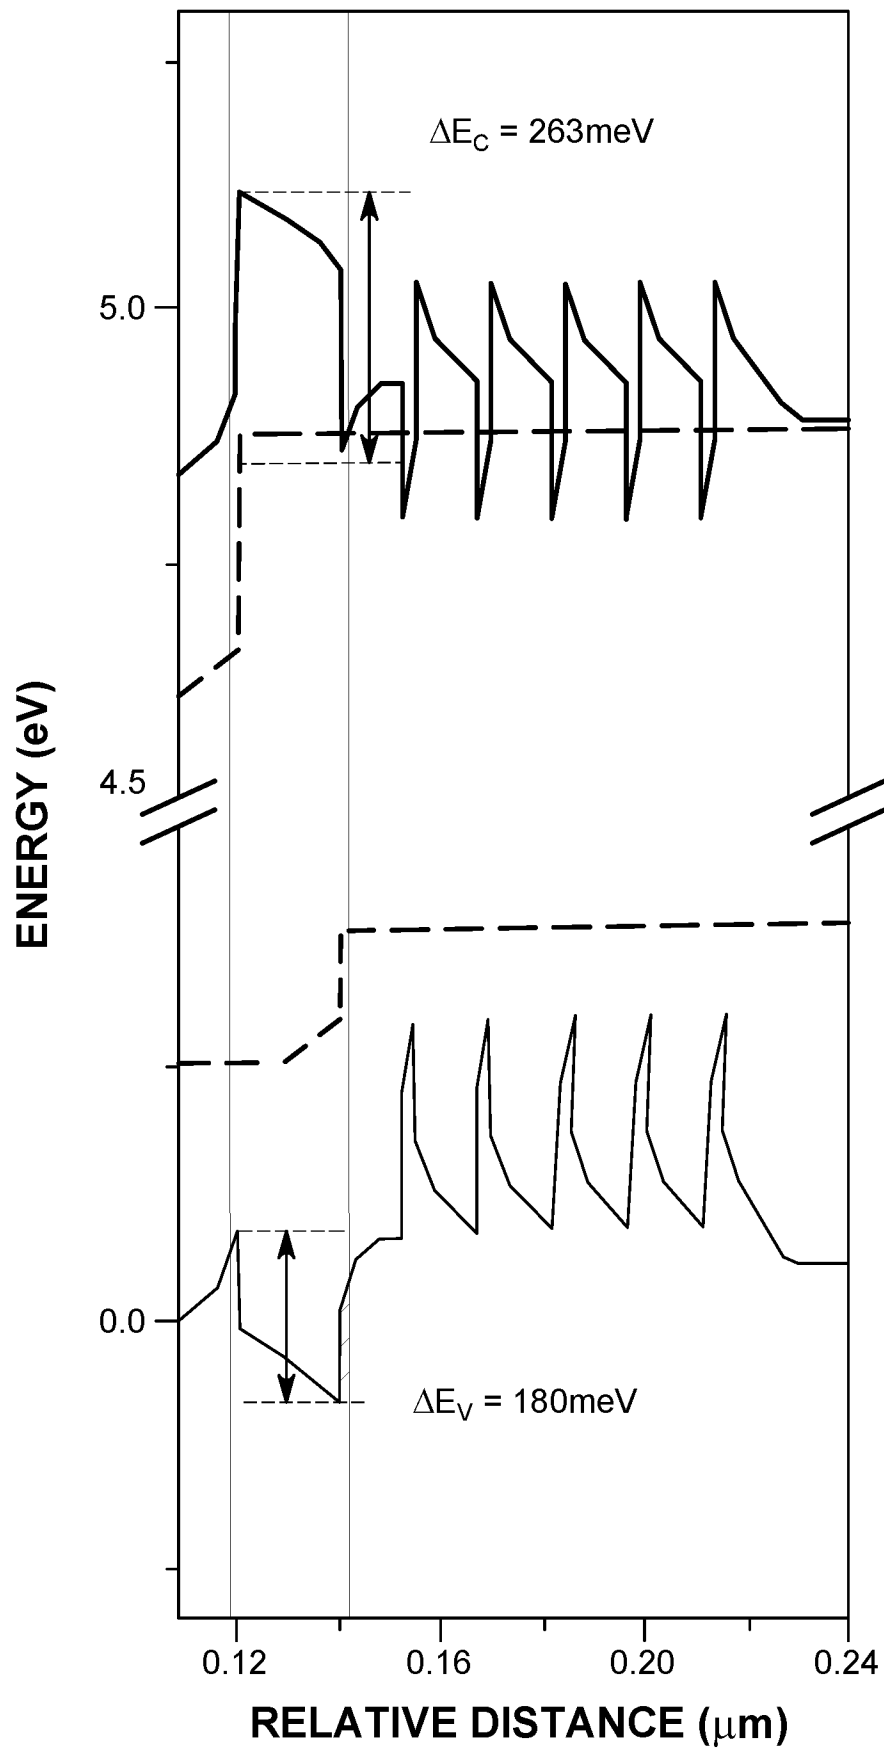

6/19

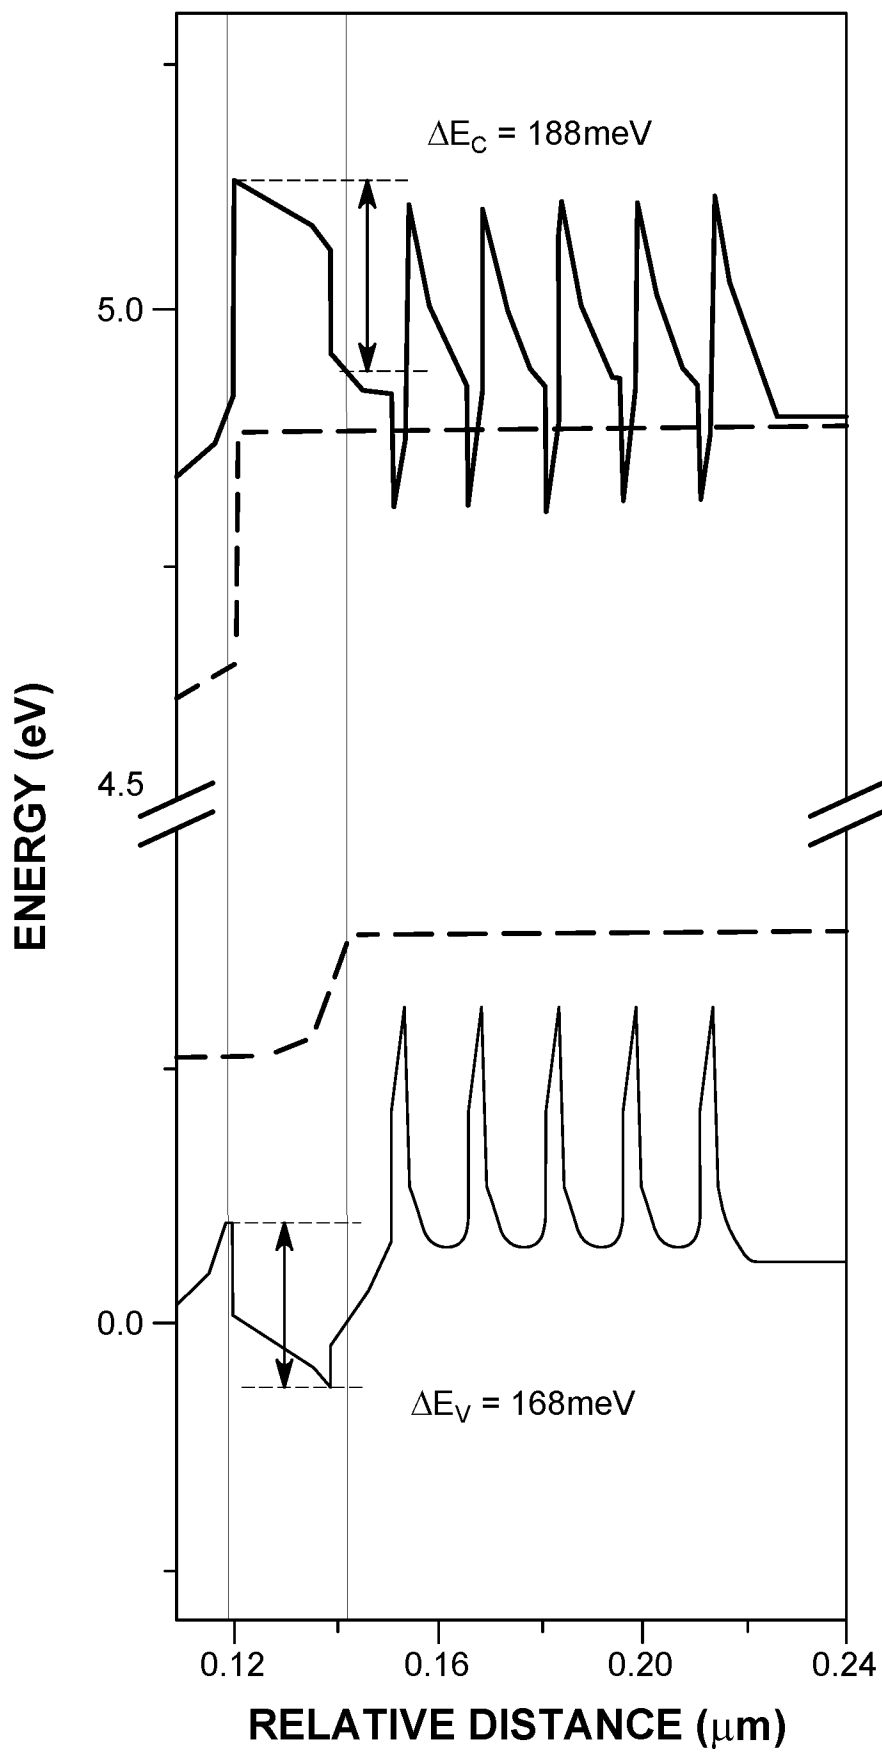


FIG. 4B

7/19

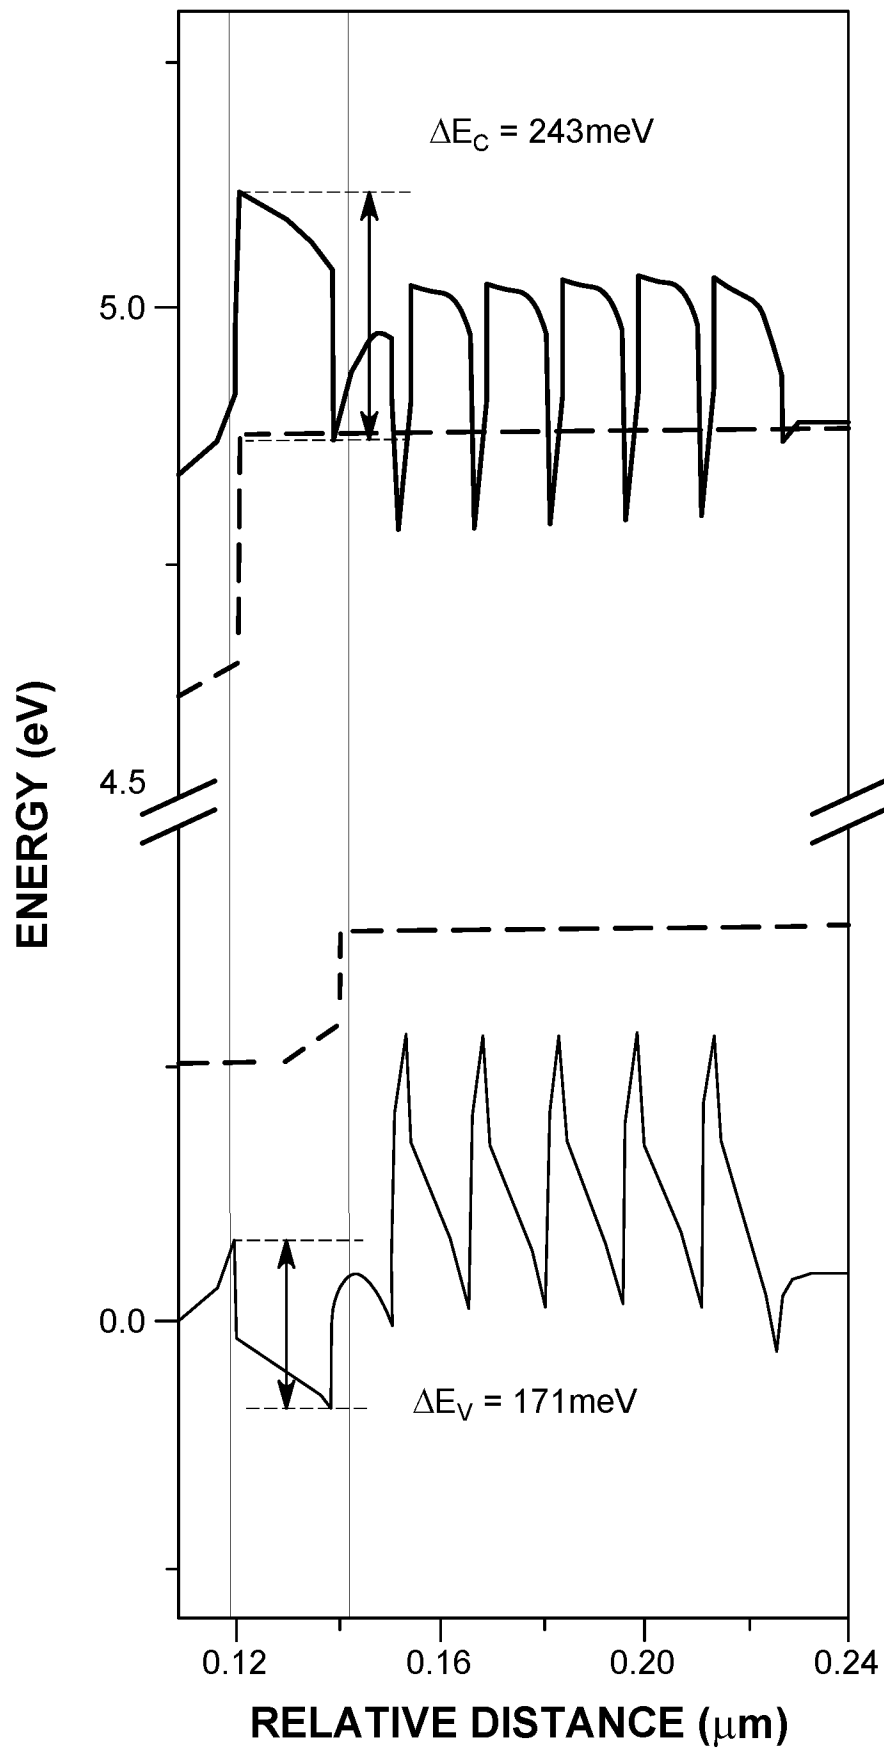


FIG. 4C

8/19

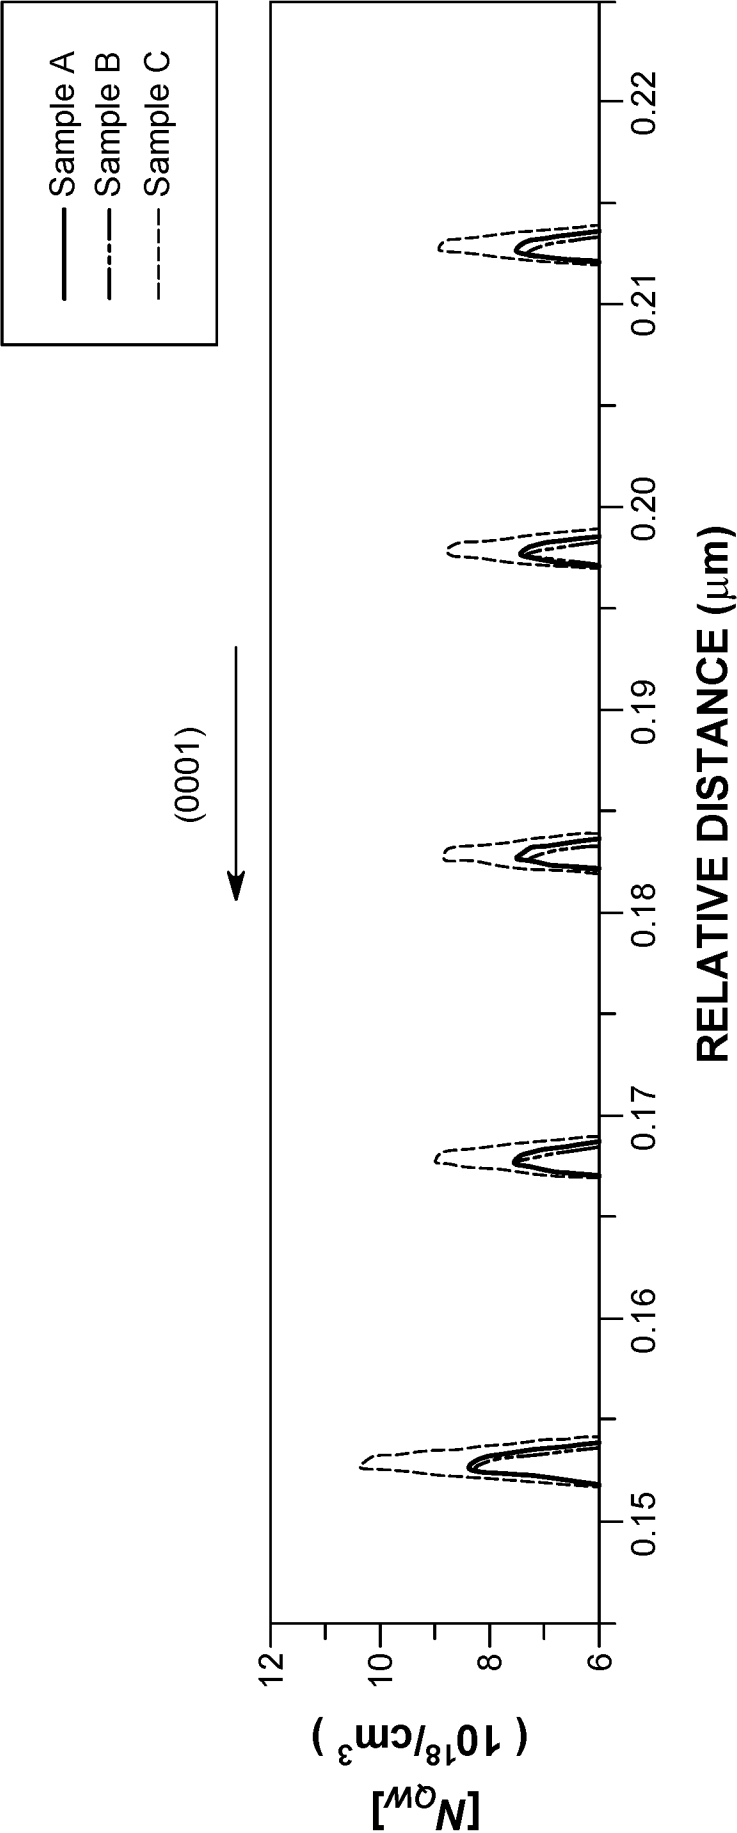


FIG. 5A

9/19

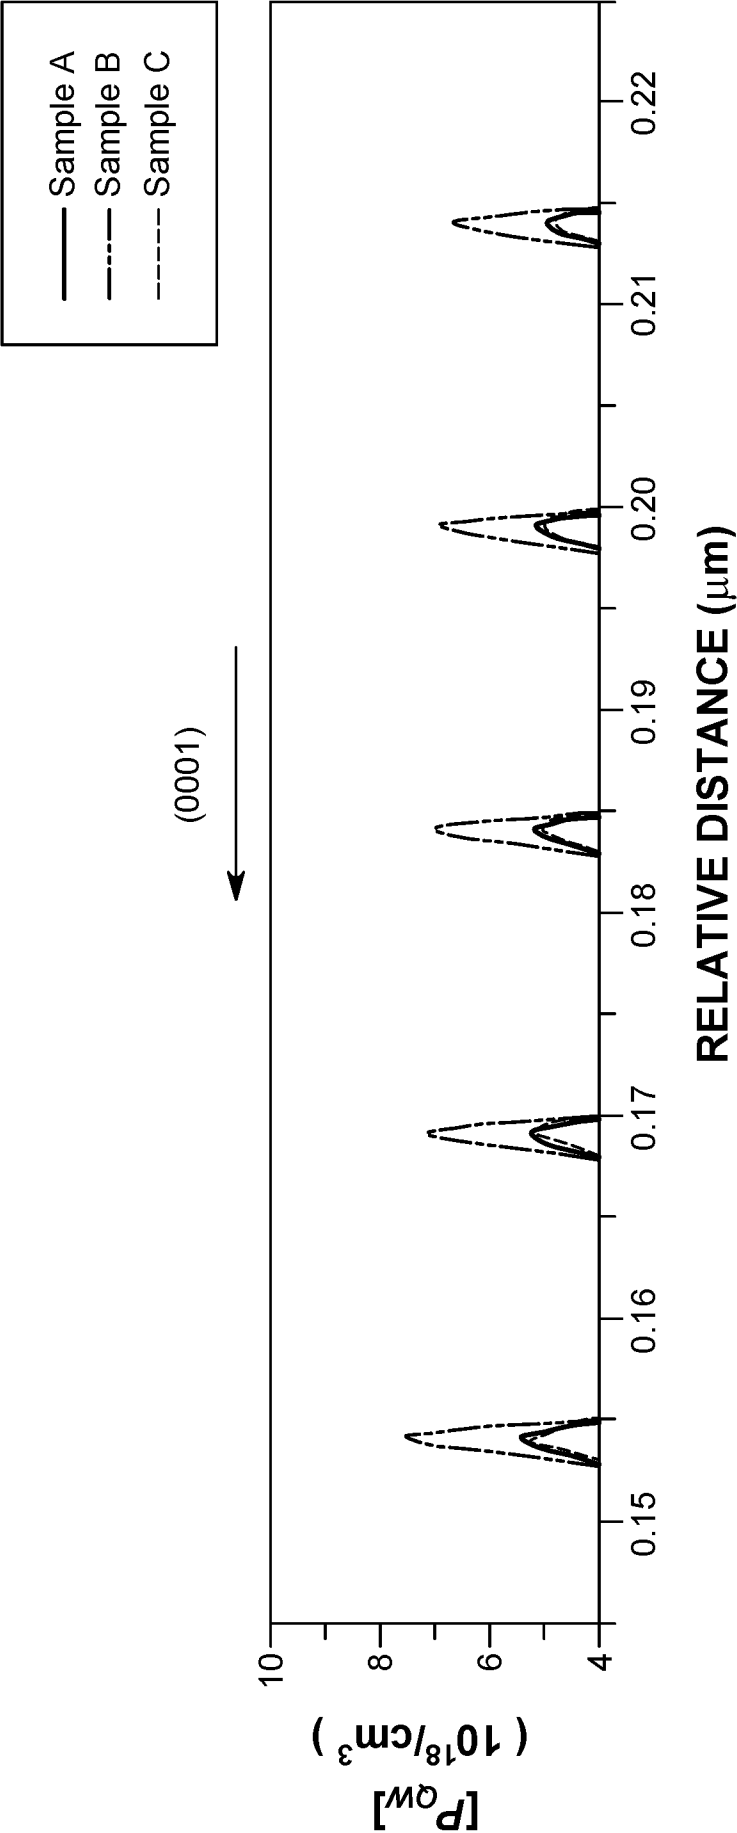


FIG. 5B

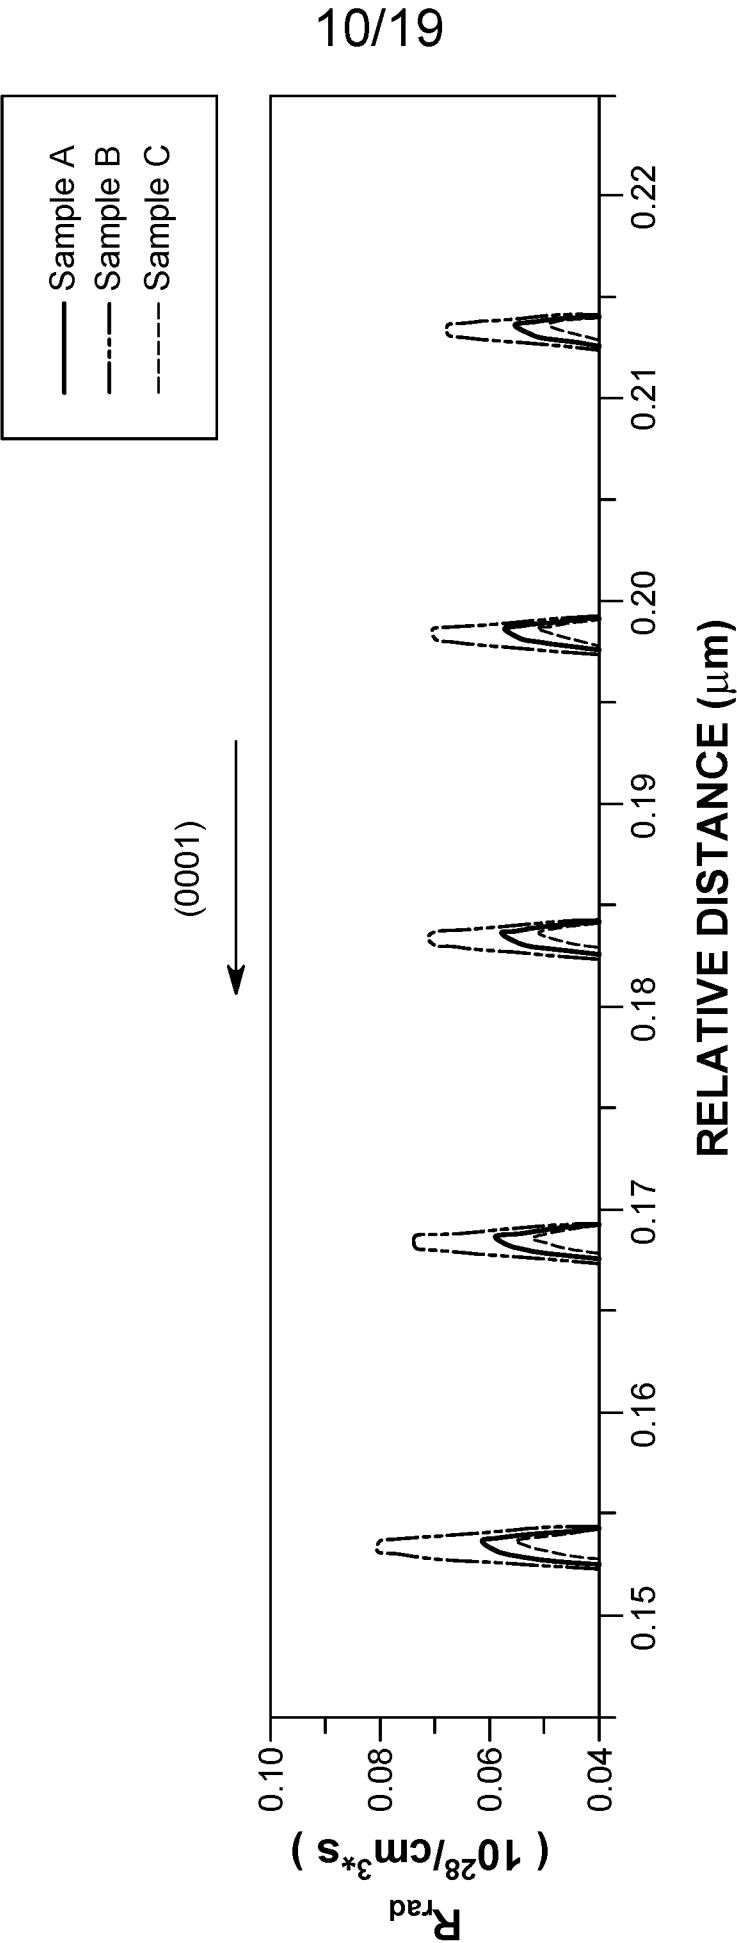


FIG. 5C

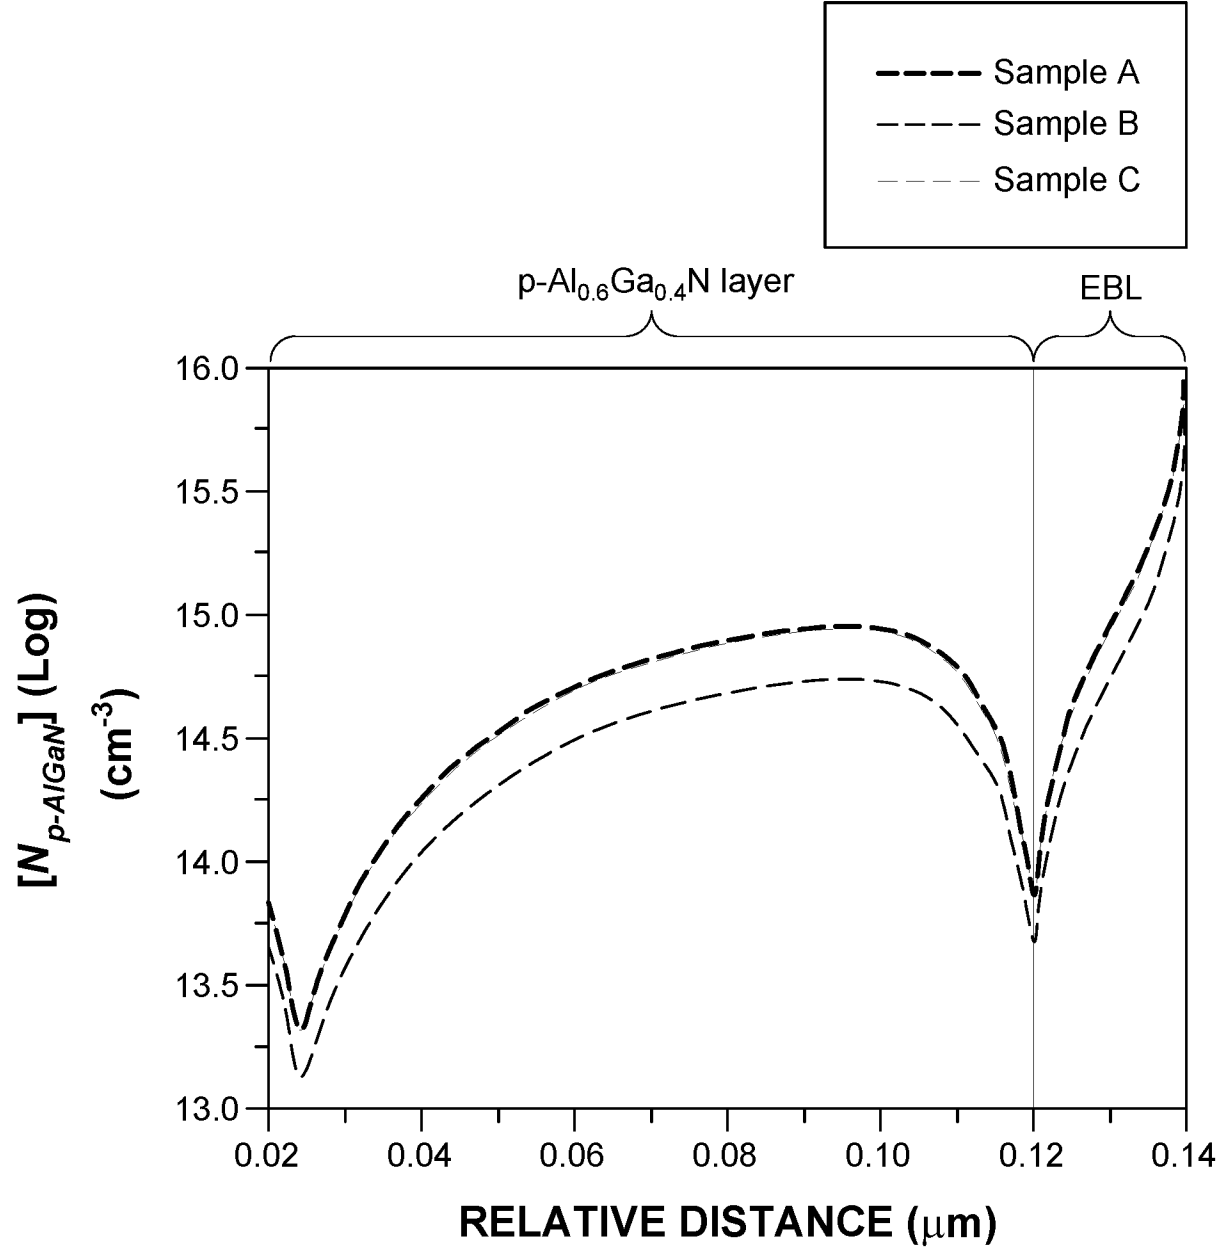


FIG. 6

12/19

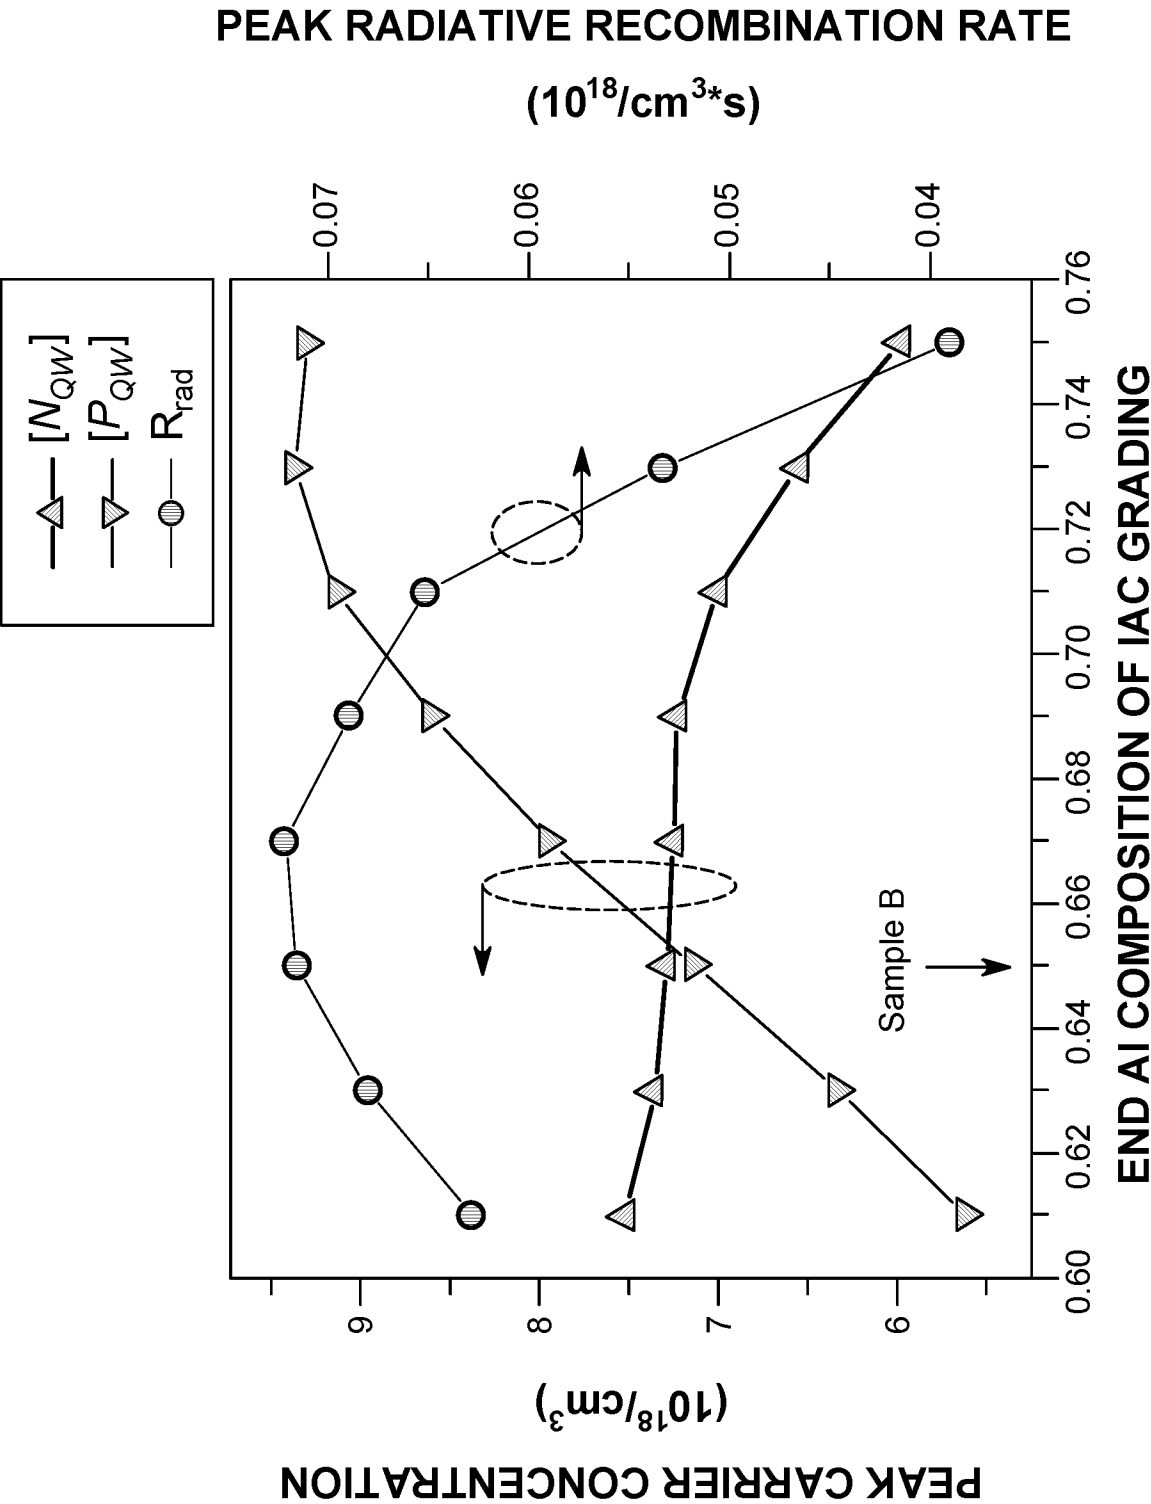


FIG. 7A

13/19

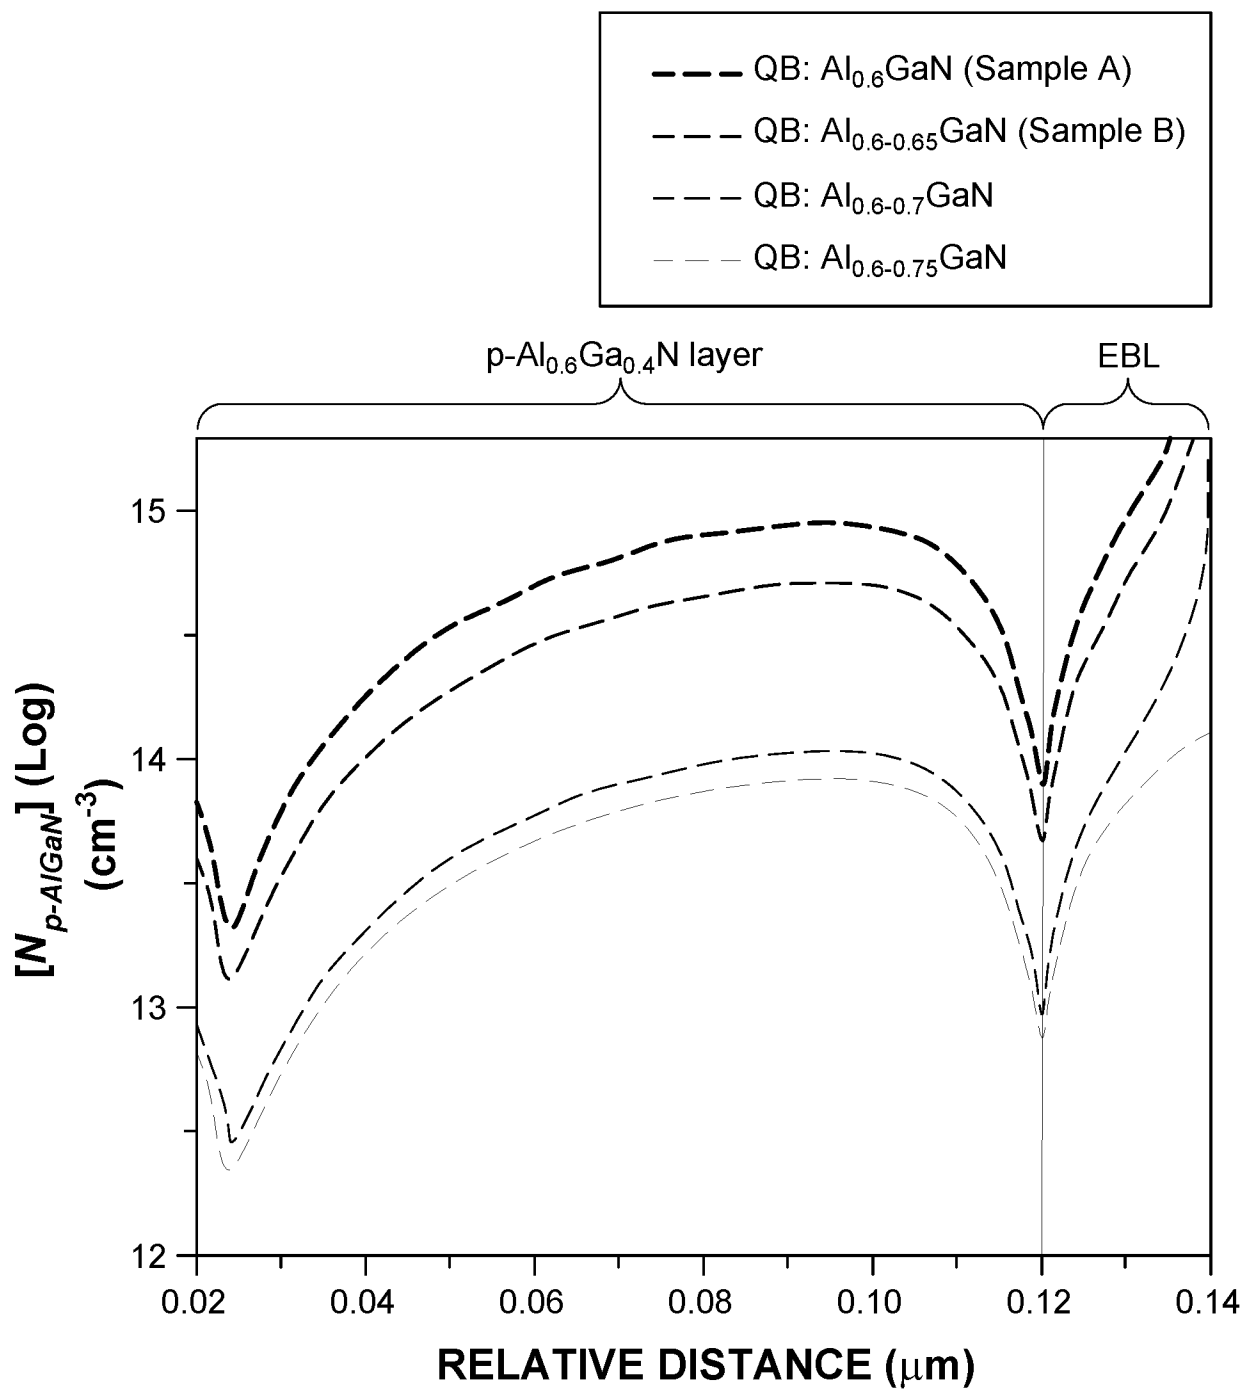


FIG. 7B

14/19


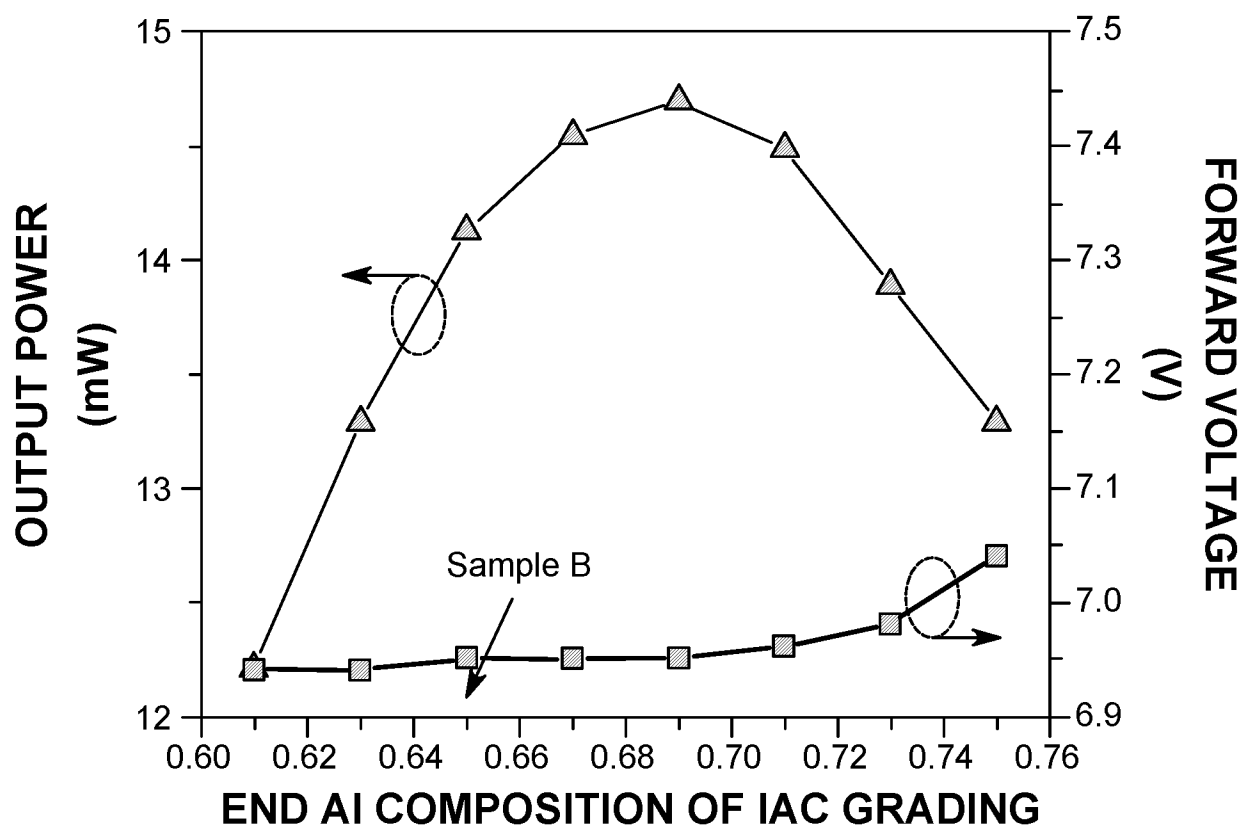


FIG. 8

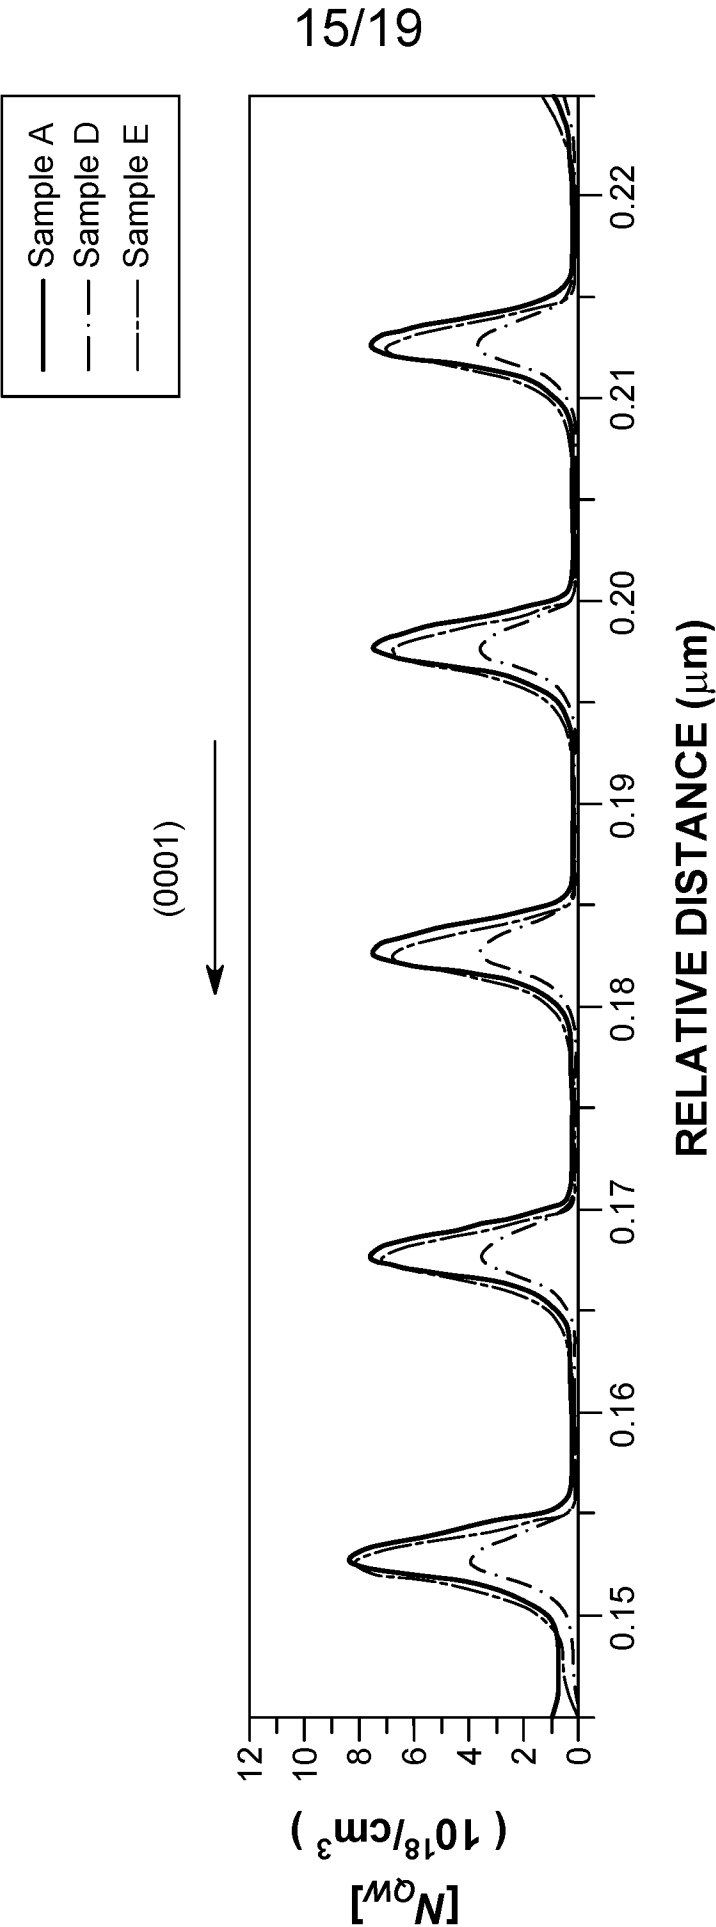

16/19


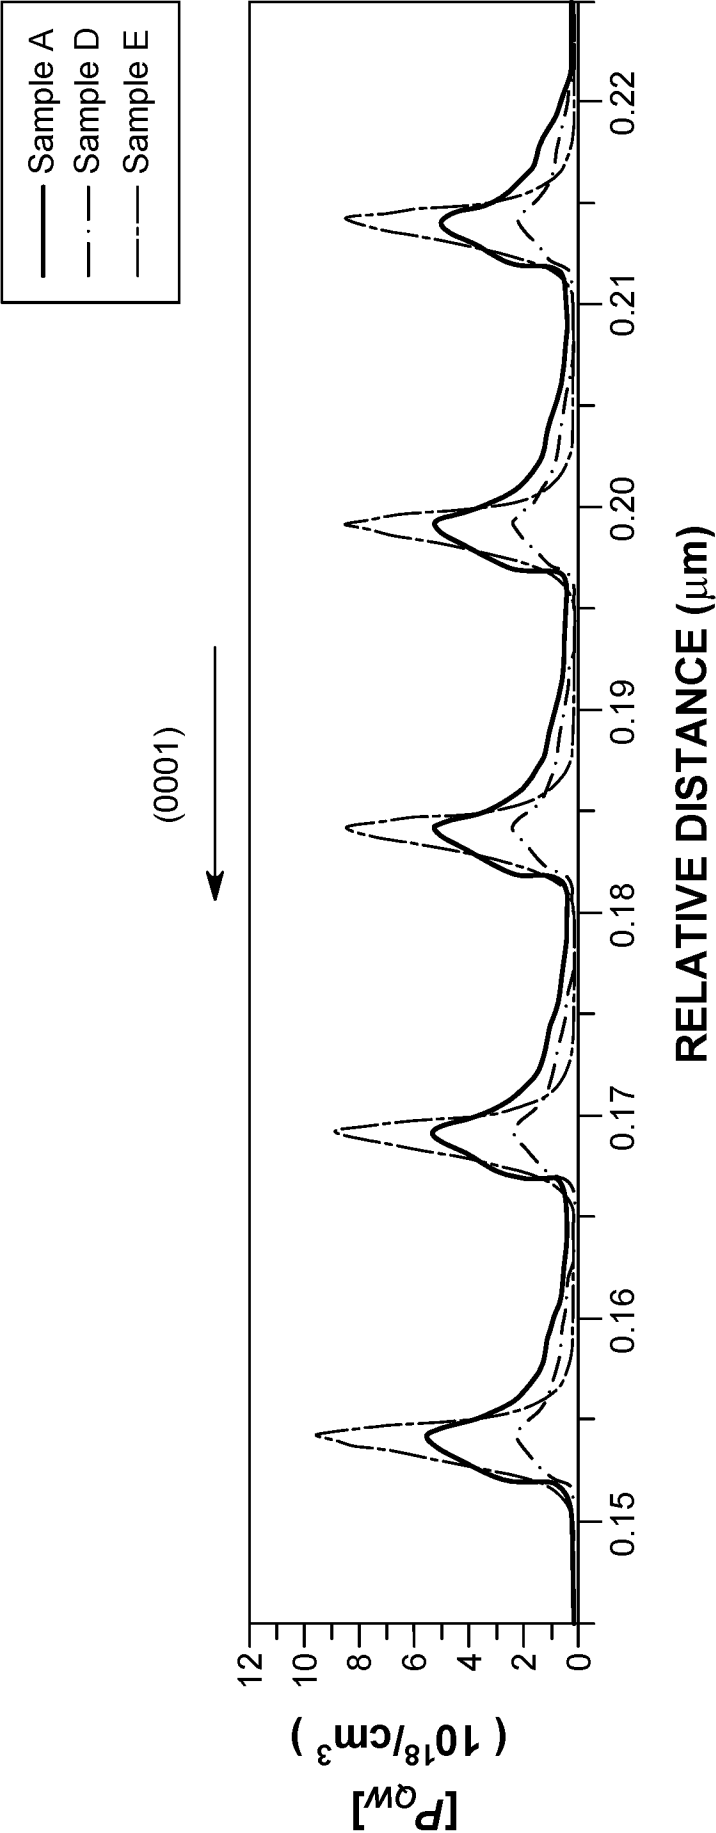


FIG. 9B

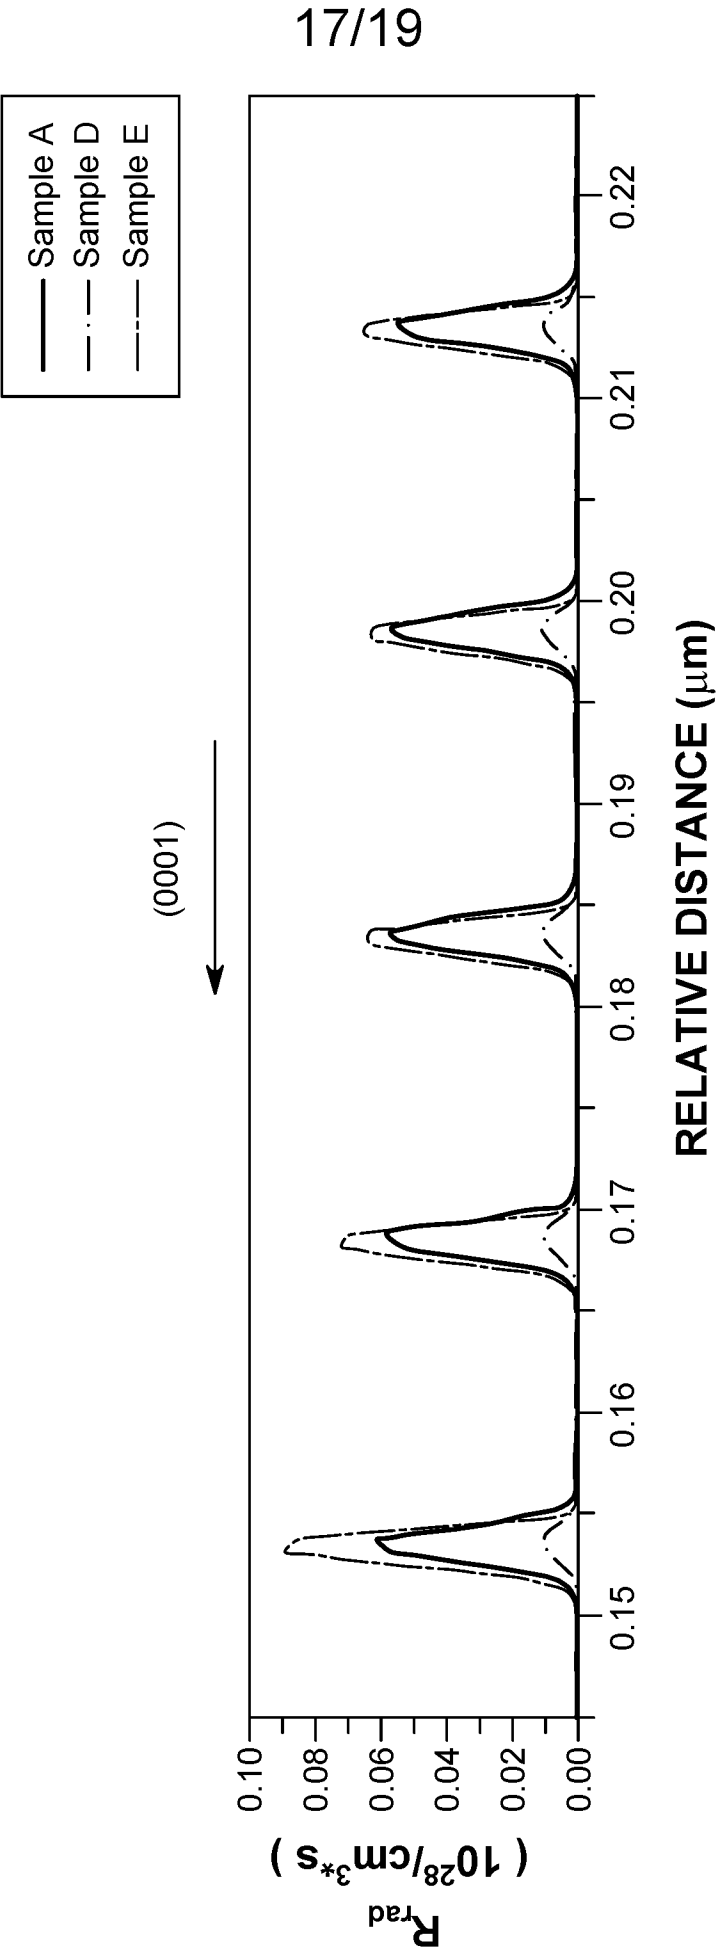

18/19

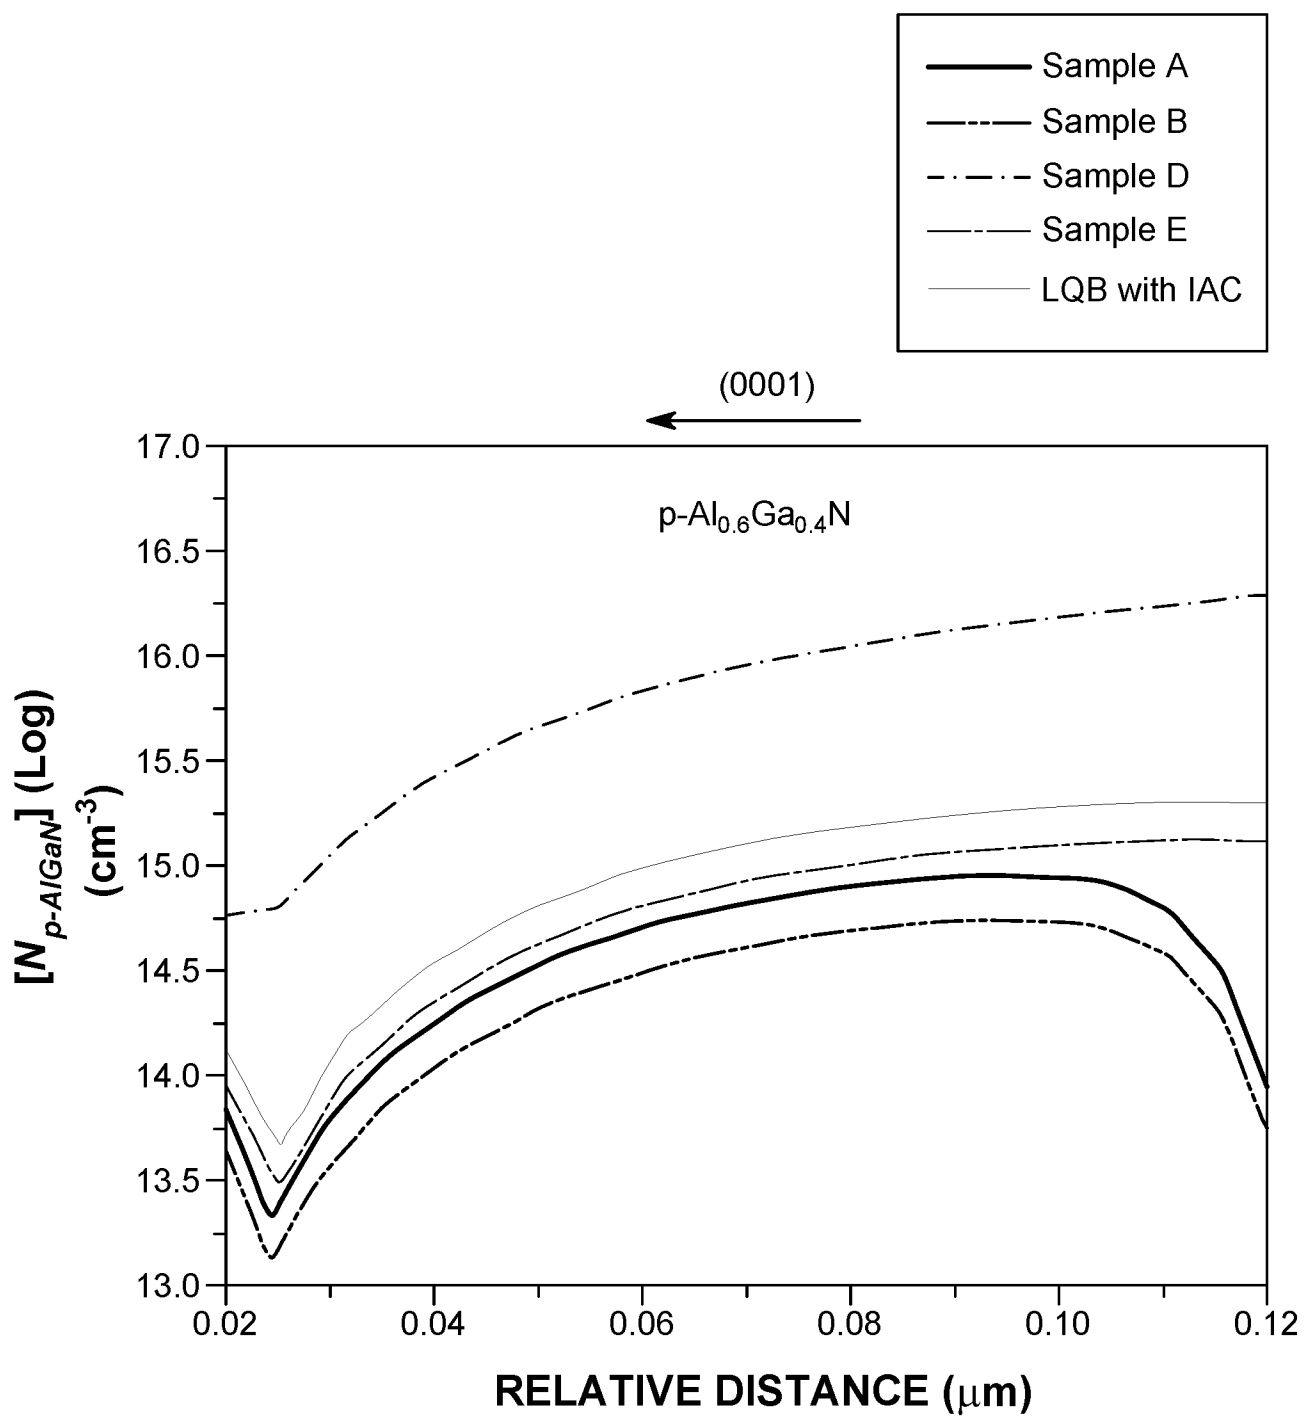


FIG. 10A

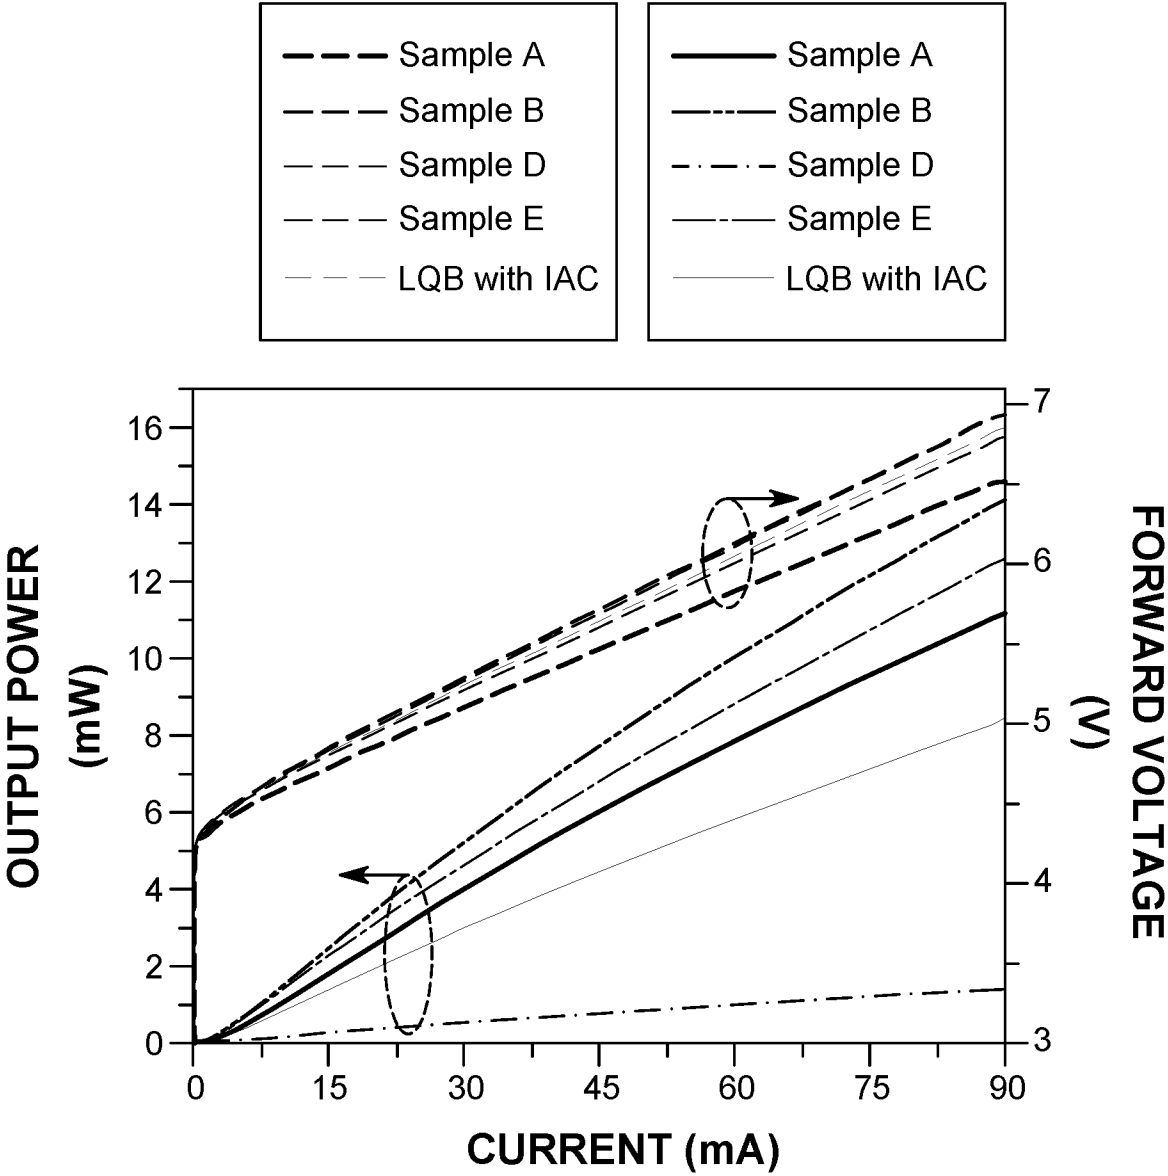


FIG. 10B

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2019/054821

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01L33/02 H01L33/06 H01L33/32 H01L33/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2007/089360 A2 (SENSOR ELECTRONIC TECH INC [US]; GASKA REMIGIJUS [US] ET AL.) 9 August 2007 (2007-08-09) paragraphs [0034] - [0057]; figures 1-9E -----	1-20
X	US 2014/332754 A1 (ZHANG JIANPING [CN]) 13 November 2014 (2014-11-13) paragraphs [0031] - [0049]; figures 1-4 -----	1-20
A	EP 2 348 548 A2 (INVENLUX CORP [US]) 27 July 2011 (2011-07-27) paragraphs [0053] - [0096]; figures 4b-17b -----	1-20
A	EP 1 280 212 A2 (LUMILEDS LIGHTING LLC [US]) 29 January 2003 (2003-01-29) paragraphs [0015] - [0035]; figures 1-9 ----- -/--	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 August 2019

Date of mailing of the international search report

04/09/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Albrecht, Claus

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2019/054821

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/198561 A1 (TACHIBANA KOICHI [JP] ET AL) 18 August 2011 (2011-08-18) paragraphs [0017] - [0120]; figures 1-10C -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2019/054821

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2007089360	A2	09-08-2007	TW 1334653 B	11-12-2010
			US 2007181869 A1	09-08-2007
			WO 2007089360 A2	09-08-2007

US 2014332754	A1	13-11-2014	CN 103247728 A	14-08-2013
			US 2014332754 A1	13-11-2014

EP 2348548	A2	27-07-2011	CN 102136536 A	27-07-2011
			EP 2348548 A2	27-07-2011
			EP 2348549 A2	27-07-2011
			JP 2011155241 A	11-08-2011
			WO 2011090581 A1	28-07-2011

EP 1280212	A2	29-01-2003	EP 1280212 A2	29-01-2003
			JP 2003060232 A	28-02-2003
			TW 556361 B	01-10-2003
			US 2003020085 A1	30-01-2003
			US 2005263780 A1	01-12-2005

US 2011198561	A1	18-08-2011	JP 4892618 B2	07-03-2012
			JP 2011171369 A	01-09-2011
			US 2011198561 A1	18-08-2011
			US 2013292644 A1	07-11-2013
			US 2014110667 A1	24-04-2014
