

(19) AUSTRALIAN PATENT OFFICE

(54) Title

Insect trap

(51)⁶ International Patent Classification(s)

A01M 1/02 (2006.01) 20060101ALI2005100

A01M 1/08 (2006.01) 8BMEP **A01M**

A01M 1/14 (2006.01) 1/14

A01M 1/20 (2006.01) 20060101ALI2005100

A01M 1/02 (2006.01) 8BMEP **A01M**

20060101AFI2005100 1/20

8BMEP **A01M** 20060101ALI2005100

1/08 8BMEP

PCT/DE2003/004162

(21) Application No: 2003303020

(22) Application Date: 2003 .12 .17

(87) WIPO No: W004/054358

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/434,563	2002 .12 .19	US
102 59 651.4	2002 .12 .18	DE

(43) Publication Date : 2004 .07 .09

(43) Publication Journal Date : 2004 .08 .19

(71) Applicant(s)

Universitaet Regensburg

(72) Inventor(s)

Geier, Martin, Eiras, Alvaro E., Rose, Andreas

(74) Agent/Attorney

Griffith Hack, Level 3 509 St Kilda Road, Melbourne, VIC, 3004

(56) Related Art

US 5505017

US 1478424

EP 0475665

GB 424235

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
1. Juli 2004 (01.07.2004)

PCT


(10) Internationale Veröffentlichungsnummer
WO 2004/054358 A3

- (51) Internationale Patentklassifikation: A01M 1/02, 1/08, 1/14, 1/22, 1/06, 1/04 (71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): UNIVERSITÄT REGENSBURG [DE]; Universitätstrasse 31, 93053 Regensburg (DE).
- (21) Internationales Aktenzeichen: PCT/DE2003/004162 (72) Erfinder; und
- (22) Internationales Anmeldedatum: 17. Dezember 2003 (17.12.2003) (75) Erfinder/Anmelder (nur für US): GEIER, Martin [DE/DE]; Carl-Maria-von-Weber-Strasse 7g, 93053 Regensburg (DE). ROSE, Andreas [DE/DE]; Carl-Maria-von-Weber Strasse 7g, 93053 Regensburg (DE). EIRAS, Alvaro, E. [BR/BR]; Rua Doménica 193, Bairro Itapoa, Belo Horizonte, MG 31270-901 (BR).
- (25) Einreichungssprache: Deutsch (26) Veröffentlichungssprache: Deutsch
- (30) Angaben zur Priorität:
102 59 651.4 18. Dezember 2002 (18.12.2002) DE
60/434,563 19. Dezember 2002 (19.12.2002) US (74) Anwalt: BENNINGER, Johannes; Bismarckplatz 9, 93047 Regensburg (DE).

[Fortsetzung auf der nächsten Seite]

(54) Title: INSECT TRAP

(54) Bezeichnung: INSEKTENFALLE

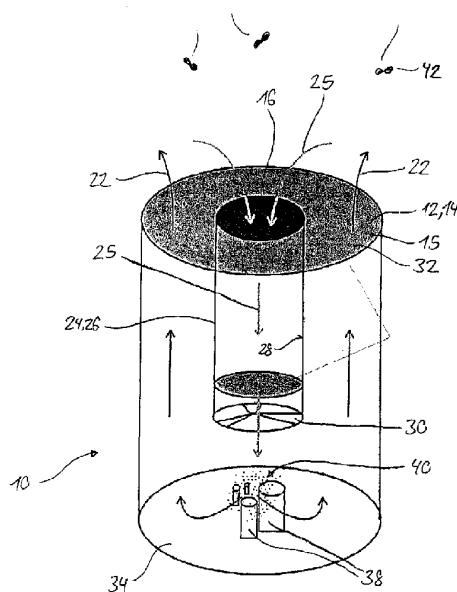

(57) Abstract: The invention relates to an insect trap which is especially intended for catching and/or rendering harmless flying insects and/or harmful insects. The insect trap (10), in a first embodiment, has a planar or curved, light surface (12) and at least one dark contrast spot (16) disposed inside said surface. The insect trap (10), in a second embodiment, has a diffuser surface (14) for producing a weak air current (22) that emanates from said surface. Both embodiments can be combined as required to increase the effectiveness of the trap. The insect trap (10) is further provided with devices for keeping, catching and/or eliminating trapped insects (42) on a surface of the trap and/or in a cavity (20) arranged therein. Insect traps of the above mentioned type are used in pest control indoors and outdoors and for detecting an insect density (monitoring).

(57) Zusammenfassung: Es wird eine Insektenfalle vorgeschlagen, die insbesondere zum Einfangen und/oder zum Unschädlichmachen für Flug- und/oder Schädlinginsekten vorgesehen ist. Die Insektenfalle (10) weist in einer ersten Variante eine ebene oder gewölbte, helle Fläche (12) und wenigstens eine innerhalb dieser angeordnete, dunkle Kontraststelle (16) auf. Die Insektenfalle (10) weist in einer zweiten Variante eine Ausströmfläche (14) zur Erzeugung einer von der Fläche ausgehenden, schwachen Luftströmung (22) auf. Beide

Varianten können zur Steigerung der Effektivität der Falle beliebig miteinander kombiniert werden. Bei der Insektenfalle (10) sind weiterhin Einrichtungen zum Festhalten,

[Fortsetzung auf der nächsten Seite]



(81) **Bestimmungsstaaten** (*national*): AU, BR, CN, ID, IN, JP, MX, NZ, US, ZA.

(84) **Bestimmungsstaaten** (*regional*): curasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Erklärung gemäß Regel 4.17:

— hinsichtlich der Berechtigung des Anmelders, ein Patent zu beantragen und zu erhalten (Regel 4.17 Ziffer ii) für die folgenden Bestimmungsstaaten AU, BR, CN, ID, IN, JP, MX, NZ, ZA, curasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)

Veröffentlicht:

— mit internationalem Recherchenbericht
— vor Ablauf der für Änderungen der Ansprüche geltenden Frist; Veröffentlichung wird wiederholt, falls Änderungen eintreffen

(88) Veröffentlichungsdatum des internationalen

Recherchenberichts: 16. Dezember 2004

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

Fangen und/oder Abtöten von angelockten Insekten (42) auf einer Oberfläche der Falle und/oder in einem darin angeordneten Hohlraum (20) vorgesehen. Derartige Insektenfallen werden zur Schädlingsbekämpfung in geschlossenen Räumen und im Freien sowie zur Erfassung einer Insektdichte (Monitoring) eingesetzt.

TRANSLATION

INSECT TRAP

The invention relates to an insect trap, in particular for flying and/or harmful insects, with the characteristics of independent claims 1 and 2.

Blood-sucking insects constitute one of the most significant health issues worldwide, as they spread numerous diseases (for example malaria, yellow fever, dengue, etc.) to both humans and animals and are generally burdensome. Insecticides are used for wide-scale destruction of these pests. A further possibility for controlling and fighting pest insects is the use of traps that are principally intended for small areas, in particular for closed spaces.

Insect traps are known in many types and styles. Simplest is the use of flypaper that is coated with glue so that the insects that contact with it get stuck. Other variants emit ultraviolet light or ultrasound and in this manner draw in insect pests. There are also device that use aromatic attractants, for example along with an air stream, so that the attracted insects are sucked by the air stream into a space and held there.

Such traps are described in US 2001/0045051 and US 6,286,249. With this type of trap an attractant is distributed by a blower inside a cylindrical tube so as to draw in insects. Once

they get close to the trap, the air stream sucks them into the trap. To this end a further tube is provided around the cylindrical tube. The insects are sucked into a space between the two coaxial tubes.

5

With the known types of traps carbon dioxide is used, since this gas is recognized by insects as what is exhaled by humans and animals and therefore attracts them.

10

The effectiveness and efficiency of the hitherto known traps is however mainly limited because they cannot be fully effective to neutralize all the insects in a given room or space. In addition the traps that emit carbon dioxide are relatively expensive to make and operate.

15

The present invention provides an insect trap, in particular for flying and/or pest insects, comprising:

20

a planar or curved light surface region,
an emanating surface emitting a weak air-current passing over through the emanating surface, and
means for holding, trapping and/or killing attracted insects on a surface of the insect trap and/or in its hollow interior,

25

wherein the colour of the emanating surface is light, and at least one dark contrasting surface region is located within the emanating surface.

30

Tests with embodiments of the above-described insect trap have shown that a light surface region with a dark spot in it, for example in its center, is very attractive for certain insects and draws them. Hitherto it has only been recognized that dark objects are capable of attracting certain types of insects. The invention improves on this by providing a dark contrast region on a light background.

35

Tests have also shown the surprising effect that a

weak and uniform air stream spread over a large surface is attractive for many insects and draws them. This can be explained in that the weak air stream over a large surface area is like the warm air flow of a human or animal body
5 that is in particular recognized by gnats (*aedes aegypti*) and blood-sucking insects and that draws them.

According to an embodiment of the invention at least the light surface region or parts of it are covered
10 with glue and/or an insecticide. In addition at least the dark contrast surface region can be covered with glue and/or an insecticide, so that the upper

surface of the trap functions to hold the attracted insects. Alternatively the insects can be killed by contact with the trap surface. This can be done by energizing the surface with electricity, for example with a screen or the like that is energized.

The weak air stream coming from the output surface preferably has an average flow speed of about 2 to 100 cm/sec, better between 3 and 50 cm/sec, and preferably from 5 to 20 cm/sec so that the weak air stream accurately imitates the convection air stream rising off a human or animal body.

A particularly preferred embodiment of the invention is characterized by an attractant that is emitted by the trap. This is based on the recognition that the smell of a human or animal body is particularly attractive for insects when it is carried by a weak uniformly spread-out air stream. There are situations in which carbon dioxide is used. This is an attractive that is contained in breathed air. Such an addition of carbon dioxide is thus particularly attractive for insects when the air flow is discontinuous and in exhalations streams. On the other hand an attractant imitating body odors is particularly attractive for insects when it is carried in a weak air or convective stream as provided for by the instant invention.

Preferably the attractant is emitted by the entire light surface region. The attractant can for example be in a coating of the upper surface in a predetermined concentration. To this end a binder is applied to the light and/or dark surface regions in which

the attractant is dissolved and that is in a predetermined concentration. Such a binder can in particular be a glue to which the attracted insects stick. So that the attractant is uniformly emitted and carried off in a convective stream, the trap surface can be heated, for example by heating wires or the like.

A particularly preferred variant uses a combination of olfactory and visual attractants for the insects. Such a preferred embodiment of the invention has an output surface that is a light surface region surrounding at least one dark contrast surface region. The light surface region has an area of at least 30 cm², preferably an area of at least 100 cm² in order to be effective at a distance. Such a combined optical and olfactory effect of the insect trap according to the invention imitates particularly well the human or animal body so that such a trap is highly attractive and is therefore very effective for many insects, in particular the blood-sucking types.

A further embodiment of the invention provides that at least one intake opening for drawing in attracted insects is provided near the trap. Alternatively a plurality of intake openings are provided around the light surface region or around the output surface. In particular an annular intake opening surrounds the light surface region or the output surface. In this manner the attracted insects can be sucked into the interior or into a container in which they are collected and from which they cannot fly out. If desired this space can hold an insecticide so that the insects are killed right there.

A preferred embodiment of the invention provides that the dark contrast surface region is a dark intake passage. Thus an inner surface of the tubular intake passage is preferably provided with a dark coating so that the intake passage itself forms the contrast surface region on the light surface region. A flow speed at or in the intake passage or at or in the intake opening is at least 1 m/sec, and can in a preferred embodiment be about 2 m/sec. This ensures that insects that get near the intake passage or the intake opening are sucked in and cannot fly out. At the same time this ensures that the insects cannot fly against the air stream and escape after being caught from the interior.

A further preferred embodiment of the invention provides a blower in the trap for providing the intake flow in the intake passage or in the intake opening and/or the weak air stream from the output surface. The fan can in particular form an annular flow, drawing the air in centrally at the intake opening or through the intake passage and expelling the sucked-in air through the large output surface as a uniform weak air stream. The ratio of areas of the intake passage and the output surface are such that the desired air speeds are obtained.

preferably a device inside the trap uniformly supplies the attractant to the weak air stream. Such a device can be several vessels with the individual components of the attractant or different tubes with the components of the attractant, since the attractant is typically not supplied as a mixture but as individual components and is only combined with put into the air. Such an

attractant can in particular be a mixture of milk acids, capron acids, and ammonia, as for example described in provisional US application 60/386,582 of 07 June 2002. The components and attractant mixture described in this application are incorporated by reference in this application.

The output surface can be a mesh with a light weave whose mesh size is smaller than the insects to be caught in the trap. In this manner the light surface region is formed and at the same time the trap is closed to the outside so that insects caught in it cannot fly out through the mesh.

The intake passage has preferably a minimum length that ensure a relatively uniform flow in the passage and near the passage. A typical intake-passage length can for example be between 5 and 10 cm. The typical diameter of the intake passage can for example be between 3 and 15 cm. The dimensions of the output surface and the intake passage depend in particular on the overall size of the trap and on the desired relationship between the flow speeds in the passage and from the emitting device. Even the typical sizes of the preferred insect being trapped influence the actual dimensions of the intake passage and of the trap.

An embodiment of the invention has an additional screen upstream of the fan in the intake passage so that the sucked-in insects do not get into the interior of the trap, but are collected at the lower end of the intake passage. According to a preferred embodiment the intake passage upstream of the fan holds an insert that can if necessary be provided with glue or an insecticide and

that is periodically taken out of the trap and emptied. In order to prevent that drawn-in insects fly out again, the fan can be set to run permanently. If the fan does not run all the time, it can be advantageous to provide a flared catchment from which the insects cannot fly out. With such a variant the fan is set to operate periodically.

In a preferred embodiment according to the invention the insect trap is hollow and cylindrical and has at one end the output surface and the dark intake passage in it. An end panel of the hollow cylindrical trap can be concave or convex. In addition it preferably for it to have a closed floor carrying means for supplying the attractant.

The end surface of the hollow-cylindrical trap is directed upward. The trap thus has in comparison to a trap that emits carbon dioxide, the advantage of being more easily seen by insects, since they can perceive the light surface or the outflowing attractant better than with a downwardly directed active face of the trap. Carbon-dioxide traps normally emit downward since CO_2 is heavier than air and naturally drops.

In an alternative embodiment of the invention the trap is spherical with an outer surface on which are distributed intake passages. At least part of an outer ball surface is formed as the output surface. Preferably generally the entire outer ball surface is formed as the output surface.

In a further embodiment a cover is provided spaced above the trap to protect it from the weather. The cover can prevent

rain from getting into the trap and making it less effective. The cover can if desired be transparent so that insects see the light surface with the dark contrast spot. Alternatively, the cover can itself serve as an optical attractant. To this end it can be formed as the light surface with one or more dark contrast spots.

The trap is preferably freely hanging, for example by a string or chain from a tree, structure or other appropriate support.

The insect traps according to the invention are perfect not only for dealing with pests in closed spaces and in the open, but also for determining the insect population in a given area. For such monitoring these traps are set out in the area to be checked for a predetermined time and the number of caught insects is determined. This monitoring can serve to determine the necessity or effectivity of antipest systems before applying them and/or after using them.

The invention is more closely described in the following with reference to preferred embodiments. Therein:

FIG. 1 is a schematic top view of an upper surface of an insect trap;

FIG. 2 is a schematic section through a first variant of the insect trap;

FIGS. 3 to 5 are schematic sections through alternative variants of insect traps;

FIG. 6 is a schematic top view of a further alternative variant of an insect trap;

FIG. 7 is a schematic section through the trap of FIG. 6;

FIG. 8 is a schematic top view of a further variant of the insect trap;

FIG. 9 is a schematic section through the trap of FIG. 8;

FIG. 10 is a schematic perspective view of an insect trap according to the invention;

FIG. 11 is a diagram of an alternative variant of an insect trap according to the invention; and

FIG. 12 is a pendant trap with a cover.

The schematic top view of FIG. 1 shows the basic principle of the optical functioning of an insect trap 10. It has a trap upper surface 18 having an outer light region 12 and a contrast region 16 inside the light region 12. The contrast region 16 is substantially darker than the light region 12, here black. The entire upper surface 18 and its parts can, according to how the trap 10 is made, be an output surface 14 that emits a weak air stream 22 (see FIGS. 3, 5, 7, and 9). While the trap upper surface 18 is shown in the drawing as being circular, any other shape can be used. The trap upper surface 18 does not have to be planar but can be curved inward or outward.

FIG. 2 shows a simple first variant of the insect trap 10 in a schematic sectional view. The uniformly light region 12 on the trap upper surface 18 and the generally central contrast region

16 are shown. Such a trap attracts purely optically, since a dark or black contrast against a light background is very attractive for many insects and they fly toward it. The dark contrast region 16 can be treated with glue or an insecticide so that the insects that land on it are trapped and/or killed.

FIG. 3 shows in another schematic section a second variant of an insect trap 10 where the light region 12 serves as an output surface 14. A weak air stream 22 flows out of this output surface 14 with a flow speed of less than 100 cm/sec. In particular the flow speed of the weak air stream 22 can be about 5 to 20 cm/sec and thus apes a convection stream from human or animal skin so as to be attractive to insects. The weak air stream 22 can move out of an output surface 14 formed as a mesh. Even the contrast region 16 in the middle of the light surface 12 forming the output surface 14 can be an output surface. This second variant uses the optical effect of the dark contrast spot in the center of the mechanical attractant of the weak air stream as has been found attractive for many insects as it imitates the warm convective air flow off a skin surface. It has been shown extremely effective in tests, as blood-sucking insects are attracted by such an air stream which they mistake for the convective air flow off a body.

FIG. 4 shows a variant of the insect trap 10 according to the invention in schematic section. This variant produces a weak air stream 22 outside the light region 12. The contrast region 16 is formed as an intake opening 24, in the illustrated embodiment

connected to an intake passage through which an intake stream 25 moves into an interior 20 of the insect trap 10. The weak air stream 22 in this embodiment of the insect trap 10 can also carry an attractant that draws the desired insects. The attractant can imitate emissions of a human or animal body and be comprised of several components that are mixed together in the stream 22.

The intake stream 25 is at least strong enough that an insect that gets near it is sucked into the intake passage 26 and cannot get out. When the intake passage 26 has a dark coating on its inner surface 28 it acts as a contrast region 16 so that this trap has optical, mechanical (via the air stream), and olfactory (by the attractant) action. Such a combination effect has a high trapping rate since the insects are stimulated and attracted in several ways.

FIG. 5 shows a schematic section through a further variant of the insect trap 10 according to the invention where the light region 12 is formed as an output surface 14 through which the weak air stream 22 passes. The contrast region 16 is again a dark-coated intake opening 24 or passage 26 through which flows a strong intake stream 25 with a flow speed of more than 1 m/sec, preferably 2 m/sec or more. Insects attracted by the weak air stream 22 or the contrast region 16 are sucked through the intake passage 26 into the trap interior 20. Preferably an attractant can be carried by the weak air stream 22.

FIGS. 6 and 7 show an alternative variant of an insect trap 10 where the trap upper surface 18 is formed as a light region

12 with an annular surrounding intake opening 24. The intake opening 24 serves for producing an intake stream 25 into the interior 20 of the insect trap 10. Here also the light region 12 is formed as an output surface 14 through which the weak air stream 22 passes. The air stream 22 can even as described carry an attractant.

FIGS. 8 and 9 show a further alternative variant where several contrast regions 16 are provided on a light region 12. Here only the light regions 12 or the entire trap upper surface 18 can form an output surface 14 through which the weak air stream 22 flows to the outside. Even with this variant the weak air stream can carry an attractant.

An entire insect trap 10 is shown in FIG. 10. The insect trap 10 has a cylindrical body defining an interior 20 and having an end panel forming the trap upper surface 18. The trap upper surface 18 has a light region 12 formed as an output surface and that has a central contrast region 16 that in the illustrated embodiment is formed as an intake passage with a dark-coated inner surface 28. The light surface 12 can be formed by a mesh 15 that is spanned on the hollow cylindrical trap and through which the weak air stream 22 moves outward.

At the lower end of the intake passage 26 is a fan or blower 30 that produces the intake stream 25 into the interior 20 of the insect trap 10. A floor 34 of the interior 20 has several attractant holders 38 that each emit a component of an attractant 40 in the desired concentration so that the attractant 40 is

optimally mixed and expelled outward in the weak air stream 22. The light region 12 and the diameter of the intake passage 26 are such that the one fan 30 serves both to produce the desired intake stream of about 2 m/sec and the desired weak air stream of 5 to 20 cm/sec. Preferably there is a screen upstream of the fan 30 to prevent the insects from getting inside it.

A particularly advantageous embodiment provides an insert in the intake passage 26 that can be taken out and emptied once it is full of insects. The intake stream 25 is at least strong enough that insects 42 near the trap 10 are sucked into the intake passage 26 and cannot escape.

FIG. 11 shows a schematic representation of an alternative embodiment of the insect trap that in this case is formed as a sphere. The sphere outer surface 36 of the insect trap 10 can be an output surface 14. preferably several intake passages 26 are distributed over the ball surface so that at least one dark contrast region 16 is visible from any angle on the light ball surface. The spherical insect trap 10 according to FIG. 11 is more effective than the cylindrical embodiment of FIG. 10 as a result of its larger effective surface area, since the optical component with the dark contrast regions 16 of the intake passages 26 is effective in all directions.

In all the described embodiments that have a weak air stream 22 moving through an output surface 14 this can also serve to carry an attractant 40. The weak air stream 22 imitates a convective updraft of a human or animal body. The attractant 40

can be like human or animal emanations. Preferably other attractants can be used that draw insects.

The contrast region 16 inside the light region 12 is preferably sufficiently dark that it optically attracts the insects 42. Tests have proven that individual dark contrast regions on a light background attract many insects so that the system of this invention can operate purely optically.

Finally, FIG. 12 shows a pendant trap 10 with a cover 44 spaced above it. The trap 10 can have any shape, for example a hollow cylinder or a ball corresponding to FIGS. 10 or 11. The cover 44 can preferably be transparent so as not to shield the light regions 12 of the trap with the dark contrast regions from the insects. Alternatively the cover 44 itself can be a light region with dark contrast regions in it, in order to draw insects from a distance.

The insect trap according to the invention is particularly effective for gnats, mosquitos, and other stinging and/or blood-sucking flying insects.

In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the invention.

It is to be understood that, if any prior art publication is referred to herein, such reference does not constitute an admission that the publication forms a part of the common general knowledge in the art, in Australia or any other country.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An insect trap, in particular for flying and/or pest insects, comprising:
 - 5 a planar or curved light surface region,
 - an emanating surface for emitting a weak air-current passing out through the emanating surface, and
 - means for holding, trapping and/or killing attracted insects on a surface of the insect trap and/or in its
 - 10 hollow interior,
 - wherein the colour of the emanating surface is light, and at least one dark contrasting surface region is located within the emanating surface.
- 15 2. An insect trap according to claim 1, further comprising an insect attractant which is emitted by the trap and acts as a lure for the insects to be trapped.
3. An insect trap according to claim 1 or 2, wherein
 - 20 the dark, contrasting surface region functions as a dark aspiration duct or intake passage.
4. An insect trap according to claim 3, further comprising at least one blower or fan located within the
 - 25 trap which produces an aspiration current in the intake passage or respectively in at least one of the aspiration openings and/or produces the weak air-current emanating from the emanating surface.
- 30 5. An insect trap according to at least one of the preceding claims, further comprising within the trap interior, a facility for the uniform distribution of the attractant by means of the weak air-current.
- 35 6. An insect trap according to claim 4, wherein the trap has a hollow cylindrical form which has at one end the emanating surface surrounding the intake passage.

7. An insect trap according to claim 6, further comprising an upwardly directed end panel of the hollow cylindrical trap.
- 5 8. An insect trap according to claim 6 or 7, further comprising a closed floor area carrying means for supplying and emitting the attractant.
- 10 9. An insect trap according to at least one of the claims 1 to 5, wherein the trap is spherical and contains several aspiration ducts distributed all over the surface region.
- 15 10. An insect trap according to claim 9, wherein at least parts of the spherical surface region are formed as emanating surfaces.
- 20 11. An insect trap according to claim 1 and substantially as herein described with reference to the accompanying drawings.

Figure 1

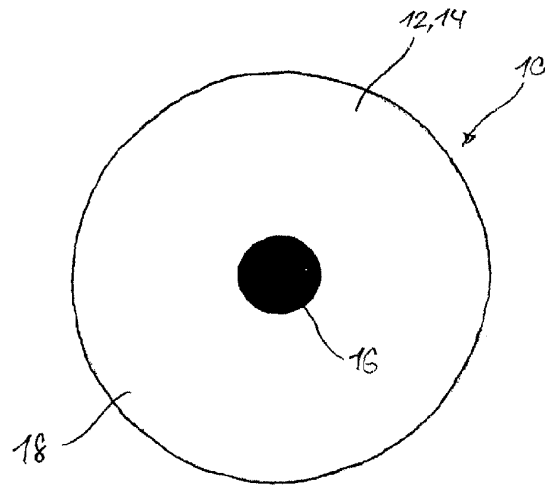


Figure 2



Figure 3



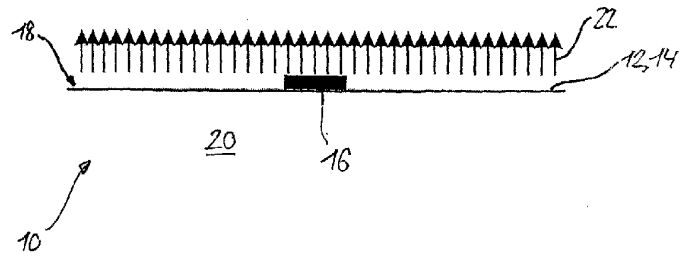


Figure 4

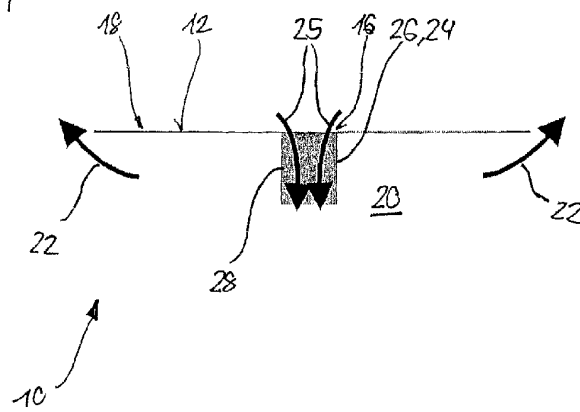

Figur 5

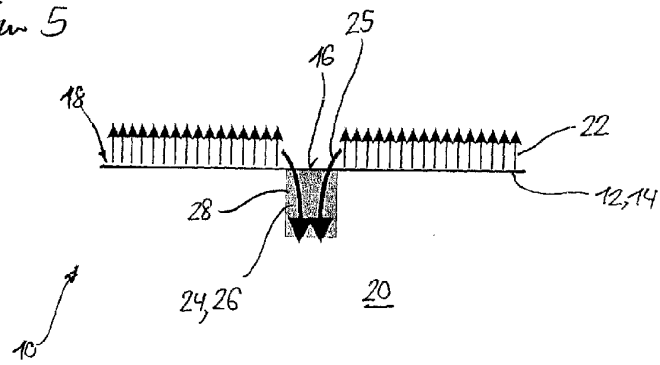

Figur 6

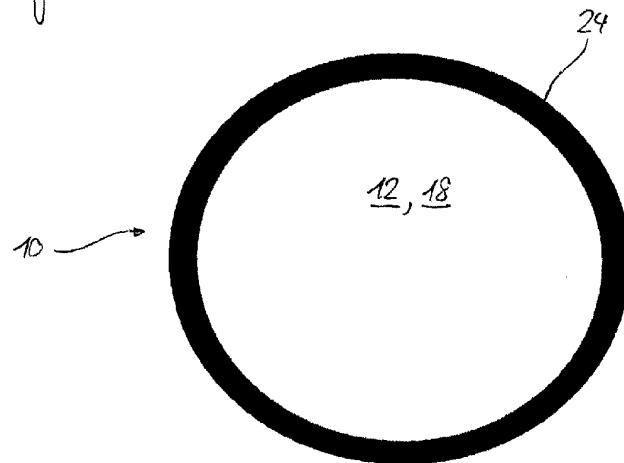


Figure 7

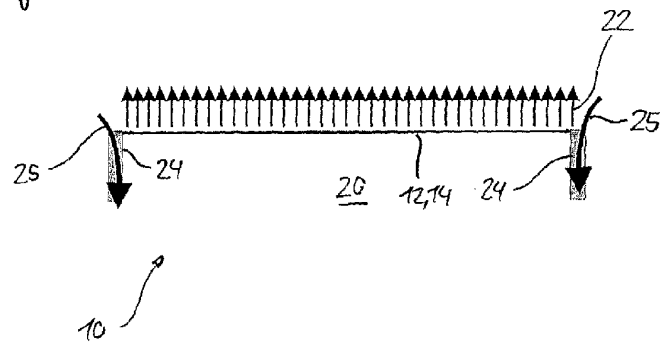


Figure 8

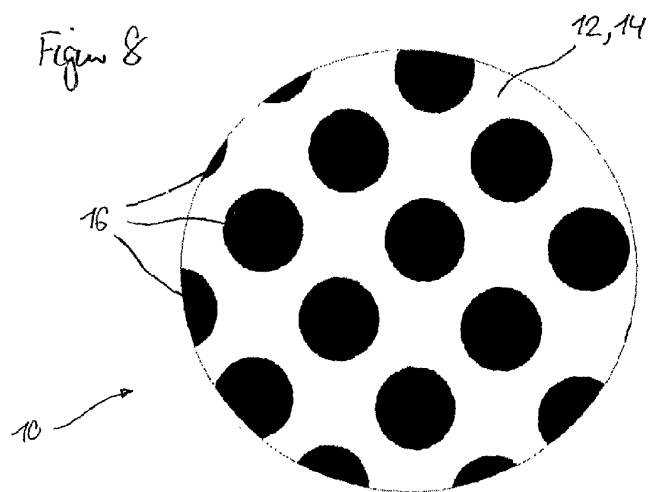


Figure 9

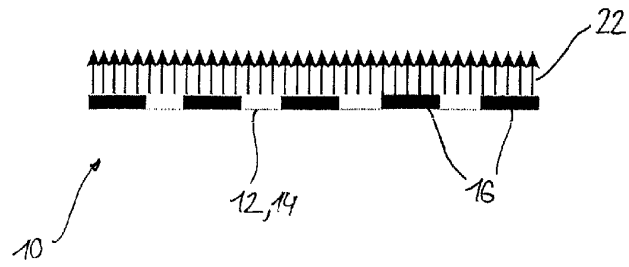
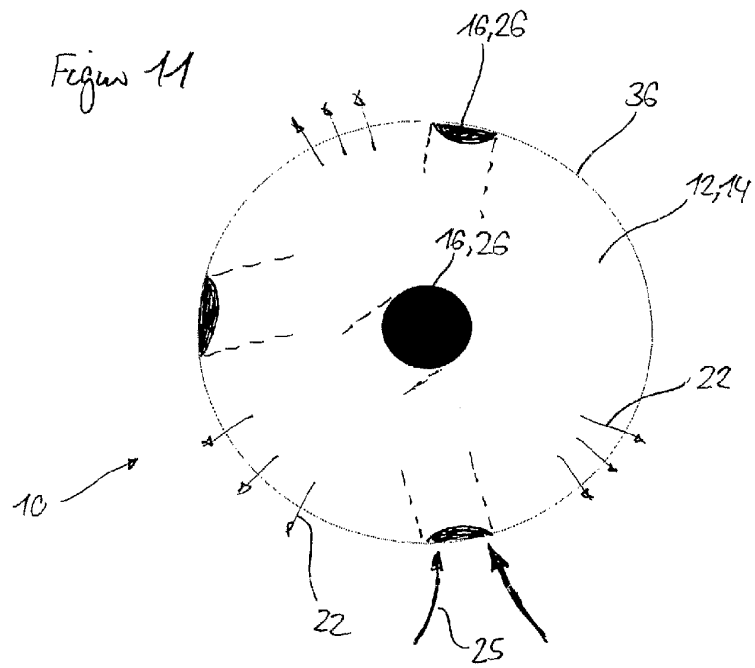


Figure 11



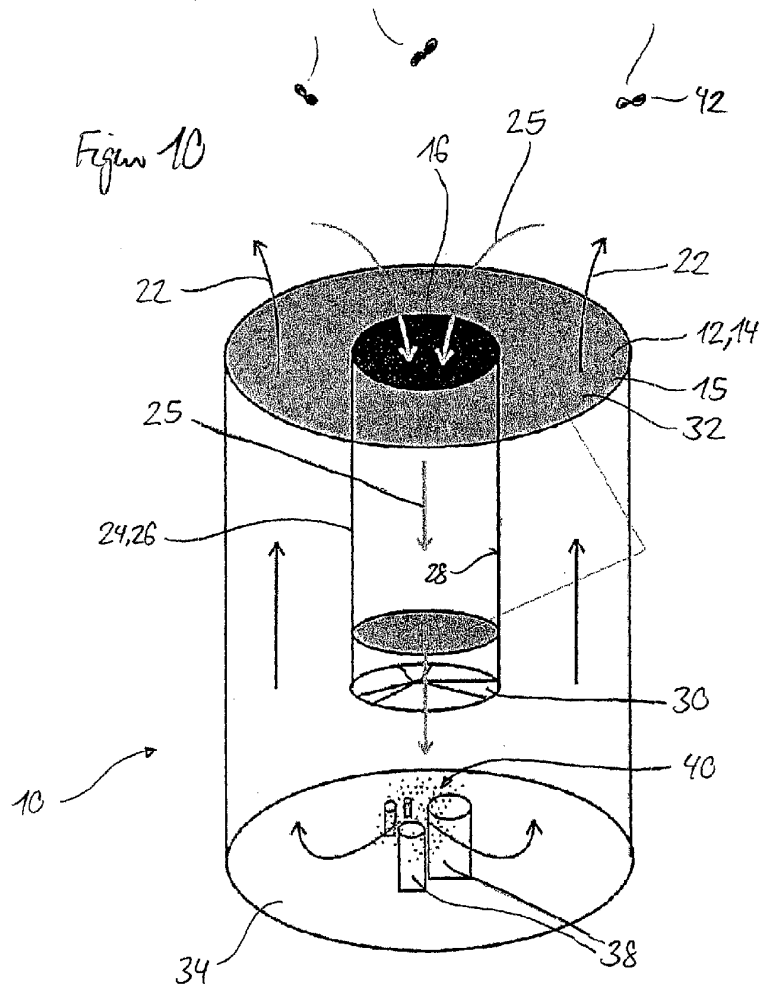


Fig. 12

