



(51) International Patent Classification:
H01L 21/20 (2006.01)

(21) International Application Number:
PCT/US2010/026065

(22) International Filing Date:
3 March 2010 (03.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/157,195 3 March 2009 (03.03.2009) US

(71) Applicant (for all designated States except US): **AKRI-ON SYSTEMS LLC** [US/US]; 6330 Hedgewood Drive, Suite 150, Allentown, PA 18106 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KASHKOUSH, Is-mail, I.** [US/US]; Post Office Box 66, Fogelsville, PA 18051 (US).

(74) Agent: **THE BELLES GROUP, PC**; 1518 Walnut Street, Suite 1706, Philadelphia, PA 19102 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD FOR SELECTIVE UNDER-ETCHING OF POROUS SILICON

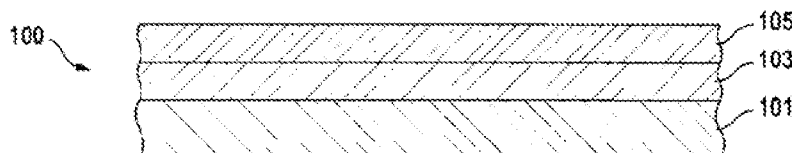


FIG. 1A

(57) Abstract: PT-ENG PT-FRE PT-ENG PT-FRE PT-ENG PT-FRE A method for making a solar cell is disclosed. In accordance with the method of the present invention a composite wafer is formed. The composite layer includes a single crystal silicon wafer, a silicon-based device layer and sacrificial porous silicon sandwiched therebetween. The composite wafer is treated to an aqueous etchant maintained below ambient temperatures to selectively etch the sacrificial porous silicon and release or undercut the silicon-based layer from the single crystal silicon wafer. The released silicon device layer is attached to a substrate to make a solar cell and the released single crystal silicon wafer is reused to make additional silicon device layer. 0 0



METHOD FOR SELECTIVE UNDER-ETCHING OF POROUS SILICON

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Patent Application Serial Number 61/157,195, filed on March 3, 2009, and titled "METHOD FOR SELECTIVE UNDER-ETCHING OF POROUS SILICON," the entirety of which is hereby incorporated by reference.

FIELD OF THE INVENTION

[0002] This invention relates to a method for making solar cells. More particularly, the present invention relates to selective etching of a porous silicon layer to under-cut and release a silicon-based device layer that is then used for making solar cells.

BACKGROUND OF THE INVENTION

[0003] Solar cells are semiconductor devices that are usually manufactured from silicon-based material. Some solar cells are made from screen printed poly-crystalline silicon. Single crystalline wafers can be used to make very efficient solar cells. However, high manufacturing costs for making single crystalline materials makes the large scale production of solar cells from these materials impractical.

[0004] Poly-crystalline silicon wafers used to manufacture solar cells are made by cutting 180 to 350 micrometer thick wafers from block-cast silicon ingots. The wafers are usually lightly p-type doped. To make a solar cell from the wafer, a surface diffusion of n-type dopants is performed on the front side of the wafer. This forms a p-n junction a few hundred nanometers below the surface. Solar cells usually also include anti-reflective coatings, such as silicon nitride or titanium dioxide and/or have textured surfaces increase efficiency of light absorption. This method is disadvantageous in that the crystal takes an exceptionally long time to grow on the silicon ingot.

[0005] Metal contacts are formed on the back and front surfaces of poly-crystalline silicon wafers by screen-printing metal pastes, such as silver paste or aluminum paste. After the metal contacts are formed, the solar cells are assembled into panels and are sandwiched between glass and polymer resins.

[0006] As mentioned above, solar cells and solar panels that are formed from single crystal silicon are preferred because of the efficiency of the solar cells and panels made from single crystal silicon.

SUMMARY OF THE INVENTION

[0007] The present invention is directed to a method of making a solar cell. In accordance with the method of the present invention, a silicon-based device layer is formed on a base wafer. The base wafer includes a single crystal silicon wafer and a sacrificial porous silicon layer that is deposited thereon. The sacrificial porous silicon layer is formed using thermal deposition or any other suitable coating or deposition technique. Preferably, the porous silicon layer has a porosity of 30 percent or more. The sacrificial porous silicon layer

comprises, for example, carbon doped oxide, spin-on-glass (SOG), fluoridated silicon glass (FSG) or a combination thereof. The thickness of the porous silicon layer is preferably in a range of several nanometers to several microns.

[0008] The silicon-based device layer is preferably crystalline or semi-crystalline, as opposed to being amorphous, and is epitaxially grown on top of the sacrificial porous silicon layer. The silicon-based device layer is preferably a p-doped silicon-based device layer that has a thickness of several microns to several hundred microns. The silicon-based device layer is formed using any suitable growth or deposition technique, such as chemical vapor deposition.

A working wafer that includes the single crystal silicon wafer, the silicon-based device layer and the sacrificial porous silicon layer sandwiched between the single crystal silicon wafer and the silicon-based device layer is referred to herein as a composited wafer.

[0009] In accordance with the embodiments of the invention, after the composite wafer is formed the sacrificial layer is selectively etched thereby releasing the silicon-based device layer, or a portion thereof and the single crystal wafer, or a portion thereof. The released silicon-based device layer, or the portion thereof, is then provided with the appropriate electrical contacts and anti-reflective coatings and is coupled to one or more substrates to form a solar cell. The released single crystal wafer, or the portion thereof, is then used to make additional composite wafers and additional solar cells, such as described above.

[0010] In order to accomplish release of the silicon-based device layer, or the portion thereof, the etch rate of the porous silicon layer needs to be significantly faster than the etch rates of either the single crystal wafer or of the silicon-based device layer. Selective etching of the sacrificial porous silicon layer has been observed by treating the composite wafer to an aqueous etchant that is maintained at temperatures in a range of 0 to 10 degrees Celsius. The

aqueous etchant preferably includes one or more etchants such as potassium hydroxide, sodium hydroxide and hydrogen fluoride in a concentration of 5% or less by weight. In further embodiments of the invention the aqueous etchant includes an alcohol, such as isopropyl alcohol, in a concentration of 10% or less by weight. In still further embodiments of the invention the etchant includes a surfactant in a concentration of 1% or less by weight. Also, to further control etch rates during the selective etching step, the composite wafer and the aqueous etchant are treated with ultrasonic energy.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Fig. 1A shows a composite wafer used to make a silicon-based device layer for solar cells, in accordance with the embodiments of the invention.

[0012] Fig. 1B illustrates releasing a silicon-based device layer from the composite wafer, in accordance with the embodiments of the invention.

[0013] Fig. 1C shows a released silicon-based device layer coupled to a substrate to form a solar cell, in accordance with the embodiments of the invention.

[0014] Fig. 2A shows a block-flow diagram outlining steps for making a solar cell, in accordance with the method of the invention.

[0015] Fig. 2B shows a block-flow diagram outlining steps for making a composite wafer, in accordance with the method of the invention.

[0016] Fig. 2C shows a block-flow diagram outlining steps for releasing a device layer from the composite wafer, in accordance with the method of the invention.

[0017] Fig. 3 shows a schematic representation of a solar panel with multiple solar cells on a

common substrate, in accordance with the embodiments of the invention.

[0018] Fig. 4 shows a schematic representation of a system that utilizes a solar cell or panel, in accordance with the embodiments of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0019] Fig. 1 shows a composite wafer **100** used to make a silicon-based device layer used in solar cells. The composite wafer **100** includes a single crystal silicon wafer **101** and a sacrificial porous silicon layer **103** that is deposited thereon, which is referred to herein as a base wafer. The composite wafer **100** also includes a silicon-based device layer **105** that is preferably crystalline or semi-crystalline and is epitaxially grown on top of the sacrificial porous silicon layer **103**.

[0020] As described above, the sacrificial porous silicon layer **103** preferably has a porosity of 30 percent or more and is several nanometers to several microns thick. The sacrificial porous silicon layer **103** is formed from any suitable porous silicon material including, but not limited to carbon doped oxide, spin-on-glass (SOG), fluoridated silicon glass (FSG) or a combination thereof.

[0021] The silicon-based device layer **105** is preferably a p-doped silicon-based device layer that has a thickness of several microns to several hundred microns. The sacrificial porous silicon layer **103** and the silicon-based device layer **105** are formed using any suitable coating, growth and/or deposition techniques including, but not limited to, thermal deposition and chemical vapor deposition.

[0022] Fig. 1B illustrates a schematic representation **120** of a released silicon-based device

layer **105'** and a released single crystal silicon wafer **101'** which are formed by selectively etching the sacrificial porous silicon layer **103**, as indicated by the arrow **109**. Selective etching of the sacrificial porous silicon layer **103** is preferably accomplished by steps outlined and described below with reference to Figs 2A-C.

[0023] Fig. 1C shows the released silicon-based device layer **105'** coupled to a new substrate **101''** to form a solar cell **130**. Prior to coupling the released silicon-based device layer **105'** to the new substrate **101''**, the released silicon-based device layer **105'** and/or substrate **101''** are preferably provided with the appropriate electrical contacts and anti-reflecting coatings to form a working solar cell **130**. The released single crystal silicon wafer **101'** is reused preferably from 0-50 times, and more preferably from 20-30 times to make additional composite wafers and solar cells.

[0024] Fig. 2A shows a block flow diagram **200** outlining steps for making a solar cell. In the step **201** a composite wafer **100** is formed, such as described with reference to Fig. 1A. After the composite wafer **100** is formed in the step **201**, in the step **203** the sacrificial porous silicon layer **103** is controllably or selectively etched to form a released silicon-based device layer **105'** and a released single crystal silicon wafer **101'**, such as shown in Fig. 1B.

[0025] Referring to Fig. 2B, the composite wafer **100** is formed using any number of techniques or combination of techniques. For example, the sacrificial porous silicon layer **103** is deposited in the step **202** by spin coating poly-silicon on the substrate **101**, which is preferably a single crystal silicon wafer. The poly-silicon is then dried or cured to remove solvent and form the sacrificial porous silicon layer **103**. As described above, the sacrificial porous silicon layer **103** has a porosity of 30% or more, which is believed to increase the

selectivity of the etch rate for the sacrificial porous silicon layer **103**.

[0026] After the sacrificial porous silicon layer **103** is formed in the step **202**, in the step **204** the device layer **105** is formed over the sacrificial porous silicon layer **103**. The device layer **105** is preferably formed using any suitable technique, but is preferably formed by epitaxially growing a crystalline or semi-crystalline silicon device layer using vapor deposition techniques. The device layer **105** that is formed in the step **204** is preferably a p-doped device layer. The device layer **105** is formed, for example, by vapour depositing silicon-based precursors that includes a p-dopant or p-dopants, herein referred to as p-doped silicon-based precursors. Suitable p-doped silicon-based precursors include trivalent atoms typically from group IIIA of the periodic table, such as boron or aluminum. Alternatively to using p-doped silicon-based precursors to form the device layer **105**, the device layer **105** may be doped after its formation using ion implantation techniques. In some cases, it can be useful to form the device layer **105** by using p-doped silicon-based precursors, such as described above, and further doping the device layer **105** with the same or different dopants using ion implantation techniques.

[0027] Now referring to Fig. 2C, in step **203** the sacrificial porous silicon layer **103** is controllably or selectively etched to form a released silicon-based device layer **105'** and a released single crystal silicon wafer **101'**. In accordance with the embodiments of the invention, the sacrificial porous silicon layer **103** is controllably or selectively etched by first patterning the device layer **105** with access groove or holes in the step **206**. After the device layer **105** is patterned with access grooves or holes in the step **206**, the composite wafer **100** is treated with an etchant, such as described above and below. Patterning the device layer **105** with access grooves or holes prior to treating the composite wafer **100** with an etchant

can result in faster etch rates by allowing a greater surface area of the sacrificial poly-silicon layer **103** to be initially exposed to the etchant.

[0028] In accordance with the embodiments of the invention, the device layer **105** is patterned with access groves or holes in the step **206** by using photo-resist masking and etching techniques. It will be clear to one skilled in the art that while patterning the device layer **105** with access groves or holes, such as described above, can be beneficial, it is not necessary to implement the present invention. Regardless of whether the step **206** of patterning the device layer **105** with access groves or holes is performed, in the step **208** the composite wafer **100** is treated with an etchant to form a released silicon-based device layer **105'** and a release single crystal silicon wafer **101'**, such as shown in Fig. 1B.

[0029] Still referring to Fig. 2C, in the step **208** the composite wafer **100** is treated with an aqueous etchant comprising one or more of potassium hydroxide, sodium hydroxide and hydrogen fluoride in concentrations of 5% or less by weight. Preferably, the aqueous etchant is maintained at temperatures in a range of 0 to 10 degrees Celsius during the step **208**. This temperature range results in better selectivity during the etching process. In further embodiments of the invention the aqueous etchant includes an alcohol, such as isopropyl alcohol, in a concentration of 10% or less by weight. In still further embodiments of the invention, the etchant includes a surfactant in a concentration of 1% or less by weight. Suitable surfactants include, but are not limited to:

- 1) Anionic Surfactants, such as, for example, Perfluorooctanoate (PFOA or PFO), Perfluorooctanesulfonate (PFOS), Sodium dodecyl sulfate (SDS), ammonium lauryl sulfate, Sodium laureth sulfate and Alkyl benzene sulfonate;
- 2) Soap or fatty acid salt surfactants;

3) Cationic Surfactants, such as, for example, Cetyl trimethylammonium bromide (CTAB), a.k.a. hexadecyl trimethyl ammonium bromide, Cetylpyridinium chloride (CPC), Polyethoxylated tallow amine (POEA), Benzalkonium chloride (BAC) and Benzethonium chloride (BZT);

4) Zwitterionic (amphoteric) Surfactants, such as, for example Dodecyl betaine, Cocamidopropyl betaine, Coco amphoteric glycinate; and

5) Nonionic Surfactants, such as, for example Alkyl poly(ethylene oxide), Alkylphenol poly(ethylene oxide) Copolymers of poly(ethylene oxide) and poly(propylene oxide), Octyl glucoside, Decyl maltoside, Fatty alcohols, Cetyl alcohol, Oleyl alcohol, Cocamide MEA, cocamide DEA, Polysorbates and Dodecyl dimethylamine oxide.

[0030] In still further embodiments of the invention, during the selective etching step 208 the composite wafer 100 and the aqueous etchant are treated with ultrasonic energy. After the release, silicon-based device layer 105' is formed in the step 203. In the step 205 the released silicon-based device layer 105' is attached to a suitable substrate 101", such as, for example, a glass substrate, and provided with all the appropriate inter-connects to form a solar cell.

[0031] Referring now to Fig. 3, in further embodiments of the invention, a solar panel 300 is formed by attaching multiple solar cells 130, 130' and 130", such as the solar cell described above, to a common substrate 301. The solar cells 130, 130' and 130" are provided with all of the appropriate inter-connects 302, 302' and 302" to each other and/or the substrate 301 to allow the solar panel 300 to collect solar energy and provide power to a device 401 such as described below.

[0032] With reference to Fig. 4, a system 400 includes a solar panel 300, such as described above with reference to Fig. 3. The solar panel 300 is electrically coupled to a battery or

energy storage device **403** through an electrical connection **413**. The solar panel **300** and the battery or energy storage device **403** are electrically coupled to a device **401** through electrical connections **411** and **415**, respectively. The device **401** is configured with the appropriate circuitry, such that the solar panel **300** and the battery or energy storage device is capable of powering the device **401**. The device **401** may be computer, a hand-held communication device or any other electronic device now known or later developed. In accordance with the embodiments of the invention, the solar panel **300** and battery energy storage device **403** are built into the device **401** and the device **401** includes a display unit, screen or user interface **405**.

[0033] The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. As such, references herein to specific embodiments and details thereof are not intended to limit the scope of the claims appended hereto. It will be apparent to those skilled in the art that modifications can be made in the embodiments chosen for illustration without departing from the spirit and scope of the invention.

CLAIMS

What is claimed is:

1. A method of making a solar cell, the method comprising:
 - a) forming a base wafer comprising a sacrificial porous silicon layer deposited on a single crystal silicon wafer;
 - b) forming a crystalline silicon layer on the sacrificial porous silicon layer to form a composite wafer;
 - c) selectively etching the sacrificial porous silicon layer to form a released crystalline silicon layer; and
 - d) attaching the released crystalline silicon layer to a substrate to form the solar cell.
2. The method of claim 1, wherein selectively etching the sacrificial porous silicon layer to form a released crystalline silicon layer comprises treating the composite wafer to an aqueous etchant maintained at a temperature in a range of 0 to 10 degrees Celsius.
3. The method of claim 2, wherein the aqueous etchant comprises one or more of potassium hydroxide, sodium hydroxide and hydrogen fluoride.
4. The method of claim 3, wherein the aqueous etchant further comprises a surfactant.
5. The method of claim 3, wherein the aqueous etchant further comprises an alcohol.

6. The method of claim 5, wherein the alcohol is isopropyl alcohol.
7. The method of claim 2, further comprising treating the composite wafer and the aqueous etchant with ultrasonic energy.
8. The method of claim 1, wherein forming a crystalline silicon layer comprises epitaxially growing the crystalline silicon layer using chemical vapor deposition.
9. The method of claim 1, wherein the sacrificial porous silicon layer comprises a material selected from the group consisting of a carbon doped oxide, a spin-on-glass (SOG) and fluoridated silicon glass (FSG).
10. The method of claim 1, wherein the crystalline silicon layer is a p-doped crystalline silicon layer.
11. A method of making a solar cell comprising:
 - a) forming a sacrificial porous silicon layer on a crystalline wafer;
 - b) growing a silicon-based device layer on the sacrificial porous silicon layer;
 - c) etching the sacrificial porous silicon layer to release at least a portion of the silicon device-based layer; and
 - d) attaching the released portion of the silicon-based device layer to form the solar cell.

12. The method of claim 11, wherein etching the sacrificial porous silicon layer to release the portion of the silicon-based device layer comprises treating the sacrificial porous silicon layer to an aqueous etchant at a temperature in a range of 0 to 10 degrees Celsius.
13. The method of claim 12, wherein the aqueous etchant comprises one or more of potassium hydroxide, sodium hydroxide and hydrogen fluoride.
14. The method of claim 13, wherein the aqueous etchant further comprises a surfactant.
15. The method of claim 14, wherein the aqueous etchant further comprises an alcohol.
16. The method of claim 15, wherein the alcohol is isopropyl alcohol.
17. The method of claim 12, further comprising treating the composite wafer and the aqueous etchant to ultrasonic energy.
18. The method of claim 11, wherein growing the silicon-based device layer on the sacrificial porous silicon layer comprises epitaxially growing the silicon device layer using chemical vapor deposition.
19. The method of claim 11, wherein the sacrificial porous silicon layer comprises a

material selected from the group consisting of a carbon doped oxide, a spin-on-glass (SOG) and fluoridated silicon glass (FSG).

20. The method of claim 11, wherein the silicon-based device layer is a p-doped crystalline silicon layer.
21. A method of making a solar cell comprising:
forming a composite wafer comprising:
a) a crystalline silicon wafer;
b) a crystalline silicon device layer; and
c) a sacrificial porous silicon layer sandwiched between the crystalline silicon wafer and the silicon device layer; and
etching the sacrificial porous silicon layer with an aqueous etchant to release the crystalline silicon device layer, wherein the aqueous etchant is maintained at temperatures in a range of 0 and 10 degrees Celsius.

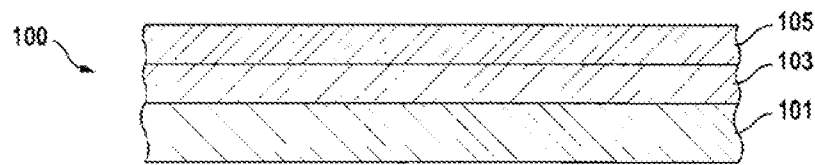


FIG. 1A

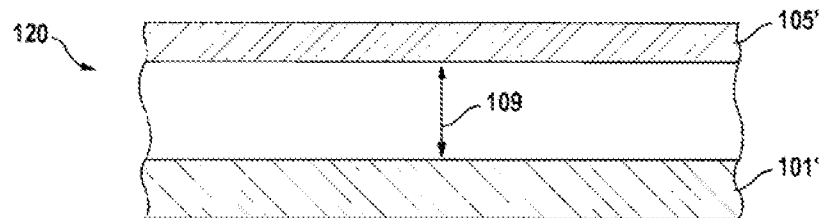


FIG. 1B

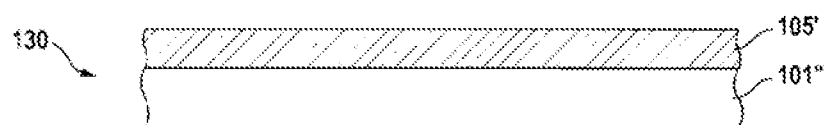


FIG. 1C

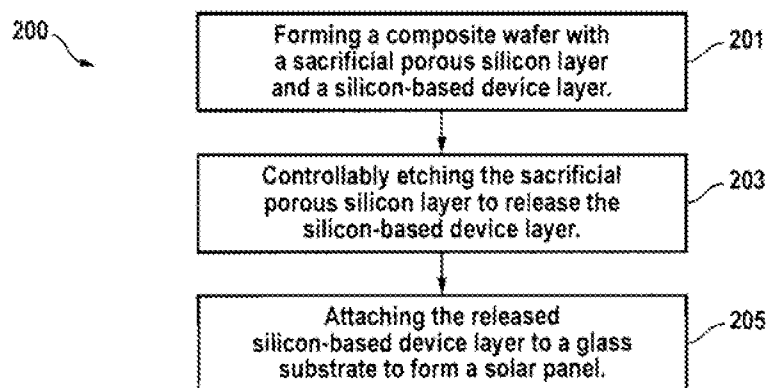


FIG. 2A

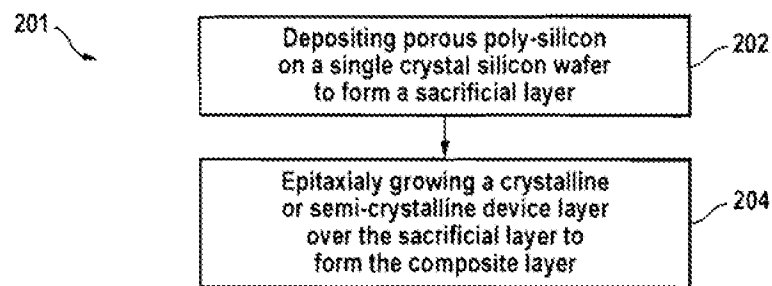


FIG. 2B

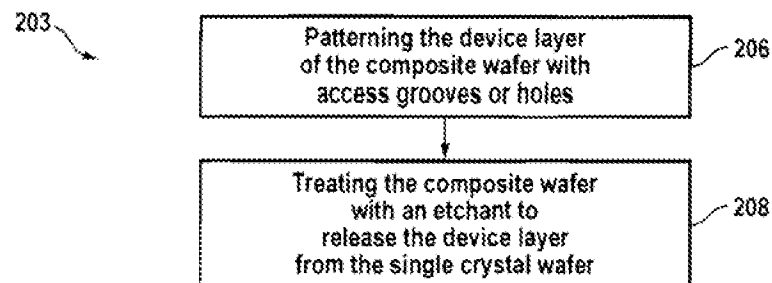


FIG. 2C

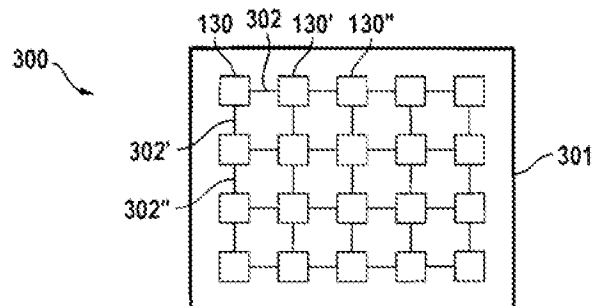


FIG. 3

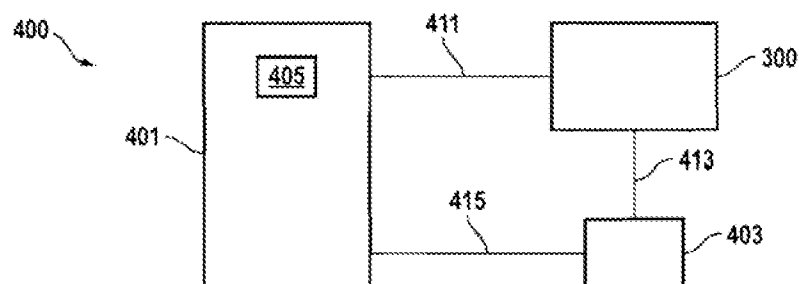


FIG. 4