



(22) **Date de dépôt/Filing Date:** 2014/09/05  
 (41) **Mise à la disp. pub./Open to Public Insp.:** 2015/03/06  
 (45) **Date de délivrance/Issue Date:** 2017/03/21  
 (30) **Priorités/Priorities:** 2013/09/06 (US61/874,462);  
 2014/08/22 (US14/466,439)


(51) **Cl.Int./Int.Cl.** *F16B 31/00* (2006.01),  
*F16B 35/00* (2006.01), *H01R 13/621* (2006.01)

(72) **Inventeurs/Inventors:**  
 VALLETTE, RONALD, US;  
 ZAHNEN, JAMES, US;  
 LONGCOR, WILLIAM K., US;  
 SZYSZKO, STANLEY S., US;  
 CAWOOD, MATTHEW, US;  
 FONG, ROBERT, US

(73) **Propriétaire/Owner:**  
 THOMAS & BETTS INTERNATIONAL, LLC, US

(74) **Agent:** FASKEN MARTINEAU DUMOULIN LLP

(54) **Titre : VIS DE RUPTURE DE REGLAGE DE COUPLE**  
 (54) **Title: TORQUE CONTROLLING BREAK SCREW**

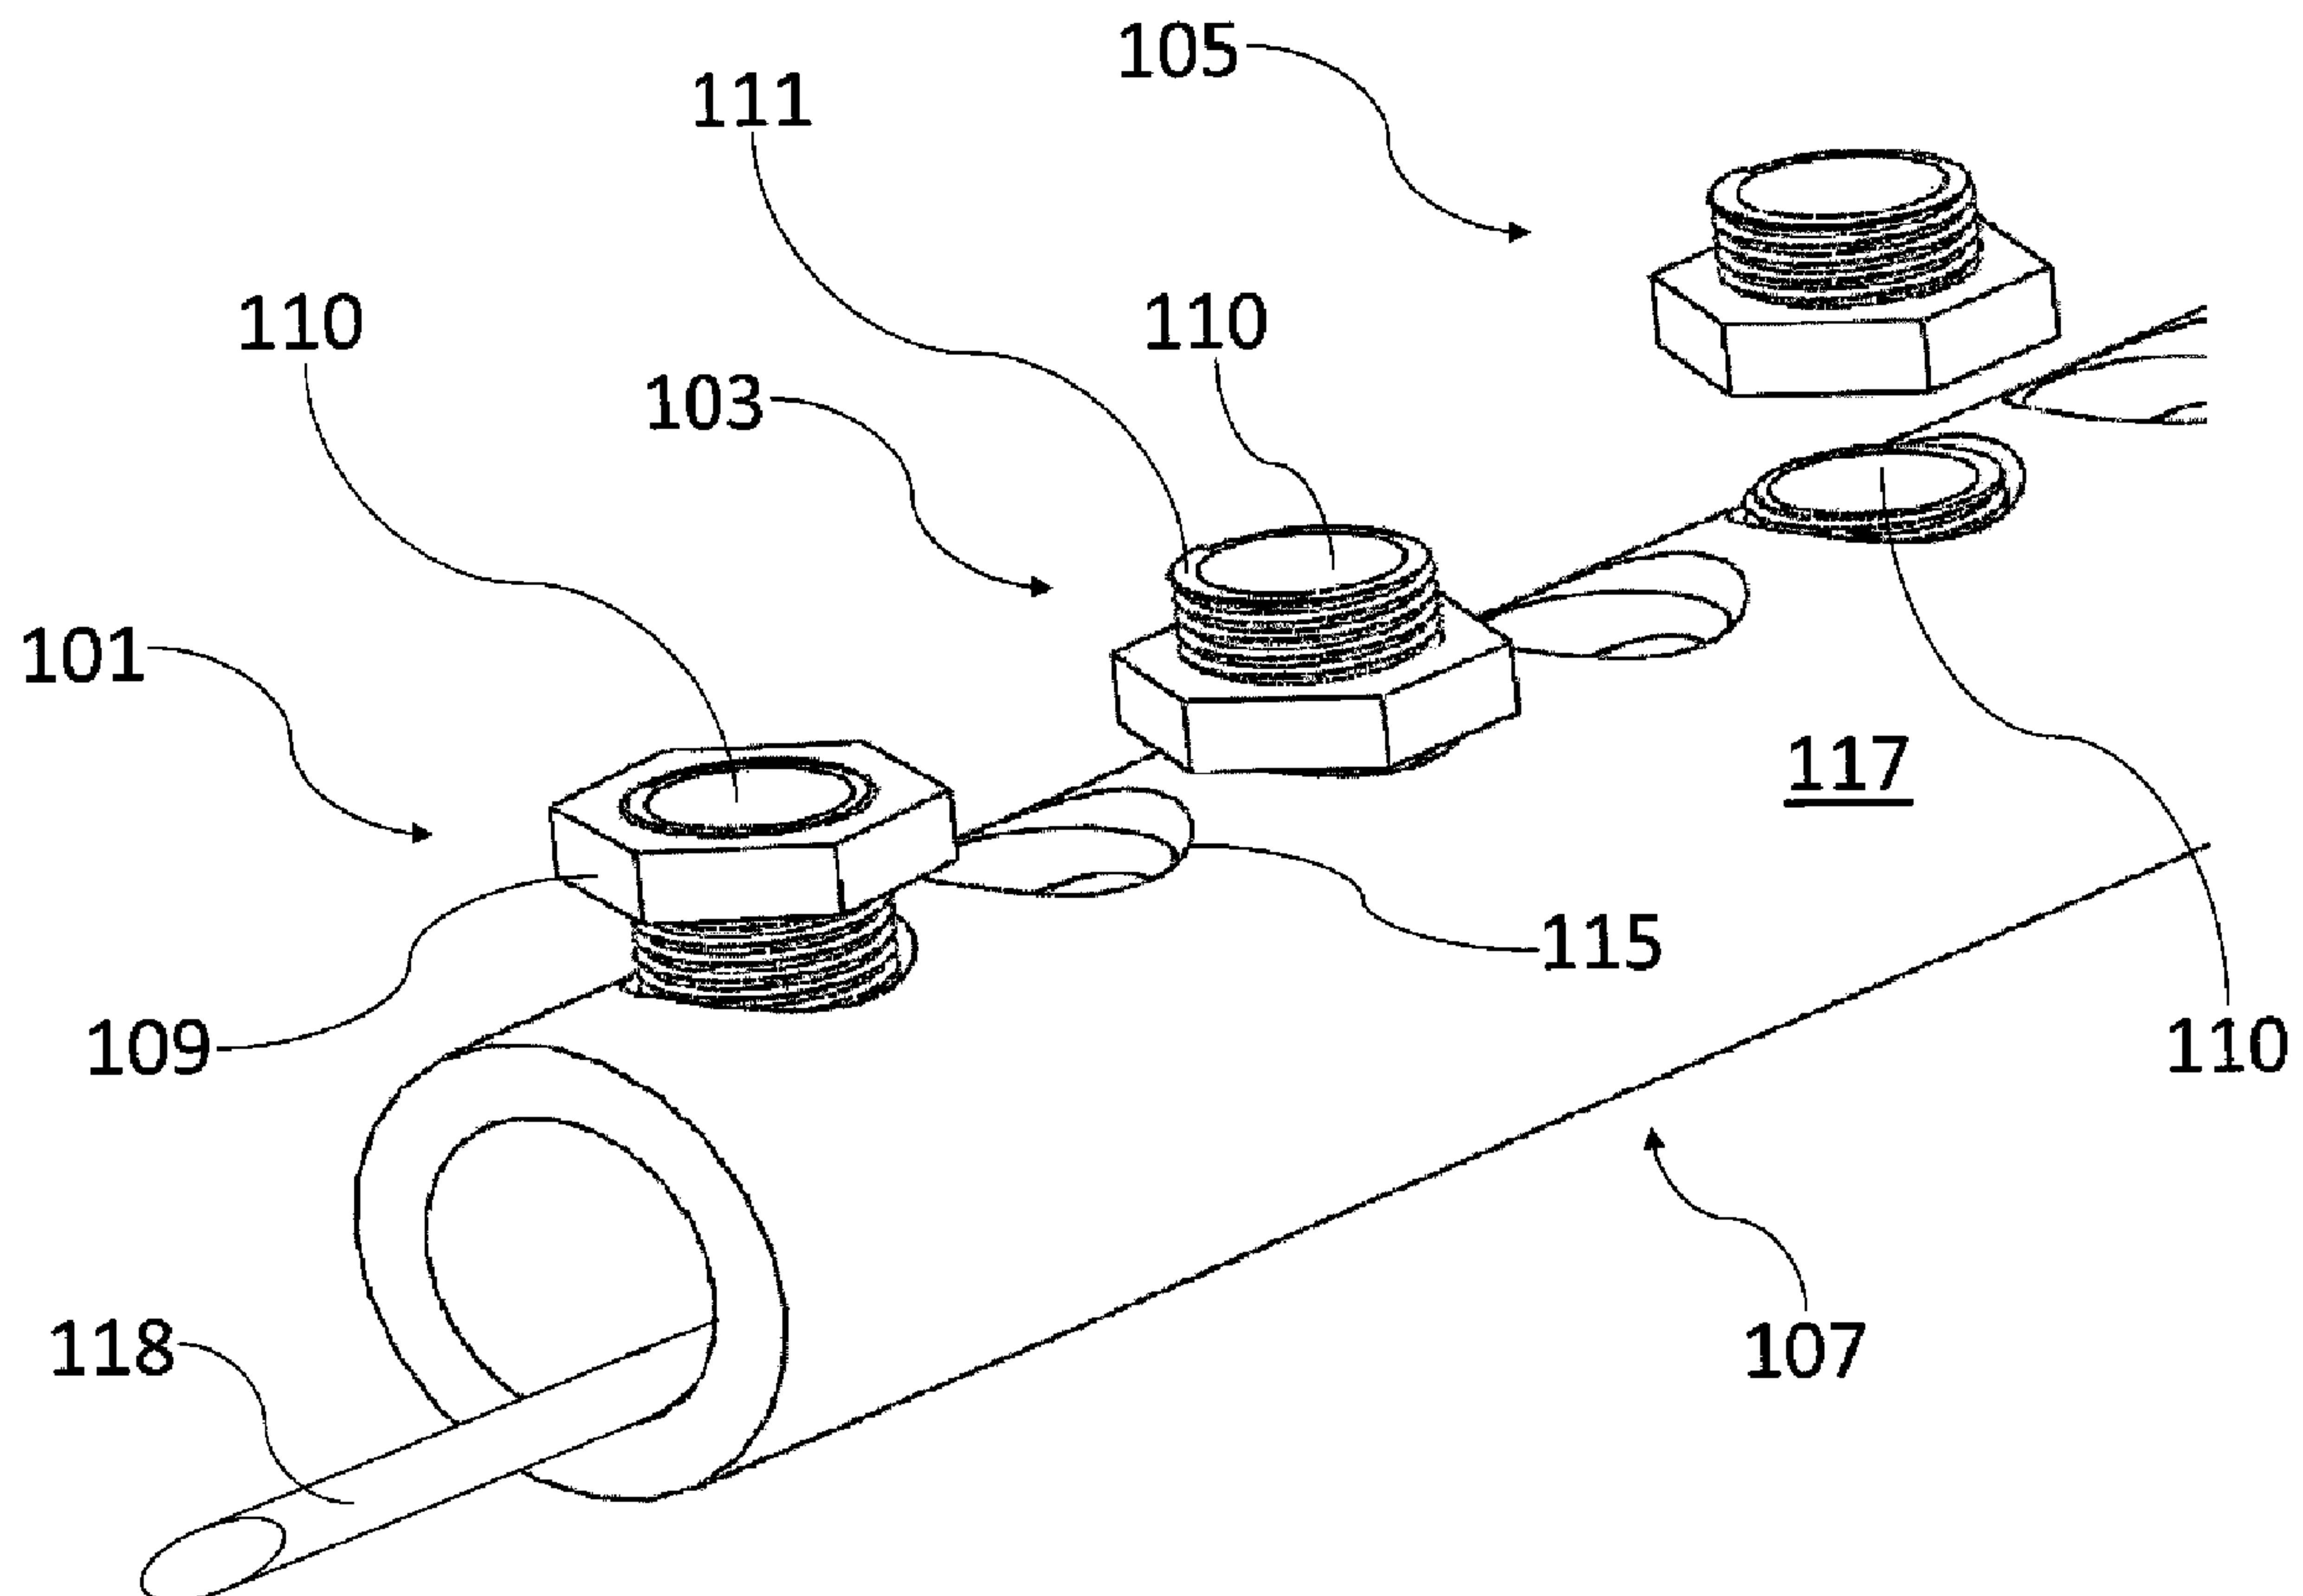

(57) **Abrégé/Abstract:**

A torque controlling break screw is provided for securing a wire or cable within a connector. The break screw comprises a nut, a thin-walled, hollow screw and a torque limiting feature between the nut and the screw.



ABSTRACT

A torque controlling break screw is provided for securing a wire or cable within a connector. The break screw comprises a nut, a thin-walled, hollow screw and a torque limiting feature between the nut and the screw.

## TORQUE CONTROLLING BREAK SCREW

### CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority under 35 U.S.C. § 119, based on U.S. Provisional Patent  
5 Application No. 61/874,462, filed on September 6, 2013.

### FIELD OF THE INVENTION

In general, the present invention relates to a torque controlling break screw which has a  
torque limiting feature between a nut and a screw which must be overcome by force to break  
the nut free from the screw. The screw body is also hollow such that an even greater force is  
10 required for the nut to shear off excess length of the screw body.

### BACKGROUND

In the connector industry, often times shear bolts and screws are used to serve the dual  
function of securing a wire in a connector and providing a screw that will break off at some  
position above the connector housing. There are two disadvantages to current designs of  
15 these shear bolts and screws. The first disadvantage is that they are expensive to manufacture  
or require special tools to use. The second disadvantage is that the screw or bolt length is  
fixed, which prevents these types of screws or bolts from being used in medium voltage  
connectors which require the screw to break at or below the surface of the connector. The  
two greatest functions needed of these types of bolts or screws are that they should allow  
20 only the required force applied to the conductor within the connector and that the excess  
screw length should be broken off at or below the surface of the connector body.  
Unfortunately, current designs do not meet both of these needs without the use of multiple  
break points on the screw or bolt body or without the use of special tools to achieve these  
functions.

### 25 SUMMARY OF THE INVENTION

The present invention provides a torque controlling break screw for securing a wire or cable  
conductor within a connector. There is a torque limiting feature between a thin-walled,

hollow screw and a nut, and the nut is secured at a distal end of the screw and is used to tighten the screw into the connector. Once the strength of the torque limiting feature that secures the nut onto the distal end of the screw is exceeded, the nut breaks loose from the distal end of the screw so that it can travel down the shaft of the screw until the nut contacts  
5 the surface of the connector. A higher force is then applied to the nut which allows the excess shaft length of the thin-walled, hollow screw to be sheared off so that the screw is flush with the surface of the connector. An optional removal feature is also provided so that the screw can be backed out of the connector, if necessary, to allow removal of the wire or cable from the connector.

## 10 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front perspective view showing the torque controlling break screw of the present invention.

FIG. 2 is a front perspective view showing the various stages of using the torque controlling break screw of the present invention.

15 FIG. 3 is a cross-sectional view of a screw body with a recessed portion of the torque controlling break screw of the present invention.

FIG. 4 is a plan view of a chemical compound epoxy torque limiting feature of the torque controlling break screw of the present invention.

20 FIG. 5 is a plan view of a shear pin torque limiting feature of the torque controlling break screw of the present invention.

FIG. 6 is a side perspective cross-sectional view of a shear pin torque limiting feature of the torque controlling break screw of the present invention.

FIG. 7 is a side perspective cross-sectional view of a thread insert torque limiting feature of the torque controlling break screw of the present invention.

25 FIG. 8 is a cross-sectional elevation view of a thread lock torque limiting feature of the torque controlling break screw of the present invention.

FIG. 9 is a cross-sectional elevation view of the torque controlling break screw of the present invention comprised of spiral grooves on the inside of the hollow screw body.

FIG. 10 is a cross-sectional elevation view of the torque controlling break screw of the present invention comprised of discrete grooves on the inside of the hollow screw body.

## 5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

The above and other features, aspects and advantages of the present invention will now be discussed in the following detailed description of preferred embodiments and appended claims, which are to be considered in conjunction with the accompanying drawings in which identical reference characters designate like elements throughout the views.

10 Shown in FIG. 1 is a torque controlling break screw 101 of the present invention. The torque controlling break screw 101 is comprised of a combination of a threaded, thin-walled, hollow screw body 110 and a nut 109 that is attached to a distal end of the screw body 110. The nut 109 is held in place on the screw body 110 by a torque limiting feature, to be described later, until a certain force is applied to the nut 109 which exceeds the strength of the torque  
15 limiting feature.

Shown in FIG. 2 is a sequence of steps to follow to use the torque controlling break screw 101 to secure a conductor 118, such as a wire or cable, within a connector 107. FIG. 2 shows the intact torque controlling break screw 101 already screwed down into position within the connector 107 on the leftmost side of the figure. In this position, the torque  
20 controlling break screw 101 is in contact with the conductor 118 so that the conductor 118 is secured against the connector 107. Again in FIG. 2, shown in the middle of the figure, a force has been applied to the nut 109 which exceeds the strength of the torque limiting feature that held the nut 109 in place at the distal end of the screw body 110 and enabled the torque controlling break screw 101 to be screwed down into position, as shown on the left side of  
25 the figure, such that the nut 109 breaks loose from the distal end of the screw body 110 allowing it to travel down the length of the screw body 110 until it contacts the surface 117 of the connector 107. The target force that must be applied to the nut to exceed the strength of the torque limiting feature should be approximately 250 in-lbs at a minimum.

There are four options for the torque limiting feature between the nut 109 and the screw body 110. The first and preferred option, shown in FIG. 4 is a chemical thread locking compound 119, such as an epoxy, which bonds the nut 109 to the thin-walled, hollow screw body 110. Any force that is applied to the nut 109 which is greater than the bonding strength of the chemical compound 119 that is between the nut 109 and the screw body 110 will cause the nut 109 to be loosened from the screw body 110 and allow the nut 109 to travel along the screw threads 111 of the screw body 110 until the nut 109 contacts the surface 117 of the connector 107, as shown in the middle of FIG. 2. A second option, shown in FIG. 5 and FIG. 6, is a shear pin 121 that is located between the nut 109 and the screw body 110. The shear pin 121 may be made of a plastic or metal material. Similar to the chemical compound 119 described above, any force that is applied to the nut 109 which is greater than the shear strength of the shear pin 121 that is between the nut 109 and the screw body 110 will cause the shear pin 121 to be sheared at the location where it connects the nut 109 to the screw body 110, thereby causing nut 109 to break free from its position at the distal end of the screw body 110 and allowing the nut 109 to travel along the screw threads 111 of the screw body 110 until the nut 109 contacts the surface 117 of the connector 107, as shown in the middle of FIG. 2. A third option of the torque limiting feature, shown in FIG. 7, is a thread insert 123 that is located within a slot in the screw threads 111 immediately below the nut 109 and which runs perpendicular to the threads 111. The thread insert 123 may be made of a plastic material that the nut 109 can break through when enough force is applied to the nut 109 to exceed the strength of the thread insert 123. Like the chemical compound 119 or the shear pin 121, once the strength of the thread insert 123 is exceeded, it will cause the nut 109 to break free from its position at the distal end of the screw body 110 and allow the nut 109 to travel along the screw threads 111 of the screw body 110 until the nut 109 contacts the surface 117 of the connector 107. Finally, a fourth option of the torque limiting feature is a thread lock 124, which is shown in FIG. 8. Similar to the thread insert 123, the thread lock 124 may be made of a plastic material. The thread lock 124 is located in the grooves 112 of the threads 111 which are immediately adjacent to the nut 109 at the distal end of the screw body 110. As with the other options of the torque limiting feature that have been discussed, once the strength of the thread lock 124 is exceeded, it will cause the nut 109 to break free from its position at the distal end of the screw body 110 and allow the nut 109 to

travel along the screw threads 111 of the screw body 110 until the nut 109 contacts the surface 117 of the connector 107.

Shown in FIG. 2, on the rightmost side of the figure, another yet greater force is applied to the nut 109 after it has broken free from its position at the distal end of the screw body 110.

5 After the nut 109 is fully contacting the surface 117 of the connector 107 after having traveled down the length of the screw body 110, a force is applied to the nut 109 which is greater than the shear strength of the hollow body screw 110, causing the excess length 105 of the screw body 110 protruding from the surface 117 of the connector 107 to be broken off so that the remainder of the screw 110 is flush with the connector 107. This leaves a clean  
10 installation of the screw 110 securing the conductor 118 within the connector 107, thereby making it possible for the torque controlling break screw 101 to be used in installations with medium voltage connectors that require the screw to break at or below the surface of the connector. The screw body 110 may also be further comprised of spiral grooves, shown in FIG. 9, or discrete grooves, shown in FIG. 10, which line the inside of the hollow screw body  
15 and allow for a cleaner break at the top of the remaining screw body when the excess screw body is sheared off by the nut when compared to the thin-walled, hollow screw body without either spiral grooves or discrete grooves. The target force that must be applied to the nut to exceed the shear strength of the thin-walled, hollow body screw should be approximately 350 in-lbs at a minimum.

20 Shown in FIG. 3 is a removal feature of the threaded, thin-walled, hollow screw body 110. FIG. 3 shows an interior bottom surface 125 of the screw body 110 that contains a recessed portion 127 shaped to fit a hex key or Allen key. This recessed portion 127 on the bottom surface 125 of the interior of the screw body 110 allows the remaining screw body to be backed out from the connector 107 after installation, if necessary, through the use of a hex  
25 key or Allen key. This removal feature allows the conductor 118 to be removed from the connector 107 at some point after installation if this is ever required, thereby preventing the torque controlling break screw from being permanently installed in a connector.

Although the invention has been described in detail above, it is expressly understood that it will be apparent to persons skilled in the relevant art that the invention may be modified

without departing from the spirit of the invention. Various changes of form, design, or arrangement may be made to the invention without departing from the spirit and scope of the invention. Therefore, the above mentioned description is to be considered exemplary, rather than limiting, and the true scope of the invention is that defined in the following claims.

5

WHAT IS CLAIMED IS:

1. A torque controlling break screw for securing a wire or cable within a connector, the torque controlling break screw comprising:

5 a threaded, thin-walled, hollow screw body having inner and outer surfaces, wherein the screw body comprises screw threads on the outer surface and spiral or discrete grooves lining on the inner surface;

a nut secured at a distal end of the screw body; and

a torque limiting feature which keeps the nut secured at the distal end of the screw body,

10 wherein the screw and nut combination are screwed into an aperture within the connector comprising a connector body until the screw contacts a conductor housed within the connector body,

wherein when a force is applied to the nut which exceeds the strength of the torque limiting feature, the force causes the nut to break loose from the distal end of the screw by  
15 overcoming the torque limiting feature so that the nut can travel down the length of the screw body until the nut contacts the connector,

wherein when an even greater force is applied to the nut when in contact with the connector body, the even greater force exceeds the shear strength of the screw body and causes the excess length of the screw body to be sheared off such that the remaining screw is flush with  
20 the surface of the connector, and

wherein the spiral or discrete grooves provide a clean break of the screw body when the screw body is sheared off by the nut.

2. The torque controlling break screw for securing a wire or cable within a connector of Claim 1, wherein the torque limiting feature which keeps the nut secured at the distal end of  
25 the screw body is comprised of a chemical thread locking epoxy compound located between the nut and the distal end of the screw body.

3. The torque controlling break screw for securing a wire or cable within a connector of Claim 1, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is a shear pin that is located between the nut and the screw body.

4. The torque controlling break screw for securing a wire or cable within a connector of  
5 Claim 1, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is a thread insert that is comprised of material located within a slot in the screw threads which runs perpendicular to the screw threads and is located immediately below the nut.

5. The torque controlling break screw for securing a wire or cable within a connector of  
10 Claim 1, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is a thread lock that is comprised of material located in the grooves of the threads which are immediately adjacent to the nut at the distal end of the screw body.

6. The torque controlling break screw for securing a wire or cable within a connector of  
15 Claim 1, further comprising an interior bottom surface of the threaded, thin-walled screw body that contains a recessed portion shaped to fit a hex key or Allen key so that the remaining screw body which is flush with the surface of the connector can be backed out from the connector to be removed, if necessary.

7. The torque controlling break screw for securing a wire or cable within a connector of  
20 Claim 1, wherein the force that is required to break the nut loose from being secured at the distal end of the screw body and overcome the torque limiting feature must exceed 250 in-lbs.

8. The torque controlling break screw for securing a wire or cable within a connector of  
25 Claim 1, wherein the force applied to the nut that is required to shear the excess length of the screw body from the surface of the connector so that the remaining screw body is flush with the connector must exceed 350 in-lbs.

9. A torque controlling break screw for securing a wire or cable within a connector, the torque controlling break screw comprising:

5 a threaded, thin-walled, hollow screw body having inner and outer surfaces, wherein the screw body comprises screw threads on the outer surface and spiral or discrete grooves lining on the inner surface;

a nut secured at a distal end of the screw body; and

a torque limiting feature which keeps the nut secured at the distal end of the screw body which is comprised of a chemical thread locking epoxy compound located between the nut and the distal end of the screw body,

10 wherein the screw and nut combination are screwed into an aperture within the connector comprising a connector body until the screw contacts a conductor housed within the connector body,

15 wherein when a force is applied to the nut which exceeds the strength of the torque limiting feature, the force causes the nut to break loose from the distal end of the screw by overcoming the torque limiting feature so that the nut can travel down the length of the screw body until the nut contacts the connector,

20 wherein when an even greater force is applied to the nut when in contact with the connector body, the even greater force exceeds the shear strength of the screw body and causes the excess length of the screw body to be sheared off such that the remaining screw is flush with the surface of the connector, and

wherein the spiral or discrete grooves provide a clean break of the screw body when the screw body is sheared off by the nut.

10. The torque controlling break screw for securing a wire or cable within a connector of Claim 9, further comprising an interior bottom surface of the threaded, thin-walled screw body that contains a recessed portion shaped to fit a hex key or Allen key so that the remaining screw body which is flush with the surface of the connector can be backed out from the connector to be removed, if necessary.

25

11. The torque controlling break screw for securing a wire or cable within a connector of Claim 9, wherein the force that is required to break the nut loose from being secured at the distal end of the screw body and overcome the torque limiting feature must exceed 250 in-lbs.

5 12. The torque controlling break screw for securing a wire or cable within a connector of Claim 9, wherein the force applied to the nut that is required to shear the excess length of the screw body from the surface of the connector so that the remaining screw body is flush with the connector must exceed 350 in-lbs.

10 13. A torque controlling break screw for securing a wire or cable within a connector, the torque controlling break screw comprising:

a threaded, thin-walled, hollow screw body having inner and outer surfaces, wherein the screw body comprises screw threads on the outer surface and spiral or discrete grooves lining on the inner surface;

a nut secured at a distal end of the screw body; and

15 a torque limiting feature which keeps the nut secured at the distal end of the screw body,

wherein the screw and nut combination are screwed into an aperture within the connector comprising a connector body until the screw contacts a conductor housed within the connector body;

20 wherein when a force greater than 250 in-lbs is applied to the nut, which exceeds the strength of the torque limiting feature, the force greater than 250 in-lbs causes the nut to break loose from the distal end of the screw by overcoming the torque limiting feature so that the nut can travel down the length of the screw body until the nut contacts the connector,

25 wherein when another force greater than 350 in-lbs is applied to the nut when in contact with the connector body, the force greater than 350 in-lbs exceeds the shear strength of the screw body and causes the excess length of the screw body to be sheared off such that the remaining screw is flush with the surface of the connector;

wherein the threaded, thin-walled screw body further comprises an interior bottom surface that contains a recessed portion shaped to fit a hex key or Allen key so that the remaining screw body which is flush with the surface of the connector can be backed out from the connector to be removed, if necessary, and

5 wherein the spiral or discrete grooves provide a clean break of the screw body when the screw body is sheared off by the nut.

14. The torque controlling break screw for securing a wire or cable within a connector of Claim 13, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is comprised of a chemical thread locking epoxy compound located between  
10 the nut and the distal end of the screw body.

15. The torque controlling break screw for securing a wire or cable within a connector of Claim 13, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is a shear pin that is located between the nut and the screw body.

16. The torque controlling break screw for securing a wire or cable within a connector of  
15 Claim 13, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is a thread insert that is comprised of material located within a slot in the screw threads which runs perpendicular to the screw threads and is located immediately below the nut.

17. The torque controlling break screw for securing a wire or cable within a connector of  
20 Claim 13, wherein the torque limiting feature which keeps the nut secured at the distal end of the screw body is a thread lock that is comprised of material located in the grooves of the threads which are immediately adjacent to the nut at the distal end of the screw body.

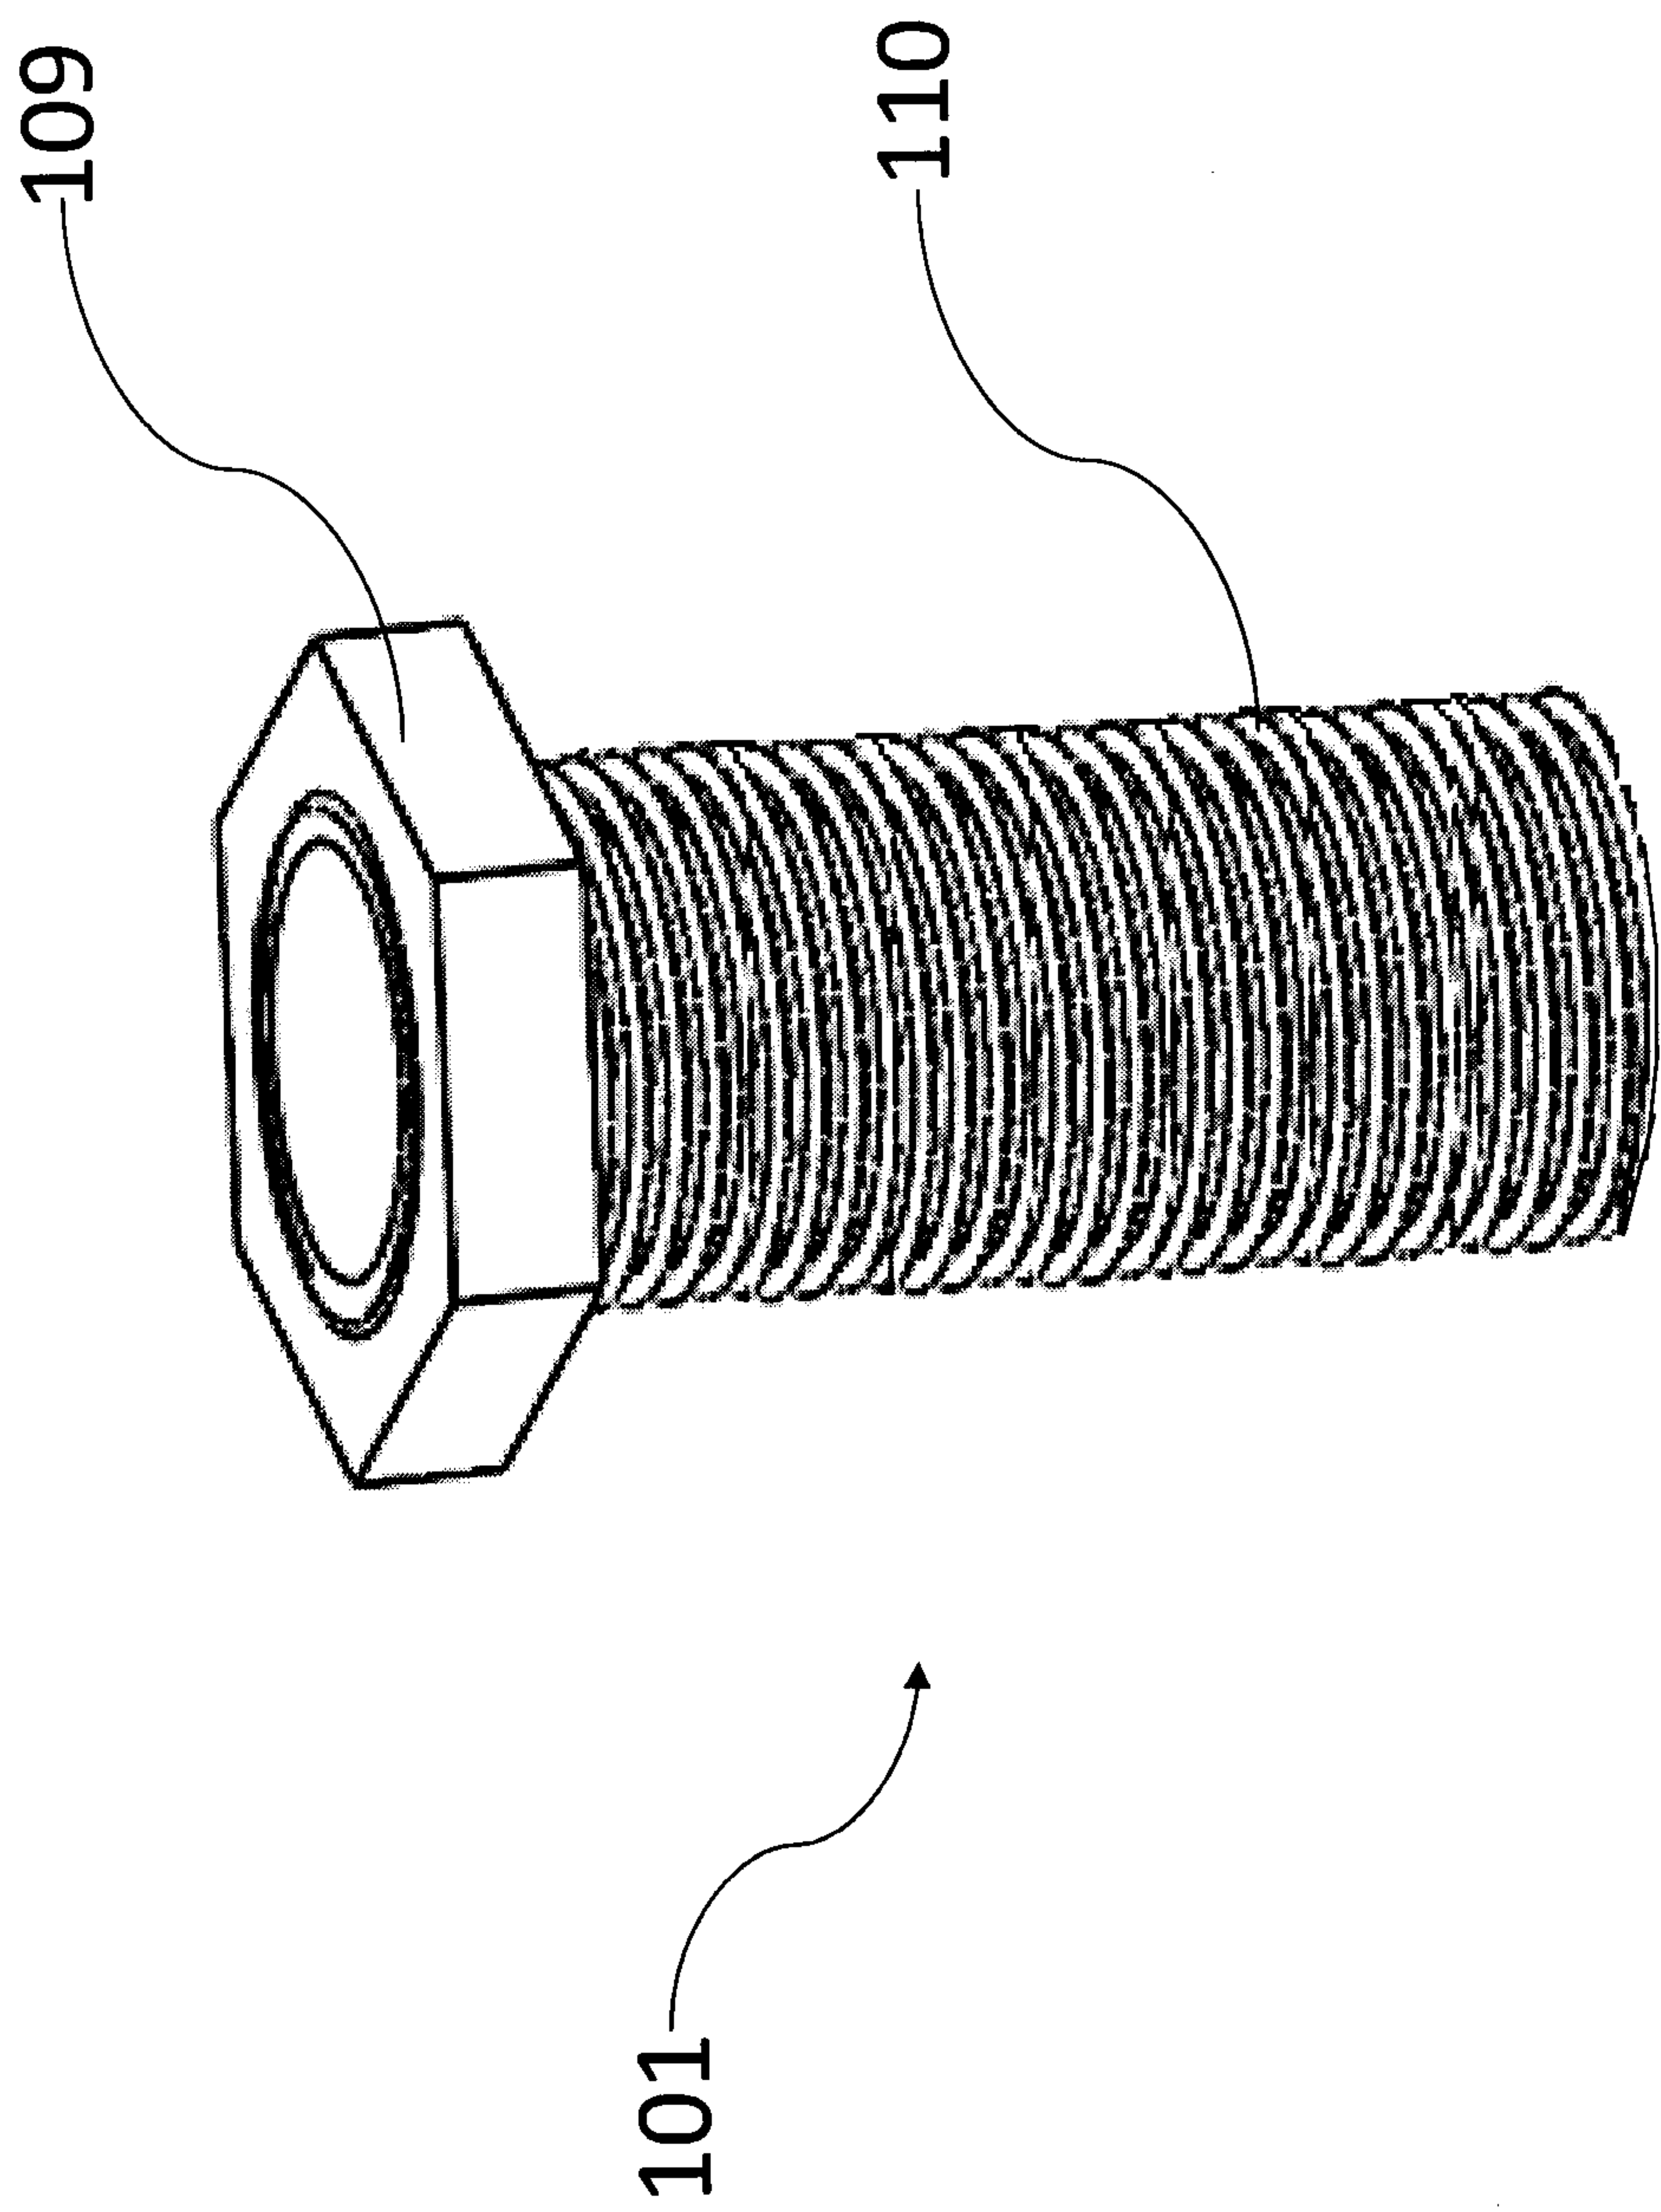


FIG. 1

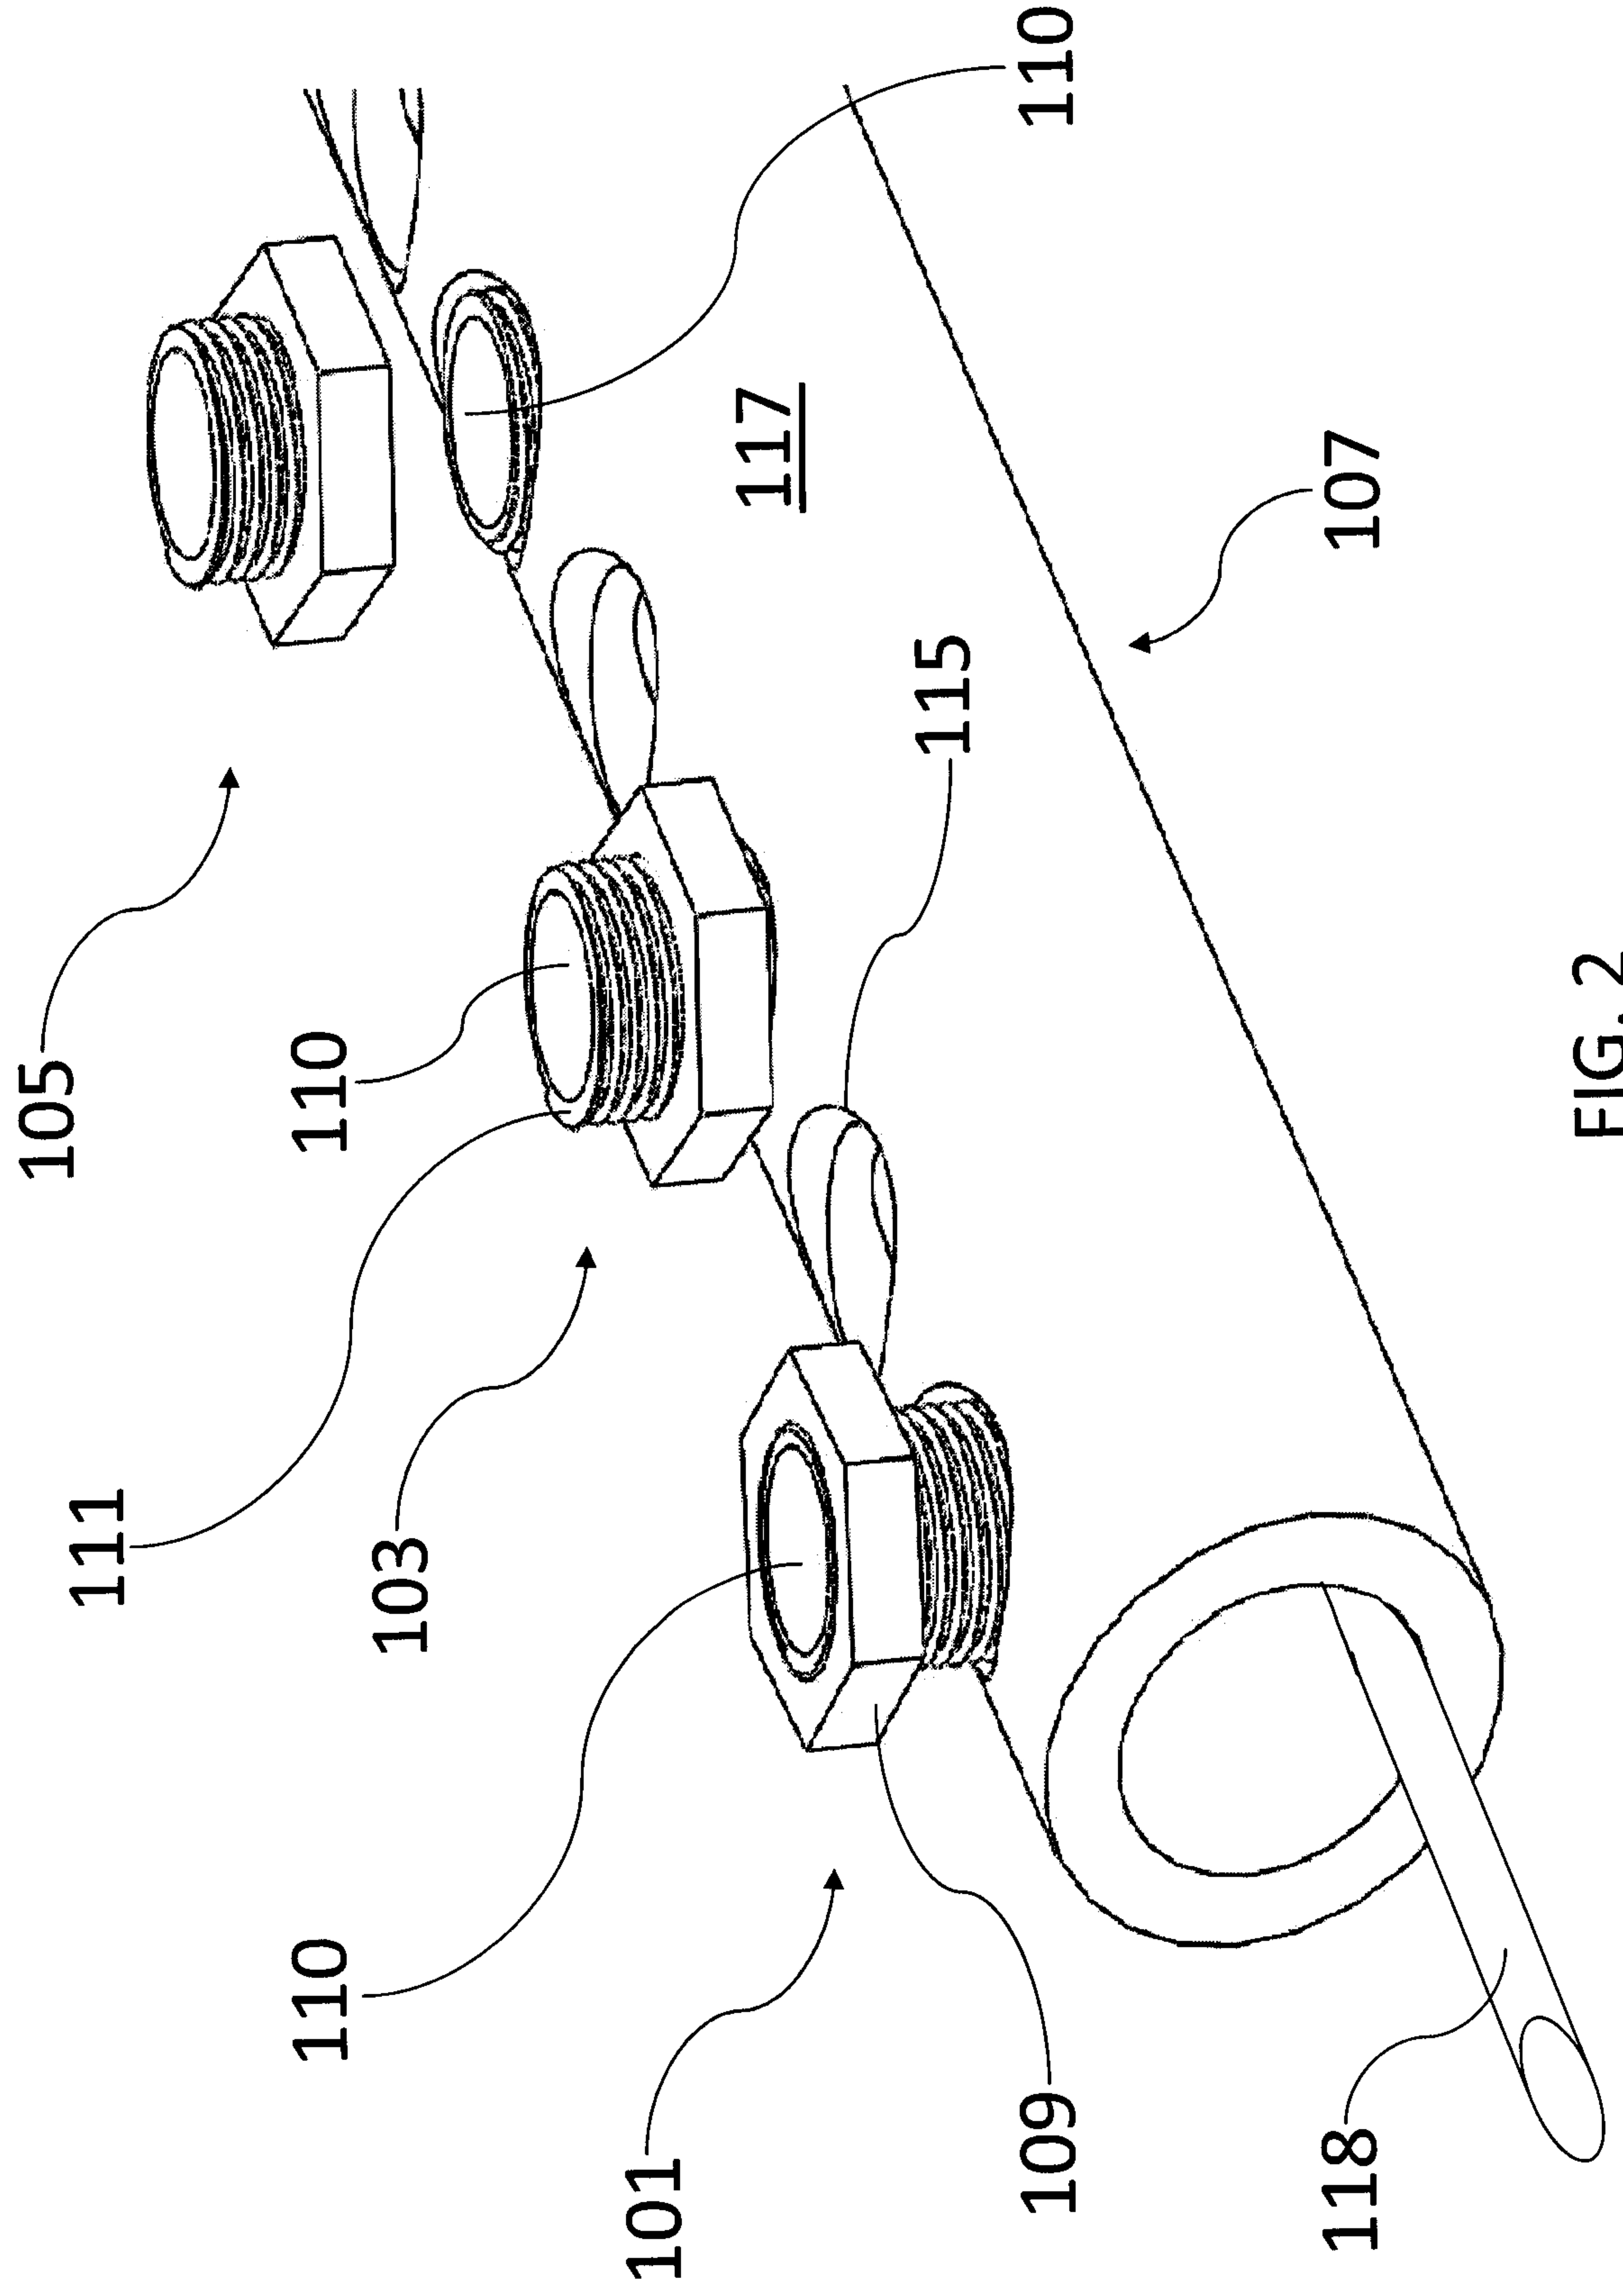


FIG. 2

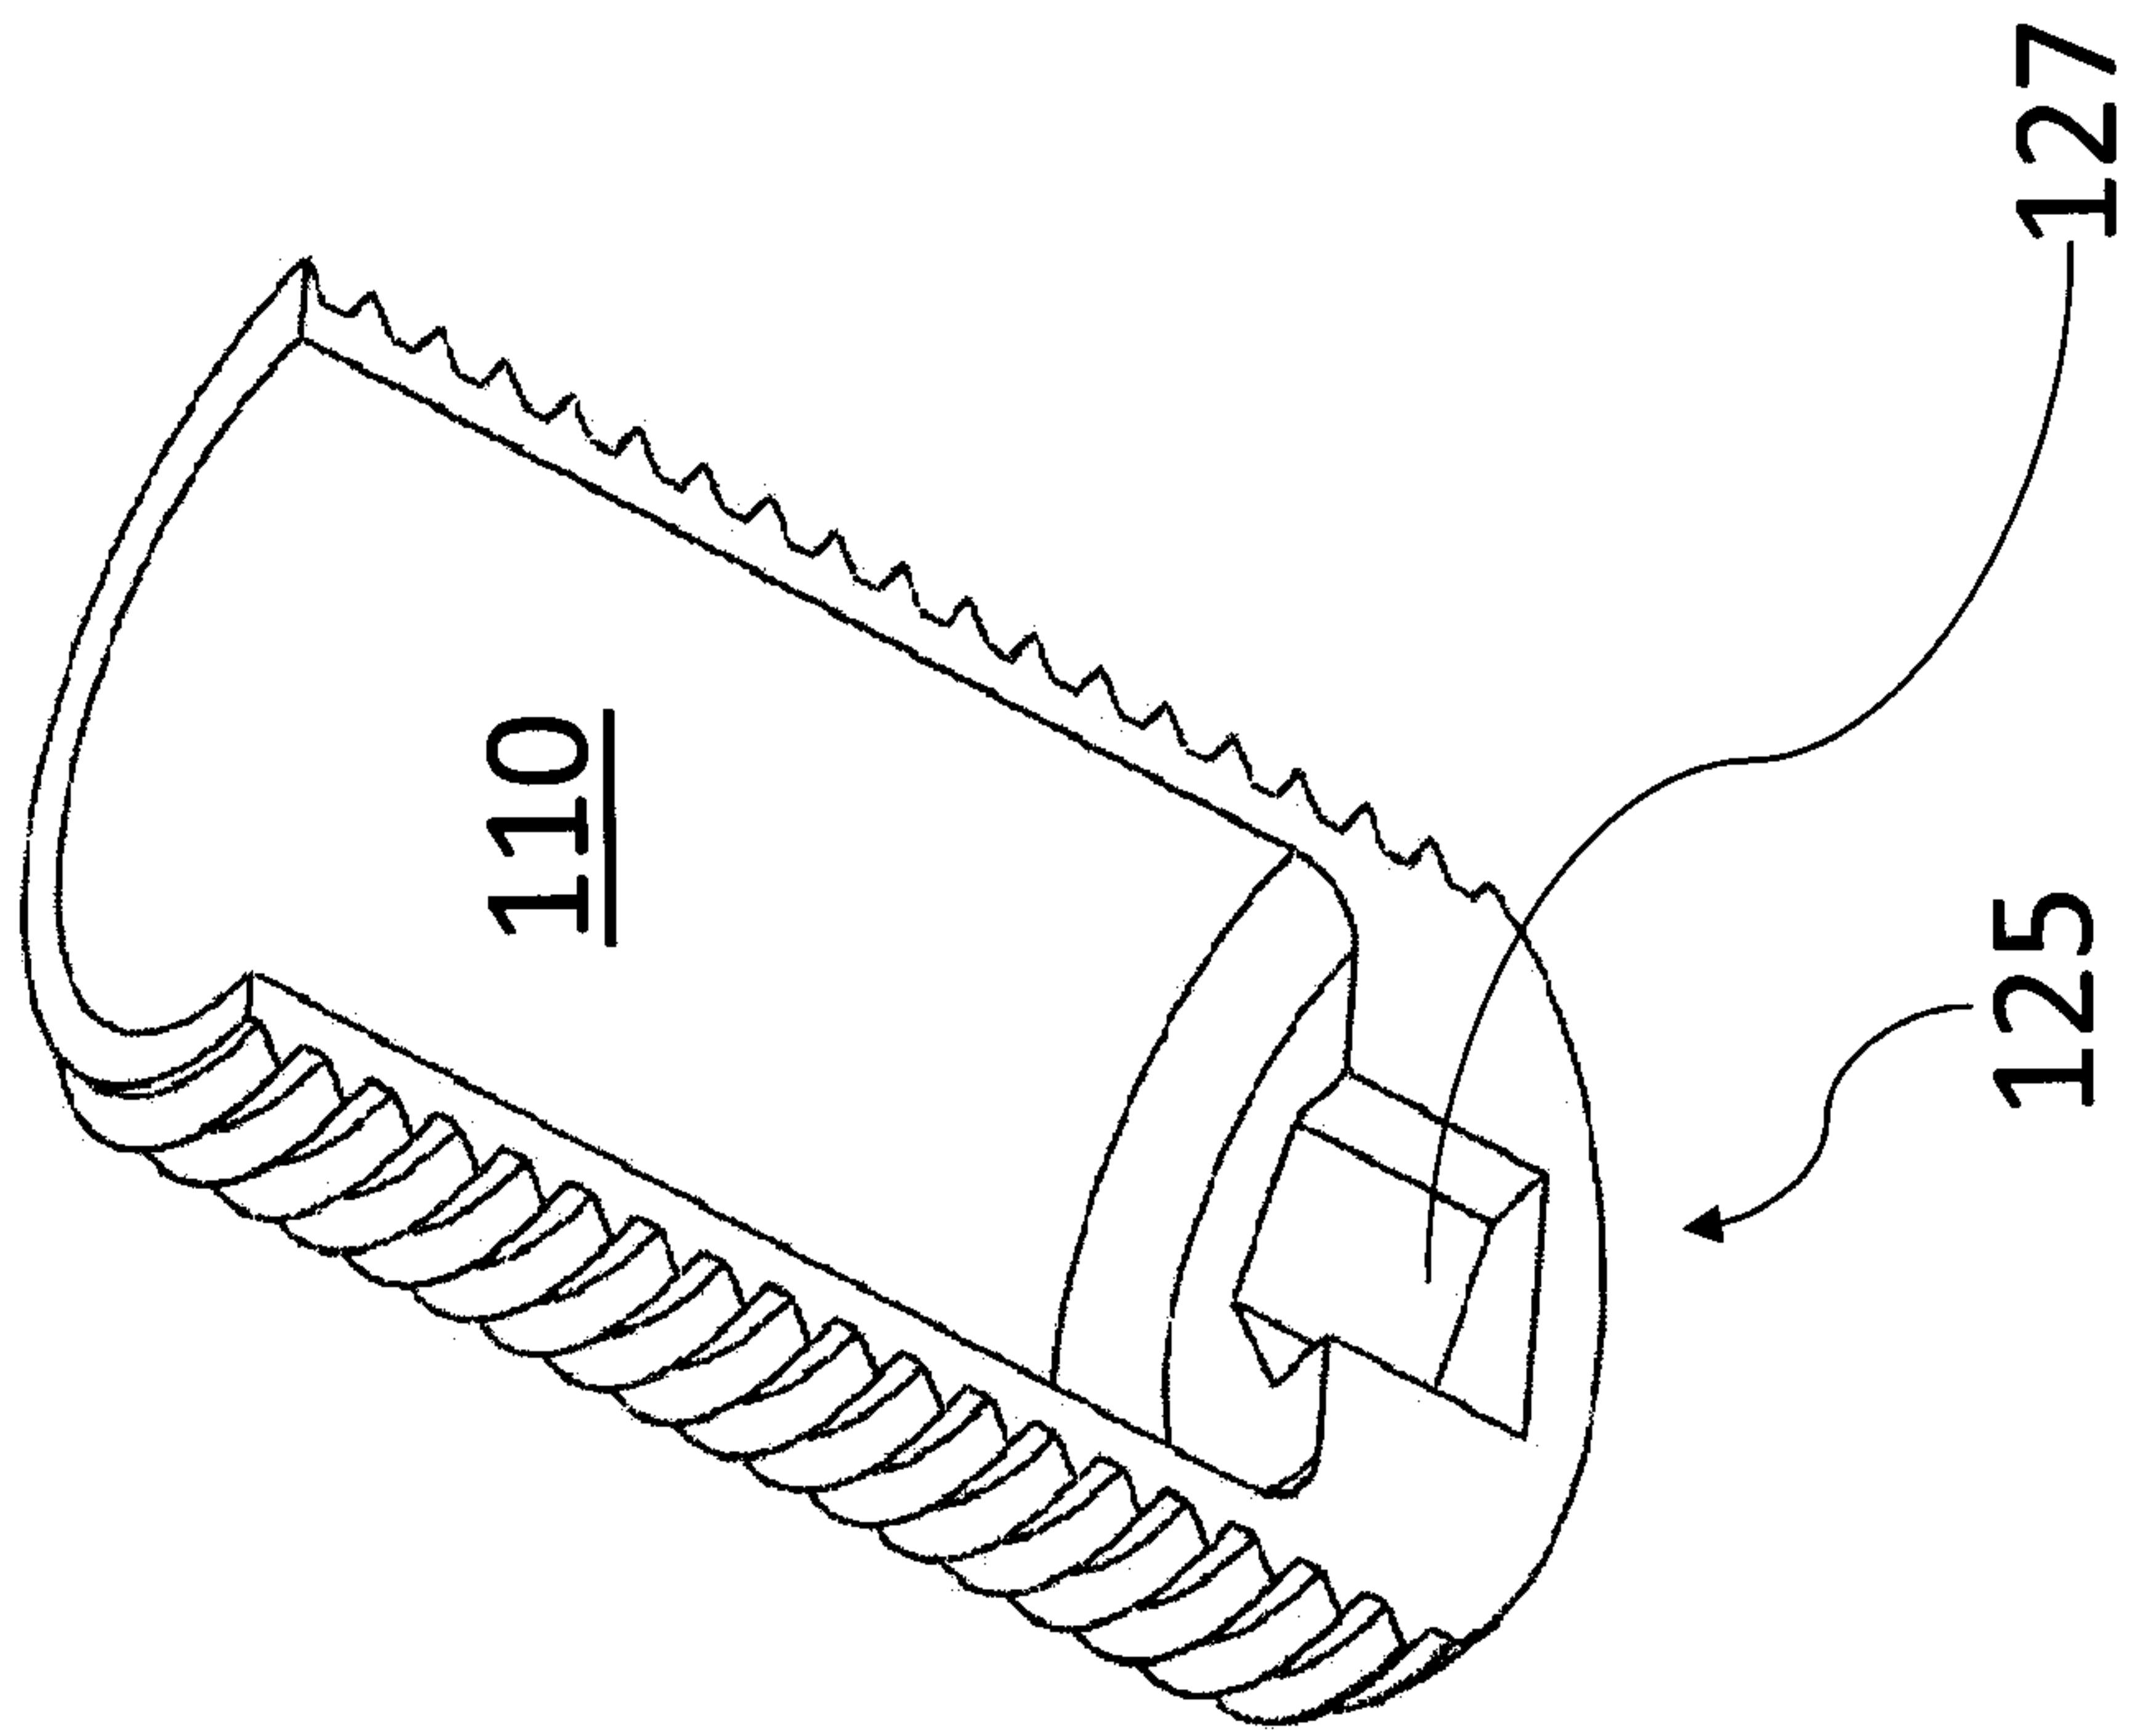


FIG. 3

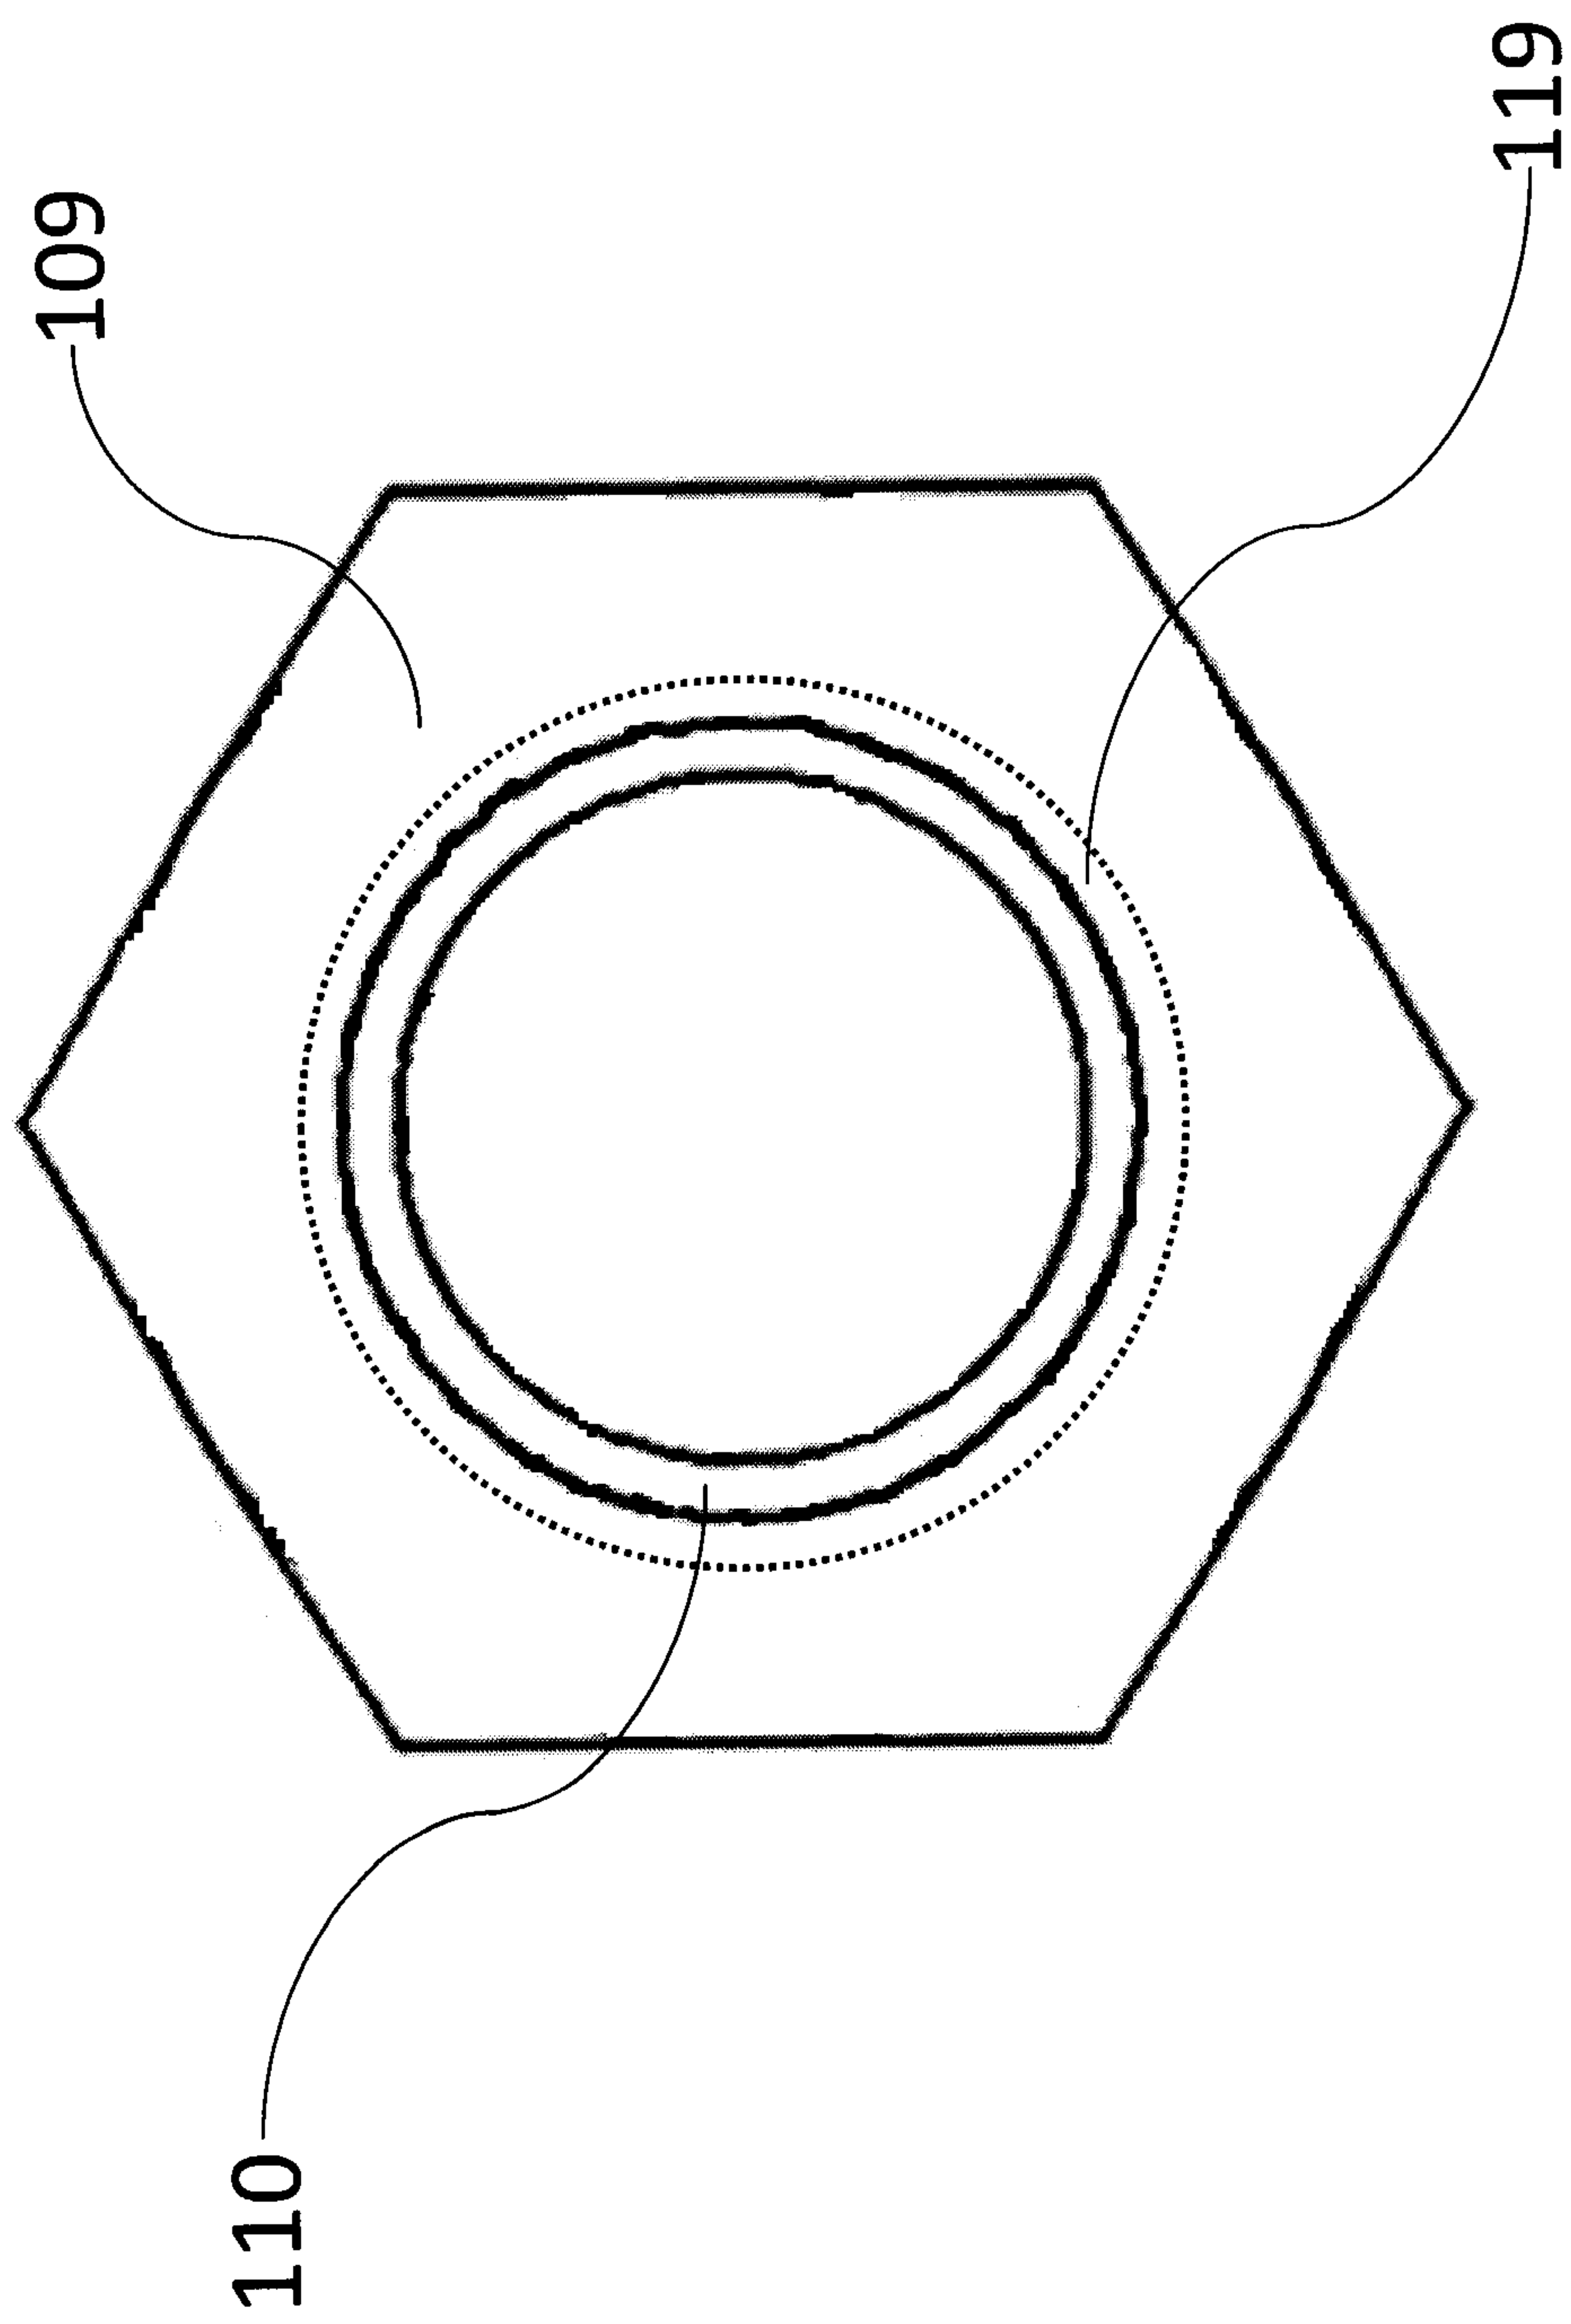


FIG. 4

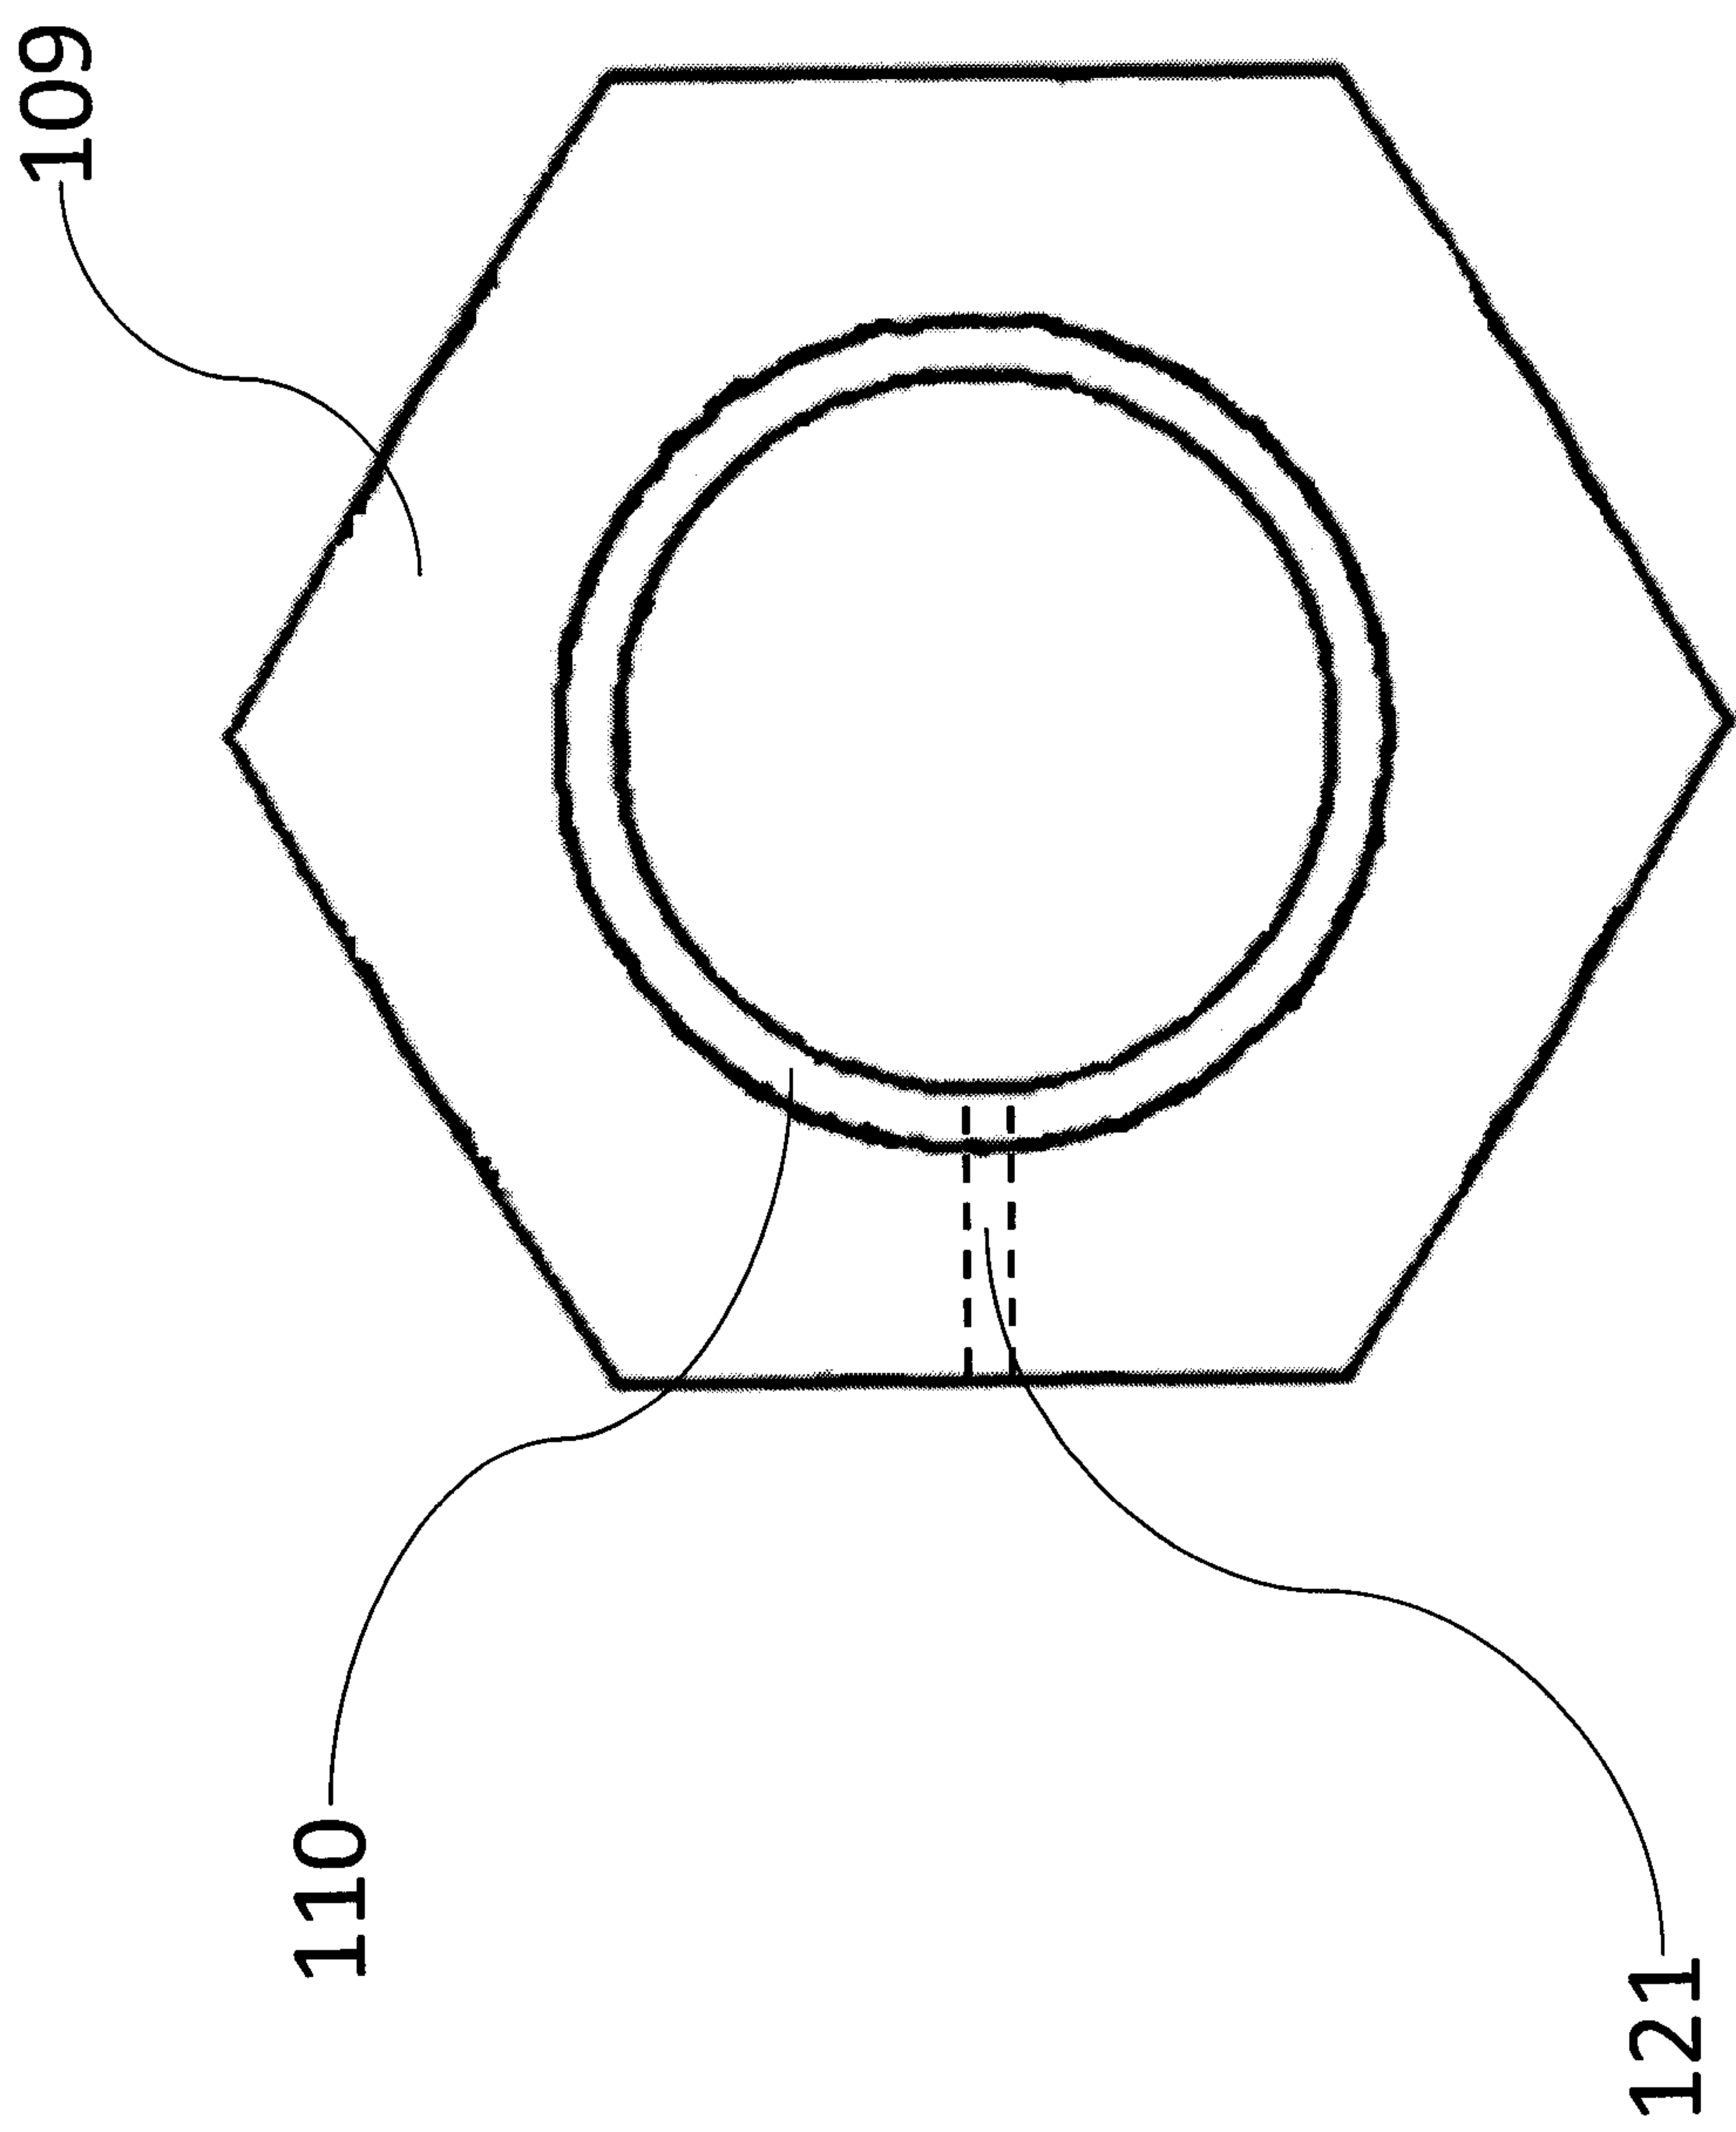


FIG. 5

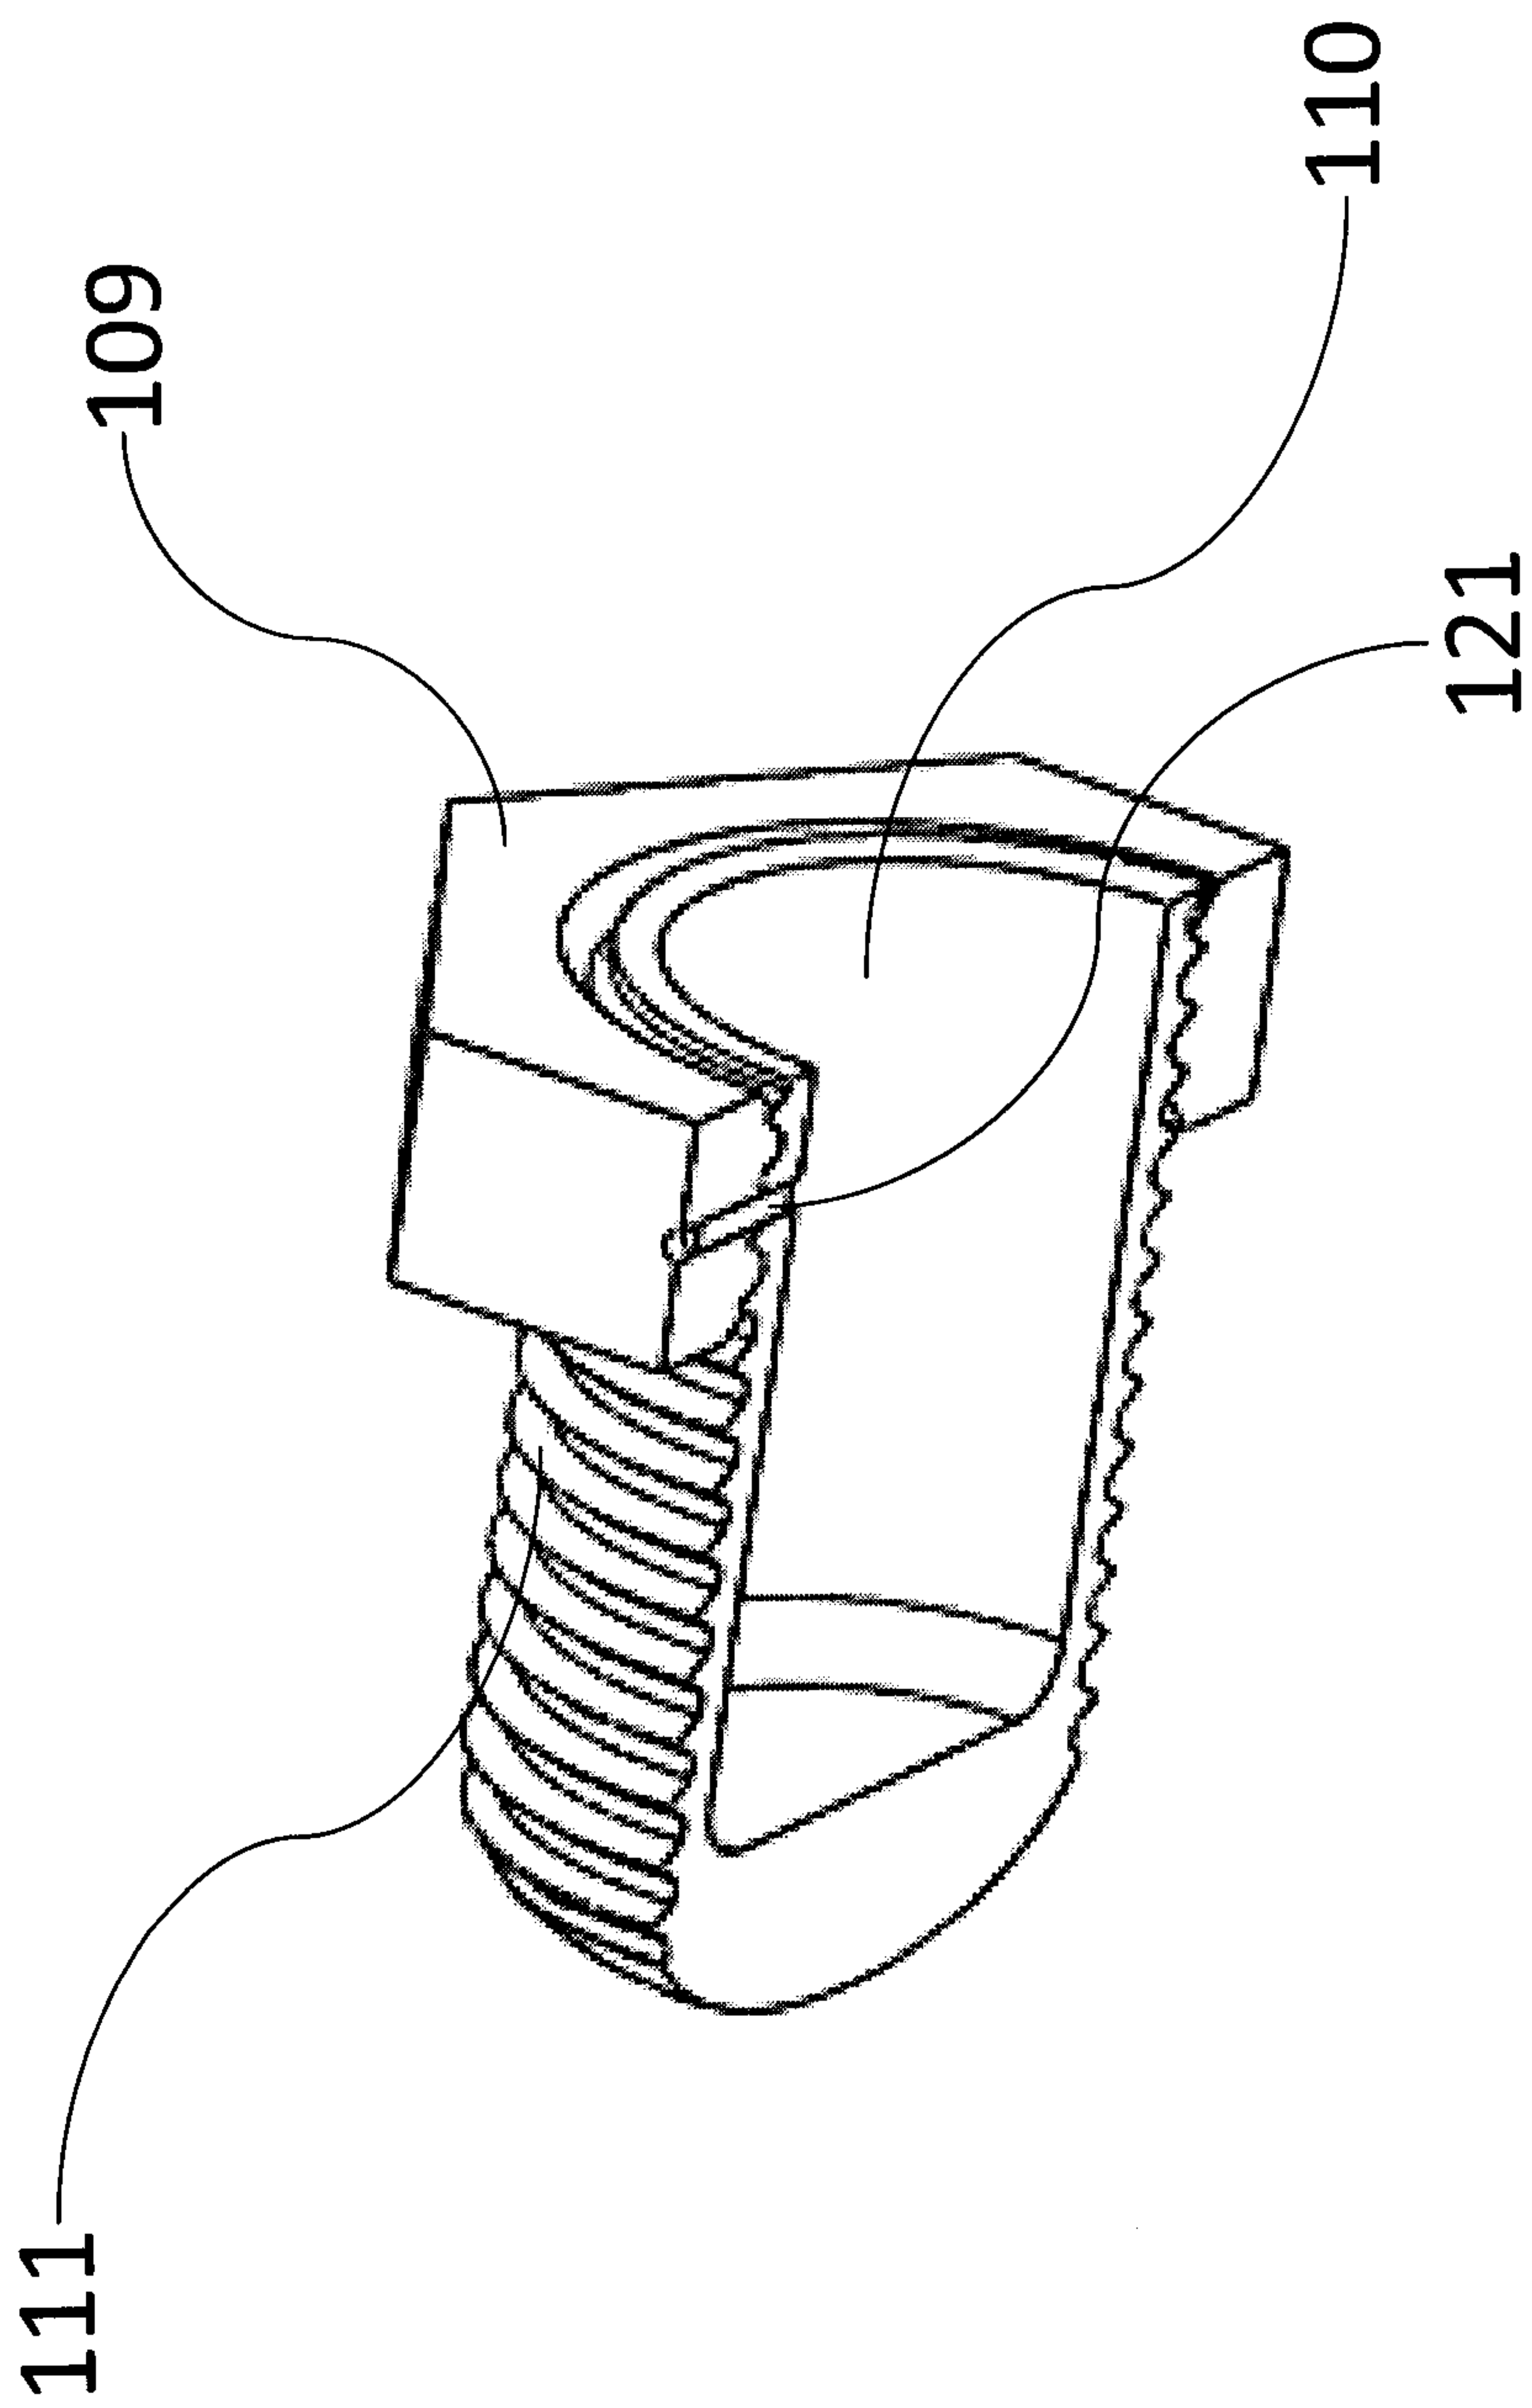


FIG. 6

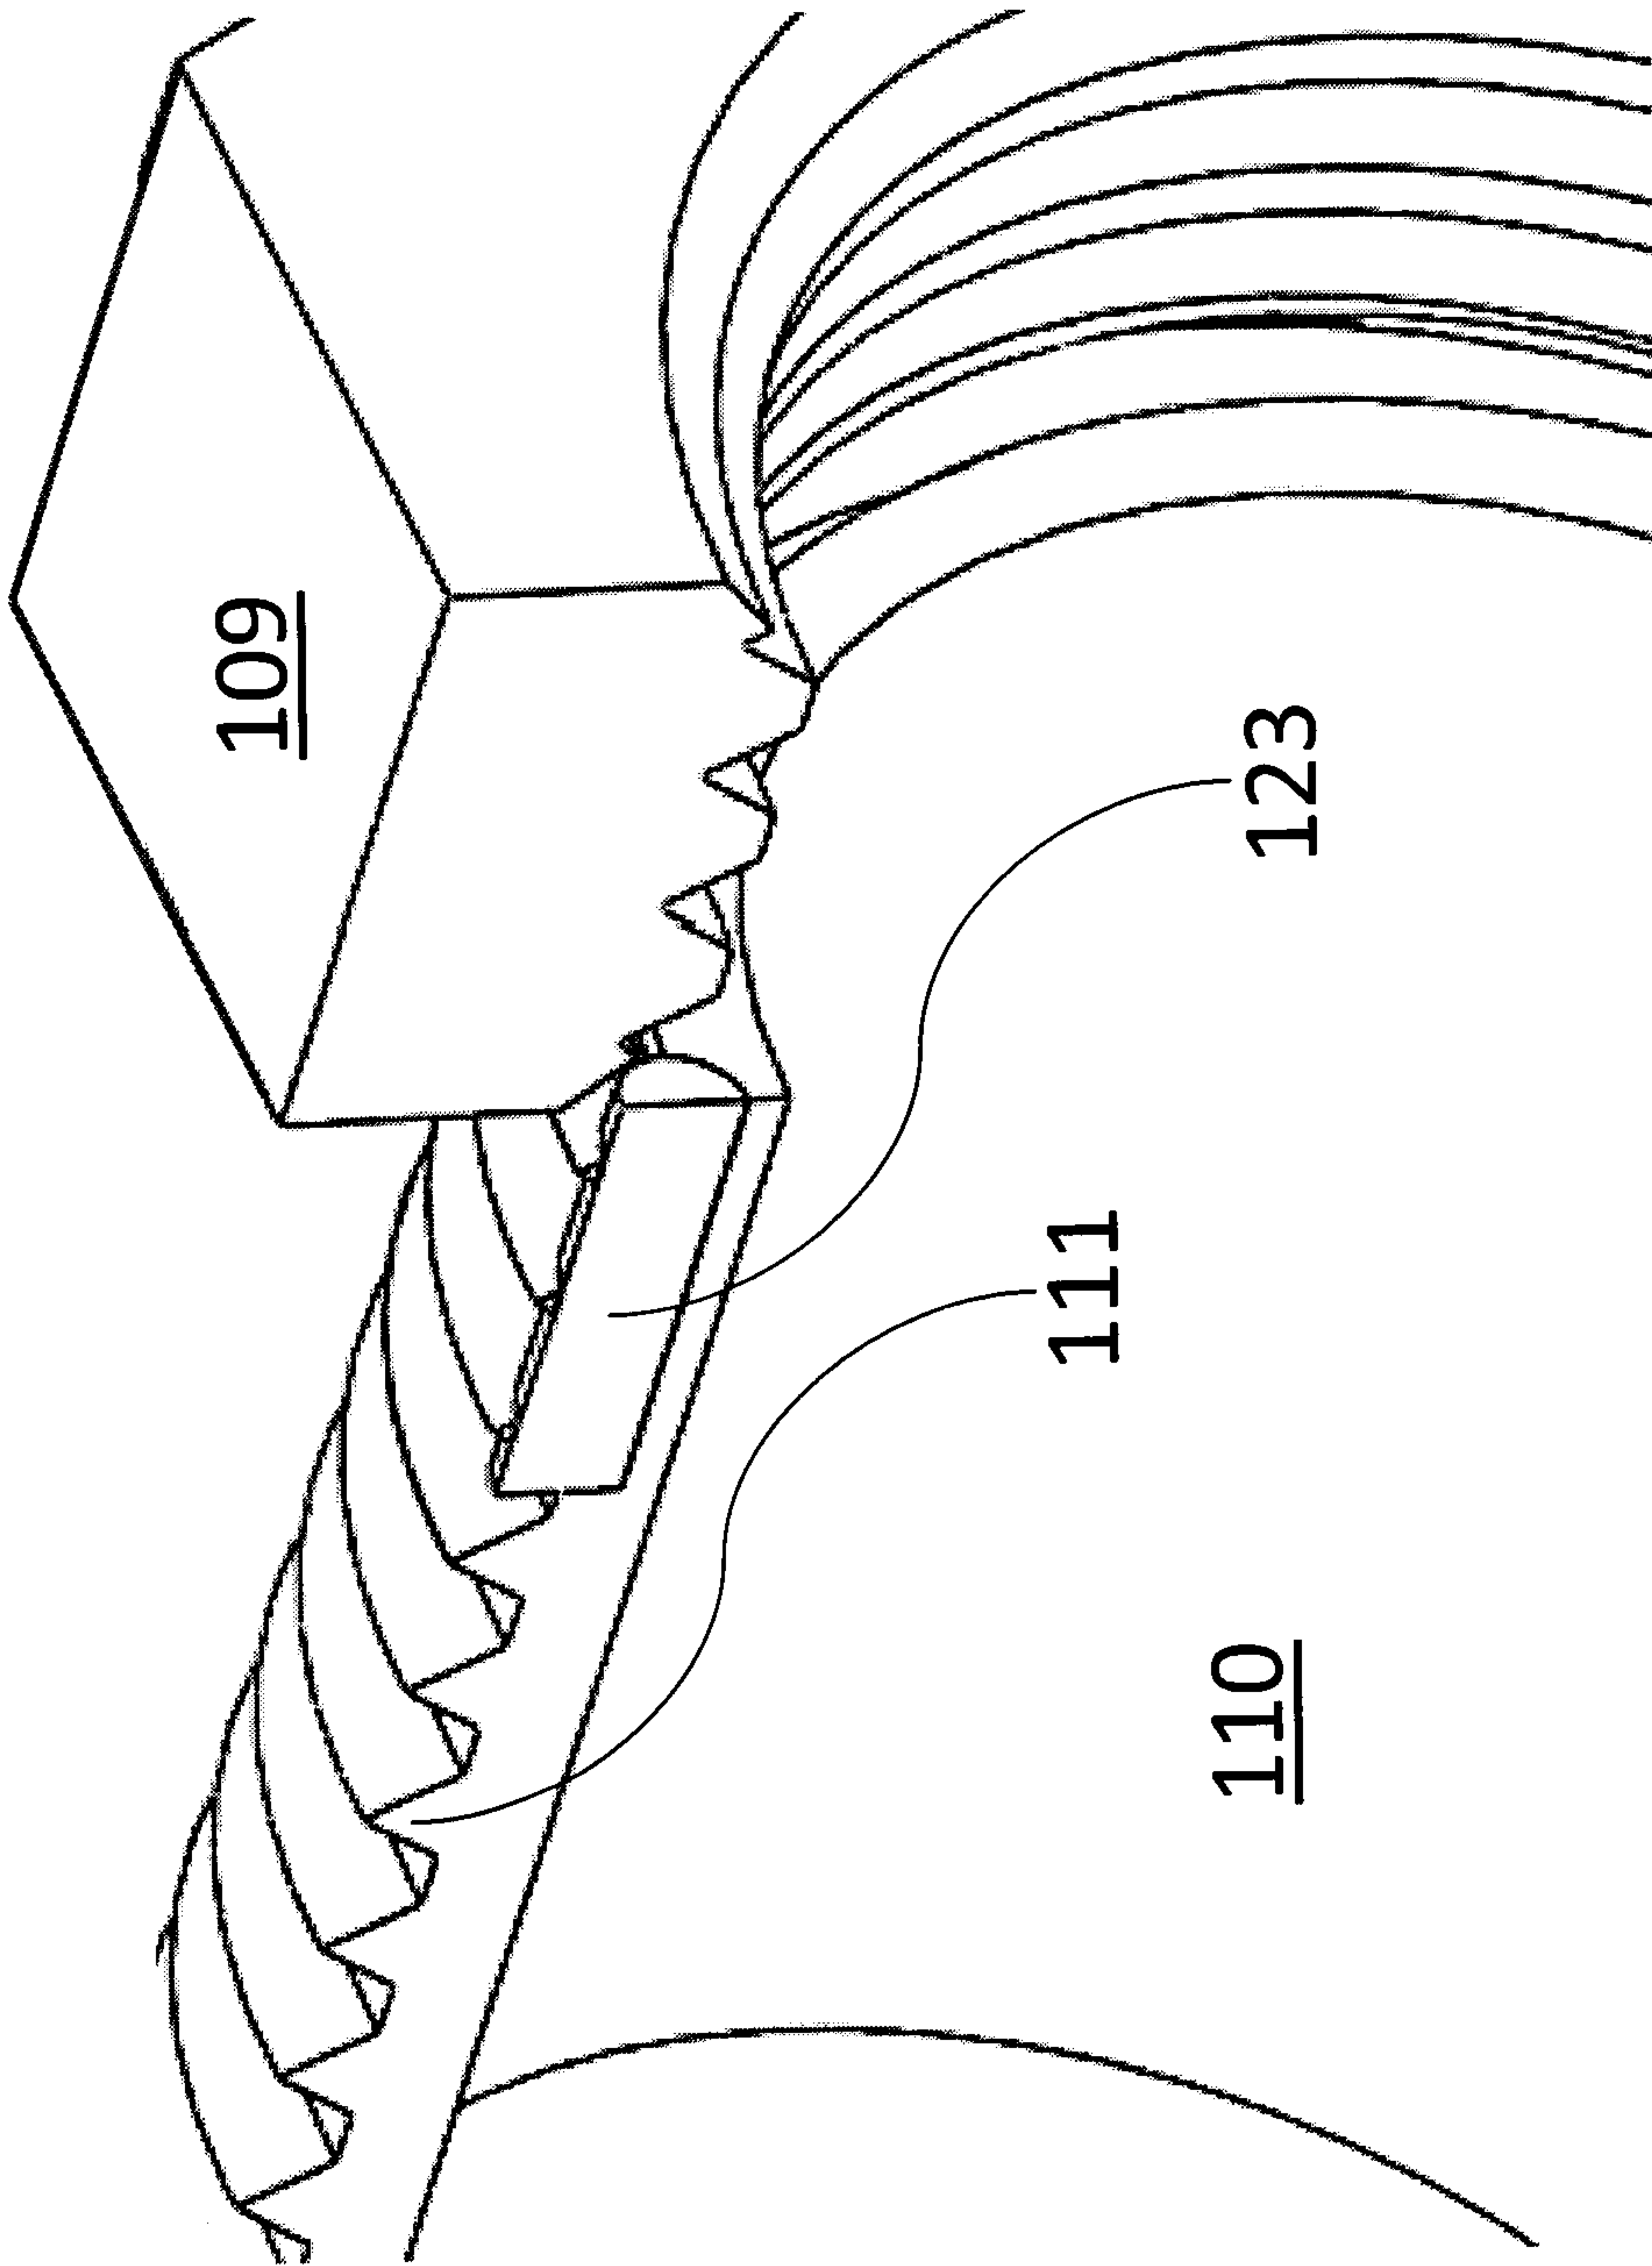


FIG. 7

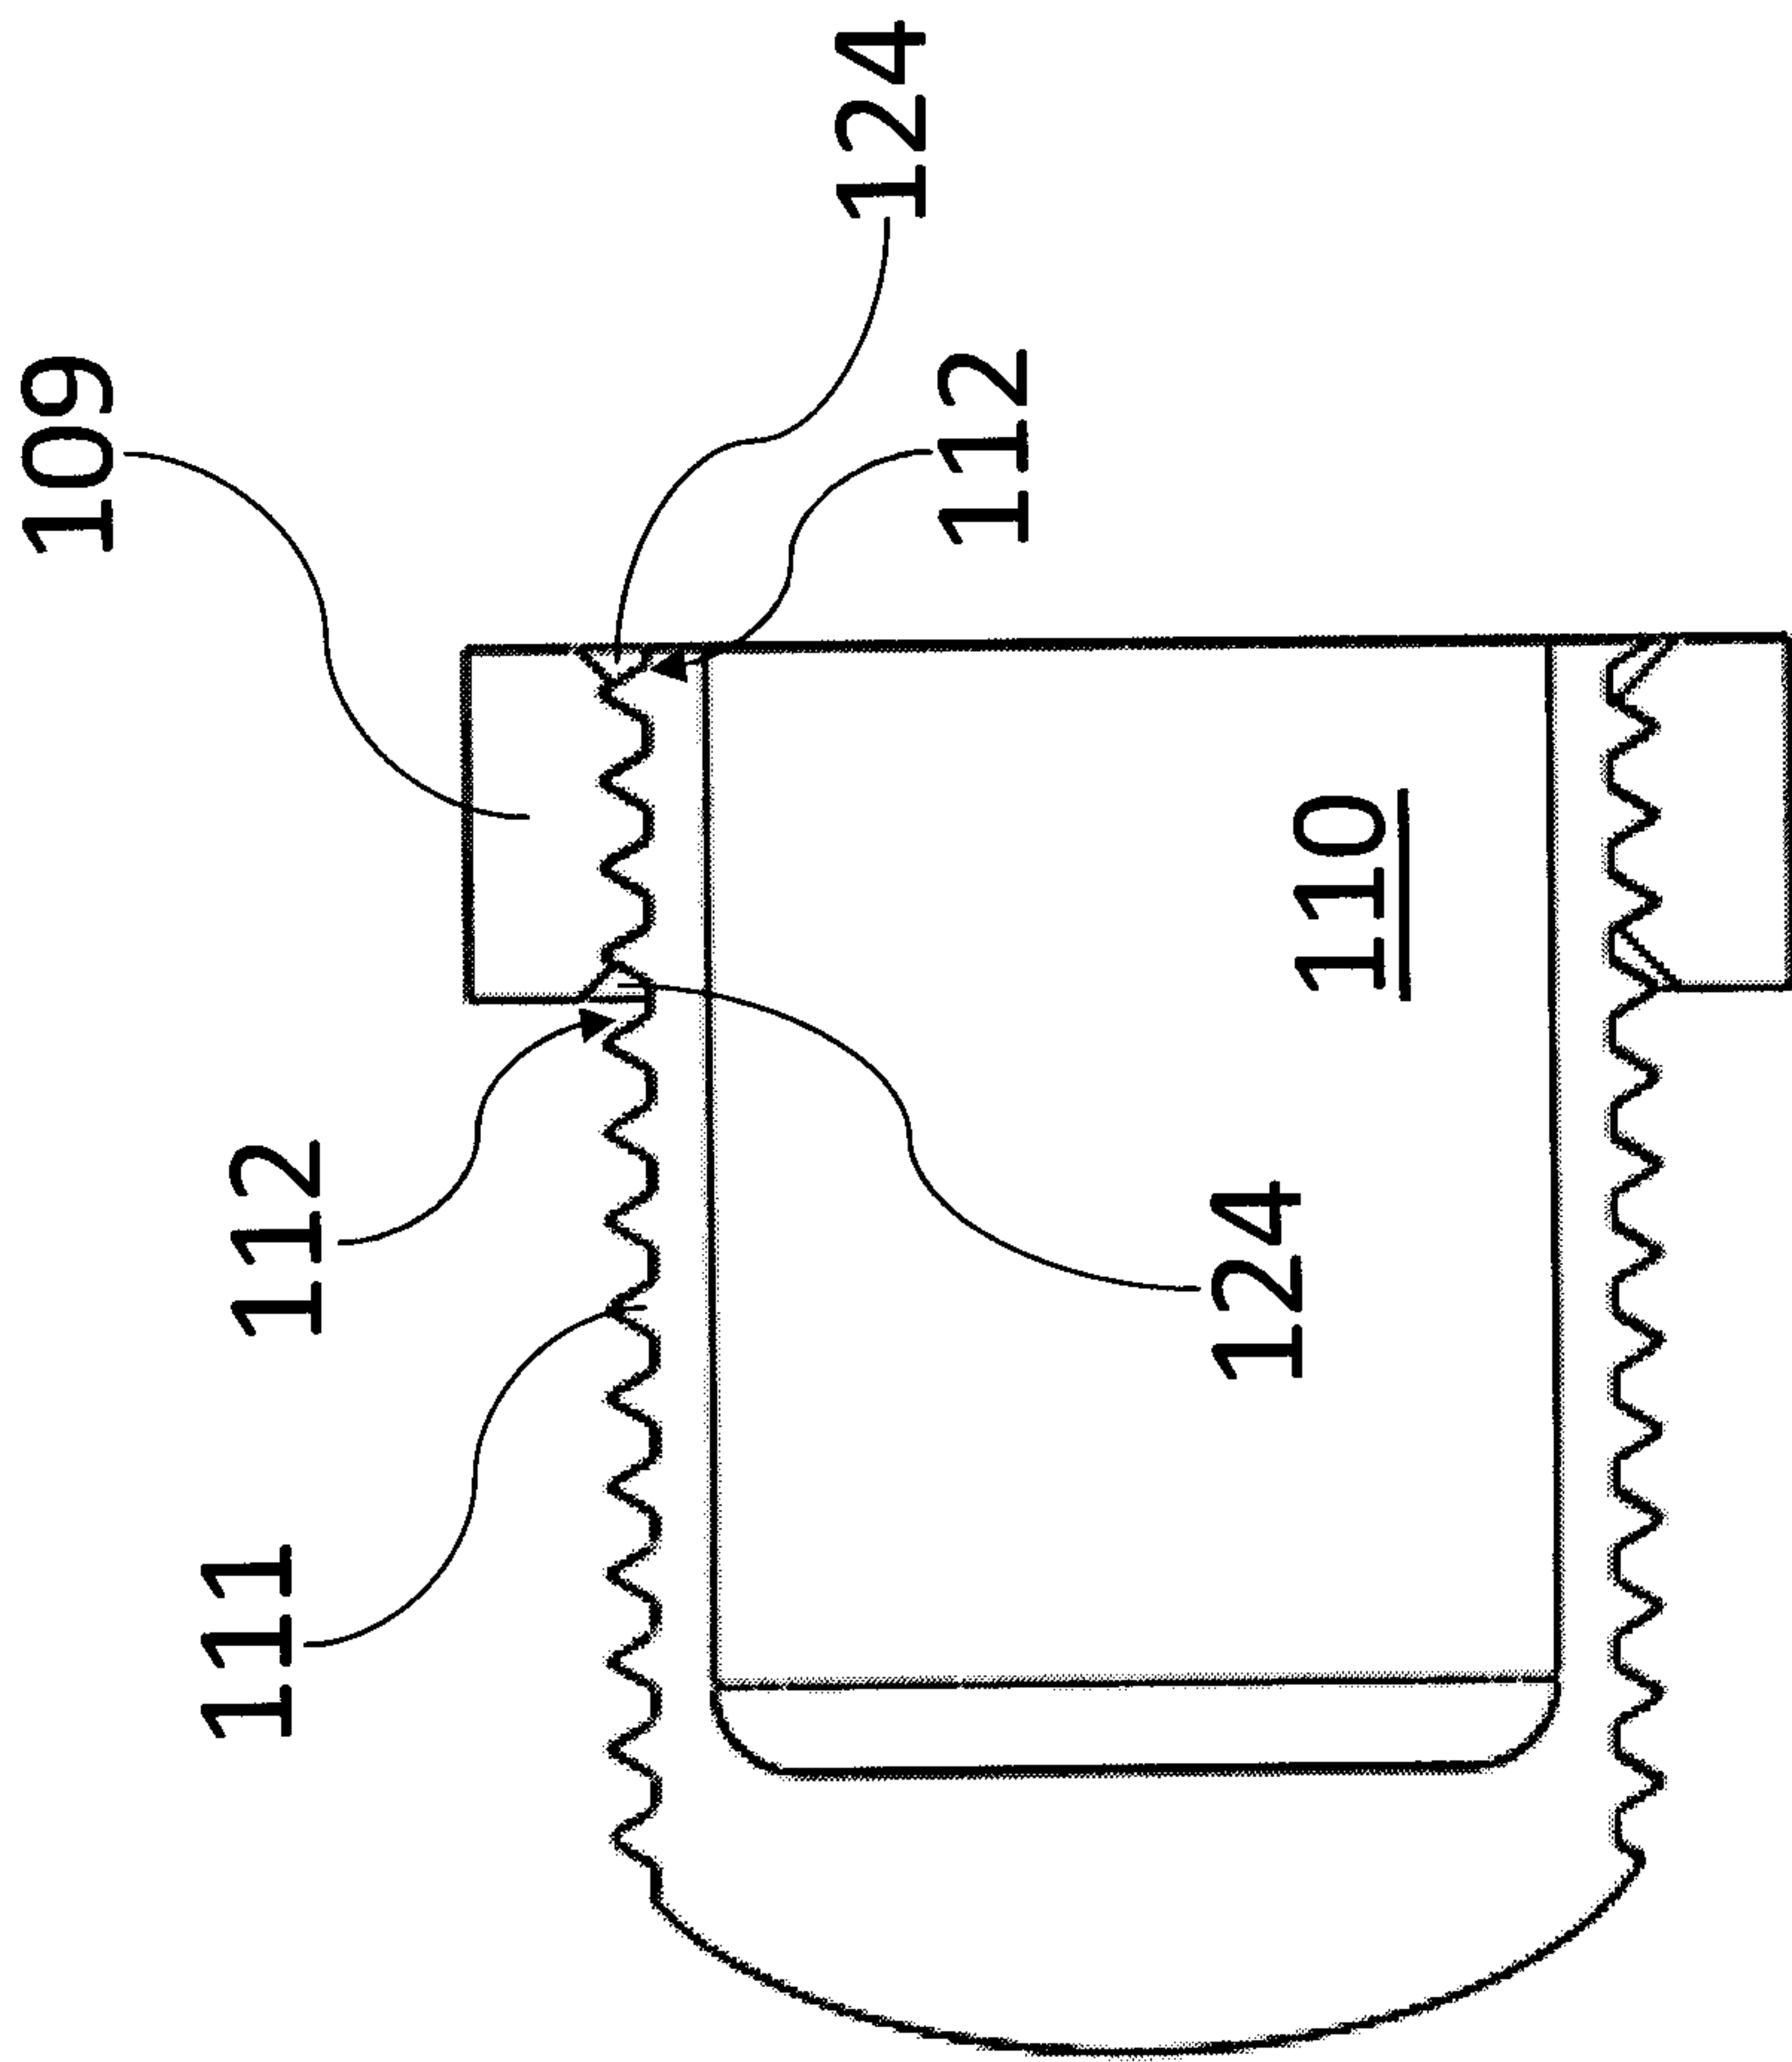


FIG. 8

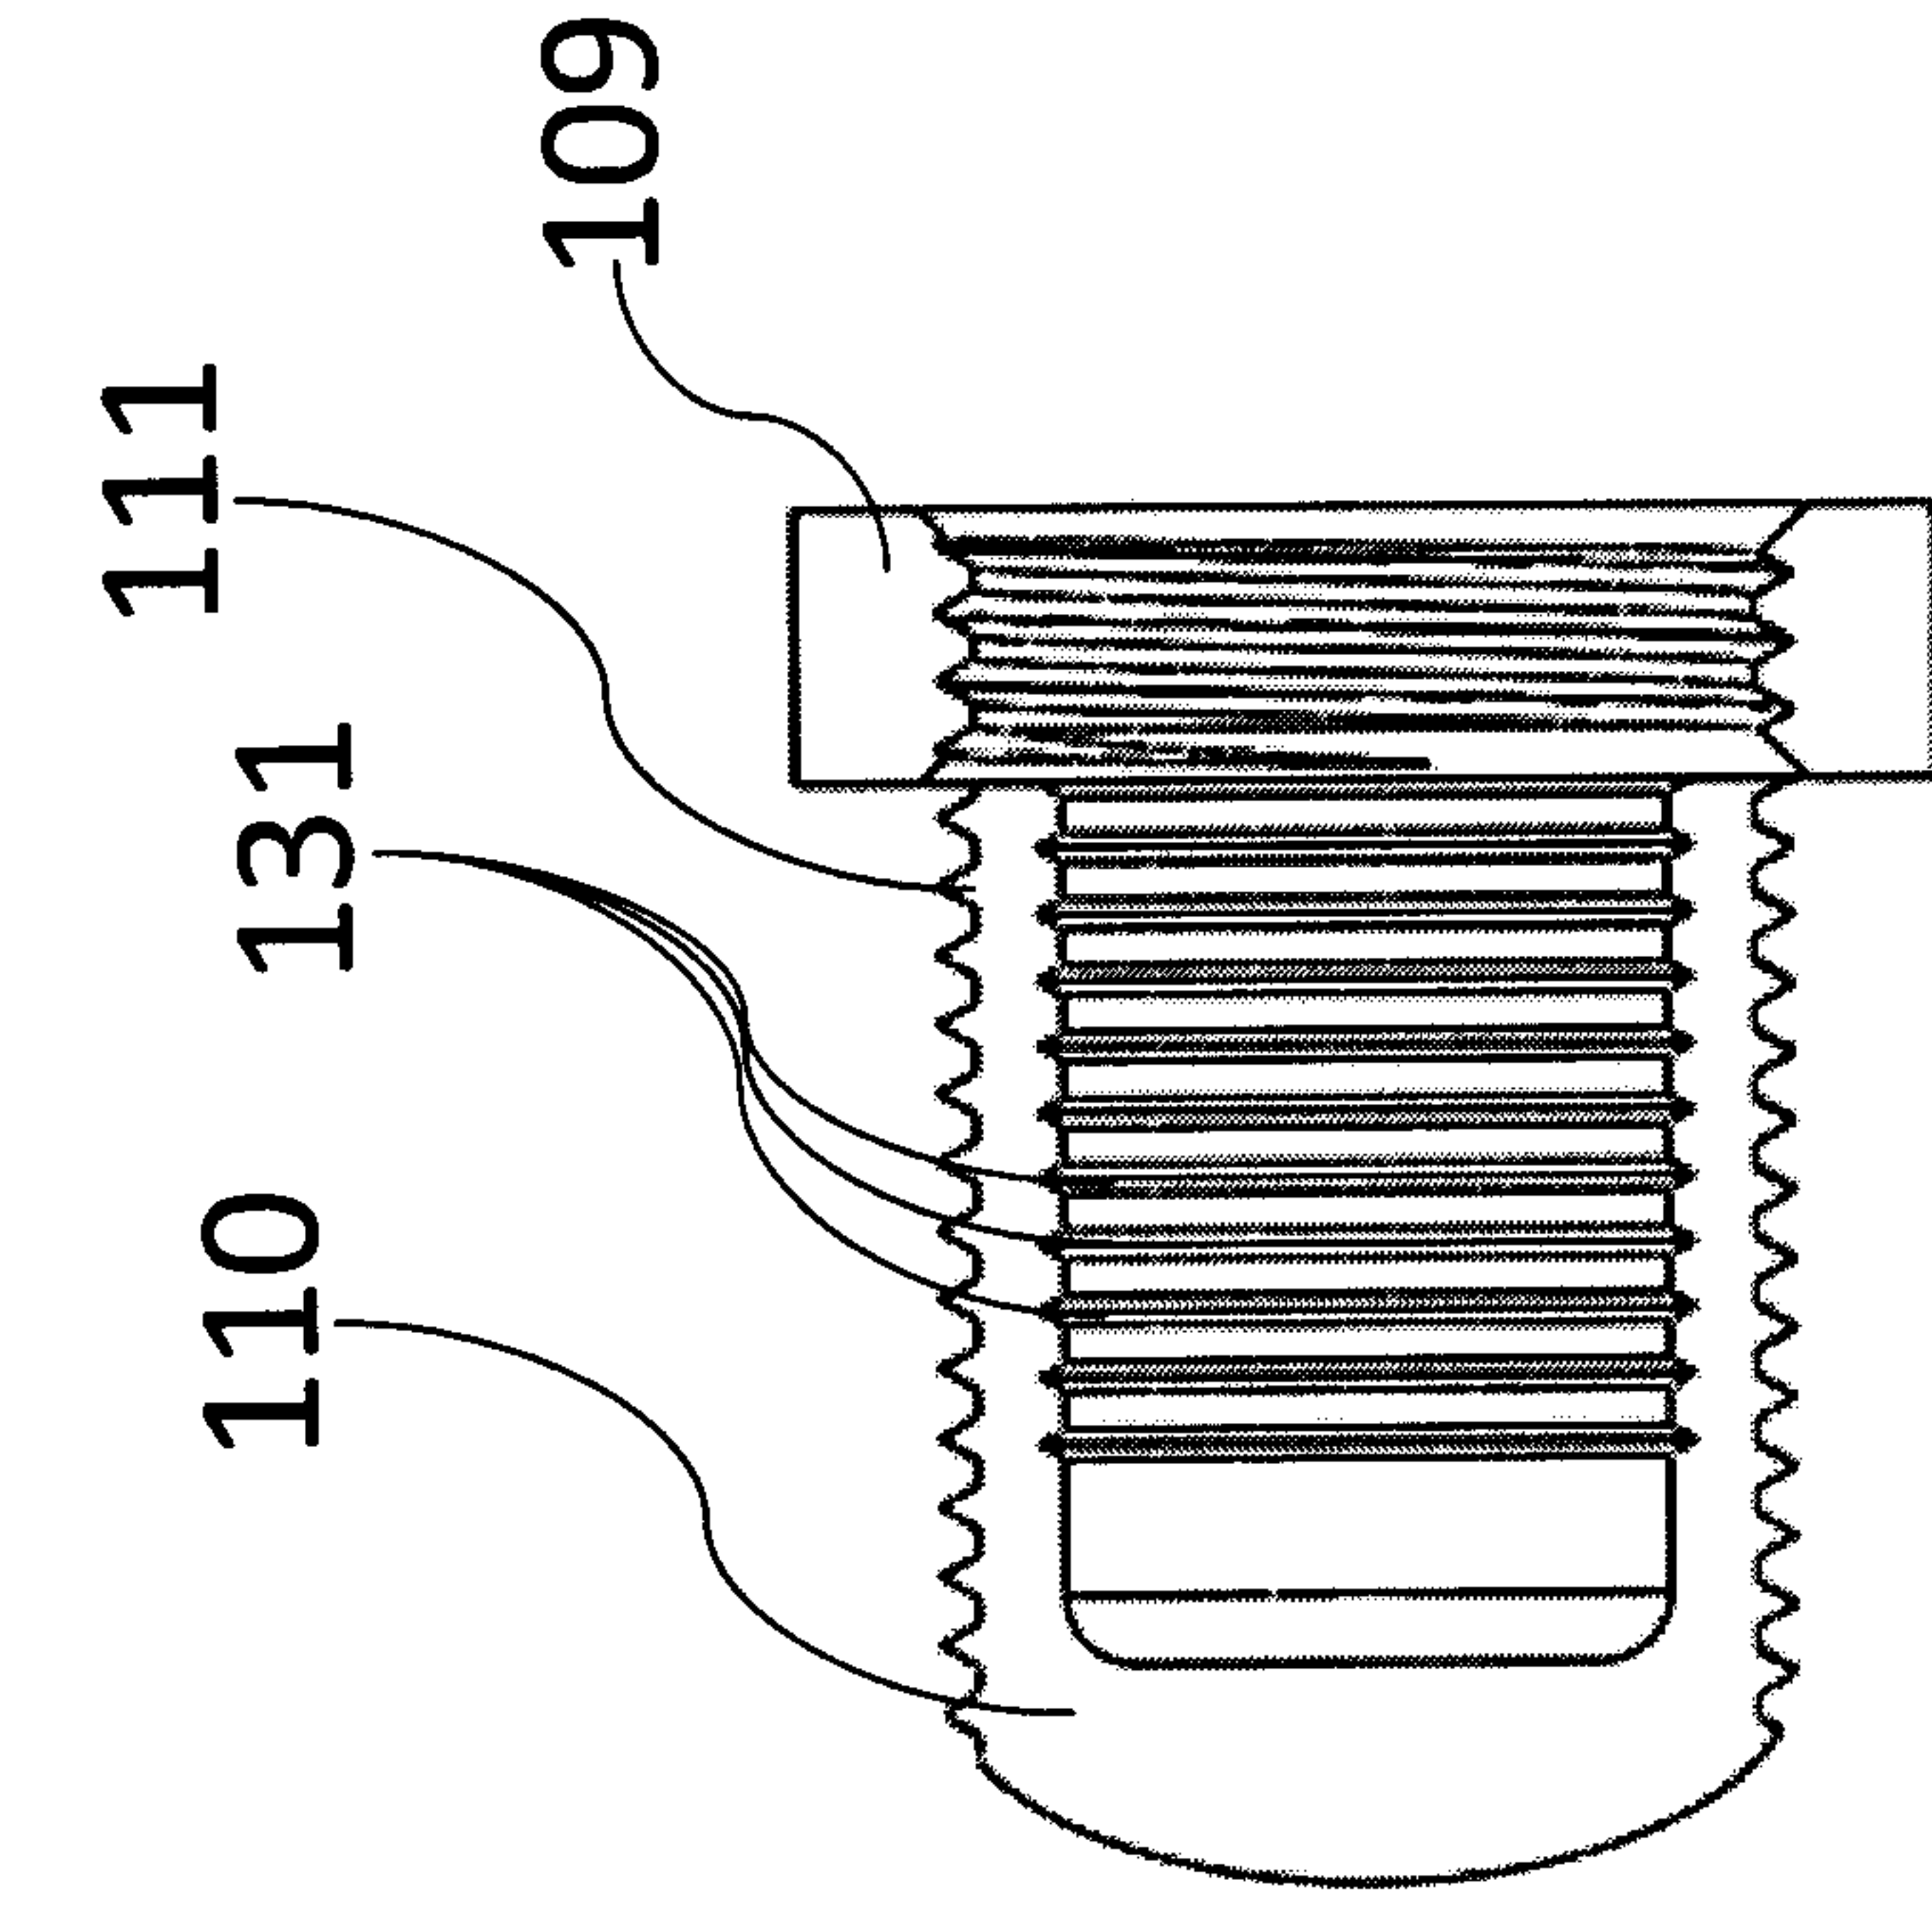


FIG. 9

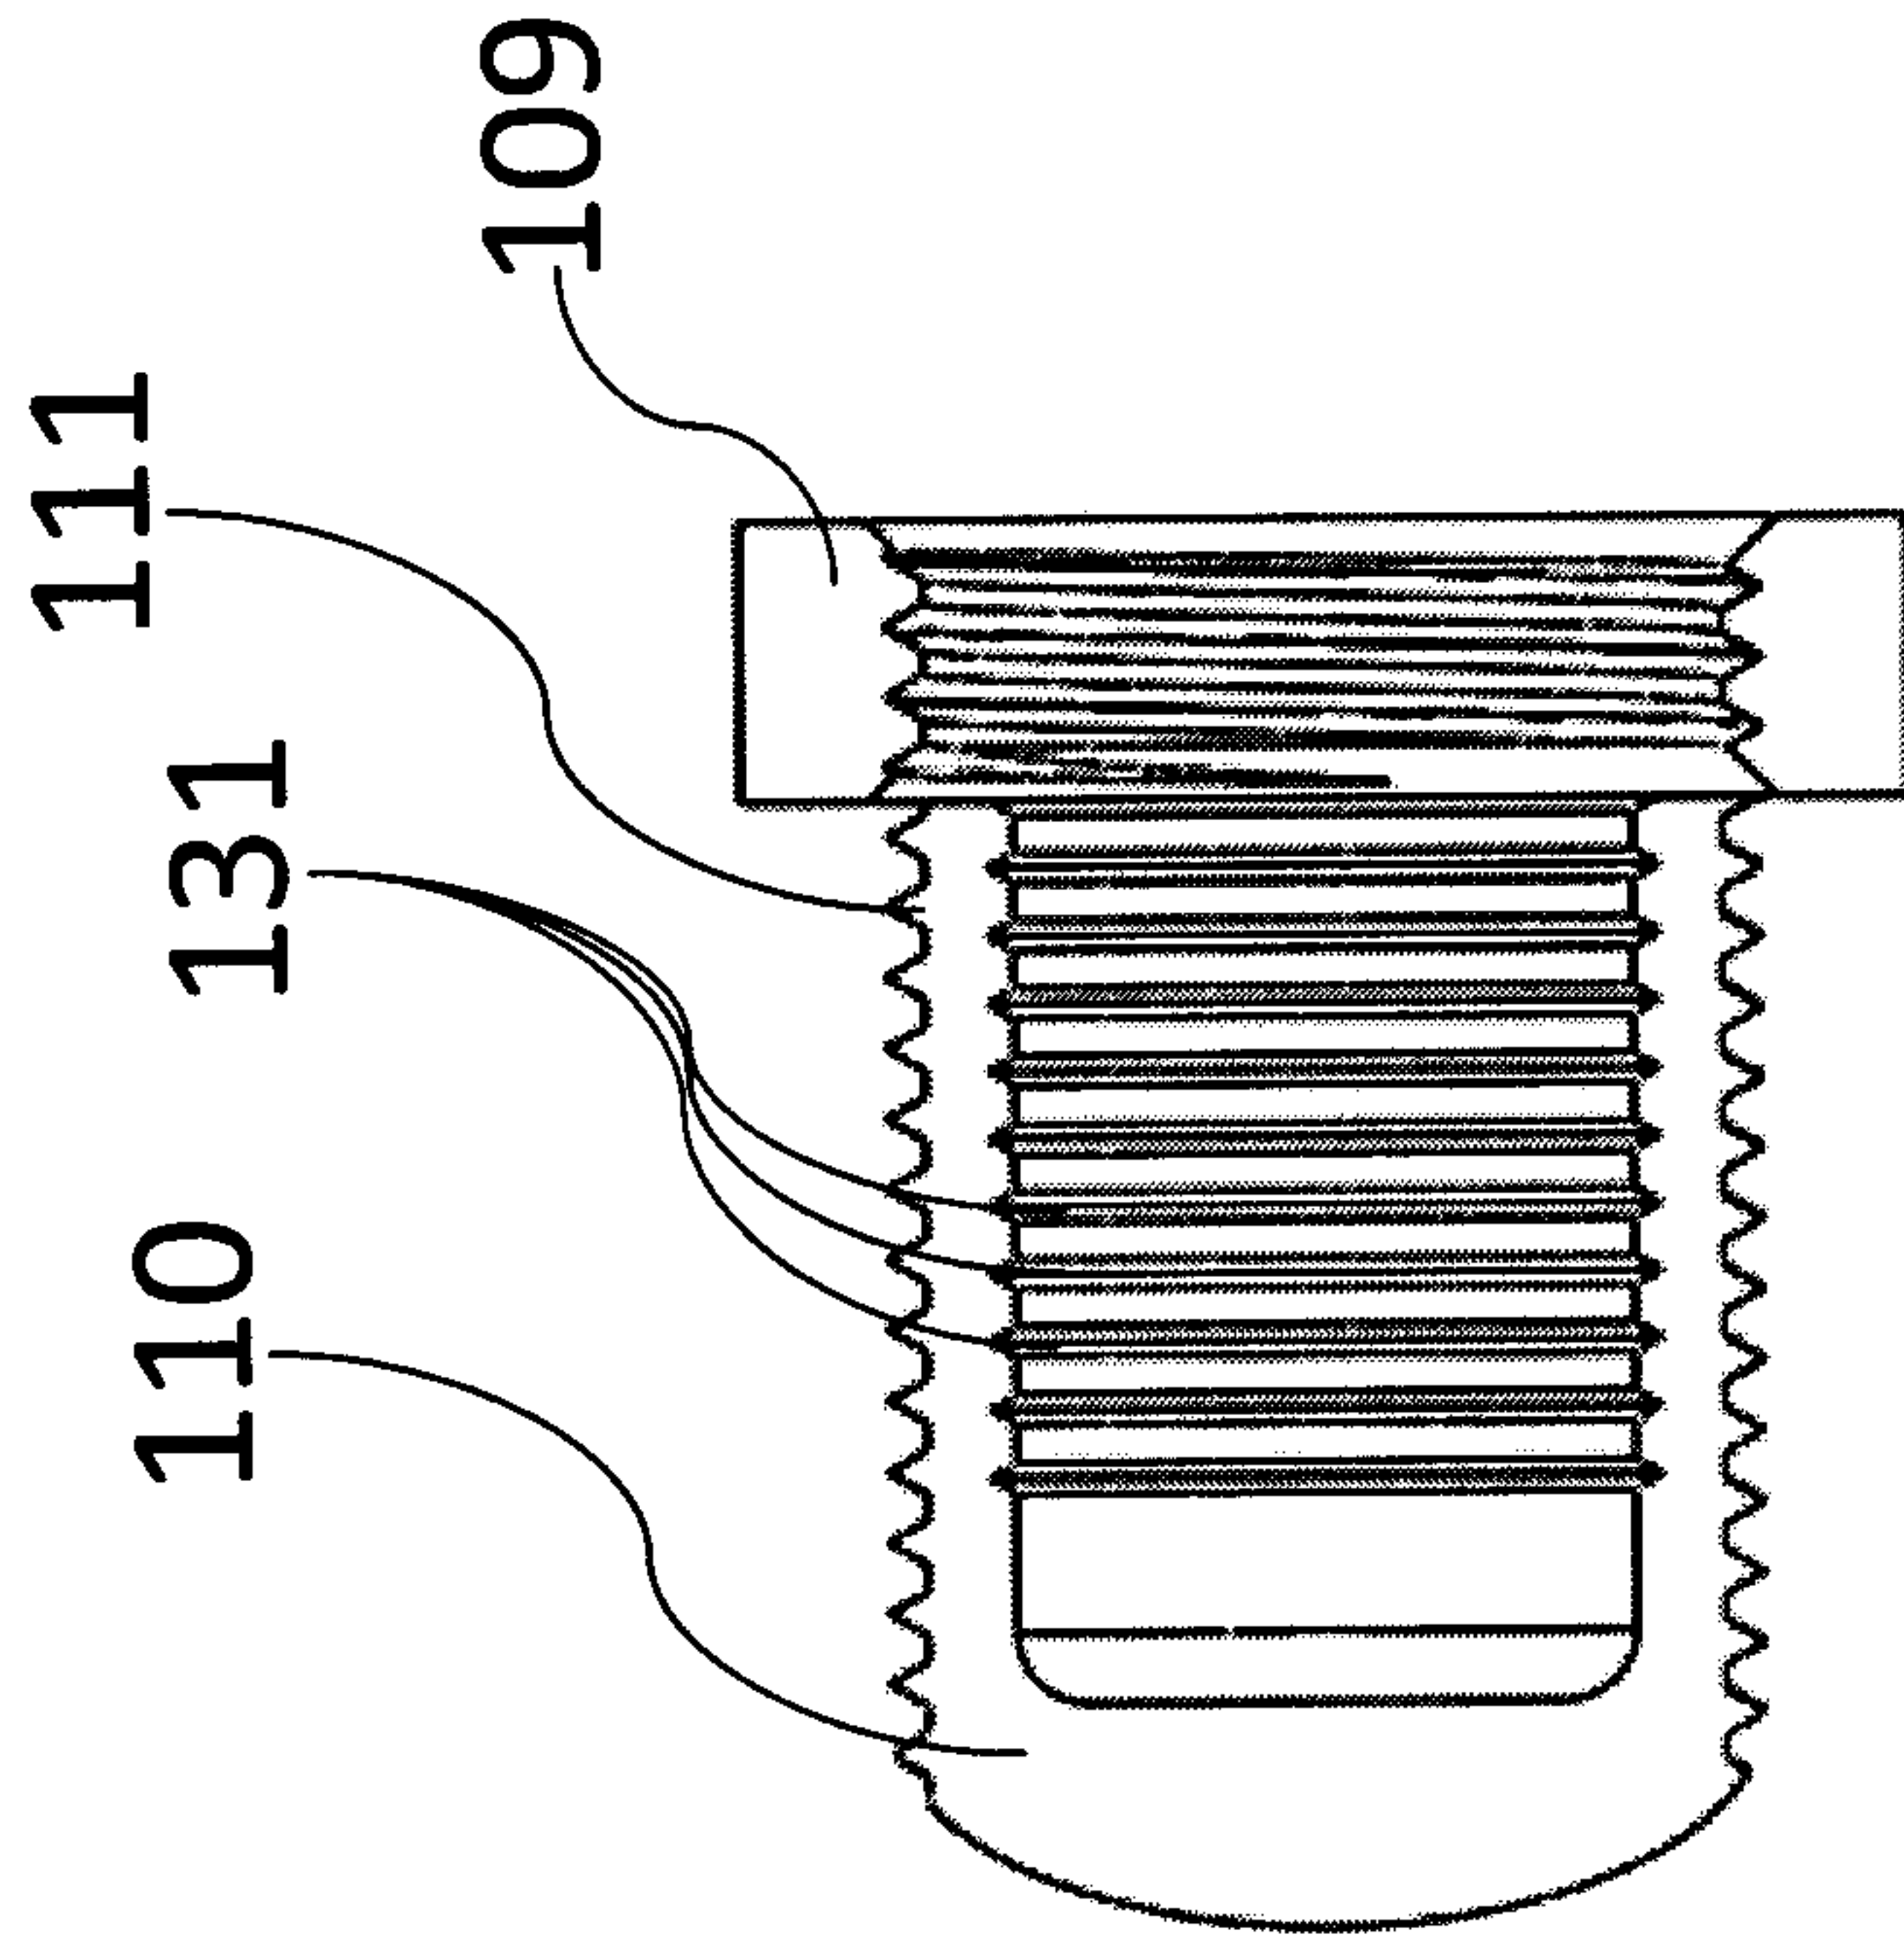


FIG. 10

