



- (51) International Patent Classification:
H01M 2/12 (2006.01)
- (21) International Application Number:
PCT/IB2015/058024
- (22) International Filing Date:
19 October 2015 (19.10.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14110414.1 17 October 2014 (17.10.2014) HK
15106963.3 21 July 2015 (21.07.2015) HK
- (71) Applicant: GP BATTERIES INTERNATIONAL LIMITED [CN/CN]; 8/F, Goldpeak Building, 30 Kwai Wing Road, Kwai Chung, Hong Kong (CN).
- (72) Inventors: TSANG, Hing Po; 8/F, Goldpeak Building, 30 Kwai Wing Road, Kwai Chung, Hong Kong (CN). SHAM, Sek Yin; 8/F, Goldpeak Building, 30 Kwai Wing Road, Kwai Chung, Hong Kong (CN).
- (74) Agent: NIXON PEABODY CWL; 28th Floor, Tesbury Centre, 28 Queen's Road East, Wanchai, Hong Kong (CN).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BATTERIES

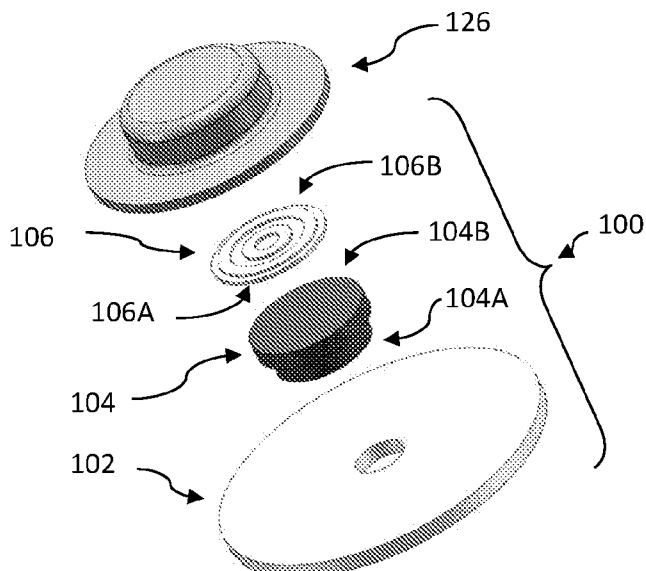


Fig. 2A

(57) Abstract: A battery(10) comprises a safety vent assembly(100). The safety vent assembly(100) comprises a sealing member(104) and an urging member(106) to urge the sealing member(104) against a venting aperture(105) on a battery reaction chamber to seal the battery reaction chamber when pressure inside the battery reaction chamber is below a venting threshold pressure under normal operation conditions, wherein the sealing member(104) is operable to provide a venting path to vent gas from the battery chamber when pressure inside the battery chamber reaches the venting threshold pressure which is sufficient to overcome the urging force of the sealing member(104), and wherein the urging member(106) is to permanently deform on reaching a venting threshold temperature such that gas venting from the battery chamber will occur at a pressure below the venting threshold pressure.

**Declarations under Rule 4.17:**

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

BATTERIES

Field

[001] The present invention relates to batteries, and batteries having a safety device, and more particularly to rechargeable batteries having a safety vent assembly.

Background

[002] Batteries are a stored energy source that has many useful and practical applications. When stored energy is released from a battery, an energy conversion process known as discharging will take place. When energy is re-loaded to a battery after discharging, an energy conversion process known as charging will take place. During charging and discharging, heat and gas are generated in a relatively confined volume. While batteries are a relatively safe, reliable and portable stored energy source, the heat and pressure generated during charging and discharging, and especially during rapid charging, rapid discharging, faulty charging or faulty discharging, the heat and pressure generated can be problematic and may lead to explosion in extreme conditions.

[003] With the increasing demand for batteries having higher energy storage capacities so that battery-driven vehicles ("EV") and battery driven apparatus such as mobile phones and portable computers can have longer operation duration before requiring recharging, the risk of "thermal runaway" in batteries also increases. Thermal runaway in batteries is undesirable and is typically accompanied by venting of combustible vapours, smokes, sparks and flame and is a safety concern for modern day battery operation.

[004] Batteries having safety arrangements to prevent thermal runaway and to mitigate explosion risks are known. Example of such battery safety arrangements includes pressure-triggered devices such as safety vents and current-triggered devices such as fuses.

[005] Sealed batteries having an over-pressure current interruption arrangement have been described in US 5,418,082 & US 4,943,497. In such batteries, current connection between an electrode and a battery terminal is by a welded assembly. When the internal pressure of a battery reaches a predetermined threshold, a safety member operates to break the welded connection to terminate battery reaction.

[006] Batteries having another type of over-pressure current interrupting arrangement are also taught in US 5,750,277. In this arrangement, current connection between an electrode and a terminal is formed by a resilient conductive member urging against another conductive

member. When the internal battery internal pressure reaches a predetermined threshold, a safety member is deformed and operates to break the current connection, thereby interrupting current connection of the battery.

[007] A lithium rechargeable battery described in US 7,186,477 has an over-pressure protection header comprising a rupture disc (31) which is riveted with an annular weld plate (33) to form the current connection. When the internal pressure of the battery exceeds a threshold, the rupture disc will be popped up to break the current connection.

[008] Known battery safety devices arrangements are not quite satisfactory. For example, in the welded type arrangement first mentioned above, a very high internal pressure is required to break the welded connection and therefore the current connection, since a large welded area is usually required to achieve a very low resistance. In the spring urged arrangement, the contact resistance can be variable and non-consistent during the life of a battery, and a battery incorporating such an arrangement would not perform well until a vibration test, which is required when a battery is to be put on the consumer market. In the riveted type arrangement of US 7,186,477, a very high internal pressure is required to pop up the rupture disc if the contact resistance between the rupture disc and the annular weld plate is to be low.

Summary of Disclosure

[009] There is disclosed a battery comprising a reaction chamber and a safety vent assembly. The safety vent assembly comprises a sealing member and an urging member to urge the sealing member against a venting aperture on the battery reaction chamber to seal the battery reaction chamber when under normal operation conditions. The urging member is to soften or deform on reaching a threshold venting temperature. When the urging member is so softened or so deformed during fail-safe operations, pressure inside the reaction chamber will overcome the compressive closure force of the urging member and a venting path will be opened so that gases from the reaction chamber can pass or escape from the reaction chamber to outside through the venting aperture to reduce pressure inside the reaction chamber. In general, when pressure inside the battery chamber reaches a venting threshold pressure which is sufficient to overcome the urging force of the sealing member, the battery temperature will also be at a safety threshold temperature and fail-safe operations are warranted. During fail-safe operations, the urging member is to permanently deform on reaching a venting threshold temperature and gas venting from the battery chamber will occur at a pressure below the venting threshold pressure.

[0010] The urging member and the sealing member are in urging abutment during normal battery operations and during fail-safe operations.

[0011] The urging member and the sealing member may be made of different materials or materials (whether same or different) having different physical properties. For example, the urging material may be made of a resilient material the resilience of which is more sensitive to temperature change, especially at temperatures near the threshold venting temperature or fail-safe threshold temperature. For example, the urging member may be porous and air permeable or has a higher porosity than the non-porous or non-air permeable sealing member. On the other hand, the sealing member may have a substantially higher melting point or a melting point at a substantially higher temperature than the fail-safe threshold temperature so that the sealing member will not prematurely melt to glue the venting aperture.

[0012] The urging member is made to have a fill ratio or occupation ratio which is less than 100%. The occupation or fill ratio is the volume ratio between the volume occupied by materials forming the urging member and the external volume defined by the external or outer dimensions of the urging member. The external volume also defines a buffer volume inside the battery housing which extends between the axial ends of the urging member. Example fill ration may be in the range of 60-95% or 75-85%. For example, the fill ration may be higher than 50%, 55%, 60%, 65%, 75%, 80%, 85% or lower than 95%, 90%, 85%, 80%, 75%, 70%, 65% or any combination thereof.

[0013] In some embodiments, the urging member may comprise distributed protrusions on an axial end surface which is contact with the battery housing. The distributed protrusions facilitates more rapid heat induced deformation and hence more rapid opening up of the venting path. The protrusions may be distributed to provide more even and distributed support to provide a more evenly distributed compressive urging force while achieving a good thermal responsive time.

[0014] The sealing member may have an outer periphery larger than that of the urging member so as to at least partially enclose or wrap the urging member, or vice versa.

Figures

[0015] The present disclosure will be described by way of example and with reference to the accompanying figures, in which:

Figure 1 is a longitudinal cross-sectional view of an example battery according to the disclosure,

Figure 2A is an exploded view showing components of an example safety venting assembly of a battery according to the disclosure,

Figure 2B is a cross-sectional view showing the example safety venting assembly comprising the components of Figure 2A in assembled form during normal operation conditions,

Figure 3A is an exploded view showing components of an example safety venting assembly according to the disclosure,

Figure 3B is a cross-sectional view showing the example safety venting assembly comprising the components of Figure 3A in assembled form during normal operation conditions,

Figure 4A is an exploded view showing components of an example safety venting assembly according to the disclosure,

Figure 4B is a cross-sectional view showing the example safety venting assembly comprising the components of Figure 4A in assembled form during normal operation conditions,

Figure 5A is a schematic diagram depicting a transitional state of the safety venting assembly of Figure 2B during fail-safe operations,

Figure 5B is a schematic diagram depicting venting operations of the safety venting assembly of Figure 2B upon entering into a fail-safe state,

Figure 6A is an exploded view showing components of an example safety venting assembly according to the disclosure,

Figure 6B is a cross-sectional view of the example safety venting assembly of Figure 6A in assembled form during normal operation conditions,

Figure 7A is an exploded view showing components of an example safety venting assembly according to the disclosure,

Figure 7B is a cross-sectional view of the example safety venting assembly of Figure 7A in assembled form during normal operation conditions,

Figure 8 is a diagram depicting schematically relationship between operational temperature and pressure of an example battery according to the disclosure,

Figure 9 shows another example battery according to the present disclosure,

Figure 10A is a cross sectional view of an example venting assembly according to the disclosure,

Figure 10B is an exploded view showing components of the example venting assembly of Figure 10A,

Figure 11A is a perspective view showing an example safety valve sub-assembly,

Figure 11B is an exploded view showing components of the example safety valve sub-assembly of Figure 11A,

Figure 11C is a longitudinal cross-sectional view taken along line A-A' in Figure 11A,

Figures 12A to 12C are schematic views showing example safety valve sub-assemblies according to the disclosure,

Figures 13A to 13E are perspective views of example sealing members, and

Figures 14A and 14B are perspective views of further example sealing members.

Description

[0016] An example rechargeable battery **10** depicted in Figure 1 comprises an electrode plate group ("EPG") which is contained inside a battery housing. In this example, the battery housing is a steel can **120** which is filled with a battery electrolyte (not shown). A safety venting assembly **100** is mounted on top of the battery housing and below a top battery terminal. The electrode plate group **140** comprises a positive electrode plate group which is connected to a positive battery terminal **122** via a positive current collector, a negative electrode plate group which is connected to a negative battery terminal **124** via a negative current collector, and an insulating separator group providing insulation between the positive and negative electrode plate groups. The battery housing defines a reaction chamber inside which the electrode plate group **140** is immersed in battery electrolyte and a top cap portion. The safety venting assembly **100** is to cooperate with a top cap portion **126** of the battery housing and urges downwardly against a top venting aperture of the steel can **120** to seal the reaction chamber so that the battery electrolyte is retained during storage or normal

operations and a fail-safe venting path is provided when pressure inside the reaction chamber exceeds a safety pressure limit or an operational pressure limit.

[0017] The example battery is a cylindrical battery **10** in which a coiled electrode plate group **140** having a generally cylindrical shape is immersed in an electrolyte contained inside a battery housing having a generally cylindrical shape. The generally cylindrically shaped battery housing comprises a steel can **120** defining a generally cylindrical shaped internal compartment inside which the coiled electrode plate group and the electrolyte are housed, a top cap portion on the cylindrical steel can **120** and a safety assembly **100** between the top cap portion and the cylindrical steel can **120**. The positive current collector is connected to a conductive portion of the top cap portion which is in turn connected to the positive battery terminal. The negative current connector is connected to the steel can and the steel can body defines a distributed negative terminal. The safety assembly is to cooperate with the steel can **120** to define a sealed reaction chamber inside which energy conversion processes are to take place during normal battery operations. The top cap portion is to cooperate with the safety assembly to define a buffer region in which the safety assembly is to operate when conditions of the battery is outside safety or operation limits.

[0018] The safety assembly **100** comprises a sealing member which extends transversely across the steel can to partition the battery housing into a first region defining a sealed reaction chamber and a second region above the first region. The second region defines a buffer compartment and a buffer region.

[0019] An example safety assembly **100** depicted in Figure 2A comprises a partitioning member **102**, a sealing member **104** and an urging member **106**. The partitioning member is in the form of a partitioning plate having a venting aperture **105** defined at its centre. The partitioning member **102** has a circular cross-section to follow the circular shape of the steel can **120**. The partitioning plate is non-gas permeable and is in a circular shape to correspond to the shape and size of the internal compartment defined by the cylindrical steel can **120** of the battery housing to facilitate sealing of the reaction chamber when the sealing member is in a sealing position during normal battery operation conditions. In some embodiments, a circumferential groove is formed on the interior of the battery housing to hold the partitioning plate in place at an axial level above the bottom of the steel can **120** or at an axial distance above the maximum electrolyte level. The venting aperture **105** on the partitioning member **102** is to provide a passageway through which excessive gases built-up in the reaction chamber can be released when the safety mechanism is activated under adverse battery conditions. The size of the venting aperture is determined according to various factors, including the rating of the battery, the size of the reaction chamber, rate of gaseous by-

product generation when outside the normal operation conditions, and/or the required speed of gas release or pressure reduction.

[0020] The sealing member **104** is to seal the venting aperture during normal battery operation conditions when the sealing member is under an axial urging force to urge against the venting aperture. The example sealing member **104** shown in Figures 2A and 2B comprises a resilient main body having a first axial end portion **104A** having a first sealing surface which faces the venting aperture and a second axial end portion **104B** having a second sealing surface which faces the urging member **106**, the first and second axial end portions being axially aligned and opposite facing. The first axial end portion **104A** of the sealing member **104** is in urging or pressing abutment with the partitioning member **102** and extends across the entire venting aperture to cover and/ or seal the venting aperture during normal battery operation conditions. The second end portion of the sealing member is in urging or pressing abutment with the urging member and to transmit an axial urging force coming from the urging member to the first end portion. An example resilient main body of an example sealing member is formed of a resilient material such as a resilient rubber including EPDM rubber, synthetic rubber including silicone rubber and natural rubber.

[0021] The urging member **106** is to apply an axial force to urge the sealing member against the venting aperture to seal the venting aperture during normal battery operation conditions. The example urging member **106** of Figure 2B comprises a resilient main body having a first end portion **106A** having an urging surface which faces the sealing member and a second end portion **106B** having a second urging surface which faces the top cap portion **126**, the first and second end portions being axially aligned and opposite facing. The first end portion **106A** of the urging member **106** is in urging or pressing abutment with the sealing member and the second end portion **106B** of the urging member is in urging or pressing abutment with the top cap portion. During normal operations, a resilience or compressive urging force stored inside the resilient main body of the urging member **106** is to act as an axial urging force against the sealing member **104** to seal the venting aperture **105** and to keep the reaction chamber gas tight.

[0022] The urging member **106** has an axial extent or axial thickness and occupies a buffer volume. The buffer volume is defined by a buffer compartment which is in turn defined between the top cap portion and the sealing member **104**. In general, the buffer volume is defined by the axial thickness and transversal extent of the main body, and it has an occupation ratio or a fill ratio of or below 100%. The occupation or fill ratio is the volume ratio between the volume of solid materials inside the buffer volume and the buffer volume. In general, the buffer volume inside the battery housing extends between the axial ends of the

urging member and the total volume occupied by or filled with materials of the urging member. The ratio is preferably in the range of 60-95% and more preferably in the range of 75-85%. An example resilient main body of an example urging member is formed of a resilient material such as a resilient thermo-plastic material including polypropylene, nylon, polyethylene and the like.

[0023] In the example of Figure 2A, the urging member **106** is moulded of rubber and has a solid base portion on which alternate concentric protrusions and indentations are integrally formed.

[0024] The example safety assembly **200** depicted in Figure 3A comprises a partitioning member **202**, a sealing member **204** and an urging member **206**. The arrangements of the components are substantially the same as that of example safety assembly **100** and the description on the example safety assembly **100** is incorporated herein by reference with numerals increased by **100** where the numerals relate to the same or functionally equivalent components. In the example of Figures 3A and 3B, the urging member is different to that of Figures 1A and 2A and is in the shape of a washer having a hollow central portion surrounded by a solid rim of rubber.

[0025] The example safety assembly **300** depicted in Figure 4A comprises a partitioning member **302**, a sealing member **304** and an urging member **306**. The arrangements of the components are substantially the same as that of example safety assembly **100** and the description on the example safety assembly **100** is incorporated herein by reference with numerals increased by **200** where the numerals relate to the same or functionally equivalent components. In the example of Figures 4A and 4B, the urging member is different to that of Figures 1A to 3A and is in the shape of a solid pellet formed of rubber and has a cross-sectional extent smaller than the corresponding cross-sectional area of the battery housing at the axial level at which the urging member is located.

[0026] In some embodiments, the top cap portion is in the form of a grille-shaped open structure and the urging member is in the shape of a solid pellet formed of rubber and has a 100% occupation ratio of the battery housing at the axial level at which the urging member is located.

[0027] In some embodiments, the urging member is formed of heat shrinkable material which is to shrink at a predetermined threshold temperature. The heat shrinkable material may be a thermoplastic material such as polyolefin, fluoropolymer (such as FEP, PTFE or Kynar), PVC, neoprene, silicone elastomer or Viton.

[0028] In some embodiments, the material forming the urging member has a substantially lower melting point than that of the material forming the sealing member so that when the battery temperature rises to above a predetermined threshold temperature indicating abnormal operation, the urging member will be softened or melted and the sealing member will be pushed upwards towards the top cap portion to open up a venting path by the internal pressure of the reaction chamber. Excessive gas inside the reaction chamber will be released through the venting path to reduce pressure inside the battery housing.

[0029] In some embodiments, the urging member and the sealing member may be formed as a single piece.

[0030] The example safety assembly **400** depicted in Figure 6A comprises a partitioning member **402**, a sealing member **404** and an urging member **406**. The arrangements of the components are substantially the same as that of example safety assembly **100** and the description on the example safety assembly **100** is incorporated herein by reference with numerals increased by **300** where the numerals relate to the same or functionally equivalent components. In the example of Figures 6A and 6B, the urging member **406** is moulded into the shape of a circular cap having a base portion and a peripheral wall surrounding a base portion to define a recess or an indentation. The sealing member **404** has a head portion having a shape and dimension complementary to the recess portion of the urging member. The urging member and the sealing member are formed as a single piece by over-moulding with the head portion of the sealing member received inside the recess of the urging portion in a closely fitted manner by over-moulding. In some embodiments, the recess extends through the base portion to define a through aperture extending axially through the urging member.

[0031] The example safety assembly **500** depicted in Figure 7A comprises a partitioning member **502**, a sealing member **504** and an urging member **506**. The arrangements of the components are substantially the same as that of example safety assembly **400** and the description on the example safety assembly **400** is incorporated herein by reference with numerals increased by **100** where the numerals relate to the same or functionally equivalent components. In the example of Figures 7A and 7B, the urging member **506** is moulded into the shape of a circular cap having a base portion and a peripheral wall surrounding a base portion to define a recess or an indentation. The sealing member **504** has a head portion having a shape and dimension complementary to the recess portion of the urging member. The urging member and the sealing member are formed as a single piece by over-moulding with the head portion of the sealing member received inside the recess of the urging portion in a closely fitted manner by over-moulding. A plurality of concentric ribs is formed on an

axial end of the base portion distal from the sealing member. The concentric ribs projecting axially from the base portion in an axial direction away from the sealing member to define a plurality of concentric grooves.

[0032] An example safety or venting assembly **600** depicted in Figure 10A is part of a battery. The battery comprises an electrode plate group which is housed inside a battery housing. The electrode plate group is immersed inside a battery electrolyte which is contained inside an electrolyte container defined by the battery housing. A reaction chamber which is cooperatively formed by the electrode plate group, the battery electrolyte and the electrolyte container is sealed by the venting assembly **600** in cooperation with a top end cap portion of the battery housing.

[0033] The example safety or venting assembly **600** comprises a partitioning member or plate **602**, a sealing member **604** and an urging member **606**, as depicted in Figure 10B. The arrangements of the components are substantially the same as that of example safety assembly 400/500 and the description on the example safety assembly 400/500 is incorporated herein by reference with numerals increased by 200/100, wherein like numerals represent like components.

[0034] In the example safety venting assembly of Figures 10A and 10B, the urging member **606** and the sealing member **604** cooperate to form a valve sub-assembly. The urging member **606** is formed of a heat melt-able or heat deformable material which is rigid during normal working temperature of the battery and which is to melt or soften to deform when a threshold venting temperature is reached. The urging member **606** includes an upper portion which extends transversely in a radial direction to form a ceiling portion and a skirt portion which is formed on the outer periphery of the ceiling portion and which projects axially downwards and away from the ceiling portion. The skirt portion includes indentations which are distributed along its perimeter to define a plurality of retention teeth. The retention teeth are distributed along periphery of urging member and project axially downwards to define a retention compartment inside which the sealing member **604** is securely seated or tightly received.

[0035] In some embodiments, the urging member includes an indentation or a plurality of indentations, for example, on the upper portion so that materials forming the urging member can flow into the indentation to reduce axial thickness of the urging member to provide room for operative movement of the sealing member when the venting temperature has reached. For example, an arcuate groove or a plurality of arcuate grooves is formed on the upper portion to provide room from deformation flow.

[0036] In some embodiments, the urging member **606** is moulded of hard thermal plastics, for example, polyethylene. Where the urging member **606** is moulded of hard thermal plastics, resilience of the retention teeth will cooperate to exert a radial compression force to keep the sealing member **604** inside the retention compartment or sealing member **604** receptacle defined by the plurality of retention teeth. In such embodiments, the urging member **606** forms a clasp to firmly hold the sealing member **604** inside the retention compartment.

[0037] The urging member **606** is made of a material having a substantially lower melting or softening temperature so that it will melt or softens while the sealing member **604** is substantially un-deformed so that the sealing member **604** would not interfere with or fill the venting aperture on the partitioning member or plate **602** when the venting temperature is reached. For example, where the venting temperature is set at 130°C as depicted in Figure 8, the urging member **606** will deform when the temperature of the battery has reached 130 °C while the sealing member will remain un-deformed or substantially un-deformed. When temperature trigger deformation occurs at the urging member, pressure inside the reaction chamber will push the sealing member to move away from the venting aperture to provide a venting path to relieve internal pressure.

[0038] In some embodiments, the urging member **606** is moulded into the shape of a circular cap having a base portion and a peripheral wall surrounding a base portion to define a recess or an indentation. In some embodiments, the peripheral wall might comprise a plurality notches being evenly or non-evenly spaced apart from each other on the periphery of the circular cap or about the central axis of the circular cap. The sealing member **604** has a head portion having a shape and dimension complementary to the recess portion of the urging member. In the present embodiment, the recess extends through the base portion to define a through aperture extending axially through the urging member. The urging member and the sealing member might be formed as a single piece by over-moulding with the head portion of the sealing member received inside the recess of the urging portion in a closely fitted manner by over-moulding. A plurality of concentric ribs is formed on an axial end of the base portion distal from the sealing member. The concentric ribs projecting axially from the base portion in an axial direction away from the sealing member to define a plurality of concentric grooves.

[0039] Similarly, a plurality of concentric ribs and/or a couple of protrusions might be formed on an axial end of the head portion of the sealing member proximate to the urging member. The concentric ribs and/or the couple of protrusions projecting axially from the head portion in an axial direction towards the urging member to complement or engage with same or

functionally equivalent contact plane or portions such as recesses arranged at the urging member.

[0040] In some embodiments, the sealing member might be a profiled member rather than a cylindrical member. For example, at least a portion (e.g. an upper portion, a lower portion, and/or an intermediate portion) of the sealing member might be of any regular shapes, such as triangular, square, rectangular, polygonal, star-like, cross-like, or the like, as shown in Figures 13A-13E. In some embodiments, the sealing member might be a profiled member (a member in various forms and dimensions) having a I-shaped or T-shaped cross-sectional profile, as shown in Figures 14A-14B.

[0041] In some embodiments, the urging member and the sealing member might be simply stacked together, or they could be welded, glued or bonded so as to form a sandwich like structure in case that either of both of the urging member and the sealing member being in form of a multi-layered member made of same or various materials, as shown in Figure 12A. The dash lines are used to indicate that the urging member and the sealing member might comprise multiple layers of same or different materials.

[0042] In some embodiments, the urging member and the sealing member might comprise complementary portions for engagement and might be joined together by interlocking joint, dowel joint, mechanical joint such as bolted joint, screw joint, welded joint, etc., or any other means well known in the art, as shown in Figures 11A-11C.

[0043] In some embodiments, the urging member and the sealing member might be of same size or dimension. Alternatively, the sealing member might be substantially larger/smaller than the urging member, or vice versa, as shown in Figures 12B-12C. In other words, the sealing member might be at least partially enclosed or wrapped by the urging member as shown in foregoing embodiments. Alternatively, the urging member might be in turn at least partially enclosed or wrapped by the sealing member depending on the actual design and requirements of a specific application.

[0044] The sealing member may have different shapes and dimensions, as depicted in Figures 13A to 13E. In general, regardless of the shape and dimension, each sealing member has a central portion having a foot print sufficient to cover the venting aperture during storage or normal operations.

[0045] While the sealing members depicted in Figures 13A to 13E are substantially prismatic, it should be appreciated that the sealing members need not be prismatic and may have non-uniform cross section along its axial or longitudinal direction.

[0046] As depicted in the example of Figures 14A and 14B, the sealing member may have a T- or I-shaped profiled along its length.

[0047] The melting or softening temperature of the urging member and the sealing member may be selected according to operational environmental requirements. Examples of temperature ranges are set out in Table 1 below:

	Urging Member Melting Temperature (T _g)	Sealing Member Melting Temperature (T _g)
Low temperature series	50-100, or 50-150 °C	300 or 301-500 °C
Normal temperature series	100-200 °C	300 or 301-500 °C
High temperature series	150-250 °C	300 or 301-500 °C
Ultra high temperature series	200-300 °C	300 or 301-500 °C

Table 1

[0048] In operation, energy conversion taking place in the reaction chamber will generate heat and gases. When the heat generated by the reaction chamber exceeds a threshold temperature corresponding to a predetermined limit, the resilient urging member **106**, **206**, **306**, **406**, **506** will soften and melt. As a result of the softening and/or melting of the urging member, the urging member will be deformed to spread the space inside the battery housing which was originally partially occupied by the material of the urging member, as depicted in Figure 5A. When this happens, the axial extent occupied by the urging member will be reduced and the internal pressure inside the reaction chamber will push the deformed urging member towards the top cap portion **226**. As a result a venting path to relieve internal pressure is built up and pressure inside the reaction chamber will be reduced without interrupting operation of the battery.

[0049] As depicted in Figure 8, the internal pressure of the battery **100** having a heat triggered venting assembly is well reduced before the temperature rises to an unacceptable level, compared to conventional pressure triggered venting arrangements.

[0050] An example prismatic battery **20** depicted in Figure 9 comprises an electrode plate group ("EPG") which is contained inside a battery housing and filled with an electrolyte (not shown) and a safety venting assembly. The electrode plate group comprises a positive electrode plate group which is connected to a positive battery terminal via a positive current collector, a negative electrode plate group which is connected to a negative battery terminal

via a negative current collector, and an insulating separator group providing insulation between the positive and negative electrode plate groups. The battery **20** have similar structural features as that of battery **10** except that the battery housing is prismatic, and both positive and negative battery terminals **224**, **226** are mounted on a common partitioning plate on which the safety assembly **100**, **200**, **300**, **400**, **500**, **600** are mounted.

[0051] In some embodiments, the example cylindrical battery **10** is a NiMH (Nickel Metal Hydride) battery having a positive electrode formed of nickel hydroxide, a negative electrode formed of hydrogen absorbing alloy, a separator and a strong alkaline electrolyte such as KOH, NaOH and LiOH. The separator may for example be formed of non-woven polypropylene (PP).

[0052] In some embodiments, the battery **10**, **20** is a lithium-ion battery which is filled with a non-aqueous electrolyte. In lithium-ion, batteries, lithium transitional metal oxides, for example, LiCoO_2 and LiMnO_4 , are suitable materials for use as the cathode or positive electrode material, while many carbonaceous compounds, for example, coke and non-graphitizing hard carbon, are suitable for use as the anode or negative terminal materials. The electrolyte is a non-aqueous electrolyte comprising, for example, LiBF_4 or LiPF_6 salts and solvent mixtures known to persons skilled in the art.

[0053] While the disclosure is with reference to the above examples, it should be appreciated that the examples are for illustration only and should not be used to limit the scope of disclosure.

[0054] Table of Numerals:

10, 20	Battery	100,200,300, 400, 500, 600	Venting / safety assembly
120	Battery can	102,202,302, 402, 502, 602	Partitioning member/ plate
122	Positive battery terminal	104,204,304, 404, 504, 604	Sealing member
124	negative battery terminal	106,206,306, 406, 506, 606	Urging member
126	Battery top cap end portion		

Claims

1. A battery comprising a reaction chamber and a safety vent assembly, the safety vent assembly comprising a sealing member and an urging member to urge the sealing member against a venting aperture on the battery reaction chamber to seal the battery reaction chamber under normal operation conditions, wherein the urging member is to soften on reaching a threshold venting temperature so that the sealing member is urged by pressure inside the reaction chamber to form or open up a venting path through which gases from the reaction chamber can pass or escape out of the reaction chamber through the venting aperture to reduce pressure inside the reaction chamber.
2. A battery according to Claim 1, wherein the urging member is resilient, and the urging member is under resilient compression to apply an axial urging force on the sealing member to seal the venting aperture under normal operation conditions.
3. A battery according to Claims 1 or 2, wherein the urging member is formed of a resilient material and has a softening or melting temperature below the softening or melting temperature of said sealing member.
4. A battery according to any preceding Claim, wherein the urging member is made of a resilient thermoplastic material including polypropylene, Nylon, polyethylene, etc.
5. A battery according to any preceding Claim, wherein the sealing member is made of a rubber including EPDM Rubber, synthetic rubber including silicone rubber and natural rubber including carbonised rubber.
6. A battery according to any preceding Claim, wherein the urging member is to melt upon reaching said venting threshold temperature.
7. A battery according to any preceding Claim, wherein the urging member defines an axial spacing between the sealing member and battery housing, and the urging member is to deform in an axial direction to provide clearance space for said sealing member to move away from the venting aperture when the gas pressure inside said battery reaction chamber reaches said venting threshold pressure.
8. A battery according to any preceding Claim 7, wherein the urging member defines at least a hollow region in said axial spacing so that the resilient materials forming said urging member are to flow into said hollow region when undergoing permanently deformation upon reaching the venting threshold temperature.

9. A battery according to Claims 7 or 8, wherein the urging member has a main body and local protrusions on the main body, the local protrusions make localised thermal contact with said battery housing.
10. A battery according to any preceding Claim, wherein the urging member has a washer, donut or grille shaped main body defining at least a hollow portion.
11. A battery according to any preceding Claim, wherein the urging member has a melting temperature between 50 and 300°C, including 80 to 280°C, and further including 100-200°C.
12. A battery according to any preceding Claim, wherein the sealing member has a melting temperature of between 300 or 301 and 500 °C, including 310 to 490°C, further including 350 to 450°C.
13. A battery according to any preceding Claim, wherein the sealing member is to be moved axially away from the venting aperture by a pressure below the venting threshold pressure absent said urging force of the urging member.
14. A battery according to any preceding Claim, wherein the sealing member and the urging member are formed as a single piece, including integration into a single piece by over-moulding or snap-fitting.
15. A battery according to any preceding Claim, wherein the sealing member and the urging member comprise complementary portions for coupling or engaging with each other by interlocking joint, dowel joint, and/or mechanical joint.
16. A battery according to any preceding Claim, wherein the sealing member is in form of any of triangular, square, rectangular, polygonal, star-like, cross-like shapes.
17. A battery according to any preceding Claim, wherein the sealing member is a profiled member having a I-shaped or T-shaped cross-sectional profile.
18. A battery according to any preceding Claim, wherein the urging member and/or the sealing member being in form of a multi-layered member made of same or various materials and multiple layers of the multi-layered member are stacked, welded, and/or glued together.
19. A battery according to any preceding Claim, wherein the urging member and the sealing member have an identical outer periphery or different outer periphery.

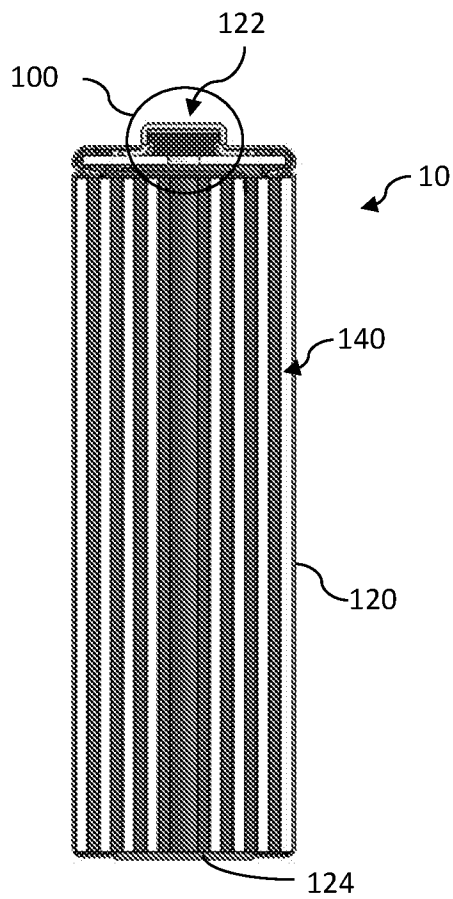


Fig. 1

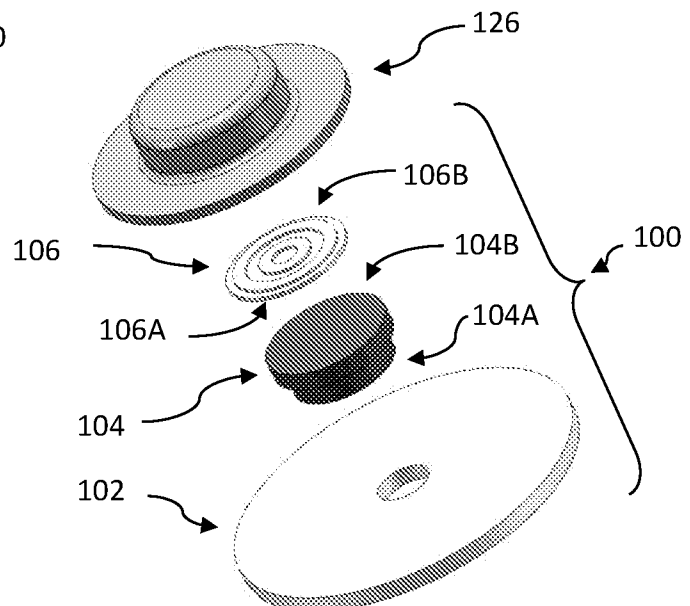


Fig. 2A

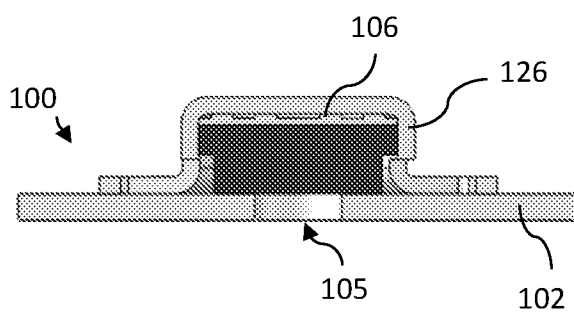


Fig. 2B

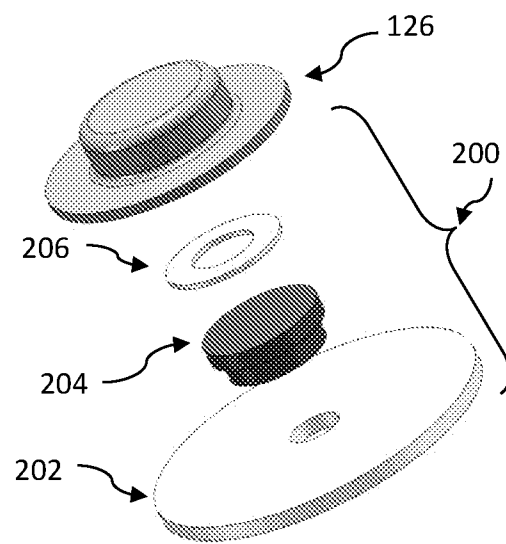


Fig. 3A

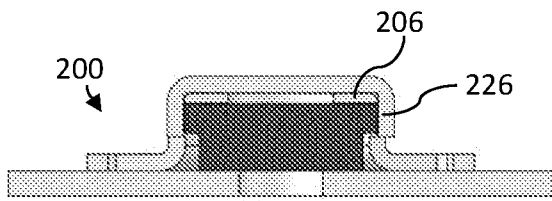


Fig. 3B

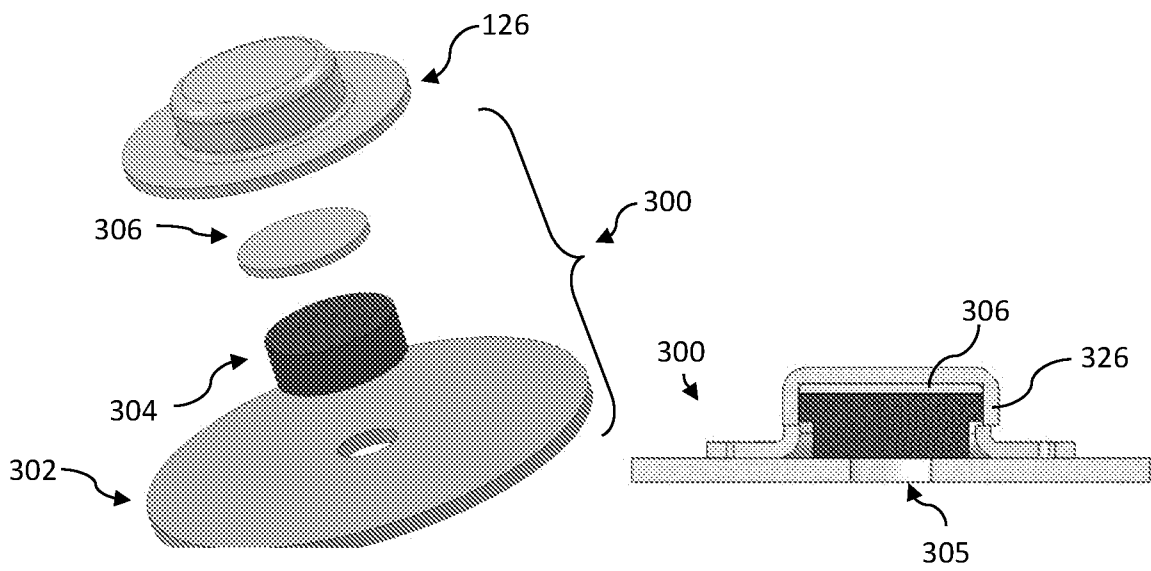


Fig. 4A

Fig. 4B

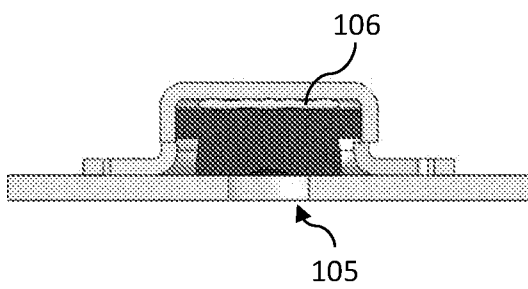


Fig. 5A

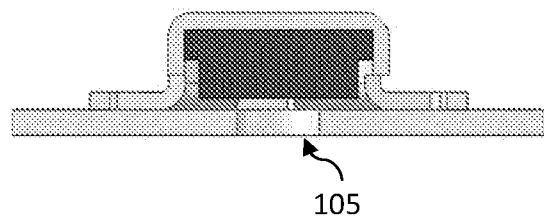


Fig. 5B

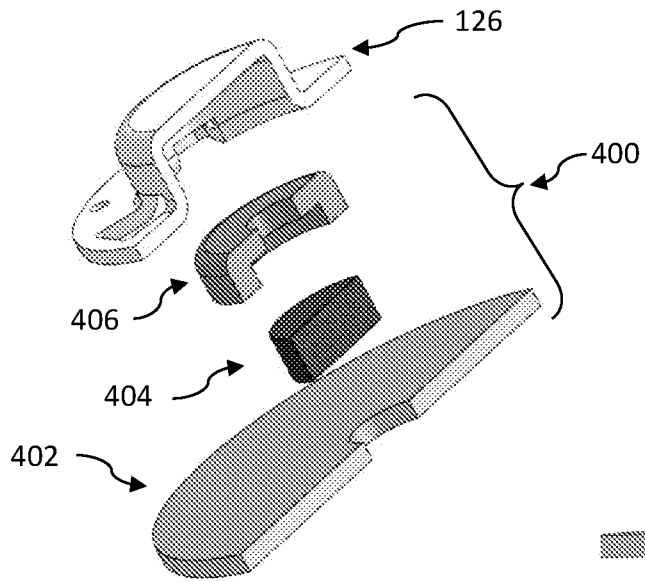


Fig. 6A

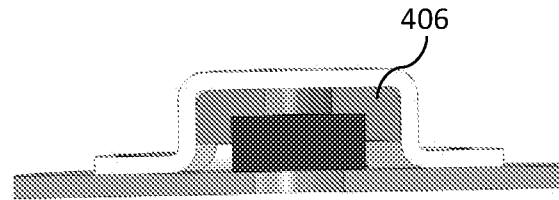


Fig. 6B

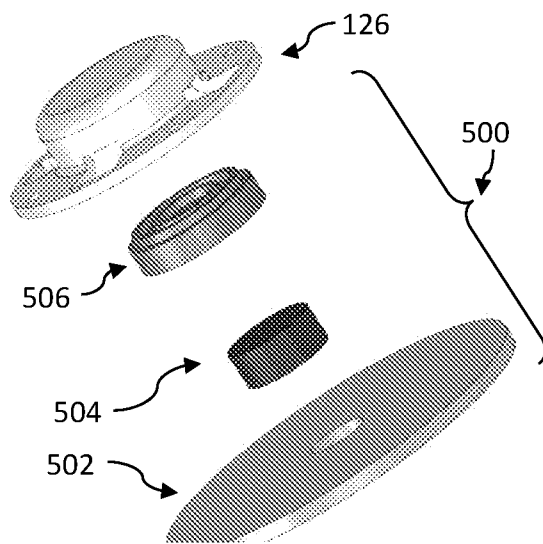


Fig. 7A

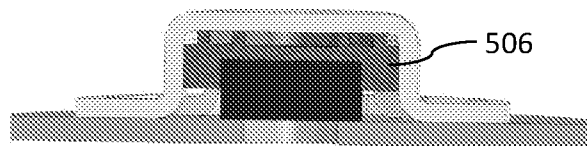


Fig. 7B

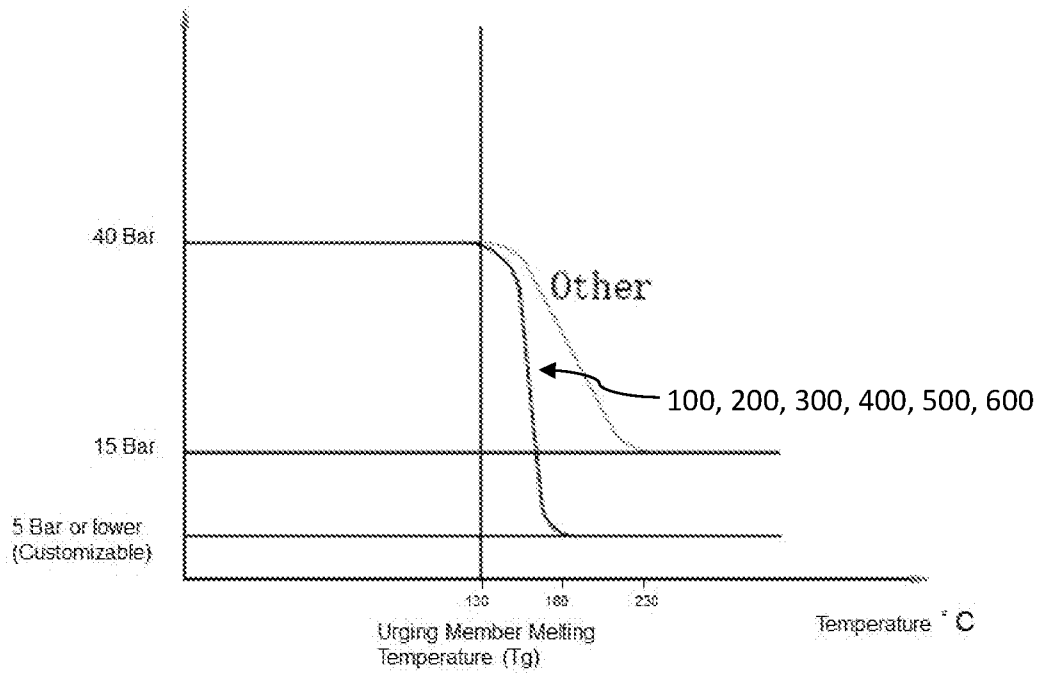


Fig. 8

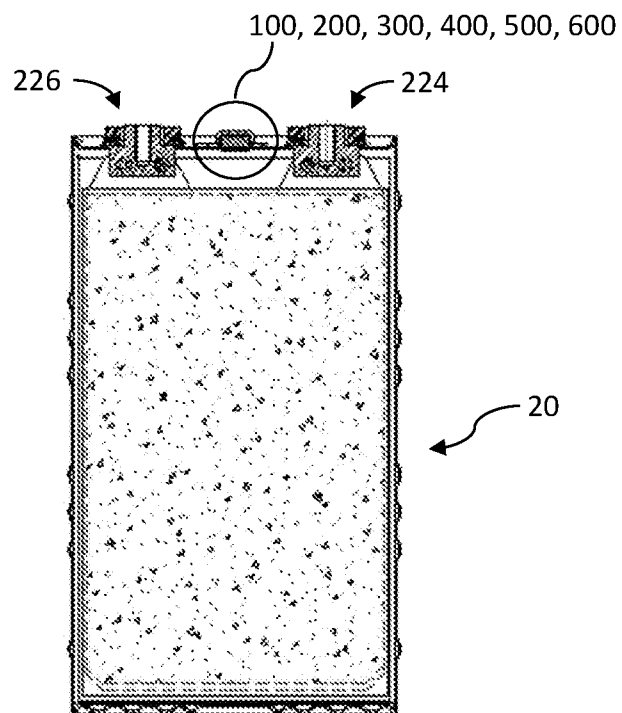


Fig. 9

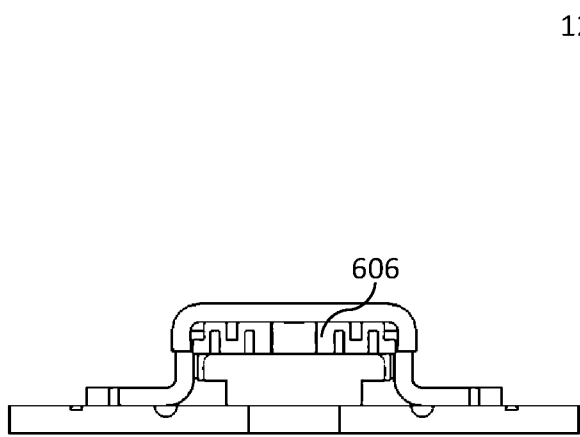


Fig. 10A

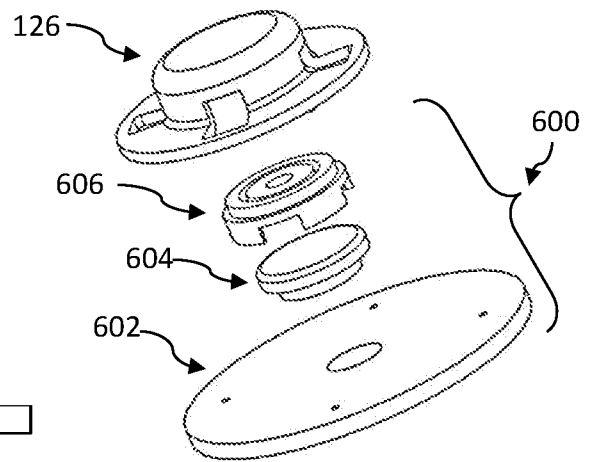


Fig. 10B

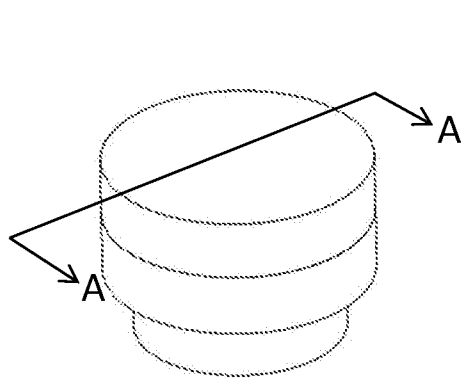


Fig. 11A

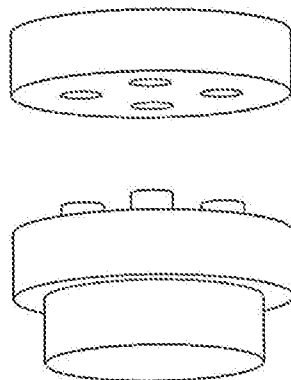


Fig. 11B




Fig. 11C




Fig. 12A




Fig. 12B




Fig. 12C




Fig. 13A




Fig. 13B




Fig. 13C




Fig. 13D




Fig. 13E




Fig. 14A




Fig. 14B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2015/058024

A. CLASSIFICATION OF SUBJECT MATTER

H01M 2/12(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT,CNKI,WPI,EPODOC:batter???,cell?,safety,vent+,seal+,soft+,melt+,resilient,rubber,polymer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP H06325742 A (TOSHIBA BATTERY) 25 November 1994 (1994-11-25) description paragraphs [0007]-[0009] and figure 1	1-19
A	CN 202231080 U (LI, ZHENQI, ET AL.) 23 May 2012 (2012-05-23) the whole document	1-19
A	CN 2899125 Y (BYD CO., LTD.) 09 May 2007 (2007-05-09) the whole document	1-19
A	CN 201498537 U (YU, XIANGYONG) 02 June 2010 (2010-06-02) the whole document	1-19
A	CN 101867067 A (SHENZHEN GREPOW BATTERY CO., LTD.) 20 October 2010 (2010-10-20) the whole document	1-19

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

24 December 2015

Date of mailing of the international search report

27 January 2016

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

ZHU,Ke

Facsimile No. (86-10)62019451

Telephone No. (86-10)61648064

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/IB2015/058024

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
JP	H06325742	A	25 November 1994	None	
CN	202231080	U	23 May 2012	None	
CN	2899125	Y	09 May 2007	None	
CN	201498537	U	02 June 2010	None	
CN	101867067	A	20 October 2010	CN 101867067 B	25 January 2012