(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
29 June 2006 (29.06.2006)

PCT

(10) International Publication Number
WO 2006/069043 A1

(51) International Patent Classification:
B41J 3/407 (2006.01) *B41M 5/30* (2006.01)
B41M 3/00 (2006.01) *B41M 5/34* (2006.01)
B41M 5/26 (2006.01)

(21) International Application Number:
PCT/US2005/046090

(22) International Filing Date:
20 December 2005 (20.12.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/021,577 22 December 2004 (22.12.2004) US

(71) Applicant *(for all designated States except US)*: **HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.** [US/US]; Hewlett-Packard Company, Intellectual Property Administration, 20555 S.H. 249, Houston, Texas 77070 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **VAN BROCKLIN, Andrew L.** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330 (US). **BHATT, Jayprakash** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330 (US). **VALLEY, Jeffrey M.** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330 (US).

(74) Agents: **HAYMOND, W., Bradley** et al.; Hewlett-Packard Company, Intellectual Property Administration, P.O. Box 272400, Mail Stop 35, Fort Collins, Colorado 80527-2400 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:
— *as to the identity of the inventor (Rule 4.17(i))*
— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) **Title:** A THERMALLY SENSITIVE MEDIUM AND METHODS AND SYSTEMS FOR FORMING AN IMAGE ON A THERMALLY SENSITIVE MEDIUM

(57) **Abstract:** A thermally sensitive medium (110, 152) includes at least one layer of temperature-activated dye, and antenna molecules (100) disposed in the layer of temperature-activated dye for converting radiant energy into thermal energy. A system for forming an image on a thermally sensitive medium (110, 152) includes a radiant energy source (104) for selectively heating portions of the thermally sensitive medium (110, 152) to activate temperature-activated dyes of the medium (110, 152). A method of forming an image on a thermally sensitive medium (110, 152) having multiple layers of temperature-activated dyes is performed by selectively heating portions of each of the layers of temperature-activated dyes with a light source to form the image.

WO 2006/069043 A1

A Thermally Sensitive Medium and Methods and Systems for Forming an Image on a Thermally Sensitive Medium

BACKGROUND

[0001] Many devices have been developed for printing or generating images on a medium. Some such devices, inkjet printers for example, operate by selectively ejecting ink onto the print medium to form the desired image. Other devices, such as laser printers, form an image using toner on an imaging drum and then transfer the image to a print medium. Photographic processes allow light to cause a chemical change in photographic film to capture an image.

[0002] A relatively new thermally sensitive process is known as thermo-autochrome printing. Thermo-autochrome printing is more akin to photography than printing, and has emerged recently in printers marketed as companion devices for use with a digital camera.

[0003] Thermo-autochrome paper contains three color-forming layers - cyan, magenta and yellow – that each include components that are released and combined by heat to form a dye or pigment of a desired color. In other words, each color-forming layer is sensitive to a particular temperature and displays its corresponding color when heated to that temperature. Of these colorants, yellow has the lowest temperature sensitivity, then magenta, followed by cyan. Specific portions of the color-forming layer can be heated to create the corresponding color in only the heated areas.

[0004] A typical thermo-autochrome printer is equipped with a thermal head that selectively heats portions of the paper to activate the dye or pigment. The thermal head typically has heating resistors that are brought into close

thermal contact with the thermo-autochrome paper to selectively heat the temperature-sensitive layers.

SUMMARY

[0005] A thermally sensitive medium includes at least one layer of temperature-activated dye, and antenna molecules disposed in the layer of temperature-activated dye for converting radiant energy into thermal energy. A system for forming an image on a thermally sensitive medium includes a radiant energy source for selectively heating portions of the thermally sensitive medium to activate temperature-activated dyes of the medium. A method of forming an image on a thermally sensitive medium having multiple layers of temperature-activated dyes is performed by selectively heating portions of each of the layers of temperature-activated dyes with a light source to form the image.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The accompanying drawings illustrate various embodiments of the present invention and are a part of the specification. The illustrated embodiments are merely examples of the present invention and do not limit the scope of the invention.

[0007] Fig. 1 is an illustration of an exemplary system for producing a color image on a medium according to principles described herein.

[0008] Fig. 2 is a flowchart illustrating an exemplary method of operating the system shown in Fig. 1.

[0009] Fig. 3 is an illustration of an optical disc player/writer incorporating the system shown in Fig. 1 according to principles described herein.

[0010] Fig. 4 is an illustration of an optical disc drive reader/writer incorporating the system shown in Fig. 1 according to principles described herein.

[0011] Fig. 5 is an illustration of a printer or printing device incorporating the system shown in Fig. 1 according to principles described herein.

[0012] Throughout the drawings, identical reference numbers designate similar, but not necessarily identical, elements.

DETAILED DESCRIPTION

[0013] The present specification describes a thermally sensitive medium and a system for forming or printing images on that medium. The systems and methods described use light to selectively heat the thermally sensitive medium so as to activate the desired color or color combination of dye for each pixel of the image being formed.

[0014] Fig. 1 is an illustration of an exemplary system for producing a color image on a medium according to principles described herein. As shown in Fig. 1, the thermally sensitive medium (110) described comprises three color-forming layers (112, 114, 116) on a substrate (118). The substrate (118) may be any of a wide variety of substrates including, but not limited to, paper, plastic, vinyl, a compact disc, a digital video (or versatile) disc (DVD), etc. Each color-forming layer (112, 114, 116) includes temperature-sensitive components that form a dye or pigment of a specific color when heated beyond a specific temperature.

[0015] Disposed on the substrate (118) are, from top to bottom, an overcoat layer (111), a yellow color-forming layer (112), a spacer layer (113), a magenta color-forming layer (114), a second spacer layer (115) and a cyan color-forming layer (116). Each of the layers will now be described in further detail.

[0016] The overcoat layer (111) protects the underlying layers and provides the upper surface for the medium (110). Below the overcoat layer (111) is the yellow color-forming layer (112). The material of this layer will react and combine to form a yellow colored dye or pigment when heated to a particular temperature.

[0017] A spacer layer (113) is disposed between the yellow color-forming layer (112) and the underlying magenta color-forming layer (114). The magenta color-forming layer (114) is also temperature-sensitive and will take on a magenta color when heated to a particular temperature. The temperature for activating the dye of the magenta layer (114) is higher than the temperature for activating the dye of the yellow layer (112).

[0018] A second spacer layer (115) is disposed between the magenta color-forming layer (114) and the underlying cyan color-forming layer (116). The cyan color-forming layer (116) is also temperature-sensitive and will take on a cyan color when heated to a particular temperature. The temperature for activating the dye of the cyan layer (116) is higher than the temperature for activating the dye of the magenta layer (116). Under the cyan layer (116), an adhesive layer (117) may be employed to secure the layers above to the substrate (118).

[0019] When the medium (110) is used to form an image, the image is divided into color components, i.e., yellow, magenta and cyan. The medium (110) is the selectively heated in certain areas at a first temperature that will activate the dye of the yellow layer (112). Thus, the yellow color component of the image is formed in the yellow color-forming layer (112) by selectively heating that layer (112). This yellow component of the image is then fixed in a manner that will be described in detail below.

[0020] Next, the medium (110) is selectively heated at a second temperature that will activate the dye of the magenta layer (114) and form the magenta color component of the image in the magenta color-forming layer (114). Again, the magenta component of the image is then fixed.

[0021] Lastly, the medium (110) is selectively heated at a third temperature that will activate the dye of the cyan layer (116) and form the cyan color component of the image in the cyan color-forming layer (116). Because the cyan color component is the last to be formed, it is possible, but not necessary, to fix the cyan component of the image.

[0022] This process of forming an image on the thermally sensitive medium (110) can be performed by the system illustrated in Fig. 1. As shown,

the system uses a radiant energy source, such as an optical pickup (104) that includes, for example, a laser (106) and an objective lens (105) that focuses the laser beam (108) from the laser (106) onto the thermally sensitive medium (110). In some examples, the laser is a 780 nm laser. The laser beam (108) is used to selectively heat the thermally sensitive medium (110) to activate the dye in the yellow layer (112) first and then in the magenta (114) and cyan (116) layers.

[0023] First, a processor (101) receives a signal (103) with the image data representing the image to be formed on the thermally sensitive medium (110). This signal (103) may convey the image already separated into the three color components or may convey a full color image which is separated into color components by the processor (101). The processor (101) then drives the laser (106) to selectively heat pixel regions on the thermally sensitive medium (110) in accordance with the color for that pixel. Each pixel of the image may require the activation of dye in one or more of the layers (112, 114, 116) to achieve the particular color shade for that pixel.

[0024] A media movement system (102) moves (109) the thermally sensitive medium (110) relative to the optical pickup (104) so that the laser beam (108) can be used to heat and form colored pixels over most, if not all, of the entire surface of the thermally sensitive medium (110). In some embodiments, a carriage (120) will also, or alternatively, move the optical pickup (104) and laser (106) relative to the thermally sensitive medium (110) so that the laser beam (108) can be used to heat and form colored pixels over the surface of the thermally sensitive medium (110).

[0025] At least the top, yellow color-forming layer (112) will include antenna molecules (100). An antenna molecule (100) absorbs radiant or light energy, for example, from the laser beam (108), and transforms the light energy into thermal energy or heat. Thus, as the laser beam (108) illuminates the thermally sensitive medium (110), the antenna molecules (100) in a region (119) of the yellow color-forming layer (112) receive the light from of the laser beam (108) and generate heat. Given enough time, this heat becomes sufficient to activate the yellow dye forming a yellow spot or pixel on the

thermally sensitive medium (110). In this fashion, the thermally sensitive medium (110) and/or the optical pickup (104) are moved (109) relative to each other, and the laser (106) is selectively activated to form the yellow component of the image being printed on the thermally sensitive medium (110).

[0026] After the yellow component of the image has been formed in the yellow color-forming layer (112), the thermally sensitive medium (110) is irradiated with an ultraviolet light source (107) at a first wavelength (e.g., 420 nm). The ultraviolet radiation neutralizes the un-activated dye in the yellow color-forming layer (112) so that it will not then respond to heat and take on a yellow color. Thus, the yellow component of the image appears in the yellow color-forming layer (112), but subsequent heating will not cause further portions of the layer (112) to yellow. In this way, the yellow component of the image is fixed on the thermally sensitive medium (110). The wavelength used to fix the yellow component of the image will deactivate the un-activated dye in the yellow layer (112), but will not affect dye formation in the other layers (114, 116).

[0027] As used herein and in the appended claims, dye is "activated" when it has been heated sufficient to visually assume a particular color. Consequently, "un-activated" dye is dye that has not been heated and has not assumed the specified color. When a color-forming layer is selectively exposed, some of the dye in the layer is activated, while some dye remains un-activated, such that the color component of the image being formed appears in the pattern of activated and un-activated dye. "Neutralizing" dye means that the un-activated dye is rendered incapable of responding to the temperatures that would normally activate the dye.

[0028] Next, the process described above is then repeated for the magenta component of the image. Again, the laser (106) of the optical pickup (104) is scanned over the thermally sensitive medium (110) and/or the thermally sensitive medium (110) is moved under the optical pickup (104). The laser (106) is selectively activated to heat portions of the thermally sensitive medium (110) corresponding to the magenta component of the image.

[0029] The antenna molecules (100) in the yellow color-forming layer will again generate heat that will diffuse down to the magenta layer (114) below.

This may be sufficient to selectively activate the magenta color-forming layer (114). Alternatively, the magenta color-forming layer (114) may also include antenna molecules (100) to help generate heat.

[0030] As indicated above, the magenta color-forming layer (114) is less temperature sensitive than the yellow color-forming layer (112). Consequently, the magenta color-forming layer (114) was not activated at the temperatures used previously to activate the yellow color-forming layer (112). Additionally, the relative movement of the thermally sensitive medium (110) and the optical pickup (104) can be slowed and/or the intensity of the laser beam (108) increased during printing of the magenta image component to allow the laser beam (108) to heat portions of the thermally sensitive medium (110) to a sufficient temperature to selectively activate the magenta color-forming layer (114).

[0031] After the magenta component of the image has been formed in the magenta color-forming layer (114), the thermally sensitive medium (110) is again irradiated with an ultraviolet light source (107). However, the ultraviolet light used is at a second wavelength (e.g., 365 nm) that neutralizes the un-activated dye in the magenta color-forming layer (114). Thus, the neutralized magenta dye will not then respond to heat and display the magenta color. Consequently, the magenta component of the image appears in the magenta color-forming layer (114), but subsequent heating will not cause further portions of the layer (114) to color. In this way, the magenta component of the image is fixed on the thermally sensitive medium (110).

[0032] After the magenta component of the image is formed and fixed, the process is repeated a final time for the cyan component of the image. Again, the laser (106) of the optical pickup (104) is scanned over the thermally sensitive medium (110) and/or the thermally sensitive medium (110) is moved under the optical pickup (104). The laser (106) is selectively activated to heat portions of the thermally sensitive medium (110) corresponding to the cyan component of the image.

[0033] The antenna molecules (100) in the yellow color-forming layer will again generate heat that will diffuse down to the magenta layer (114) and

the cyan layer (116) below. This may be sufficient to selectively activate the cyan color-forming layer (116). Alternatively, either of both of the magenta color-forming layer (114) and the cyan color-forming layer (116) may also include antenna molecules (100) to help generate heat.

[0034] As indicated above, the cyan color-forming layer (114) is the least temperature sensitive layer. Consequently, the cyan color-forming layer (116) was not activated at the temperatures used previously to activate the yellow color-forming layer (112) or the magenta color-forming layer (114). Additionally, the relative movement of the thermally sensitive medium (110) and the optical pickup (104) will again be slowed and/or the intensity of the laser beam (108) increased during printing of the cyan image component to allow the laser beam (108) to heat portions of the thermally sensitive medium (110) to a sufficient temperature to selectively activate the cyan color-forming layer (116).

[0035] After the cyan component of the image has been formed in the cyan color-forming layer (116), the process of forming the desired image is essentially complete. It is not necessary to irradiate the thermally sensitive medium (110) with the ultraviolet light source (107) to fix the cyan component of the image because there will likely be no additional heating of the thermally sensitive medium (110) to temperatures that might further activate the remaining un-activated cyan dye in the cyan color-forming layer (116).

[0036] By way of example, the following dye compounds may be used: IR780 (Aldrich™ 42,531-1); IR1040 (Aldrich™ 40,513-2); IR783 (Aldrich™ 54,329-2); SynTec™ 9/1; SynTec™ 9/3; some metal complexes, such as dithiolane metal complexes and indoaniline metal complexes; Phthalocyanines or Naphthalocyanines (e.g., hexyl naphthalocyanine); and 800 NP (a proprietary dye available from Avecia™. The dye molecules may be dissolved in to the matrix of each dye layer (112, 114, 116) and/or may be encapsulated with an appropriately temperature-sensitive encapsulant used in each layer.

[0037] The processor (101) controls and coordinates the operation of the various components of the system, i.e., the radiant energy source, the media movement system (102), the carriage (120) and the ultraviolet light

source (107). In this way, the medium (110) is moved relative to the radiant energy source in the right pattern and at the right speed to allow the laser (106) to write each successive color component of the image to the corresponding layer (112, 114, 116) of the medium (110), with the yellow and magenta components being fixed by the ultraviolet light source (107) after formation to allow for the formation of the subsequent color component(s). The resulting image may be a photo-quality image.

[0038] Fig. 2 is a flowchart illustrating an exemplary method of operating the system shown in Fig. 1. As shown in Fig. 2, and as described above, the thermally sensitive medium is first selectively exposed to the light and consequent heat from the radiant energy source to write the yellow color component of the image being printed (step 201). Where sufficiently heated by the intense light of the radiant energy source, the yellow color-forming layer takes on a yellow color. By selectively heating the yellow color-forming layer, the yellow component of the image being printed is formed on the medium.

[0039] Next, the medium is irradiated with ultraviolet light at a wavelength that will neutralize the un-activated yellow dye in the yellow color-forming layer (step 202). It is not necessary to selectively expose the medium with the ultraviolet light. Rather, the entire medium can be exposed to the ultraviolet light at once and movement of the medium may not be necessary for this step.

[0040] The color activation and deactivation can be done consecutively in some embodiments if, for example, the deactivation light source (365 nm or 420nm) is also a point source that trails the activation laser. Note also that the deactivation light source may be directed at previously printed tracks so that an insignificant portion of its light will be directed at unmarked tracks. This eliminates the possibility of destroying the color forming ability of tracks that have not yet passed under the laser.

[0041] Next, the thermally sensitive medium is again selectively exposed to the light and consequent heat from the radiant energy source to write the magenta color component of the image being printed (step 203). Where sufficiently heated by the intense light of the radiant energy source, the

magenta color-forming layer takes on a magenta color. Thus, by selectively heating the magenta color-forming layer, the magenta component of the image being printed is formed on the medium. This will entail slower relative movement of the medium and the radiant energy source to allow the light from the radiant energy source to sufficiently heat the magenta color-forming layer at selected locations. Alternatively or additionally, the power of the light from the radiant energy source can be increased to reach the higher temperatures needed to activate lower color-forming layers.

[0042] Next, the medium is again irradiated with ultraviolet light at a second wavelength that will neutralize the un-activated magenta dye in the magenta color-forming layer (step 204). Again, it is not necessary to selectively expose the medium with the ultraviolet light. Rather, the entire medium can be exposed to the ultraviolet light at once and movement of the medium may not been necessary for this step.

[0043] Lastly, the thermally sensitive medium is again selectively exposed to the light and consequent heat from the radiant energy source to write the cyan color component of the image being printed (step 205). Where sufficiently heated by the intense light of the radiant energy source, the cyan color-forming layer takes on a cyan color. By selectively heating the cyan color-forming layer, the cyan component of the image being printed is formed on the medium. This will again entail slower relative movement of the medium and the radiant energy source and/or an increase in laser power to allow the light from the optical pickup to sufficiently heat the cyan color-forming layer at selected locations. As indicated above, each successive layer (yellow, magenta, and cyan) is less temperature-sensitive than the preceding layer, i.e., requires a higher temperature to activate the dye.

[0044] Optical discs have fast become an industry standard for data storage in the fields of computers, video, and music. Optical discs include, but are not limited to, compact discs (CDs), digital video (or versatile) discs (DVDs), and game system discs in a variety of formats. Commercially produced optical discs typically have digital data recorded on one side of the disc and a visual display, or a label printed on the other side of the disc.

[0045] As optical technology has advanced, writeable and re-writable optical discs as well as equipment for writing onto the discs have become reasonably priced within the grasp of ordinary consumers. Thus, many consumers currently have the ability to burn data onto optical discs with home or office computers that have optical disc drives. For example, consumers may, in some instances, purchase CD or DVD data from a website on the Internet and burn the data onto their own CD or DVD. If the data is purchased in this way, it will be written to a blank, unmarked disc on which the user may very much want to form a label.

[0046] Consequently, many consumers desire to be able to create a display or label on a non-data side of an optical disc on which data has or will be stored. Thus, some of the applications of the system described above will include stacking temperature sensitive color-forming layers on a side of an optical disc to create a thermally sensitive medium on an optical disc that can be used to form a visual display or label on one side of the disc.

[0047] The data on an optical disc is read from the disc using an optical pickup. Laser light from the optical pickup is typically focused on the optical disc and, depending on the data written to the disc, is reflected or not reflected at each point on the disc. In this way, as the disc rotates beneath the optical pickup and the optical pickup moves radially over the disc, digital, binary data can be written to and read from an optical disc.

[0048] Fig. 3 is an illustration of an optical disc player/writer (131) designed to retrieve data from an optical disc (130). The optical disc (130) may be, for example, a CD, DVD, game disc or other disc. The player (131) may be designed only to read data from the optical disc (130) or may also be designed to write data to the disc (130).

[0049] The optical disc player shown in Fig. 3 also incorporates the system shown in Fig. 1 according to principles described herein. The optical pickup of the disc player (131) can be used as the radiant energy source (104, Fig. 1) in the system for printing an image on a thermally sensitive medium that is formed on the optical disc (130). As indicated above, the substrate (118, Fig. 1) of a thermally sensitive medium may be an optical disc.

[0050] The spindle (132) that rotates the disc (130) may function as the medium movement system (102, Fig. 1) described above. Additionally, the player (131) will include a carriage (120) for translating the optical pickup (114) radially over the disc (130).

[0051] The optical disc player (131) also includes a UV light source (107). The UV light source (107) can irradiate the disc (130) between the printing of successive color components to deactivate unused dye as described above. The optical disc player (131) also includes a processor (101) similar to that described above for controlling the various components described to write images to the thermally sensitive medium disposed on the optical disc (130).

[0052] Consequently, the user can place the disc (130) in the player (131) with a data side presented to the optical pickup (114) and then read data from or write data to the disc (130). The user can then flip the disc (130) to present a thermally sensitive medium side of the disc (130) to the optical pickup (114). The player (131) can then be used to print an image on the thermally sensitive medium of the disc (130).

[0053] Fig. 4 is an illustration of an optical disc drive reader/writer incorporating the system shown in Fig. 1 according to principles described herein. As shown in Fig. 4, in addition to a stand-alone player/writer, the system of Fig. 1 can be incorporated into an optical disc drive (140) that is a component of a larger system, for example, a personal computer, laptop computer, server, etc.

[0054] Fig. 5 is an illustration of a printer or printing device incorporating the system shown in Fig. 1 according to principles described herein. As shown in Fig. 5, a printing device (151) may include a processor (101), radiant energy source (114) and ultravi9olet light source (107) as described above.

[0055] Sheets of paper or other media (152) are prepared for the printing device (151) by placing the various color-forming layers of temperature-activated dye on the substrate of the paper (152) to form a thermally sensitive medium. The medium (152) is them moved through the printing device (151) and relative to the radiant energy source (114) by a media feeding system

(150). The carriage (120) also moves the radiant energy source (114) relative to the medium (152).

[0056] Using the methods described above, the printing device (151) then forms a desired image on the thermally sensitive medium (152). The thermally sensitive printing system described herein can thus be adapted for a wide variety of applications.

[0057] The preceding description has been presented only to illustrate and describe embodiments of the invention. It is not intended to be exhaustive or to limit the invention to any precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be defined by the following claims.

CLAIMS

WHAT IS CLAIMED IS:

1. A thermally sensitive medium (110, 152) comprising:

at least one layer of temperature-activated dye; and

antenna molecules (100) disposed in said layer of temperature-activated dye for converting radiant energy into thermal energy.

2. The medium (110, 152) of claim 1, wherein each successive layer of dye from a surface of said medium (110, 152) is less temperature sensitive than a preceding layer of dye.

3. The medium (110, 152) of claim 1, wherein said at least one layer of dye is disposed on a substrate (118) with an adhesive layer (117).

4. The medium (110, 152) of claim 1, further comprising multiple layers of temperature-activated dye and spacer layers between said layers of dye.

5. A system for forming an image on a thermally sensitive medium (110, 152) comprising:

a radiant energy source (104) for selectively heating portions of said thermally sensitive medium (110, 152) to activate temperature-activated dyes of said medium (110, 152).

6. The system of claim 5, wherein a power of said radiant energy source (104) is increased for selectively heating a layer of temperature-activated dye through one or more other layers on said medium (110, 152).

7. The system of claim 5, further comprising an ultraviolet light source (107) for irradiating said medium (110, 152) to selectively neutralize said temperature-activated dyes.

8. The system of claim 5, further comprising antenna molecules (100) disposed in at least one layer of dye on said medium (110, 152), said molecules (100) converting light energy from said radiant energy source (104) into thermal energy.

9. A method of forming an image on a thermally sensitive medium (110, 152) comprising multiple layers of temperature-activated dyes, said method comprising selectively heating portions of each of said layers of temperature-activated dyes with a light source to form said image.

10. The method of claim 9, further comprising successively forming a particular color component of said image in each of said layers of dye.

11. The method of claim 9, wherein selectively heating portions of each of said layers of dye comprises adjusting a power of said light source (107) based on a depth of a layer of temperature-activated dye being selectively heated.

12. The method of claim 9, further comprising irradiating said medium (110, 152) with ultraviolet light after forming a color component of said image in a particular layer of dye to neutralize un-activated dye in that layer.

13. The method of claim 9, wherein said medium (110, 152) comprises a yellow color-forming layer (112) disposed over a magenta color-forming layer (114) disposed over a cyan color-forming layer (116), with each layer being less temperature sensitive than a preceding layer.

14. An optical disc player or drive (131, 140) for forming an image on a thermally sensitive medium (110, 152) disposed on an optical disc (130), said drive (131, 140) comprising:

a radiant energy source (104) for selectively heating portions of said thermally sensitive medium (110, 152) to activate temperature-activated dyes of said medium (110, 152); and

an ultraviolet light source (107) for irradiating said medium (110, 152) to selectively neutralize said temperature-activated dyes.

15. The player or drive (131, 140) of claim 14, further comprising a carriage (120) for moving said radiant energy source (104) relative to said medium (110, 152), wherein a speed of said carriage (120) is adjusted based on a depth of a layer of temperature-activate dye being activated by said radiant energy source (104).

16. The player or drive (131, 140) of claim 14, further comprising a spindle (132) for rotating said medium (110, 152) relative to said radiant energy source (104), wherein a speed of said spindle (132) is adjusted based on a depth of a layer of temperature-activate dye being activated by said radiant energy source (104).

17. A printing device (151) for forming an image on a thermally sensitive medium (110, 152), said device (151) comprising:

a radiant energy source (104) for selectively heating portions of said thermally sensitive medium (110, 152) to activate temperature-activated dyes of said medium (110, 152); and

an ultraviolet light source (107) for irradiating said medium (110, 152) to selectively neutralize said temperature-activated dyes.

18. The device (151) of claim 17, further comprising a carriage (120) for moving said radiant energy source (104) relative to said medium (110, 152), wherein a speed of said carriage (120) is adjusted based on a depth of a layer of temperature-activate dye being activated by said optical pickup (104).

19. The device (151) of claim 17, further comprising a media feeding system (150) for moving said medium (110, 152) relative to said radiant energy source (104), wherein a speed of said media feeding system (150) is adjusted based on a depth of a layer of temperature-activate dye being activated by said radiant energy source (104) .

20. The device of claim 17, wherein said ultraviolet light source (107) selectively outputs ultraviolet light of at least two separate wavelengths corresponding to wavelengths effective to neutralize temperature-activated dye in different color-forming layers of said medium (110, 152).

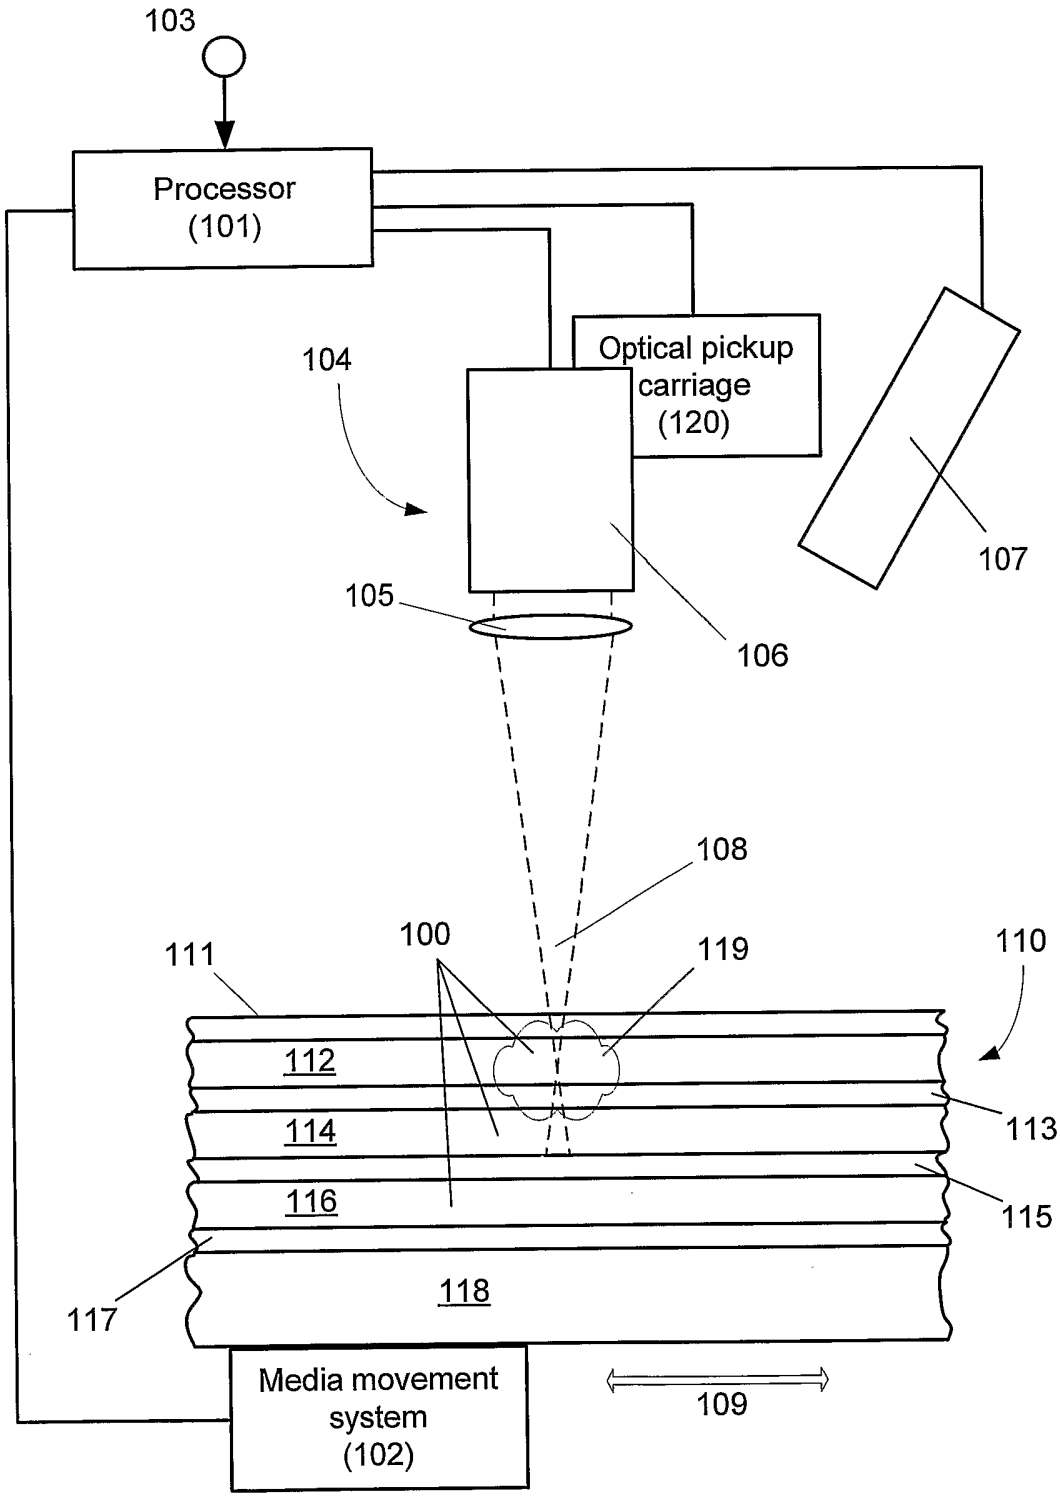

103
Processor
(101)
Optical pickup
carriage
(120)
104
107
105
106
108
100
111
119
110
112
113
114
116
115
118
117
Media movement
system
(102)
109

Fig. 1

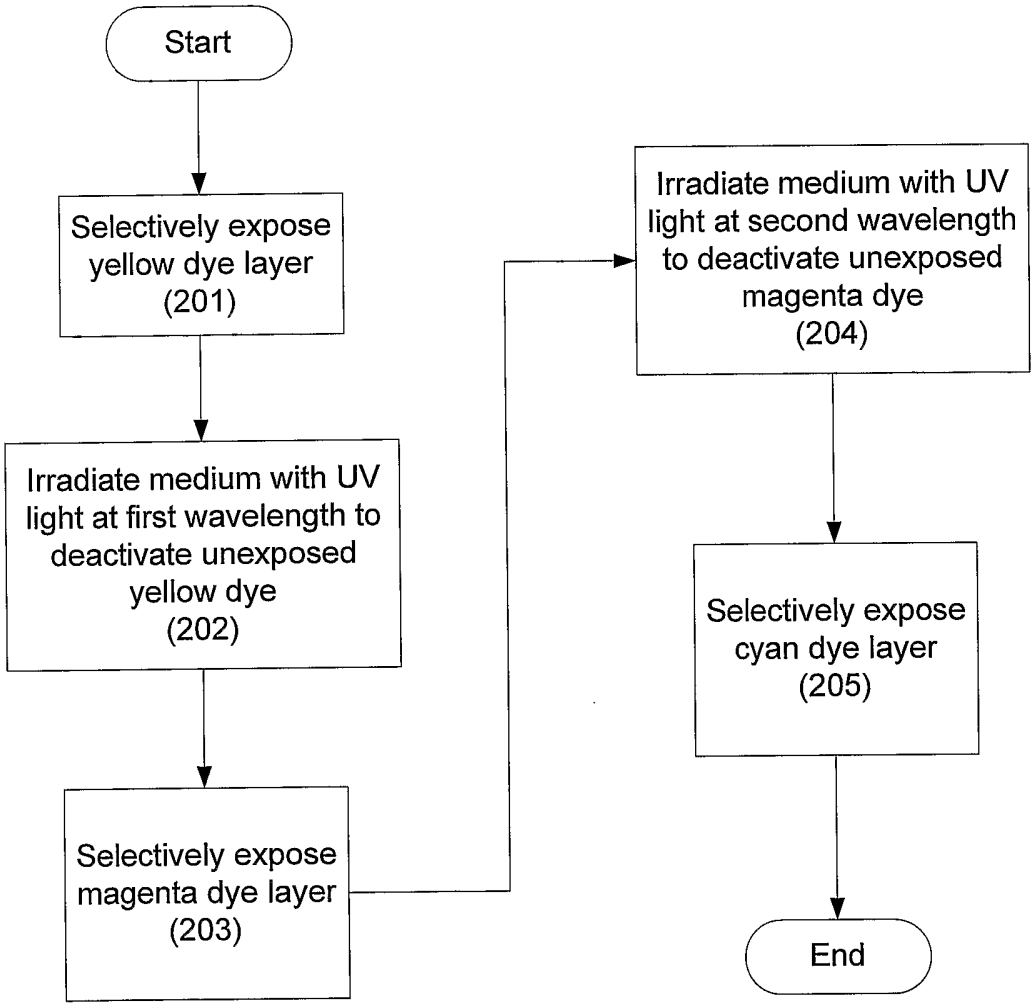
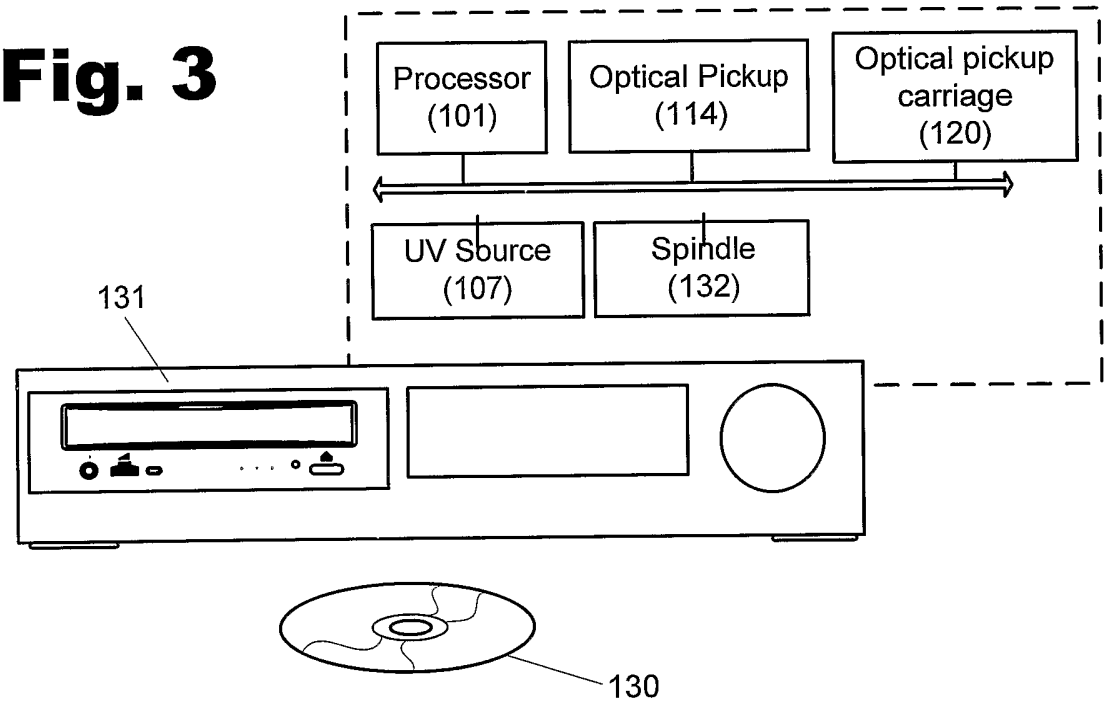

Start
Selectively expose yellow dye layer (201)
Irradiate medium with UV light at first wavelength to deactivate unexposed yellow dye (202)
Selectively expose magenta dye layer (203)
Irradiate medium with UV light at second wavelength to deactivate unexposed magenta dye (204)
Selectively expose cyan dye layer (205)
End

Fig. 2

Fig. 3


Processor
(101)
Optical Pickup
(114)
Optical pickup
carriage
(120)
UV Source
(107)
Spindle
(132)
131
130

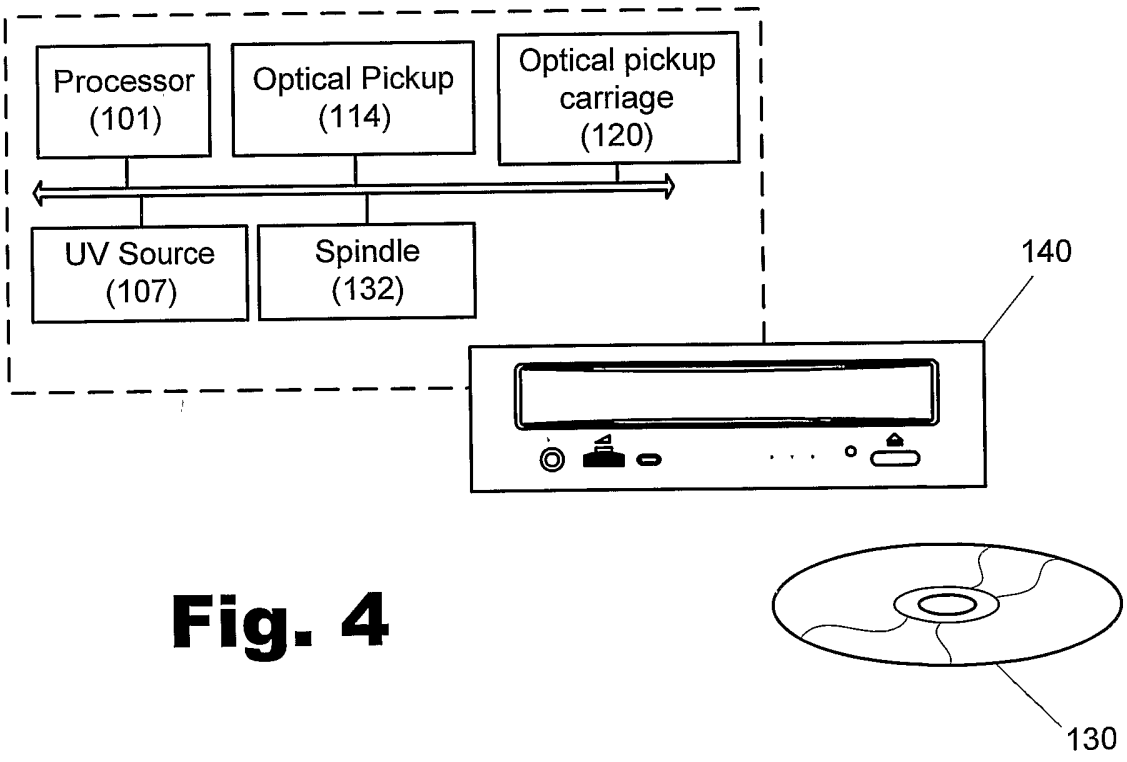

Processor
(101)
Optical Pickup
(114)
Optical pickup
carriage
(120)
UV Source
(107)
Spindle
(132)
140
130

Fig. 4

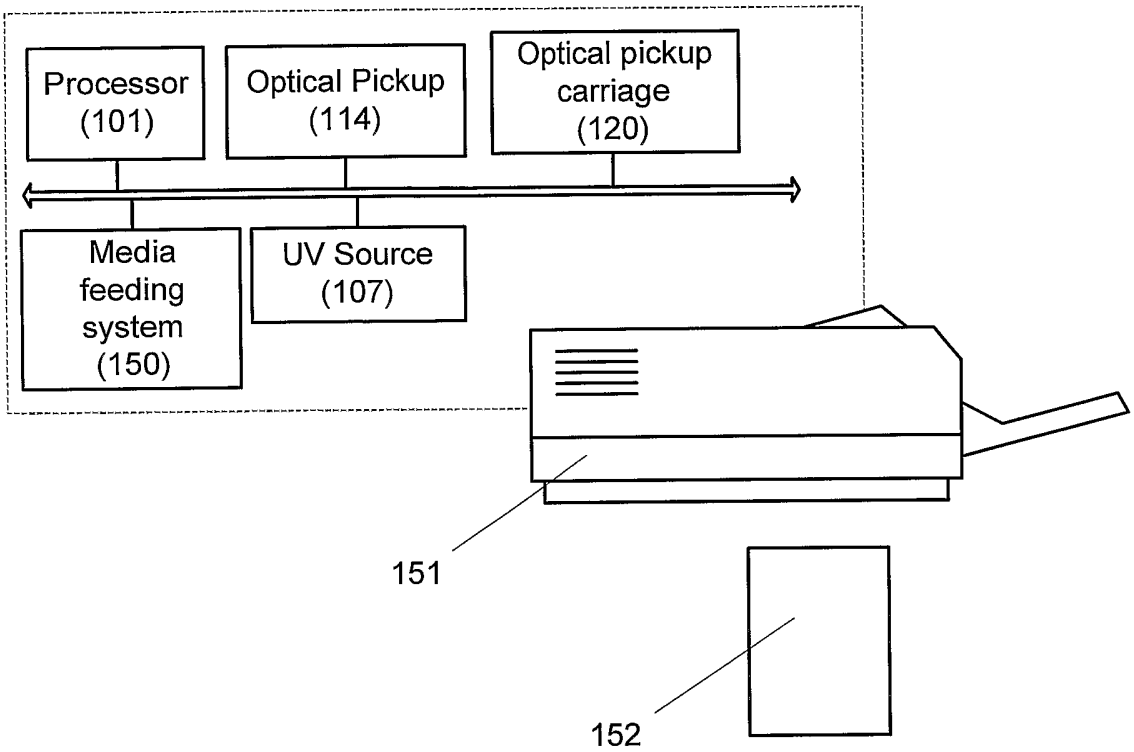

Processor
(101)
Optical Pickup
(114)
Optical pickup
carriage
(120)
Media
feeding
system
(150)
UV Source
(107)
151
152

Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/046090

A. CLASSIFICATION OF SUBJECT MATTER
INV. B41J3/407 B41M3/00 B41M5/26 B41M5/30 B41M5/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B41J B41M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/179679 A1 (MORISHIMA MORITO) 25 September 2003 (2003-09-25) page 1, paragraph 5 - paragraph 12 page 5, paragraph 123 - page 6, paragraph 129 page 10, paragraph 172 page 12, paragraph 189 claims 25,27	1-20
X	EP 1 398 169 A (NIPPON PAPER INDUSTRIES CO., LTD) 17 March 2004 (2004-03-17) page 3, paragraphs 11,14 - paragraph 17 page 7, paragraph 28	1-8

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
27 April 2006	08/05/2006

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Whelan, N

Form PCT/ISA/210 (second sheet) (April 2005)

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/046090

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/169717 A1 (BRONSON BARRY) 2 September 2004 (2004-09-02) page 2, paragraph 19 - paragraph 24 page 3, paragraph 33 - paragraph 39 page 4, paragraph 50 - paragraph 51	5-13
X	US 2003/161224 A1 (ANDERSON BRADLEY J ET AL) 28 August 2003 (2003-08-28) page 1, paragraph 8 - paragraph 10 page 2, paragraph 28 page 3, paragraph 31 page 3, paragraph 35	5-13
X	EP 1 081 695 A (STAR MICRONICS CO., LTD) 7 March 2001 (2001-03-07) paragraph [0001] paragraph [0007] paragraph [0021] paragraph [0050] paragraph [0057] - paragraph [0062]	5-8
E	WO 2005/120849 A (ESSELTE; HEYSE, GEERT; VANDERMEULEN, KRIS; VLEURINCK, JOS; VAN AERDE,) 22 December 2005 (2005-12-22) the whole document	1-20
P,X	WO 2005/026839 A (HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P; GORE, MAKARAND, P) 24 March 2005 (2005-03-24) page 2, line 14 - line 32 page 6, line 4 - line 9 page 7, line 15 - line 20 page 12, line 24 - line 30 page 13, line 17 - line 27 page 15, line 17 - line 18 page 15, line 29 - page 16, line 8	1,5,6,8
E	WO 2006/038996 A (HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P; GORE, MAKARAND, P) 13 April 2006 (2006-04-13) page 2, line 30 - page 3, line 12 page 6, line 1 - line 7 claims	1,5,6,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2005/046090

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003179679 A1	25-09-2003	JP 2003272240 A	26-09-2003
EP 1398169 A	17-03-2004	WO 02096663 A1	05-12-2002
		JP 2002347352 A	04-12-2002
		US 2004171485 A1	02-09-2004
US 2004169717 A1	02-09-2004	US 2003133005 A1	17-07-2003
		US 2004056944 A1	25-03-2004
		US 2004051778 A1	18-03-2004
US 2003161224 A1	28-08-2003	NONE	
EP 1081695 A	07-03-2001	NONE	
WO 2005120849 A	22-12-2005	NONE	
WO 2005026839 A	24-03-2005	US 2005053864 A1	10-03-2005
WO 2006038996 A	13-04-2006	US 2006068315 A1	30-03-2006