



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.11.2014 Bulletin 2014/48

(51) Int Cl.:
E21B 33/06 ^(2006.01) **F16L 23/00** ^(2006.01)
F16L 27/00 ^(2006.01)

(21) Application number: **14171890.8**

(22) Date of filing: **08.01.2010**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(72) Inventor: **Parlee, James Clinton Thomas**
Houston, TX 77032 (US)

(74) Representative: **Bennett, Adrian Robert J. et al**
A.A. Thornton & Co.
10 Old Bailey
London EC4M 7NG (GB)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
10700143.0 / 2 521 836

(71) Applicant: **Halliburton Energy Services, Inc.**
Houston, TX 77072 (US)

Remarks:

This application was filed on 11-06-2014 as a
divisional application to the application mentioned
under INID code 62.

(54) **Alignment of bop stack to facilitate use of a rotating control device**

(57) An alignment system can include at least one alignment device positioned between two flanges, the alignment device having a greater thickness on one side of the alignment device than on an opposite side of the alignment device. A method of producing a relative angular offset between a first flange and a second flange can include positioning at least one alignment device between the first and second flanges, and securing the alignment device between the first and second flanges, thereby producing the angular offset. A method of aligning an axis of a blowout preventer stack with a rig floor can include positioning at least one alignment device between a first flange, and a second flange of the blowout preventer stack; and securing the alignment device between the first and second flanges, thereby producing an angular offset of the second flange relative to the first flange.

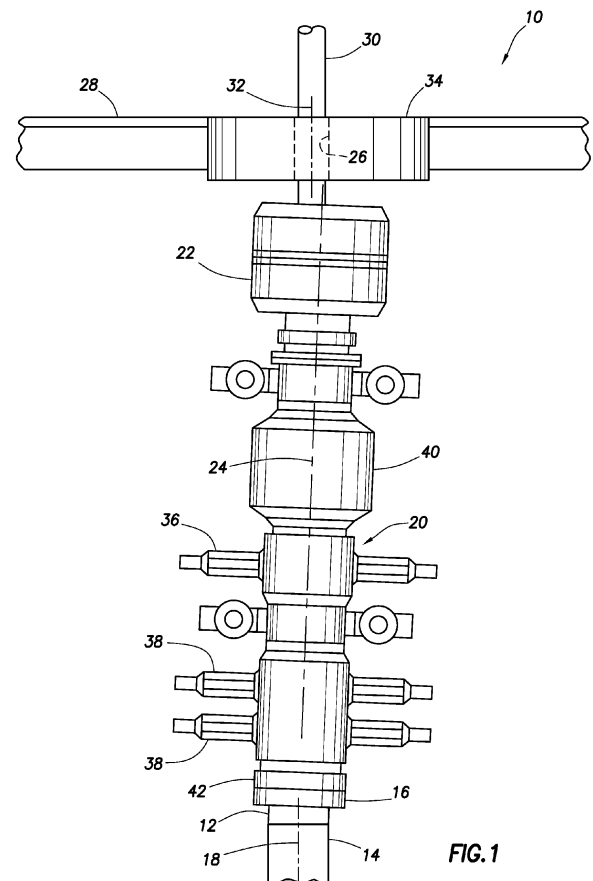


FIG. 1

Description**TECHNICAL FIELD**

[0001] The present disclosure relates generally to connecting components with flanged connections and, in specific examples described herein, more particularly provides for alignment of a BOP stack to facilitate use of a rotating control device.

BACKGROUND

[0002] In various industries, assemblies of components are connected using flanged connections. Typically, the mating surfaces of flanges in the flanged connections are intended to be oriented in a particular direction relative to the associated components being connected. If, however, the flanges are not suitably oriented, or the intended direction changes, the connected components will not be appropriately aligned with each other, or with other equipment.

[0003] An example of such a system is disclosed in GB 2 340 570. An annular joint is disclosed therein which includes internal and external faces, a plane of symmetry passing through an axis, and includes first and second contact zones contained respectively in first and second planes. The first and second planes intersect to form a dihedral having an edge perpendicular to the plane of symmetry, where the dihedral angle is between and degrees. The joint may be made of steel, and may have a polygonal, isosceles trapezoidal, rectangular trapezoidal, symmetrical oval, or asymmetrical oval cross section. Preferably the joint is used to connect two ducting members provided with flanges at each end, so that the longitudinal axes of the ducting members are not aligned. The joint may be used in the production of a curved ducting, eg a riser, for connecting an equipment item installed on the sea bed with a drilling platform or oil production platform.

[0004] GB 130 846 also discloses two circular or annular wedges, bored to the inner diameter of a pipe and turned to the outer diameter of the flanges. The user can take the device and, guided by graduations, revolve the two wedges relatively to one another. The device can then be drilled to the flanges and bolted together.

[0005] It will be appreciated that improvements are needed in the art of aligning components connected with flanged connections.

BRIEF DESCRIPTION OF THE DRAWINGS**[0006]**

FIG. 1 is a schematic elevational view of a system and associated method embodying principles of the present disclosure.

FIG. 2 is an enlarged scale schematic cross-section-

al view of flanges and an alignment device as used in the system and method.

FIG. 3 is a schematic cross-sectional view of another configuration of the flanges and multiple alignment devices as used in the system and method.

FIG. 4 is a schematic cross-sectional view of yet another configuration of the flanges and multiple alignment devices as used in the system and method.

DETAILED DESCRIPTION

[0007] According to the present invention there is provided a method of aligning an axis of a blowout preventer stack with a rig floor as defined in the appended claim 1.

[0008] Further preferable features of the method of the present invention are defined in the appended dependent claims 2 to 7.

[0009] This disclosure relates to alignment of equipment wherein components are connected using flanges. In specific examples described below, a system and method are provided for alignment of blowout preventers (BOP's), rotating control devices (RCD's, also known as rotating control heads and rotating blowout preventers) with a rig floor and/or a casing string. However, the principles of this disclosure are not limited to only these examples.

[0010] In conventional well construction practice, a flanged casing bowl is welded to the top of casing at a wellhead. The casing bowl allows secure, sealed attachment of blowout preventers and a rotating control device to the casing at the surface during well drilling and completion operations.

[0011] Unfortunately, casing bowls are not always welded to the top of the casing so that they are level (i.e., with the top flange surface of the casing bowl perfectly horizontal). Thus, when the BOP's and RCD are bolted to the casing bowl, they are also not level, and any drill string or completion string which passes through the BOP's and RCD tend to rub on the inner surfaces of the BOP's and RCD. This causes damage to the seals and various other internal components of the BOP's and RCD, requiring expensive and time-consuming maintenance for these components.

[0012] The BOP's and RCD are preferably aligned with an opening in a rig floor above the BOP's and RCD. If a rotary table is used in the rig floor, then a longitudinal axis of the BOP's and RCD is preferably axially aligned with the opening in the rotary table. However, a rig can settle during drilling and/or completion operations, and so it may be desirable to re-align the BOP's and RCD with the opening in the rig floor if misalignment does occur.

[0013] In the examples described below, one or more alignment devices in the form of wedge-shaped spacers (which are thinner on one side than on an opposite side) are interposed between the casing bowl flange and a

flange of the BOP's and RCD assembly. In this way, any deviation of the casing bowl flange from horizontal can be corrected prior to attachment of the BOP's and RCD. Multiple alignment devices may be used, if necessary.

[0014] Representatively illustrated in FIG. 1 is an alignment system 10 and associated method which can embody principles of the present disclosure. In the system 10, a casing bowl 12 has been welded to the top of a casing string 14 at a wellhead. Unfortunately, a flange 16 of the casing bowl 12 is not horizontal and, thus, is not oriented in a plane orthogonal to a longitudinal axis 18 of the casing string 14.

[0015] As a result, when a blowout preventer stack 20 and a rotating control device 22 are connected to the casing bowl 12, a longitudinal axis 24 of the blowout preventer stack and rotating control device does not coincide with the axis 18 of the casing string 14. Another result is that the axis 24 is not aligned with an opening 26 in a rig floor 28 through which a tubular string 30 (such as a drill string, work string, test string, completion string, etc.) extends.

[0016] The axis 24 is also not aligned with a longitudinal axis 32 of the tubular string 30 and opening 26, and so the tubular string will rub against the interior of the blowout preventer stack 20 and rotating control device 22 as it is conveyed into and out of the casing string 14, and/or as it is rotated (e.g., using a rotary table 34). This could damage internal features of the blowout preventer stack 20 and rotating control device 22, and/or could prevent effective sealing between the tubular string 30 and the blowout preventer stack and/or rotating control device.

[0017] As depicted in FIG. 1, the blowout preventer stack 20 includes ram-type blowout preventers 36, 38 and an annular blowout preventer 40. A lower flange 42 of the lower blowout preventer 38 attaches to the flange 16 of the casing bowl 12. The blowout preventers 36, 38, 40 are used to seal off the wellhead and thereby prevent undesired escape of fluids from the well in emergency situations (e.g., to prevent an uncontrolled blowout), or to seal off the annular space about the tubular string 30 in well control situations (e.g., when an excessive kick occurs in drilling operations). Rotation or other manipulation of the tubular string 30 would cease prior to operation of the blowout preventers 36, 38, 40.

[0018] In contrast, the rotating control device 22 is used to seal off the annular space about the tubular string 30 during drilling operations (i.e., while the tubular string is being rotated and/or lowered into the well to further drill a wellbore, although rotation of the tubular string is not necessary if a mud motor is used to rotate a drill bit on the lower end of the tubular string). The rotating control device 22 may be used in managed pressure drilling (such as, in underbalanced drilling, at balance drilling or slightly overbalanced drilling operations). However, it should be understood that use of the rotating control device 22 is not necessary in keeping with the principles of this disclosure.

[0019] To correct the misalignment of the axis 24 rel-

ative to the axes 18, 32 (and the associated misalignment of the blowout preventer stack 20 and rotating control device 22 with the casing string 14, rig floor opening 26 and tubular string 30), the system 10 utilizes one or more alignment devices 44 interposed between the flanges 16, 42 to produce an angular offset which compensates for the misalignment of the axis 24 relative to the axes 18, 32. An enlarged scale schematic cross-sectional view of the flanges 16, 42 and the alignment device 44 is representatively illustrated in FIG. 2.

[0020] Note that the alignment device 44 has opposing planar flange surfaces 46, 48 which are angled relative to one another, due to the alignment device having a greater thickness T on one side as compared to a thickness t on an opposite side. Thus, when the alignment device 44 is clamped between the flanges 16, 42 (such as, by tightening bolts 50), an angular offset A will be produced, thereby aligning the axes 18, 24 and aligning the axis 24 with the axis 32 (not visible in FIG. 2).

[0021] In some circumstances, a single alignment device 44 may not be sufficient to produce a desired angular offset A between the flanges 16, 42, in which case multiple alignment devices may be used. An example is representatively illustrated in FIG. 3.

[0022] Another advantage derived from use of multiple alignment devices 44 is that the angular offset A produced can be varied by rotating one of the alignment devices relative to another alignment device. The increments of adjustment in the depicted examples is determined by the number of bolts 50 (and associated bolt holes in the flanges 16, 42). For example, if there are twelve bolts 50 (and associated bolt holes) used to clamp the flanges 16, 42 to each other, then the number of increments of adjustment is also twelve, with each increment equaling thirty degrees (360 degrees/12 increments) of relative rotation between the alignment devices 44.

[0023] The maximum angular offset A between the flanges 16, 42 is depicted in FIG. 3, with the greatest thicknesses T of the alignment devices 44 overlapping each other. In FIG. 4, the minimum angular offset A (zero angular offset) is depicted, with the greatest thickness T of one alignment device 44 overlapping the least thickness t of the other alignment device. The configuration of FIG. 4 may not be of use in a particular circumstance, since it produces no angular offset between the flanges 16, 42, but coupled with the configuration of FIG. 3, it does show the range of adjustability of the angular offset.

[0024] Note that it is not necessary in keeping with the principles of this disclosure for the increments of adjustment of the angular offset between the flanges 16, 42 to be determined by the number of bolts 50 (and associated bolt holes) in the flanges. For example, finer or coarser increments of adjustment could be produced by providing a greater or fewer number of bolt holes in the alignment devices 44.

[0025] As another example, a theoretically infinite number of angular offset adjustments could be produced

by eliminating the bolt holes in one or all of the alignment devices 44. However, use of the bolt holes in the alignment devices 44 is presently preferred, since they can provide definite known values and increments of angular offsets for a particular configuration, and they help to maintain the alignment devices in position during assembly.

[0026] Since the bolts 50 could be subject to large bending stresses due to the angular offset between the flanges 16, 42, spherical washers of the type described in U.S. Patent No. 7144049 may be used on the bolts to prevent such bending stresses.

[0027] It may now be fully appreciated that the use of the alignment device(s) 44 between the flanges 16, 42 can produce a desired angular offset A between the flanges to thereby align components on either side of the flanges and/or to align a component with another item of equipment. For example, the angular offset A between the flanges 16, 42 can align the axis 24 with the axes 18, 32, align the blowout preventer stack 20 and blowout preventers 36, 38, 40 thereof with the casing string 14 and/or opening 26 in the rig floor 28, align the rotating control device 22 with the casing string and/or opening in the rig floor, etc.

[0028] Benefits can be derived from the angular offset A even if one of the flanges 16, 42 is not initially misaligned. For example, if the rig settles (thereby misaligning the opening 26 in the rig floor 28 with the axis 24 of the blowout preventer stack 20 and rotating control device 22), the alignment device(s) 44 can be used to restore alignment, without a need to move the rig itself.

[0029] Thus, in one example, the above disclosure provides to the art a system 10 and associated method in which an angled alignment device 44 is interposed between a casing bowl flange 16 and a flange 42 of a blowout preventer 38 to thereby vertically align the blowout preventer (and associated blowout preventer stack 20 and rotating control device 22). In other examples, the flanges 16, 42 could be provided on other components, and one or more of the components could be aligned with equipment other than a rig floor 28, rotary table 34, opening 26, tubular string 30, etc.

[0030] The above disclosure also provides to the art a manner of using multiple angled alignment devices 44 between flanges 16, 42 to achieve an increased degree of adjustability of angular offset A between the flanges. Adjustment increments may be determined by the number of bolt holes in the flanges 16, 42 and alignment devices 44, or a greater or lesser number of increments may be provided.

[0031] The alignment device(s) 44 may be used between any types of flanges, to thereby axially align any type of components (such as pipes, valves, etc.) on opposite sides of the flanges (i.e., the components on opposite sides of the flanges are axially aligned, but one or both of the flanges may not be axially aligned with those components).

[0032] In this aspect, the components do not have to

be related to wells; they could be used in any type of pipelines, processing plants, power plants, etc.

[0033] In another aspect, the alignment device(s) 44 may be used between flanges to align a component associated with one of the flanges with another item of equipment. Thus, in the examples described above, the blowout preventer stack 20 (which is associated with the flange 42) is aligned with the opening 26 in the rig floor 28 (which is not rigidly secured to either of the flanges 16, 42).

[0034] More particularly, the above disclosure provides to the art an alignment system 10 which comprises at least one alignment device 44 positioned between two flanges 16, 42, with the alignment device 44 having a greater thickness T on one side of the alignment device 44 than on an opposite side of the alignment device 44.

[0035] The system 10 can include multiple alignment devices 44 positioned between the flanges 16, 42.

[0036] The alignment devices 44 may be displaceable relative to each other to thereby vary an angular offset A of one flange 16 relative to the other flange 42.

[0037] One of the flanges 42 may be part of a blowout preventer 38. The alignment device 44 may align an axis 24 of the blowout preventer 38 with an axis 32 of a tubular string 30 extending through a rig floor 28.

[0038] A rotating control device 22 may be connected to the blowout preventer 38. The alignment device 44 may align an axis 24 of the rotating control device 22 with an axis 32 of a tubular string 30 extending through a rig floor 28.

[0039] One of the flanges 16 may be part of a casing bowl 12.

[0040] The alignment device 44 may align an axis 24 of a blowout preventer stack 20 and/or a rotating control device 22 with an axis 18 of a casing string 14.

[0041] Also provided by the above disclosure is a method of producing a relative angular offset A between a first flange 16 and a second flange 42. The method includes positioning at least one alignment device 44 between the first and second flanges 16, 42; and securing the alignment device 44 between the first and second flanges 16, 42, thereby producing the angular offset A.

[0042] The positioning step may include positioning multiple alignment devices 44 between the first and second flanges 16, 42. The method can include displacing a first one of the alignment devices 44 relative to a second one of the alignment devices 44, thereby varying the angular offset.

[0043] Securing the alignment device 44 may include aligning an axis 24 of a blowout preventer stack 20 and/or rotating control device 22 with an axis 18 of a casing string 14.

[0044] The first flange 16 may be part of a casing bowl 12. The second flange 42 may be part of a blowout preventer 38.

[0045] Securing the alignment device 44 may include aligning an axis 24 of the blowout preventer 38 with an axis 32 of a tubular string 30 extending through a rig floor

28.

[0046] The method may include connecting a rotating control device 22 to the blowout preventer 36, 38, 40.

[0047] Securing the alignment device 44 may include aligning an axis 24 of the rotating control device 22 with an axis 32 of a tubular string 30 extending through a rig floor 28.

[0048] The above disclosure also provides to the art a method of aligning an axis 24 of a blowout preventer stack 20 with a rig floor 28. The method includes positioning at least one alignment device 44 between a first flange 16 and a second flange 42 of the blowout preventer stack 20; and securing the alignment device 44 between the first and second flanges 16, 42, thereby producing an angular offset A of the second flange 42 relative to the first flange 16.

[0049] Securing the alignment device 44 may include aligning the axis 24 of the blowout preventer stack 20 with an axis 32 of a tubular string 30 extending through the rig floor 28.

[0050] The method may include connecting a rotating control device 22 to the blowout preventer stack 20. Securing the alignment device 44 may include aligning an axis 24 of the rotating control device 22 with an axis 32 of a tubular string 30 extending through the rig floor 28.

[0051] The positioning step may include positioning multiple alignment devices 44 between the first and second flanges 16, 42. The method may include displacing a first one of the alignment devices 44 relative to a second one of the alignments devices 44, thereby varying the angular offset. The displacing step may include selecting from among predetermined rotational orientations of the first alignment device 44 relative to the second alignment device 44.

[0052] The first flange 16 may be part of a casing bowl 12.

[0053] Securing the alignment device 44 may include aligning the axis 24 of the blowout preventer stack 20 and/or a rotating control device 22 with an axis 18 of a casing string 14.

[0054] It is to be understood that the various embodiments of the present disclosure described herein may be utilized in various orientations, such as inclined, inverted, horizontal, vertical, etc., and in various configurations, without departing from the principles of the present disclosure. The embodiments are described merely as examples of useful applications of the principles of the disclosure, which are not limited to any specific details of these embodiments.

[0055] In the above description of the representative embodiments of the disclosure, directional terms, such as "above", "below", "upper", "lower", etc., are used merely for convenience in referring to the accompanying drawings.

[0056] Of course, a person skilled in the art would, upon a careful consideration of the above description of representative embodiments of the disclosure, readily appreciate that many modifications, additions, substitu-

tions, deletions, and other changes may be made to the specific embodiments, and such changes are contemplated by the principles of the present disclosure. Accordingly, the foregoing detailed description is to be clearly understood as being given by way of illustration and example only, the spirit and scope of the present invention being limited solely by the appended claims and their equivalents.

[0057] Apparatus and methods may also be provided as recited in the following numbered statements:

1. An alignment system, comprising:

at least one alignment device positioned between two flanges, the alignment device having a greater thickness on one side of the alignment device than on an opposite side of the alignment device.

2. The system of 1, wherein the system comprises multiple alignment devices positioned between the flanges.

3. The system of 2, wherein the alignment devices are displaceable relative to each other to thereby vary an angular offset of one flange relative to the other flange.

4. The system of 1, wherein one of the flanges is part of a blowout preventer.

5. The system of 4, wherein the alignment device aligns an axis of the blowout preventer with an axis of a tubular string extending through a rig floor.

6. The system of 4, wherein a rotating control device is connected to the blowout preventer.

7. The system of 6, wherein the alignment device aligns an axis of the rotating control device with an axis of a tubular string extending through a rig floor.

8. The system of 1, wherein one of the flanges is part of a casing bowl.

9. The system of 1, wherein the alignment device aligns an axis of a blowout preventer stack with an axis of a casing string.

10. The system of 1, wherein the alignment device aligns an axis of a rotating control device with an axis of a casing string.

11. A method of producing a relative angular offset between a first flange and a second flange, the method comprising:

positioning at least one alignment device be-

tween the first and second flanges; and

securing the alignment device between the first and second flanges, thereby producing the angular offset.

12. The method of 11, wherein positioning at least one alignment device comprises positioning multiple alignment devices between the first and second flanges.

13. The method of 12, further comprising displacing a first one of the alignment devices relative to a second one of the alignments devices, thereby varying the angular offset.

14. The method of 11, wherein the first flange is part of a casing bowl.

15. The method of 11, wherein securing the alignment device further comprises aligning an axis of a blowout preventer stack with an axis of a casing string.

16. The method of 11, wherein securing the alignment device further comprises aligning an axis of a rotating control device with an axis of a casing string.

17. The method of 11, wherein the second flange is part of a blowout preventer.

18. The method of 17, wherein securing the alignment device further comprises aligning an axis of the blowout preventer with an axis of a tubular string extending through a rig floor.

19. The method of 17, further comprising connecting a rotating control device to the blowout preventer.

20. The method of 19, wherein securing the alignment device further comprises aligning an axis of the rotating control device with an axis of a tubular string extending through a rig floor.

21. A method of aligning an axis of a blowout preventer stack with a rig floor, the method comprising:

positioning at least one alignment device between a first flange, and a second flange of the blowout preventer stack; and

securing the alignment device between the first and second flanges, thereby producing an angular offset of the second flange relative to the first flange.

22. The method of 21, wherein securing the alignment device further comprises aligning the axis of

the blowout preventer stack with an axis of a tubular string extending through the rig floor.

23. The method of 21, further comprising connecting a rotating control device to the blowout preventer stack.

24. The method of 23, wherein securing the alignment device further comprises aligning an axis of the rotating control device with an axis of a tubular string extending through the rig floor.

25. The method of 21, wherein positioning at least one alignment device comprises positioning multiple alignment devices between the first and second flanges.

26. The method of 25, further comprising displacing a first one of the alignment devices relative to a second one of the alignments devices, thereby varying the angular offset.

27. The method of 26, wherein displacing a first one of the alignment devices relative to a second one of the alignment devices further comprises selecting from among predetermined rotational orientations of the first alignment device relative to the second alignment device.

28. The method of 21, wherein the first flange is part of a casing bowl.

29. The method of 21, wherein securing the alignment device further comprises aligning the axis of the blowout preventer stack with an axis of a casing string.

30. The method of 21, wherein securing the alignment device further comprises aligning an axis of a rotating control device with an axis of a casing string.

Claims

1. An alignment system, comprising:

at least one alignment device positioned between two flanges, the alignment device having a greater thickness on one side of the alignment device than on an opposite side of the alignment device.

2. The system of claim 1, wherein the system comprises multiple alignment devices positioned between the flanges.

3. The system of claim 2, wherein the alignment devices are displaceable relative to each other to thereby

vary an angular offset of one flange relative to the other flange.

4. The system of claim 1, wherein one of the flanges is part of a blowout preventer. 5
5. The system of claim 4, wherein the alignment device aligns an axis of the blowout preventer with an axis of a tubular string extending through a rig floor. 10
6. The system of claim 4, wherein a rotating control device is connected to the blowout preventer.
7. The system of claim 6, wherein the alignment device aligns an axis of the rotating control device with an axis of a tubular string extending through a rig floor. 15
8. The system of claim 1, wherein one of the flanges is part of a casing bowl. 20
9. The system of claim 1, wherein the alignment device aligns an axis of a blowout preventer stack with an axis of a casing string.
10. The system of claim 1, wherein the alignment device aligns an axis of a rotating control device with an axis of a casing string. 25
11. A method of producing a relative angular offset between a first flange and a second flange, the method comprising: 30
 - positioning at least one alignment device between the first and second flanges; and
 - securing the alignment device between the first and second flanges, thereby producing the angular offset. 35
12. The method of claim 11, wherein positioning at least one alignment device comprises positioning multiple alignment devices between the first and second flanges. 40
13. The method of claim 12, further comprising displacing a first one of the alignment devices relative to a second one of the alignments devices, thereby varying the angular offset. 45
14. The method of claim 11, wherein the first flange is part of a casing bowl. 50
15. The method of claim 11, wherein securing the alignment device further comprises aligning an axis of a blowout preventer stack with an axis of a casing string. 55
16. The method of claim 11, wherein securing the alignment device further comprises aligning an axis of a

rotating control device with an axis of a casing string.

17. The method of claim 11, wherein the second flange is part of a blowout preventer.
18. The method of claim 17, wherein securing the alignment device further comprises aligning an axis of the blowout preventer with an axis of a tubular string extending through a rig floor.
19. The method of claim 17, further comprising connecting a rotating control device to the blowout preventer.
20. The method of claim 19, wherein securing the alignment device further comprises aligning an axis of the rotating control device with an axis of a tubular string extending through a rig floor.

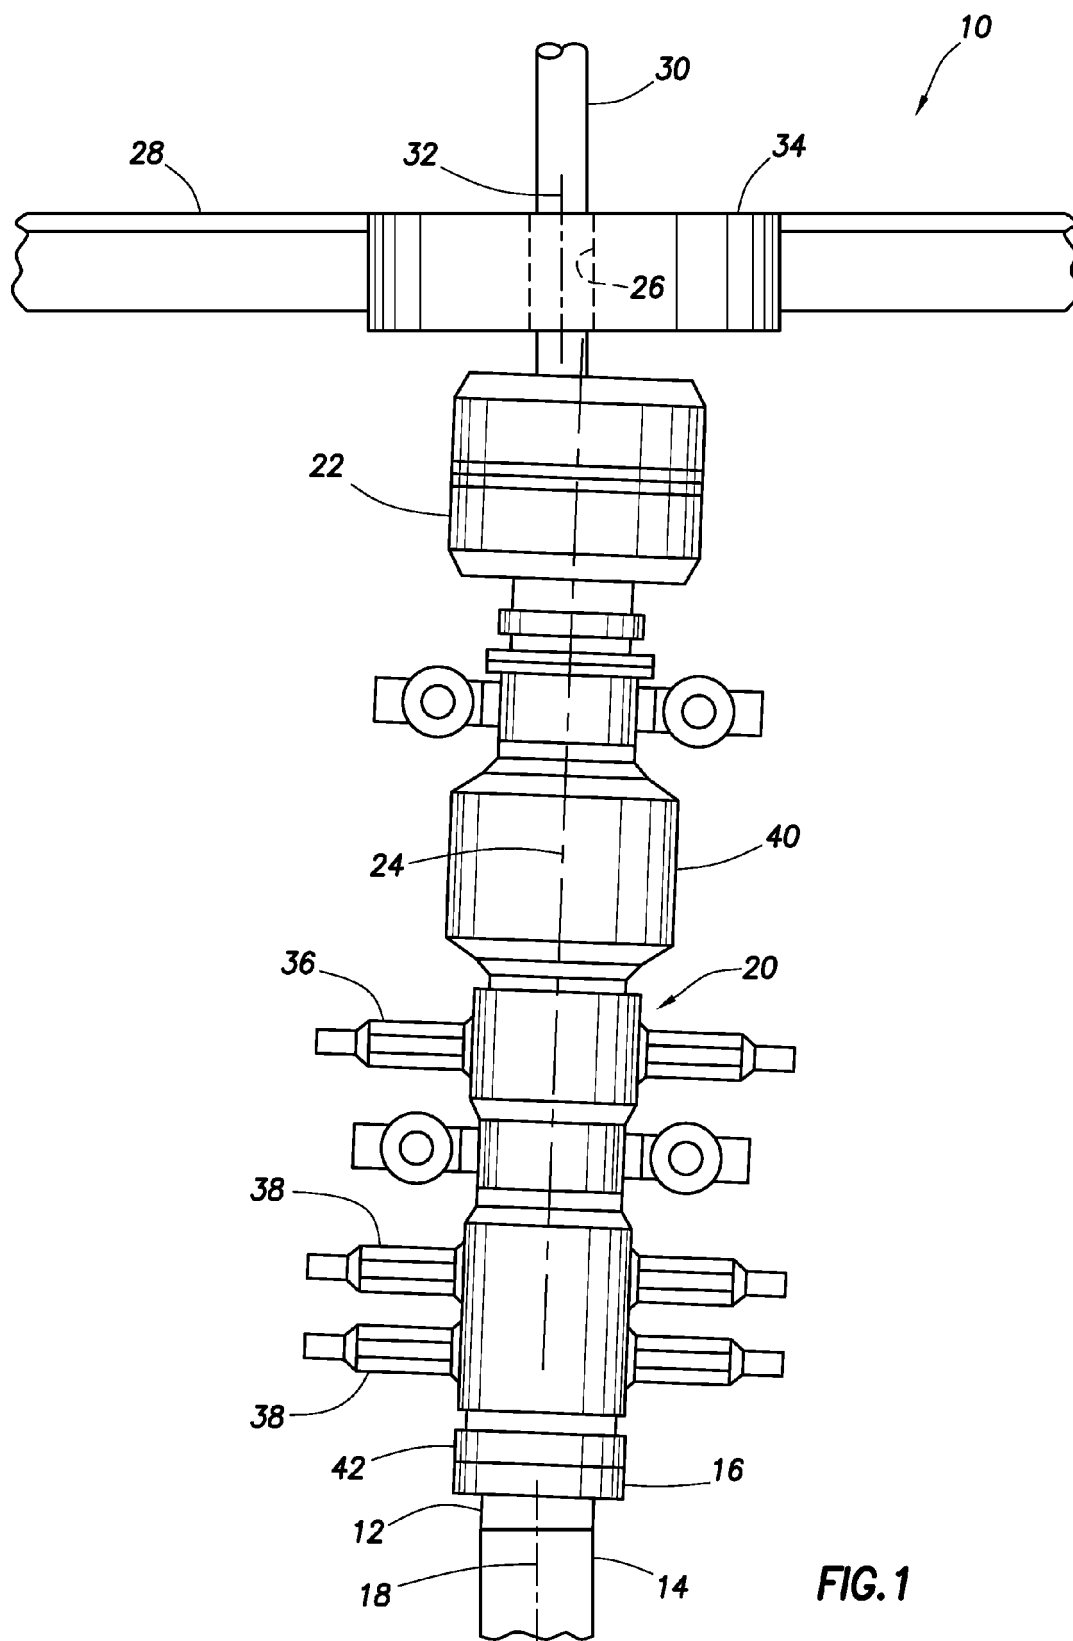


FIG. 1

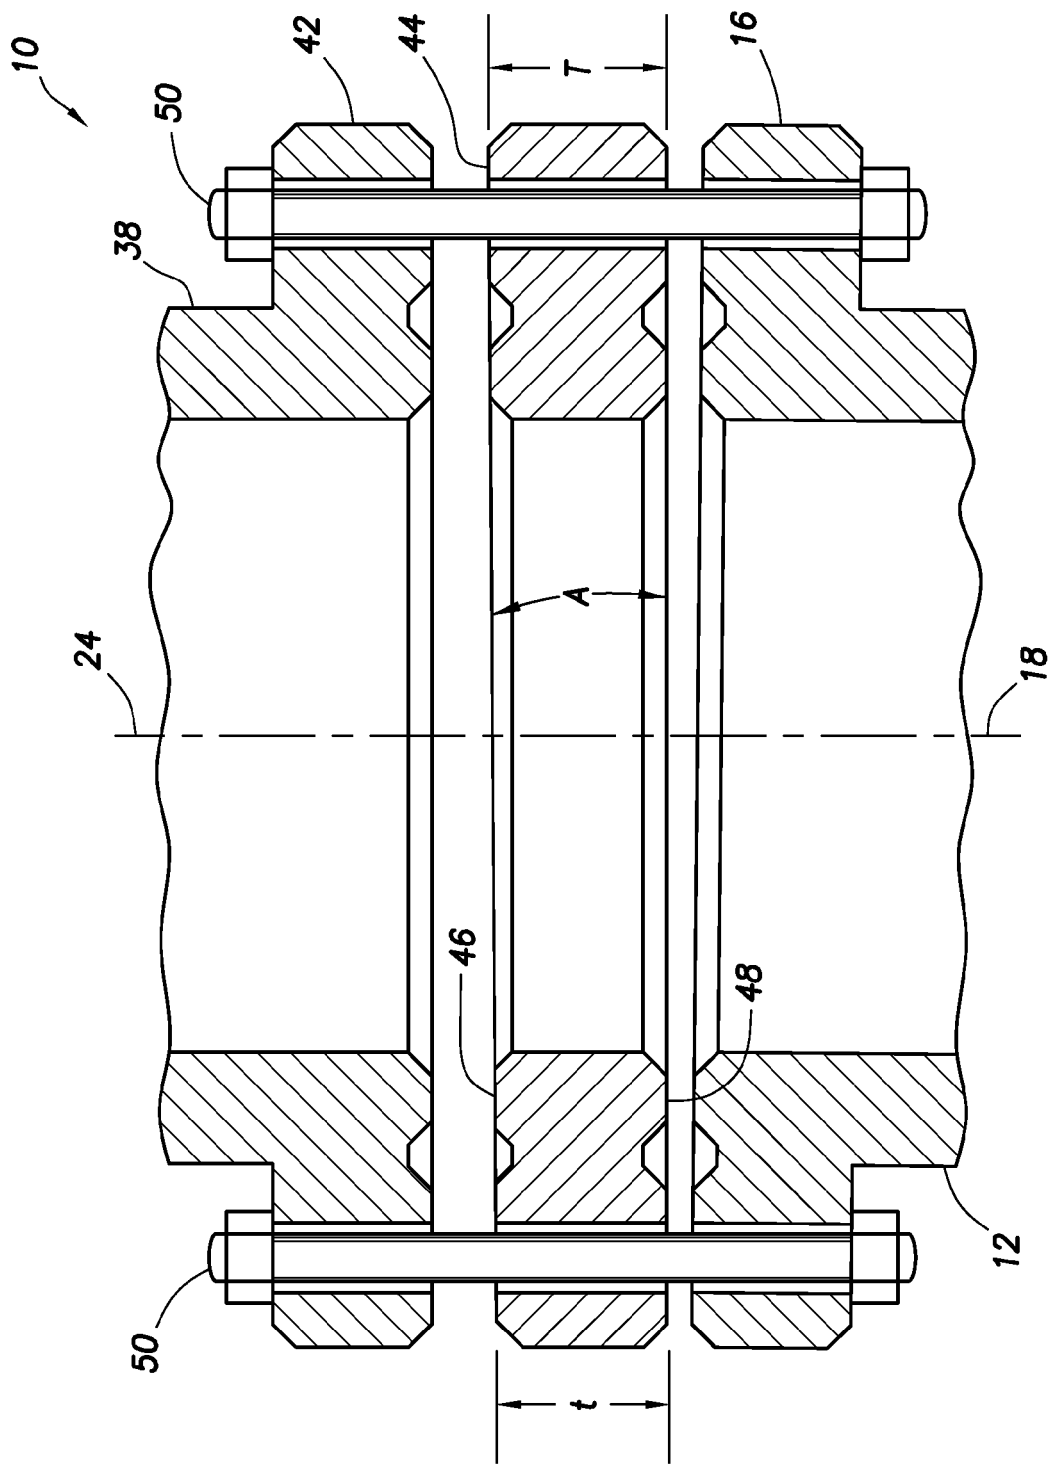


FIG.2

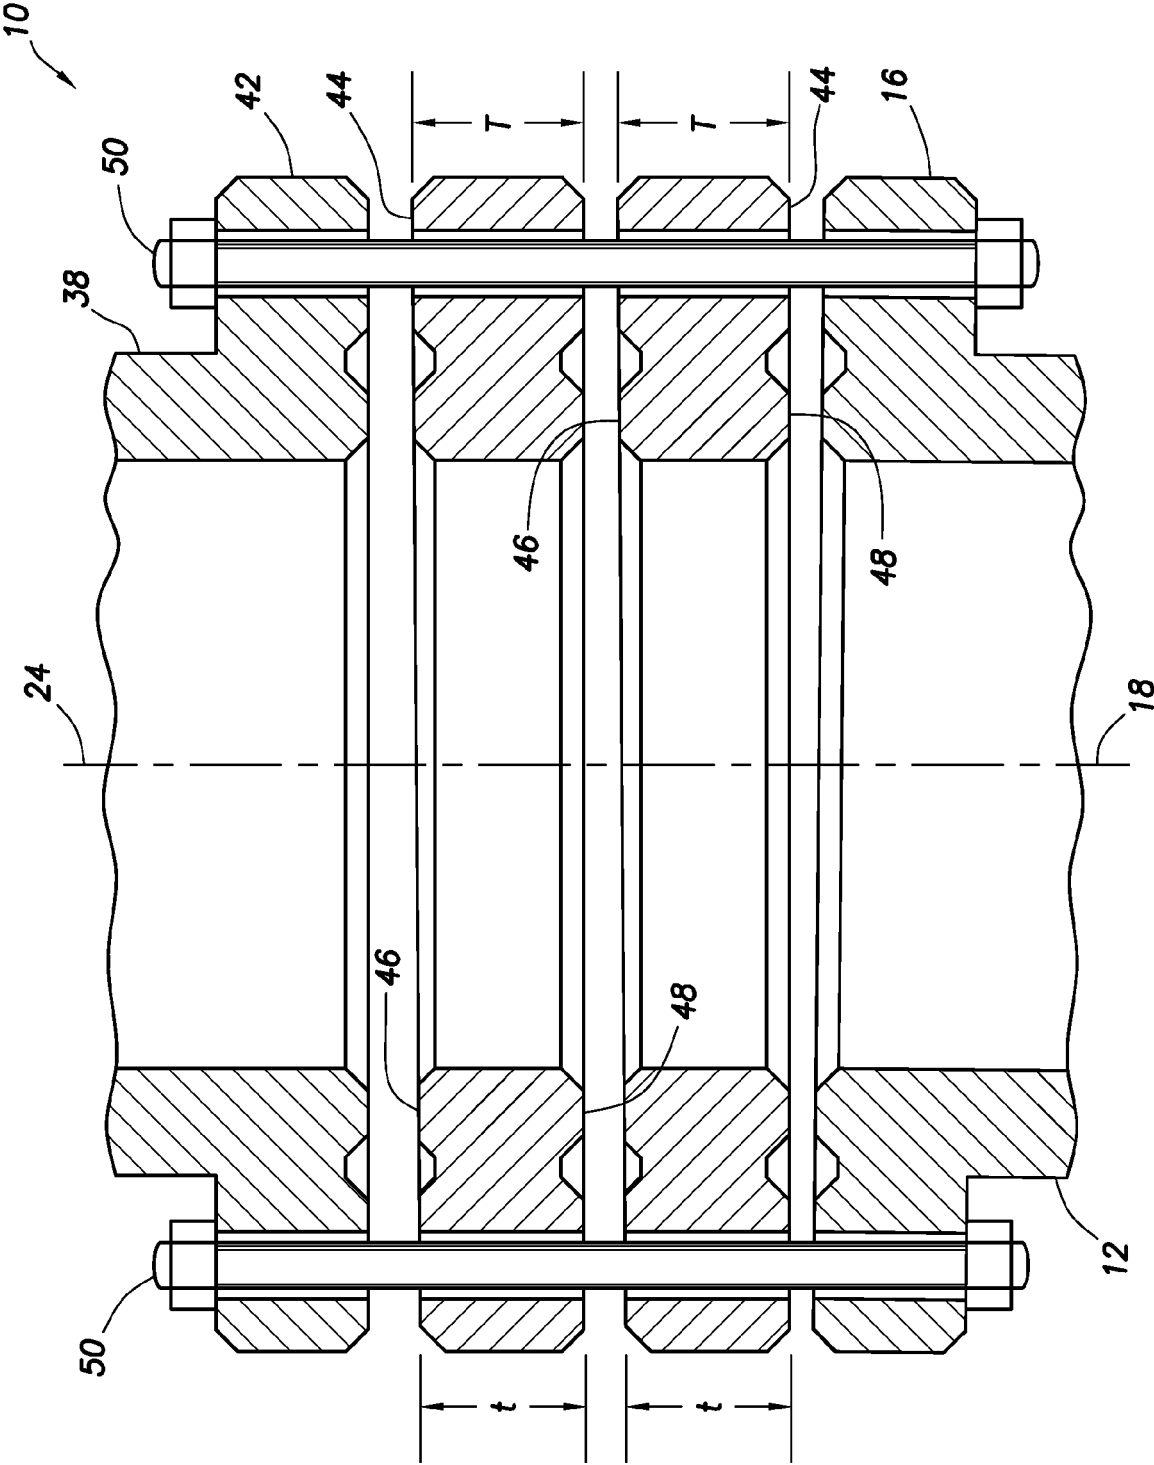


FIG.3

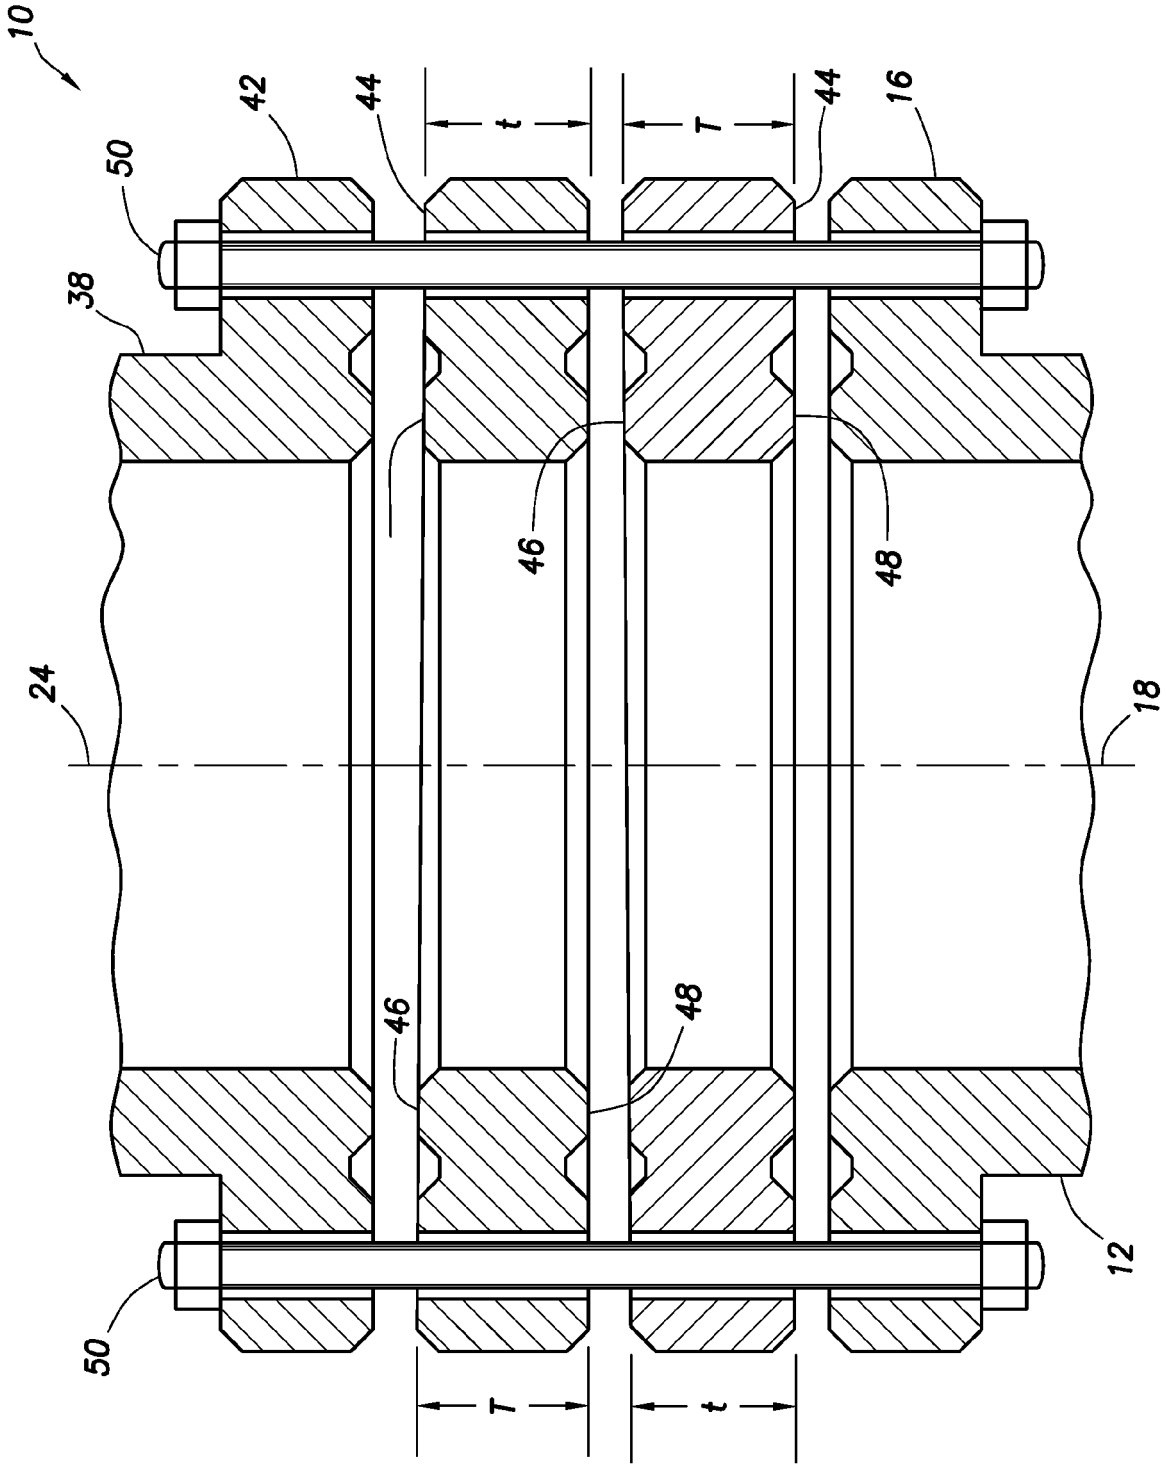


FIG.4



EUROPEAN SEARCH REPORT

 Application Number
 EP 14 17 1890

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 2 340 570 A (ELF EXPLORATION PROD [FR]) 23 February 2000 (2000-02-23) * page 2, line 29 - line 33 * * figure 6 *	1-11	INV. E21B33/06 F16L23/00 F16L27/00
X	GB 816 559 A (HANS ZILLER) 15 July 1959 (1959-07-15) * page 1, line 8 - line 22 * * page 1, line 68 - page 2, line 8 * * figures 1-3 *	1-20	
X	GB 130 856 A (SHELDON PERCY) 14 August 1919 (1919-08-14) * page 1 * * figure 2 *	1-13	
X	DE 299 01 351 U1 (KROLL & ZILLER KG [DE]) 29 April 1999 (1999-04-29) * figure 1 *	1-13	
X	GB 2 247 723 A (PFAUDLER WERKE GMBH [DE]) 11 March 1992 (1992-03-11) * abstract *	1-13	
A	US 2 963 090 A (COLE RICHARD C ET AL) 6 December 1960 (1960-12-06) * the whole document *	1-20	TECHNICAL FIELDS SEARCHED (IPC)
A	US 2007/114039 A1 (HOBODY MILES A [US] ET AL) 24 May 2007 (2007-05-24) * the whole document *	1-20	E21B F16L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 16 October 2014	Examiner Schouten, Adri
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 17 1890

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-10-2014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2340570 A	23-02-2000	FR 2781859 A1 GB 2340570 A NO 993700 A	04-02-2000 23-02-2000 31-01-2000
GB 816559 A	15-07-1959	NONE	
GB 130856 A	14-08-1919	NONE	
DE 29901351 U1	29-04-1999	NONE	
GB 2247723 A	11-03-1992	DE 4027779 A1 GB 2247723 A	05-03-1992 11-03-1992
US 2963090 A	06-12-1960	NONE	
US 2007114039 A1	24-05-2007	US 2007114039 A1 WO 2007062329 A2	24-05-2007 31-05-2007

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2340570 A [0003]
- GB 130846 A [0004]
- US 7144049 B [0026]