




(86) Date de dépôt PCT/PCT Filing Date: 2005/07/20
(87) Date publication PCT/PCT Publication Date: 2006/02/09
(85) Entrée phase nationale/National Entry: 2007/01/26
(86) N° demande PCT/PCT Application No.: US 2005/025785
(87) N° publication PCT/PCT Publication No.: 2006/014765
(30) Priorités/Priorities: 2004/07/27 (US60/591,315);
2004/07/29 (US60/592,073)

(51) Cl.Int./Int.Cl. *F21V 7/09* (2006.01)
(71) Demandeur/Applicant:
WHITEROCK DESIGN, LLC, US
(72) Inventeur/Inventor:
HOUGH, THOMAS A., US
(74) Agent: BLAKE, CASSELS & GRAYDON LLP

(54) Titre : CIRCUIT D'ECLAIRAGE
(54) Title: ILLUMINATION SYSTEM

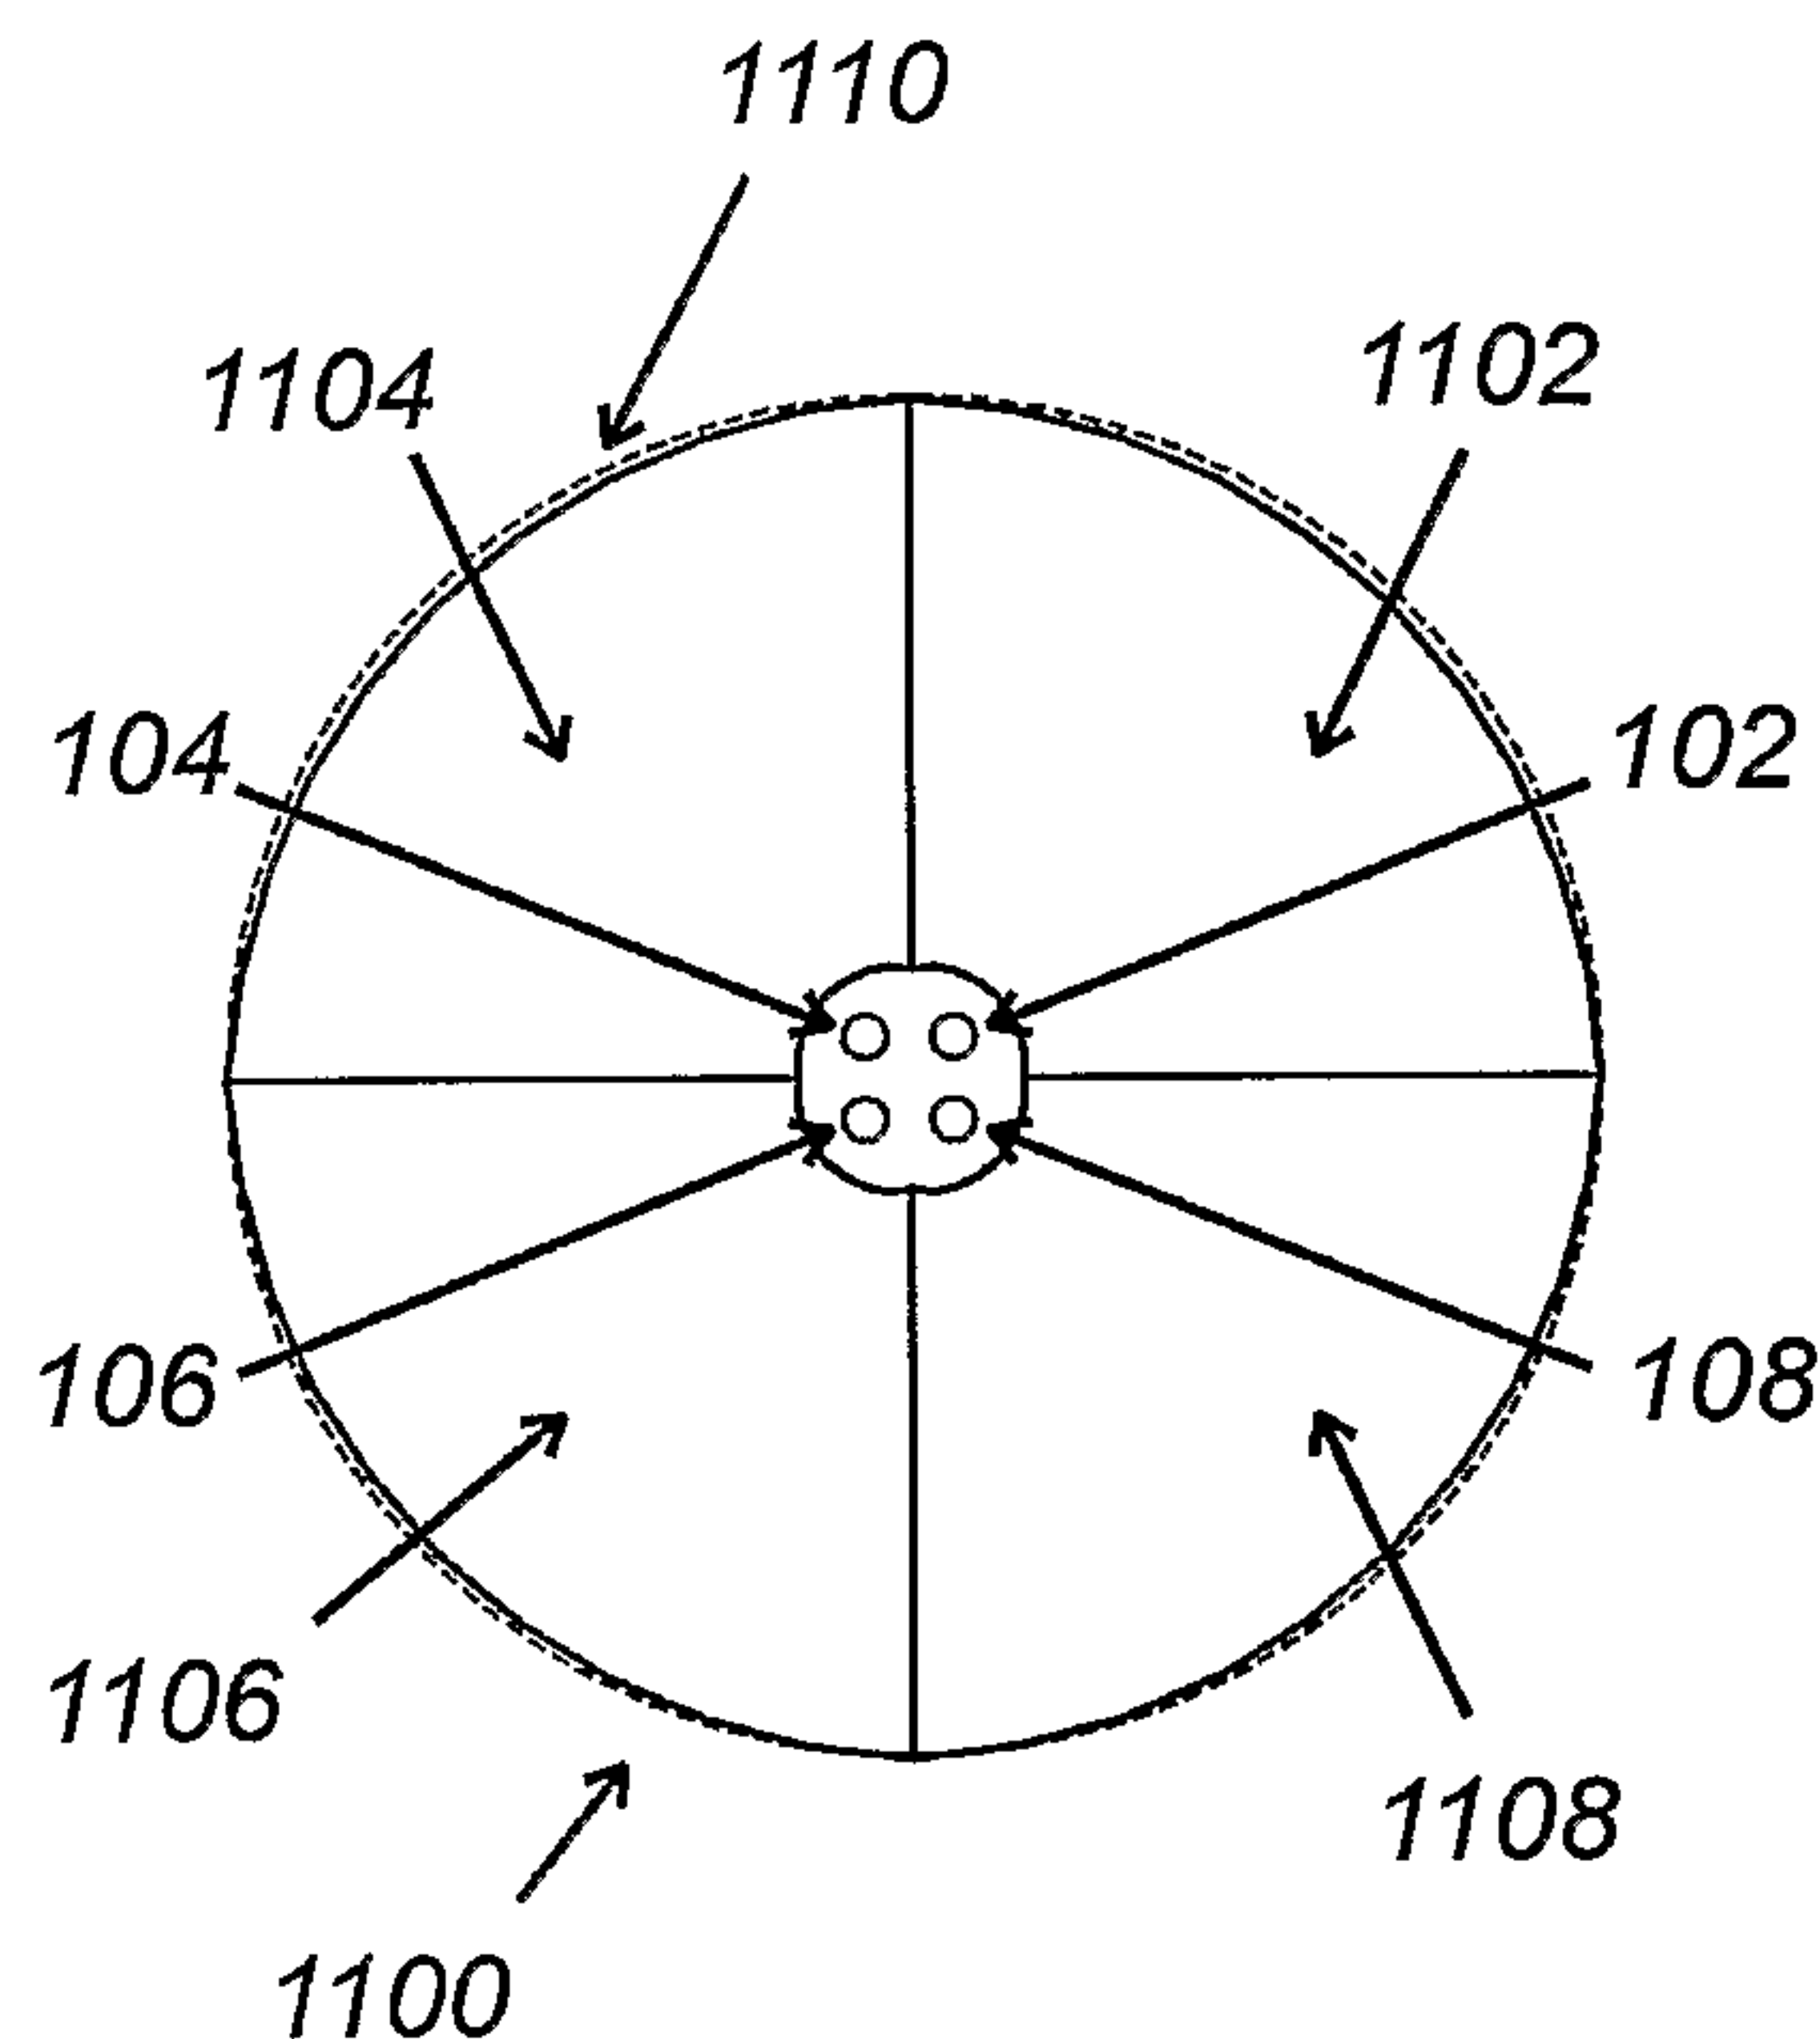

(57) Abrégé/Abstract:

An illumination system, reflector and method for producing a beam with a substantially circularly symmetric irradiance distribution from a light source (100) having a plurality of linear light emitting elements (102, 104, 106, 108) arranged with their longitudinal axes substantially parallel with each other and spaced substantially symmetrically about a central longitudinal axis. The reflector (1100) includes a plurality of reflecting zones (1102, 1104, 1106, 1108) corresponding to, and aligned with, the plurality of light emitting elements. A surface of a reflecting zone may be defined by rotating a generator curve (902) around an axis of rotation (904) that is not coaxial with the longitudinal axis of the light source (105).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 February 2006 (09.02.2006)

PCT

(10) International Publication Number
WO 2006/014765 A1

(51) International Patent Classification⁷: **F21V 7/09**

(21) International Application Number:
PCT/US2005/025785

(22) International Filing Date: 20 July 2005 (20.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/591,315 27 July 2004 (27.07.2004) US
60/592,073 29 July 2004 (29.07.2004) US

(71) Applicant (for all designated States except US): **WHITE-ROCK DESIGN, LLC** [US/US]; 115 E. Broadway Blvd., Tucson, AZ 85701 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HOUGH, Thomas, A.** [US/US]; 5756 E. 3rd Street, Tucson, AZ 85711 (US).

(74) Agents: **MUNCK, William, A.** et al.; Davis Munck, P.C., 900 Three Galleria Tower, 13155 Noel Road, Dallas, TX 75240 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ILLUMINATION SYSTEM

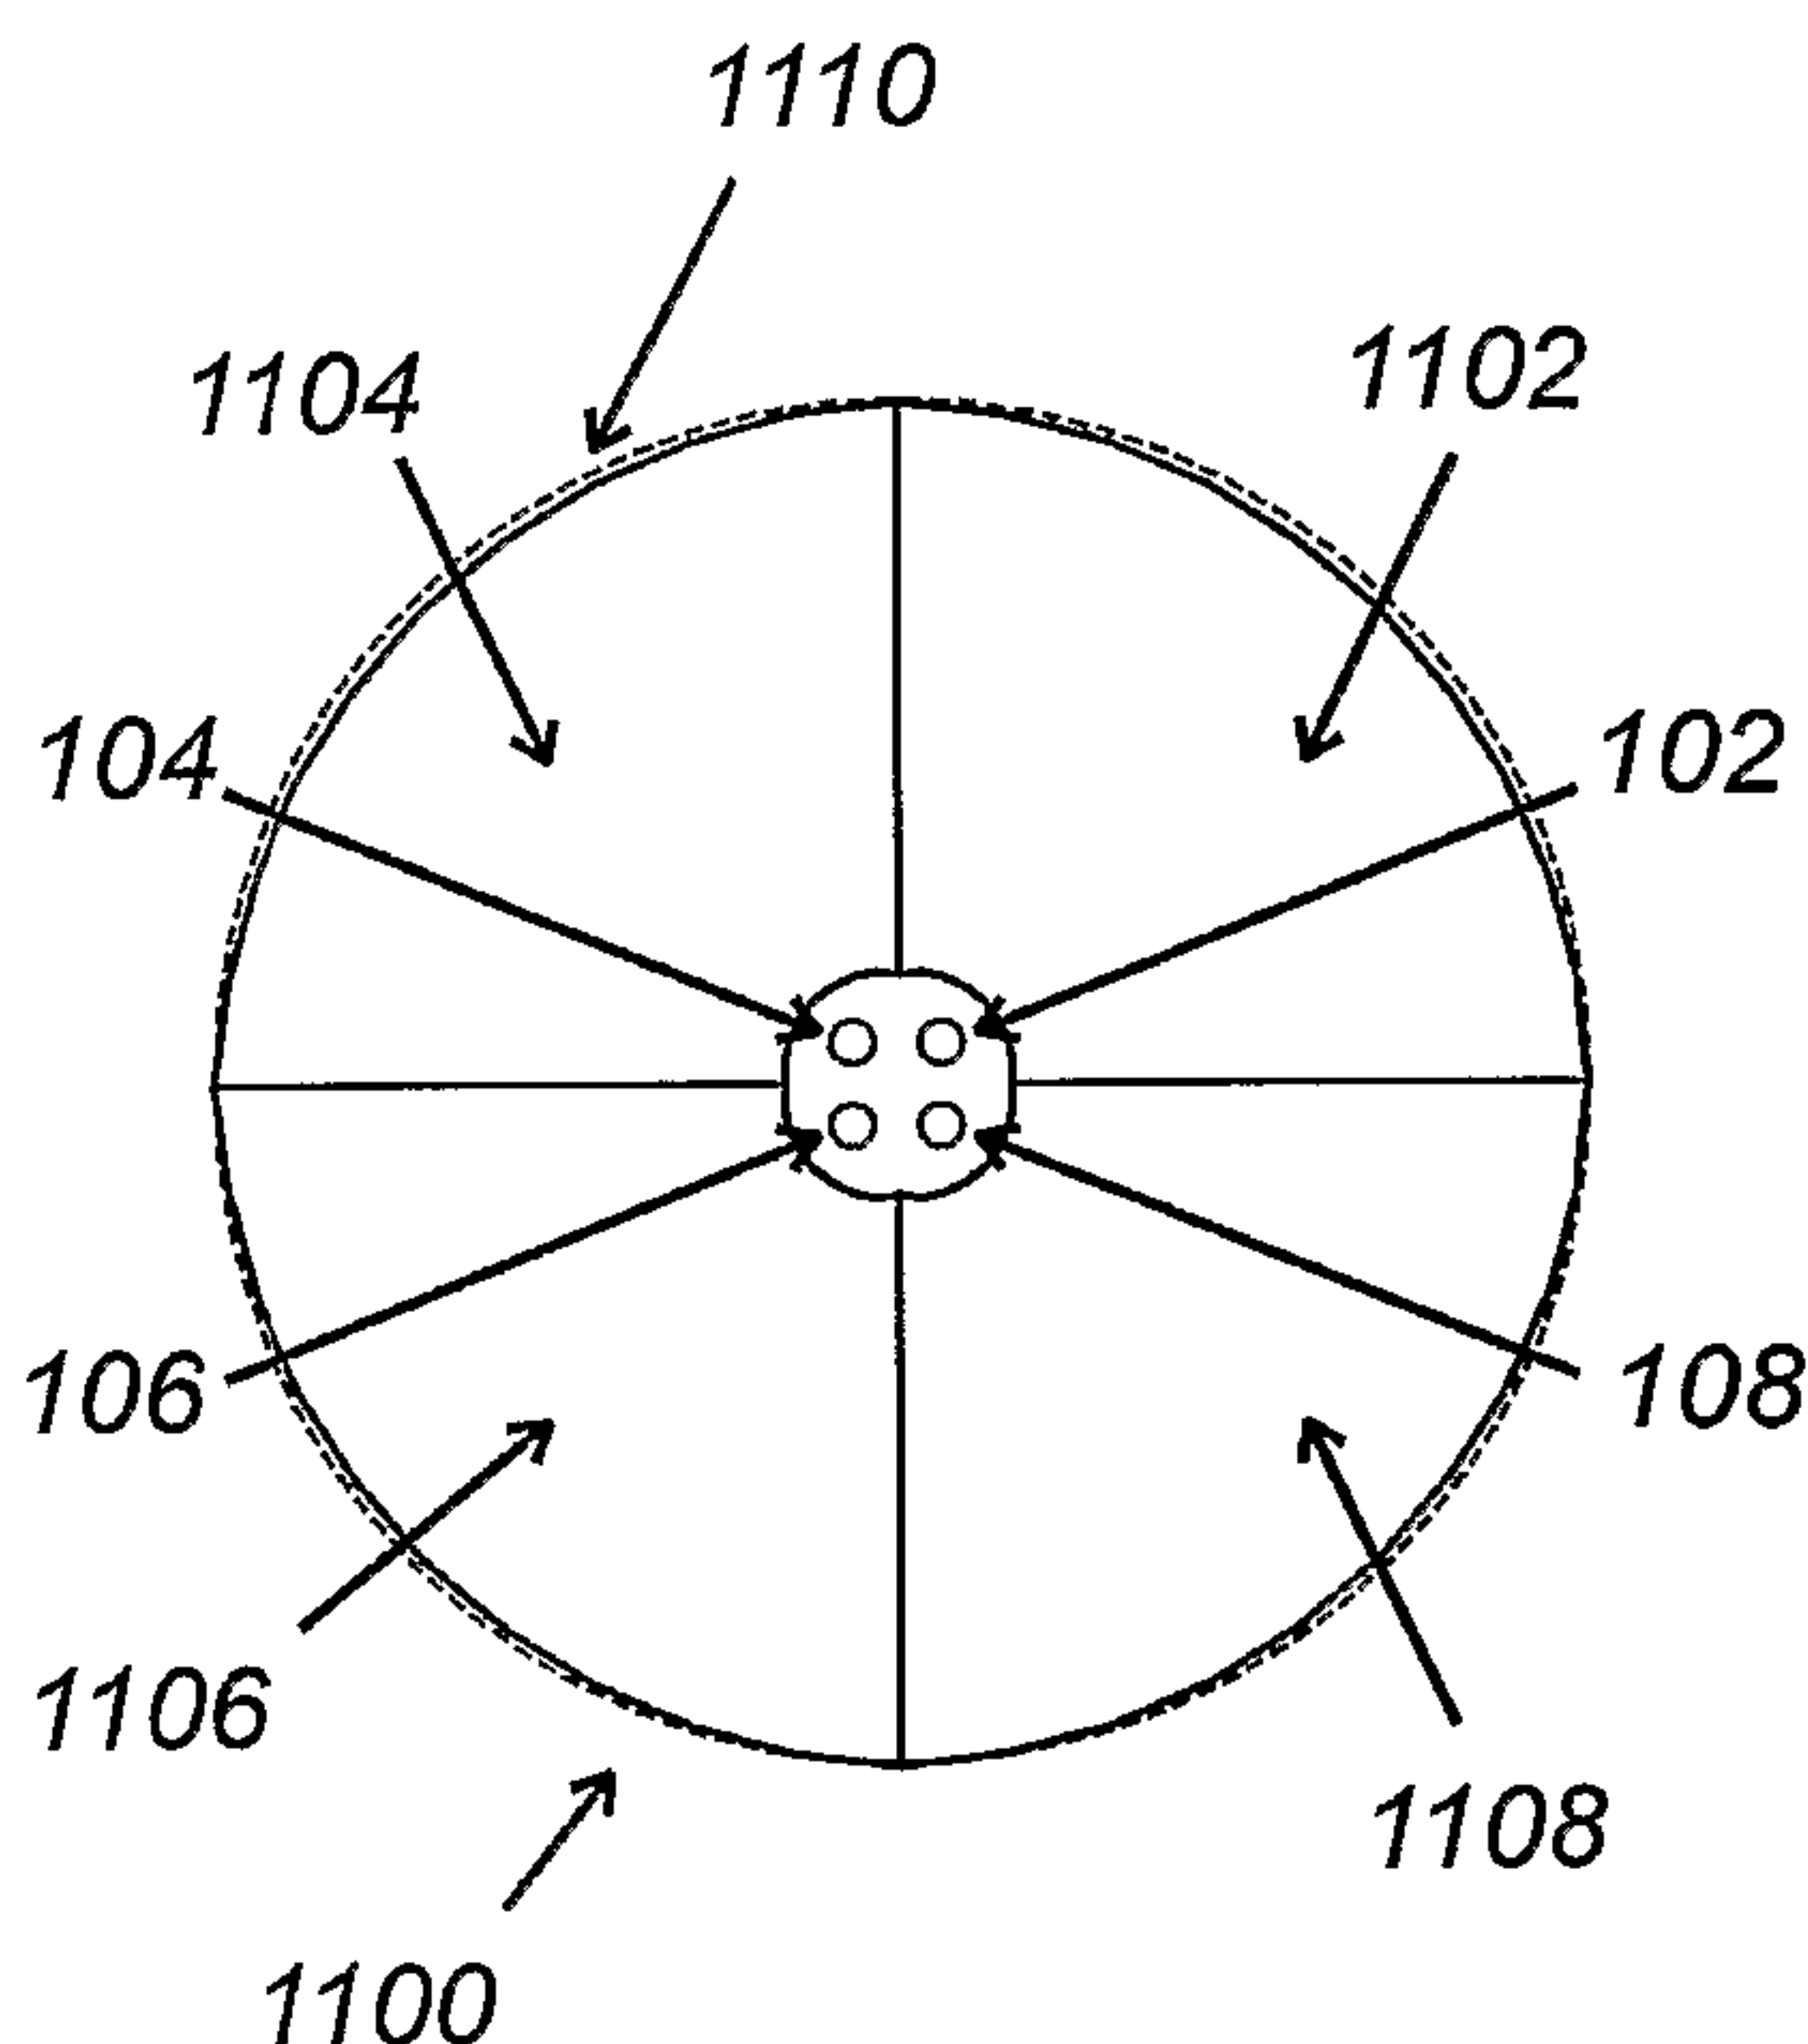

(57) Abstract: An illumination system, reflector and method for producing a beam with a substantially circularly symmetric irradiance distribution from a light source (100) having a plurality of linear light emitting elements (102, 104, 106, 108) arranged with their longitudinal axes substantially parallel with each other and spaced substantially symmetrically about a central longitudinal axis. The reflector (1100) includes a plurality of reflecting zones (1102, 1104, 1106, 1108) corresponding to, and aligned with, the plurality of light emitting elements. A surface of a reflecting zone may be defined by rotating a generator curve (902) around an axis of rotation (904) that is not coaxial with the longitudinal axis of the light source (105).

WO 2006/014765 A1

ILLUMINATION SYSTEM

TECHNICAL FIELD OF THE INVENTION

[0001] The present invention relates to illumination
5 systems and, more particularly, to an illumination system
that produces a beam of light having a substantially
circularly symmetric irradiance distribution from a lamp
having a plurality of linear light emitting elements.

10 BACKGROUND OF THE INVENTION

[0002] The Ellipsoidal Reflector Spotlight (ERS) and
the Parabolic Wash light (PAR) are two of the most
popular lighting fixtures used in theatre, television,
and architectural lighting. Certain ERS and PAR lighting
15 fixtures employ an incandescent High Performance Lamp
(HPL) that includes a plurality of linear, helically-
wound filaments arranged with their longitudinal axes
substantially parallel with each other and arranged with
their longitudinal axes spaced substantially
20 symmetrically about a central longitudinal axis. Such
ERS and PAR lighting fixtures typically have a reflector
to collect the light from the lamp and direct it forward
out of the fixture.

[0003] When an HPL lamp is used with a reflector
25 having a circularly symmetric cross section, the
irradiance distribution of the forwardly directed beam is
not circularly symmetric. Rather, the irradiance
distribution is characterized by a number of "hot spots"
surrounding a central minimum, or void. The number of
30 hot spots is equal in number to the number of helically
wound filaments contained in the HPL lamp. The central

minimum is due to the fact that no light emitting element is located along the lamp's central longitudinal axis.

[0004] FIGURES 1A, 1B and 1C show an HPL lamp **100** with four helically-wound filaments **102**, **104**, **106** and **108** arranged with their longitudinal axes substantially parallel with each other and with their longitudinal axes spaced substantially symmetrically about a central longitudinal axis **105**. The lamp includes a base **110**, a transparent enclosure **112**, and a pair of insulating filament support structures **116**. FIG. 1C shows an electrical conductor **117** connecting the filaments so that they operate electrically in series.

[0005] The four emitting filament sections **102**, **104**, **106** and **108** are composed of tightly wound helical coils, each of which emits light and in certain directions, block the light emitted from other filaments, creating shadows. These shadows are visible in the lamp's intensity distribution. Intensity is defined as the lumens or power directed into a given solid angle. The filament shadows create inconsistencies in a beam of light formed by collecting the light from the lamp and directing it forward with a typical prior art reflector.

[0006] FIGURE 2 illustrates an intensity distribution graph **200**, measured in a plane that is perpendicular to the HPL lamp's central longitudinal axis. The intensity data in the graph are generated in the following manner. The HPL lamp is burned base downward in a vertical orientation, while an intensity meter is moved in a circle centered on the lamp's central longitudinal axis. At each angle around the circle, the intensity is noted. Plotting the intensity versus angular position on a set of polar axes produces the intensity distribution graph **200**. A number of filament shadows **202**, **204**, **206**, **208**,

210, 212, 214 and **216** are present in the beam. For clarity, the positions of the HPL filaments **102, 104, 106** and **108** are superimposed on the graph.

[0007] Prior art Ellipsoidal Reflector Spotlight (ERS) optical systems that employ the HPL lamp also employ a reflector generated from an ellipsoidal or near-ellipsoidal curve, typically referred to as an ellipsoidal reflector. A generator curve is rotated about the lamp's central longitudinal axis to form a reflecting surface. FIGURE 3 shows an ellipsoidal or near-ellipsoidal generator curve **302**, an HPL lamp **100** and its central longitudinal axis **105**, and an optical axis **304** of the ERS system, which is coincident with the lamp's central longitudinal axis **105**. A dotted curve **308** depicts the opening of the reflecting surface, and a circular arrow **310** depicts the sense of rotation as the generator curve **302** is swept around the optical axis **304** of the ERS system.

[0008] FIGURE 4 shows an orthogonal view of a reflecting surface **400** resulting from application of the prior art method described with regard to FIG. 3. The reflecting surface **400** has a smooth bowl-like shape. Since the generator curve **302** was rotated about the optical axis **304** of the ERS system, a cross section **402** taken through the reflecting surface **400**, in a plane perpendicular to the optical axis **304** of the ERS system, is a circle.

[0009] As described with regard to FIG. 2, the light emitting filaments in the HPL lamp shadow each other. When a smooth reflector is employed in the ERS optical system, the filament shadows tend to be visible in the forward propagating beam projected by the reflector. For this reason, prior art ERS reflectors for use with HPL

lamps often employ facets or lunes on their surface in an attempt to produce a circularly symmetric irradiance distribution, free from filament shadows and hot spots.

[0010] Facets are small planar segments, which are
5 tiled over the reflector's surface. Lunes are ribbon-like segments, which have curvature in one direction only, and are also tiled over the reflector's surface. The facets or lunes are perturbations of the smooth reflecting surface profile, and therefore help to smooth
10 or homogenize the beam formed by the lamp and reflector. FIGURE 5A shows a reflector section **502** that has been covered with facets **504**. Figure 5B shows a reflector section **506** that has been covered with lunes **508**.

[0011] A reflective surface formed according to the
15 prior art method described with regard to FIG. 3 and faceted or luned according to the methods described with regard to FIG. 5 has a generally circular cross section **402**. But the cross section **402** is actually a polygon whose number of sides is equal to the number of facets or
20 lunes through the cross section of the reflective surface **400**.

[0012] A small number of large facets or lunes tend to smooth the irradiance distribution in the projected beam by filling in the filament shadows present in the lamp's
25 intensity distribution. However, large facets or lunes also cause a significant deviation from the reflector's original shape, resulting in a decrease in the efficiency of the optical system. The efficiency of an optical system is defined as the ratio of the power in the
30 projected beam to the power of the lamp. To preserve efficiency, and minimize the deviation from the reflector's original shape, the size and number of facets or lunes are often varied across the reflector's surface.

Such an arrangement smoothes the irradiance distribution of the projected beam, while minimizing the impact on the optical system efficiency. FIGURES 6A and 6B show orthogonal and front views, respectively, of a prior art ERS reflector **600** whose surface is covered with lunes of differing sizes and numbers in regions **602**, **604** and **606**.

[0013] FIGURE 7 presents a schematic view of a prior art ERS projection optics system **700**. The ERS optical system **700** includes an HPL lamp **100**, a luned ellipsoidal reflector **600**, a projection gate **702**, and a projection lens **704**. The projection lens **704** forms an image **706** of the projection gate, or any object placed therein, on a distant projection surface **708**. Objects placed in the projection gate may be referred to as gobos. Since the projection lens **704** forms an image of the projection gate **702**, the radiometric characteristics of the beam at the gate location are conveyed to the image **706** formed on the projection surface **708**. Therefore, if the beam in the projection gate does not have a desired irradiance distribution, the image projected on the distant surface will not have the desired irradiance distribution.

[0014] FIGURE 8 presents a contour map **800** of the irradiance distribution of the beam formed by the ERS optical system **700** on the distant projection surface **708**. As described with regard to FIG. 7, this irradiance distribution is also descriptive of the irradiance distribution of the beam at the projection gate **702**. Each contour **802** on the contour map **800** defines a zone of constant irradiance, or an iso-irradiance contour. Although the ERS reflector surface is luned, the beam at the projection gate does not have a uniform irradiance distribution.

[0015] As the iso-irradiance contours in FIG. 8 show, the irradiance distribution is not circularly symmetric. The irradiance distribution has a minimum, or void, at the center **804**, which is due to the fact that no emitter is located on the central longitudinal axis of the HPL lamp. Furthermore, the irradiance distribution has four hot spots **806**, **808**, **810** and **812**, which coincide with the location of the four emitting filaments in the HPL lamp.

[0016] Thus, the irradiance distribution map **800** is rotationally symmetric, that is, if rotated by some multiple of ninety degrees the resulting map is substantially identical to the original map. However, the map is not circularly symmetric. If rotated by an arbitrary number of degrees (specifically an angle other than a multiple of ninety degrees) the rotated map is not substantially identical to the original map.

[0017] A Parabolic Wash light (PAR) may also employ the HPL lamp. In a PAR optical system, a parabolic or near-parabolic curve is rotated about the longitudinal axis of the optical system to form a reflecting surface, typically referred to as a parabolic reflector. Because the generator curve is parabolic or near-parabolic, a beam exiting the reflector is substantially parallel to the optical axis of the PAR system. That is, the light beam is made up of light rays that are substantially parallel to each other and to the optical axis.

[0018] A PAR optical system typically consists solely of a reflector and lamp, although a lens may be placed after the reflector to further smooth or shape the beam. As described with regard to an ERS optical system, a parabolic reflector surface in a PAR optical system may be covered with facets or lunes in an attempt to project a beam with a smooth irradiance distribution. However,

the irradiance distribution of a beam produced by such a PAR optical system has a central void and four hot spots, as described with regard to an ERS optical system.

SUMMARY OF THE INVENTION

[0019] The present invention provides a reflector for use with a light source having a plurality of linear light emitting elements arranged with their longitudinal axes substantially parallel with each other and spaced substantially symmetrically about a central longitudinal axis. The reflector and light source form an efficient optical system that produces a beam with a substantially circularly symmetric irradiance distribution that is substantially without hot spots or voids.

[0020] More specifically, aspects of the invention may be found in an illumination system having a light source with a plurality of linear light emitting elements and a concave reflector with a corresponding plurality of reflecting zones. The light emitting elements are arranged symmetrically around a longitudinal axis of the light source and the longitudinal axes of the light emitting elements are parallel to each other. The reflecting zones are aligned with the plurality of light emitting elements. The illumination system produces a light beam having a substantially circularly symmetric irradiance distribution.

[0021] Other aspects of the invention may be found in a concave reflector for use with a light source having a plurality of linear light emitting elements arranged with their longitudinal axes substantially parallel with each other and spaced substantially symmetrically about a central longitudinal axis. The reflector includes a plurality of reflecting zones corresponding to, and aligned with, the plurality of light emitting elements. The reflector produces a light beam having a

substantially circularly symmetric irradiance distribution.

[0022] A surface of a reflecting zone may be defined by rotating a generator curve around an axis of rotation
5 that is not coaxial with the longitudinal axis of the light source.

[0023] Further aspects of the invention may be found in a method for producing a light beam having a substantially circularly symmetric irradiance
10 distribution from a light source having a plurality of linear light emitting elements arranged with their longitudinal axes substantially parallel with each other and spaced substantially symmetrically about a central longitudinal axis. Steps of the method include forming a
15 concave reflector having a plurality of reflecting zones corresponding to the plurality of light emitting elements, and installing the light source coaxially in the reflector so that the light emitting elements are aligned with the reflecting zones.

20 [0024] The step of forming the concave reflector may include the step of defining a surface of a reflecting zone by rotating a generator curve around an axis of rotation that is not coaxial with the longitudinal axis of the light source.

25 [0025] As such, a concave reflector, illumination system and method for producing a light beam having a substantially circularly symmetric irradiance distribution from a light source having a plurality of linear light emitting elements arranged with their
30 longitudinal axes substantially parallel with each other and spaced substantially symmetrically about a central longitudinal axis is described. Other aspects, advantages and novel features of the present invention

will become apparent from the detailed description of the invention and claims, when considered in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] For a more complete understanding of the present invention and its advantages, reference is now made to the following description taken in conjunction
5 with the accompanying drawings, wherein like reference numerals represent like parts, in which:

[0027] FIGURES 1A, 1B and 1C depict top, side and front views, respectively, of a prior art lamp employing four (4) parallel filaments;

10 [0028] FIGURE 2 illustrates an intensity distribution chart for the lamp of FIG. 1;

[0029] FIGURE 3 schematically depicts a prior art ellipsoidal reflector for use with the lamp of FIG. 1;

15 [0030] FIGURE 4 is an orthogonal view of the prior art reflector depicted in FIG. 3;

[0031] FIGURE 5A shows a section of a prior art reflector formed with facets on its surface;

[0032] FIGURE 5B shows a section of a prior art reflector formed with lunes on its surface;

20 [0033] FIGURES 6A and 6B are orthogonal and front views, respectively, of a prior art reflector formed with lunes on its surface;

[0034] FIGURE 7 presents a schematic view of a prior art ellipsoidal reflector spotlight (ERS) projection
25 optical system employing the lamp of FIG. 1;

[0035] FIGURE 8 illustrates an irradiance distribution chart for the ERS projection optics system shown in FIG. 7;

30 [0036] FIGURE 9 is a schematic view of an exemplary construction technique for generating a reflecting zone for a reflector according to the present invention;

[0037] FIGURE 10 is an orthogonal view of an exemplary reflector embodying the present invention;

[0038] FIGURE 11A and 11B are orthogonal and front views, respectively, of a reflector according to the
5 present invention;

[0039] FIGURE 12 is a schematic front view of an exemplary reflector embodying the present invention, formed with lunes on its surface; and

[0040] FIGURE 13 illustrates an irradiance
10 distribution chart for an Ellipsoidal Reflector Spotlight system employing a reflector according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0041] A preferred embodiment of the present invention is a reflector having a non-circular cross section in a plane perpendicular to the reflector's central longitudinal axis. The reflector includes reflecting zones equal in number to, and rotationally aligned with, the light emitting elements of a prior art High Performance Lamp (HPL).

[0042] FIGURE 9 depicts a schematic view of an exemplary construction technique for generating a reflecting zone for a reflector according to the present invention. FIG. 9 shows a generator curve **902**, an HPL lamp **100** and its central longitudinal axis **105**, and an optical axis **304**, which is defined by the lamp's longitudinal axis **105**. An axis of rotation **904**, which is not coaxial with the lamp's longitudinal axis **105**, is also shown. The axis of rotation **904** may intersect the lamp's longitudinal axis **105**, and the optical axis **304**, as shown, or may lie parallel to it. Axis of rotation **904** is shown at an angle that brings the forward tip of generator curve **902** closer to the optical axis **304**, but it may alternatively be defined at an angle that moves the forward tip of generator curve **902** farther away from the optical axis **304**.

[0043] The location and orientation of the axis of rotation **904** is determined through an iterative optimization procedure. The optimization procedure seeks an axis of rotation that maximizes the circular symmetry of the resulting irradiance distribution, minimizes hot spots and voids in the irradiance distribution, and maximizes the resulting optical system efficiency

[0044] A reflecting surface is defined by rotating the generator curve **902** about the axis of rotation **904**. Arrow **908** depicts the sense of rotation during the construction process. A dotted curve **906** represents an opening of the reflecting surface, and dotted curve **910**, in combination with the generator curve **902**, depicts a cross section of the reflecting surface.

[0045] The generator curve **902**, as shown, is an arbitrary curve. Alternatively, the generator curve used could be a segment of an elliptical, parabolic or hyperbolic curve or any other curve described by a polynomial or other mathematical function. As is well known in the art, a conventional reflector defined by an ellipsoidal or near-ellipsoidal curve will produce a converging light beam, a conventional reflector defined by a parabolic or near-parabolic curve will produce a substantially parallel light beam, and a conventional reflector defined by a hyperbolic or near-hyperbolic curve will produce a diverging light beam. Whether a light beam converges, diverges or is parallel is typically referred to as the angle of the beam.

[0046] In contrast, the angle of a light beam produced by a reflector constructed according to the present invention is determined not only by the shape of generator curve used, as described above, but also by the angle that the axis of rotation **904** makes with the optical axis **304**. Regardless of the shape of generator curve used, the convergence of a beam may be increased by tipping the forward tip of a generator curve toward the optical axis. Similarly, as the forward tip of a generator curve is tipped farther away from the optical axis, a less convergent beam is produced. Thus, by selecting a shape for the generator curve and an angle

that the axis of rotation makes with the optical axis, a designer may create a reflector according to the present invention that produces a light beam of a desired angle.

[0047] FIGURE 10 presents an orthogonal view of a smooth reflector **1000** generated by the method described with regard to FIG. 9. The reflector **1000** is not useful as generated, since it produces a beam that propagates in a direction coincident with axis **904**, rather than a beam coincident with the optical axis **304**. A reflecting zone **1006** may be defined by planes **1002** and **1004**, which are oriented at 90 degrees to each other, and whose line of intersection coincides with the optical axis **304**. A reflector according to the present invention may then be defined by duplicating reflecting zone **1006** at 90 degree increments about the optical axis **304**.

[0048] FIGURES 11A and 11B show four reflecting zones **1102**, **1104**, **1106** and **1108** joined together to form an exemplary reflector **1100** according to the present invention. The reflecting zones **1102**, **1104**, **1106** and **1108** are positioned and oriented so that they are rotationally aligned with the four filaments **102**, **104**, **106** and **108** in an HPL lamp. A cross section taken through the reflecting surface, perpendicular to the lamp's central longitudinal axis, is not circular. For clarity, a circle **1110** is superimposed on the reflector's perimeter to illustrate the deviation of the exemplary reflector's cross section from a circle.

[0049] FIGURE 12 shows a preferred embodiment of the present invention. Reflector **1200** includes four reflecting zones **1102**, **1104**, **1106** and **1108**, each of which has been fitted with 12 lunes **1202** for a total of 48 lunes on surface of reflector **1200**. Due to the construction technique employed to generate the

reflecting zones, the embodiment shown in FIG. 12 has a noncircular lamp access hole **1204**. However, for convenience of manufacture, the lamp access hole **1204** can be made slightly oversized and round.

5 [0050] The four reflecting zones in the exemplary reflectors shown in FIGS. 11 and 12 aim the light from their associated HPL lamp filament toward the optical axis. The superposition of flux from each combination of emitter and reflecting zone produces a beam with a
10 circularly symmetric irradiance distribution, as shown in FIGURE 13. In this plot, the isoirradiance curves **1302** are generally circular. Furthermore, the four-fold symmetry of the HPL lamp emitters is no longer visible in the projected beam.

15 [0051] The embodiment of the present invention described in this disclosure is a reflector for use with an HPL lamp having four linear, helically-wound incandescent filaments. However, it will be apparent to one of ordinary skill in the art that a reflector
20 according to the present invention may be employed with lamps having other numbers of linear light emitting elements which are parallel to each other and are also parallel to the lamp's central longitudinal axis. For example, such lamps could be have two, three, five,
25 eight, or any other number of elements.

 [0052] Furthermore, the linear light emitting elements need not be comprised of helically-wound incandescent filaments. The elements may be multiple HID arc lamps, mounted parallel to each other and equally spaced around
30 a central longitudinal axis. A single HID arc lamp, comprised of multiple light emitting volumes, each enclosed in a common burner and equally spaced about a central longitudinal axis, may also be employed. The

linear light emitting elements may also be a parallel arrangement of optical fibers, whose surfaces have been scored to allow light to escape along their length. Alternatively, the elements may be a plurality of
5 fluorescent tubes, either separate lamps or a single lamp with a number of parallel tubes arranged about a central longitudinal axis. One skilled in the art will recognize that other light sources having multiple linear light emitting elements may also be used with a reflector
10 according to the present invention.

[0053] The above disclosure describes embodiments of the present invention for use in an ellipsoidal reflector spotlight (ERS) and a parabolic wash light (PAR). However, one skilled in the art will recognize
15 that a reflector according to the present invention may be employed to collect and redistribute light from a plurality of parallel linear light sources in optical systems in a number of other applications, as well. For example, such optical systems might include cinema
20 projection systems, theatrical follow-spotlight systems, digital projection systems employing digital micro-mirrors, digital projection systems employing reflective or refractive liquid crystal displays, rear projection televisions, fiber optic illuminators, and head up
25 display illuminators.

[0054] Finally, the preferred embodiment depicted in FIG. 12 is a reflector whose surface is covered with 48 lunes. Other faceting or luning strategies may also be employed. A reflector according to the present invention
30 may be covered with several courses of lunes, and the size and number of the lunes in each course may be varied over the reflecting surface. Additionally, a first

portion of the reflecting surface may be lured, while a second portion of the reflecting surface may be faceted.

WHAT IS CLAIMED IS:

1. An illumination system for producing a light beam, comprising:

5 a lamp comprising a plurality of linear light emitting elements arranged with their longitudinal axes substantially parallel to each other and spaced substantially symmetrically around a longitudinal axis of the lamp; and

10 a concave reflector aligned with the longitudinal axis of the lamp, comprising a plurality of reflecting zones, which are equal in number to and rotationally aligned with the plurality of linear light emitting elements in the lamp,

15 wherein the light beam has a substantially circularly symmetric irradiance distribution.

2. The illumination system of Claim 1, wherein the light beam produced by the lamp and concave reflector
20 converges, further comprising:

a gate having an aperture aligned with the longitudinal axis of the lamp positioned substantially at the convergence of the light beam; and

25 a lens aligned with the longitudinal axis of the lamp and positioned on the side of the gate opposite the incandescent lamp,

wherein the lens has a focus located near the gate and produces an image of the gate at a plane located on the side of the lens opposite the gate.

30

3. The illumination system of Claim 1, wherein the light beam produced by the lamp and concave reflector comprises substantially parallel light rays.

4. The illumination system of Claim 1, wherein the light beam produced by the lamp and concave reflector diverges.

5 5. The illumination system of Claim 1, wherein the concave reflector further comprises lunes.

6. The illumination system of Claim 1, wherein the plurality of light emitting elements numbers four and the
10 light emitting elements are helically wound incandescent filaments.

7. A concave reflector for use with a lamp comprising a plurality of linear light emitting elements
15 arranged with their longitudinal axes substantially parallel to each other and spaced substantially symmetrically around a longitudinal axis of the lamp, the concave reflector comprising:

a plurality of reflecting zones equal in number to
20 the plurality of linear light emitting elements contained in the lamp,

wherein when the concave reflector is aligned with the longitudinal axis of the lamp and the reflecting zones of the concave reflector are rotationally aligned
25 with the plurality of linear light emitting elements, the concave reflector produces a beam of light having a substantially circularly symmetric irradiance distribution.

30 8. The concave reflector of Claim 7, wherein the light beam produced by the concave reflector converges.

9. The concave reflector of Claim 7, wherein the light beam produced by the concave reflector comprises substantially parallel light rays.

5 10. The concave reflector of Claim 7, wherein the light beam produced by the concave reflector diverges.

11. The concave reflector of Claim 7, wherein the concave reflector further comprises a one of lunes and
10 facets.

12. The concave reflector of Claim 7, wherein a surface of a one of the plurality of reflecting zones is defined by a generator curve rotated around an axis of
15 rotation that is not coaxial with the longitudinal axis of the lamp.

13. The concave reflector of Claim 12, wherein the generator curve is defined by an arbitrary curve.
20

14. The concave reflector of Claim 12, wherein the generator curve is defined by a mathematical function.

15. A method for producing a beam of light having a
25 substantially circularly symmetric irradiance distribution from a lamp comprised of a plurality of linear light emitting elements arranged with their longitudinal axes substantially parallel with each other and spaced substantially symmetrically around a central
30 longitudinal axis of the lamp, comprising the steps of:

forming a concave reflector comprising a plurality of reflecting zones equal in number to the plurality of linear light emitting elements in the lamp; and

installing the lamp coaxially in the concave reflector such that the reflecting zones are rotationally aligned with the plurality of linear light emitting elements in the lamp.

5

16. The method of Claim 15, wherein the light beam produced by the lamp and concave reflector converges, further comprising the steps of:

positioning a gate having an aperture aligned with
10 the longitudinal axis of the lamp substantially at the convergence of the light beam; and

positioning a lens aligned with the longitudinal axis of the lamp on the side of the gate opposite the incandescent lamp,

15 wherein the lens has a focus located near the gate and produces an image of the gate at a plane located on the side of the lens opposite the gate.

17. The method of Claim 15, wherein the light beam
20 produced by the lamp and concave reflector comprises substantially parallel light rays.

18. The method of Claim 15, wherein the light beam produced by the lamp and concave reflector diverges.

25

19. The method of Claim 15, wherein the step of forming the concave reflector comprises the step of forming a one of lunes and facets in the surface of the concave reflector.

30

20. The method of Claim 15, wherein the step of forming the concave reflector comprises the step of defining a surface of a one of the plurality of reflecting zones by rotating a generator curve around an
5 axis of rotation that is not coaxial with the longitudinal axis of the lamp.

1 / 7


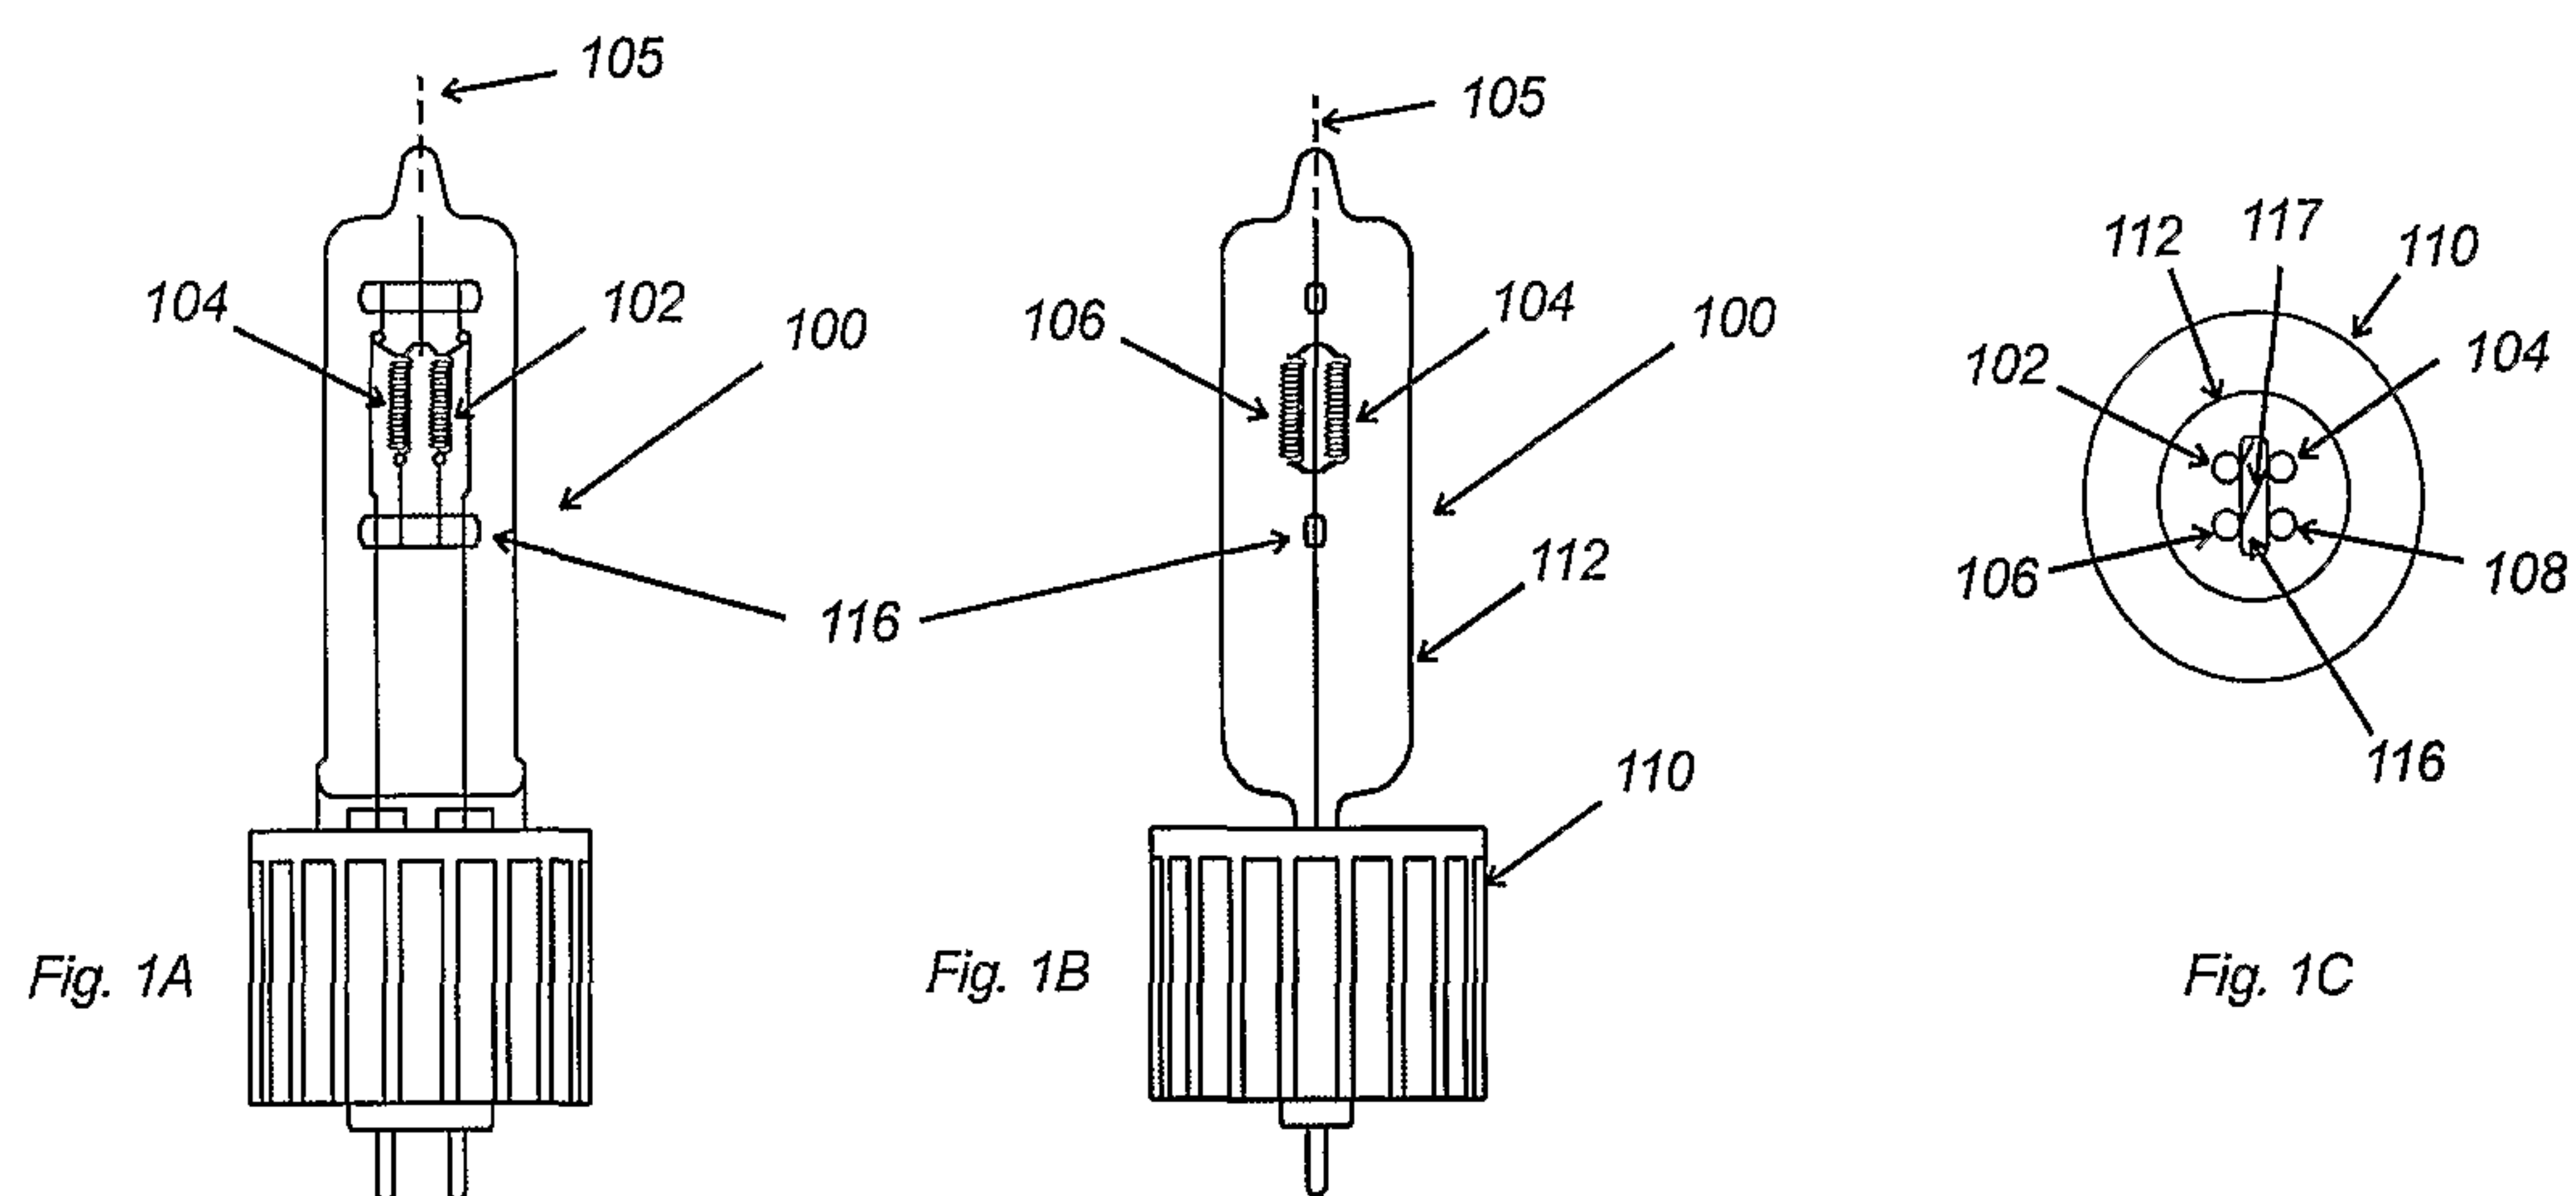


Fig. 1
PRIOR ART

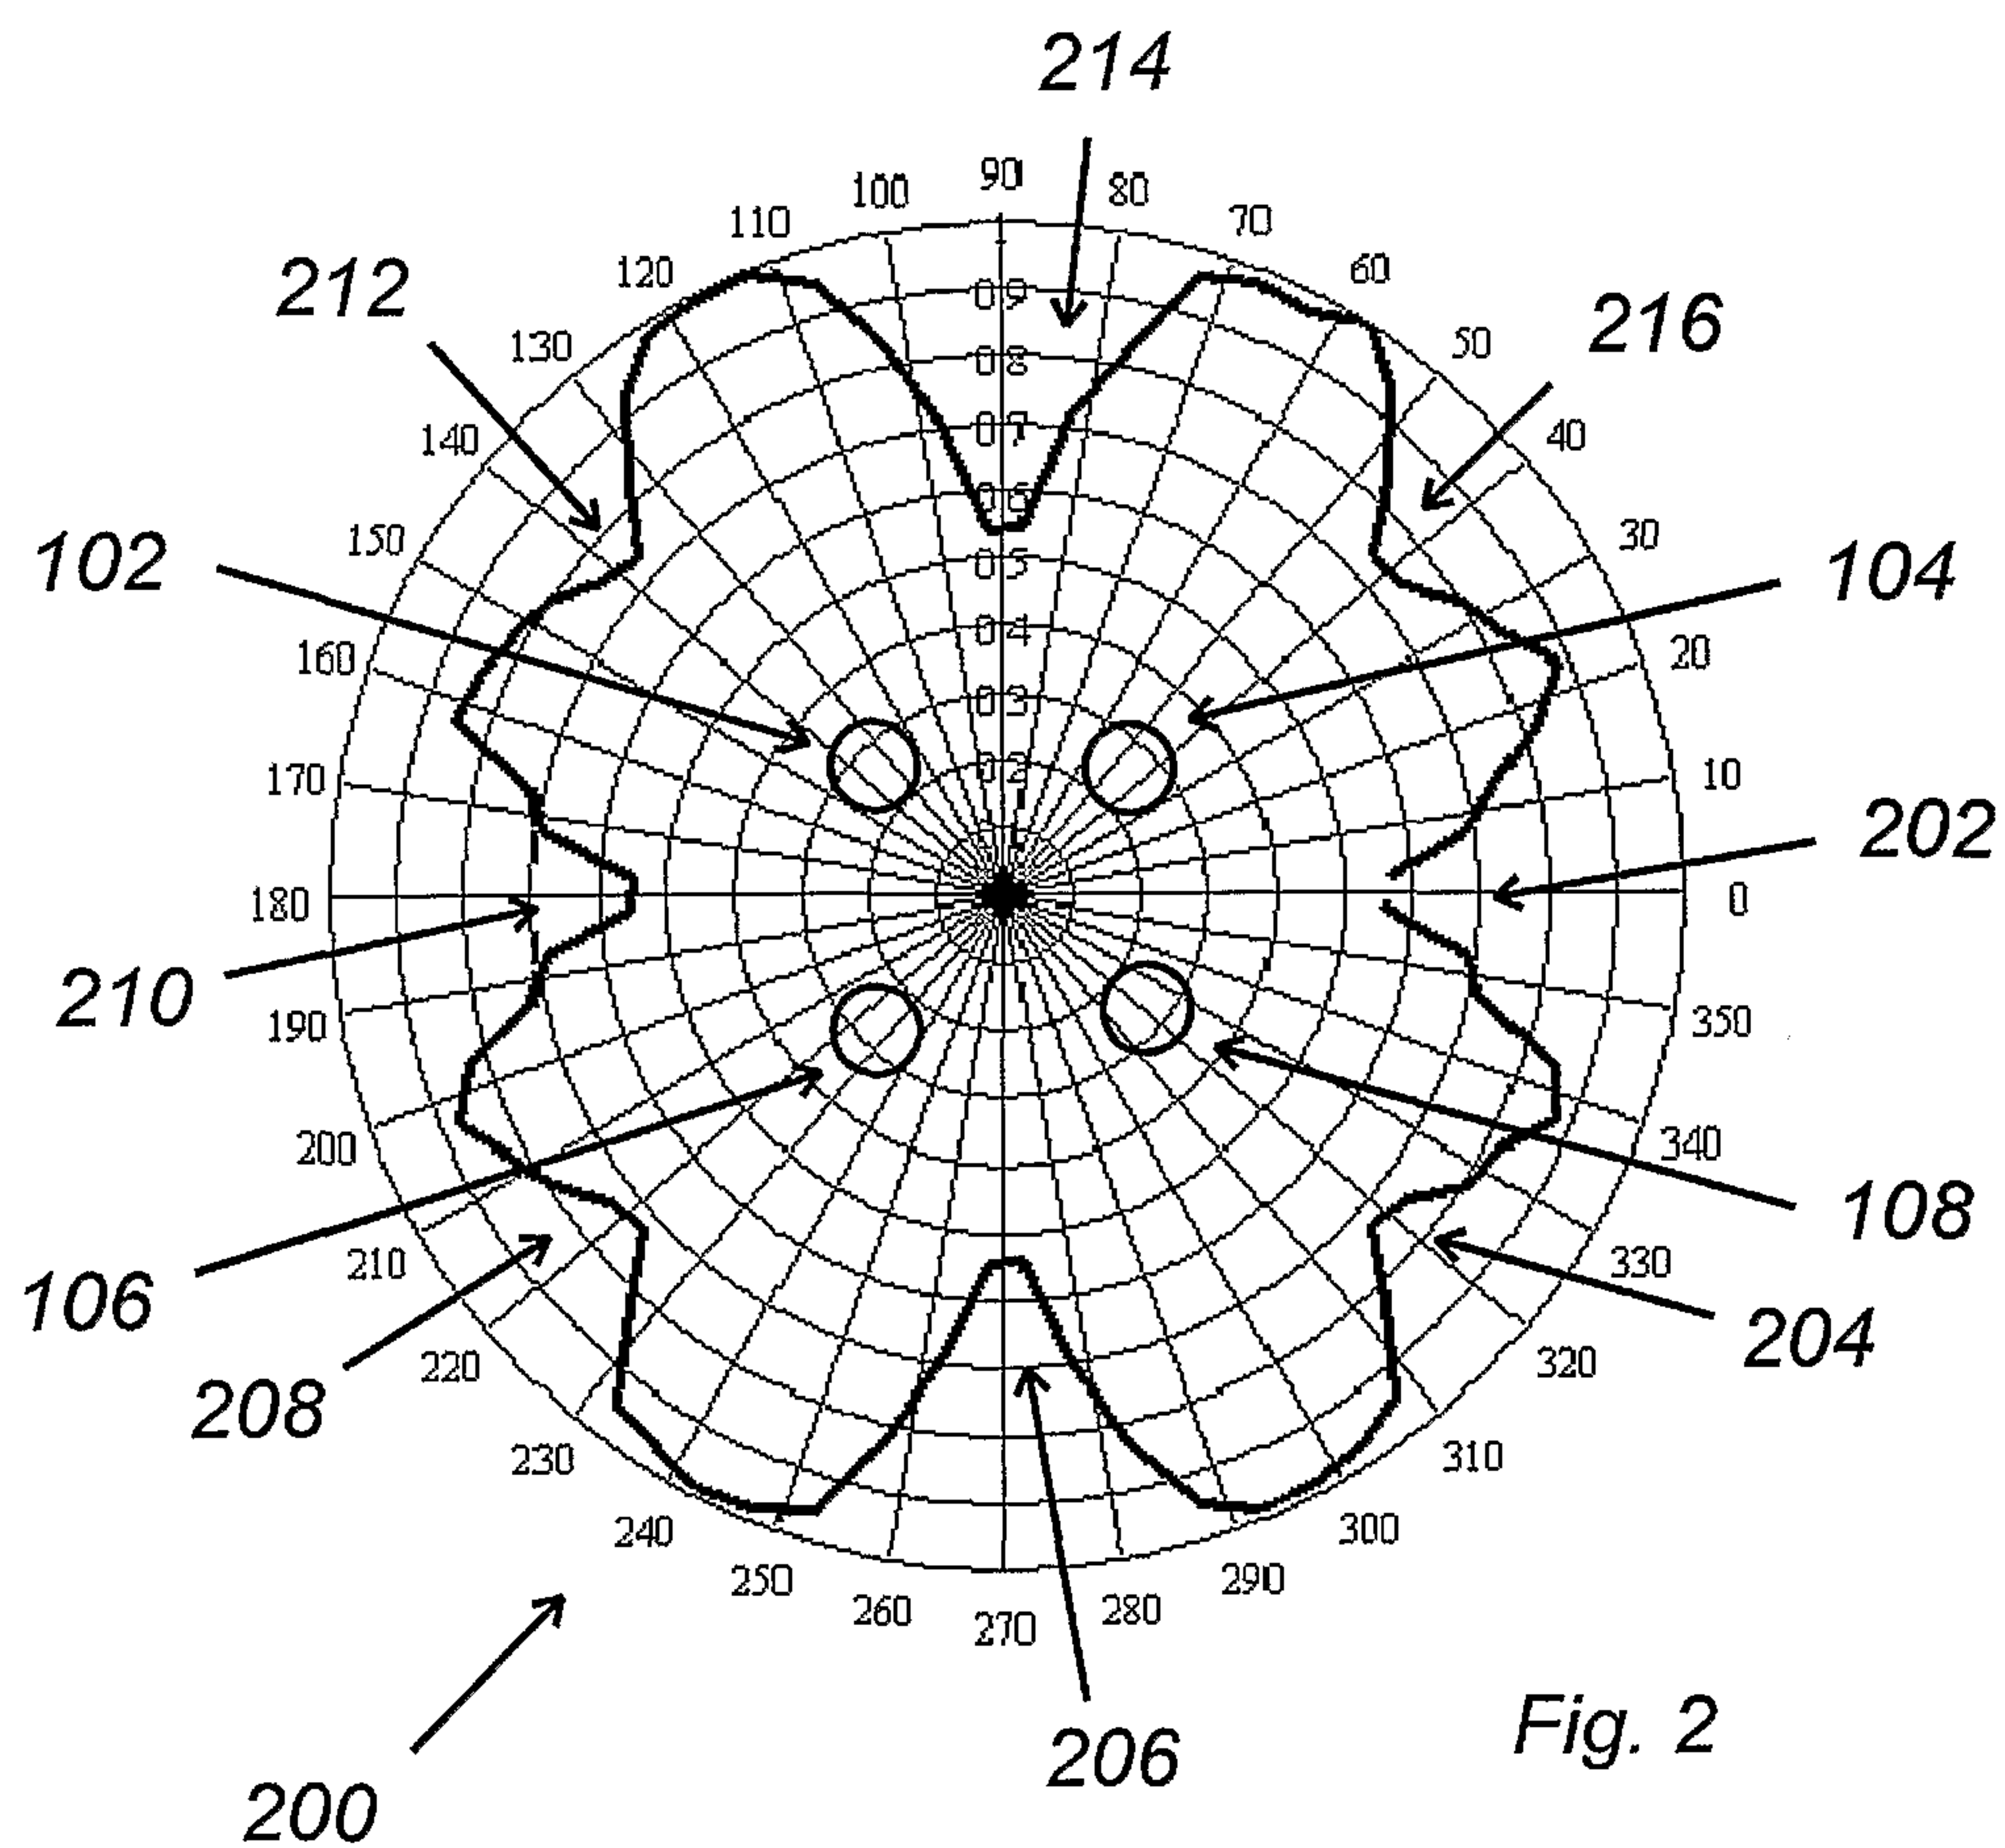

PRIOR ART

2 / 7

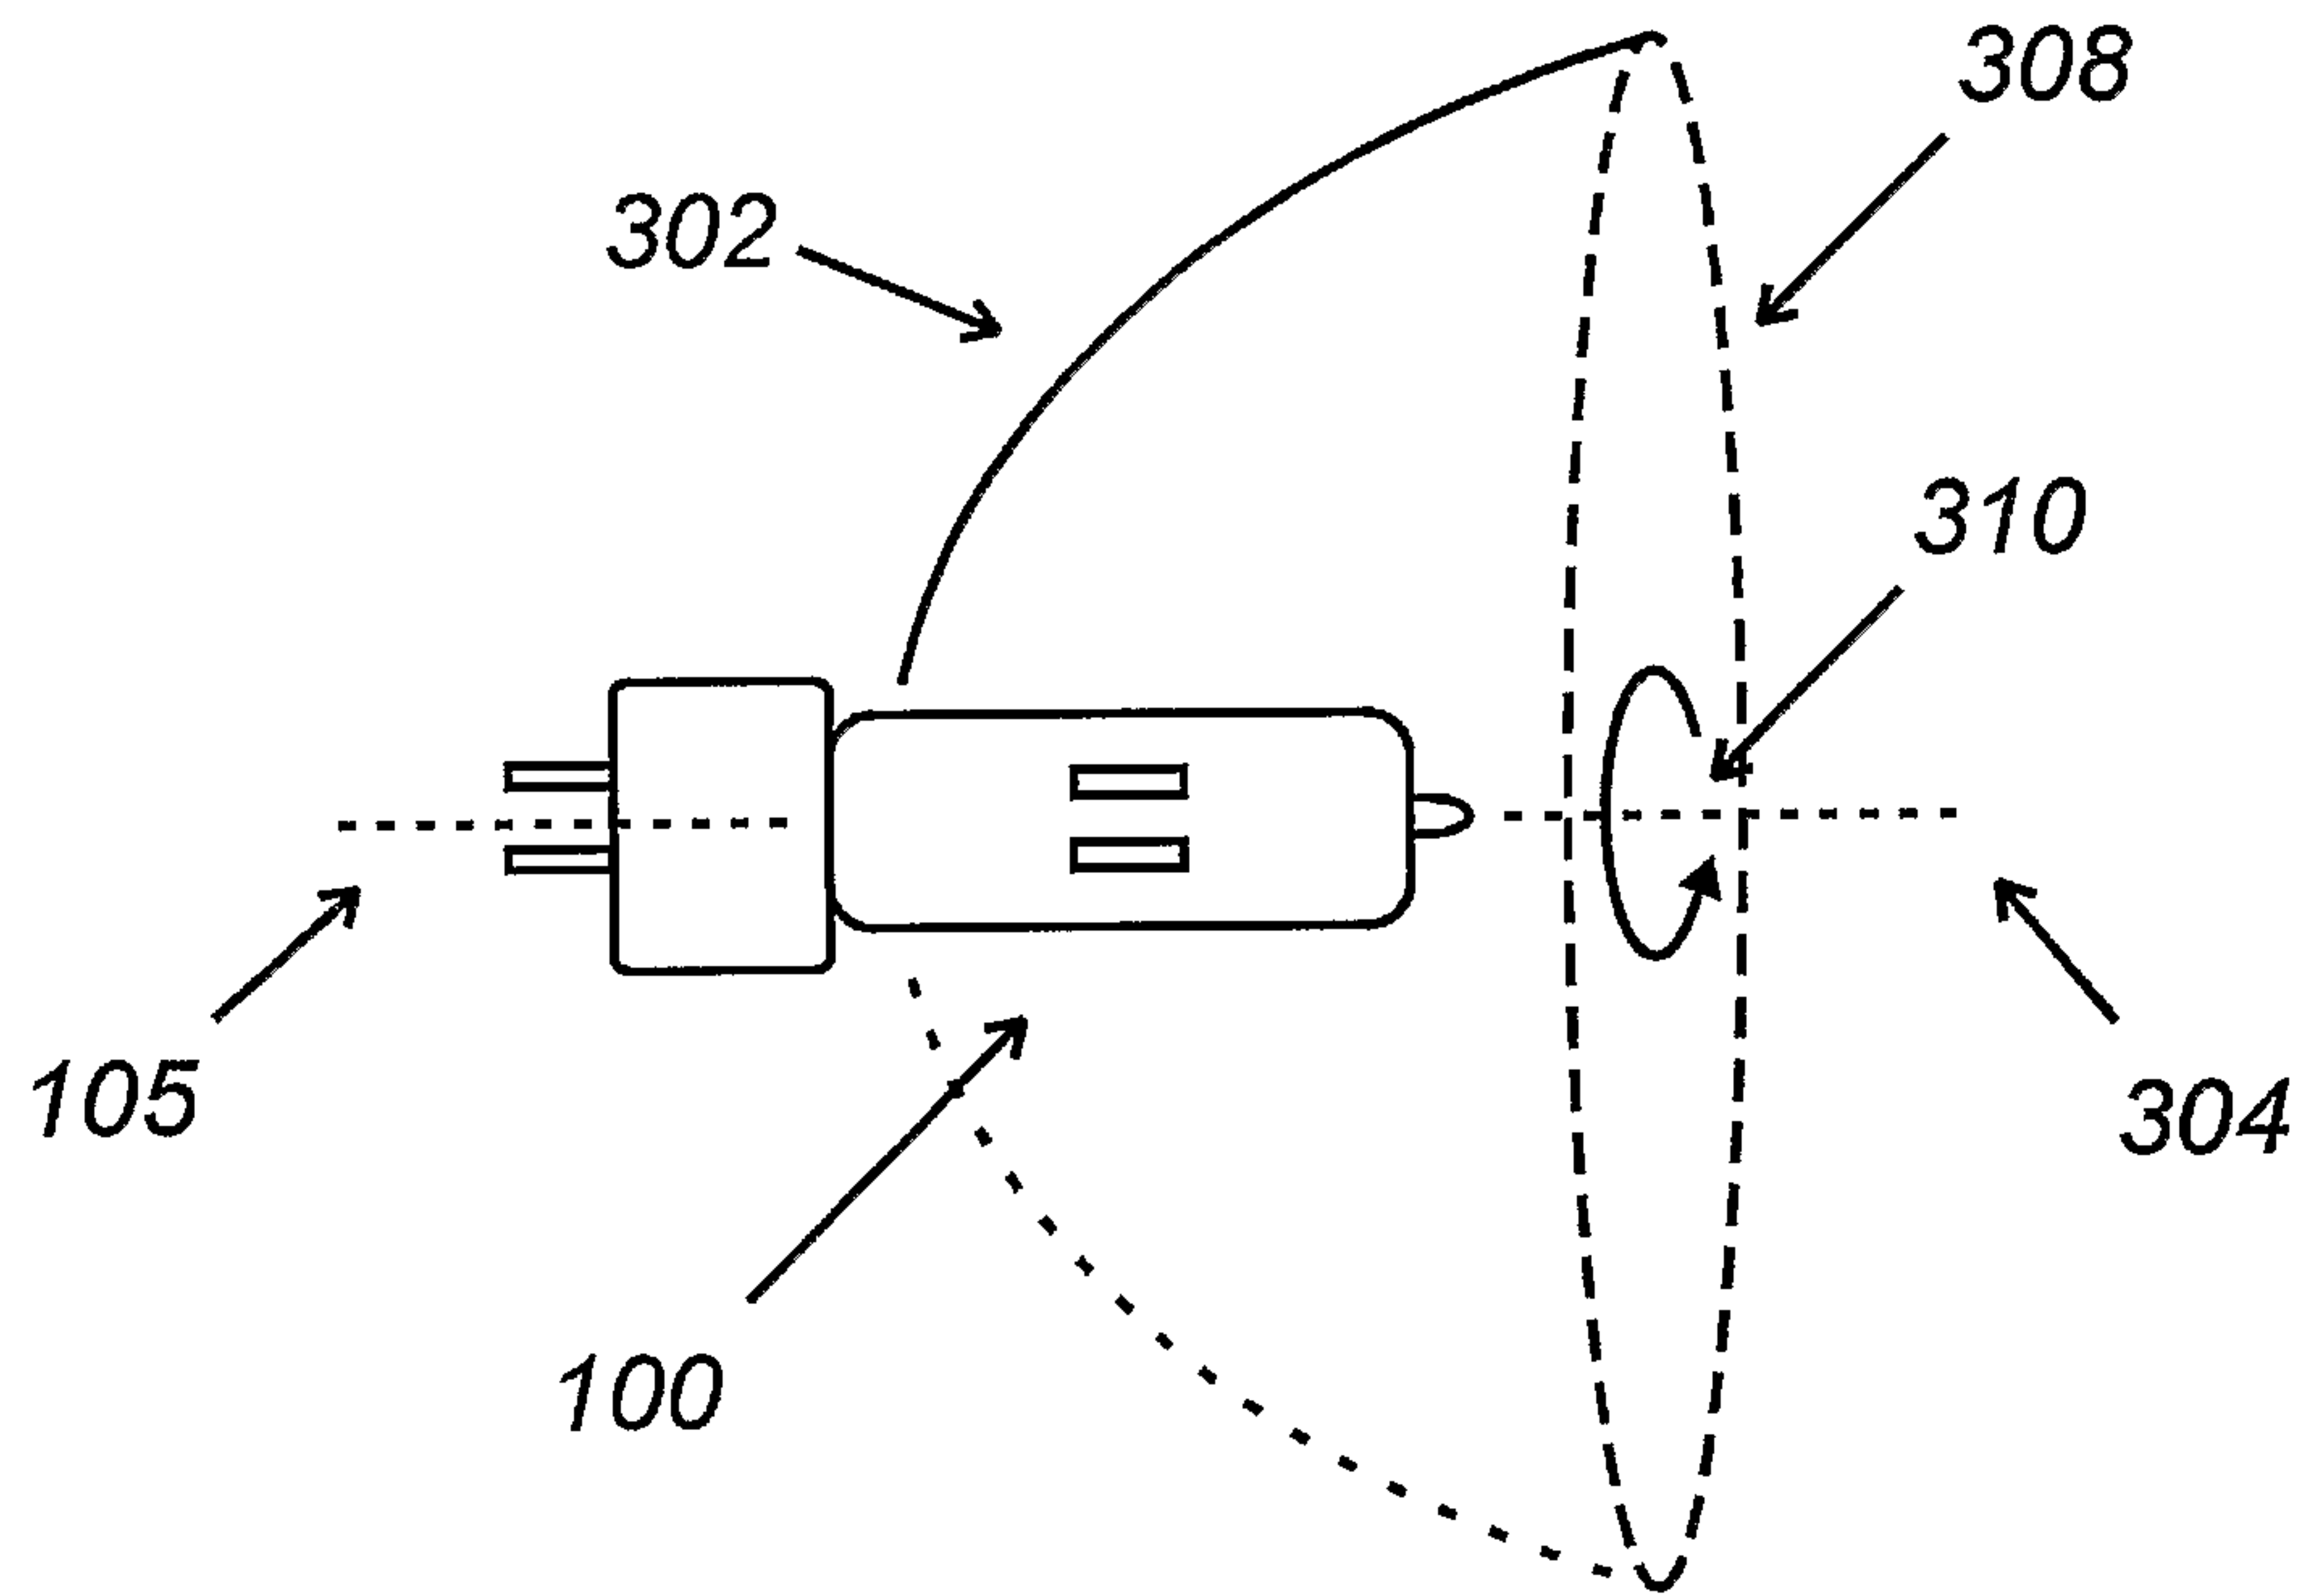


Fig. 3
PRIOR ART

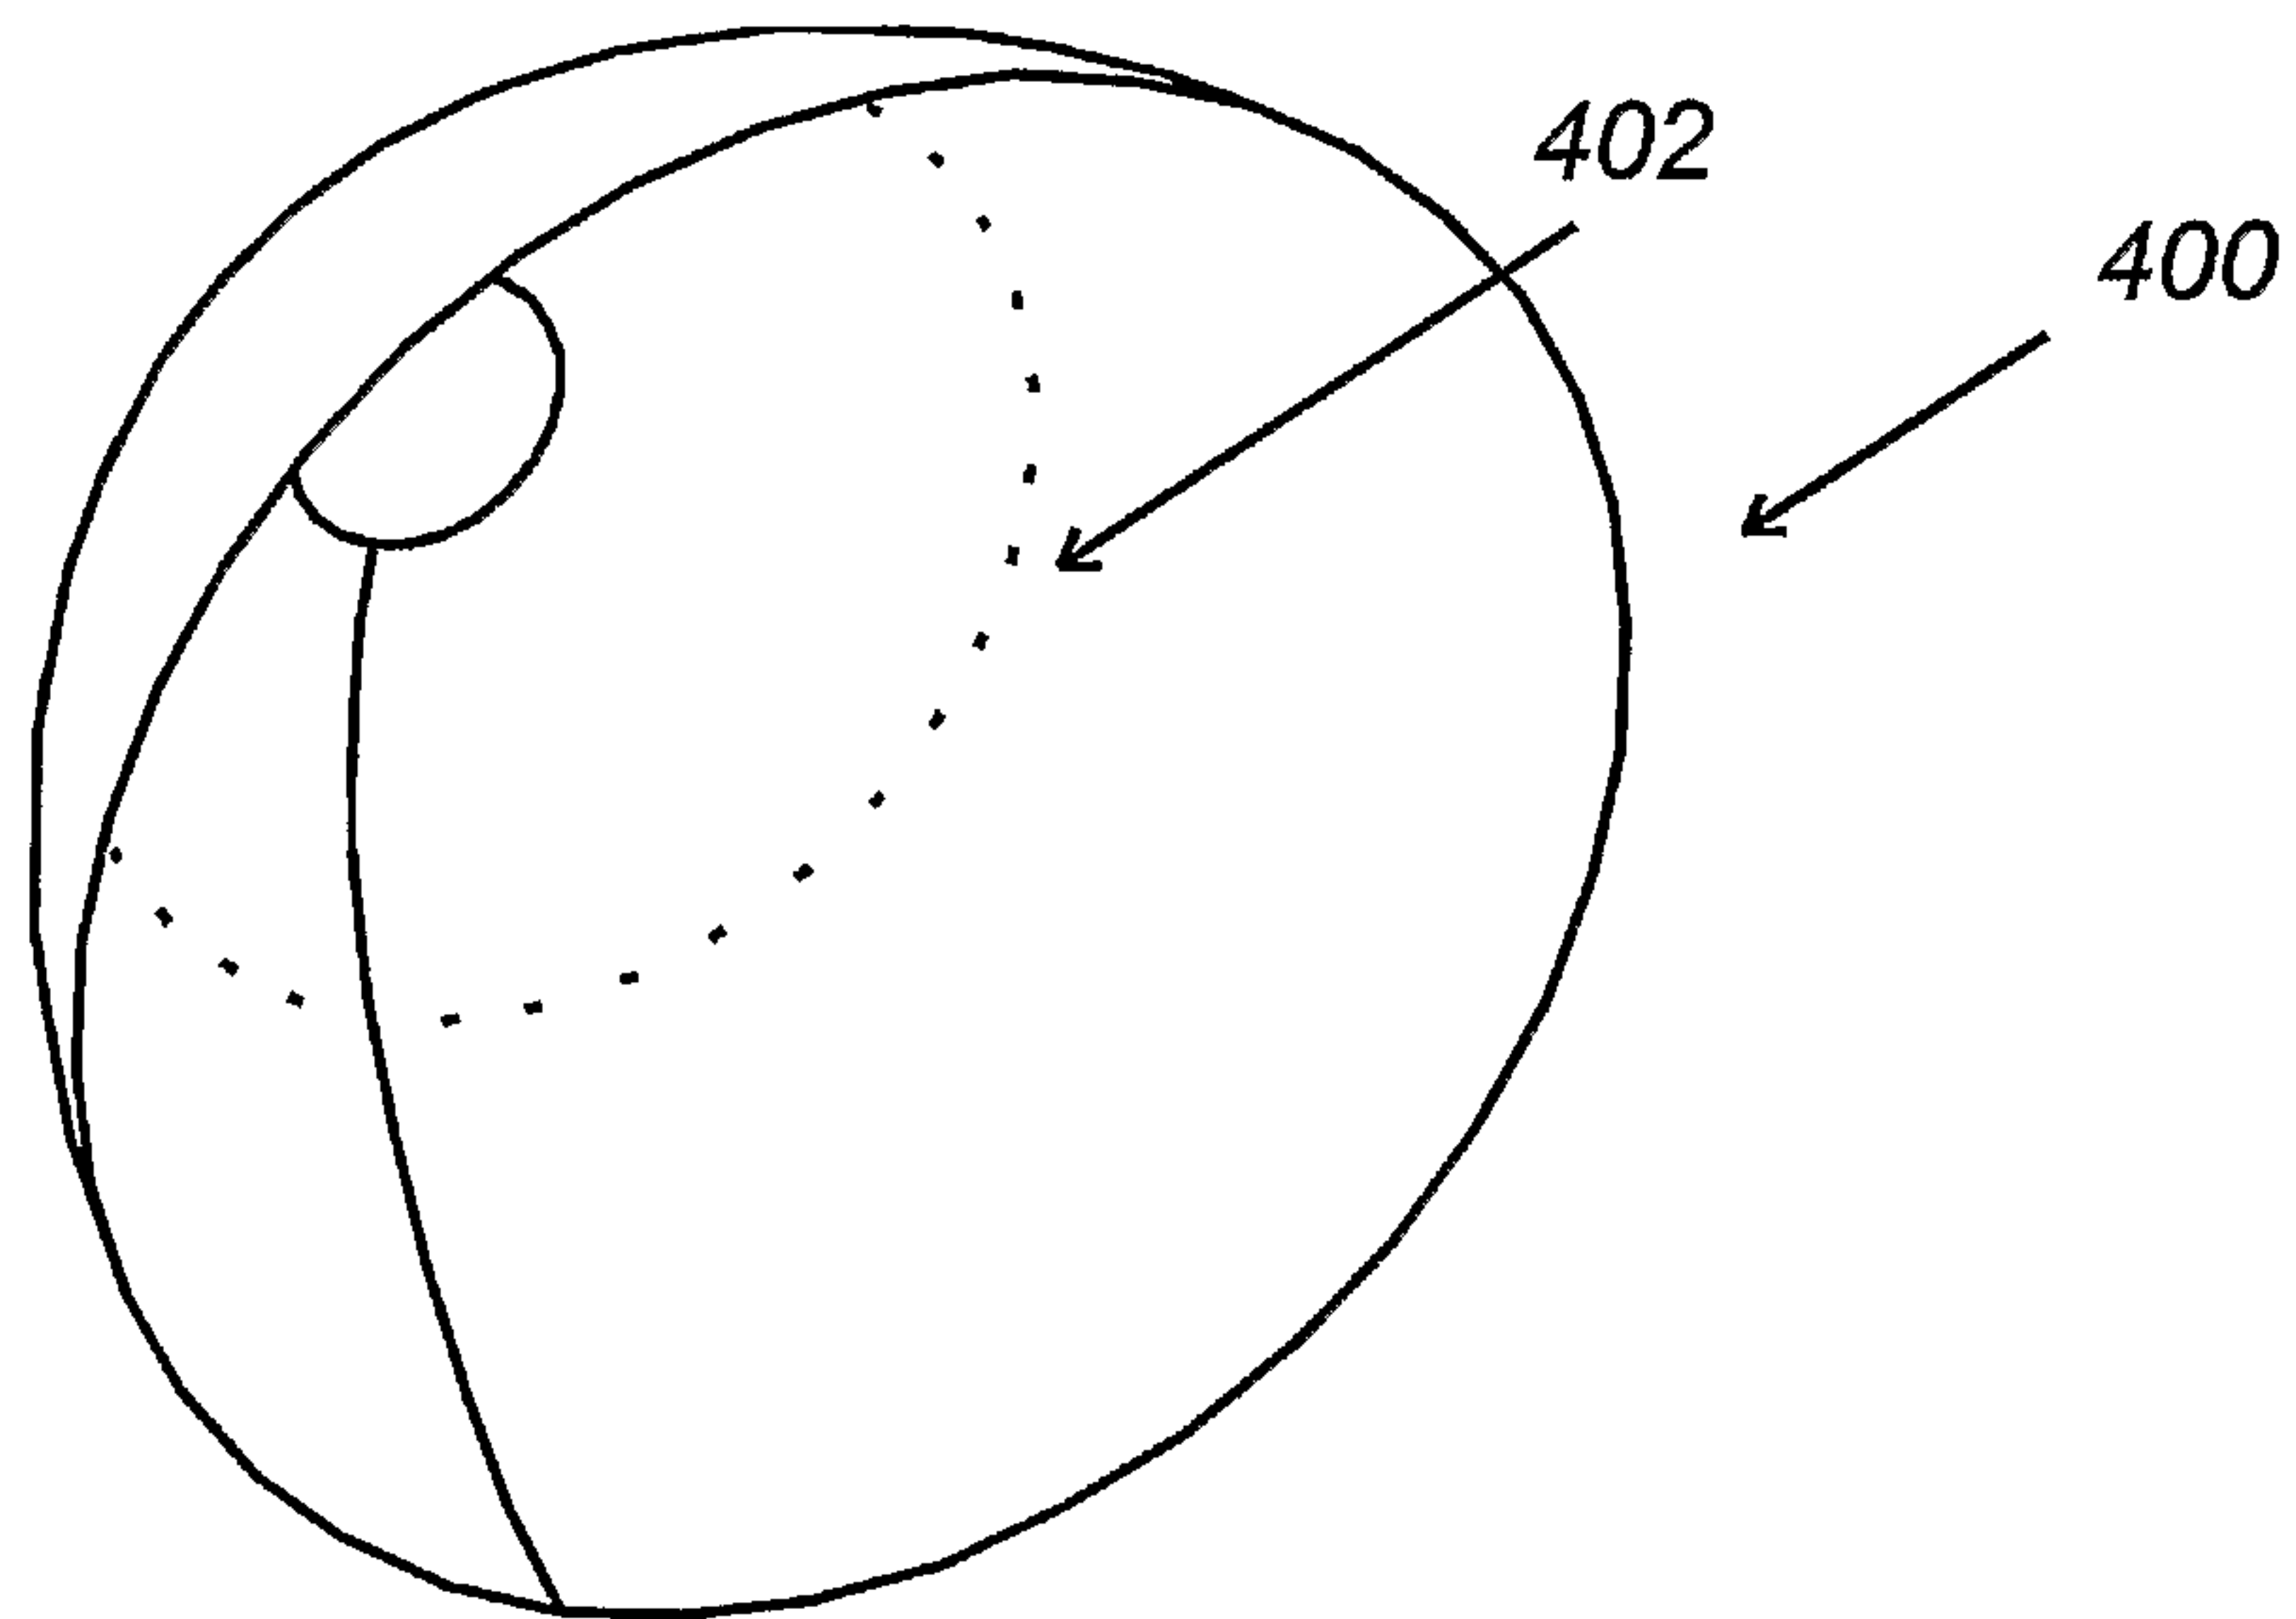


Fig. 4
PRIOR ART

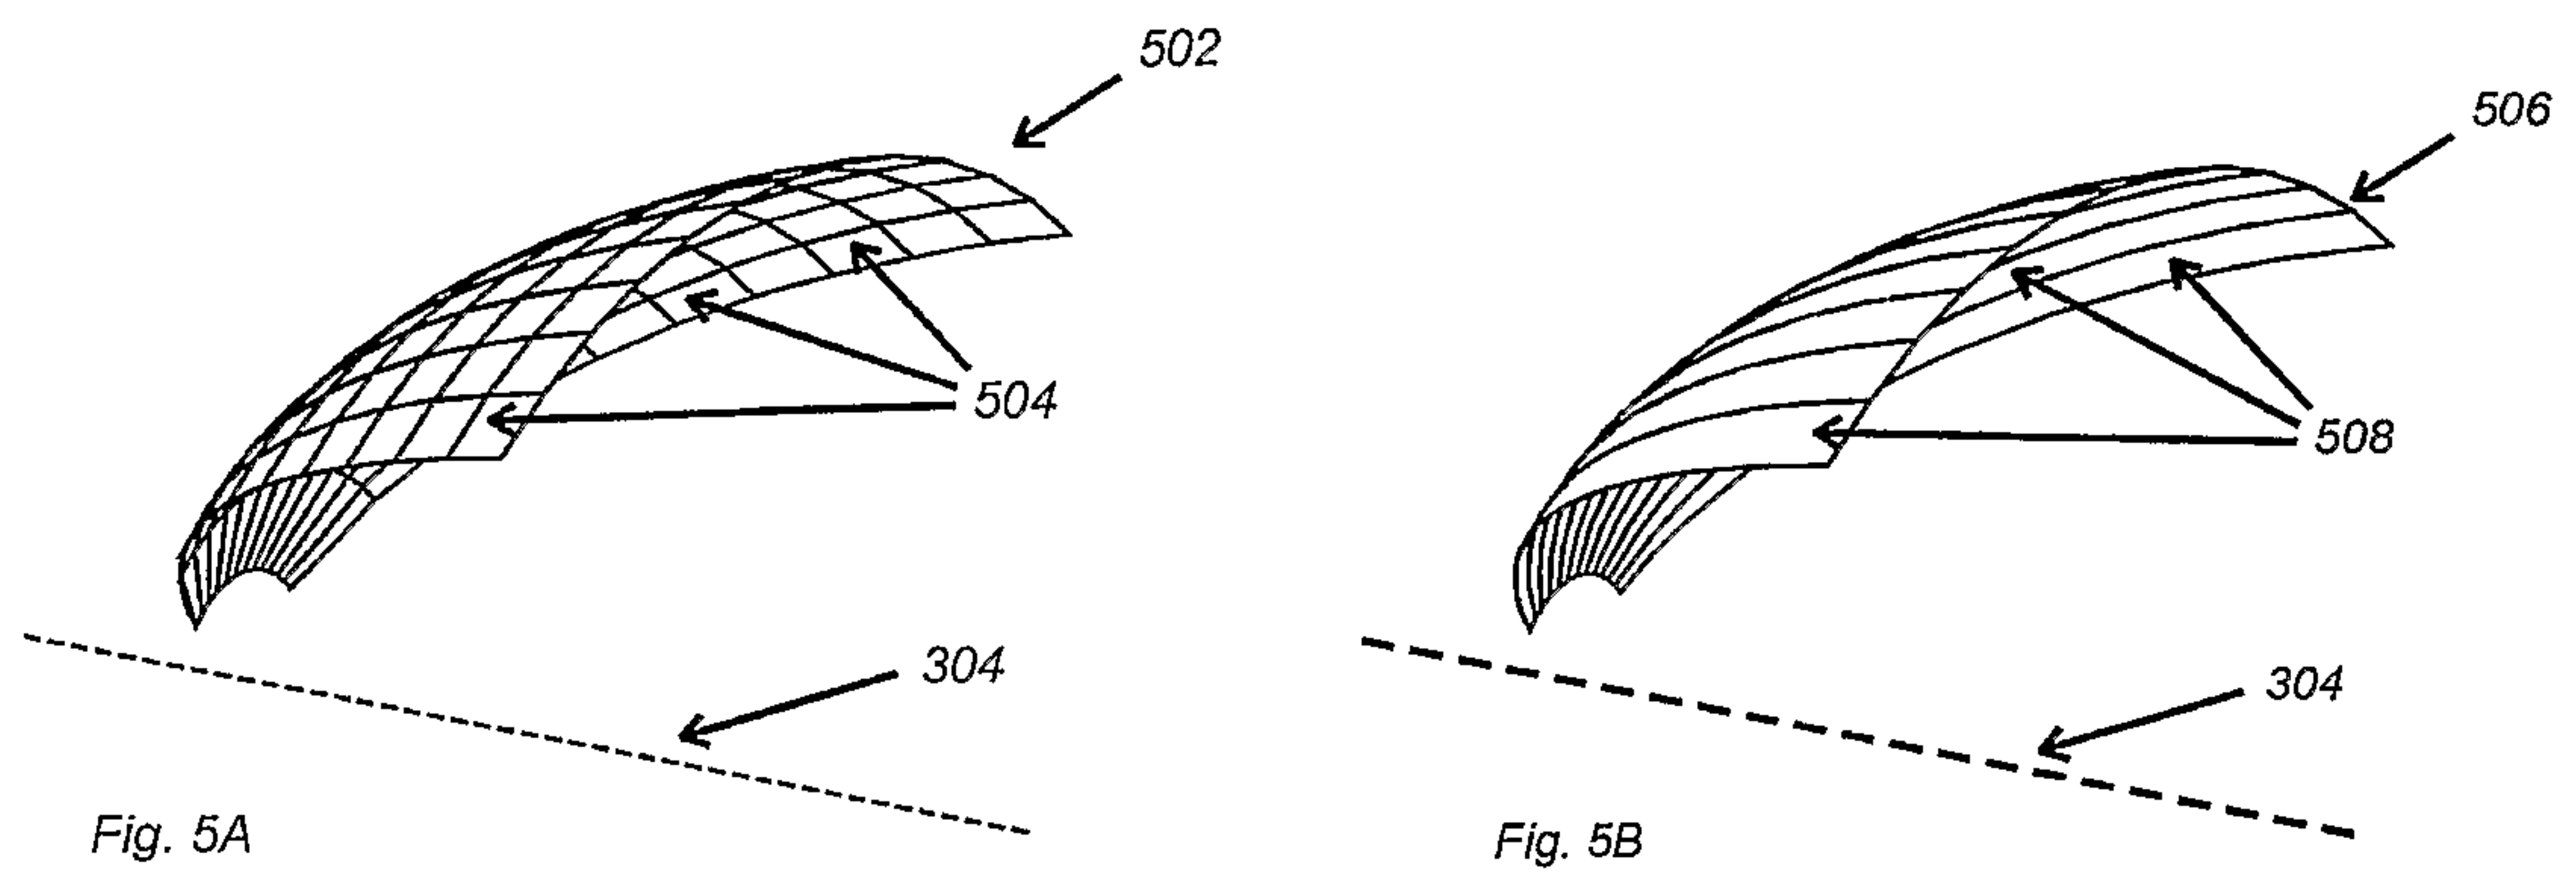
3 / 7

Fig. 5
PRIOR ART

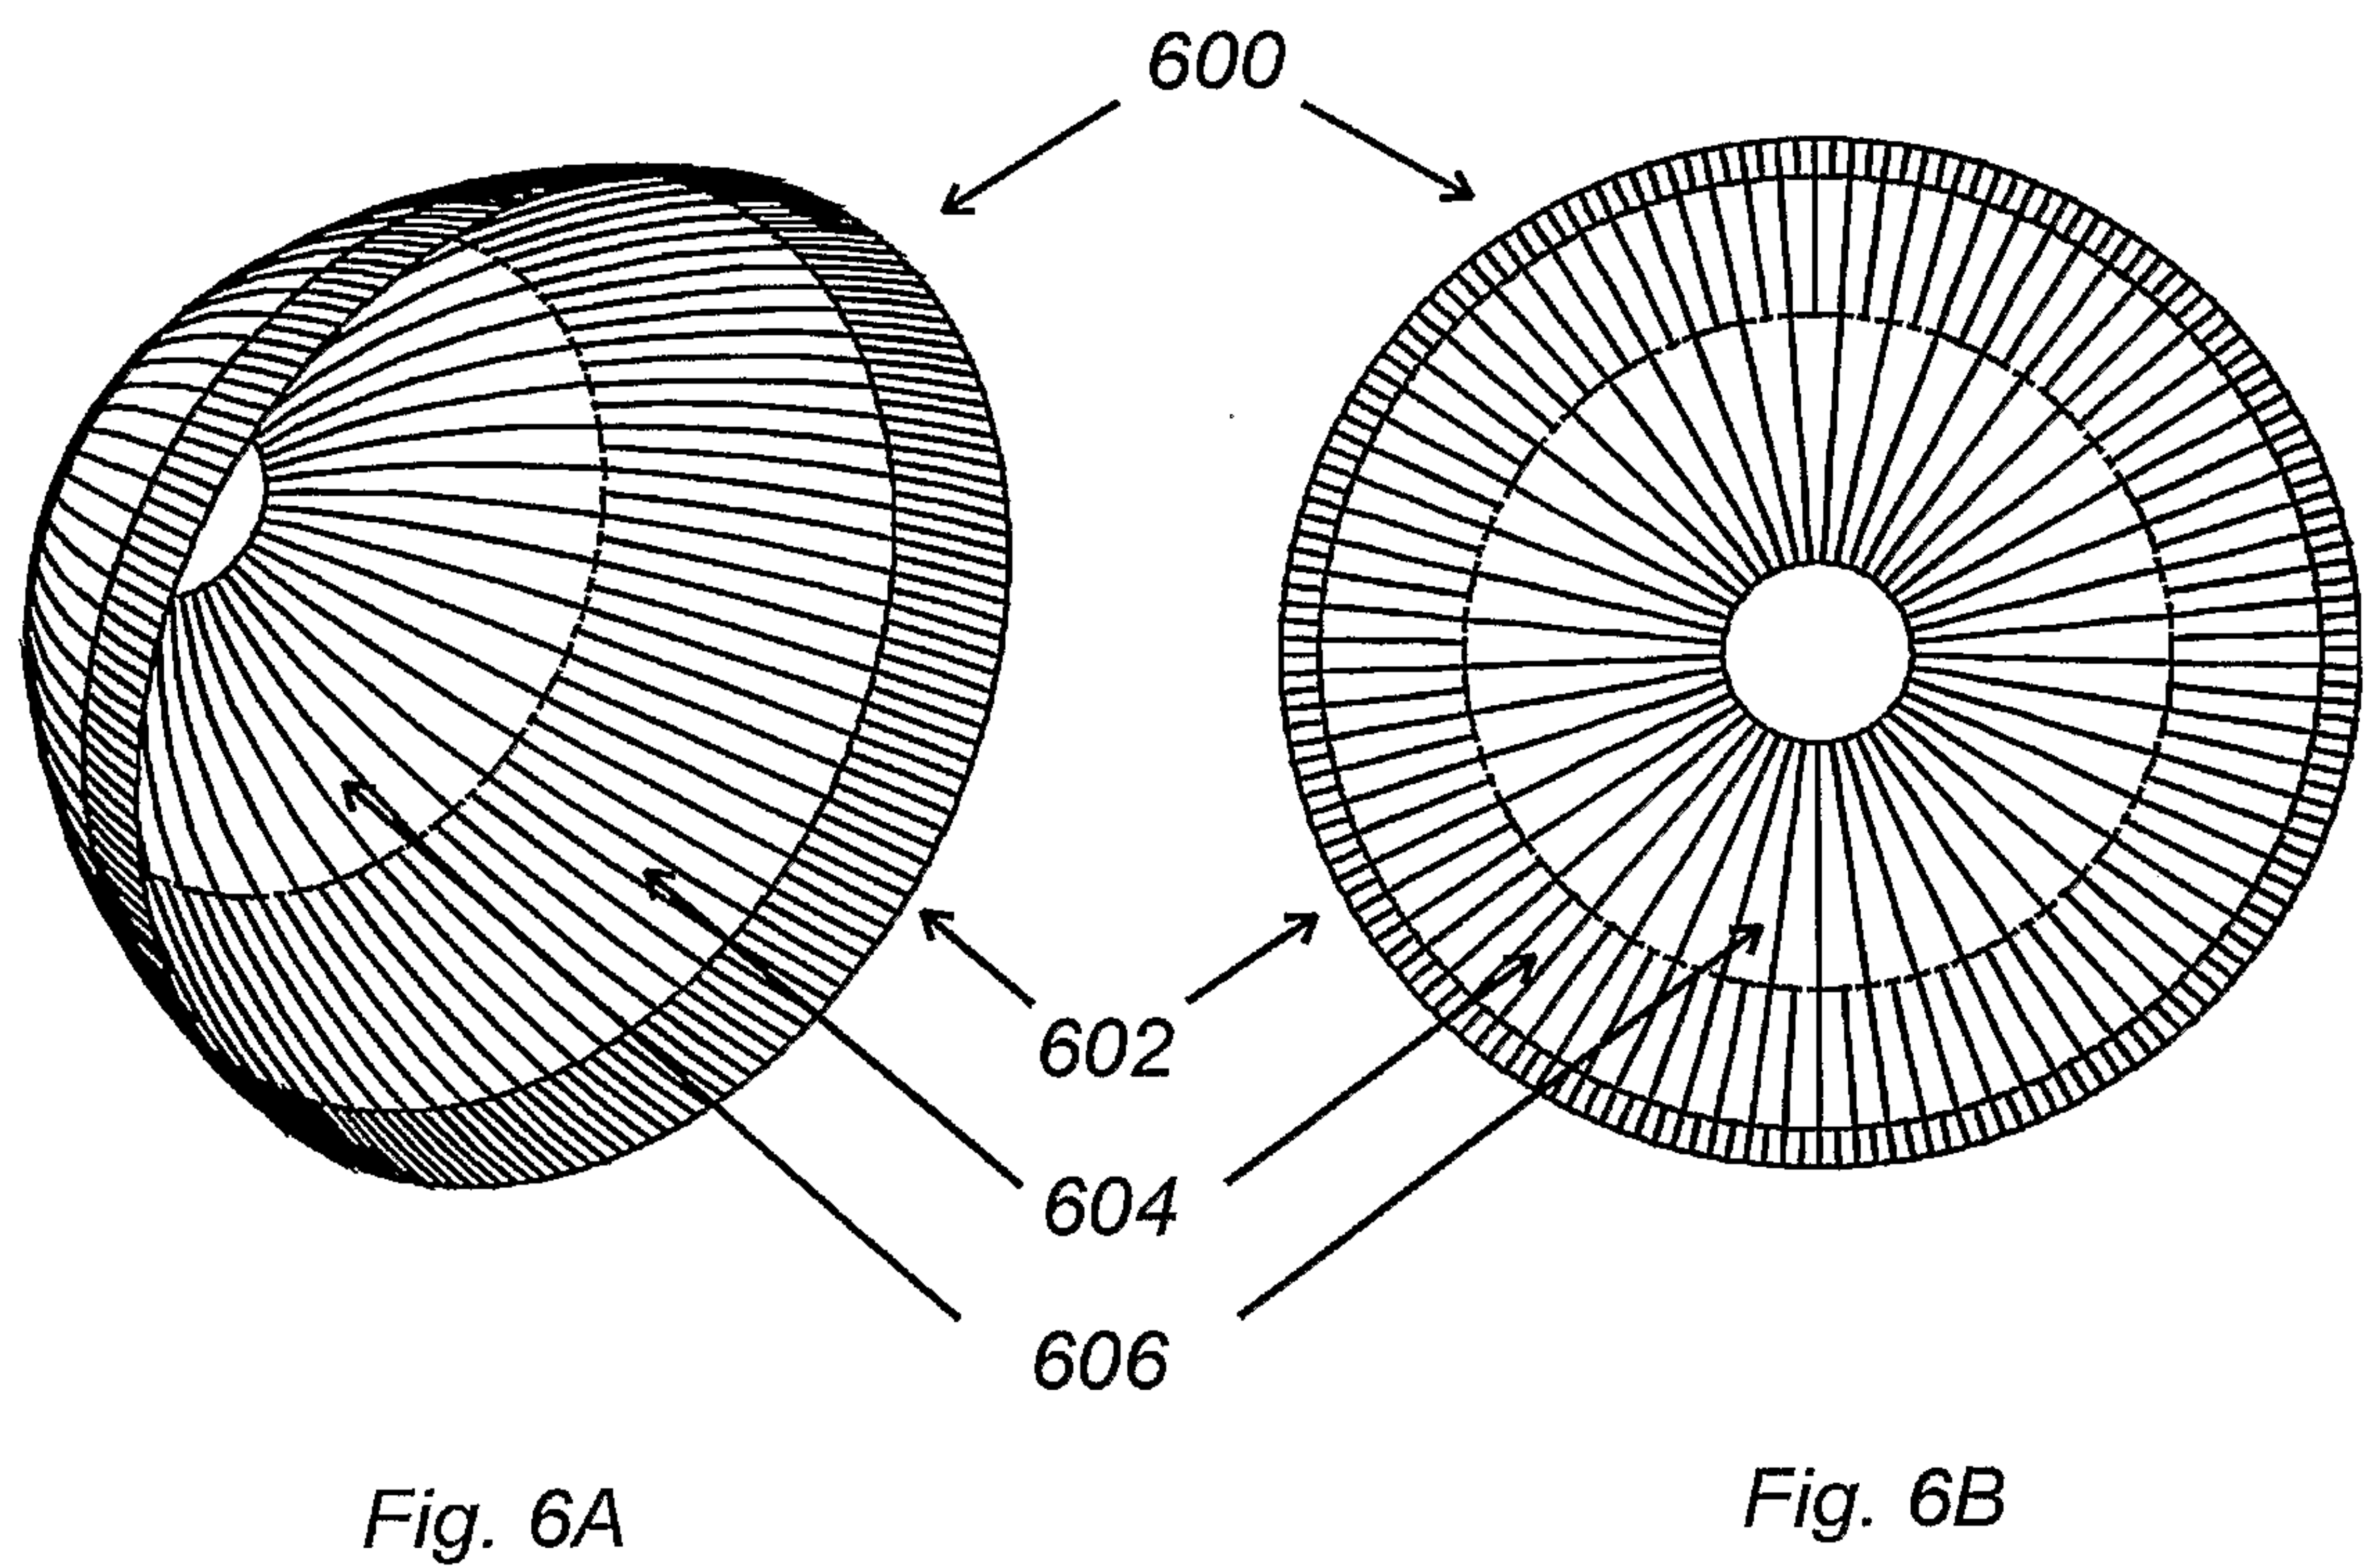


Fig. 6
PRIOR ART

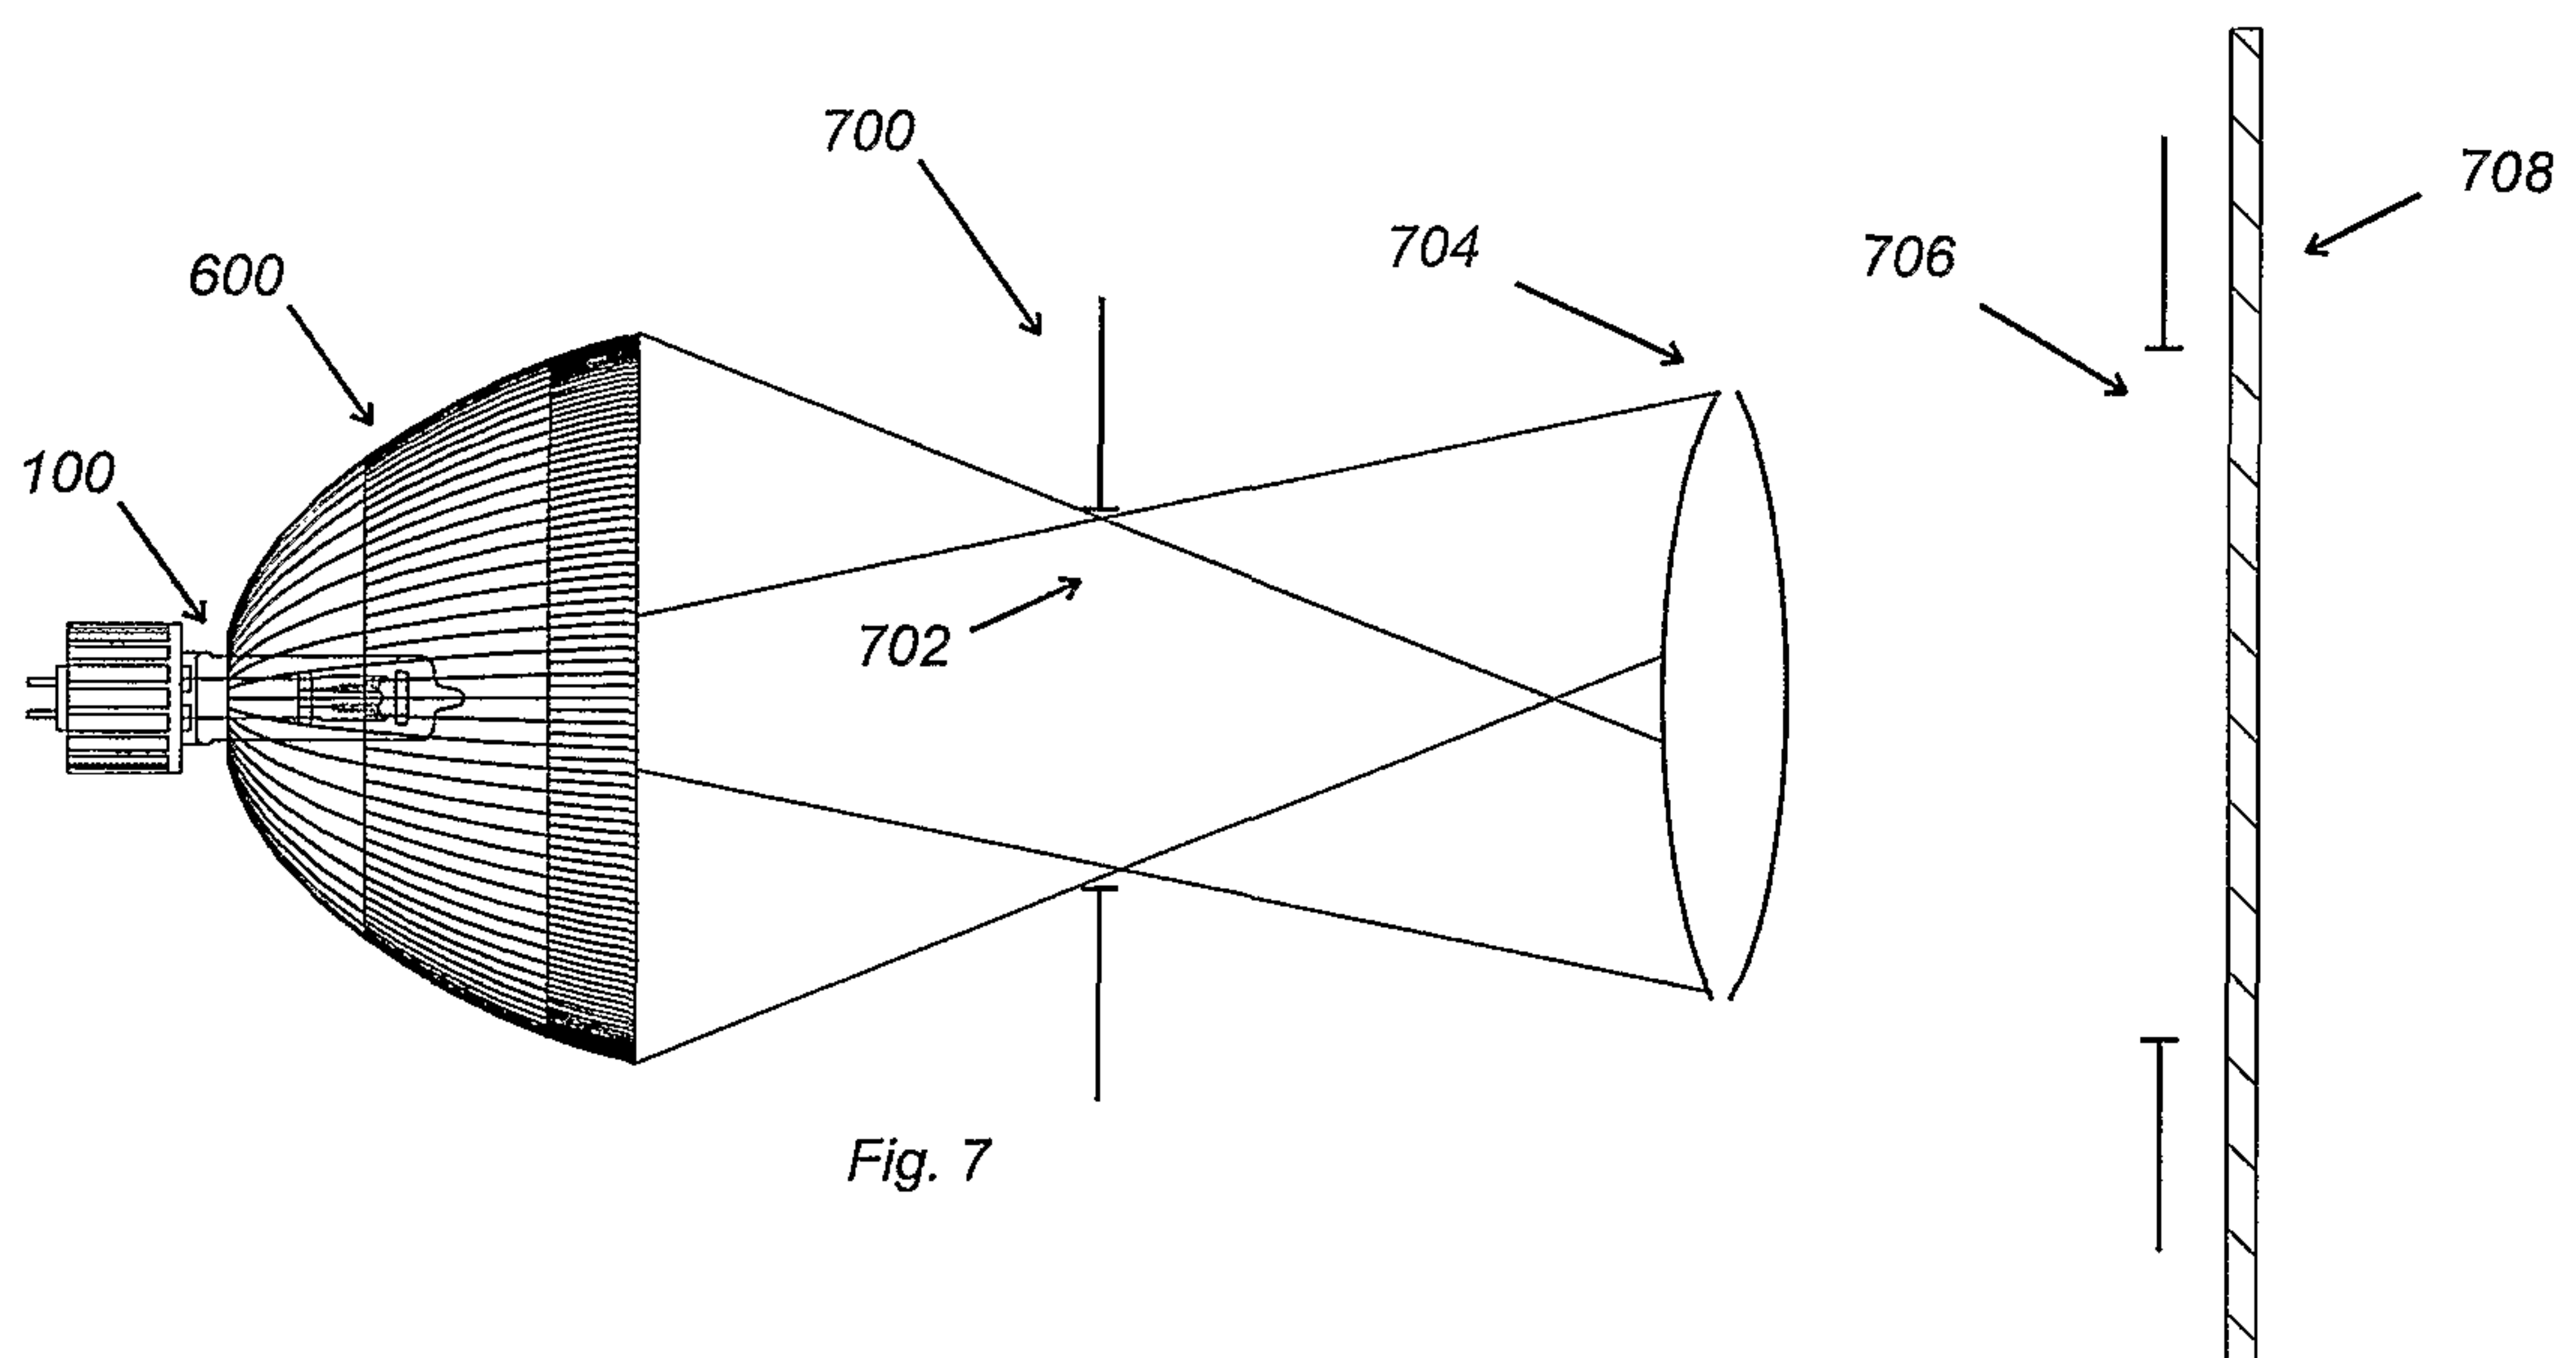
4 / 7

Fig. 7
PRIOR ART

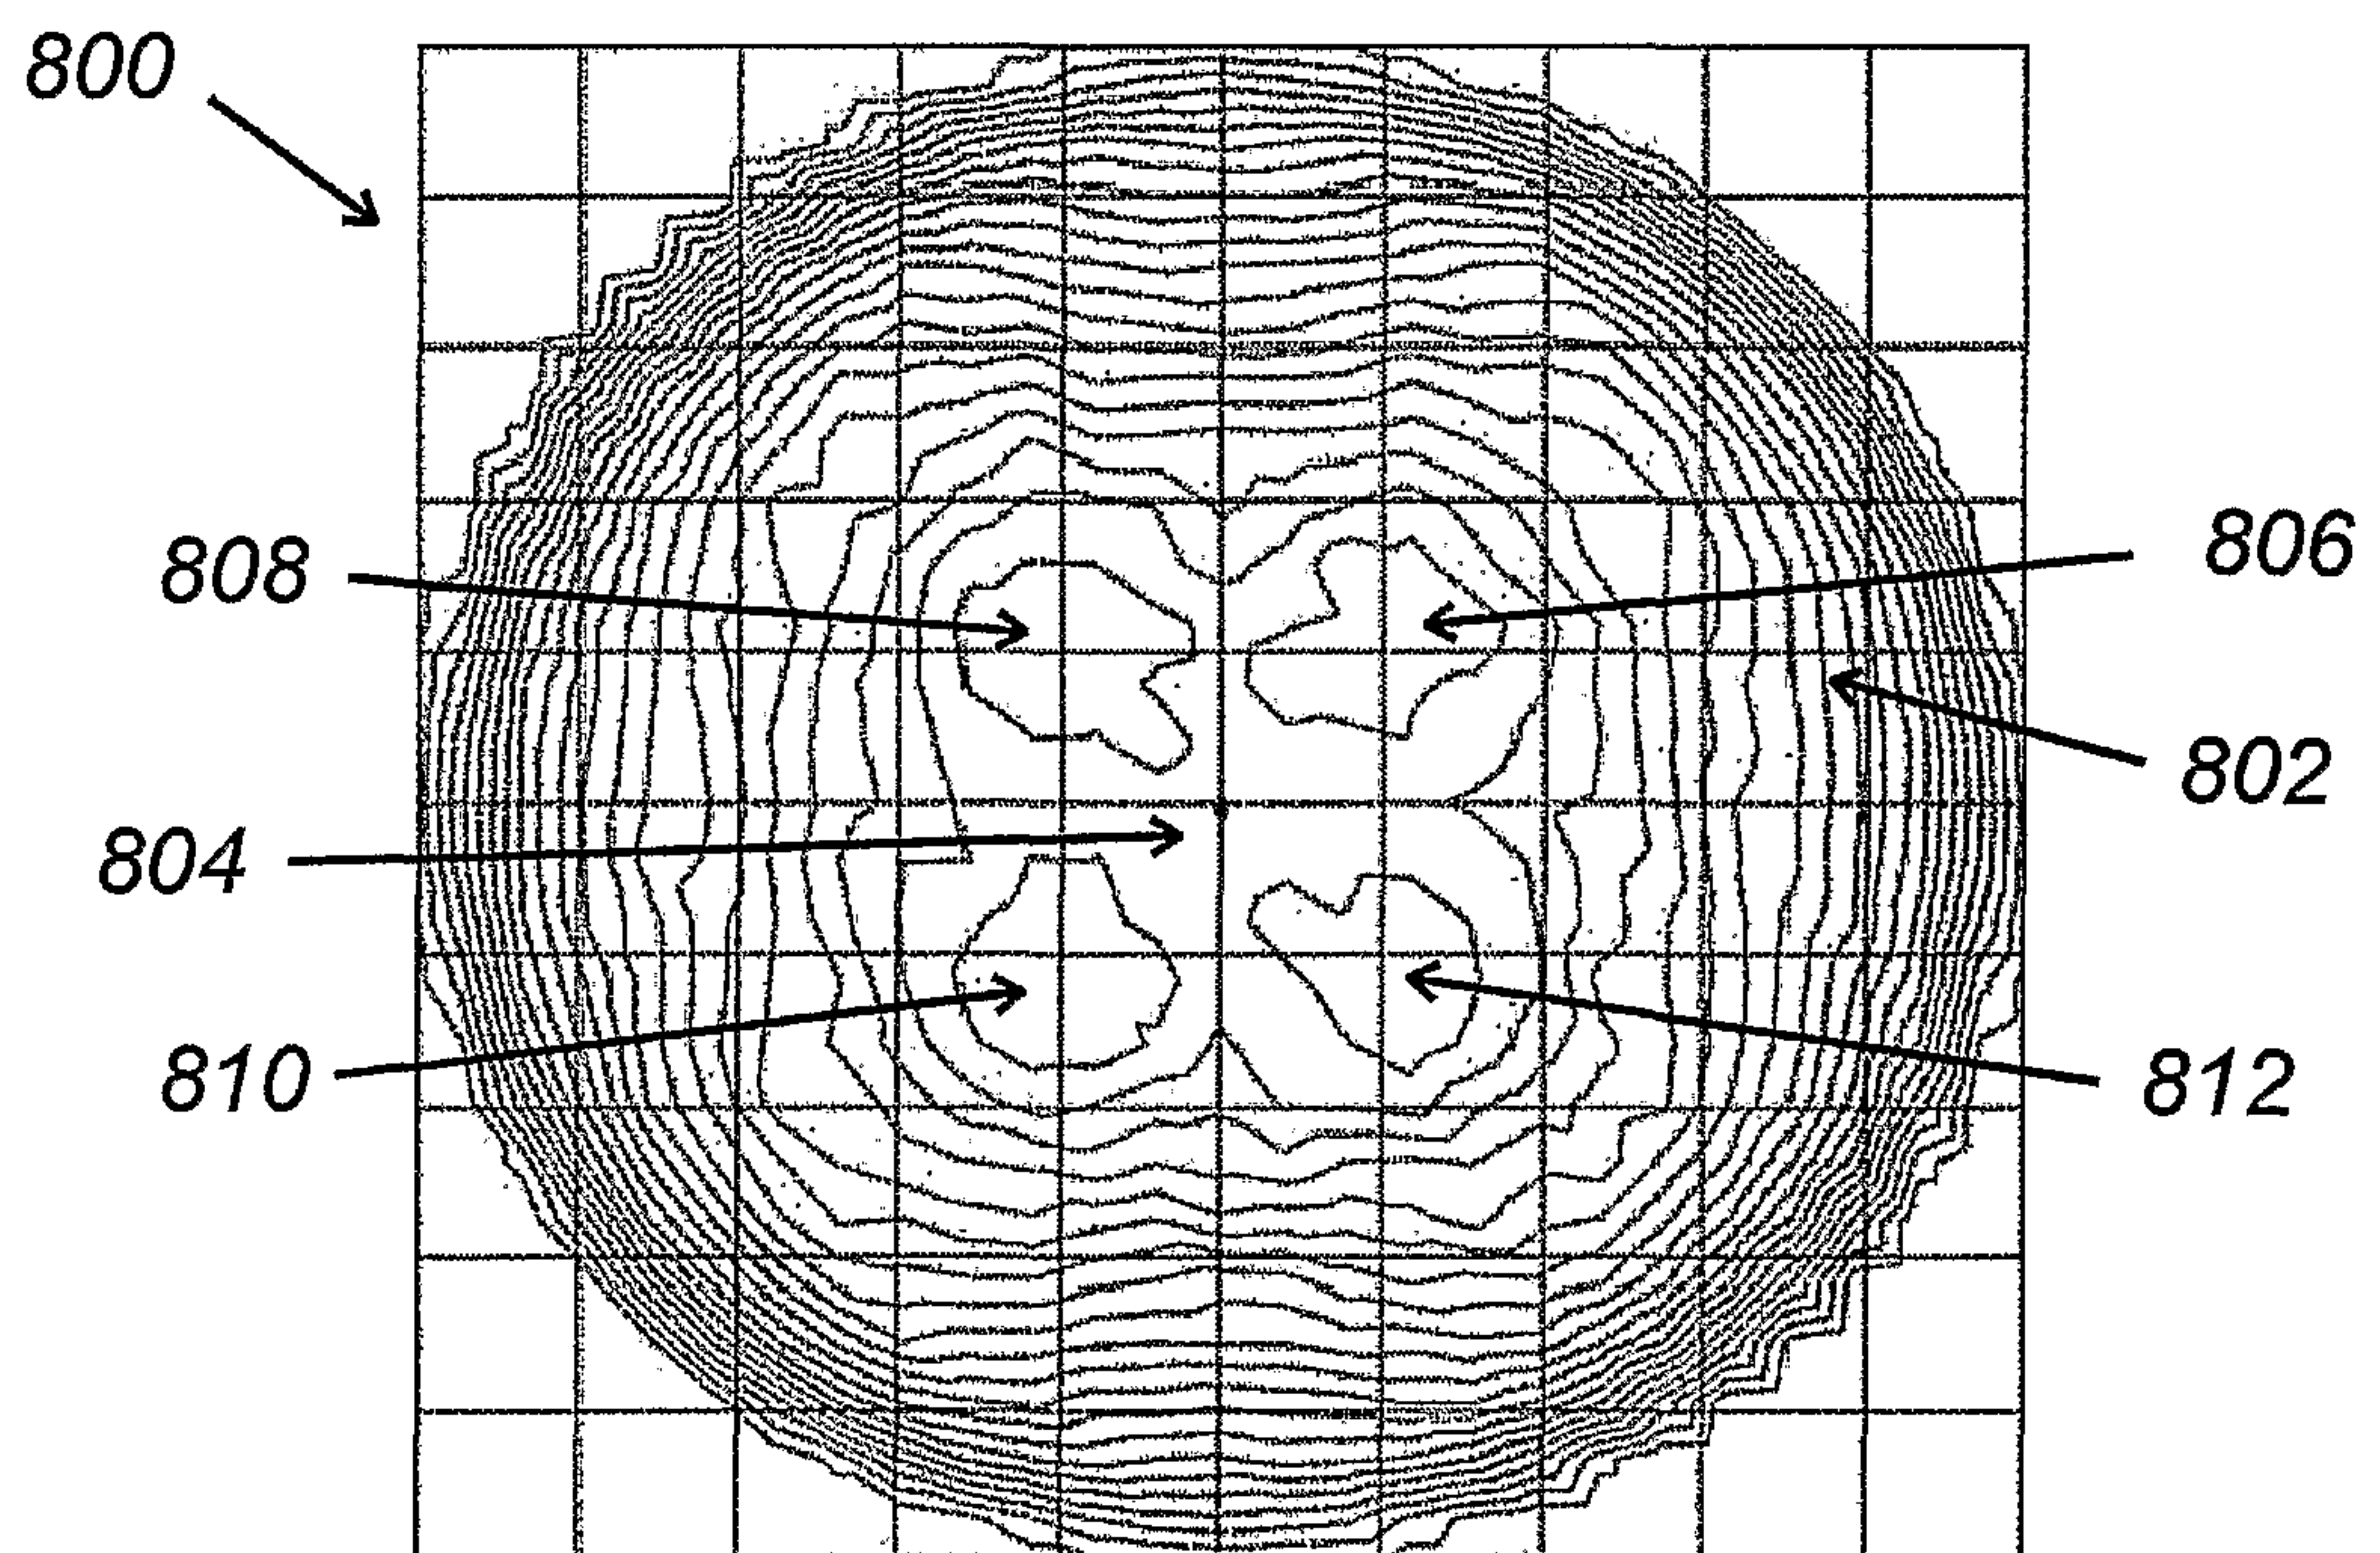
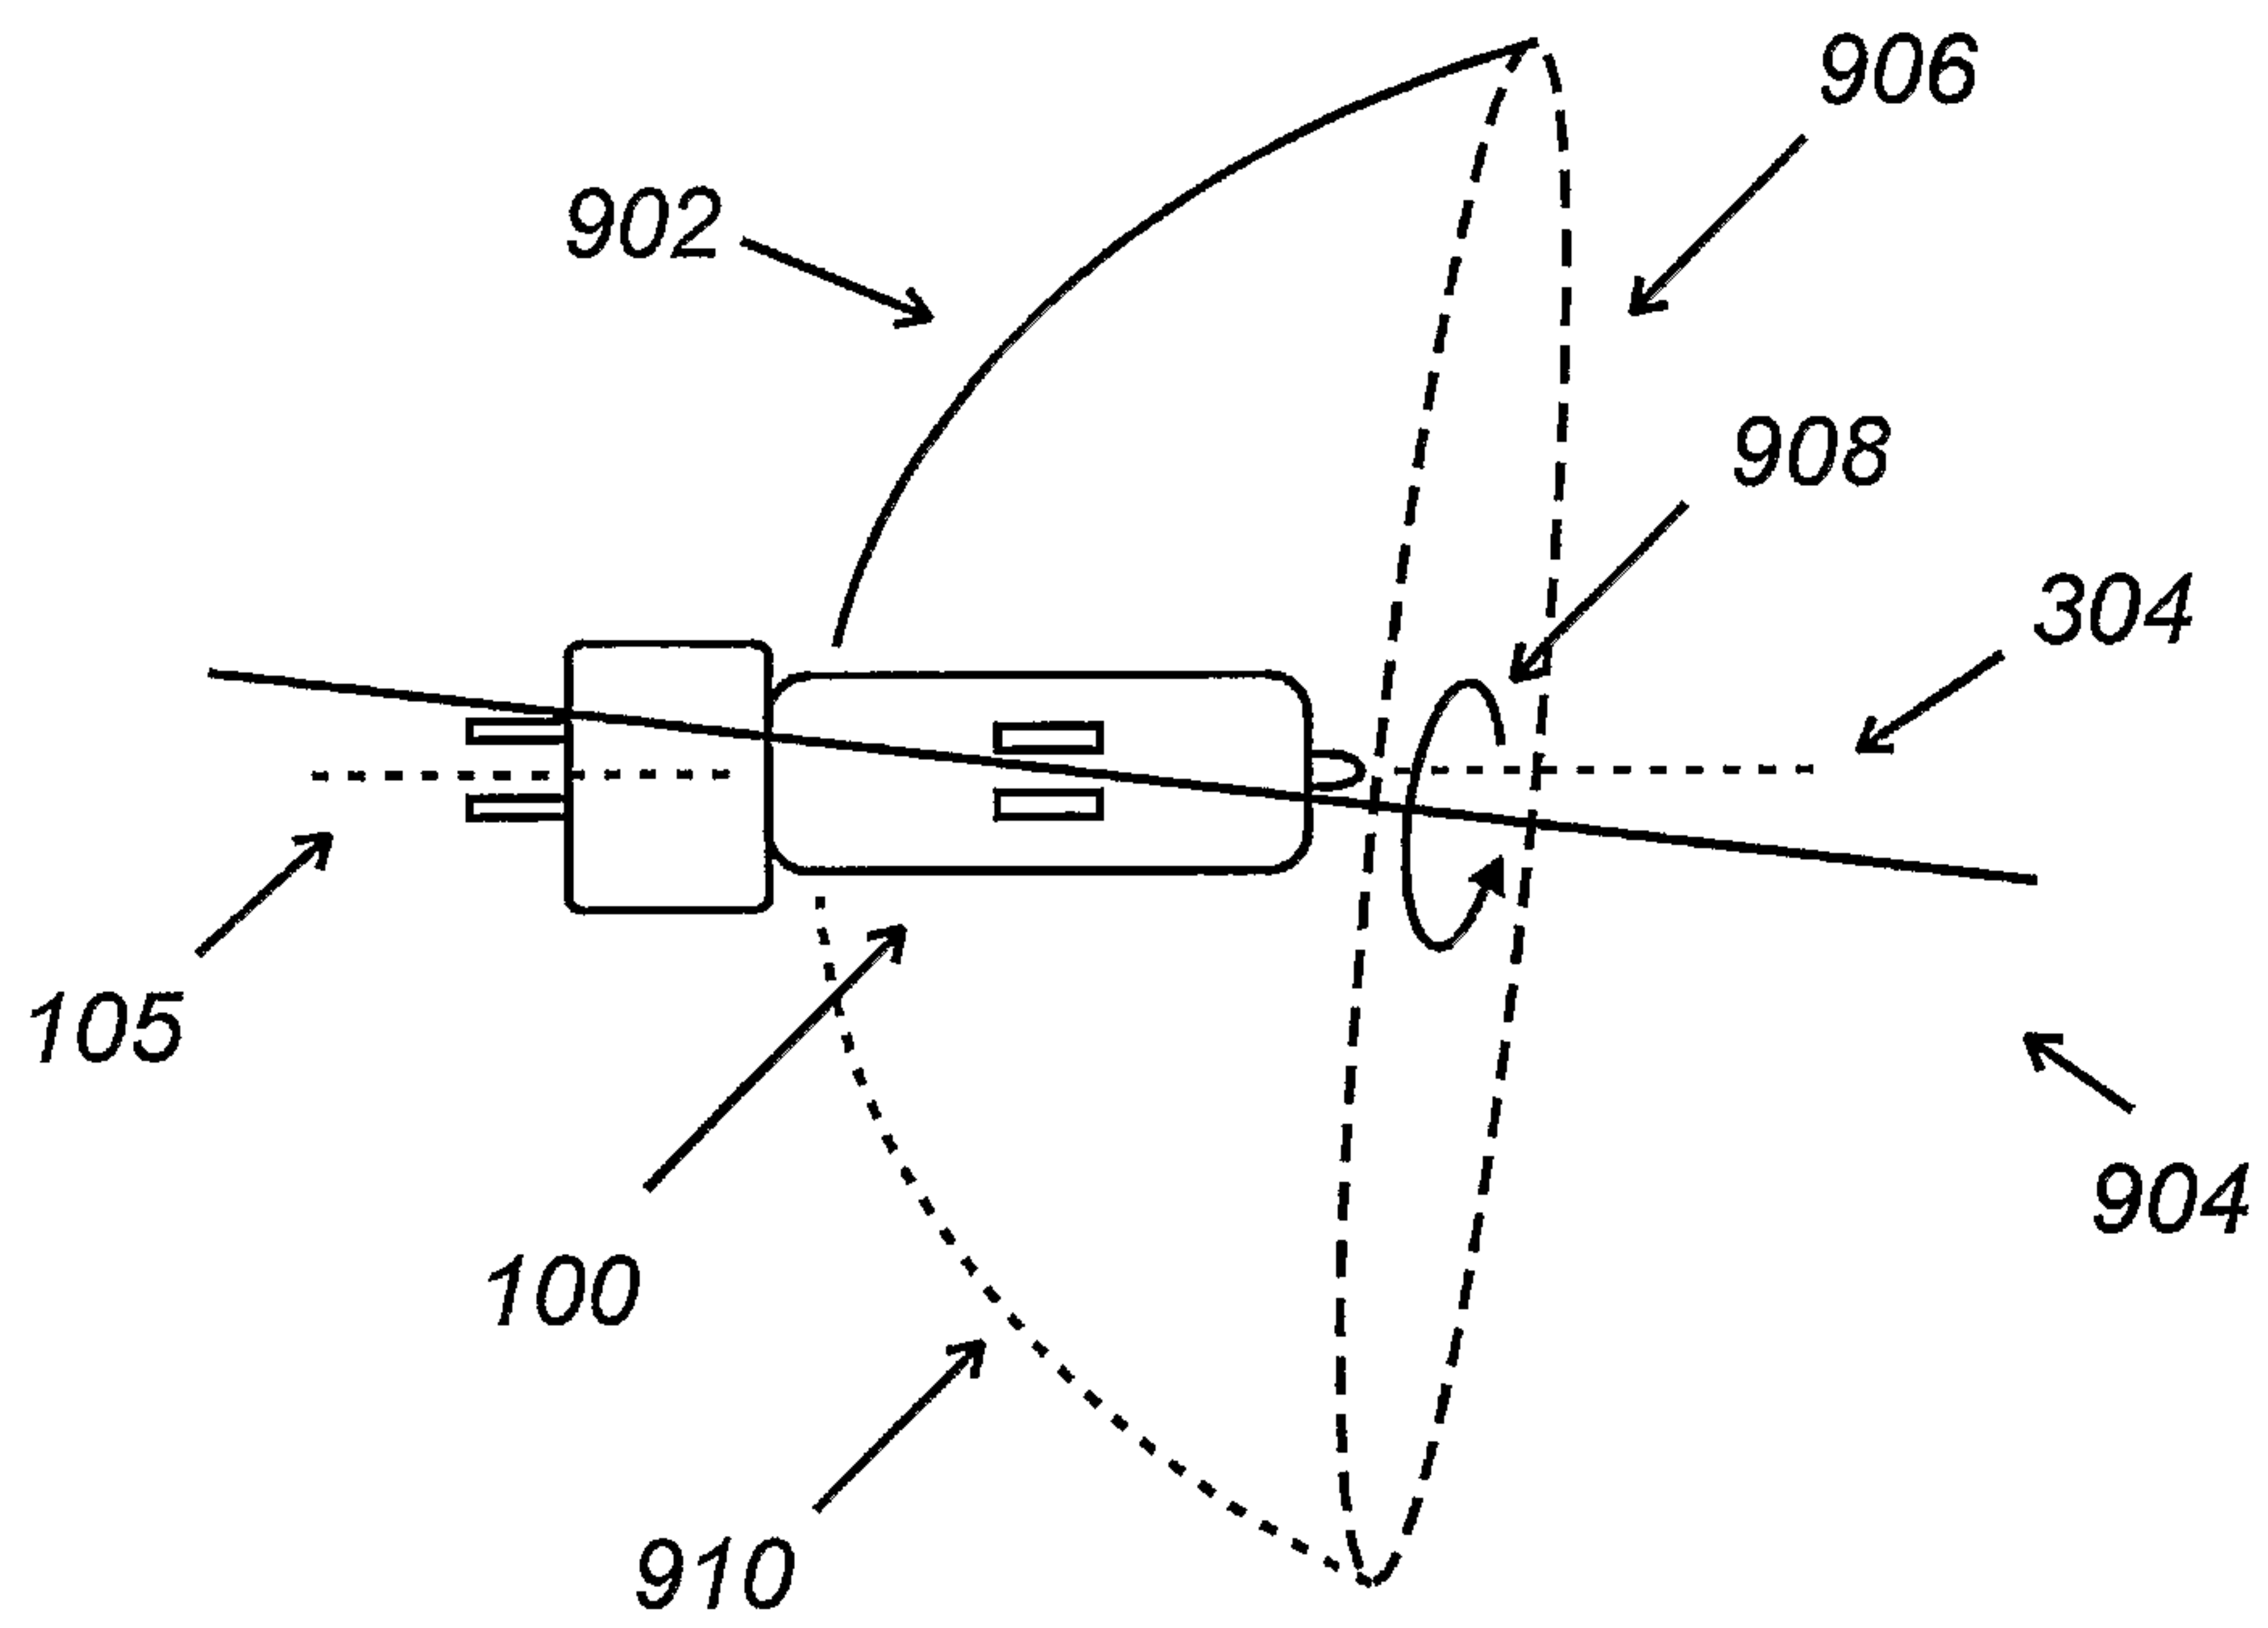
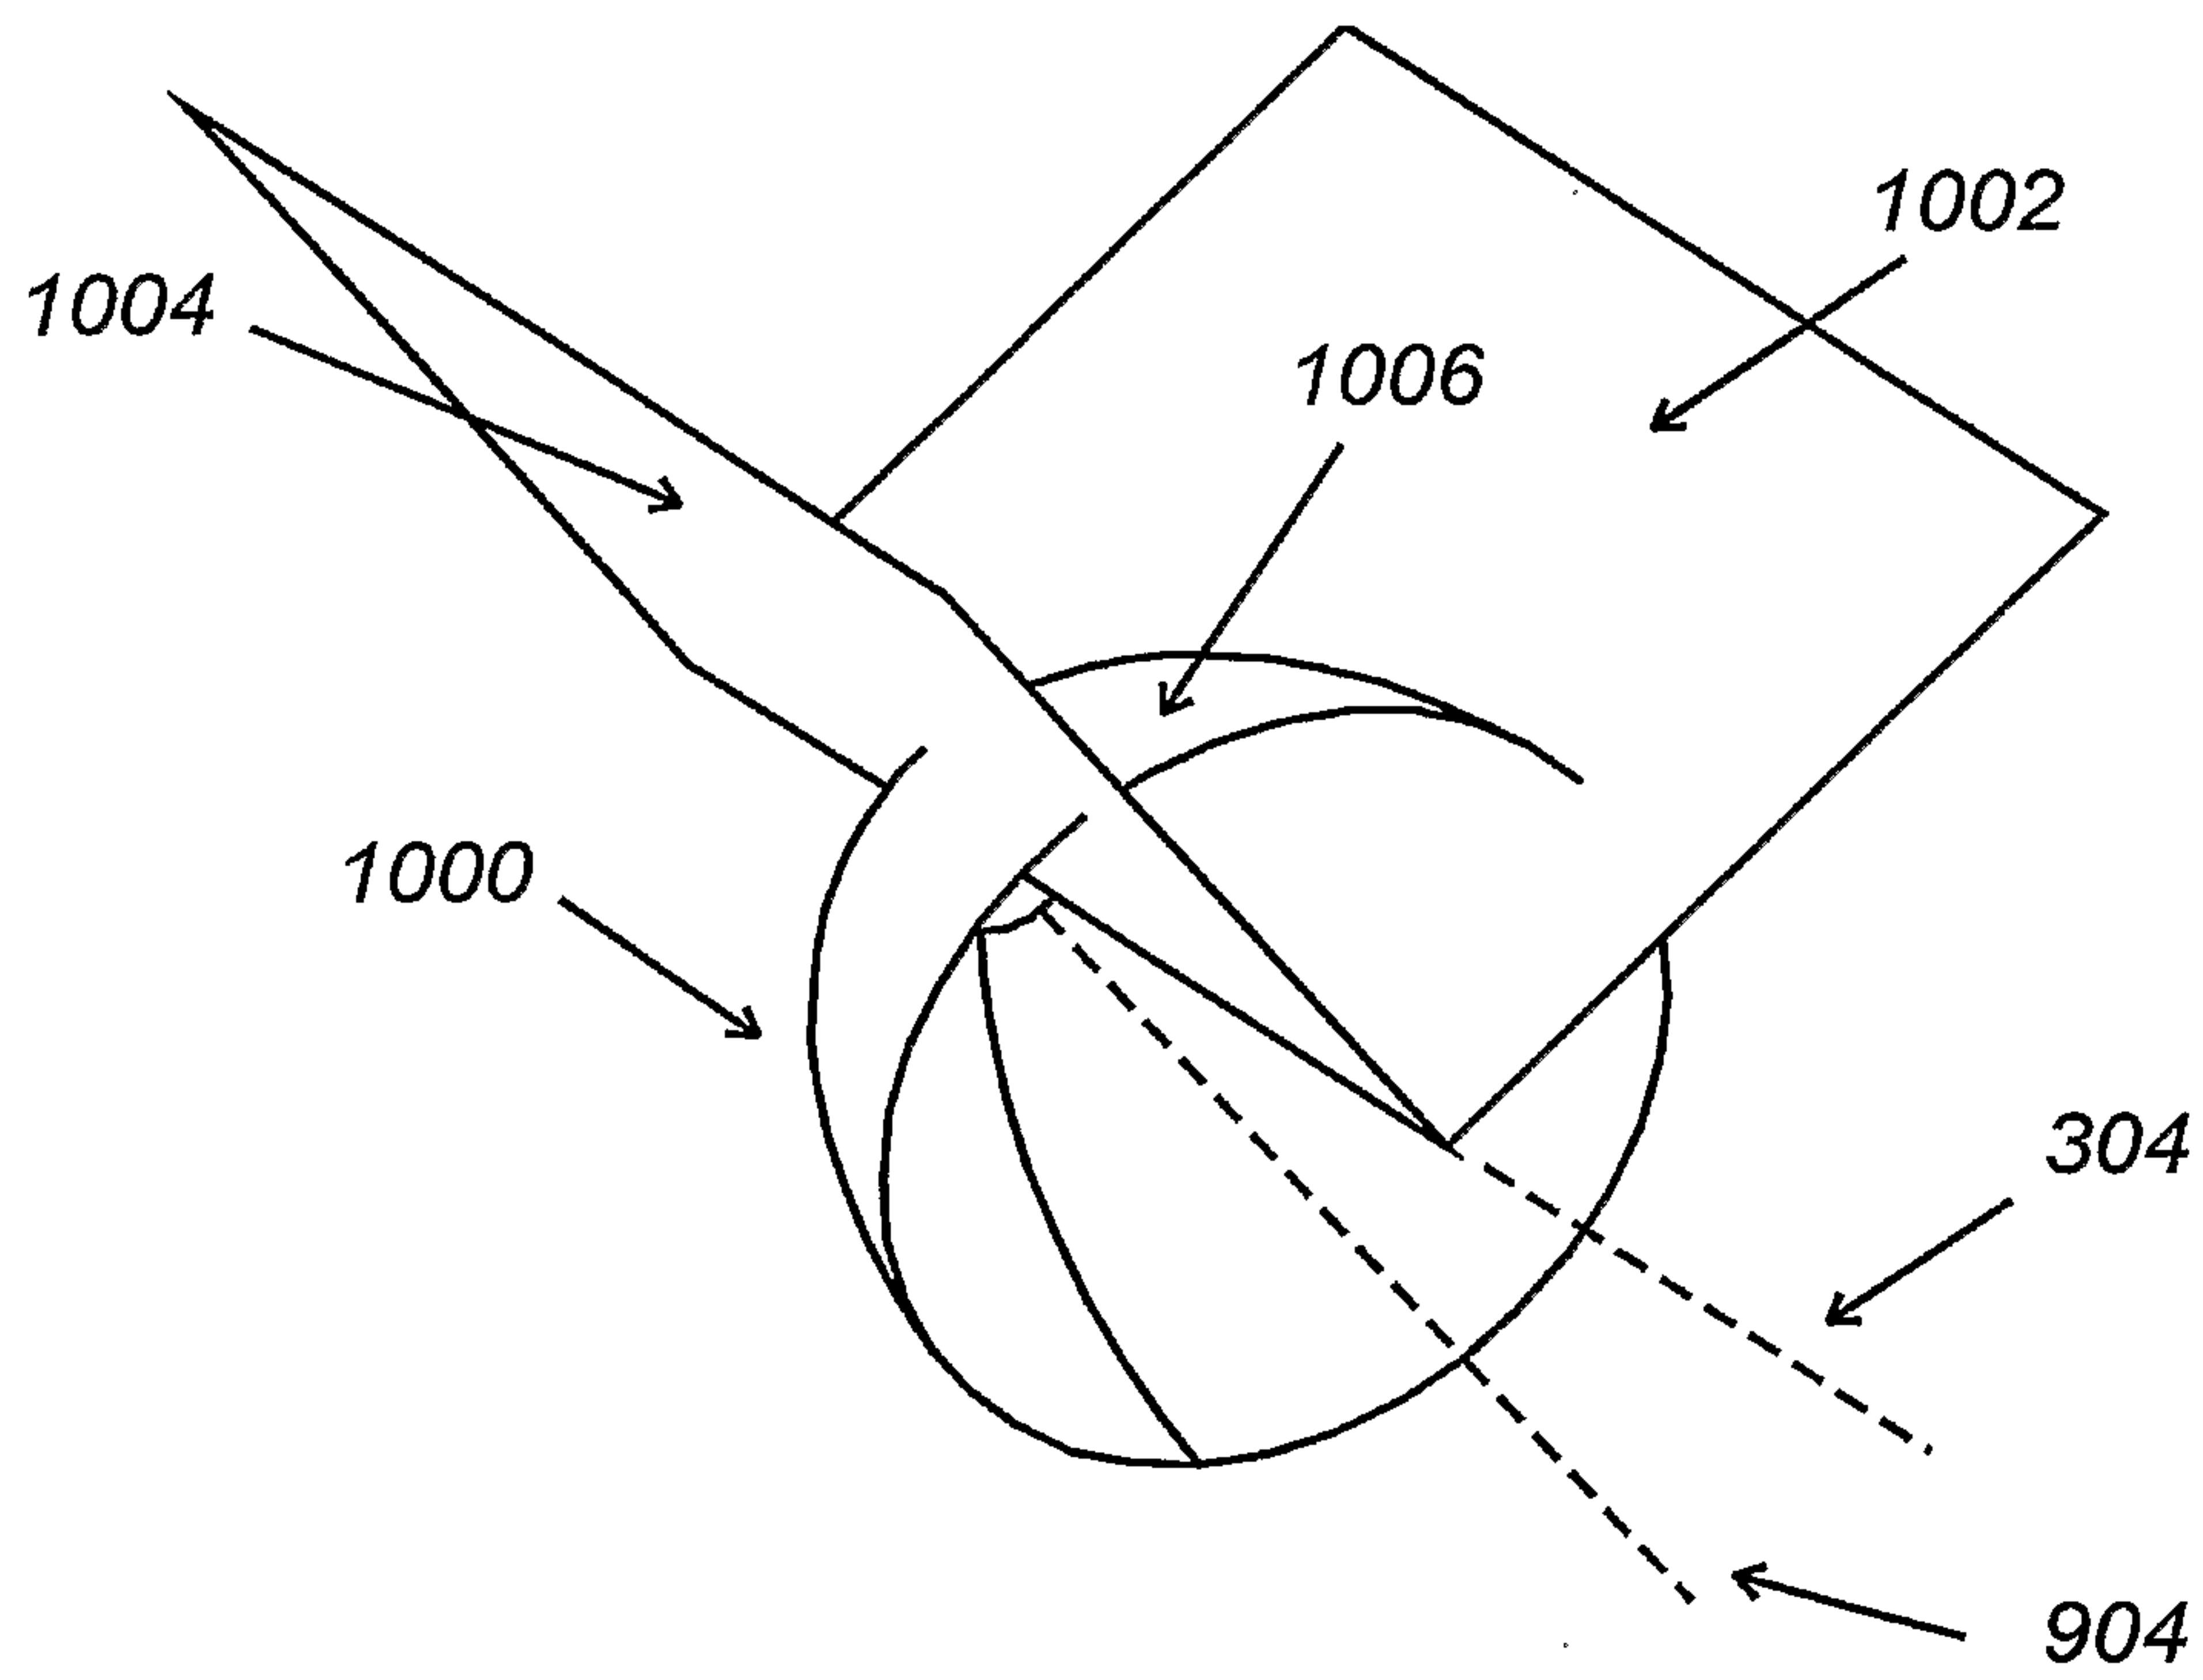


Fig. 8
PRIOR ART

5 / 7*Fig. 9**Fig. 10*



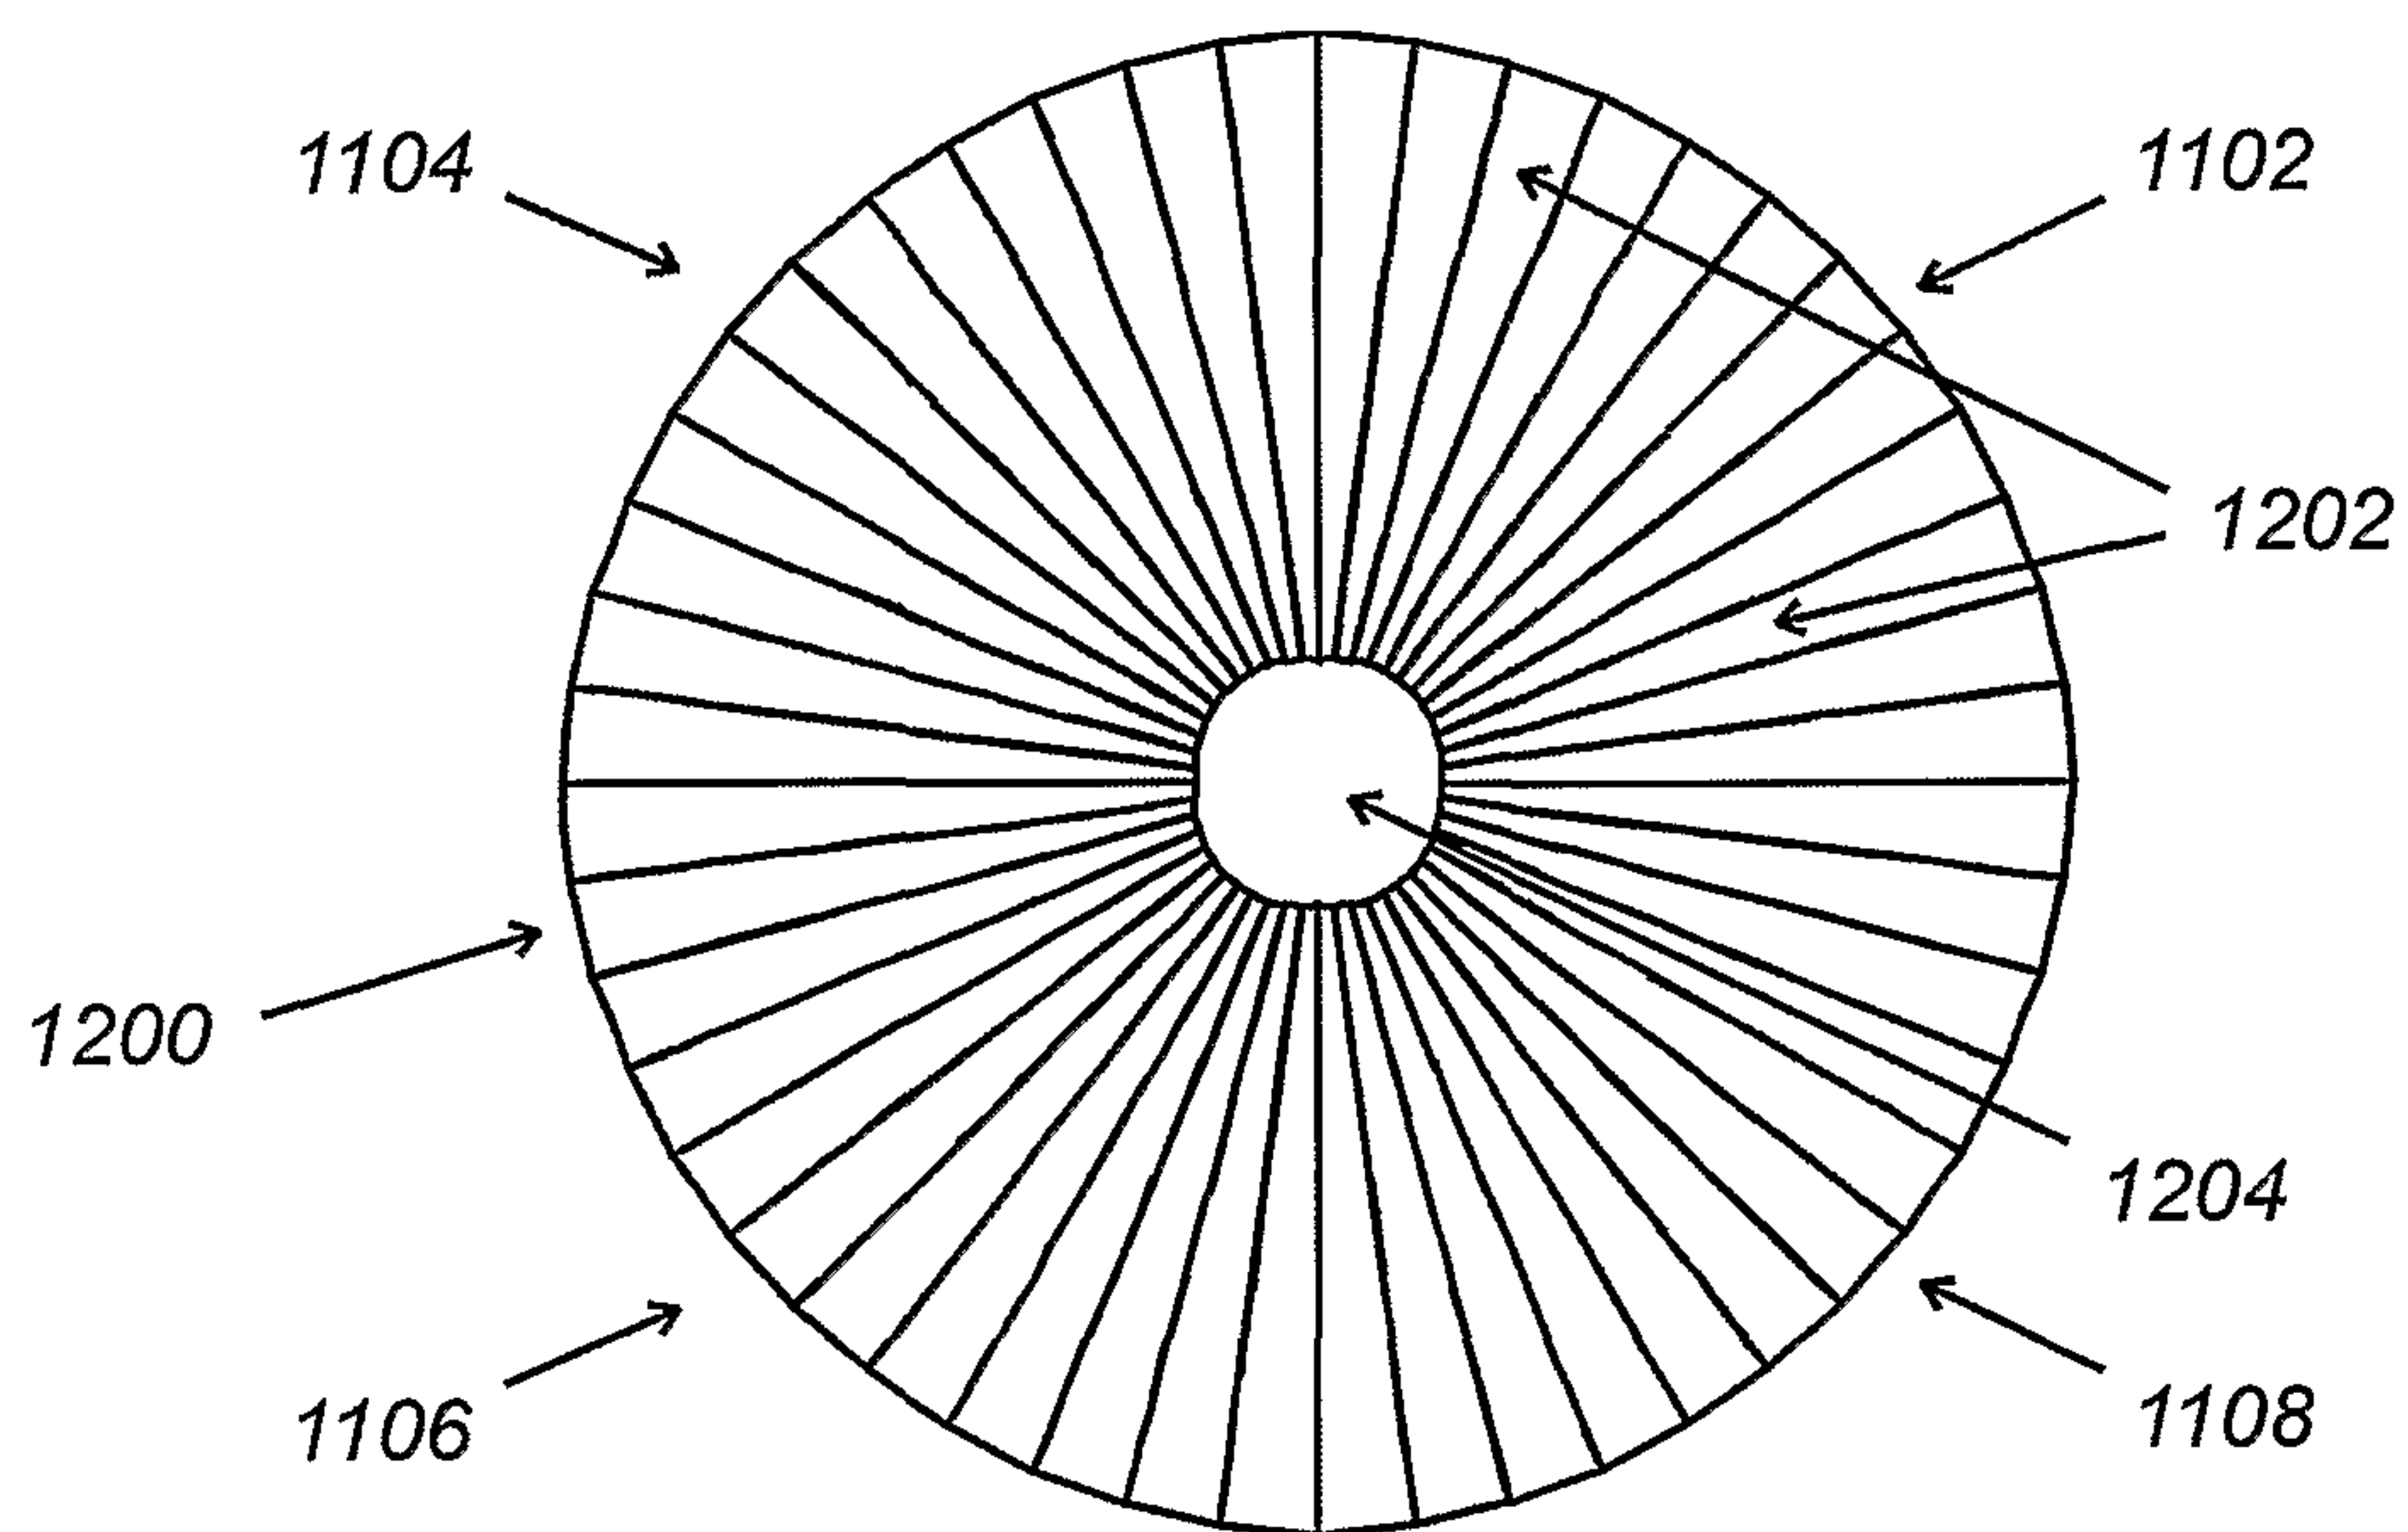
6 / 7

Fig. 12

7 / 7

*Fig. 13*

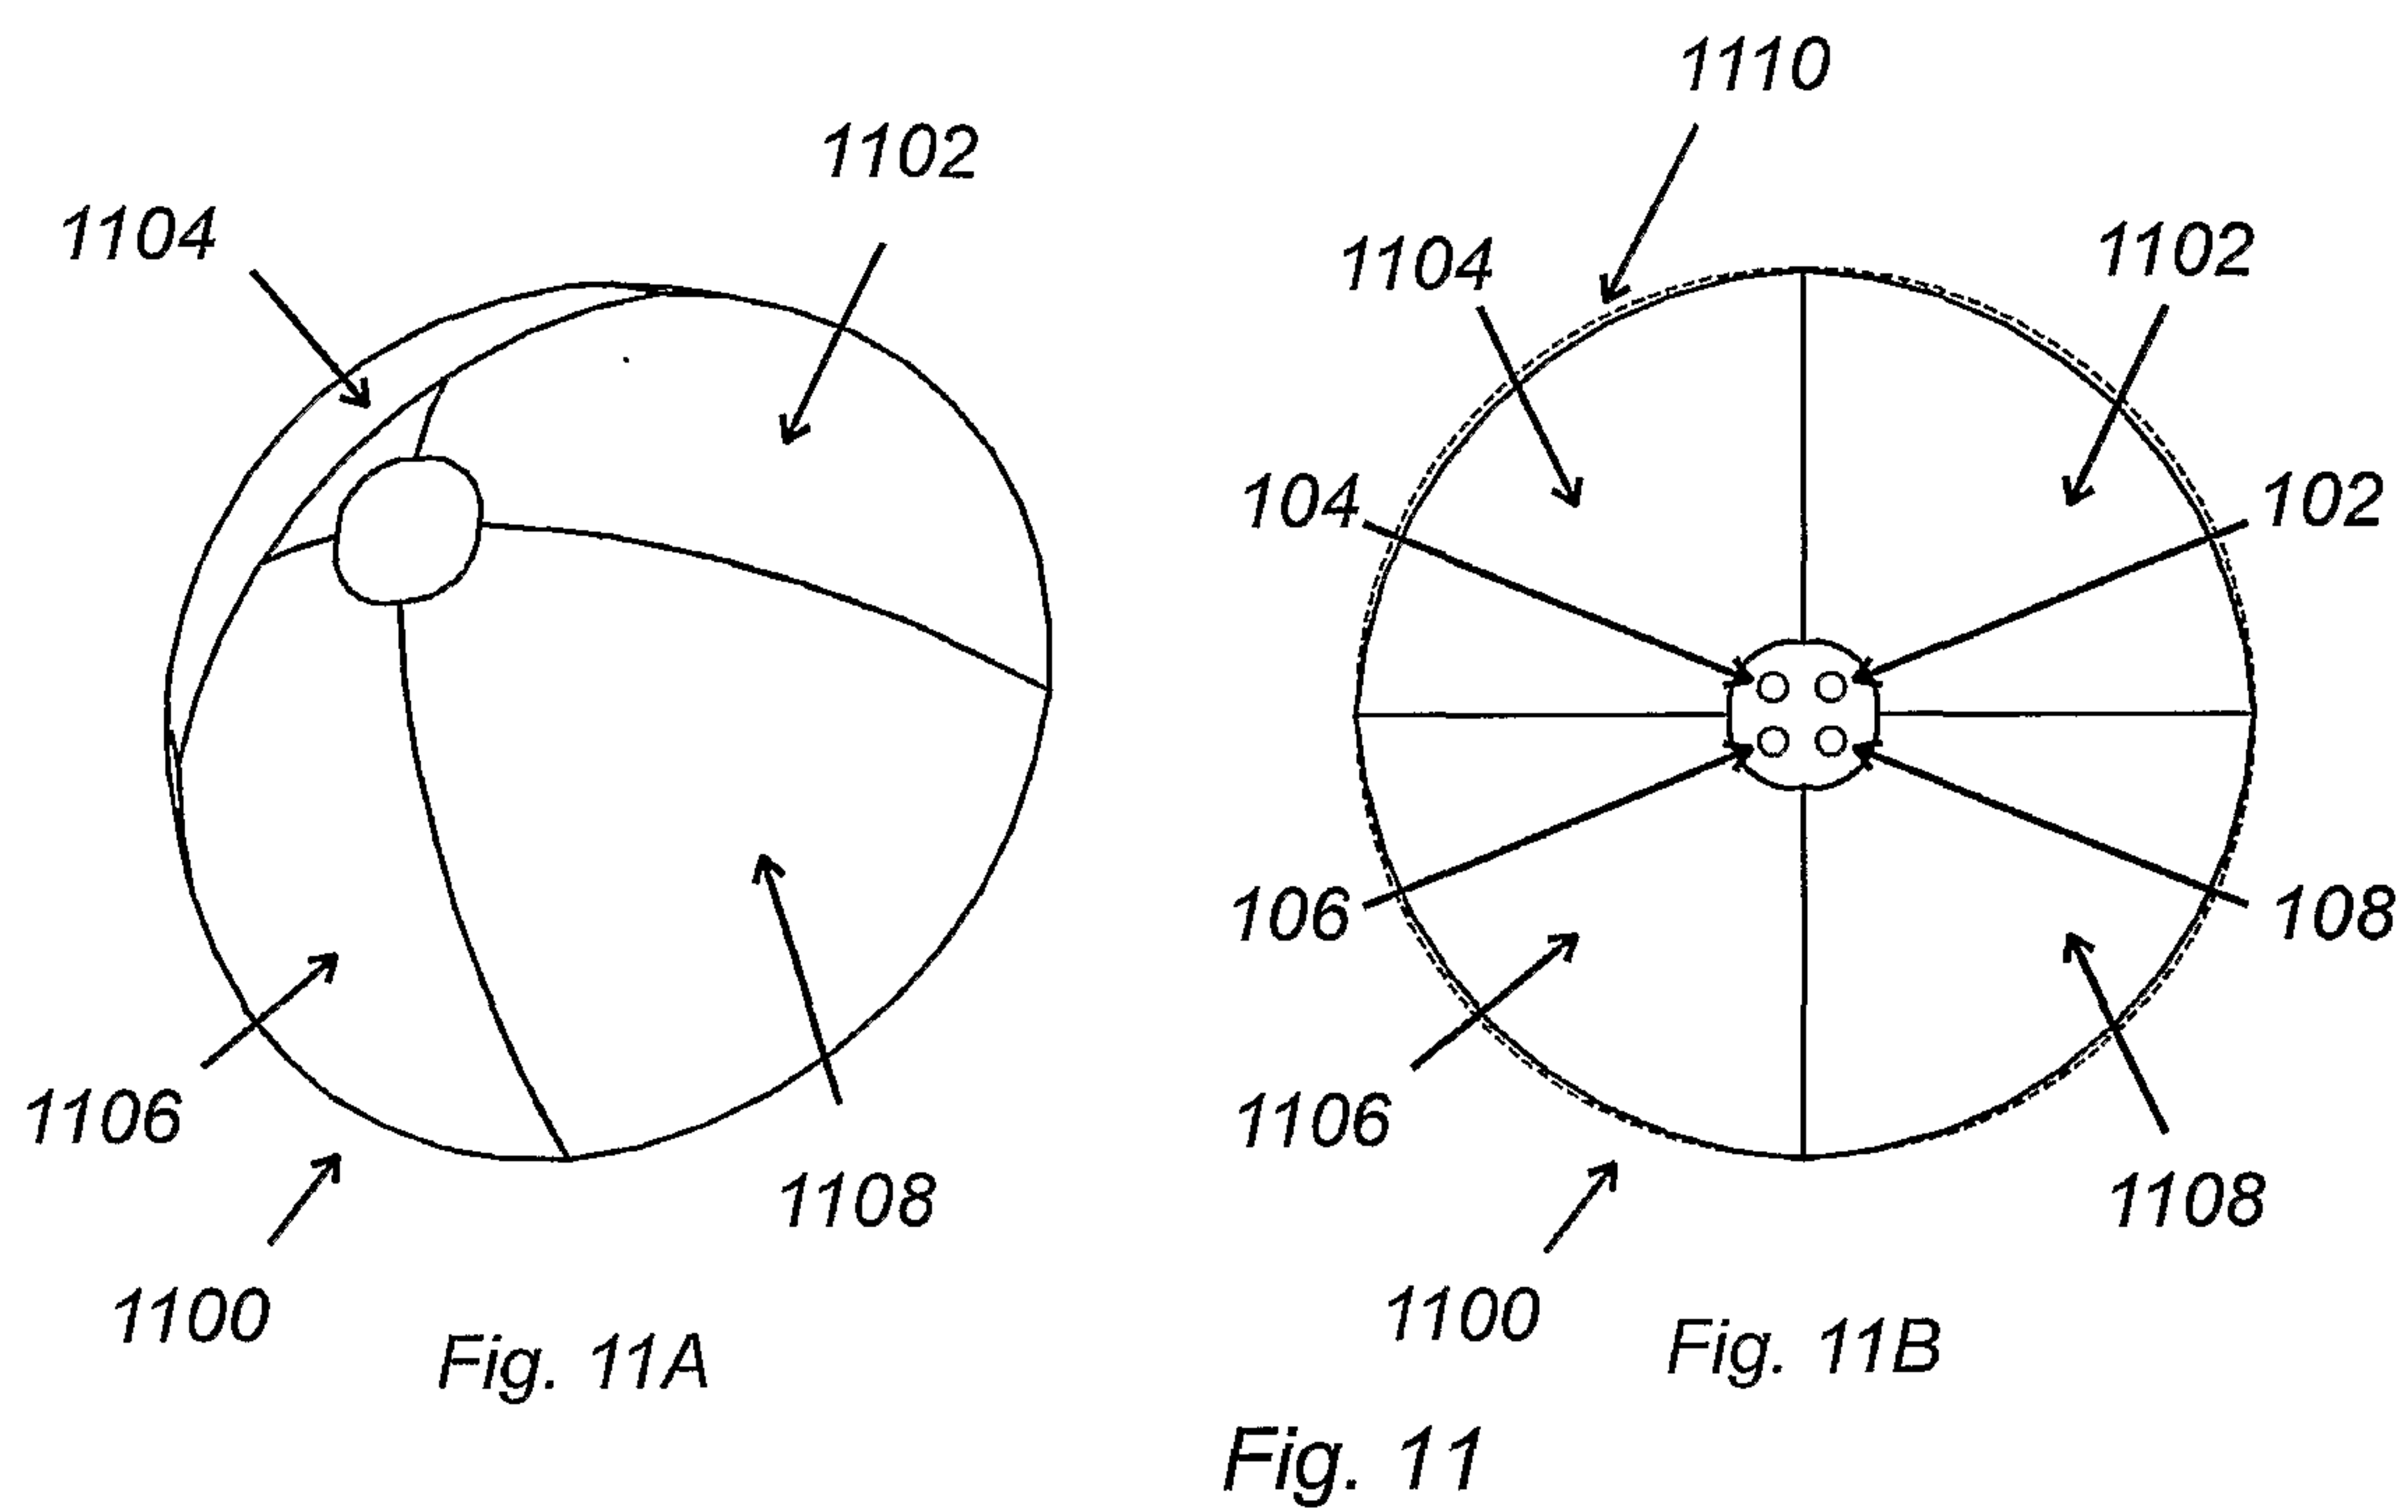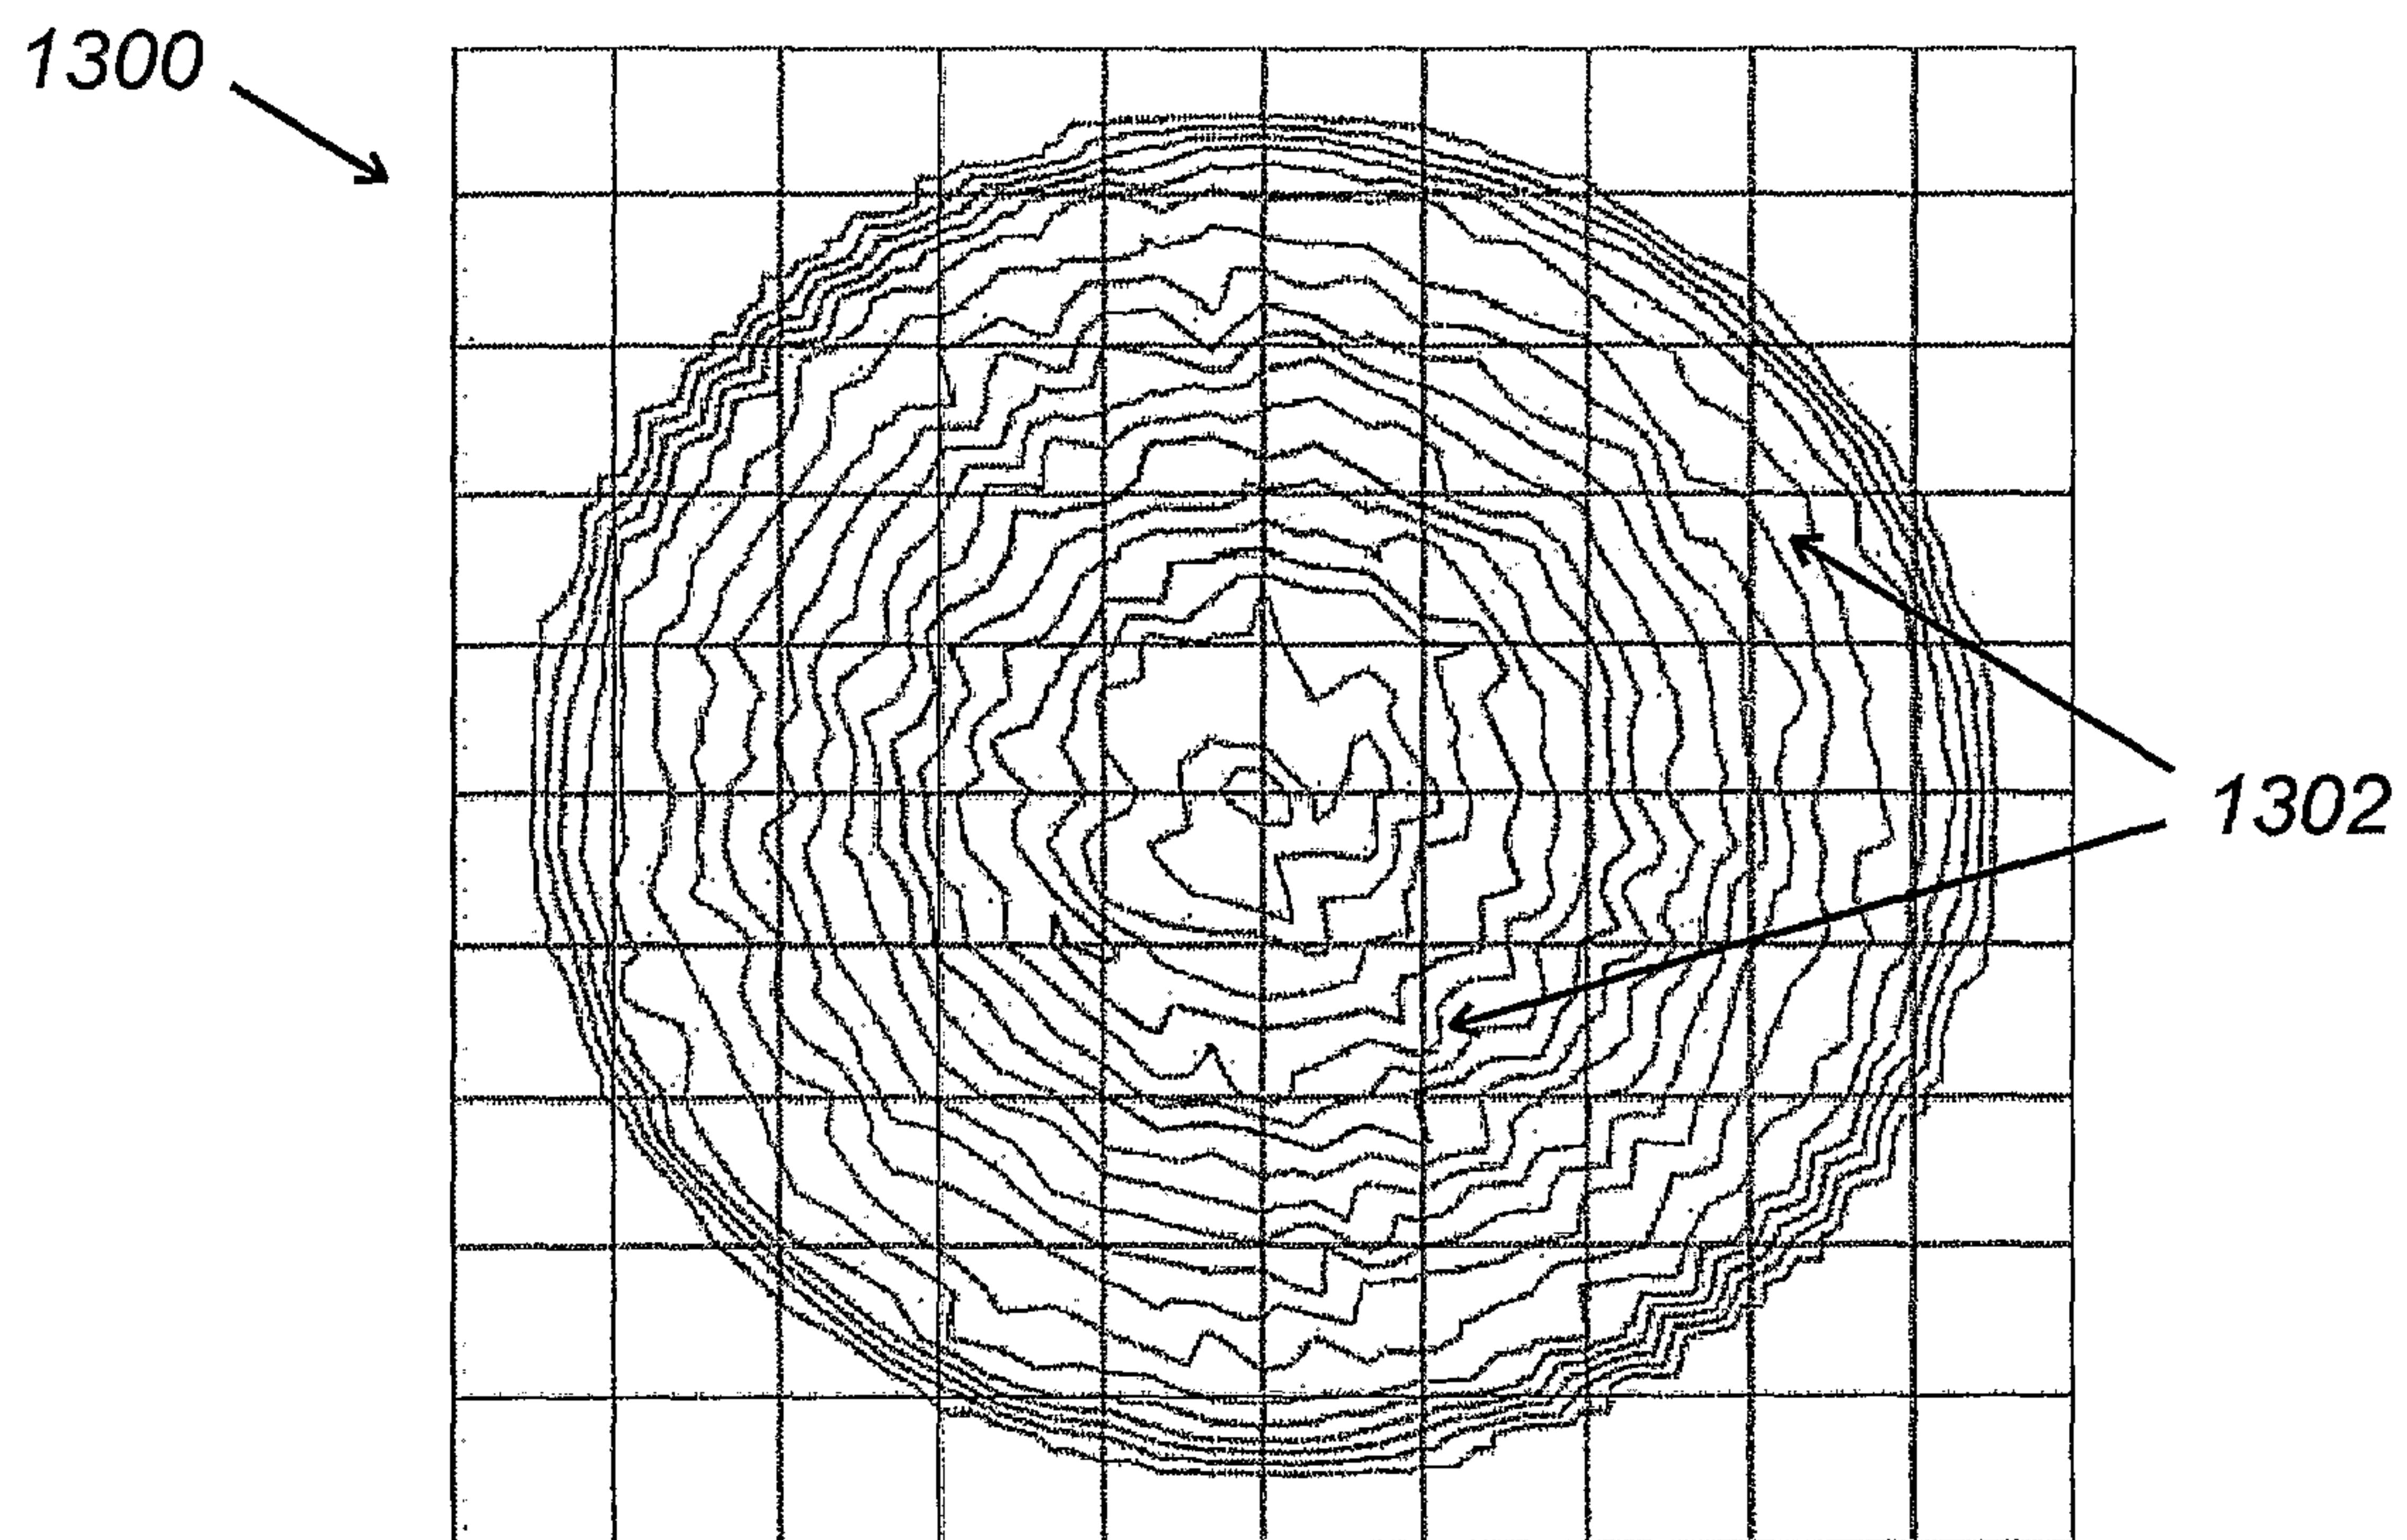